FCC 47 CFR PART 15 SUBPART C AND ANSI C63.4:2009 TEST REPORT

For

Nuvola

Model: NP-1

Trade Name: NANOTECH

Issued for

NanoTech Entertainment

2450 Kruse Drive. San Jose, CA 95131

Issued by

Compliance Certification Services Inc. Hsinchu Lab.

NO. 989-1 Wen Shan Rd., Shang Shan Village, Qionglin Shiang Hsinchu County 30741, Taiwan, R.O.C

> TEL: +886-3-5921698 FAX: +886-3-5921108

http://www.ccsrf.com E-Mail : service@ccsrf.com Issued Date: April 02, 2014





Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF or any government agencies. The test results of this report relate only to the tested sample identified in this report.

on Services Inc. Refer No. : T131106D02-RP1-1 C ID : 2AB5MNP-11001 Report No. : T140326D06-B-RP1-1

Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	04/02/2014	Initial Issue	All Page 80	Michelle Chiu

TABLE OF CONTENTS

TITLE PAGE NO. 1. TEST REPORT CERTIFICATION4 2. EUT DESCRIPTION5 3. DESCRIPTION OF TEST MODES5-7 4. TEST METHODOLOGY8 5. FACILITIES AND ACCREDITATION......8 5.3 MEASUREMENT UNCERTAINTY9 6. SETUP OF EQUIPMENT UNDER TEST......10 7. FCC PART 15.247 REQUIREMENTS......11 7.1 20dB BANDWIDTH FOR HOPPING11-16 7.2 MAXIMUM PEAK OUTPUT POWER17-18 7.4 HOPPING CHANNEL SEPARATION.......21-26 7.5 NUMBER OF HOPPING FREQUENCY USED27-29 7.7 CONDUCTED SPURIOUS EMISSION45-51 7.8 RADIATED EMISSION.......52-70 APPENDIX I MAXIMUM PERMISSIBLE EXPOSURE.......76-77 APPENDIX II SETUP PHOTOS78-80

TEST REPORT CERTIFICATION

Applicant : NanoTech Entertainment

Address : 2450 Kruse Drive. San Jose, CA 95131

Equipment Under Test: Nuvola Model : NP-1

Trade Name : NANOTECH

Tested Date : November 05 ~ 18, 2013 ; March 26 ~ April 02,2014

APPLICABLE STANDARD			
Standard Test Result			
FCC Part 15 Subpart C AND ANSI C63.4:2009	PASS		

WE HEREBY CERTIFY THAT: The above equipment has been tested by Compliance Certification Services Inc., and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Approved by:

Sb. Lu

Sr. Engineer

Reviewed by:

Sr. Engineer

2. EUT DESCRIPTION

Product Name	Nuvola	
Model Number	NP-1	
Identify Number	T140326D06-B	
Received Date	November 05, 2013	
Frequency Range	2402MHz to 2480MHz f = 2402 + nMHz, n = 0,78	
Transmit Power	9.75 dBm (0.0094W)	
Channel Spacing	1MHz	
Channel Number	79 Channels	
Transmit Data Rate	GFSK (1Mbps), π /4-DQPSK (2Mbps), 8-DPSK (3Mbps)	
Type of Modulation	Frequency Hopping Spread Spectrum	
Antenna Type	PCB Antenna, Ant 1 (Chain 1), Antenna Gain 2.77 dBi	
Power Rating	5.2Vdc	
Test Voltage	120Vac, 60Hz	
DC Power Cable Type	Non-shielded cable 1.5m (Non-detachable)	
I/O Port	Micro SD Port × 1, HDMI Port × 1, RJ-45 Port × 1, USB 2.0 Port × 1, USB 3.0 Port × 1, Power Port × 1	

Power Adapter:

No.	Manufacturer	Model No.	Power Input	Power Output
1	DVE	DSA-24CA-05 052300	100-240Vac, 50/60Hz, 0.8A	+5.2Vdc, 3A

Remark:


- 1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
- 2. For more details, please refer to the User's manual of the EUT.
- 3. This submittal(s) (test report) is intended for FCC ID: 2AB5MNP-11001 filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.
- 4. This report is modified from T131106D02-RP1-1.
- 5. The EUT has two appearence, one for hanging on the wall, the other one for flat. The detail please refer to photos.

tion Services Inc. Refer No. : T131106D02-RP1-1 FCC ID : 2AB5MNP-11001 Report No. : T140326D06-B-RP1-1

3. DESCRIPTION OF TEST MODES

The EUT (Nuvola) had been tested under operating condition.

Bluetooth: Chain 1(Ant 1) transmit/receive.

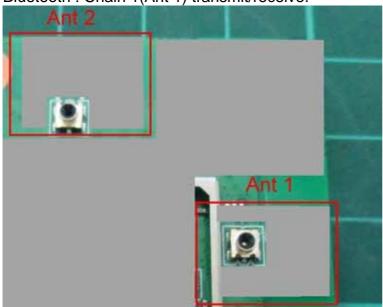

There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2402
Middle	2441
High	2480

Conducted Emission / Radiated Emission Test (Below 1 GHz)

1. The following test modes were scanned during the preliminary test:

I	No.	Pre-Test Mode
	1	TX Mode

2. After the preliminary scan, the following test mode was found to produce the highest emission level.

Final Test Mode					
Emission	Radiated Emission	TX Mode			
EIIIISSIOII	Conducted Emission	TX Mode			

Remark : Then, the above highest emission mode of the configuration of the EUT and cable was chosen for all final test items.

C ID: 2AB5MNP-11001 Report No.: T140326D06-B-RP1-1

Refer No. : T131106D02-RP1-1

Radiated Emission Test (Above 1 GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

Tested Channel	Modulation Technology	Modulation Type	Packet Type	
Low, Mid, High	FHSS	GFSK	DH5	
Low, Mid, High	FHSS	8-DPSK	3-DH5	

Bandedge Measurement:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

Tested Channel	sted Channel Modulation Technology		Packet Type
Low, High	FHSS	GFSK	DH5
Low, High	FHSS	8-DPSK	3-DH5

Antenna Port Conducted Measurement:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

Tested Channel	Tested Channel Modulation Technology		Packet Type	
Low, Mid, High	FHSS	GFSK	DH5	
Low, Mid, High	FHSS	8-DPSK	3-DH5	

4. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4: 2009 and FCC CFR 47, 15.207, 15.209 and 15.247.

5. FACILITIES AND ACCREDITATION

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

NO. 989-1 Wen Shan Rd., Shang Shan Village, Qionglin Shiang Hsinchu County 30741, Taiwan, R.O.C

The sites are constructed in conformance with the requirements of ANSI C63.4:2009 and CISPR 22. All receiving equipment conforms to CISPR 16-1-1, CISPR 16-1-2, CISPR 16-1-3, CISPR 16-1-5.

5.2 ACCREDITATIONS

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

Taiwan TAF

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

Canada INDUSTRY CANADA
Japan VCCI
Taiwan BSMI
USA FCC MRA

Copies of granted accreditation certificates are available for downloading from our web site, http:///www.ccsrf.com

CC ID : 2AB5MNP-11001 Report No.: T140326D06-B-RP1-1

Refer No. : T131106D02-RP1-1

5.3 MEASUREMENT UNCERTAINTY

The following table is for the measurement uncertainty, which is calculated as per the document CISPR 16-4-2.

PARAMETER	UNCERTAINTY
Semi Anechoic Chamber (966 Chamber_B) / Radiated Emission, 30 to 1000 MHz	+/- 3.97
Semi Anechoic Chamber (966 Chamber_B) / Radiated Emission, 1 to 18GHz	+/- 3.58
Semi Anechoic Chamber (966 Chamber_B) / Radiated Emission, 18 to 26 GHz	+/- 3.59
Semi Anechoic Chamber (966 Chamber_B) / Radiated Emission, 26 to 40 GHz	+/- 3.81
Conducted Emission (Mains Terminals), 9kHz to 30MHz	+/- 2.48

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Consistent with industry standard (e.g. CISPR 22, clause 11, Measurement Uncertainty) determining compliance with the limits shall be base on the results of the compliance measurement. Consequently the measure emissions being less than the maximum allowed emission result in this be a compliant test or passing test.

The acceptable measurement uncertainty value without requiring revision of the compliance statement is base on conducted and radiated emissions being less than U_{CISPR} which is 3.6dB and 5.2dB respectively. CCS values (called U_{Lab} in CISPR 16-4-2) is less than U_{CISPR} as shown in the table above. Therefore, MU need not be considered for compliance.

CC ID : 2AB5MNP-11001 Report No.: T140326D06-B-RP1-1

Refer No. : T131106D02-RP1-1

6. SETUP OF EQUIPMENT UNDER TEST

SUPPORT EQUIPMENT

No.	Product	Manufacturer	Model No.	Serial No.	FCC ID
1	Notebook PC	HP	ProBook 4421s	CNF03242PJ	DoC

SETUP DIAGRAM FOR TESTS

EUT & peripherals setup diagram is shown in appendix setup photos.

EUT OPERATING CONDITION

- 1. Setup all computers like the setup diagram.
- 2. Run MS-DOS→C: foxconn\adb
- 3. Keyin:adb shell
- 4. Keyin: brcmbt
- 5. Run MS-DOS→C: foxconn\adb> Enter the command
- 6. TX Mode:
 - a: hcicmd 03 0C 00
 - b: hcicmd 51 FC 10 EE FF C0 88 00 00 01 xx 04 00 0F FD 03 09 00 00 # xx=channel
 - c: hcicmd 51 FC 10 EE FF C0 88 00 00 01 00 04 00 0F xx xx 09 00 00 # xx xx=packet
- 7. RX Mode:
 - a: hcicmd 03 0C 00
 - b: hcicmd 52 FC 0E EE FF C0 88 00 00 FA 00 xx 04 00 0F FD 03 # xx=channel
 - c: hcicmd 52 FC 0E EE FF C0 88 00 00 FA 00 00 04 00 0F xx xx # xx xx=packe
- 8. All of the functions are under run.
- 9. Start test.

7. FCC PART 15.247 REQUIREMENTS

7.1 20dB BANDWIDTH FOR HOPPING

LIMITS

Limit: N/A

TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360132	06/10/2014

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP



TEST PROCEDURE

- 1. The 20dB band width was measured with a spectrum analyzer connected to RF antenna connector(conducted measurement) while EUT was operating in transmit mode at the appropriate center frequency. The analyzer center frequency was set to the EUT carrier frequency, using the analyzer. Display Line and Marker Delta functions, the 20dB band width of the emission was determined.
- 2. Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel.
- 3. RBW \geq 1% of the 20 dB bandwidth.
- 4. VBW ≥ RBW.
- 5. Sweep = auto.

CC ID : 2AB5MNP-11001 Report No.: T140326D06-B-RP1-1

Refer No. : T131106D02-RP1-1

TEST RESULTS


Modulation Type: GFSK, CFG PKT Packet Type: 15 Packet Size: 339 (DH5)


Channel	Channel Frequency (MHz)	20dB Bandwidth (MHz)	Result
Low	2402	0.933	N/A
Middle	2441	0.933	N/A
High	2480	0.933	N/A


Modulation Type: 8-DPSK, CFG PKT Packet Type: 31 Packet Size: 1021 (3-DH5)

Channel	Channel Frequency (MHz)	20dB Bandwidth (MHz)	Result
Low	2402	1.308	N/A
Middle	2441	1.305	N/A
High	2480	1.299	N/A


20dB BANDWIDTH

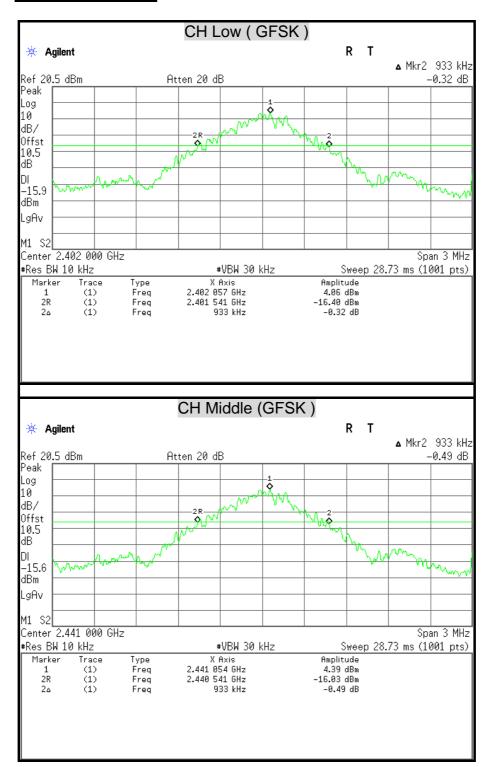

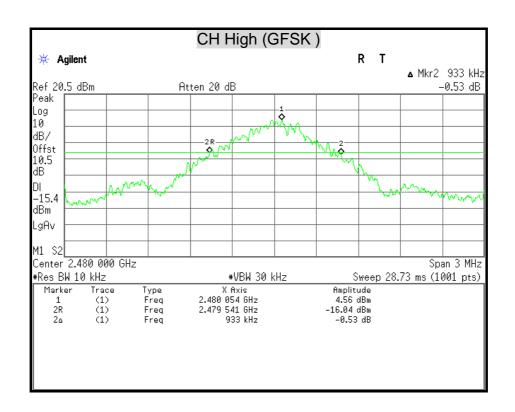

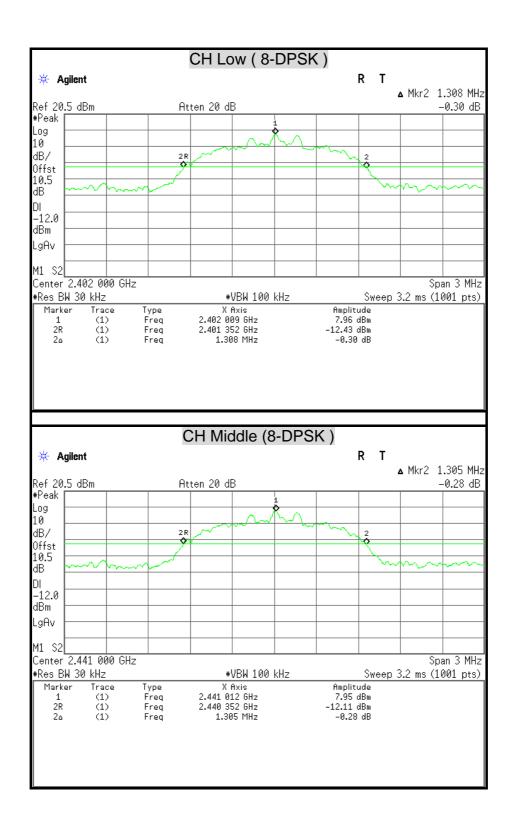

P-11001 Refer No. : T131106D02-RP1-1

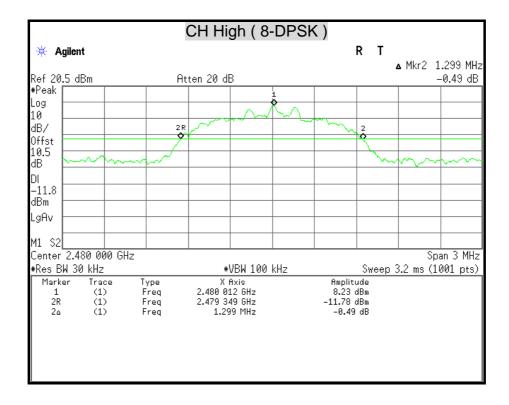

7.2 MAXIMUM PEAK OUTPUT POWER

LIMITS

§15.247(b)(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Power Meter	Anritsu	ML2495A	1149001	12/06/2013
Power Sensor	Anritsu	MA2411B	1126148	12/07/2013

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP



TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the peak power detection.

Pation Services Inc. Refer No. : T131106D02-RP1-1 FCC ID : 2AB5MNP-11001 Report No. : T140326D06-B-RP1-1

TEST RESULTS

Modulation Type: GFSK ,CFG PKT Packet Type: 15 Packet Size: 339 (DH5)

Channel Frequency		Peak l	Power	Peak Pov	wer Limit	Result
Channel	Frequency (MHz)	(dBm)	(W)	(dBm)	(W)	Result
Low	2402	9.69	0.0093	20.97	0.125	PASS
Middle	2441	9.75	0.0094	20.97	0.125	PASS
High	2480	9.71	0.0094	20.97	0.125	PASS

Remark: The cable assembly insertion loss of 11.5dB (including 10 dB pad and 1.5 dB cable) was Entered as an offset in the power meter to allow for direct reading of power.

Modulation Type: 8-DPSK ,CFG PKT Packet Type: 31 Packet Size: 1021 (3-DH5)

Channal	Channel	Peak l	Power	Peak Pov	wer Limit	Result
Channel F	Frequency (MHz)	(dBm)	(W)	(dBm)	(W)	Result
Low	2402	9.47	0.0089	20.97	0.125	PASS
Middle	2441	8.61	0.0073	20.97	0.125	PASS
High	2480	8.31	0.0068	20.97	0.125	PASS

Remark: The cable assembly insertion loss of 11.5dB (including 10 dB pad and 1.5 dB cable) was Entered as an offset in the power meter to allow for direct reading of power.

CC ID: 2AB5MNP-11001 Report No.: T140326D06-B-RP1-1

Refer No.: T131106D02-RP1-1

7.3 AVERAGE POWER

LIMITS


None; for reporting purposes only.

TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Power Meter	ANRITSU	ML2495A	1149001	12/06/2013
Power Sensor	ANRITSU	MA2411B	1126148	12/07/2013

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP



TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the peak power detection.

tion Services Inc.Refer No. : T131106D02-RP1-1

CC ID : 2AB5MNP-11001 Report No.: T140326D06-B-RP1-1

TEST RESULTS

Modulation Type: GFSK ,CFG PKT Packet Type: 15 Packet Size: 339 (DH5)

Channel	Channel Frequency (MHz)	Average Power (dBm)
Low	2402	9.54
Middle	2441	9.63
High	2480	9.56

Remark: The cable assembly insertion loss of 11.5dB (including 10dB pad and 1.5dB cable) was Entered as an offset in the power meter to allow for direct reading of power.

Modulation Type: 8-DPSK ,CFG PKT Packet Type: 31 Packet Size: 1021 (3-DH5)

Channel	Channel Frequency (MHz)	Average Power (dBm)
Low	2402	7.56
Middle	2441	6.56
High	2480	6.36

Remark: The cable assembly insertion loss of 11.5dB (including 10dB pad and 1.5dB cable) was Entered as an offset in the power meter to allow for direct reading of power.

ation Services Inc.Refer No. : T131106D02-RP1-1

FCC ID : 2AB5MNP-11001 Report No.: T140326D06-B-RP1-1

7.4 HOPPING CHANNEL SEPARATION

LIMITS


§15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudorandomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360132	06/10/2014

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP



TEST PROCEDURE

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Position the EUT as shown in test setup without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
- 3. By using the MaxHold function record the separation of adjacent channels.
- 4. Measure the frequency difference of these two adjacent channels by spectrum analyzer MARK function. And then plot the result on spectrum analyzer screen.
- 5. Span = wide enough to capture the peaks of two adjacent channels.
- 6. Resolution (or IF) Bandwidth (RBW) ≥ 1% of the span.
- 7. Video (or Average) Bandwidth (VBW) ≥ RBW.
- 8. Sweep = auto.
- 9. Repeat above procedures until all frequencies measured were complete.

ation Services Inc. Refer No. : T131106D02-RP1-1 FCC ID : 2AB5MNP-11001 Report No. : T140326D06-B-RP1-1

TEST RESULTS

Refer to section 7.1, 20dB bandwidth measurement, the measured channel separation should be greater than two-third of 20dB bandwidth or Minimum bandwidth.


Modulation Type: GFSK, CFG PKT Packet Type: 15 Packet Size: 339 (DH5)


Channel	Channel Frequency (MHz)	Adjacent Hopping Channel Separation (kHz)	Two –third of 20dB bandwidth (kHz)	Minimum Bandwidth	Result
Low	2402	1000	622	25 kHz	PASS
Middle	2441	1000	622	25 kHz	PASS
High	2480	1000	622	25 kHz	PASS


Modulation Type: 8-DPSK, CFG PKT Packet Type: 31 Packet Size: 1021 (3-DH5)


Channel	Channel Frequency (MHz)	Adjacent Hopping Channel Separation (kHz)	Two –third of 20dB bandwidth (kHz)	Minimum Bandwidth	Result
Low	2402	1000	872	25 kHz	PASS
Middle	2441	1000	870	25 kHz	PASS
High	2480	1000	866	25 kHz	PASS

HOPPING CHANNEL SEPARATION

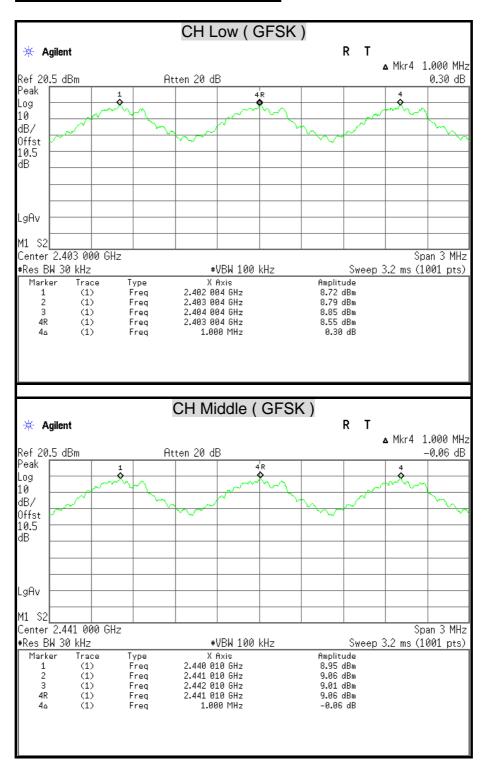

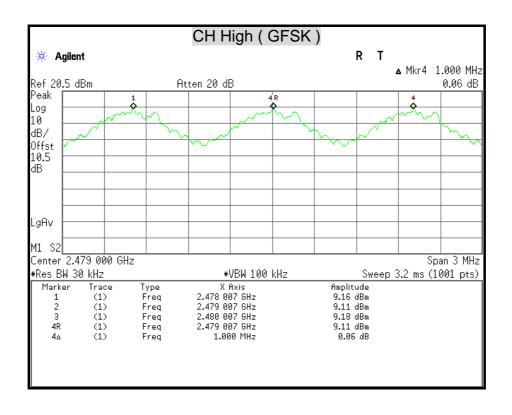

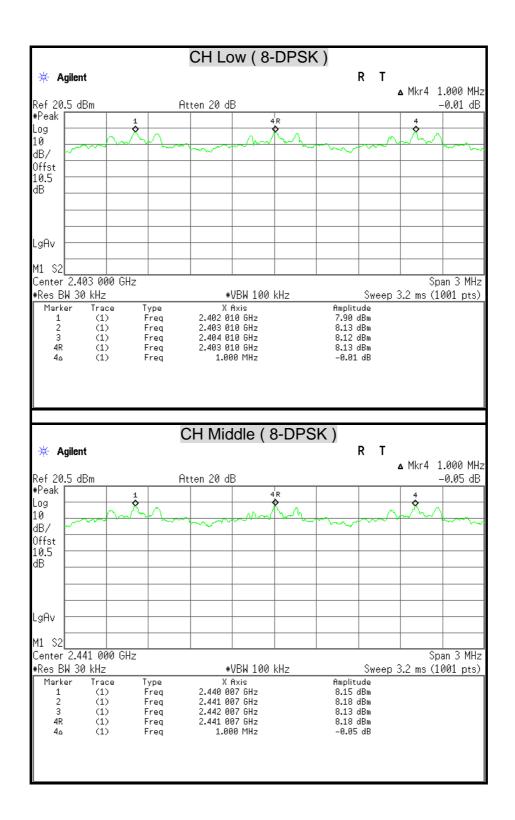

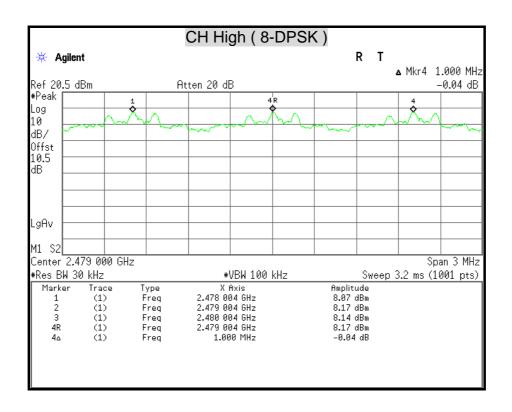

FCC ID : 2AB5MNP-11001 Report No.: T140326D06-B-RP1-1

Refer No. : T131106D02-RP1-1

7.5 NUMBER OF HOPPING FREQUENCY USED

LIMITS


§15.247(a)(1)(iii) For frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due	
Spectrum Analyzer	Agilent	E4446A	MY43360132	06/10/2014	

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP



TEST PROCEDURE


- 1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
- 2. Position the EUT as shown in test setup without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Set the spectrum analyzer on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- 4. Set the spectrum analyzer on View mode and then plot the result on spectrum analyzer screen.
- 5. Span = the frequency band of operation.
- 6. RBW \geq 1% of the span.
- 7. $VBW \ge RBW$.
- 8. Sweep = auto.
- 9. Repeat above procedures until all frequencies measured were complete.


TEST RESULTS

Refer to the attached plot.

There are 79 hopping frequencies in a hopping sequence.

NUMBER OF HOPPING FREQUENCY USED

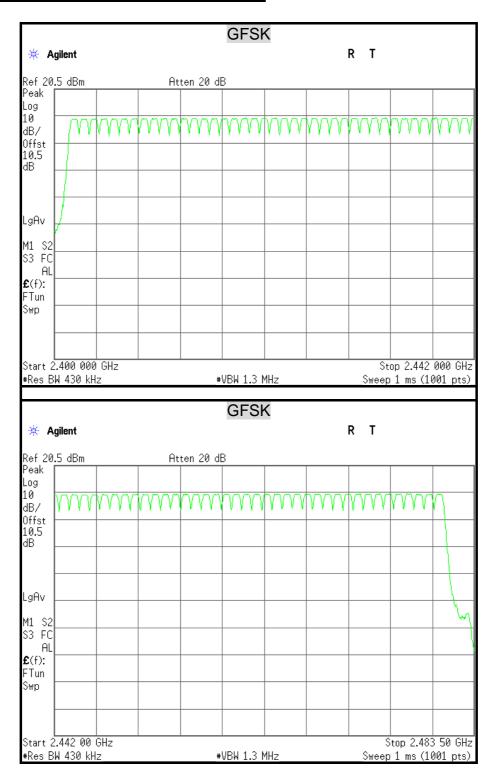

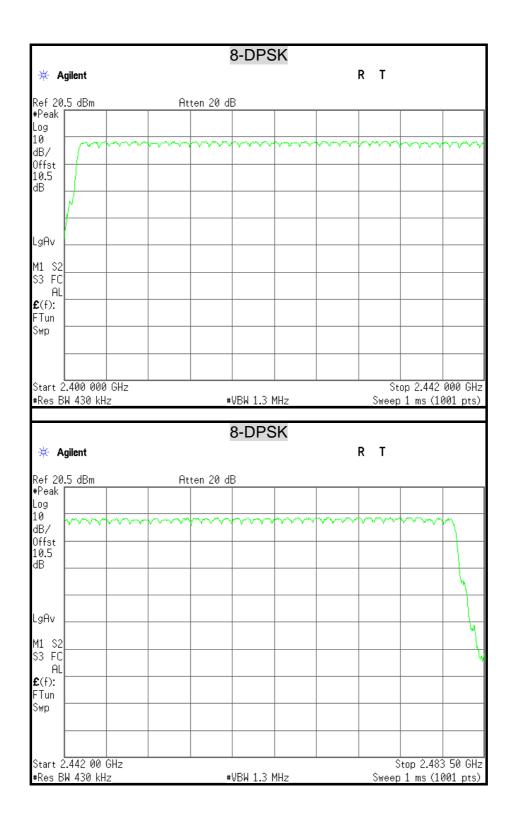

CC ID : 2AB5MNP-11001 Report No.: T140326D06-B-RP1-1

Refer No. : T131106D02-RP1-1

7.6 DWELL TIME ON EACH CHANNEL

LIMITS


§15.247(a)(1)(iii) For frequency hopping system operating in the 2400-2483.5MHz band, the average time of occupancy on any frequency shall not be greater than 0.4 second within a 31.6 second period.

TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360132	06/10/2014

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP



TEST PROCEDURE

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Position the EUT as shown in test setup without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- 3. Adjust the center frequency of spectrum analyzer on any frequency be measured and set spectrum analyzer to zero span mode.
- 4. RBW = 1 MHz.
- 5. VBW ≥ RBW.
- 6. Sweep = as necessary to capture the entire dwell time per hopping channel.
- 7. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- 8. Repeat above procedures until all frequencies measured were complete.
- 9. The EUT has 3 type of payload, DH1, DH3, DH5. The hopping rate is 1600 per second. The longer the payload is, the slower the hopping rate is.

FCC ID: 2AB5MNP-11001 Report No.: T140326D06-B-RP1-1

Refer No. : T131106D02-RP1-1

TEST RESULTS

Time of occupancy on the TX channel in 31.6sec = time domain slot length \times hop rate \div number of hop per channel \times 31.6

Refer to the attached graph.

The hopping rates of Bluetooth devices change with different types of payload. The longer the payload is, the slower the hopping rate. The hopping rate scenario is defined in Bluetooth core specification.

Modulation Type: GFSK, CFG PKT Packet Type: 15 Packet Size: 339 (DH5)

Channel	Channel Frequency (MHz)	Packet type	Dwell time (ms)	Time of occupancy on the TX channel in 31.6sec (ms)	Limit for Time of	Results
Low	2402	DH1	0.40	128.00	400	PASS
	2402	DH3	1.65	264.00	400	PASS
	2402	DH5	2.90	309.33	400	PASS
Middle	2441	DH1	0.40	128.00	400	PASS
	2441	DH3	1.65	264.00	400	PASS
	2441	DH5	2.90	309.33	400	PASS
High	2480	DH1	0.40	128.00	400	PASS
	2480	DH3	1.65	264.00	400	PASS
	2480	DH5	2.90	309.33	400	PASS

Remark:

Ch Low

DH1: $0.40 \text{ ms} \times (1600 \div 2) \div 79 \times 31.6 = 128.00 \text{ (ms)}$ DH3: $1.65 \text{ ms} \times (1600 \div 4) \div 79 \times 31.6 = 264.00 \text{ (ms)}$ DH5: $2.90 \text{ ms} \times (1600 \div 6) \div 79 \times 31.6 = 309.33 \text{ (ms)}$

Ch Middle

DH1: $0.40 \text{ ms} \times (1600 \div 2) \div 79 \times 31.6 = 128.00 \text{ (ms)}$ DH3: $1.65 \text{ ms} \times (1600 \div 4) \div 79 \times 31.6 = 264.00 \text{ (ms)}$ DH5: $2.90 \text{ ms} \times (1600 \div 6) \div 79 \times 31.6 = 309.33 \text{ (ms)}$

Ch Hiah

DH1: $0.40 \text{ ms} \times (1600 \div 2) \div 79 \times 31.6 = 128.00 \text{ (ms)}$ DH3: $1.65 \text{ ms} \times (1600 \div 4) \div 79 \times 31.6 = 264.00 \text{ (ms)}$ DH5: $2.90 \text{ ms} \times (1600 \div 6) \div 79 \times 31.6 = 309.33 \text{ (ms)}$ FCC ID: 2AB5MNP-11001

Refer No.: T131106D02-RP1-1 Report No.: T140326D06-B-RP1-1

Modulation Type: 8-DPSK, CFG PKT Packet Type: 31 Packet Size: 1021 (3-DH5)

Channel	Channel Frequency (MHz)	Packet type	Dwell time (ms)	Time of occupancy on the TX channel in 31.6sec (ms)	Limit for Time of occupancy on the TX channel in 31.6sec (ms)	Results
Low	2402	DH1	0.40	128.00	400	PASS
	2402	DH3	1.65	264.00	400	PASS
	2402	DH5	2.90	309.33	400	PASS
Middle	2441	DH1	0.40	128.00	400	PASS
	2441	DH3	1.65	264.00	400	PASS
	2441	DH5	2.90	309.33	400	PASS
High	2480	DH1	0.40	128.00	400	PASS
	2480	DH3	1.65	264.00	400	PASS
	2480	DH5	2.90	309.33	400	PASS

Remark:

Ch Low


DH1: $0.40 \text{ ms} \times (1600 \div 2) \div 79 \times 31.6 = 128.00 \text{ (ms)}$ DH3: $1.65 \text{ ms} \times (1600 \div 4) \div 79 \times 31.6 = 264.00 \text{ (ms)}$ DH5: $2.90 \text{ ms} \times (1600 \div 6) \div 79 \times 31.6 = 309.33 \text{ (ms)}$


Ch Middle


DH1: $0.40 \text{ ms} \times (1600 \div 2) \div 79 \times 31.6 = 128.00 \text{ (ms)}$ DH3: $1.65 \text{ ms} \times (1600 \div 4) \div 79 \times 31.6 = 264.00 \text{ (ms)}$ DH5: $2.90 \text{ ms} \times (1600 \div 6) \div 79 \times 31.6 = 309.33 \text{ (ms)}$ Ch High


DH1: $0.40 \text{ ms} \times (1600 \div 2) \div 79 \times 31.6 = 128.00 \text{ (ms)}$ DH3: $1.65 \text{ ms} \times (1600 \div 4) \div 79 \times 31.6 = 264.00 \text{ (ms)}$ DH5: $2.90 \text{ ms} \times (1600 \div 6) \div 79 \times 31.6 = 309.33 \text{ (ms)}$


DWELL TIME ON EACH PAYLOAD

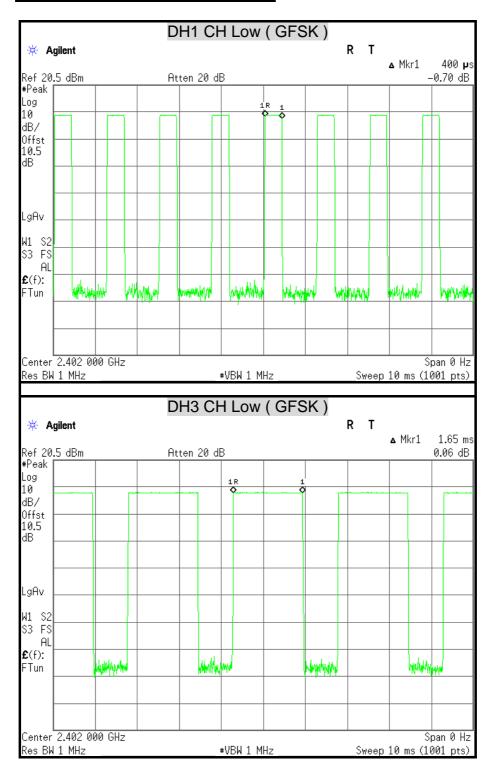


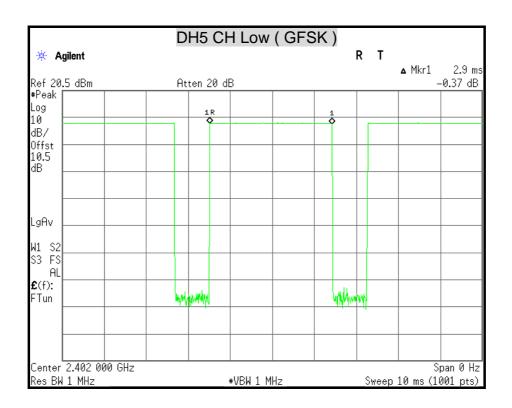


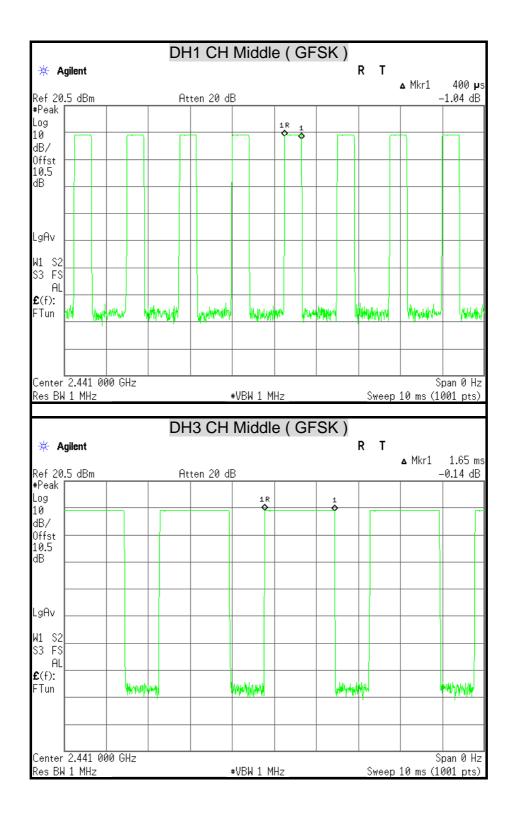


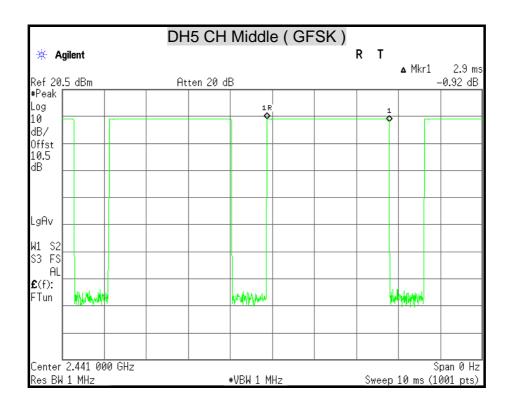


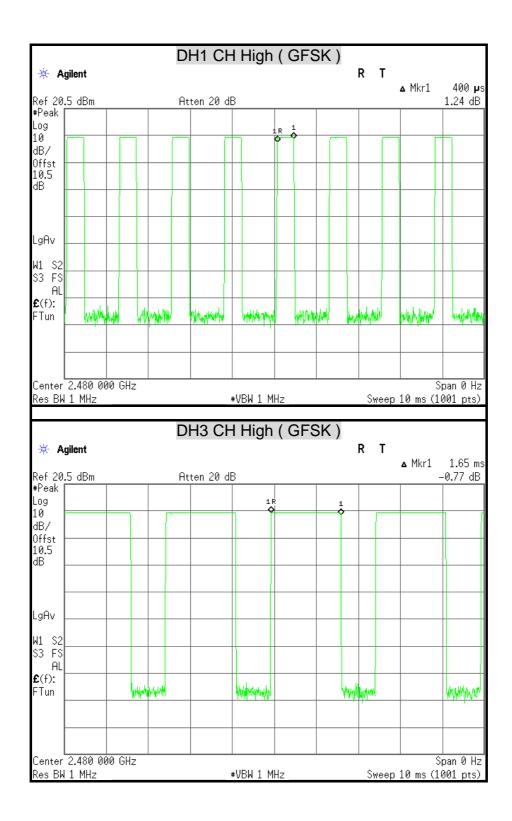


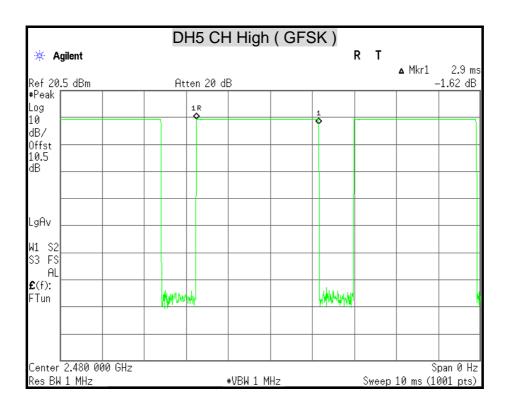


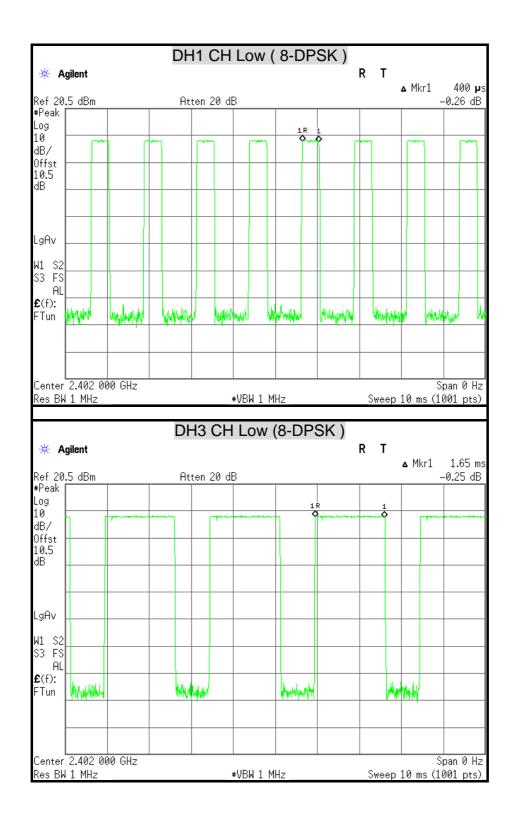


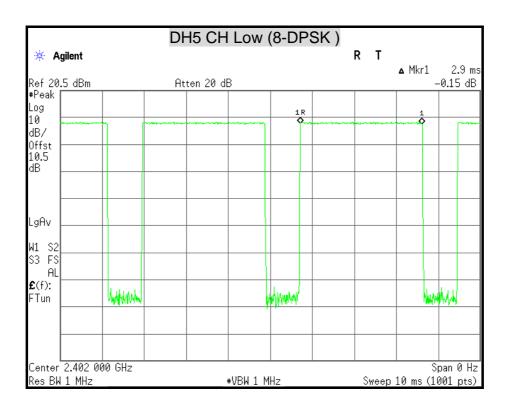

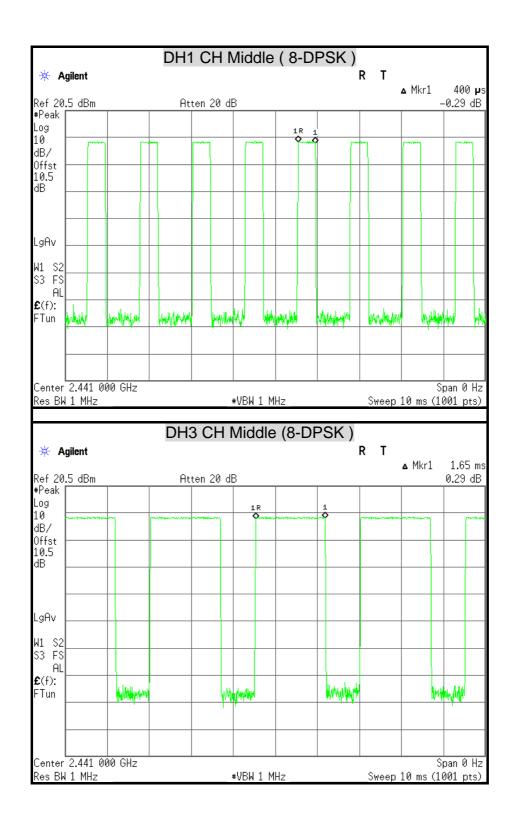

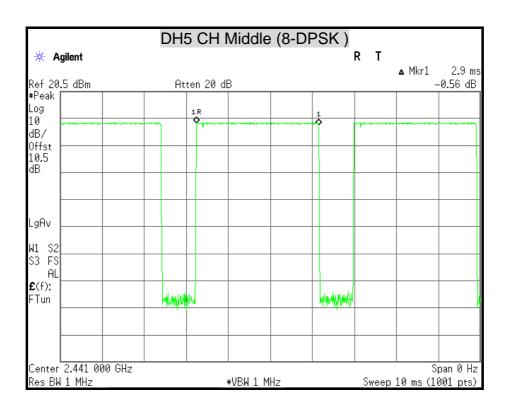

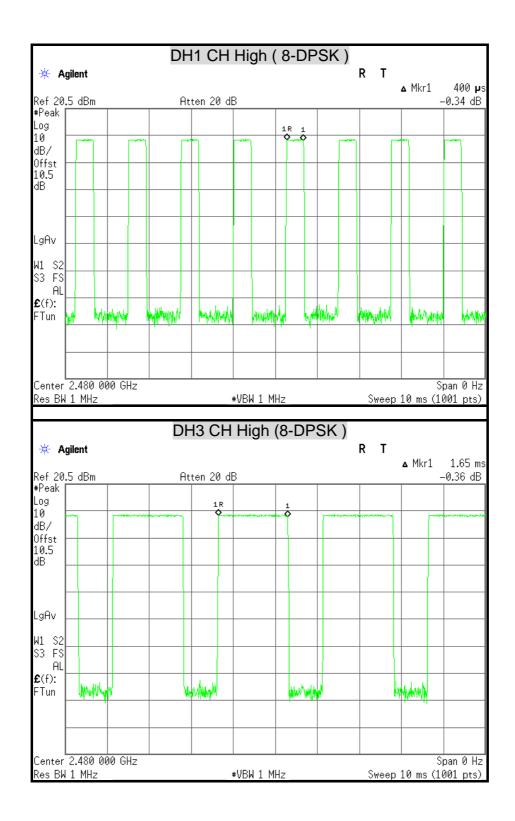

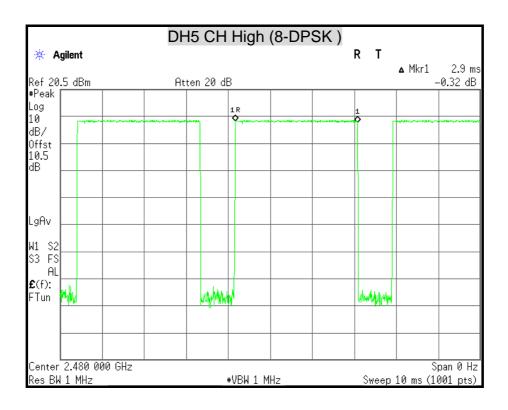

7.7 CONDUCTED SPURIOUS EMISSION

LIMITS

§ 15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the and that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360132	06/10/2014

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP



TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.


The spectrum from 30 MHz to 26.5 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


CC ID: 2AB5MNP-11001 Report No.: T140326D06-B-RP1-1


Refer No. : T131106D02-RP1-1

TEST RESULTS

OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT

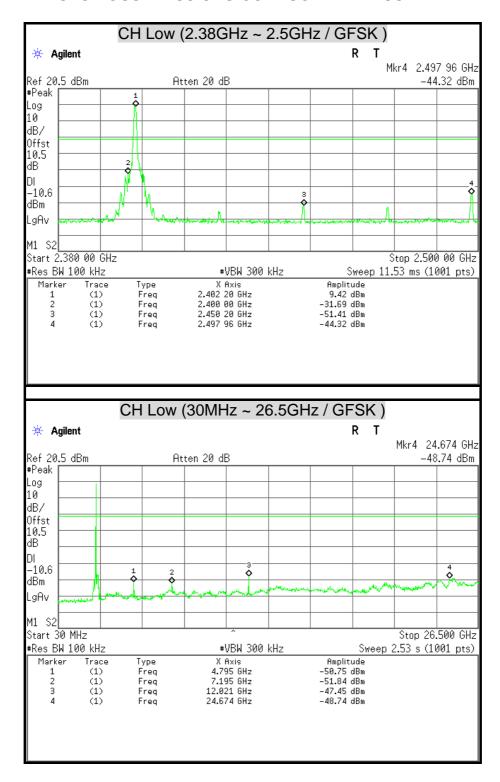


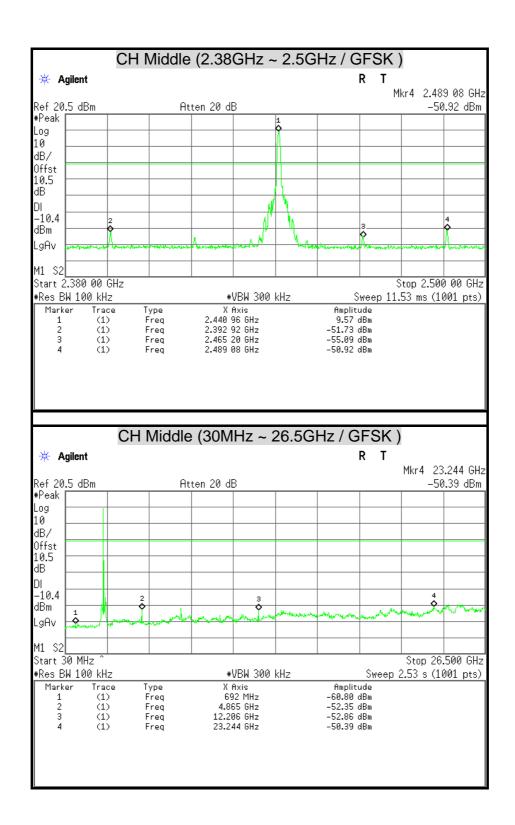


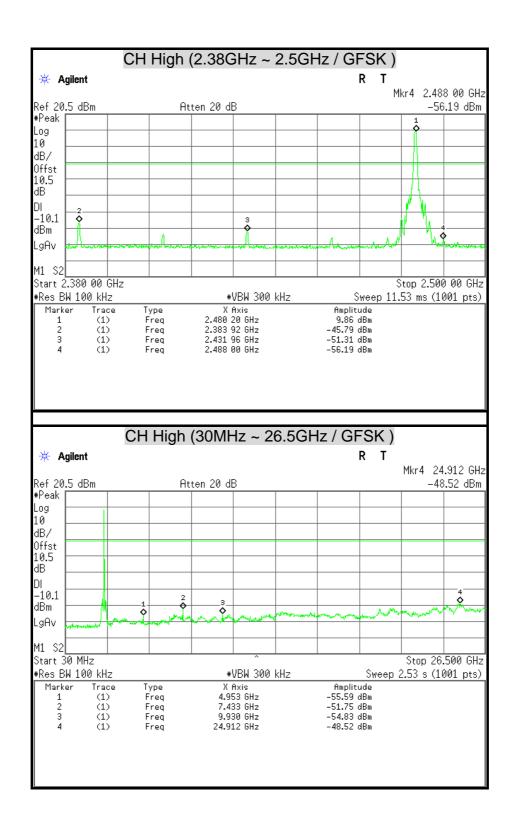

CID: 2AB5MNP-11001 Report No.: T140326D06-B-RP1-1


Refer No. : T131106D02-RP1-1

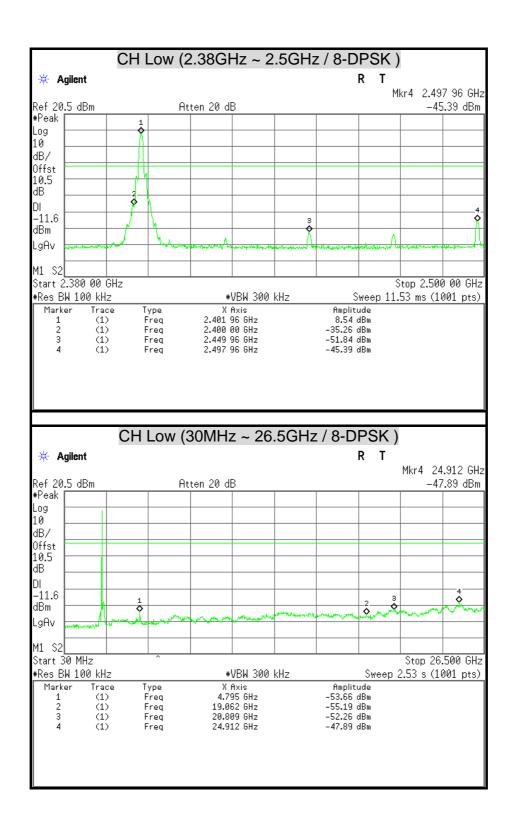

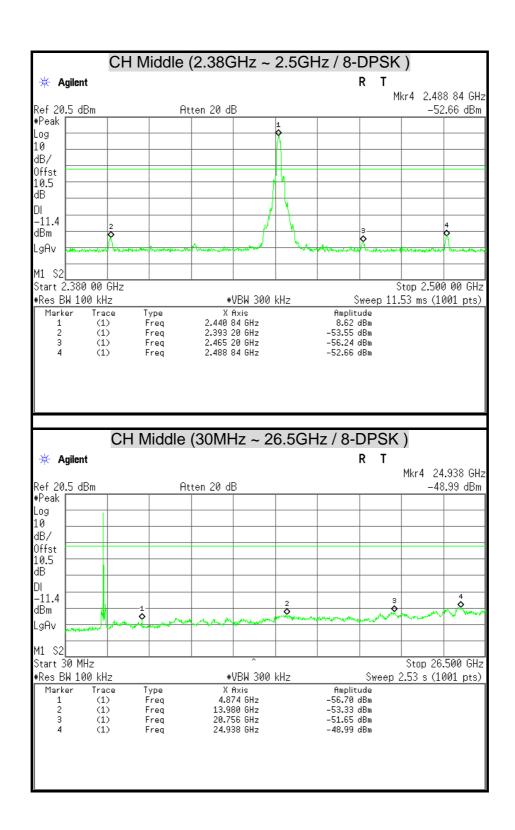

: 2AB5MNP-11001 Report No.: T140326D06-B-RP1-1

Refer No. : T131106D02-RP1-1

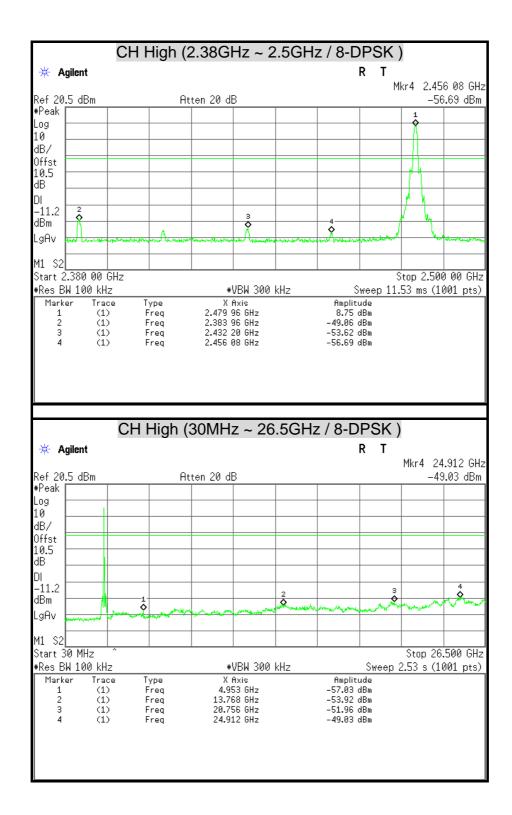

FCC ID : 2AB5MNP-11001

Refer No.: T131106D02-RP1-1 Report No.: T140326D06-B-RP1-1

7.8 RADIATED EMISSION

LIMITS

(1) According to § 15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 -1710	10.6 -12.7
6.26775 - 6.26825	108 -121.94	1718.8 - 1722.2	13.25 -13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 – 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 -16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3338	36.43 - 36.5
12.57675 - 12.57725	322 -335.4	3600 - 4400	(²)
13.36 - 13.41			

Remark:

(2) According to § 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown is Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

^{1. 1} Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

^{2. &}lt;sup>2</sup> Above 38.6

Refer No. : T131106D02-RP1-1 Report No.: T140326D06-B-RP1-1

(3) According to § 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(KHz)	300
0.490 - 1.705	24000/F(KHz)	30
1.705 – 30.0	30	30
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

Remark: **Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

(4) According to § 15.209 (b) In the emission table above, the tighter limit applies at the band edges.

TEST EQUIPMENT

Radiated Emission / 966Chamber B

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY46180323	04/15/2014
EMI Test Receiver	ROHDE & SCHWARZ	ESCI	101131	01/14/2014
Bi-log Antenna	SCHWARZBECK	VULB 9168	9168-250	09/12/2014
Broad-Band Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-778	09/12/2014
Double-Ridged Waveguide Horn	ETS-LINDGREN	3117	00078733	12/11/2013
Horn Antenna	COM-POWER	AH-840	03077	12/20/2013
Pre-Amplifier	Agilent	8447D	2944A10052	07/16/2014
Pre-Amplifier	Agilent	8449B	3008A01916	07/16/2014
LOOP Antenna	EMCO	6502	8905-2356	08/20/2014
Notch Filters Band Reject	Micro-Tronics	BRM05702-01	026	N.C.R


Remark: 1. Each piece of equipment is scheduled for calibration once a year.

2. N.C.R = No Calibration Request.


TEST SETUP

The diagram below shows the test setup that is utilized to make the measurements for emission from below 1GHz.

9kHz ~ 30MHz

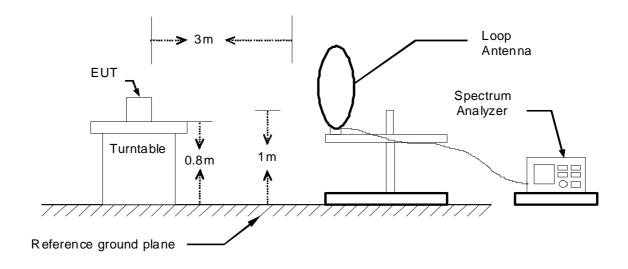


30MHz ~ 1GHz

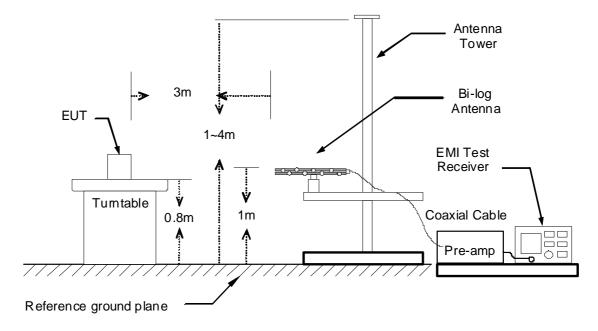

FCC ID: 2AB5MNP-11001 Report No.: T140326D06-B-RP1-1

The diagram below shows the test setup that is utilized to make the measurements for emission above 1GHz.

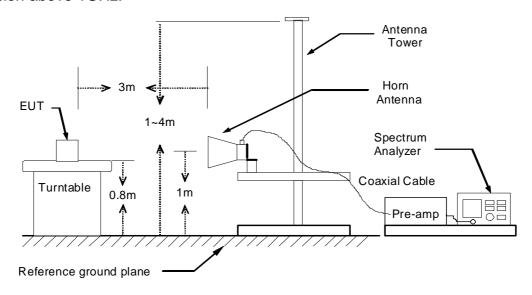

TEST PROCEDURE

- 1. The EUT was placed on the top of a rotating table 0.8 meters above the ground. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2. While measuring the radiated emission below 1GHz, the EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. While measuring the radiated emission above 1GHz, the EUT was set 3 meters away from the interference-receiving antenna.
- 3. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarization of the antenna are set to make the measurement.
- 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- 6. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Remark:

- 1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
- 2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1GHz.
- 3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

TEST RESULTS

Below 1 GHz (9kHz ~ 30MHz)

No emission found between lowest internal used/generated frequency to 30MHz.

Below 1 GHz (30MHz ~ 1GHz)

Product Name	Nuvola	Test By	Rueyyan Lin
Test Model	NP-1	Test Date	2013/11/09
Test Mode	TX Mode	Temp. & Humidity	26°C, 48%

966 Chamber_B at 3Meter / Horizontal								
Frequency (MHz)	Reading (dBµV)	Correction Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Remark		
93.05	48.75	-19.56	29.19	43.50	-14.31	Peak		
134.76	44.03	-14.50	29.53	43.50	-13.97	Peak		
189.08	47.64	-15.30	32.34	43.50	-11.16	Peak		
250.19	47.41	-13.71	33.70	46.00	-12.30	Peak		
307.42	46.06	-11.76	34.30	46.00	-11.70	Peak		
500.45	38.79	-8.19	30.60	46.00	-15.40	Peak		
860.32	40.74	-1.92	38.82	46.00	-7.18	Peak		
1000.00	35.67	0.37	36.04	74.00	-37.96	Peak		
		966 Chamb	er_B at 3Met	ter / Vertical				
Frequency (MHz)	Reading (dBµV)	Correction Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Remark		
30.97	49.34	-15.38	33.96	40.00	-6.04	QP		
125.06	53.61	-15.56	38.05	43.50	- 5.45	Peak		
181.32	50.05	-14.76	35.28	43.50	-8.22	Peak		
309.36	45.18	-11.72	33.46	46.00	-12.54	Peak		
500.45	41.78	-8.19	33.59	46.00	-12.41	Peak		
860.32	35.01	-1.92	33.09	46.00	-12.91	Peak		
1000.00	34.96	0.37	35.33	74.00	-38.67	Peak		

- 1. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit.
- 2. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) PreAmp.Gain (dB)
- 4. Result (dBuV/m) = Reading (dBuV) + Correction Factor (dB/m)
- 5. Margin (dB) = Remark result (dBuV/m) Quasi-peak limit (dBuV/m).

Tification Services Inc. Refer No. : T131106D02-RP1-1 FCC ID : 2AB5MNP-11001 Report No. : T140326D06-B-RP1-1

Above 1 GHz

Product Name	Nuvola	Test By	Rueyyan Lin
Test Model	NP-1	Test Date	2013/11/09
Test Mode	GFSK TX / CH Low	Temp. & Humidity	26°C, 48%

	966 Chamber_B at 3Meter / Horizontal								
Frequency (MHz)	Reading- PK (dBuV)	Reading- AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)		Limit-AV (dBuV/m)	Margin (dB)	Remark
1050.00	55.07		-4.36	50.71		74.00	54.00	-3.29	Peak
1252.00	54.03		-3.89	50.14		74.00	54.00	-3.86	Peak
1474.00	53.56		-3.36	50.20		74.00	54.00	-3.80	Peak
1622.00	53.31		-1.95	51.36		74.00	54.00	-2.64	Peak
3210.00	41.86		4.95	46.81		74.00	54.00	-7.19	Peak
3855.00	41.05		6.30	47.35		74.00	54.00	-6.65	Peak
4800.00	38.66		8.67	47.33		74.00	54.00	-6.67	Peak

	966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading- PK (dBuV)	Reading- AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark	
1014.00	54.85		-4.45	50.40		74.00	54.00	-3.60	Peak	
1166.00	54.57		-4.09	50.48		74.00	54.00	-3.52	Peak	
1436.00	54.26		-3.45	50.81		74.00	54.00	-3.19	Peak	
1676.00	53.34		-1.36	51.98		74.00	54.00	-2.02	Peak	
3270.00	41.73		5.00	46.74		74.00	54.00	-7.26	Peak	
4005.00	41.96		6.77	48.73		74.00	54.00	-5.27	Peak	
4800.00	38.23		8.67	46.90		74.00	54.00	-7.10	Peak	

Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Average test would be performed if the peak result were greater than the average limit.
- 3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 5. Result = Reading + Correction Factor

Margin = Result - Limit

Remark Peak = Result(PK) - Limit(AV)

FCC ID: 2AB5MNP-11001 Report No.: T140326D06-B-RP1-1

Refer No. : T131106D02-RP1-1

Product Name	Nuvola	Test By	Rueyyan Lin
Test Model	NP-1	Test Date	2013/11/09
Test Mode	GFSK TX / CH Middle	Temp. & Humidity	26°C, 48%

	966 Chamber_B at 3Meter / Horizontal								
Frequency (MHz)	Reading- PK (dBuV)	Reading- AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1122.00	54.68		-4.19	50.49		74.00	54.00	-3.51	Peak
1314.00	55.29		-3.74	51.55		74.00	54.00	-2.45	Peak
1454.00	54.16		-3.41	50.75		74.00	54.00	-3.25	Peak
1616.00	53.61		-2.02	51.59		74.00	54.00	-2.41	Peak
3120.00	41.84		4.88	46.72		74.00	54.00	-7.28	Peak
4020.00	40.52		6.80	47.33		74.00	54.00	-6.67	Peak
4875.00	39.26		8.88	48.14		74.00	54.00	-5.86	Peak
		9	66 Chaml	per_B at 3	3Meter / V	ertical			
Frequency (MHz)	Reading- PK (dBuV)	Reading- AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1016.00	55.28		-4.44	50.84		74.00	54.00	-3.16	Peak
1186.00	54.96		-4.04	50.92		74.00	54.00	-3.08	Peak
1370.00	54.25		-3.61	50.64		74.00	54.00	-3.36	Peak
1610.00	53.83		-2.09	51.75		74.00	54.00	-2.25	Peak
3270.00	42.77		5.00	47.77		74.00	54.00	-6.23	Peak
3720.00	41.20		5.88	47.08		74.00	54.00	-6.92	Peak
3855.00	40.81		6.30	47.12		74.00	54.00	-6.88	Peak

Remark:

4860.00

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Average test would be performed if the peak result were greater than the average limit.

8.84

3. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

74.00

54.00

-6.69

Peak

47.31

- 4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 5. Result = Reading + Correction Factor

38.47

Margin = Result - Limit

Remark Peak = Result(PK) - Limit(AV)

FCC ID: 2AB5MNP-11001

Refer No. : T131106D02-RP1-1

Report No.: T140326D06-B-RP1-1

Product Name	Nuvola	Test By	Rueyyan Lin
Test Model	NP-1	Test Date	2013/11/09
Test Mode	GFSK TX / CH High	Temp. & Humidity	26°C, 48%

			6 Chambe	er_B at 3N	Meter / Ho	rizontal			
Frequency (MHz)	Reading- PK (dBuV)	Reading- AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1044.00	54.28		-4.38	49.90		74.00	54.00	-4.10	Peak
1192.00	54.96		-4.03	50.93		74.00	54.00	-3.07	Peak
1354.00	53.98		-3.64	50.34		74.00	54.00	-3.66	Peak
1630.00	53.16		-1.86	51.30		74.00	54.00	-2.70	Peak
3120.00	41.08		4.88	45.96		74.00	54.00	-8.04	Peak
3720.00	39.70		5.88	45.59		74.00	54.00	-8.41	Peak
4305.00	39.70		7.40	47.10		74.00	54.00	-6.90	Peak
4965.00	39.28		9.14	48.42		74.00	54.00	-5.58	Peak
		9	66 Chaml	ber_B at 3	3Meter / V	ertical			
Frequency (MHz)	Reading- PK (dBuV)	Reading- AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1032.00	55.39		-4.40	50.98		74.00	54.00	-3.02	Peak
1196.00	54.52		-4.02	50.50		74.00	54.00	-3.50	Peak
1378.00	53.52		-3.59	49.93		74.00	54.00	-4.07	Peak
1668.00	54.21		-1.45	52.76		74.00	54.00	-1.24	Peak
3270.00	42.93		5.00	47.93		74.00	54.00	-6.07	Peak
4005.00	42.39		6.77	49.16		74.00	54.00	-4.84	Peak
		l	l		· -	1		1	

Remark:

4305.00

4965.00

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Average test would be performed if the peak result were greater than the average limit.

7.40

9.14

3. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

47.84

49.39

74.00

74.00

-6.16

-4.61

Peak

Peak

54.00

54.00

- 4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 5. Result = Reading + Correction Factor

40.44

40.25

Margin = Result - Limit

Remark Peak = Result(PK) - Limit(AV)

FCC ID: 2AB5MNP-11001

Product Name	Nuvola	Test By	Rueyyan Lin
Test Model	NP-1	Test Date	2013/11/09
Test Mode	8-DPSK TX / CH Low	Temp. & Humidity	26°C. 48%

Refer No. : T131106D02-RP1-1

Report No.: T140326D06-B-RP1-1

	966 Chamber_B at 3Meter / Horizontal								
Frequency (MHz)	Reading- PK (dBuV)	Reading- AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1048.00	54.79		-4.37	50.42		74.00	54.00	-3.58	Peak
1246.00	54.66		-3.90	50.76		74.00	54.00	-3.24	Peak
1490.00	54.05		-3.32	50.73		74.00	54.00	-3.27	Peak
1612.00	52.78		-2.06	50.72		74.00	54.00	-3.28	Peak
3195.00	41.69		4.94	46.63		74.00	54.00	-7.37	Peak
4170.00	39.96		7.12	47.08		74.00	54.00	-6.92	Peak
4860.00	38.69		8.84	47.53		74.00	54.00	-6.47	Peak
		9	66 Chaml	ber_B at 3	3Meter / V	ertical			
Frequency (MHz)	Reading- PK (dBuV)	Reading- AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1028.00	55.14		-4.41	50.73		74.00	54.00	-3.27	Peak
1184.00	54.63		-4.05	50.58		74.00	54.00	-3.42	Peak
1368.00	54.13		-3.61	50.52		74.00	54.00	-3.48	Peak
1602.00	53.96		-2.17	51.79		74.00	54.00	-2.21	Peak
3270.00	43.15		5.00	48.16		74.00	54.00	-5.84	Peak
3720.00	43.75		5.88	49.63		74.00	54.00	-4.37	Peak
3855.00	43.05		6.30	49.36		74.00	54.00	-4.64	Peak
			l	·	l	I			

Remark:

4845.00

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Average test would be performed if the peak result were greater than the average limit.

8.80

3. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

74.00

54.00

-7.23

Peak

46.77

- 4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 5. Result = Reading + Correction Factor

37.98

Margin = Result - Limit

Remark Peak = Result(PK) - Limit(AV)

FCC ID: 2AB5MNP-11001

Product NameNuvolaTest ByRueyyan LinTest ModelNP-1Test Date2013/11/09Test Mode8-DPSK TX / CH MiddleTemp. & Humidity26°C, 48%

Refer No. : T131106D02-RP1-1

Report No.: T140326D06-B-RP1-1

	966 Chamber_B at 3Meter / Horizontal								
Frequency (MHz)	Reading- PK (dBuV)	Reading- AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1036.00	54.78		-4.40	50.38		74.00	54.00	-3.62	Peak
1264.00	55.52		-3.86	51.66		74.00	54.00	-2.34	Peak
1434.00	53.43		-3.46	49.97		74.00	54.00	-4.03	Peak
1654.00	52.74		-1.60	51.14		74.00	54.00	-2.86	Peak
3240.00	41.58		4.98	46.55		74.00	54.00	-7.45	Peak
3855.00	41.50		6.30	47.80		74.00	54.00	-6.20	Peak
4905.00	39.63		8.97	48.60		74.00	54.00	-5.40	Peak
		9	66 Chaml	ber_B at 3	3Meter / V	ertical			
Frequency (MHz)	Reading- PK (dBuV)	Reading- AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1040.00	55.14		-4.39	50.76		74.00	54.00	-3.24	Peak
1252.00	54.67		-3.89	50.79		74.00	54.00	-3.21	Peak
1472.00	53.90		-3.37	50.54		74.00	54.00	-3.46	Peak
1664.00	53.41		-1.49	51.92		74.00	54.00	-2.08	Peak
3270.00	41.97		5.00	46.98		74.00	54.00	-7.02	Peak
3855.00	42.99		6.30	49.29		74.00	54.00	-4.71	Peak

Remark

4425.00

4905.00

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Average test would be performed if the peak result were greater than the average limit.

7.65

8.97

3. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

47.61

47.45

74.00

74.00

54.00

54.00

-6.39

-6.55

Peak

Peak

- 4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 5. Result = Reading + Correction Factor

39.96

38.49

Margin = Result - Limit

 $Remark\ Peak = Result(PK) - Limit(AV)$

FCC ID: 2AB5MNP-11001

Product Name	Nuvola	Test By	Rueyyan Lin
Test Model	NP-1	Test Date	2013/11/09
Test Mode	8-DPSK TX / CH High	Temp. & Humidity	26°C. 48%

Refer No. : T131106D02-RP1-1

Report No.: T140326D06-B-RP1-1

	966 Chamber_B at 3Meter / Horizontal								
Frequency (MHz)	Reading- PK (dBuV)	Reading- AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1038.00	55.13		-4.39	50.74		74.00	54.00	-3.26	Peak
1234.00	55.04		-3.93	51.12		74.00	54.00	-2.88	Peak
1464.00	54.43		-3.38	51.05		74.00	54.00	-2.95	Peak
1654.00	53.28		-1.60	51.68		74.00	54.00	-2.32	Peak
3225.00	41.25		4.96	46.21		74.00	54.00	-7.79	Peak
3870.00	41.29		6.35	47.64		74.00	54.00	-6.36	Peak
4170.00	40.23		7.12	47.34		74.00	54.00	-6.66	Peak
4950.00	38.86		9.10	47.95		74.00	54.00	-6.05	Peak
		9	66 Chaml	ber_B at 3	3Meter / V	ertical			
Frequency (MHz)	Reading- PK (dBuV)	Reading- AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1060.00	55.63		-4.34	51.29		74.00	54.00	-2.71	Peak
1264.00	55.09		-3.86	51.23		74.00	54.00	-2.77	Peak
1426.00	54.23		-3.47	50.75		74.00	54.00	-3.25	Peak
1668.00	52.65		-1.45	51.20		74.00	54.00	-2.80	Peak
3285.00	42.59		5.01	47.61		74.00	54.00	-6.39	Peak
3855.00	42.76		6.30	49.07		74.00	54.00	-4.93	Peak
4950.00	39.30		9.10	48.40		74.00	54.00	-5.60	Peak


Remark:


- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Average test would be performed if the peak result were greater than the average limit.
- 3. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 5. Result = Reading + Correction Factor

Margin = Result - Limit

Remark Peak = Result(PK) - Limit(AV)

Restricted Band Edges

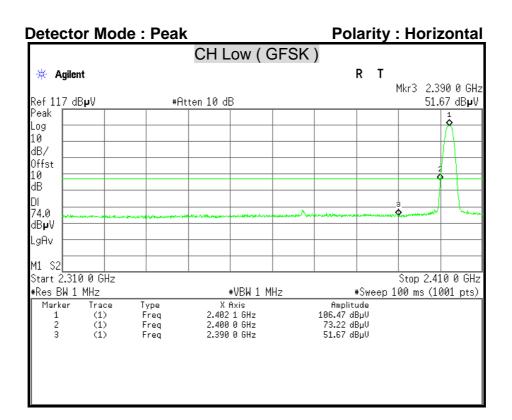


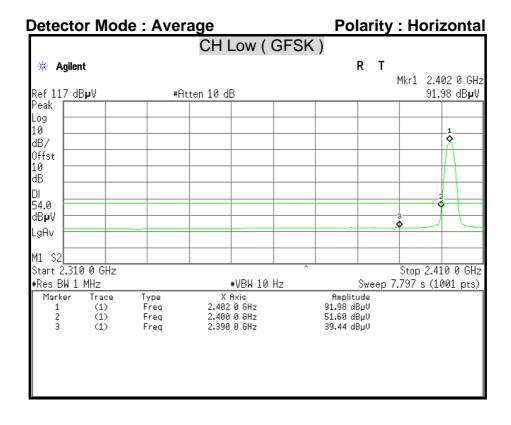



CC ID : 2AB5MNP-11001 Report No.: T140326D06-B-RP1-1


Refer No. : T131106D02-RP1-1


Detector Mode: Peak Polarity: Vertical CH Low (GFSK) R T 🗰 Agilent Mkr4 2.340 3 GHz Ref 117 dBpV #Atten 10 dB 54.62 dBpV Peak Log 10 dB/ Offst 1 ผ dΒ DΙ 74.0 dB₽V LgAv M1 S2 Start 2.310 0 GHz Stop 2.410 0 GHz #Sweep 100 ms (1001 pts) #Res BW 1 MHz #VBW 1 MHz Marker Trace Туре X Axis Amplitude 2.402 1 GHz 2.400 0 GHz 2.390 0 GHz (1) Freq 100.98 dBµV (1) (1) Freq 68.34 dBμV 51.45 dBμV 3 Freq (1) 2.340 3 GHz 54.62 dBµV

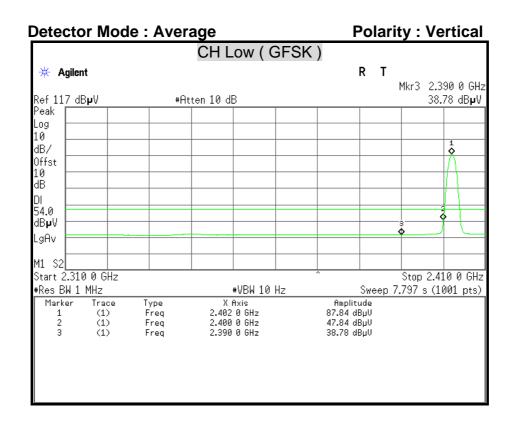

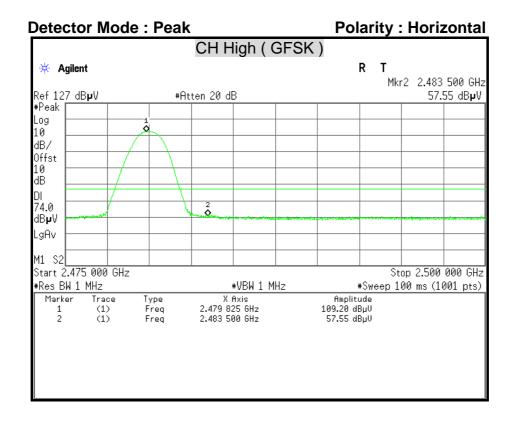

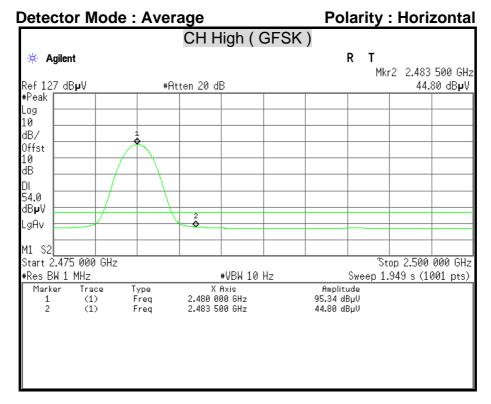

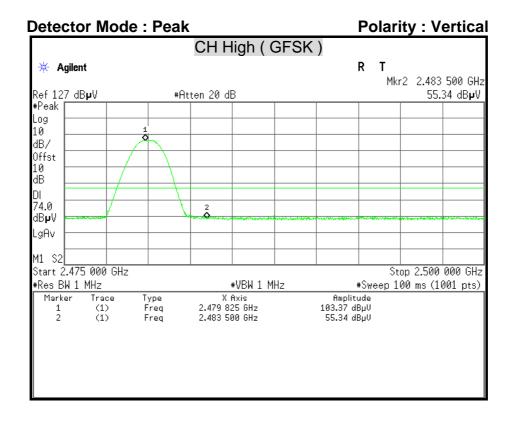


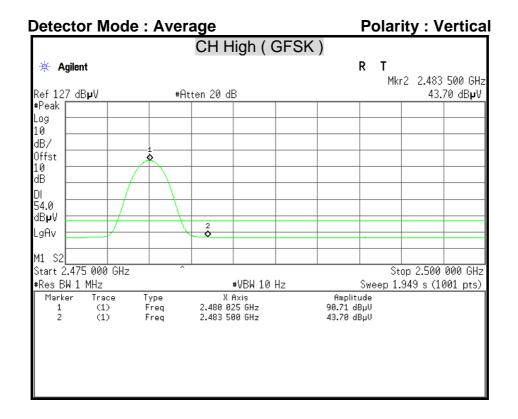



C ID: 2AB5MNP-11001 Report No.: T140326D06-B-RP1-1


Refer No. : T131106D02-RP1-1


Detector Mode: Peak Polarity: Horizontal CH Low (8-DPSK) 🗰 Agilent R Τ Mkr3 2.390 0 GHz 55.80 dB**µ**V Ref 127 dB**µ**V #Atten 20 dB #Peak Log 10 dB/ Offst dΒ 74.0 dB₽V LgAv M1 S2 Stop 2.410 0 GHz Start 2.310 0 GHz #Res BW 1 MHz #VBW 1 MHz #Sweep 100 ms (1001 pts) Trace (1) Type Freq X Axis 2.402 0 GHz Amplitude 108.29 dBµV Marker (1) Freq 2.400 0 GHz 76.89 dBµV 3 (1) Freq 2.390 0 GHz 55.80 dBµV

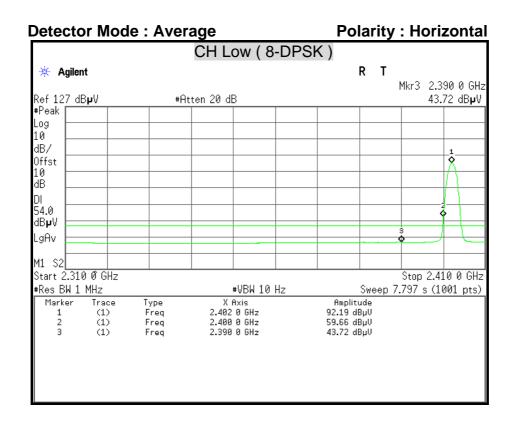


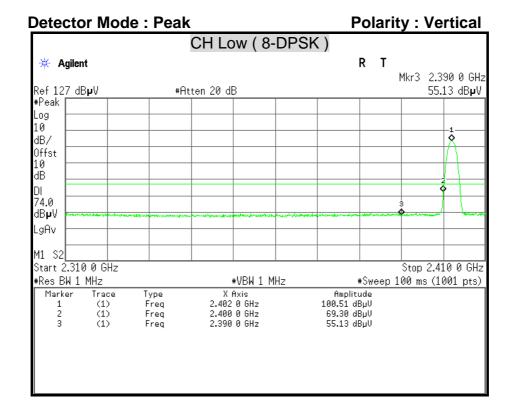


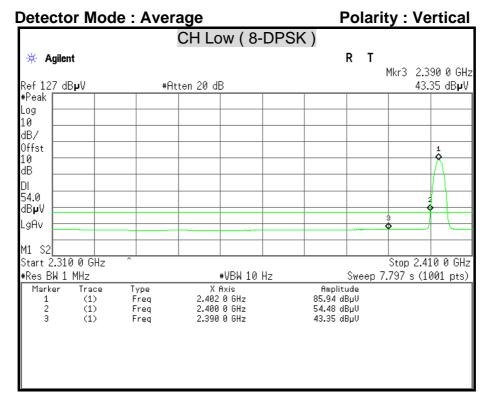

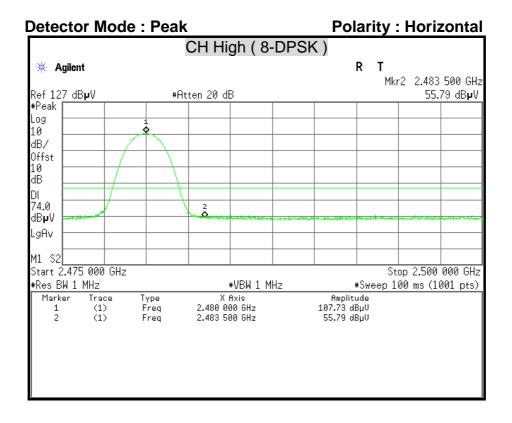

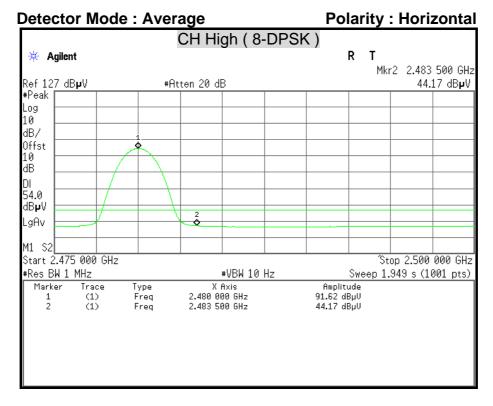

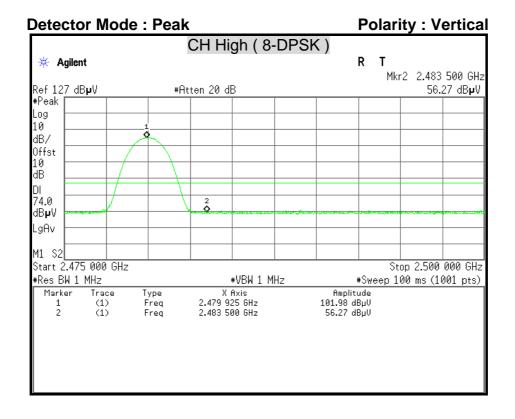

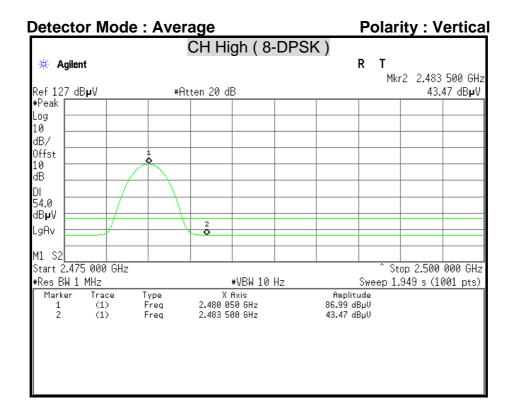

FCC ID: 2AB5MNP-11001 Report No.: T140326D06-B-RP1-1

Refer No. : T131106D02-RP1-1

7.9 CONDUCTED EMISSION

LIMITS

§ 15.207 (a) Except as shown in paragraph (b) and (c) this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range	Conducted Limit (dBµv)				
(MHz)	Quasi-peak	Average			
0.15 - 0.50	66 to 56	56 to 46			
0.50 - 5.00	56	46			
5.00 - 30.0	60	50			


TEST EQUIPMENT


Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
L.I.S.N	SCHWARZBECK	NSLK 8127	8127-465	08/11/2014
L.I.S.N	SCHWARZBECK	NSLK 8127	8127-473	03/07/2014
EMI Receiver	ROHDE & SCHWARZ	ESCS 30	835418/008	10/16/2014
Pulse Limiter	ROHDE & SCHWARZ	ESH3-Z2	100117	07/01/2014

Remark: Each piece of equipment is scheduled for calibration once a year.

ation Services Inc. Refer No. : T131106D02-RP1-1 FCC ID : 2AB5MNP-11001 Report No. : T140326D06-B-RP1-1

TEST SETUP

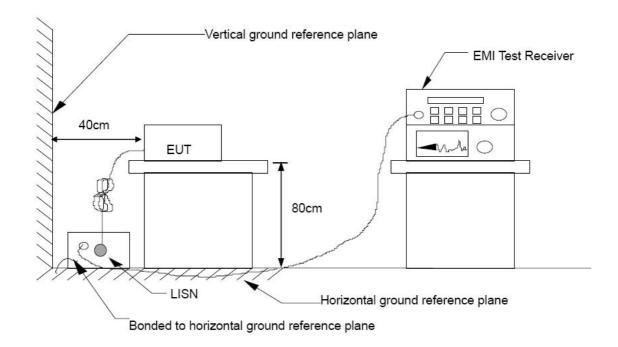

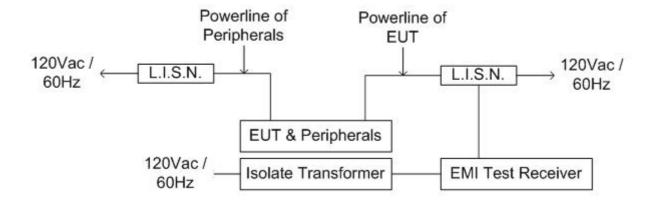

TEST PROCEDURE

The basic test procedure was in accordance with ANSI C63.4:2009.

The test procedure is performed in a $4m \times 3m \times 2.4m$ (L×W×H) shielded room.

The EUT along with its peripherals were placed on a 1.0m (W) \times 1.5m (L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.

The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room.


The EUT was located so that the distance between the boundary of the EUT and the closest surface of the LISN is 0.8 m. Where a mains flexible cord was provided by the manufacturer shall be 1 m long, or if in excess of 1 m, the excess cable was folded back and forth as far as possible so as to form a bundle not exceeding 0.4 m in length.

Services Inc. Refer No. : T131106D02-RP1-1
ID : 2AB5MNP-11001 Report No. : T140326D06-B-RP1-1

TEST RESULTS

Product Name	Nuvola	Test By	Rueyyan Lin
Test Model	NP-1	Test Date	2013/11/14
Test Mode	TX Mode	Temp. & Humidity	22°C, 52%

LINE

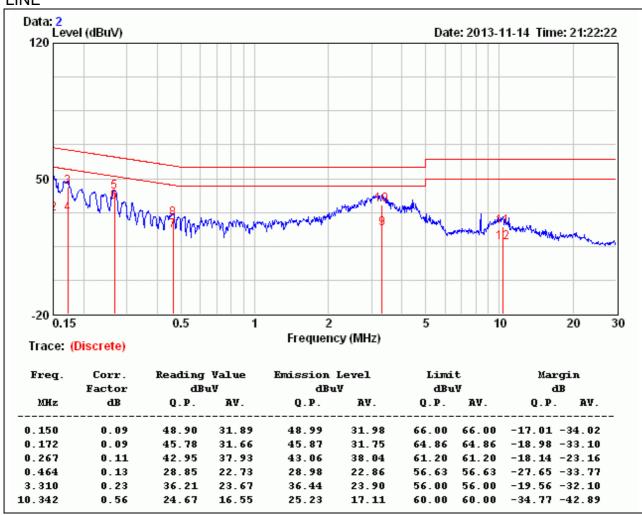

Remark:


- 1. Correction Factor = Insertion loss + Cable loss
- 2. Emission level = Reading Value + Correction factor
- 3. Margin value = Emission level Limit value

CC ID: 2AB5MNP-11001 Report No.: T140326D06-B-RP1-1

Refer No. : T131106D02-RP1-1

Product Name	Nuvola	Test By	Rueyyan Lin
Test Model	NP-1	Test Date	2013/11/14
Test Mode	TX Mode	Temp. & Humidity	22°C, 52%

NEUTRAL

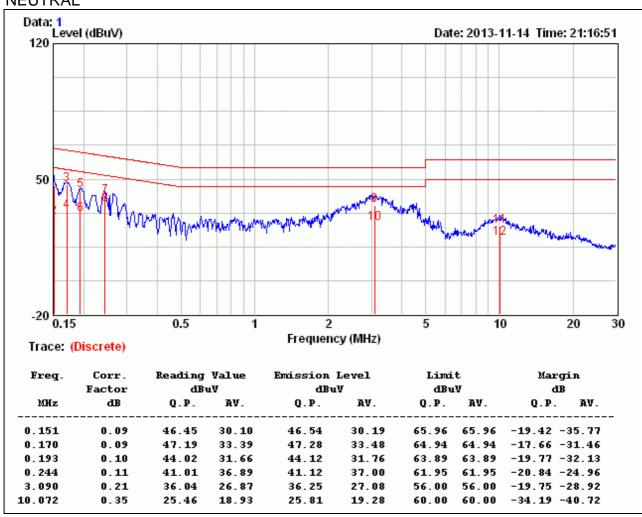

Remark:

- 1. Correction Factor = Insertion loss + Cable loss
- 2. Emission level = Reading Value + Correction factor
- 3. Margin value = Emission level Limit value