



FCC PART 15.249 TEST REPORT

For

Playday Manufacturers Group Ltd

Room 245, 2/F, Houston Centre, 63 Mody Road ,Tsim sha Tsui East, Kowloon, Hong Kong

FCC ID: 2AB69-24G19

Report Type: Product Type:

Original Report RC MONSTER TUMBLER

Report Number: <u>RSZ190523831-00</u>

Report Date: 2019-06-03

Hill He

Reviewed By: RF Engineer

Bay Area Compliance Laboratories Corp. (Shenzhen)

6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone,

Prepared By: Shenzhen, Guangdong, China

Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

Note: This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. * This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "*".

The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity.

TABLE OF CONTENTS

GENERAL INFORMATION	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	
Objective	3
RELATED SUBMITTAL(S)/GRANT(S)	
TEST METHODOLOGY	
Measurement Uncertainty Test Facility	
SYSTEM TEST CONFIGURATION	5
JUSTIFICATION	
EUT Exercise Software	
EQUIPMENT MODIFICATIONS	
SUPPORT EQUIPMENT LIST AND DETAILS SUPPORT CABLE DESCRIPTIONS	
BLOCK DIAGRAM OF TEST SETUP	
SUMMARY OF TEST RESULTS	7
TEST EQUIPMENT LIST	8
FCC§15.203 - ANTENNA REQUIREMENT	0
APPLICABLE STANDARD	
APPLICABLE STANDARD ANTENNA CONNECTOR CONSTRUCTION	
FCC§15.205, §15.209 & §15.249(D) - RADIATED EMISSIONS	
APPLICABLE STANDARD	
TEST EQUIPMENT SETUP	
EUT SETUP TEST PROCEDURE	
CORRECTED AMPLITUDE & MARGIN CALCULATION	
TEST RESULTS SUMMARY	
Test Data	12
FCC§15.215(C) - 20DB EMISSION BANDWIDTH	
APPLICABLE STANDARD	
TEST PROCEDURE	
Trot Day	

Report No.: RSZ180207801-00

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	RC MONSTER TUMBLER
Tested Model	92661
Multiple Model [#]	92661N
Frequency Range	2410~2475MHz
Modulation Technique	GFSK
Antenna Specification	0 dBi
Voltage Range	DC 2 * 1.5 V AA battery
Date of Test	2019-05-29~2019-05-30
Sample serial number	190523831
Received date	2019-05-23
Sample/EUT Status	Good condition

Report No.: RSZ180207801-00

Notes: This series products model: 92661N and 92661 are electrically identical, only named and appearance differently. Model 92661 was selected for fully testing, the detailed information can be referred to the declaration letter.

Objective

This type approval report is prepared on behalf of *Playday Manufacturers Group Ltd* in accordance with Part 2-Subpart J, and Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.209 and 15.249 rules.

Related Submittal(s)/Grant(s)

No related submittal(s).

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

FCC Part 15.249 Page 3 of 21

Measurement Uncertainty

Para	meter	Uncertainty	
Occupied Char	nnel Bandwidth	±5%	
RF Output Power	with Power meter	±0.73dB	
RF conducted test with spectrum		±1.6dB	
AC Power Lines Conducted Emissions		±1.95dB	
Emissions,	Below 1GHz	±4.75dB	
Radiated Above 1GHz		±4.88dB	
Temperature		±1℃	
Humidity		±6%	
Supply	voltages	±0.4%	

Report No.: RSZ180207801-00

Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 342867, the FCC Designation No.: CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

FCC Part 15.249 Page 4 of 21

SYSTEM TEST CONFIGURATION

Justification

The system was configured for testing by manufacturer.

66 channels are provided to testing:

```
2410MHz, 2411MHz, 2412MHz, 2413MHz, 2414MHz, 2415MHz, 2416MHz, 2417MHz, 2418MHz, 2419MHz, 2420MHz, 2421MHz, 2422MHz, 2423MHz, 2424MHz, 2425MHz, 2426MHz, 2427MHz, 2428MHz, 2429MHz, 2430MHz, 2431MHz, 2432MHz, 2433MHz, 2434MHz, 2435MHz, 2436MHz, 2437MHz, 2438MHz, 2439MHz, 2440MHz, 2441MHz, 2442MHz, 2443MHz, 2444MHz, 2445MHz, 2446MHz, 2447MHz, 2448MHz, 2449MHz, 2450MHz, 2451MHz, 2452MHz, 2453MHz, 2454MHz, 2455MHz, 2456MHz, 2457MHz, 2458MHz, 2459MHz, 2460MHz, 2461MHz, 2462MHz, 2463MHz, 2464MHz, 2465MHz, 2466MHz, 2467MHz, 2468MHz, 2469MHz, 2471MHz, 2472MHz, 2473MHz, 2474MHz, 2475MHz.
```

Report No.: RSZ180207801-00

2410MHz, 2443MHz and 2475MHz were selected for testing.

EUT Exercise Software

No software was used.

Equipment Modifications

No modifications were made to the unit tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
N/A	N/A	N/A	N/A

Support Cable Descriptions

Cable Description	Length (m)	From/Port	To
N/A	N/A	N/A	N/A

FCC Part 15.249 Page 5 of 21

Block Diagram of Test Setup

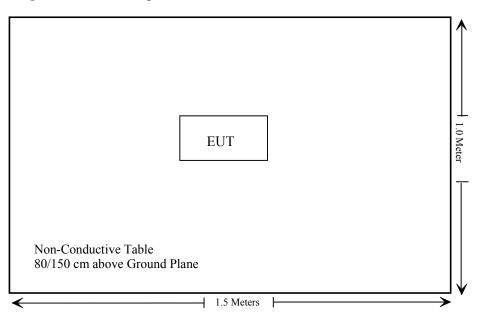

FCC Part 15.249 Page 6 of 21

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.207(a)	Conduction Emissions	Not Applicable
15.205, §15.209, §15.249(d)	Radiated Emissions& Outside of Band Emission	Compliance
§15.215 (c)	20 dB Bandwidth	Compliance

Report No.: RSZ180207801-00

Not Applicable: The EUT was powered by battery only.

FCC Part 15.249 Page 7 of 21

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
	Radia	ated Emission T	est		
A.H. System	Horn Antenna	SAS-200/571	135	2018-09-01	2021-08-31
Rohde & Schwarz	Signal Analyzer	FSEM	845987/005	2018-06-23	2019-06-23
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2017-12-22	2020-12-21
COM-POWER	Pre-amplifier	PA-122	181919	2018-11-12	2019-11-12
Sonoma Instrument	Amplifier	310N	186238	2018-11-12	2019-11-12
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03 -101746-zn	2018-07-11	2019-07-11
Ducommun technologies	RF Cable	UFA147A- 2362-100100	MFR64639 231029-003	2018-11-12	2019-11-12
Ducommun technologies	RF Cable	104PEA	218124002	2018-11-12	2019-11-12
Ducommun technologies	RF Cable	RG-214	1	2019-05-21	2019-11-19
Ducommun technologies	RF Cable	RG-214	2	2018-11-12	2019-11-12
Ducommun Technologies	ımun Horn Antenna		1007726-04	2017-12-29	2020-12-28
Heatsink Required	Amplifier	QLW- 18405536-J0	15964001002	2018-11-12	2019-11-12
Sinoscite	Notch Filter	BSF2402- 2480MN- 0898-001	99632	2018-11-12	2019-11-12

Report No.: RSZ180207801-00

FCC Part 15.249 Page 8 of 21

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC§15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Report No.: RSZ180207801-00

Antenna Connector Construction

The EUT has one Line antenna which was permanently attached and the antenna gain is 0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.

FCC Part 15.249 Page 9 of 21

FCC§15.205, §15.209 & §15.249(d) - RADIATED EMISSIONS

Applicable Standard

As per FCC§15.249 (a), except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902–928 MHz	50	500
2400–2483.5 MHz	50	500
5725–5875 MHz	50	500
24.0–24.25 GHz	250	2500

Report No.: RSZ180207801-00

As per FCC§15.249 (c), Field strength limits are specified at a distance of 3 meters.

As per FCC§15.249 (d), Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

Test Equipment Setup

The spectrum analyzer or receiver is set as:

Below 1000MHz:

RBW = 100 kHz / VBW = 300 kHz / Sweep = Auto


Above 1000MHz:

Peak: RBW = 1MHz / VBW = 1MHz / Sweep = Auto Average: RBW = 1MHz / VBW = 10Hz / Sweep = Auto

FCC Part 15.249 Page 10 of 21


EUT Setup

Below 1GHz:

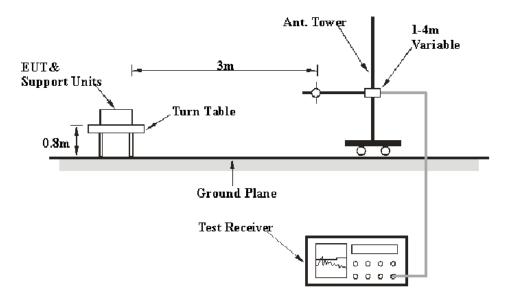

Report No.: RSZ180207801-00

Above 1GHz:

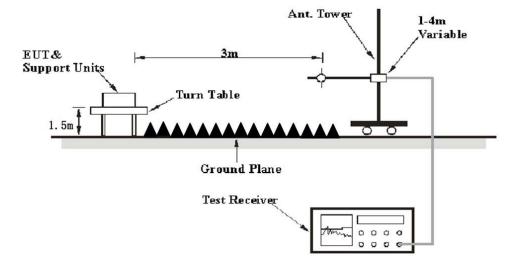

The radiated emission and out of band emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209/15.205 and FCC 15.249 limits.

FCC Part 15.249 Page 11 of 21

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Report No.: RSZ180207801-00

The EUT is set 3 meter away from the testing antenna, which is varied from 1-4 mete, and the EUT is placed on a turntable, which is 0.8 meter above ground plane for below 1GHz or 1.5 meter for above 1GHz, the table shall be rotated for 360 degrees to find out the highest emission. The receiving antenna should be changed the polarization both of horizontal and vertical.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Corrected Amplitude = Meter Reading + Antenna Factor + Cable Loss - Amplifier Gain

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin = Limit – Corrected Amplitude

Test Results Summary

According to the data in the following table, the EUT complied with the FCC Part 15.205, 15.209 & §15.249

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_{\rm m} + U_{(L{\rm m})} \leq L_{\rm lim} + U_{\rm cispr}$$

In BACL, $U_{(Lm)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data

Environmental Conditions


Temperature:	25 ℃
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Andy Yu and Alan He on 2019-05-30.

Test Mode: Transmitting

FCC Part 15.249 Page 12 of 21

30MHz – 1 GHz:

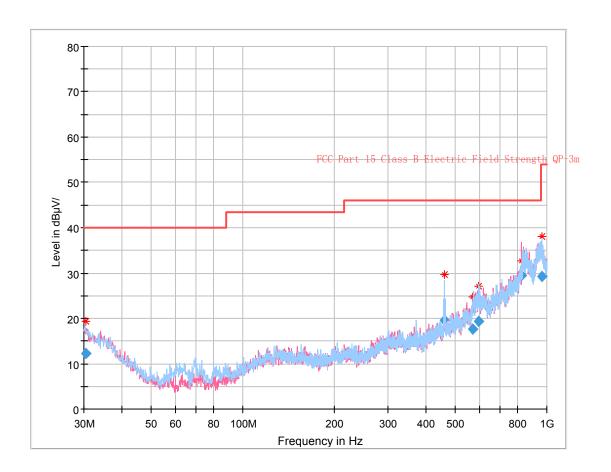

Report No.: RSZ180207801-00

Frequency (MHz)	Corrected Amplitude (dBµV/m)	Antenna height (cm)	Antenna Polarity	Turntable position (degree)	Correction Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
30.344984	12.35	273.0	Н	318.0	-7.8	40.00	27.65
460.918500	19.55	241.0	Н	30.0	-8.0	46.00	26.45
572.610750	17.55	297.0	Н	180.0	-3.7	46.00	28.45
597.105250	19.39	381.0	Н	50.0	-1.8	46.00	26.61
828.018625	29.50	139.0	V	314.0	4.7	46.00	16.50
960.283375	29.28	298.0	Н	260.0	9.2	53.90	24.62

FCC Part 15.249 Page 13 of 21

1 GHz - 25 GHz:

Frequency	Re	eceiver	Turntable	Rx Aı	ntenna		Corrected	FCC 15.249&	
(MHz)	Reading (dBµV)	PK/QP/Ave.	Degree	Height (m)	Polar (H/V)	Factor (dB/m)	Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
			Low Ch	annel (2	2410 M	Hz)			
2410.00	56.13	PK	209	1.2	Н	31.87	88.00	114	26.00
2410.00	18.40	Ave.	209	1.2	Н	31.87	50.27	94	43.73
2410.00	62.46	PK	55	1.3	V	31.87	94.33	114	19.67
2410.00	19.28	Ave.	55	1.3	V	31.87	51.15	94	42.85
2381.82	28.32	PK	134	1.6	V	31.87	60.19	74	13.81
2381.82	14.02	Ave.	134	1.6	V	31.87	45.89	54	8.11
2490.91	27.28	PK	76	2.4	V	32.13	59.41	74	14.59
2490.91	13.45	Ave.	76	2.4	V	32.13	45.58	54	8.42
4820.00	61.22	PK	328	2.3	V	6.28	67.50	74	6.50
4820.00	32.61	Ave.	328	2.3	V	6.28	38.89	54	15.11
			Middle C	hannel	(2443 N	(Hz)			
2443.00	54.44	PK	1	1.8	Н	31.97	86.41	114	27.59
2443.00	17.97	Ave.	1	1.8	Н	31.97	49.94	94	44.06
2443.00	62.81	PK	70	1.5	V	31.97	94.78	114	19.22
2443.00	19.26	Ave.	70	1.5	V	31.97	51.23	94	42.77
4886.00	62.00	PK	332	1.4	V	6.76	68.76	74	5.24
4886.00	33.03	Ave.	332	1.4	V	6.76	39.79	54	14.21
			High Ch	annel (2475 M	Hz)			
2475.00	50.89	PK	54	1.4	Н	32.13	83.02	114	30.98
2475.00	17.55	Ave.	54	1.4	Н	32.13	49.68	94	44.32
2475.00	61.12	PK	182	2.3	V	32.13	93.25	114	20.75
2475.00	18.98	Ave.	182	2.3	V	32.13	51.11	94	42.89
2330.20	28.36	PK	268	1.1	V	31.64	60.00	74	14.00
2330.20	14.00	Ave.	268	1.1	V	31.64	45.64	54	8.36
2483.93	28.11	PK	155	1.1	V	32.13	60.24	74	13.76
2483.93	13.54	Ave.	155	1.1	V	32.13	45.67	54	8.33
4950.00	62.23	PK	194	1.2	V	6.80	69.03	74	4.97
4950.00	32.87	Ave.	194	1.2	V	6.80	39.67	54	14.33

Report No.: RSZ180207801-00

Corrected Amplitude = Corrected Factor + Reading Corrected Factor=Antenna factor (RX) +cable loss – amplifier factor


Margin = Limit- Corr. Amplitude

The emission more than 20dB below the limit was not required to be recorded.


FCC Part 15.249 Page 14 of 21

Pre-scan with Low channel Peak Horizontal

Report No.: RSZ180207801-00

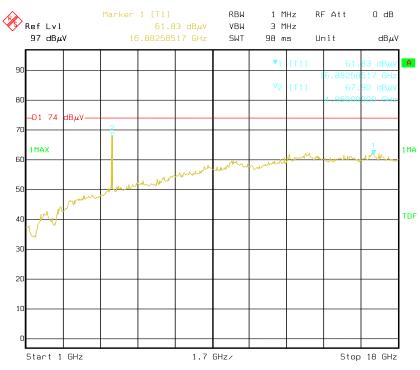




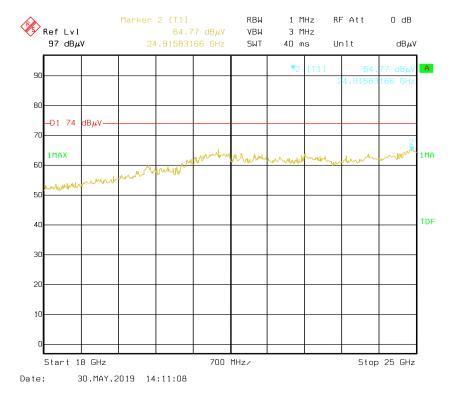



FCC Part 15.249 Page 15 of 21

Vertical

Report No.: RSZ180207801-00

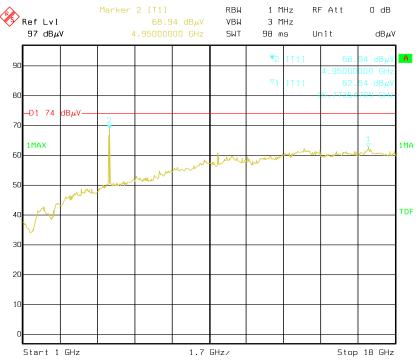




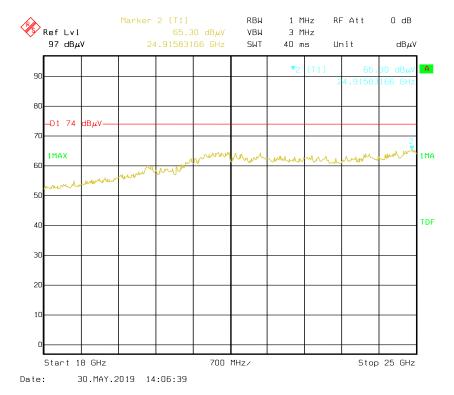


FCC Part 15.249 Page 16 of 21

Average value for the peak point at pre-scan Horizontal

Report No.: RSZ180207801-00

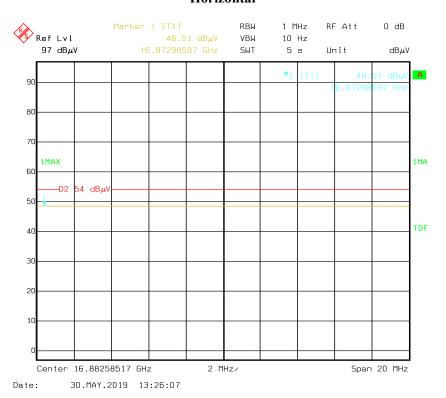


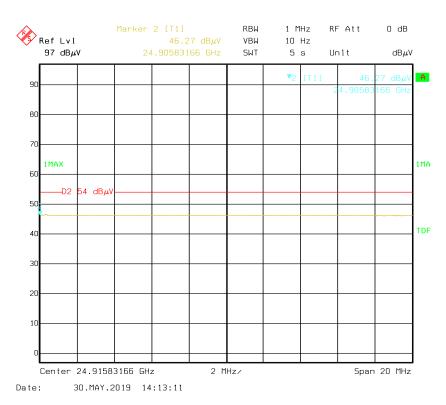


FCC Part 15.249 Page 17 of 21

Vertical

Report No.: RSZ180207801-00

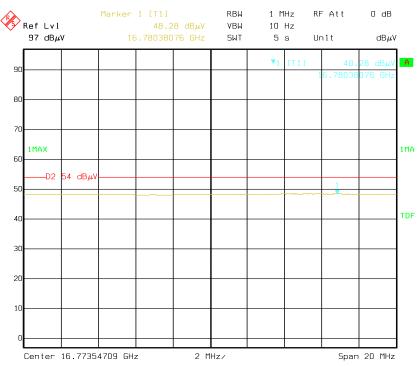

Date: 30.MAY.2019 13:33:13

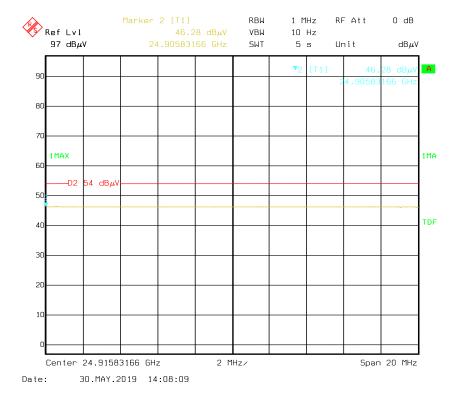

FCC Part 15.249 Page 18 of 21

FCC§15.215(c) - 20dB EMISSION BANDWIDTH

Applicable Standard

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

Report No.: RSZ180207801-00

Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- 3. Measure the frequency difference of two frequencies that indicated 20dB bandwidth.
- 4. Repeat above procedures until all frequencies measured were complete.

Test Data

Environmental Conditions

Temperature:	25~26 ℃
Relative Humidity:	51~55 %
ATM Pressure:	100.9~101.0 kPa

The testing was performed by Alan He from 2019-05-29 to 2019-05-30.

Test Mode: Transmitting


Please refer to the following table and plots.

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
Low	2410	1.124
Middle	2443	1.142
High	2475	1.148


FCC Part 15.249 Page 19 of 21

Low Channel

Report No.: RSZ180207801-00

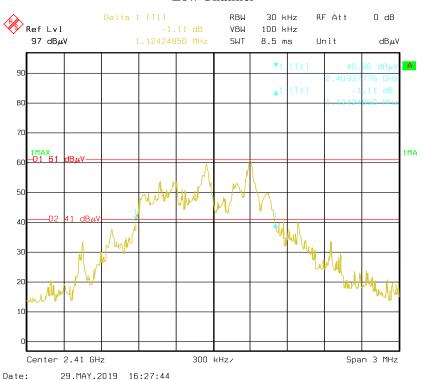


Middle Channel

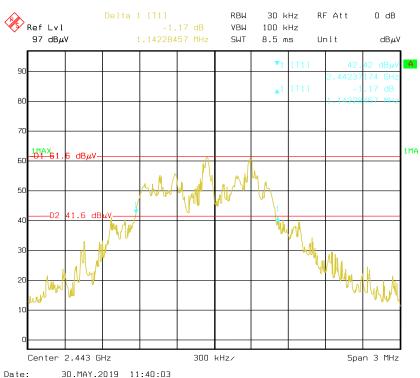

FCC Part 15.249 Page 20 of 21

High Channel

Report No.: RSZ180207801-00

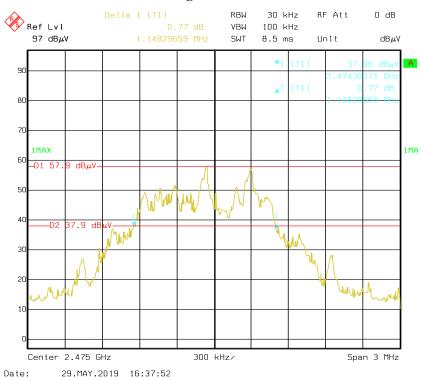

***** END OF REPORT *****

FCC Part 15.249 Page 21 of 21