



RADIO TEST REPORT

FCC ID: 2AB7A20141140

Product : GSM MOBILE PHONE

Trade Name : N/A

Model Name : CHIC FIRE D40Z

Serial Model : CHIC FIRE D45Z,S11,R11,N11

Report No. : BZT14052158

Prepared for

HK AONYSTAR CO.,LIMITED

ROOM 1103,HANG SENG MONGKOK BUILDING,677 NATHAN
ROAD,MONGKOK,KOWLOON HONGKONG

Prepared by

BZT Testing Technology Co., Ltd

Add. : Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an
District, Shenzhen P.R. China.

TEST RESULT CERTIFICATION

Applicant's name : HK AONYSTAR CO.,LIMITED
Address : ROOM 1103,HANG SENG MONGKOK BUILDING,677 NATHAN ROAD,MONGKOK,KOWLOON HONGKONG

Manufacture's Name : HK AONYSTAR CO.,LIMITED
Address : ROOM 1103,HANG SENG MONGKOK BUILDING,677 NATHAN ROAD,MONGKOK,KOWLOON HONGKONG

Product description

Product name.....: GSM MOBILE PHONE

Model and/or type reference : CHIC FIRE D40Z

Serial Model: CHIC FIRE D45Z,S11,R11,N11

Standards: FCC Part 22H and 24E

Test procedure ANSI C63.4-2003, RSS-Gen Issue 3

This device described above has been tested by BZT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of BZT, this document may be altered or revised by BZT, personal only, and shall be noted in the revision of the document.

Date of Test.....:

Date (s) of performance of tests.....: 10 April 2014 ~29 April 2014

Date of Issue: 04 May 2014

Test Result: **Pass**

Table of Contents	Page
1 . SUMMARY OF TEST RESULTS	5
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
2 . GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	8
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	9
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	10
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	11
3 . TEST RESULT	12
3.1 ANTENNA REQUIREMENT	12
3.1.1 STANDARD REQUIREMENT	12
3.1.2 EUT ANTENNA	12
3.2 OUTPUT POWER	13
3.2.1 CONDUCTED OUTPUT POWER	13
3.2.2 RADIATED OUTPUT POWER	14
3.3 SPURIOUS EMISSION	17
3.3.1 CONDUCTED SPURIOUS EMISSION	17
3.3.2 RADIATED SPURIOUS EMISSION	19
3.4 FREQUENCY STABILITY	22
3.4.1 MEASUREMENT METHOD	22
3.4.2 PROVISIONS APPLICABLE	22
3.5 OCCUPIED BANDWIDTH	25
3.5.1 MEASUREMENT METHOD	25
3.5.2 PROVISIONS APPLICABLE	25
3.5.3 MEASUREMENT RESULT	25
3.6 EMISSION BANDWIDTH	26
3.6.1 MEASUREMENT METHOD	26
3.6.2 PROVISIONS APPLICABLE	26
3.6.3 MEASUREMENT RESULT	26
3.7 BAND EDGE	27
3.7.1 MEASUREMENT METHOD	27
3.7.2 PROVISIONS APPLICABLE	27
3.7.3 MEASUREMENT RESULT	27
APPENDIX I	28
APPENDIX II	46
APPENDIX III	52

Table of Contents	Page
4 . EUT TEST PHOTO APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	56

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

Item Number	Item Description		Rules	Result
1	Output Power	Conducted Output Power	22.913(a) / 24.232 (b) RSS-132(5.4) SRSP-503(5.1.3)	Pass
		Radiated Output Power		
2	Spurious Emission	Conducted Spurious Emission	2.1051 / 22.917 / 24.238 RSS-132(5.5) RSS-133 (6.5)	Pass
		Radiated Spurious Emission		
3	Frequency Stability		2.1055 /24.235 RSS-132(5.3) RSS-133(6.3)	Pass
4	Occupied Bandwidth		2.1049 (h)(i)	Pass
5	Emission Bandwidth		22.917(b) / 24.238 (b) RSS-132(5.5.1) RSS-133(6.5.1)	Pass
6	Band Edge		22.917(b) / 24.238 (b) RSS-132(5.5.1) RSS-133(6.5.1)	Pass

1.1 TEST FACILITY

BZT Testing Technology Co., Ltd

Add. : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen P.R. China.

FCC Registration No.: 701733

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 % .

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	Radiated Emission Test	$\pm 3.17\text{dB}$
3	RF power,conducted	$\pm 0.16\text{dB}$
4	Spurious emissions,conducted	$\pm 0.21\text{dB}$
5	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
6	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	GSM MOBILE PHONE
Trade Name	N/A
Model Name	CHIC FIRE D40Z
OEM Brand/Model Name	CHIC FIRE D45Z,S11,R11,N11
Model Difference	All the model are the same,only different in model names.
Frequency:	GSM 850 MHz;:824.2-848.4MHz PCS 1900 MHz: 1850.2-1909.8MHz
Output Power:	GSM850(Class 4) : 1.469 W (31.67dBm) GPRS850(Multislot Class 8) : 1.503 W (31.77 dBm) GSM1900 (Class 1) : 0.764 W (28.83dBm) GPRS1900 (Multislot Class 8) : 0.746 W (28.73 dBm)
Type of Modulation	GMSK
Antenna Type	FPCB Antenna
Power Source	DC Voltage supplied from battery
Power Rating	DC 3.7V from battery
Connecting I/O Port(s)	Please refer to the User's Manual
Products Covered	N/A
EUT Modification(s)	N/A

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

For Radiated Emission	
Final Test Mode	Description
GSM850	TX1
PCS1900	TX2
GPRS850	TX3
GPRS1900	TX4


Note:

(1) During the testing, the EUT (GSM Dual Band GPRS Digital GSM MOBILE PHONE) was controlled via Rhode & Schwarz Digital Radio Communication Tester (CMU 200) to ensure max power transmission and proper modulation. Three channels (The top channel, the middle channel and the bottom channel) were chosen for testing on both GSM and PCS frequency band.


(2) The EUT use new battery.

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

CONDUCTED METHOD:

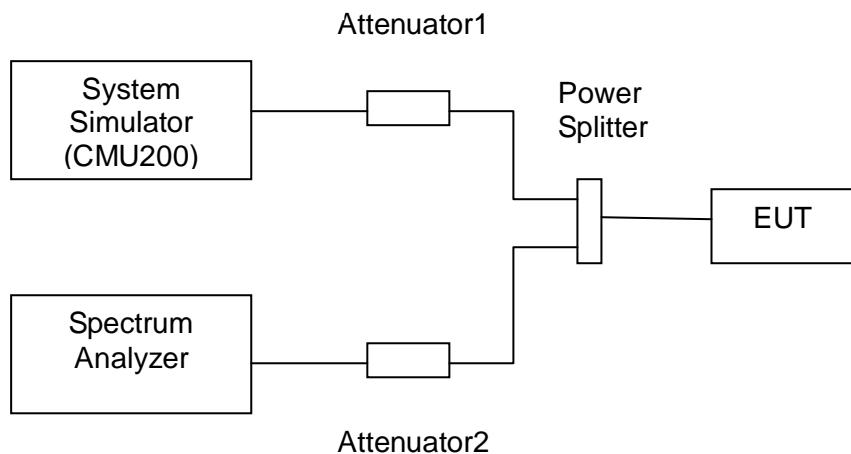

RADIATED METHOD:

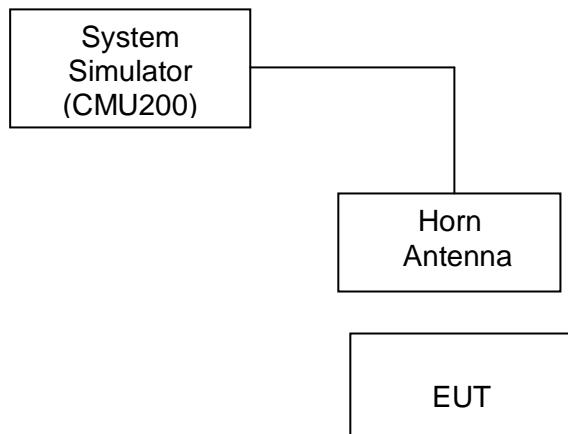

2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	GSM MOBILE PHONE	N/A	CHIC FIRE D40Z	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2013.07.06	2014.07.05	1 year
2	Test Receiver	R&S	ESPI	101318	2013.06.07	2014.06.06	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2013.07.06	2014.07.05	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2013.06.07	2014.06.06	1 year
5	Spectrum Analyzer	ADVANTEST	R3132	150900201	2013.06.07	2014.06.06	1 year
6	Horn Antenna	EM	EM-AH-10180	2011071402	2013.07.06	2014.07.05	1 year
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2013.07.06	2014.07.05	1 year
8	Amplifier	EM	EM-30180	060538	2013.12.22	2014.12.21	1 year
9	Loop Antenna	ARA	PLA-1030/B	1029	2013.06.08	2014.06.07	1 year
10	Power Meter	R&S	NRVS	100696	2013.07.06	2014.07.05	1 year
11	Power Sensor	R&S	URV5-Z4	0395.1619.05	2013.07.06	2014.07.05	1 year
12	Communication Tester	R&S	CMU200	A0304247	2013.07.06	2014.07.05	1 year
13	Power Splitter	Agilent	11636A	N/A	2013.07.06	2014.07.05	1 year

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2013.06.06	2014.06.05	1 year
2	LISN	R&S	ENV216	101313	2013.08.24	2014.08.23	1 year
3	LISN	EMCO	3816/2	00042990	2013.08.24	2014.08.23	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2013.06.07	2014.06.06	1 year
5	Passive Voltage Probe	R&S	ESH2-Z3	100196	2013.06.07	2014.06.06	1 year
6	Absorbing clamp	R&S	MOS-21	100423	2013.06.08	2014.06.07	1 year

3. TEST RESULT

3.1 ANTENNA REQUIREMENT

3.1.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

3.1.2 EUT ANTENNA

The EUT antenna is FPCB Antenna. It comply with the standard requirement.

3.2 OUTPUT POWER

3.2.1 CONDUCTED OUTPUT POWER

MEASUREMENT METHOD

The EUT was setup for the max output power with pseudo random data modulation. Power was measured with Spectrum Analyzer. The measurements were performed on all modes(GSM, GPRS, EGPRS) at 3 typical channels(the Top Channel, the Middle Channel and the Bottom Channel) for both GSM band and PCS band

PROVISIONS APPLICABLE

Conducted Output Power Limits for GSM 850 MHZ		
Mode	Power Step	Nominal Peak Power
GSM	5	31.5 dBm (2W)
GPRS	3	31.5 dBm (2W)

Conducted Output Power Limits for PCS 1900 MHZ		
Mode	Power Step	Nominal Peak Power
GSM	0	28.5 dBm (1W)
GPRS	3	28.5 dBm (1W)

MEASUREMENT RESULT

Mode	Frequency	Power Step	Result		Conclusion
			Peak Power (dBm)	Tolerance (dB)	
GSM	824.2	5	31.26	-0.24	Pass
	836.6	5	31.67	0.17	Pass
	848.8	5	31.26	-0.24	Pass
GPRS Class 8	824.2	3	31.18	-0.32	Pass
	836.6	3	31.21	-0.29	Pass
	848.8	3	31.77	0.27	Pass

Conducted Output Power for PCS 1900 MHZ					
Mode	Frequency	Power Step	Result		Conclusion
			Peak Power (dBm)	Tolerance (dB)	
GSM	1850.2	0	28.42	-0.08	Pass
	1880.0	0	28.83	0.33	Pass
	1909.8	0	28.19	-0.31	Pass
GPRS Class 8	1850.2	3	28.73	0.23	Pass
	1880.0	3	28.29	-0.21	Pass
	1909.8	3	28.06	-0.44	Pass

3.2.2 RADIATED OUTPUT POWER

MEASUREMENT METHOD

The measurements procedures specified in TIA-603C-2004 were applied.

- 1 In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference centre of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (P_{in}) is applied to the input of the dipole, and the power received (P_r) at the chamber's probe antenna is recorded.
- 2 The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established as $AR_{pl} = P_{in} + 2.15 - P_r$. The AR_{pl} is the attenuation of "reference path loss", and including the gain of receive antenna, the cable loss and the air loss. The measurement results are obtained as described below: $Power = PM_{ea} + AR_{pl}$
- 3 The EUT is substituted for the dipole at the reference centre of the chamber and a scan is performed to obtain the radiation pattern.
- 4 From the radiation pattern, the co-ordinates where the maximum antenna gain occurs are identified.
- 5 The EUT is then put into continuously transmitting mode at its maximum power level.
- 6 Power mode measurements are performed with the receiving antenna placed at the coordinates determined in Step 3 to determine the output power as defined in Rule 24.232 (b) and (c). The "reference path loss" from Step 1 is added to this result.
- 7 This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.15 dBi) and known input power (P_{in}).

ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.

PROVISIONS APPLICABLE

This is the test for the maximum radiated power from the EUT. Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage." Rule Part 22.913(a) specifies "Maximum ERP. The effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 Watts. The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."

Radiated Power Limits for GSM 850 MHZ (ERP)		
Mode	Power Step	Nominal Peak Power
GSM	5	<=38.45 dBm (7W)
GPRS	3	<=38.45 dBm (7W)

Radiated Power Limits for PCS 1900 MHZ (E.I.R.P.)		
Mode	Power Step	Nominal Peak Power
GSM	0	<=33 dBm (2W)
GPRS	3	<=33 dBm (2W)

MEASUREMENT RESULT

Radiated Power (ERP) for GSM 850 MHZ					
Mode	Frequency	Power Step	Result		Conclusion
			Max. Peak ERP (dBm)	Polarization Of Max. ERP	
GSM	824.2	5	26.78	Horizontal	Pass
	836.6	5	27.19	Horizontal	Pass
	848.8	5	25.09	Horizontal	Pass
GPRS	824.2	3	26.12	Horizontal	Pass
	836.6	3	25.19	Horizontal	Pass
	848.8	3	25.28	Horizontal	Pass

Radiated Power (E.I.R.P) for PCS 1900 MHZ					
Mode	Frequency	Power Step	Result		Conclusion
			Max. Peak E.I.R.P.(dBm)	Polarization Of Max. E.I.R.P.	
GSM	1850.2	0	25.27	Horizontal	Pass
	1880.0	0	25.69	Horizontal	Pass
	1909.8	0	24.81	Horizontal	Pass
GPRS	1850.2	3	24.89	Horizontal	Pass
	1880.0	3	25.31	Horizontal	Pass
	1909.8	3	24.18	Horizontal	Pass

3.3 SPURIOUS EMISSION

3.3.1 CONDUCTED SPURIOUS EMISSION

MEASUREMENT METHOD

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1, Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of PCS1900 band, this equates to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz. For GSM850, data taken from 30 MHz to 9 GHz.

2, Determine EUT transmit frequencies: the following typical channels were chosen to conducted emissions testing.

Typical Channels for testing of GSM 850 MHz	
Channel	Frequency (MHz)
128	824.2
190	836.6
251	848.8

Typical Channels for testing of PCS 1900 MHz	
Channel	Frequency (MHz)
512	1850.2
661	1880.0
810	1909.8

PROVISIONS APPLICABLE

On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43+10\log(P)$ dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

MEASUREMENT RESULT

Conducted Spurious Emission for GSM 850 MHz						
Harmonic	Tx ch. 128 Freq. (MHz)	Level (dBm)	Tx ch. 190 Freq. (MHz)	Level (dBm)	Tx ch. Freq. (MHz) 251	Level (dBm)
2	1648.4	B.I.N.F	1673.2	nf	1697.6	B.I.N.F
3	2472.6	B.I.N.F	2509.8	nf	2546.4	B.I.N.F
4	3296.8	B.I.N.F	3346.4	nf	3395.2	B.I.N.F
5	4121	B.I.N.F	4183	nf	4244	B.I.N.F
6	4945.2	B.I.N.F	5019.6	nf	5092.8	B.I.N.F
7	5769.4	B.I.N.F	5856.2	nf	5941.6	B.I.N.F
8	6593.6	B.I.N.F	6692.8	nf	6790.4	B.I.N.F
9	7417.8	B.I.N.F	7529.4	nf	7639.2	B.I.N.F
10	8242	B.I.N.F	8366	nf	8488	B.I.N.F

● B.I.N.F: Below Instruments Noise floor

Conducted Spurious Emission for PCS 1900 MHz						
Harmonic	Tx ch. 512 Freq. (MHz)	Level (dBm)	Tx ch. 661 Freq. (MHz)	Level (dBm)	Tx ch. 810 Freq. (MHz)	Level (dBm)
2	3700.4	B.I.N.F	3760	nf	3819.6	B.I.N.F
3	5550.6	B.I.N.F	5640	nf	5729.4	B.I.N.F
4	7400.8	B.I.N.F	7520	nf	7639.2	B.I.N.F
5	9251.0	B.I.N.F	9400	nf	9549.0	B.I.N.F
6	11101.2	B.I.N.F	11280	nf	11458.8	B.I.N.F
7	12951.4	B.I.N.F	13160	nf	13368.6	B.I.N.F
8	14801.6	B.I.N.F	15040	nf	15278.4	B.I.N.F
9	16651.8	B.I.N.F	16920	nf	17188.2	B.I.N.F
10	18502.0	B.I.N.F	18800	nf	19098.0	B.I.N.F

B.I.N.F: Below Instruments Noise floor

Please refers to Appendix I for compliance test plots for Conducted Spurious Emission


3.3.2 RADIATED SPURIOUS EMISSION

MEASUREMENT METHOD


The measurements procedures specified in TIA-603C-2004 were used for testing. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment. The resolution bandwidth is set 1MHz as outlined in Part 24.238. The measurements were performed on all modes(GSM, GPRS, EGPRS) at 3 typical channels(the Top Channel, the Middle Channel and the Bottom Channel) for both GSM band and PCS band.

The procedure of radiated spurious emissions is as follows:

a) Pre-calibration With pre-calibration method, the Radiated Spurious Emissions(RSE) is calculated as, $RSE = Rx \text{ (dBuV)} + CL \text{ (dB)} + SA \text{ (dB)} + Gain \text{ (dBi)} - 107$ (dBuV to dBm) The SA is calibrated using following setup.

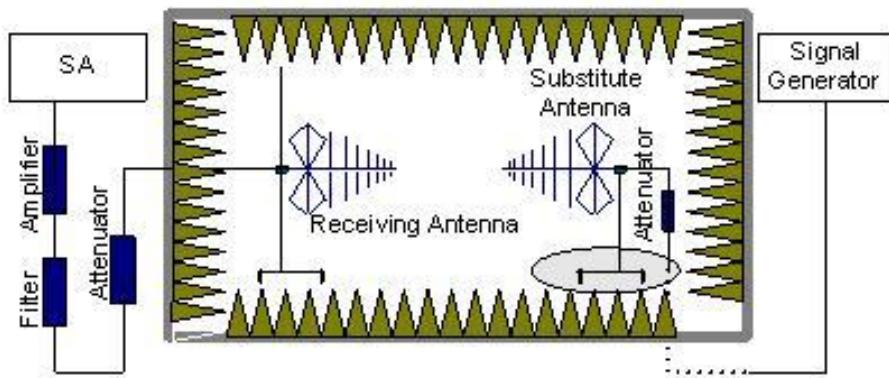

b) EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the test item for emission measurements. The height of receiving antenna is 1.4m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the test item and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1MHz bandwidth.

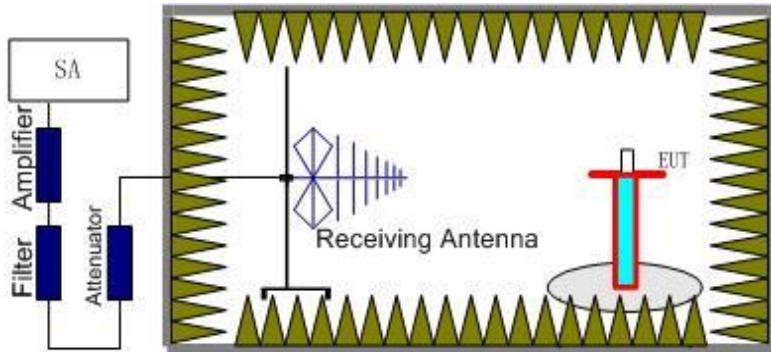

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the PCS band (1850.2 MHz, 1880 MHz and 1909.8 MHz), GSM850 band (824.2MHz, 836.6MHz, 848.8MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the PCS1900, GSM850 into any of the other blocks.

The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss and the air loss. The measurement results are obtained as described below: $\text{Power} = P_{\text{Mea}} + A_{Rpl}$

PROVISIONS APPLICABLE

(a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43 + 10\log(P)$ dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

MEASUREMENT RESULT

Test Results for Channel 128/824.2 MHz					
Frequency(MHz)	Power(dBm)	A _{Rpl} (dBm)	P _{Mea} (dBm)	Limit(dBm)	Polarity
1648.4	-35.21	-4.65	-39.86	-13.00	Horizontal
1648.4	-32.39	-4.65	-37.04	-13.00	Vertical
2472.6	-31.25	-2.1	-33.35	-13.00	Vertical
2472.6	-29.32	-2.1	-31.42	-13.00	Horizontal

Test Results for Channel 128/836.6 MHz					
Frequency(MHz)	Power(dBm)	A _{Rpl} (dBm)	P _{Mea} (dBm)	Limit(dBm)	Polarity
1673.2	-36.28	-4.97	-41.25	-13.00	Horizontal
1673.2	-37.19	-4.97	-42.16	-13.00	Vertical
2509.8	-24.23	-2.35	-26.58	-13.00	Vertical
2509.8	-23.21	-2.35	-25.56	-13.00	Horizontal

Test Results for Channel 128/848.8 MHz					
Frequency(MHz)	Power(dBm)	A _{Rpl} (dBm)	P _{Mea} (dBm)	Limit(dBm)	Polarity
1697.6	-32.13	-4.97	-37.1	-13.00	Horizontal
1697.6	-35.24	-4.97	-40.21	-13.00	Vertical
2546.4	-26.21	-2.68	-28.89	-13.00	Vertical
2546.4	-31.21	-2.68	-33.89	-13.00	Horizontal

Test Results for Channel 661/1850.2MHz					
Frequency(MHz)	Power(dBm)	A _{Rpl} (dBm)	P _{Mea} (dBm)	Limit (dBm)	Polarity
3700.4	-34.21	13.1	-21.11	-13.00	Vertical
3700.4	-30.71	13.1	-17.61	-13.00	Horizontal
5550.6	-37.22	14.7	-22.52	-13.00	Horizontal
5550.6	-39.24	14.7	-24.54	-13.00	Vertical

Test Results for Channel 661/1880.0MHz					
Frequency(MHz)	Power(dBm)	A _{Rpl} (dBm)	P _{Mea} (dBm)	Limit(dBm)	Polarity
3760	-33.38	13.8	-19.58	-13.00	Vertical
3760	-35.26	13.8	-21.46	-13.00	Horizontal
5640	-41.86	15.5	-26.36	-13.00	Horizontal
5640	-36.21	15.5	-20.71	-13.00	Vertical

Test Results for Channel 661/1909.8MHz					
Frequency(MHz)	Power(dBm)	A _{Rpl} (dBm)	P _{Mea} (dBm)	Limit(dBm)	Polarity
3819.6	-35.51	12.6	-22.91	-13.00	Vertical
3819.6	-37.24	12.6	-24.64	-13.00	Horizontal
5729.4	-42.28	15.8	-26.48	-13.00	Horizontal
5729.4	-41.27	15.8	-25.47	-13.00	Vertical

3.4 FREQUENCY STABILITY

3.4.1 MEASUREMENT METHOD

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a “call mode”. This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

- (1) Measure the carrier frequency at room temperature.
- (2) Subject the EUT to overnight soak at -30°C.
- (3) With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on channel 661 for PCS 1900, channel 190 for GSM850 measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- (4) Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- (5) Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1 Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
- (6) Subject the EUT to overnight soak at +50°C.
- (7) With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- (8) Repeat the above measurements at 10°C increments from +50°C to -30°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- (9) At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

3.4.2 PROVISIONS APPLICABLE

For Hand carried battery powered equipment

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.5VDC and 4.2VDC, with a nominal voltage of 3.8VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.

For equipment powered by primary supply voltage

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

MEASUREMENT RESULT

Frequency Error Against Voltage for GSM 850 band		
Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.4	31	0.037
3.7	26	0.031
4.2	23	0.028

Frequency Error Against Temperature for GSMS850 band		
temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	25	0.030
0	27	0.032
10	17	0.020
20	13	0.016
30	24	0.029
40	31	0.037
50	32	0.038

Note: The EUT doesn't work below -10°C

Frequency Error Against Voltage for GSM1900 band		
Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.4	15	0.008
3.7	11	0.006
4.2	26	0.014

Frequency Error Against Temperature for GPRS1900 band		
temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	30	0.016
0	27	0.014
10	15	0.008
20	26	0.014
30	18	0.010
40	19	0.010
50	21	0.011

3.5 OCCUPIED BANDWIDTH

3.5.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

3.5.2 PROVISIONS APPLICABLE

The occupied bandwidth (99%) shall not exceed 300 KHz.

3.5.3 MEASUREMENT RESULT

Occupied Bandwidth (99%) for GSM 850 MHz		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)(kHz)
GSM	824.2	252.37
	836.6	251.98
	848.8	239.44
GPRS	824.2	249.97
	836.6	247.99
	848.8	248.89

Occupied Bandwidth (99%) for PCS 1900 MHz		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)(kHz)
GSM	1850.2	252.89
	1880.0	247.26
	1909.8	242.22
GPRS	1850.2	244.01
	1880.0	242.74
	1909.8	247.28

Please refers to Appendix II for compliance test plots for Occupied Bandwidth (99%)

3.6 EMISSION BANDWIDTH

3.6.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

3.6.2 PROVISIONS APPLICABLE

The emission bandwidth is defined as two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power

3.6.3 MEASUREMENT RESULT

Emission Bandwidth (-26dBc) for GSM 850 MHz		
Mode	Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)
GSM	824.2	316.47
	836.6	319.29
	848.8	316.93
GPRS	824.2	322.12
	836.6	315.71
	848.8	320.65

Emission Bandwidth (-26dBc) for PCS 1900 MHz		
Mode	Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)
GSM	1850.2	322.11
	1880.0	323.62
	1909.8	311.89
GPRS	1850.2	320.22
	1880.0	324.77
	1909.8	320.67

Please refers to Appendix II for compliance test plots for Emission Bandwidth (-26dBc)

3.7 BAND EDGE

3.7.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

3.7.2 PROVISIONS APPLICABLE

as Specified in FCC rules of 22.917(b) and 24.238(b)

3.7.3 MEASUREMENT RESULT


Please refers to Appendix III for compliance test plots for band edges

APPENDIX I


TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION

CONDUCTED EMISSION IN GSM BAND


Conducted Emission Transmitting Mode CH 128 30MHz – 1GHz

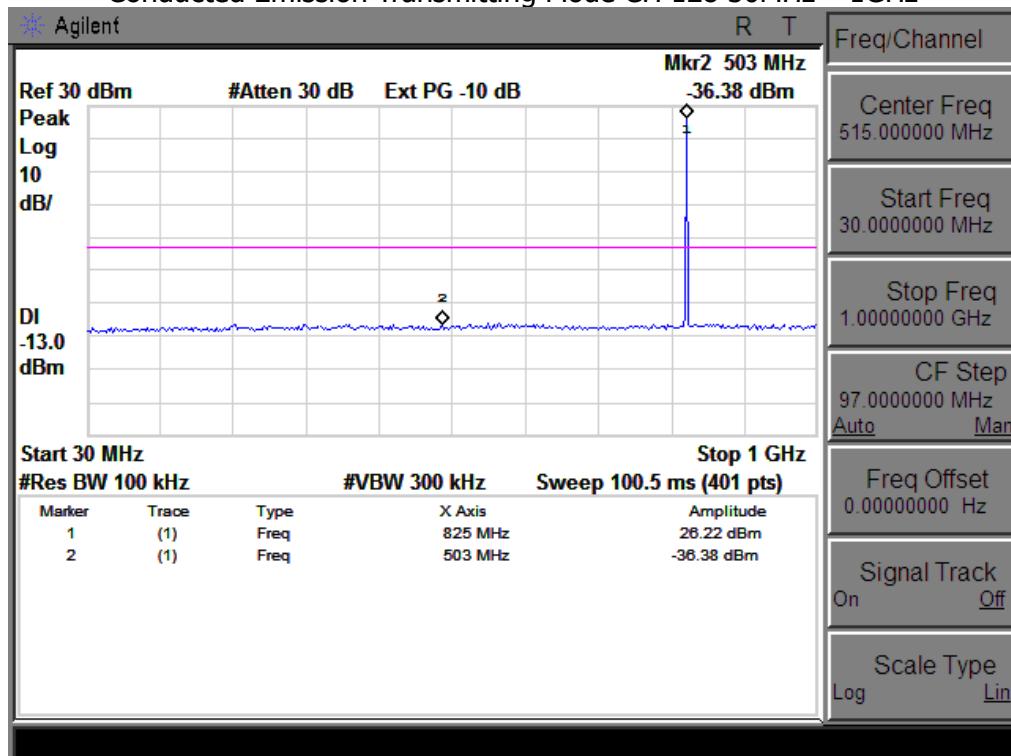


Conducted Emission Transmitting Mode CH 128 1GHz – 10GHz

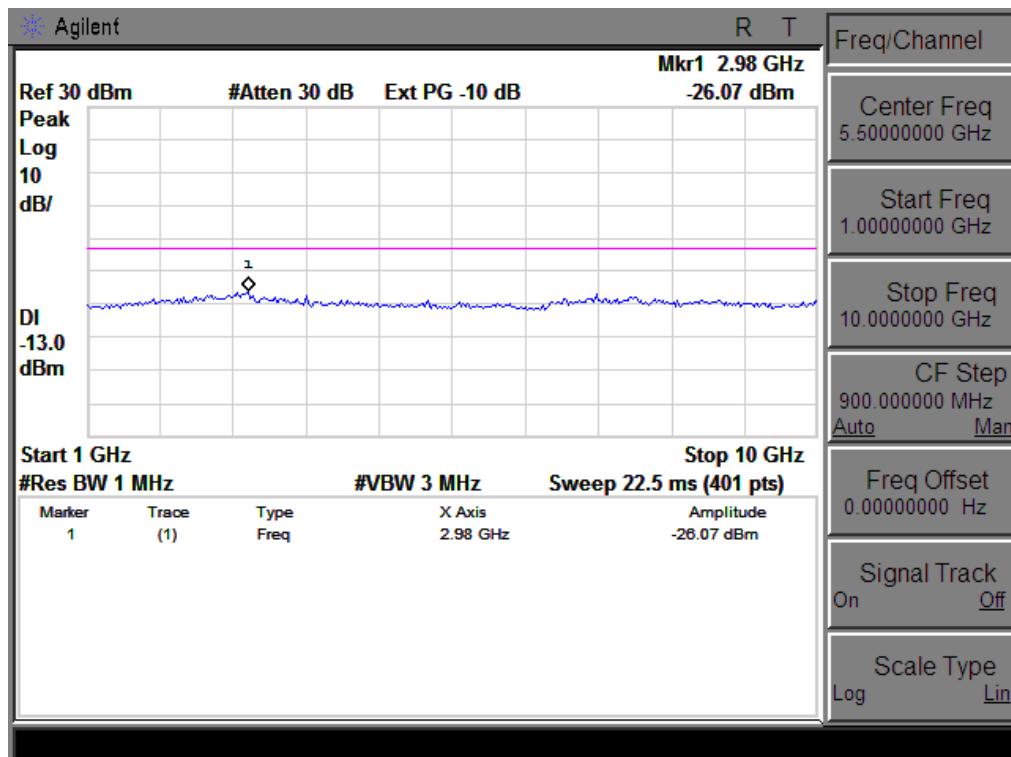


Conducted Emission Transmitting Mode CH 190 30MHz – 1GHz

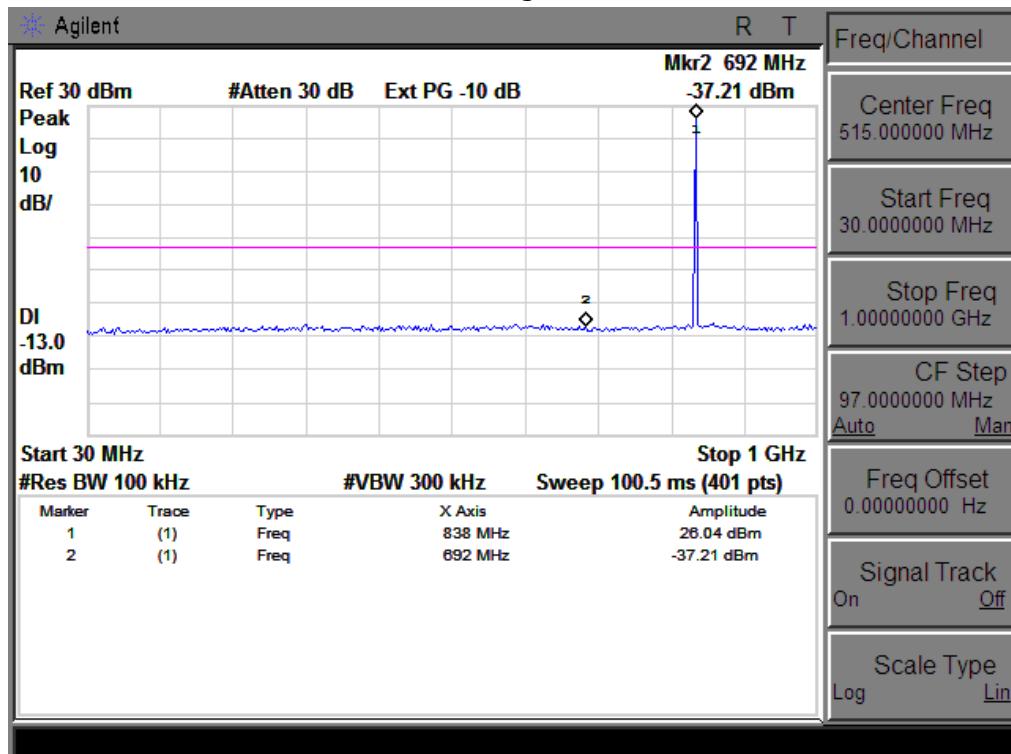


Conducted Emission Transmitting Mode CH 190 1GHz – 10GHz

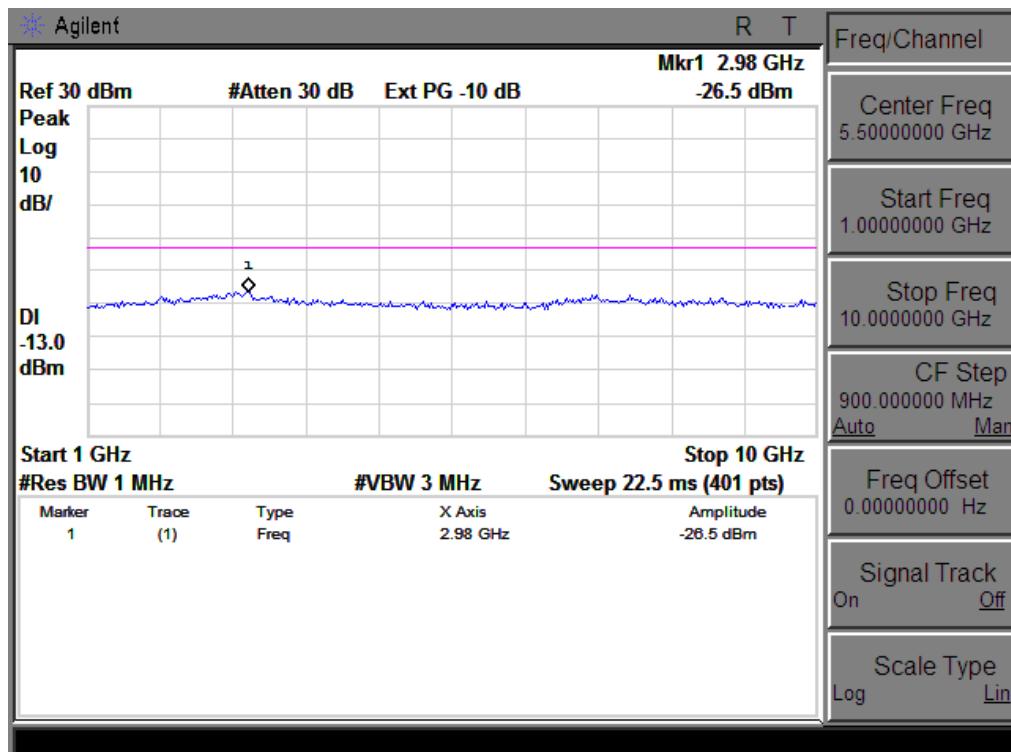


Conducted Emission Transmitting Mode CH 251 30MHz – 1GHz

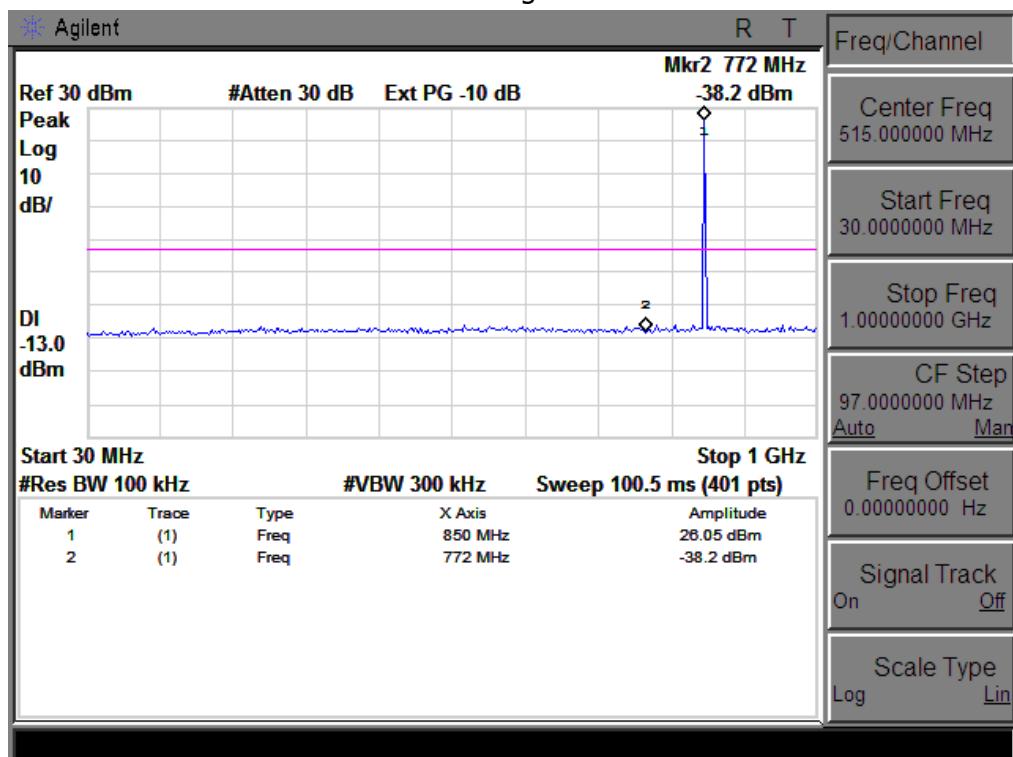


Conducted Emission Transmitting Mode CH 251 1GHz – 10GHz

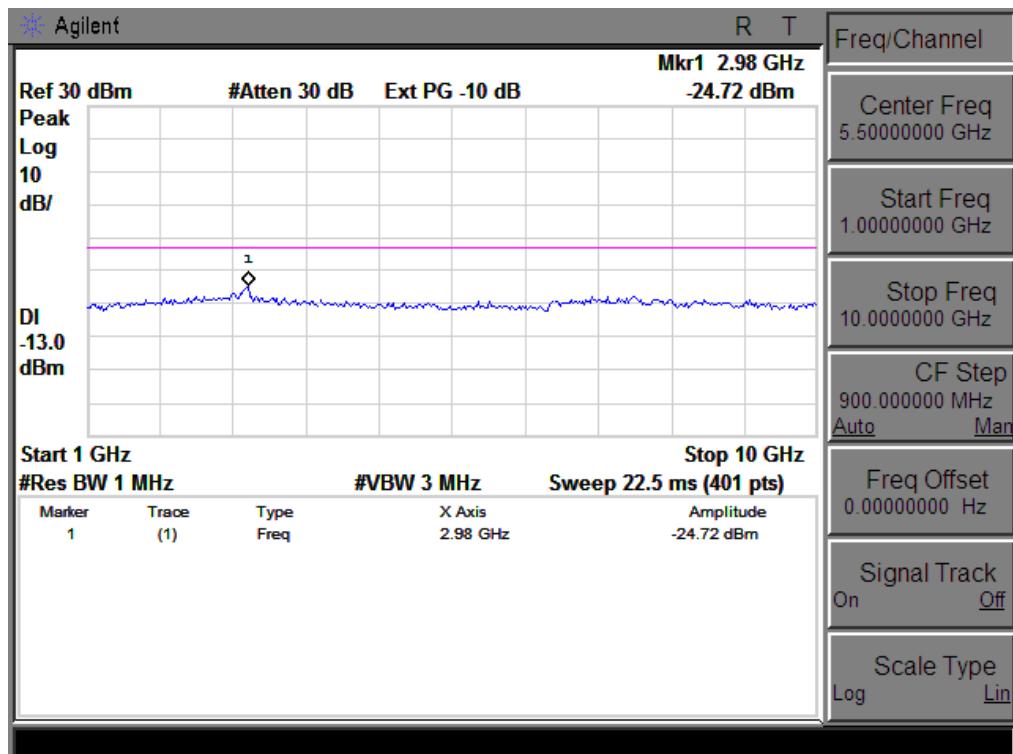


CONDUCTED EMISSION IN GPRS BAND
Conducted Emission Transmitting Mode CH 128 30MHz – 1GHz

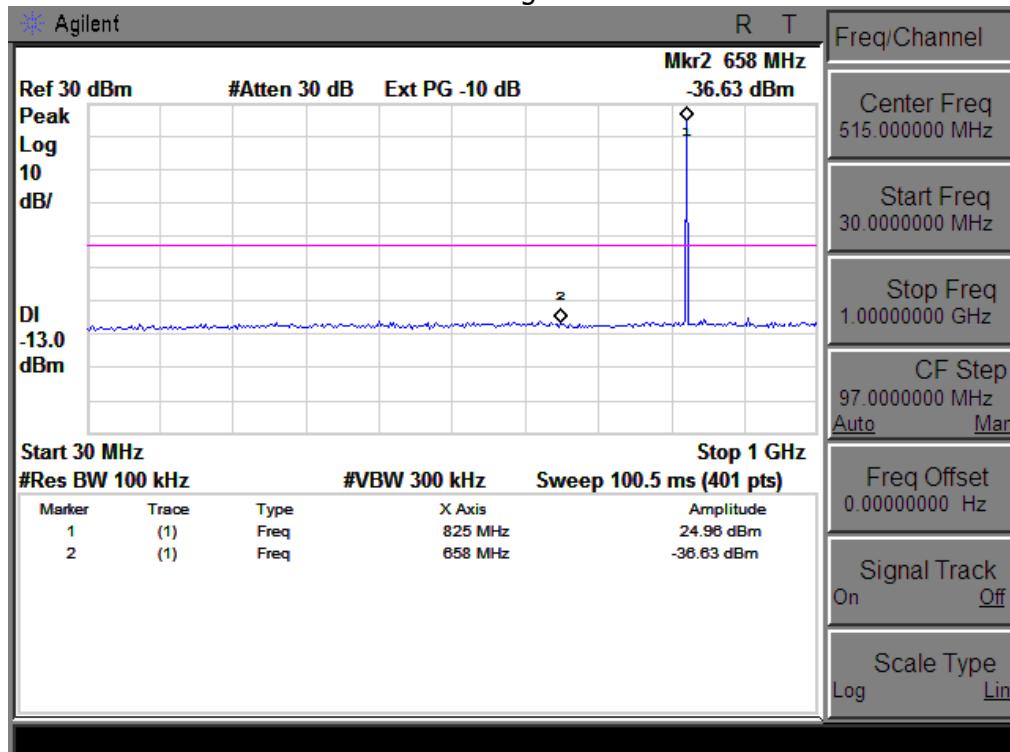


Conducted Emission Transmitting Mode CH 128 1MHz – 10GHz

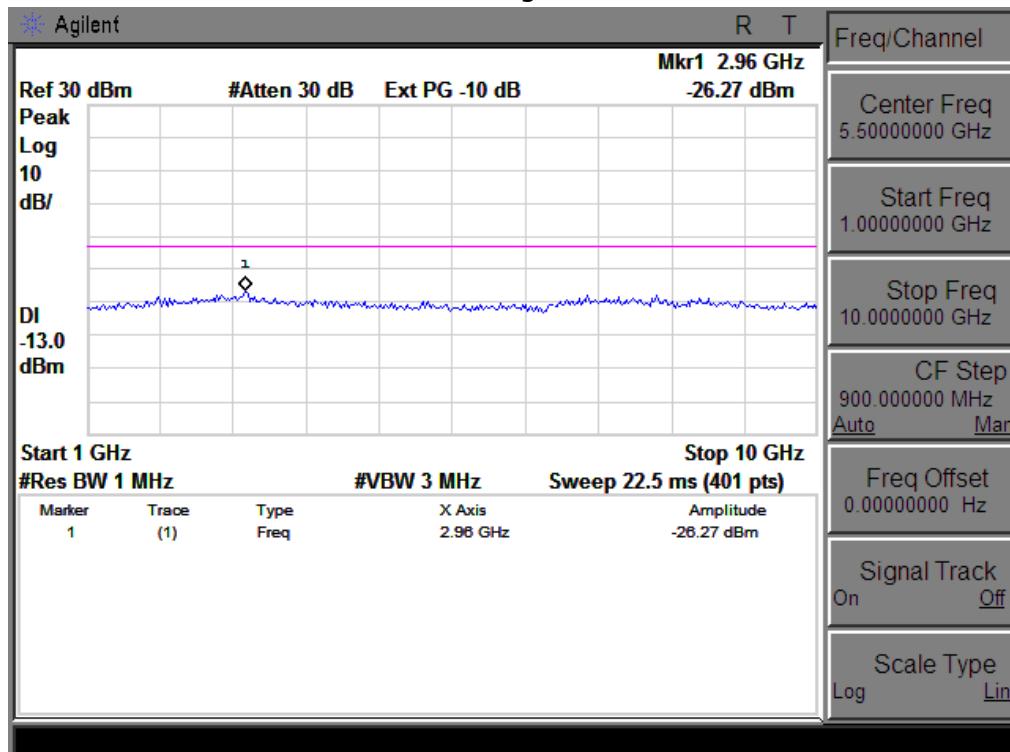


Conducted Emission Transmitting Mode CH 190 30MHz – 1GHz

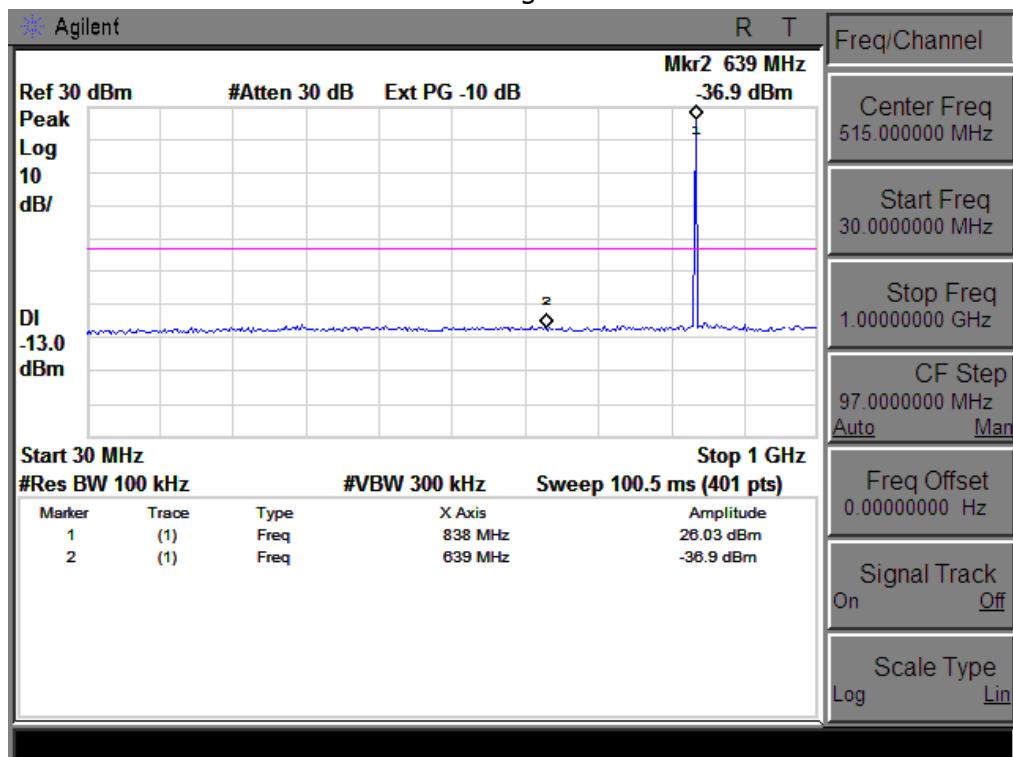


Conducted Emission Transmitting Mode CH 190 1GHz – 10GHz

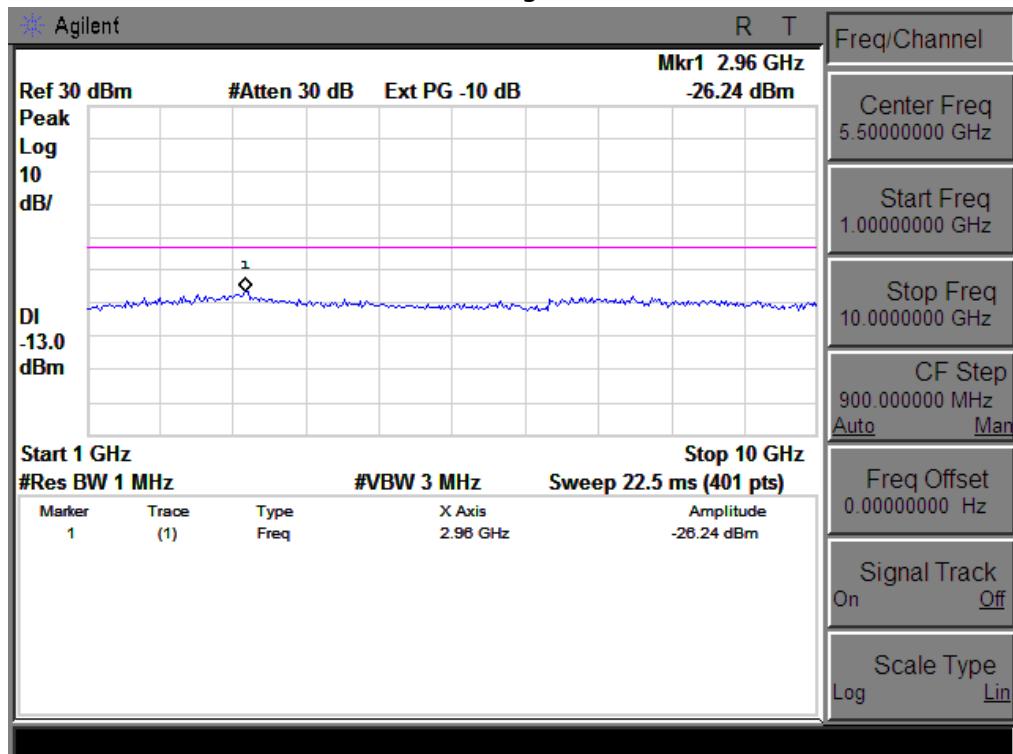


Conducted Emission Transmitting Mode CH 251 30MHz – 1GHz

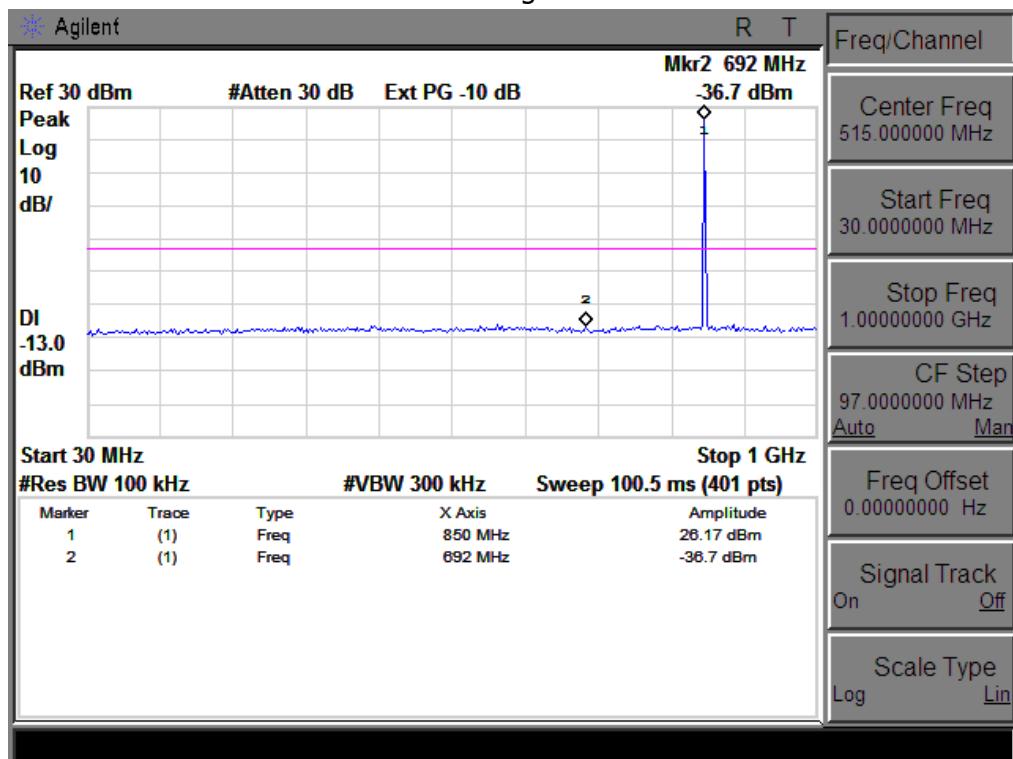


Conducted Emission Transmitting Mode CH 251 1GHz – 10GHz

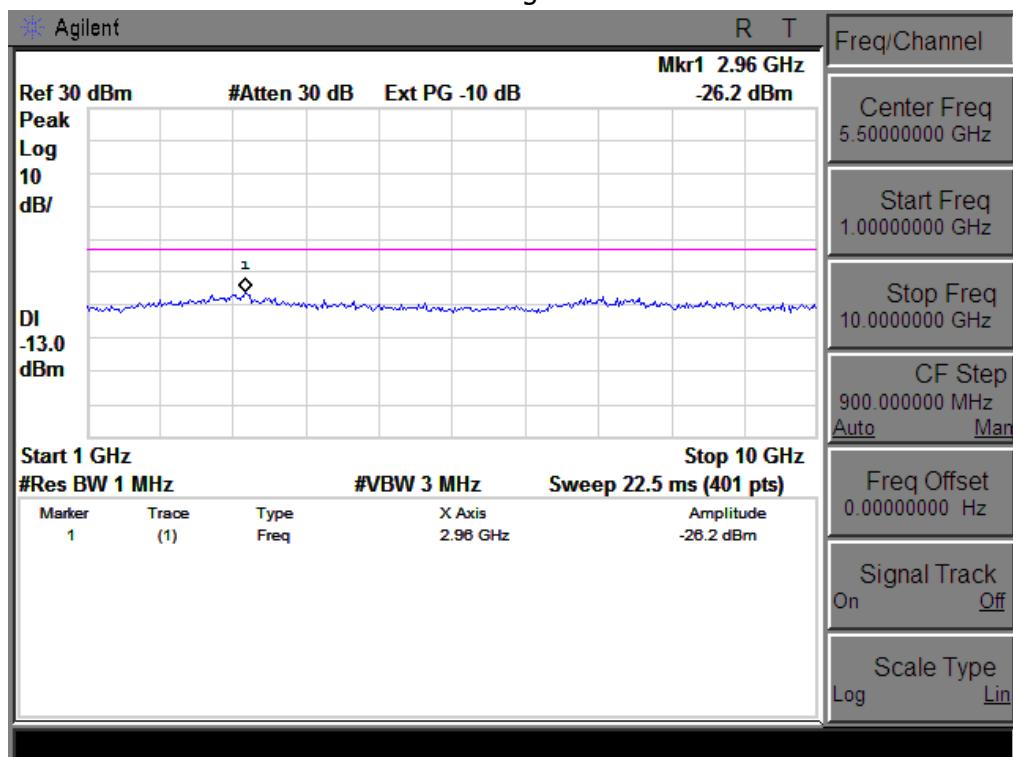


CONDUCTED EMISSION IN PCS BAND
Conducted Emission Transmitting Mode CH 512 30MHz – 1GHz

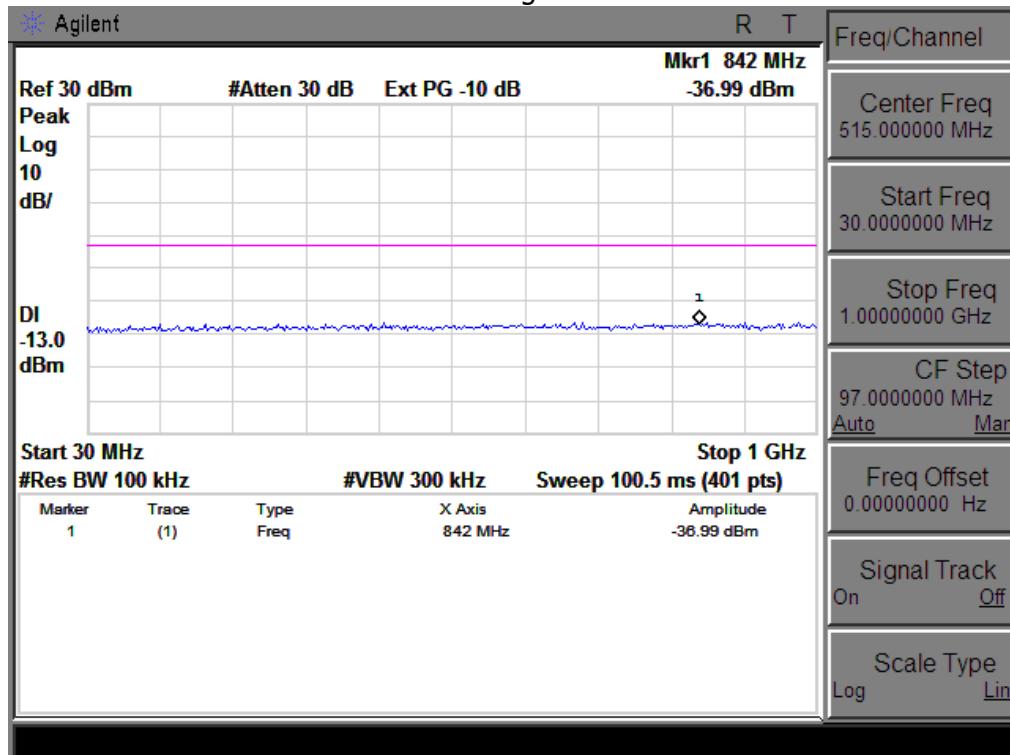


Conducted Emission Transmitting Mode CH 512 1GHz – 2GHz

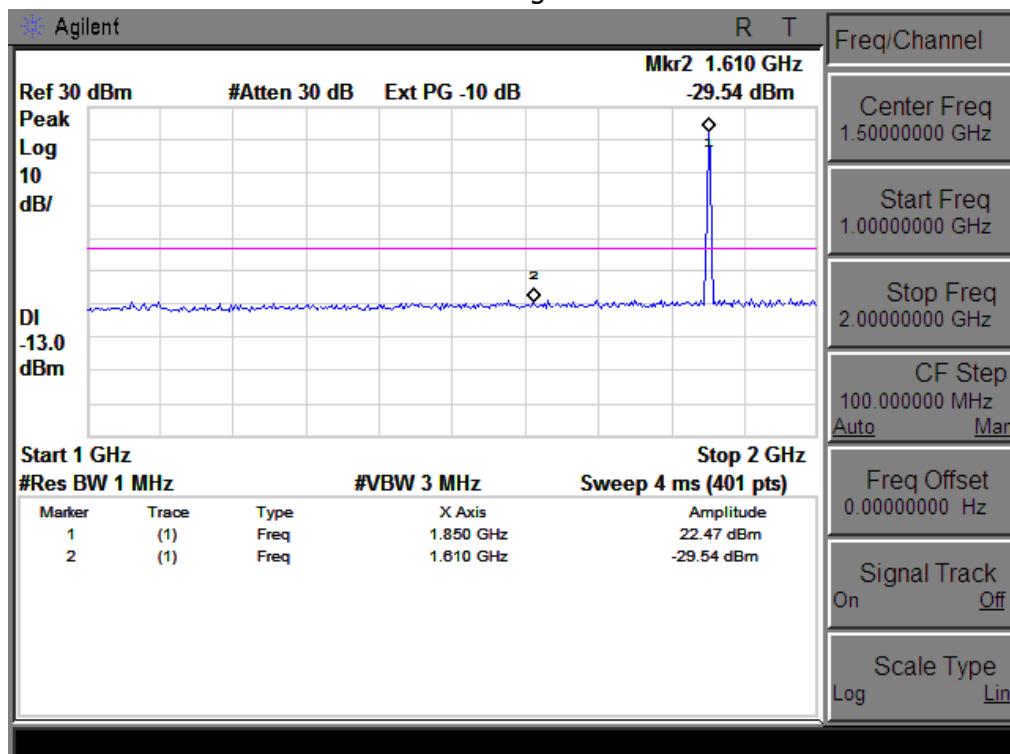


Conducted Emission Transmitting Mode CH 512 2GHz – 20GHz

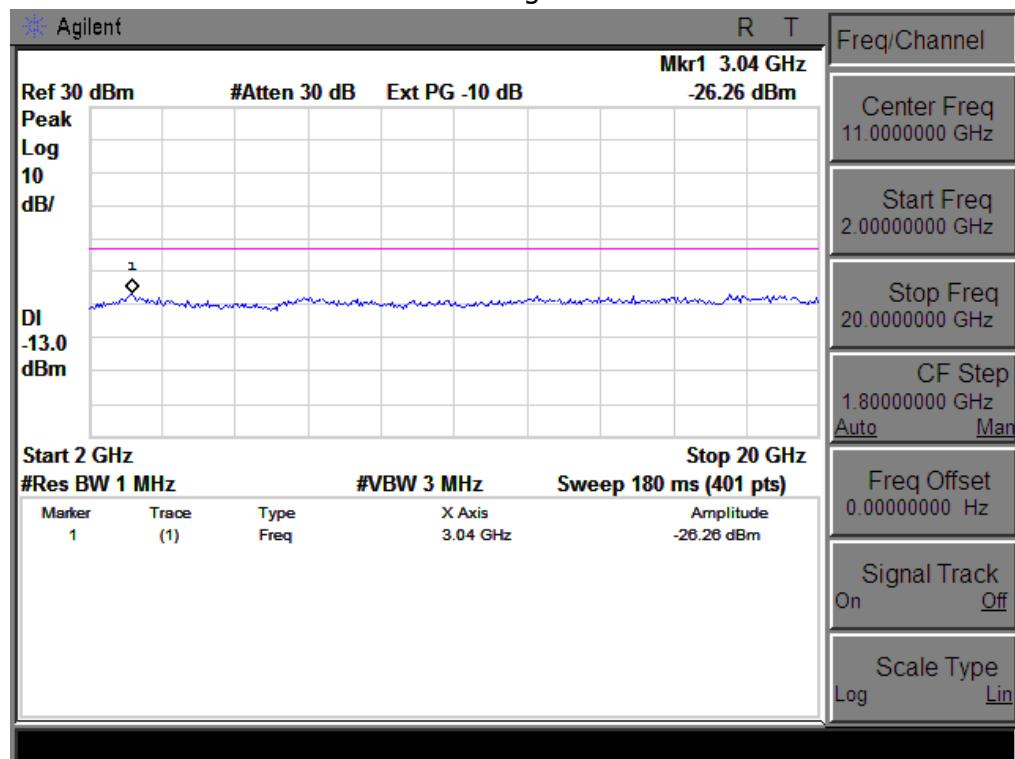


Conducted Emission Transmitting Mode CH 661 30MHz – 1GHz

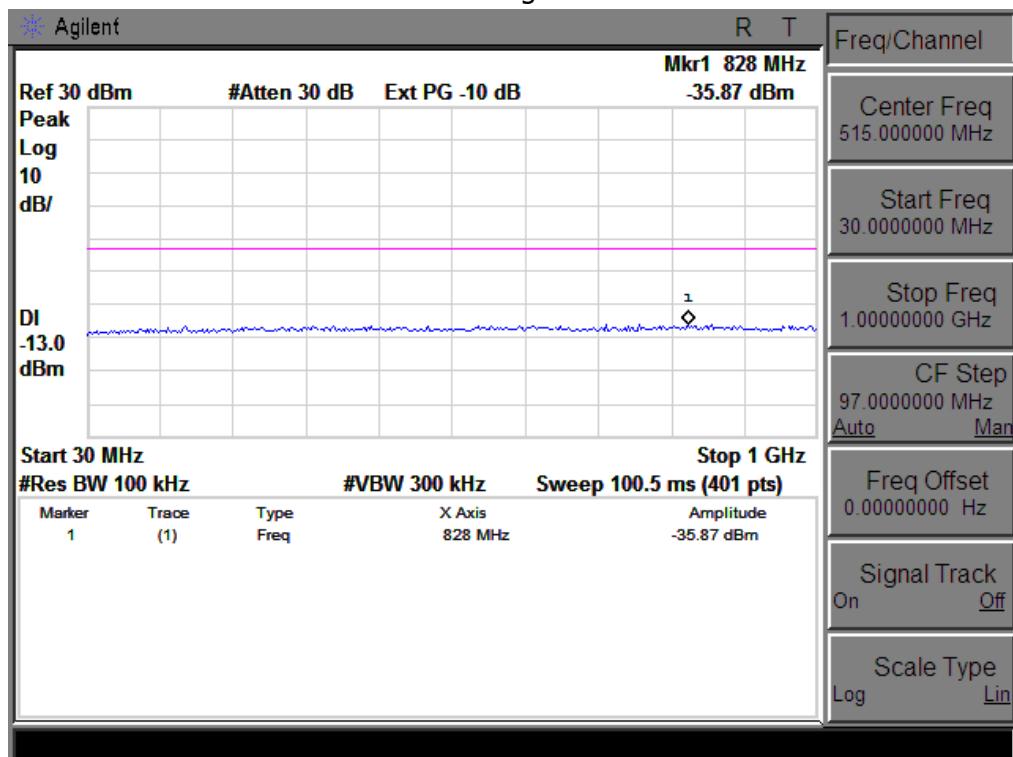


Conducted Emission Transmitting Mode CH 661 1GHz – 2GHz

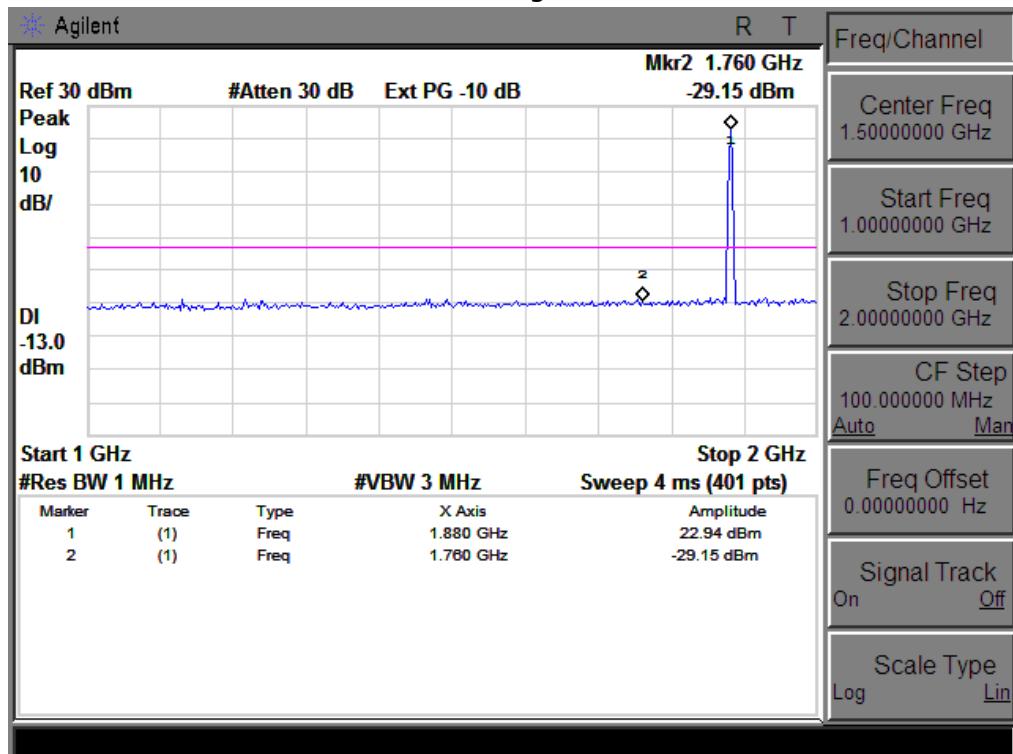


Conducted Emission Transmitting Mode CH 661 2GHz – 20GHz

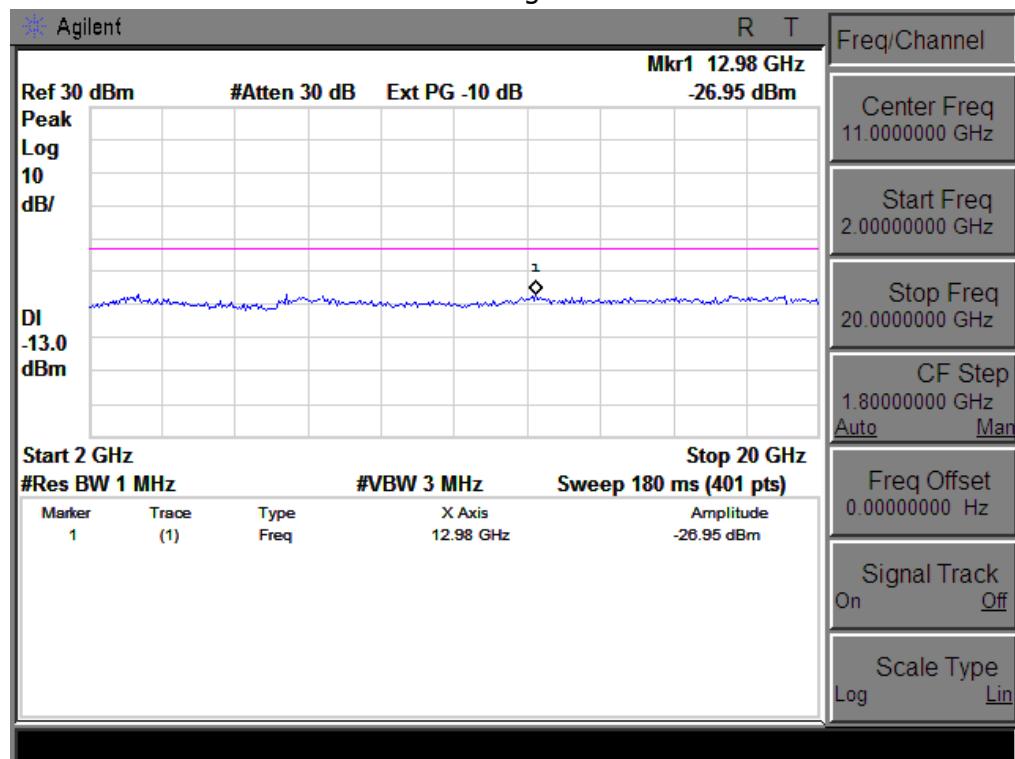


Conducted Emission Transmitting Mode CH 810 30MHz – 1GHz

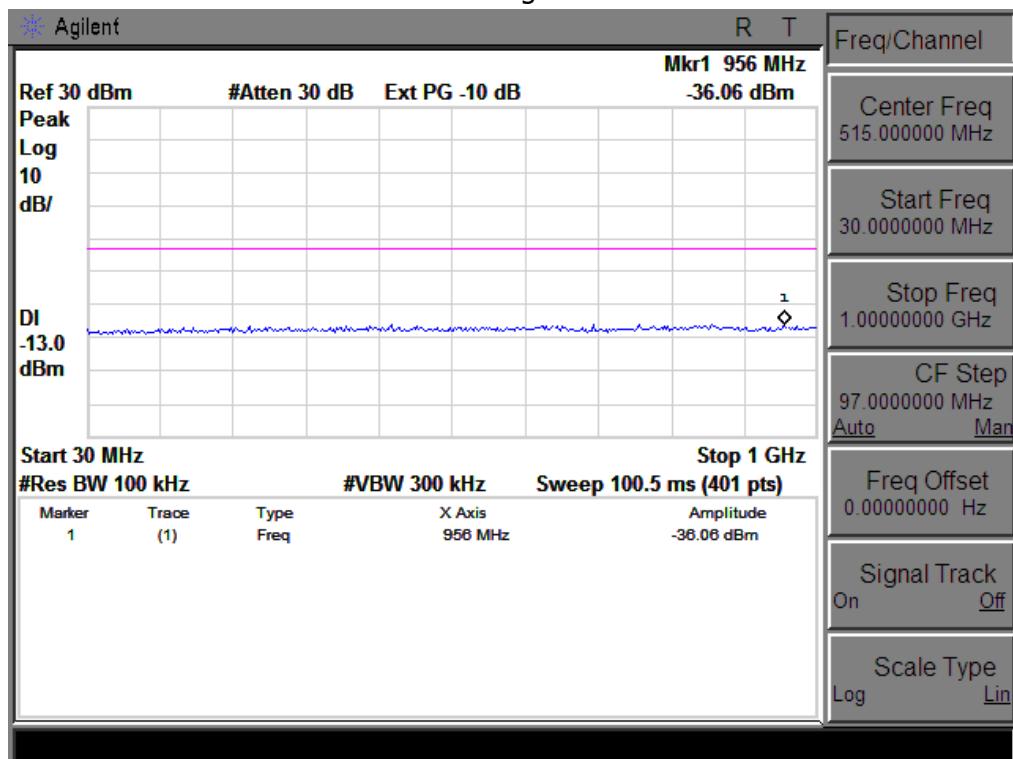


Conducted Emission Transmitting Mode CH 810 1GHz – 2GHz

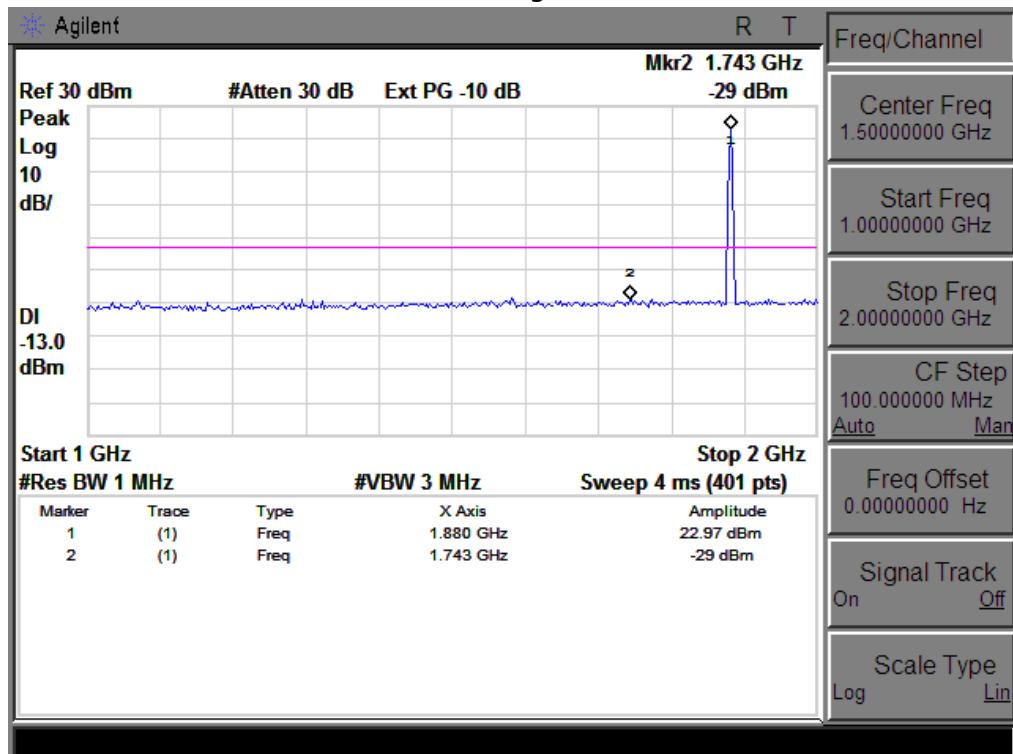


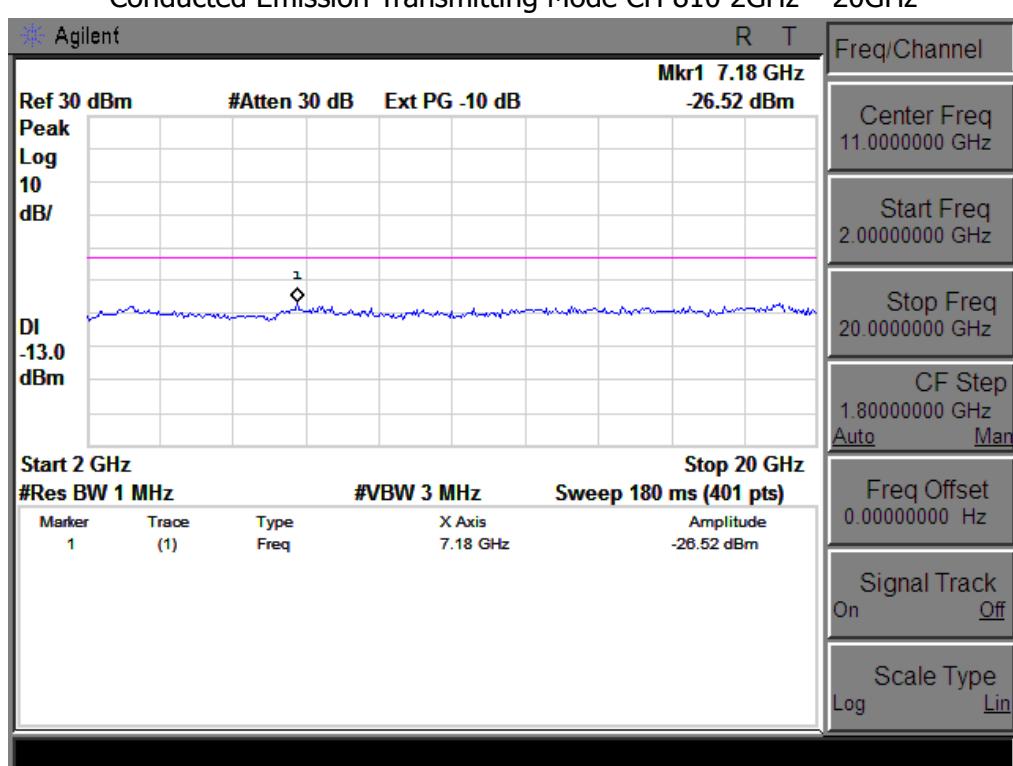


CONDUCTED EMISSION IN GPRS BAND
Conducted Emission Transmitting Mode CH 512 30MHz – 1GHz

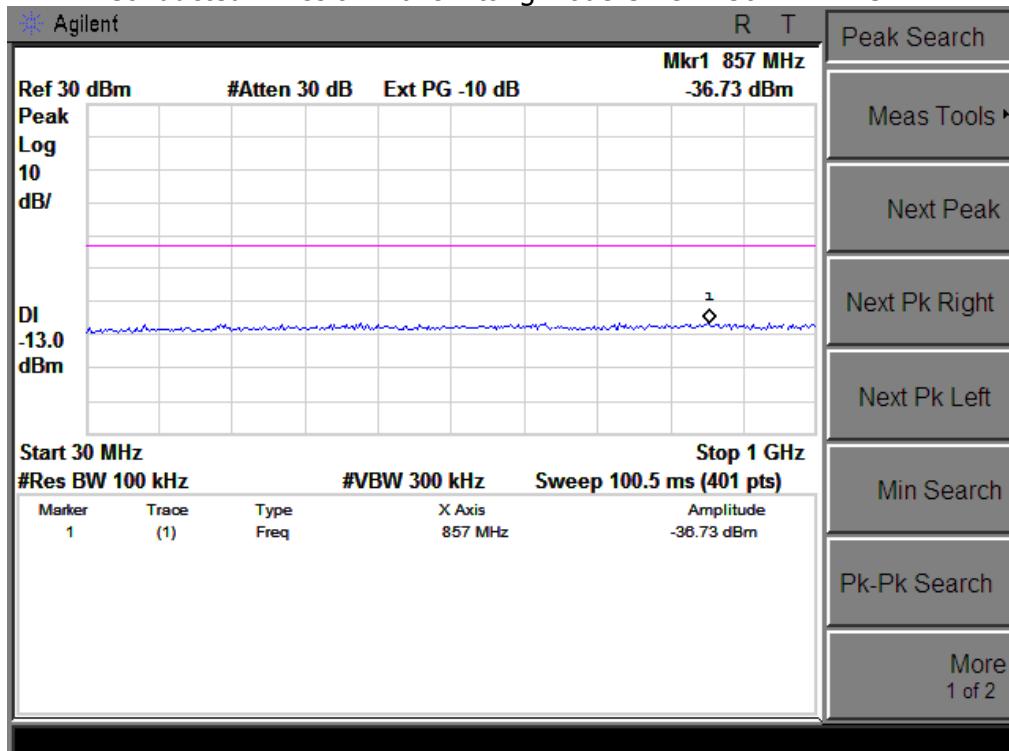


Conducted Emission Transmitting Mode CH 512 1GHz – 2GHz

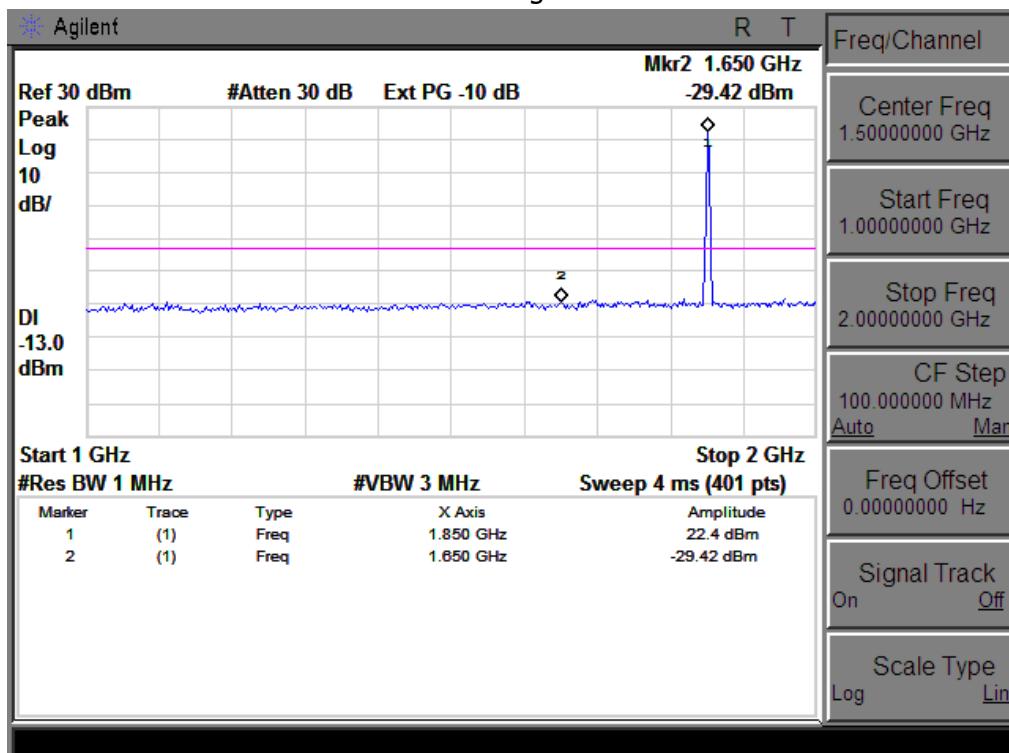


Conducted Emission Transmitting Mode CH 512 2GHz – 20GHz

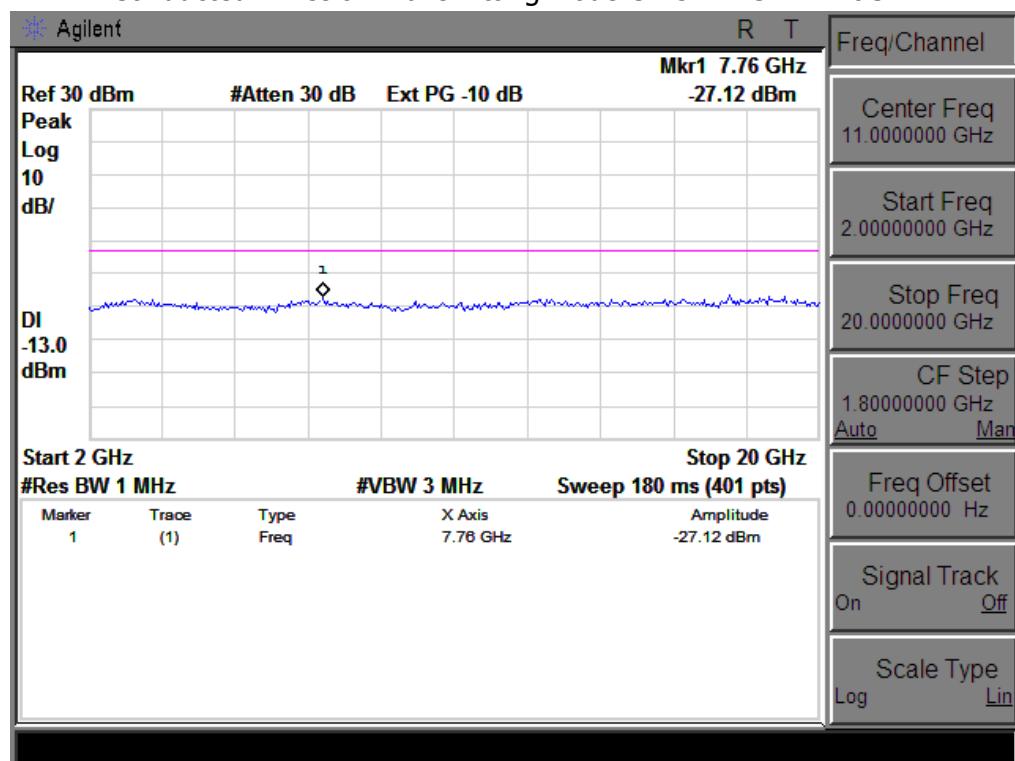


Conducted Emission Transmitting Mode CH 661 30MHz – 1GHz

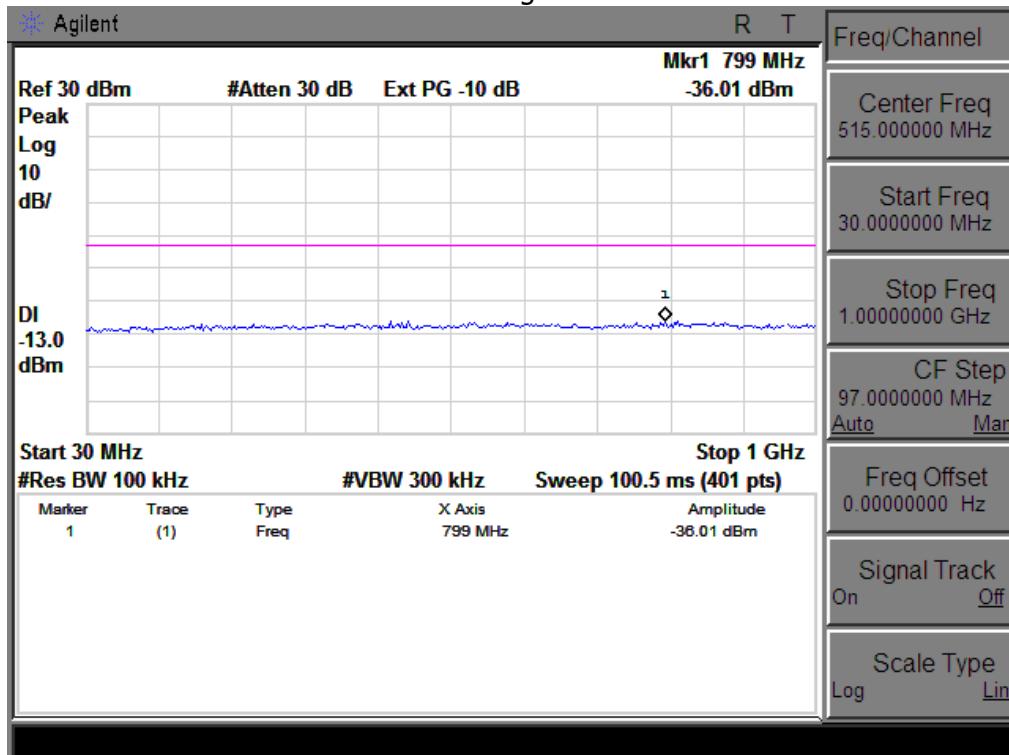


Conducted Emission Transmitting Mode CH 661 1GHz – 2GHz

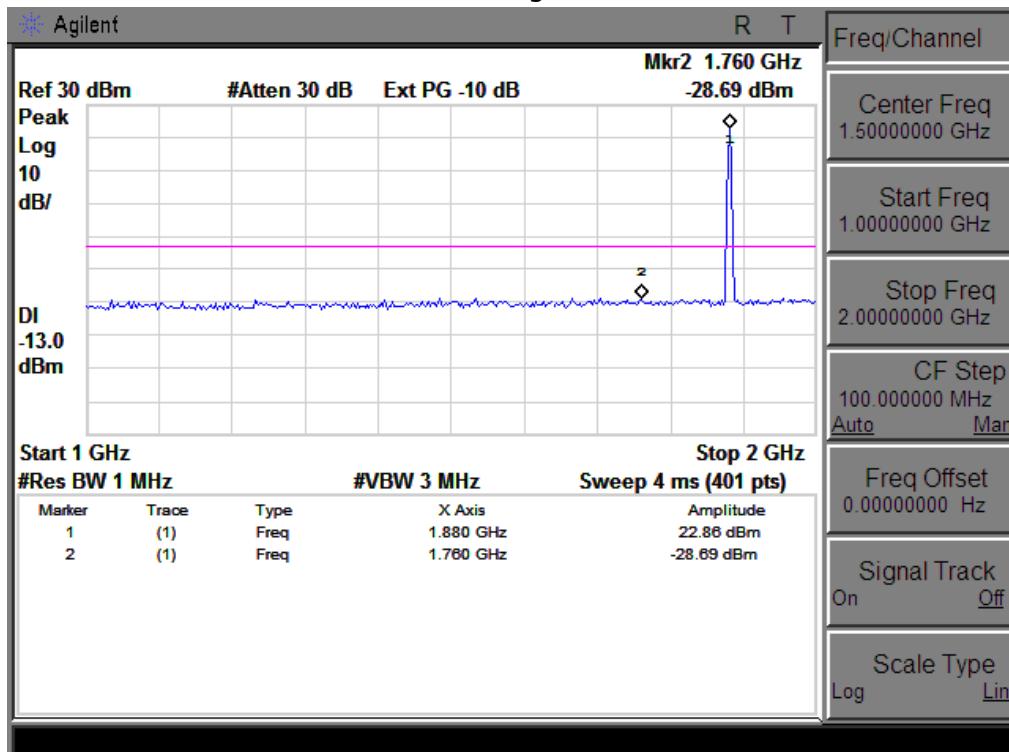


Conducted Emission Transmitting Mode CH 661 2GHz – 20GHz

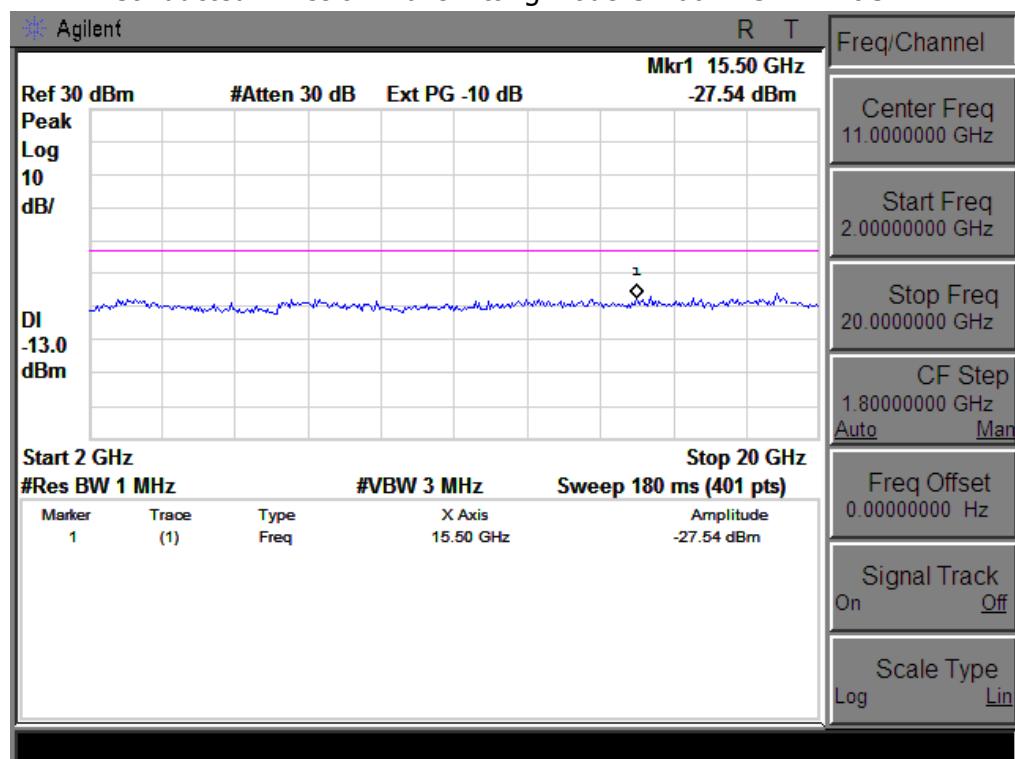


Conducted Emission Transmitting Mode CH 810 30MHz – 1GHz

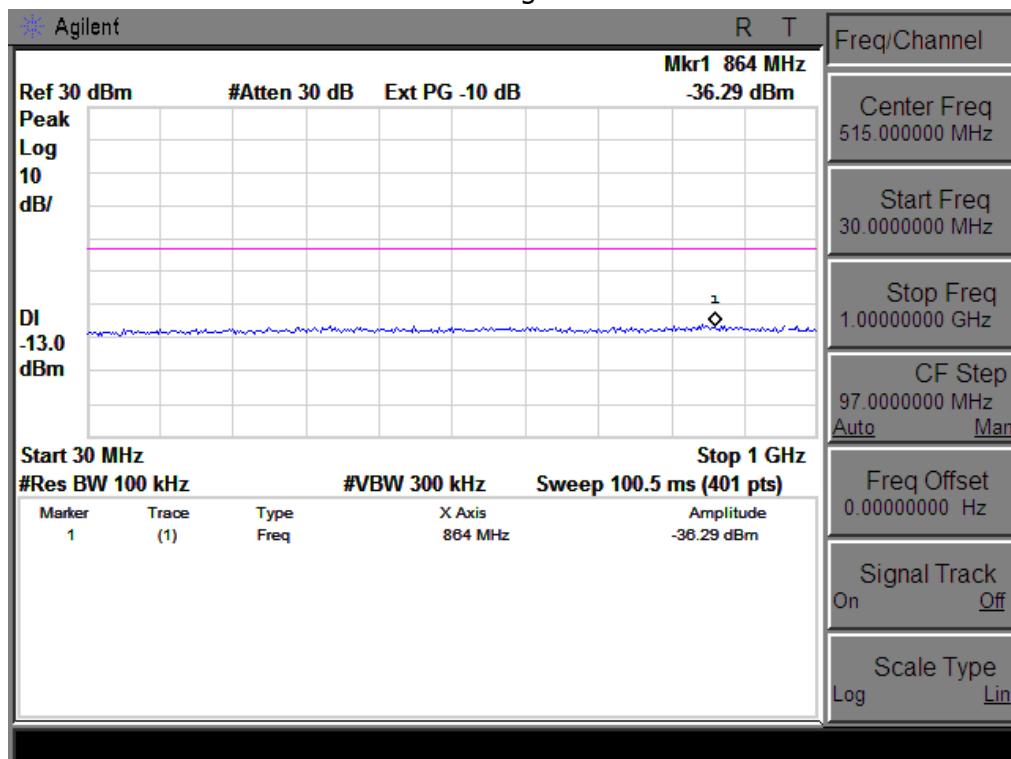

Conducted Emission Transmitting Mode CH 810 1GHz – 2GHz

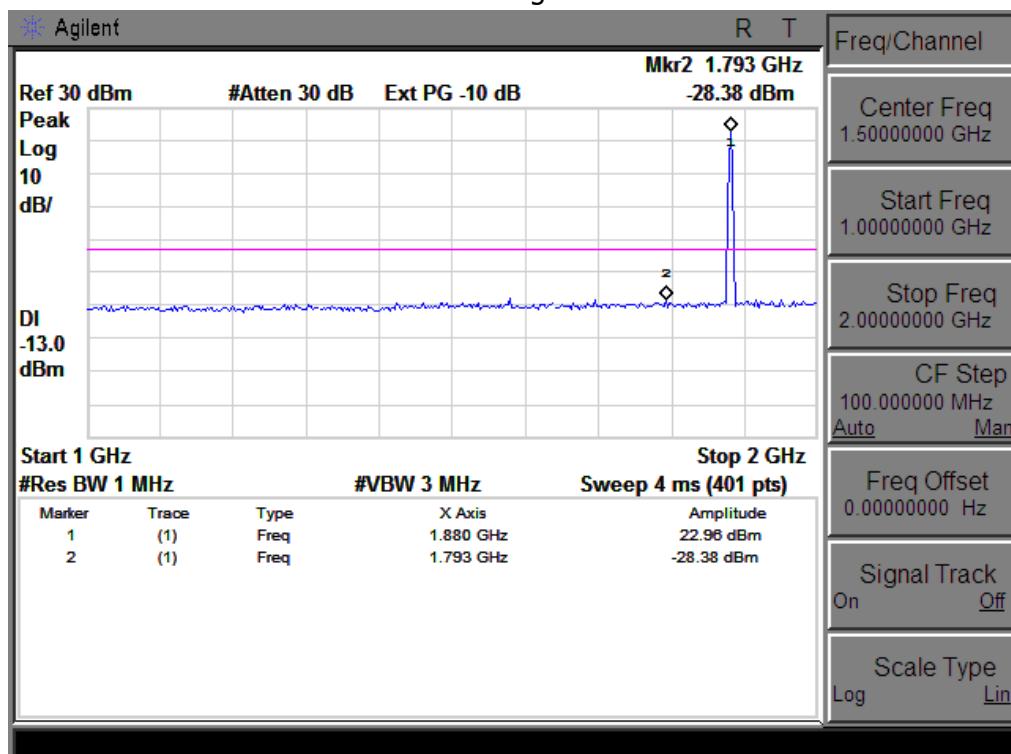


Conducted Emission Transmitting Mode CH 810 2GHz – 20GHz

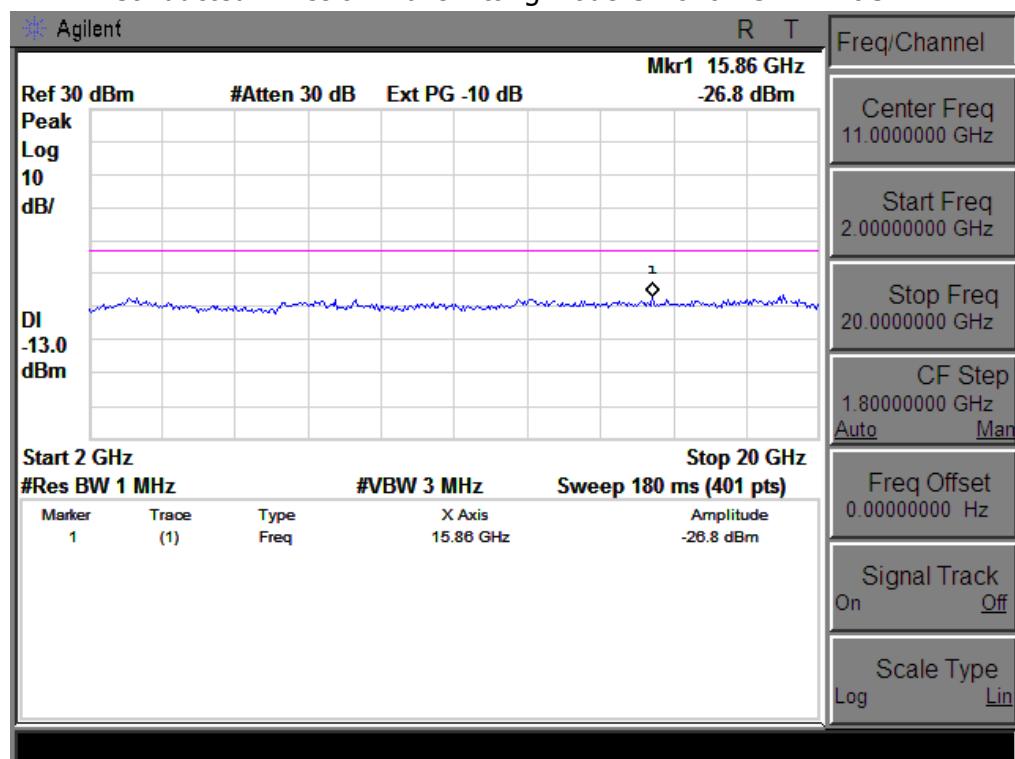


APPENDIX II


**TEST PLOTS FOR OCCUPIED BANDWIDTH (99%)
EMISSION BANDWIDTH (-26dBc)**
Occupied Bandwidth (99%) GSM 850 BAND CH 128

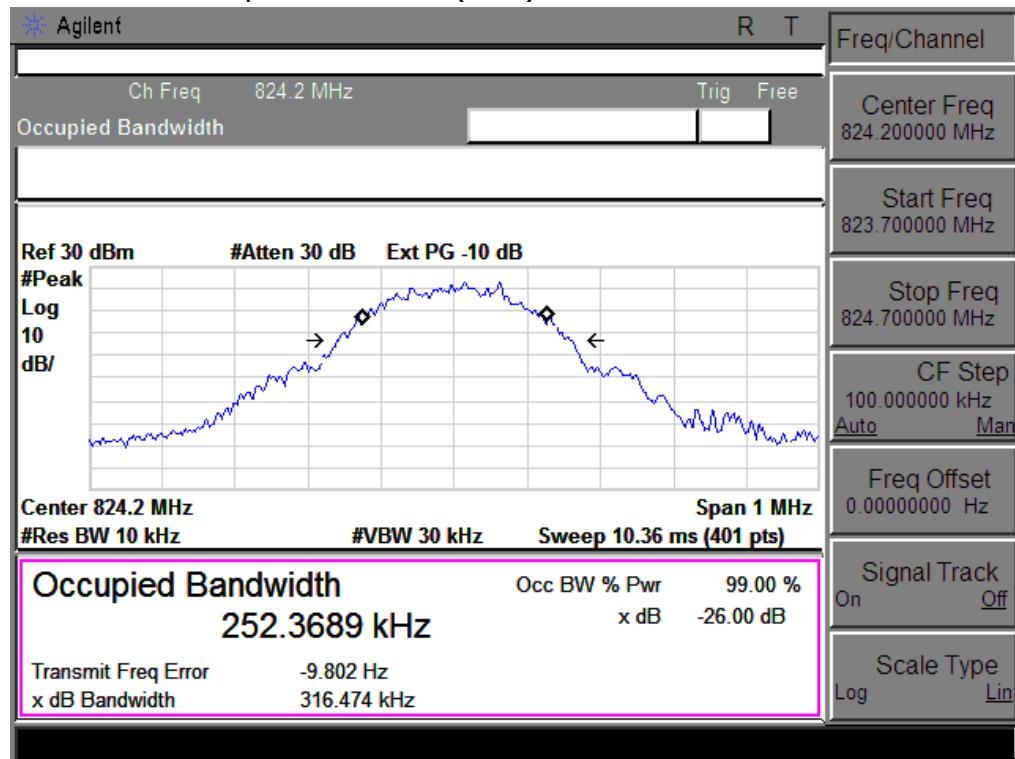


Occupied Bandwidth (99%) GSM 850 BAND CH 190

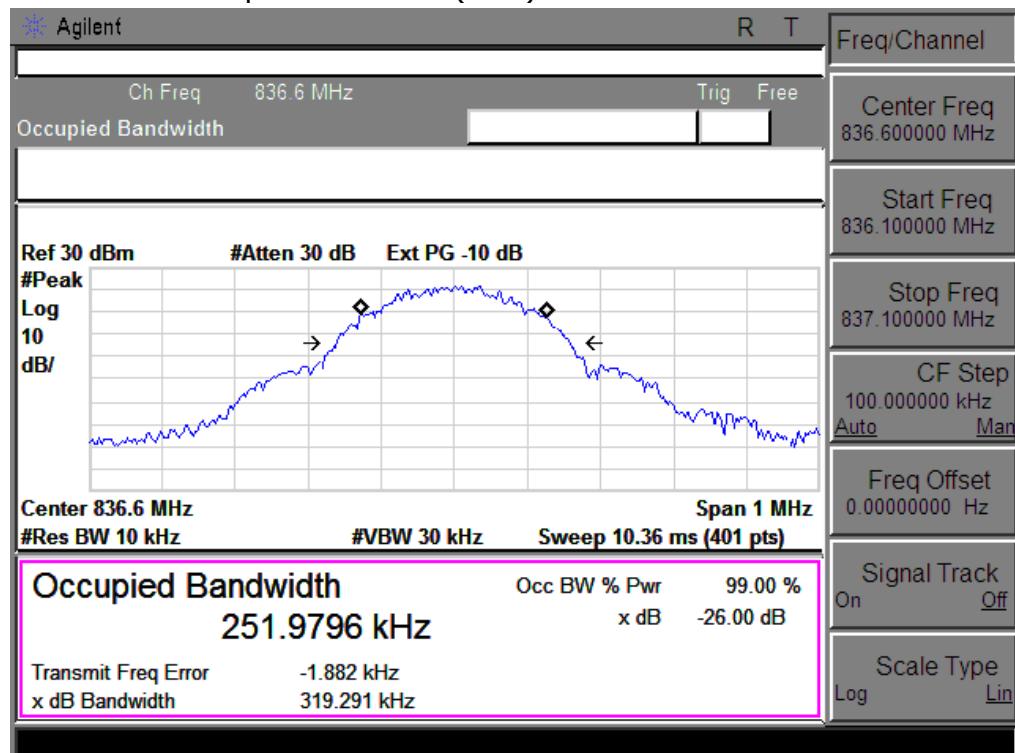


Occupied Bandwidth (99%) GSM 850 BAND CH 251

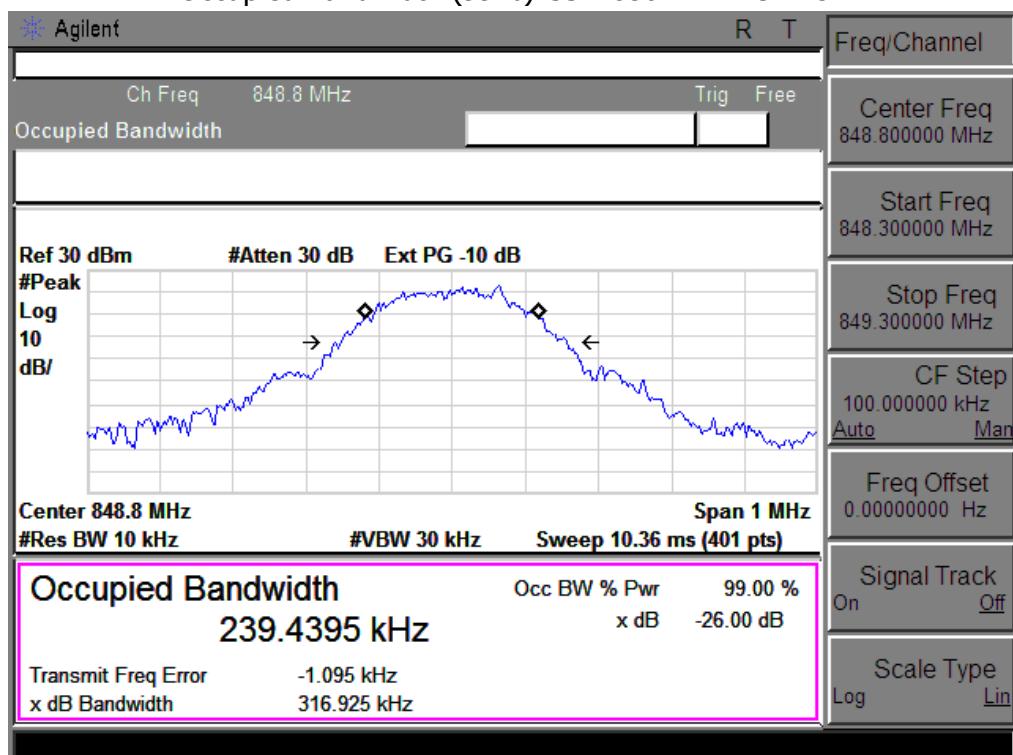


Occupied Bandwidth (99%) GPRS 850 BAND CH 128

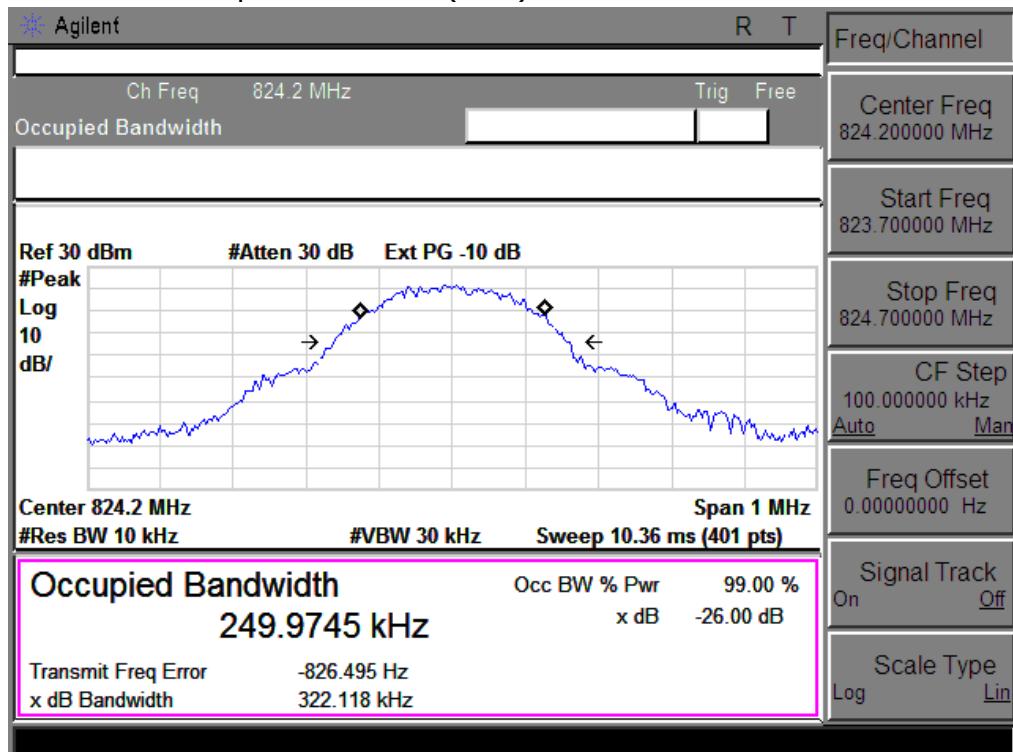


Occupied Bandwidth (99%) GPRS 850 BAND CH 190

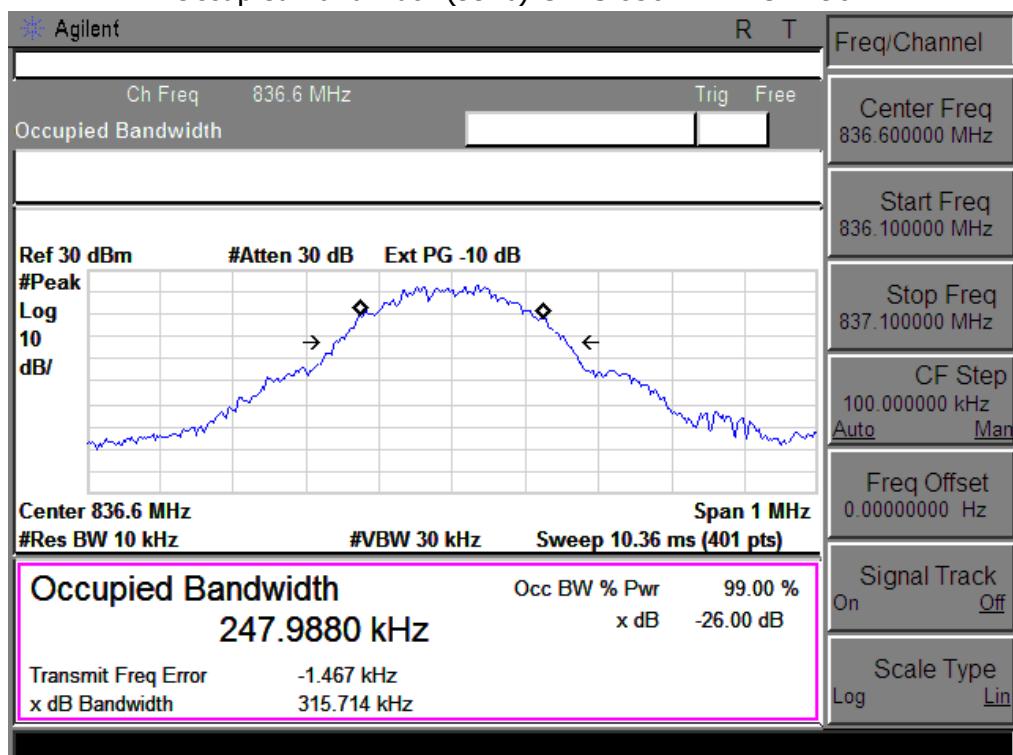


Occupied Bandwidth (99%) GPRS 850 BAND CH 251

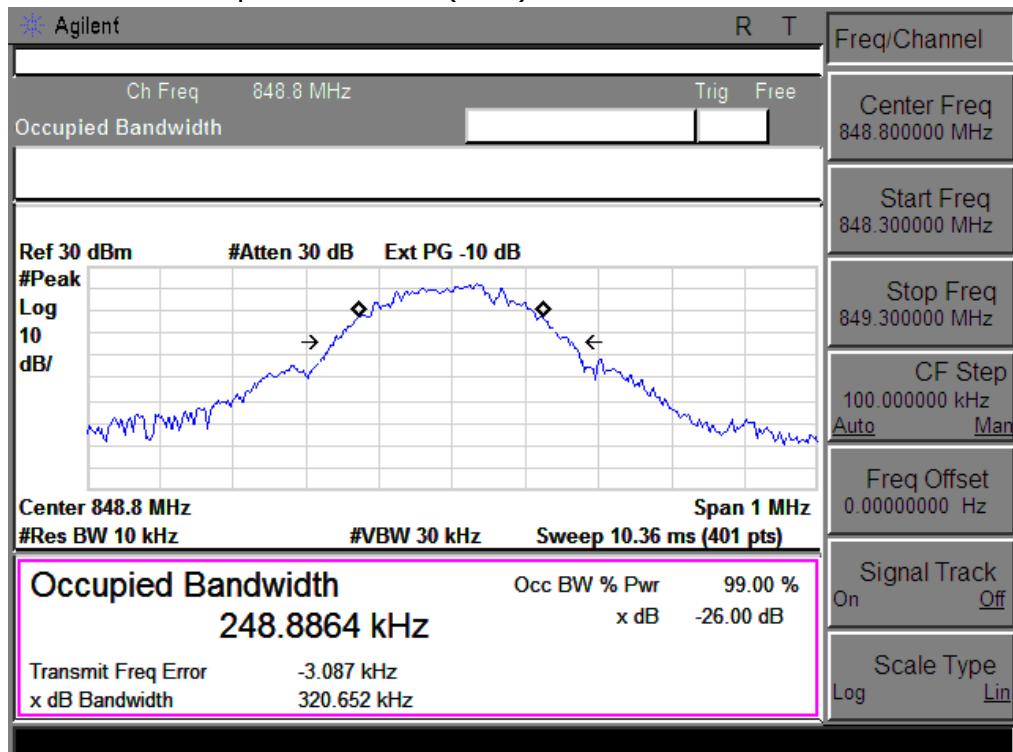


Occupied Bandwidth (99%) PCS 1900 BAND CH 512

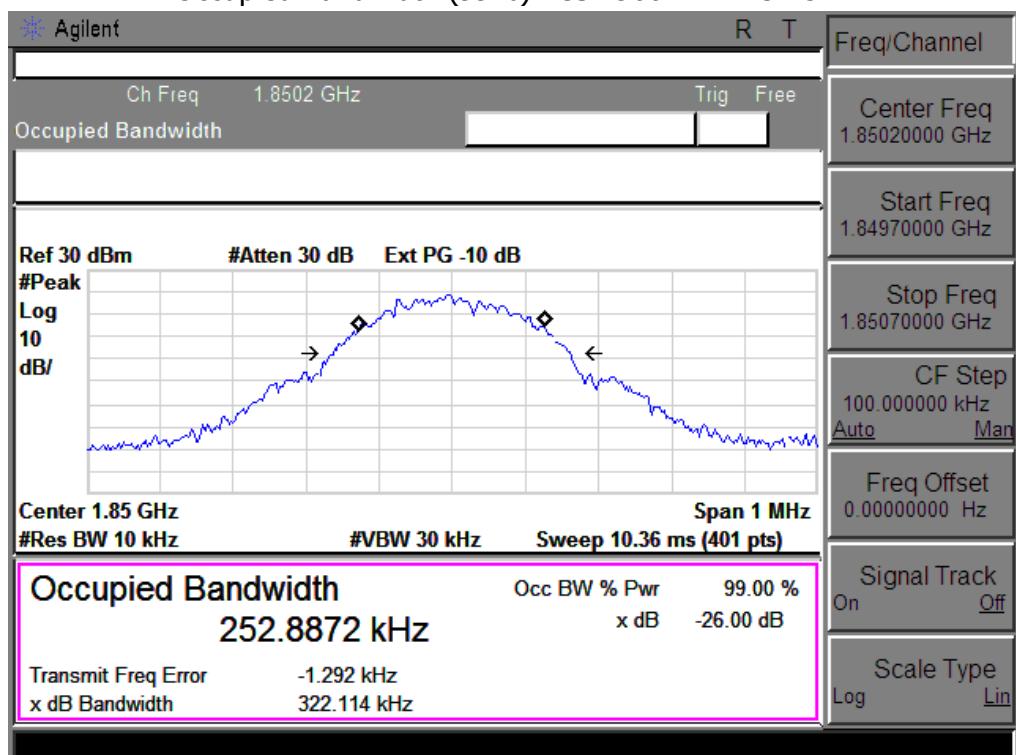


Occupied Bandwidth (99%) PCS 1900 BAND CH 661

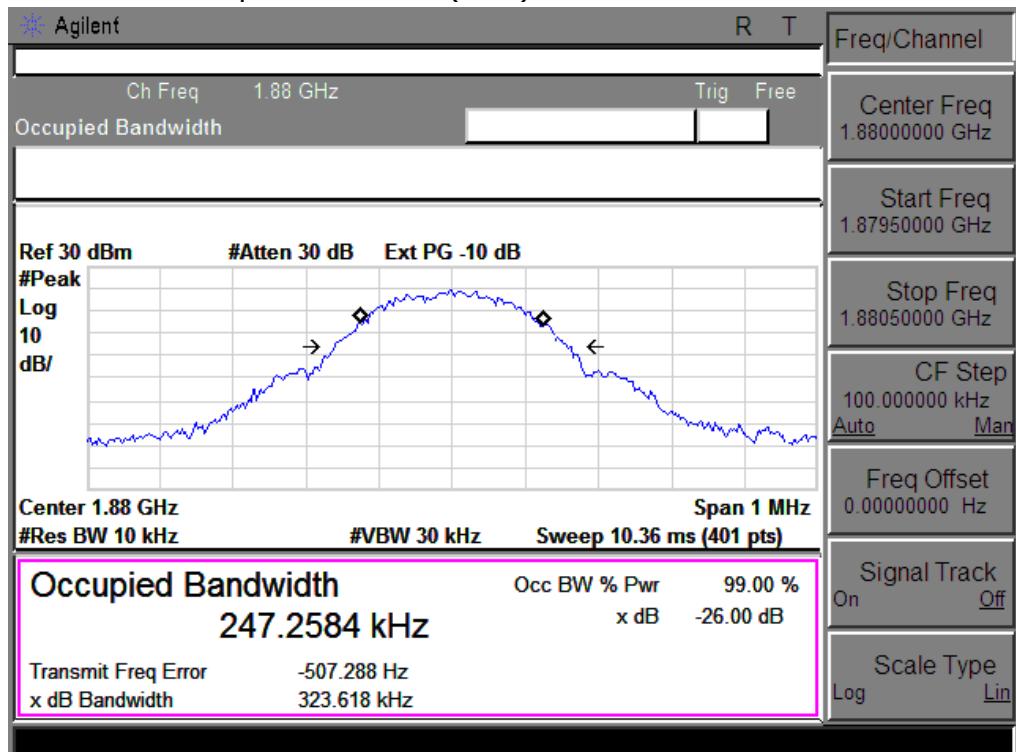


Occupied Bandwidth (99%) PCS 1900 BAND CH 810

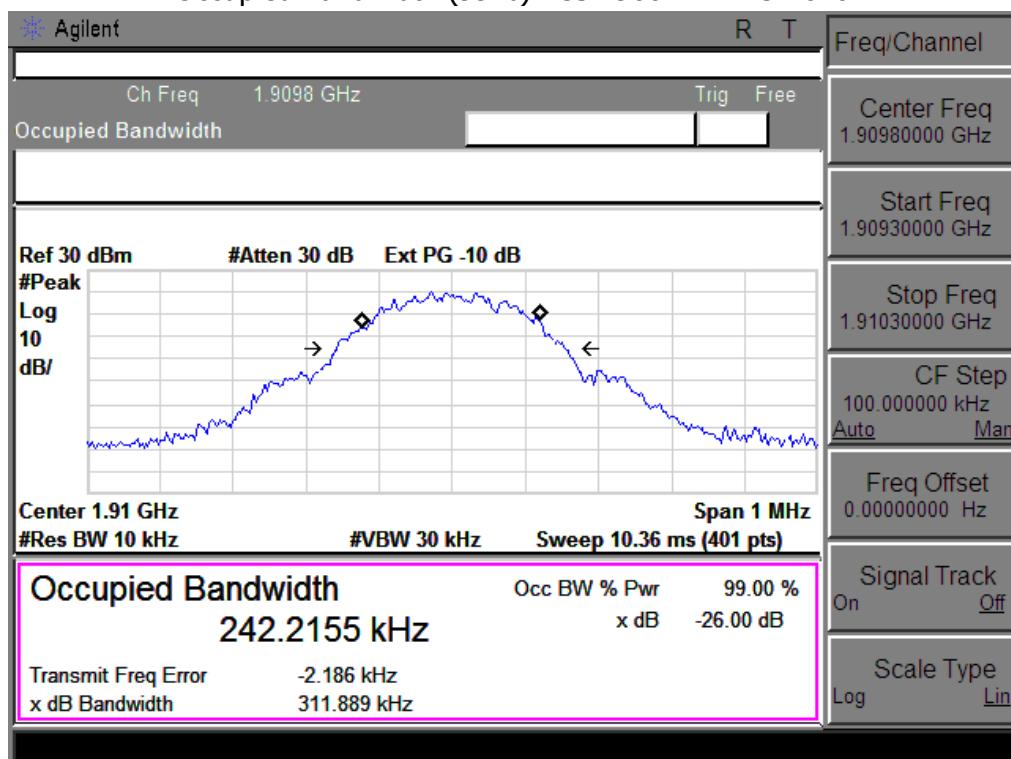


Occupied Bandwidth (99%) GPRS 1900 BAND CH 512

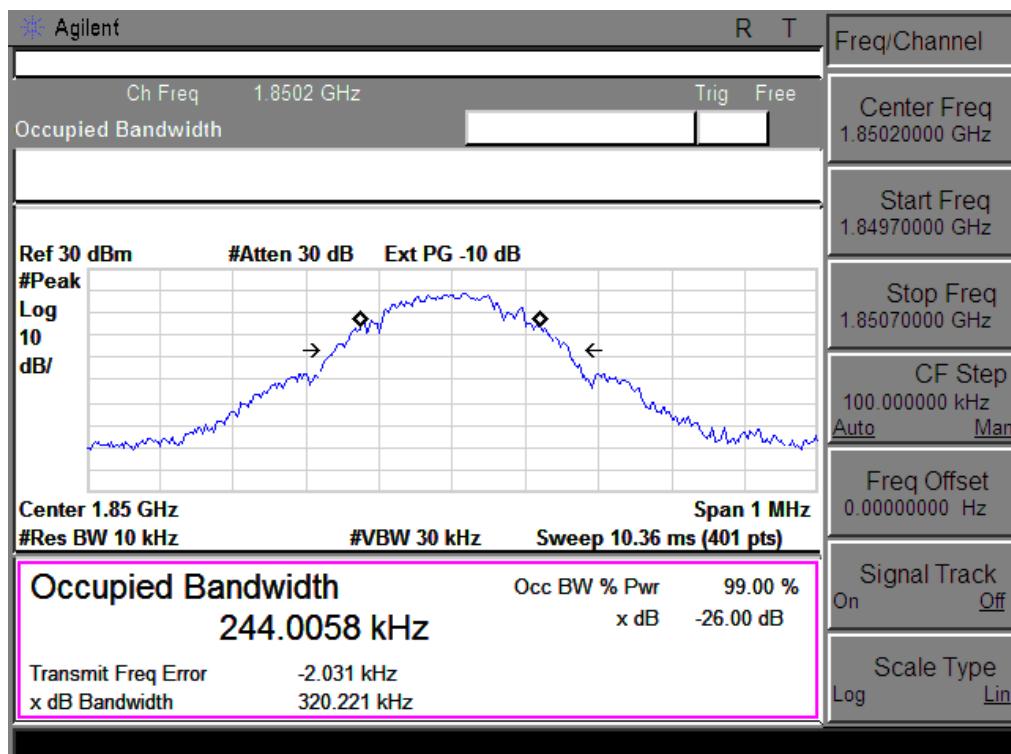

Occupied Bandwidth (99%) GPRS 1900 BAND CH 661

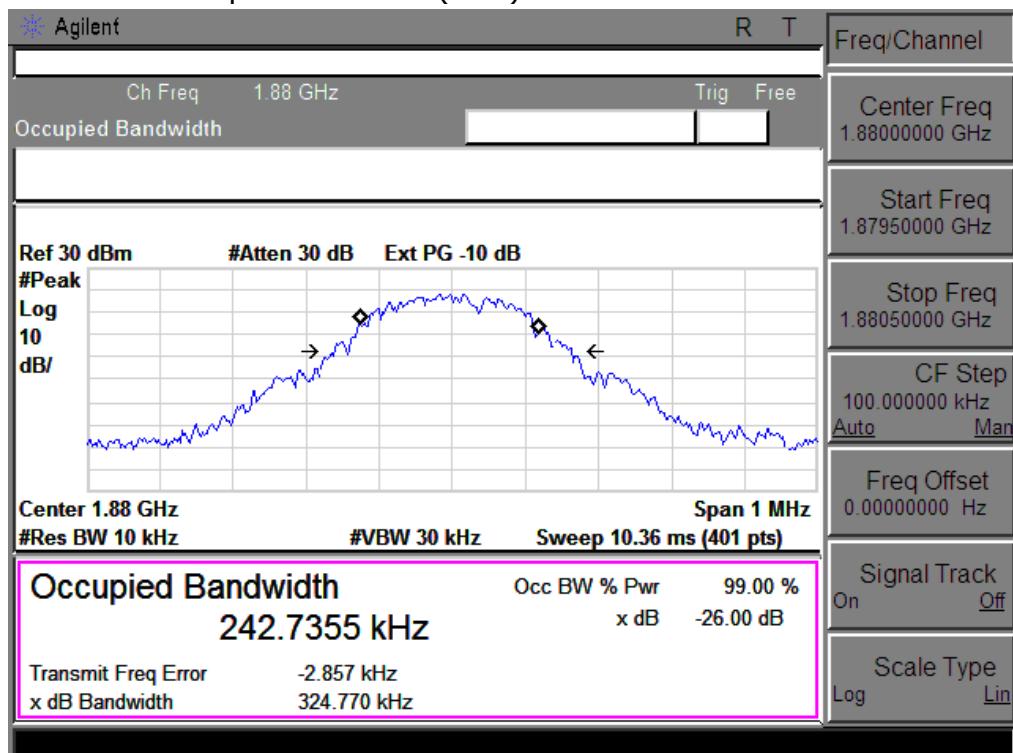


Occupied Bandwidth (99%) GPRS 1900 BAND CH 810

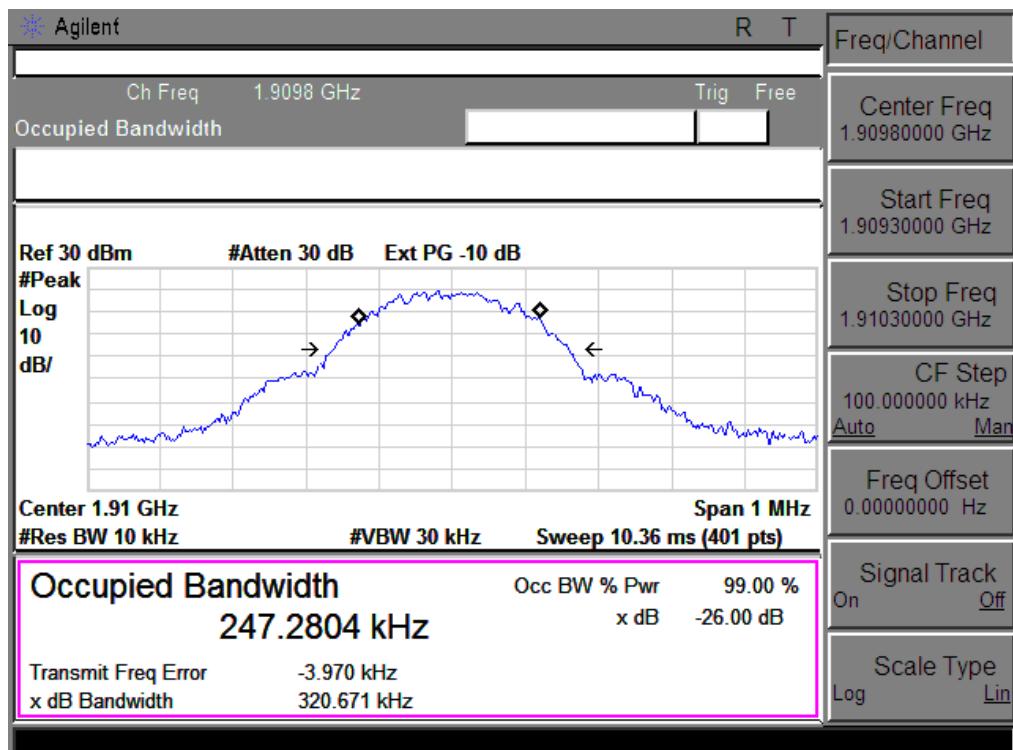


APPENDIX III

TEST PLOTS FOR BAND EDGES


Low Band Edge GSM 850 BAND CH 128

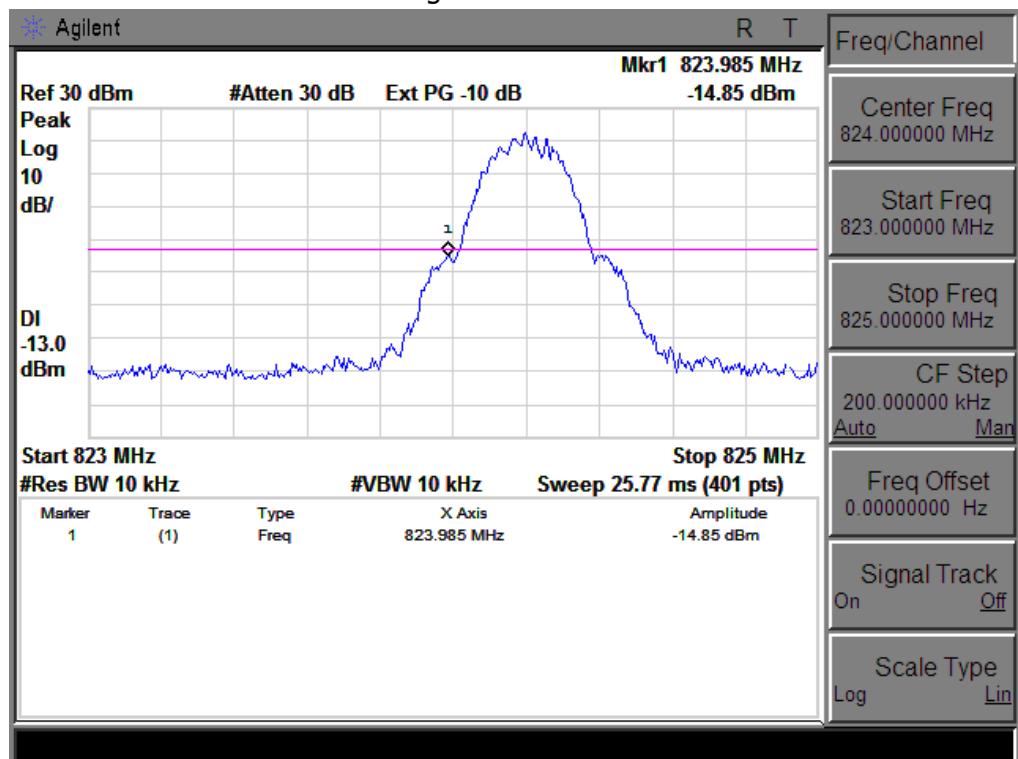


High Band Edge GSM 850 BAND CH 251

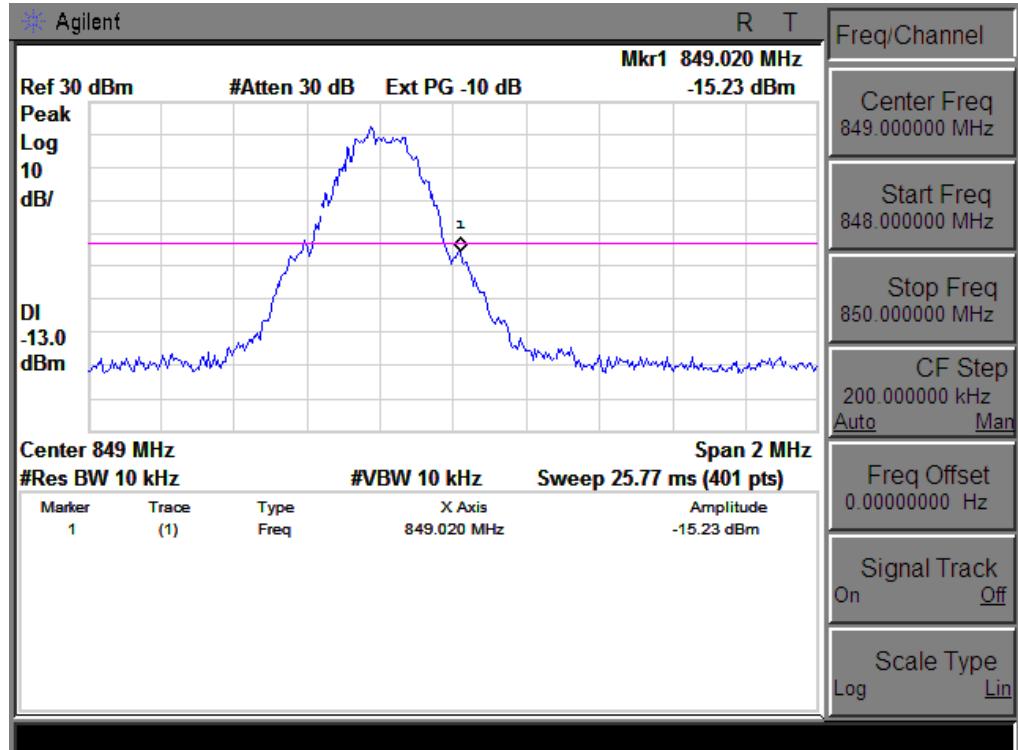


Low Band Edge GPRS 850 BAND CH 128

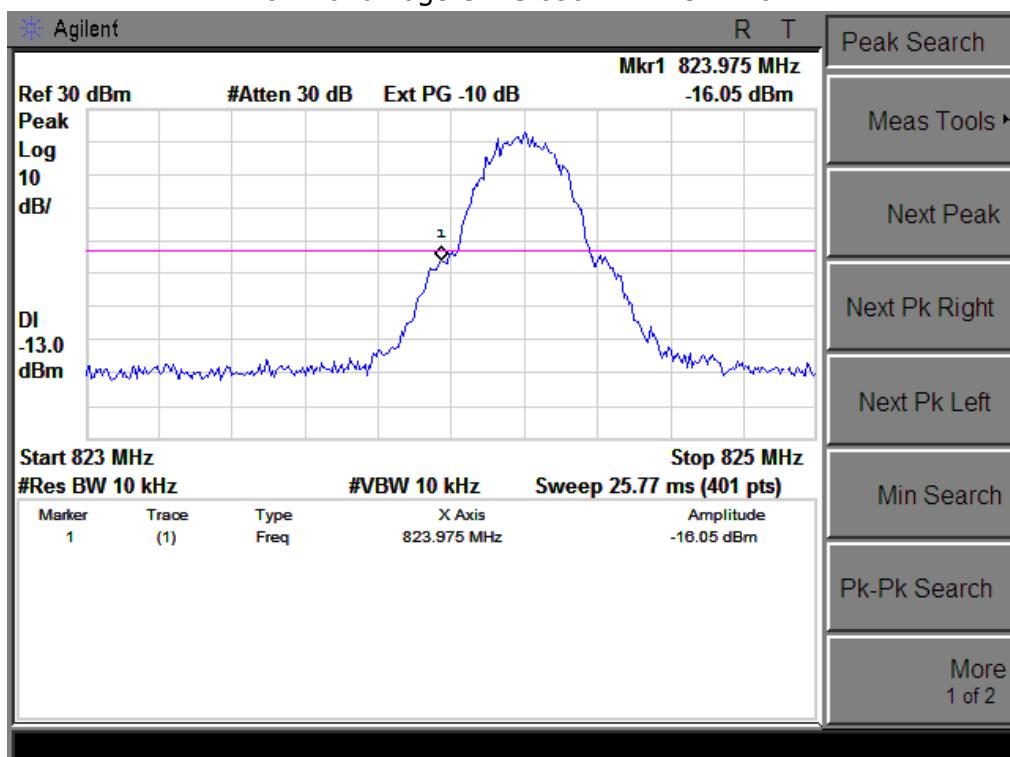


High Band Edge GPRS 850 BAND CH 251

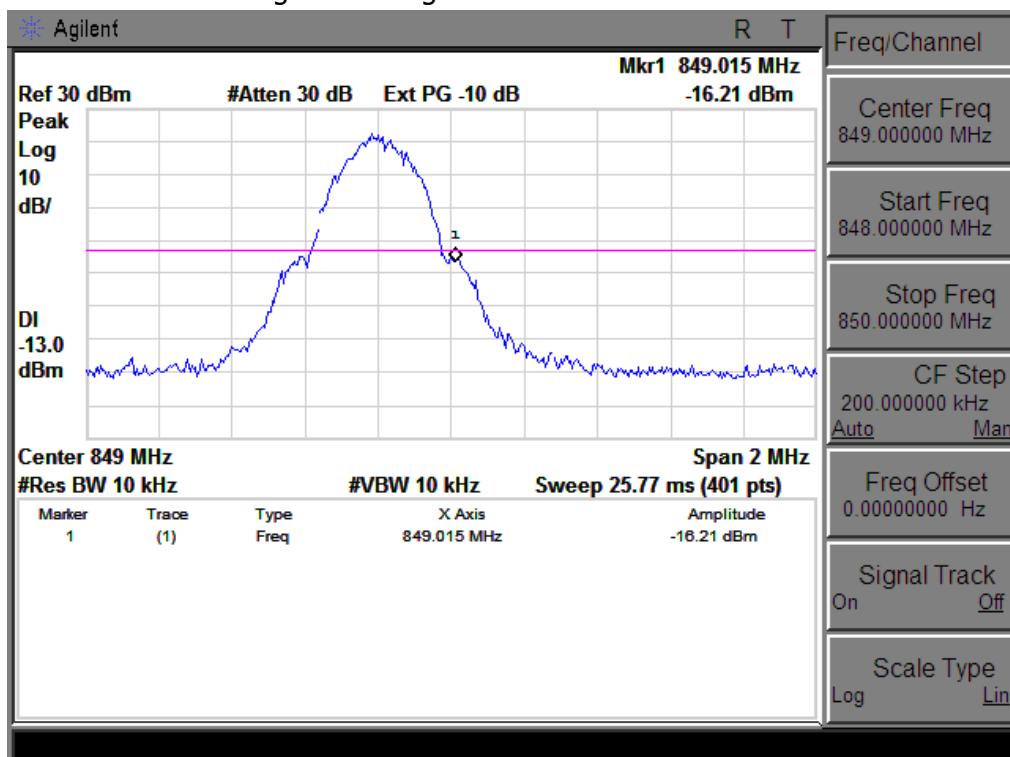


Low Band Edge PCS 1900 BAND CH 512

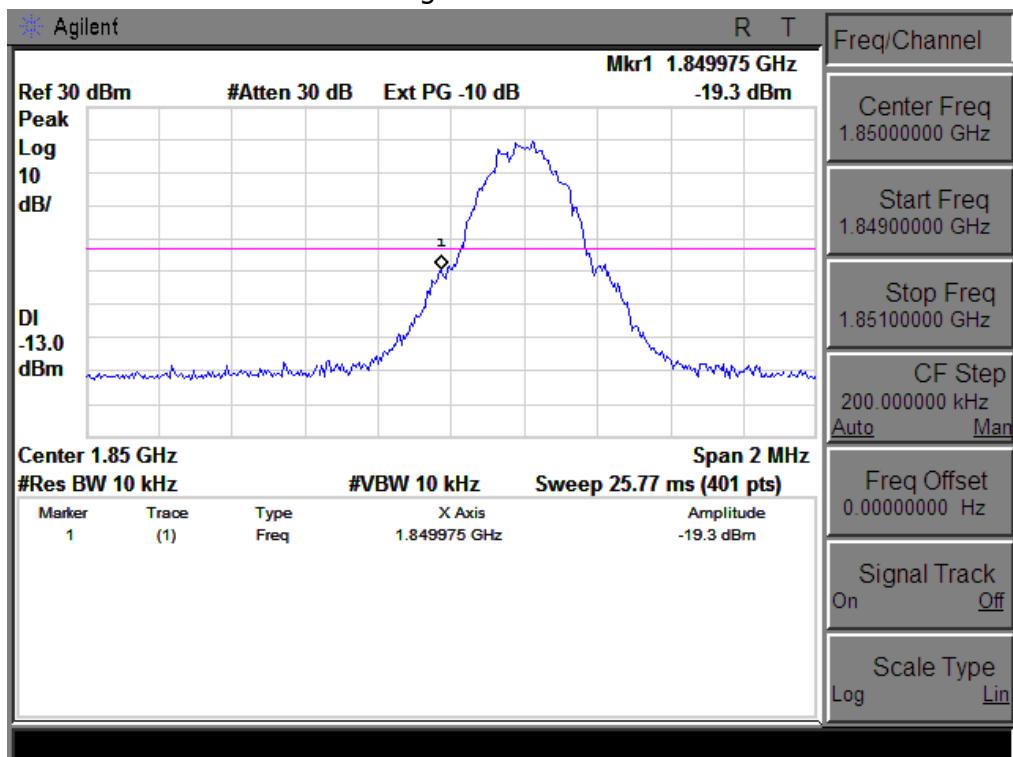


High Band Edge PCS 1900 BAND CH 810

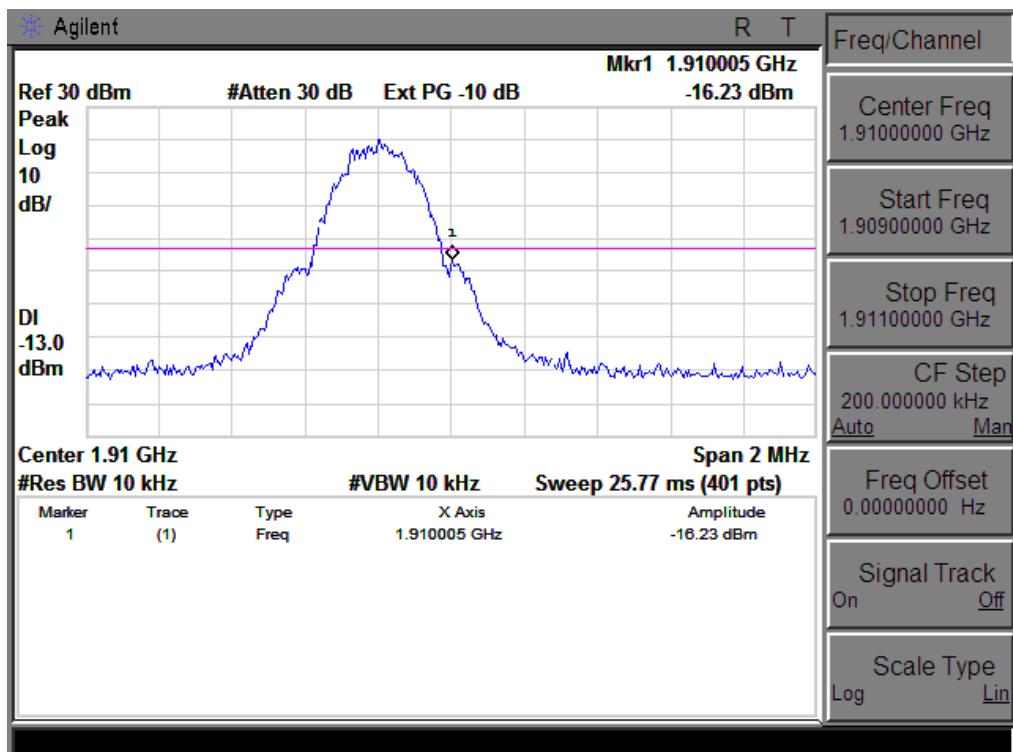

Low Band Edge GPRS 1900 BAND CH 512

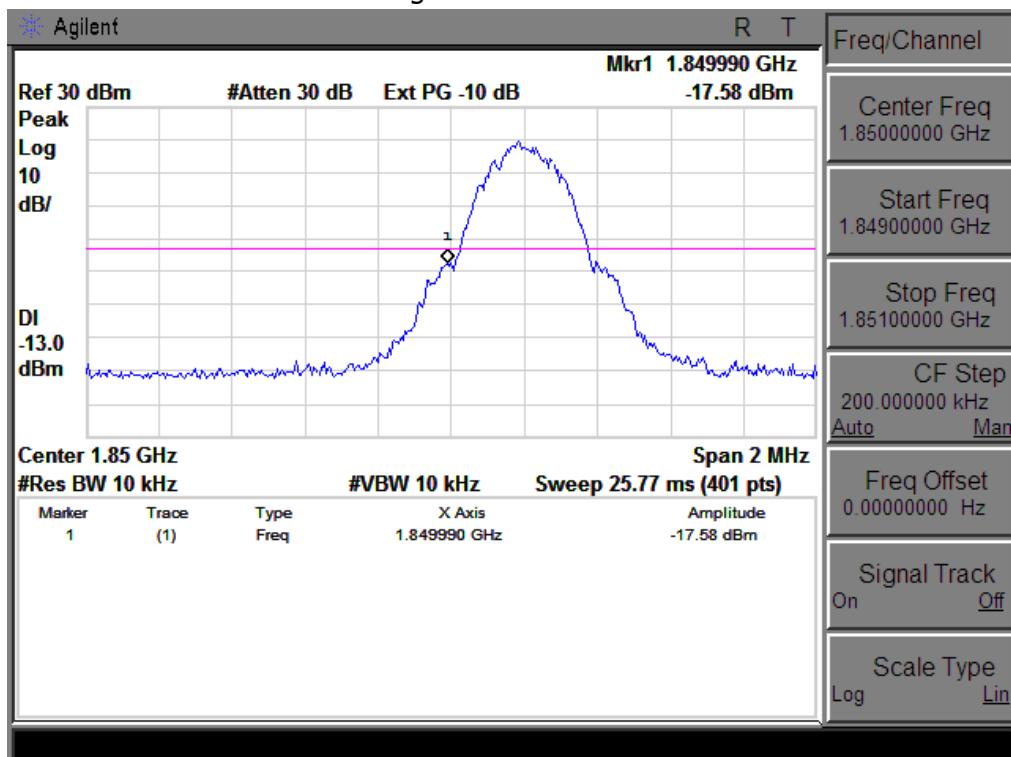

High Band Edge GPRS 1900 BAND CH 810

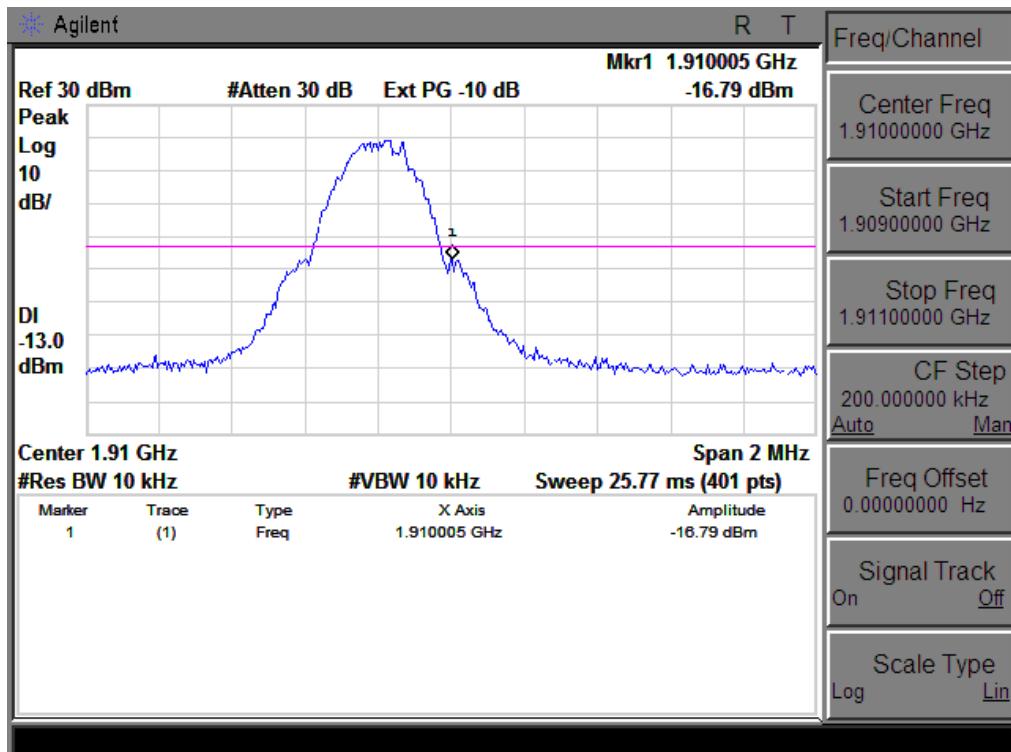

4. EUT TEST PHOTO**Radiated Measurement Photos**