



FCC PART 15, SUBPART C

TEST AND MEASUREMENT REPORT

For

Intel Corporation

2200 Mission College Blvd.,
Santa Clara, CA 95054, USA

FCC ID: 2AB8ZND19

Report Type: Original Report	Product Type: Sports Activity Device
Prepared By: <u>Jin Yang</u> 	
Report Number: <u>R1605195-247 DSS</u>	
Report Date: <u>2016-06-01</u>	
Reviewed By: <u>Bo Li</u> 	
Bay Area Compliance Laboratories Corp. 1274 Anvilwood Avenue, Sunnyvale, CA 94089, USA Tel: (408) 732-9162 Fax: (408) 732-9164	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by A2LA*, NIST, or any agency of the Federal Government.

* This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “*” (a)(2)

TABLE OF CONTENTS

1 General Description.....	5
1.1 Product Description for Equipment Under Test (EUT)	5
1.2 Mechanical Description of EUT	5
1.3 Objective.....	5
1.4 Related Submittal(s)/Grant(s)	5
1.5 Test Methodology	5
1.6 Measurement Uncertainty.....	5
1.7 Test Facility	6
2 System Test Configuration.....	7
2.1 Justification.....	7
2.2 EUT Exercise Software.....	7
2.3 Duty Cycle Correction Factor.....	7
2.4 Equipment Modifications.....	9
2.5 Local Support Equipment	9
2.6 EUT Internal Configuration Details.....	9
2.7 Interface Ports and Cabling.....	10
2.8 Support Equipment	10
3 Summary of Test Results	11
4 FCC §15.203 - Antenna Requirements	12
4.1 Applicable Standards	12
4.2 Antenna Description	12
5 FCC §2.1091 & §15.247(i) - RF Exposure	13
5.1 Applicable Standards	13
5.2 MPE Prediction.....	13
5.3 MPE Results	13
6 FCC §15.207- AC Line Conducted Emissions.....	14
6.1 Applicable Standards	14
6.2 Test Setup	14
6.3 Test Procedure	14
6.4 Corrected Amplitude & Margin Calculation.....	15
6.5 Test Setup Block Diagram	15
6.6 Test Equipment List and Details	16
6.7 Test Environmental Conditions	16
6.8 Summary of Test Results	16
6.9 Conducted Emissions Test Plots and Data.....	17
7 FCC §15.209 & §15.247(d) - Spurious Radiated Emissions	19
7.1 Applicable Standards	19
7.2 Test Setup	20
7.3 Test Procedure	20
7.4 Corrected Amplitude & Margin Calculation.....	21
7.5 Test Equipment List and Details	21
7.6 Test Environmental Conditions	22
7.7 Summary of Test Results	22
7.8 Radiated Emissions Test Results	23
8 FCC §15.247(a) (1)(i) - Emission Bandwidth	25
8.1 Applicable Standards	25
8.2 Measurement Procedure.....	25
8.3 Test Equipment List and Details	25
8.4 Test Environmental Conditions	25
8.5 Test Results.....	26

9 FCC §15.247(b) (2) - Output Power	28
9.1 Applicable Standards	28
9.2 Measurement Procedure.....	28
9.3 Test Equipment List and Details.....	28
9.4 Test Environmental Conditions	28
9.5 Test Results.....	29
10 FCC §15.247(d) - 100 kHz Bandwidth of Band Edges.....	31
10.1 Applicable Standards	31
10.2 Measurement Procedure.....	31
10.3 Test Equipment List and Details.....	31
10.4 Test Environmental Conditions	31
10.5 Test Results.....	32
11 FCC §15.247(a) (1) (i) - Dwell Time	33
11.1 Applicable Standards	33
11.2 Measurement Procedure.....	33
11.3 Test Equipment List and Details.....	33
11.4 Test Environmental Conditions	34
11.5 Test Results.....	34
12 FCC §15.247(a)(1)(i) - Number of Hopping Channels.....	37
12.1 Applicable Standards	37
12.2 Test Procedure	37
12.3 Test Equipment List and Details.....	37
12.4 Test Environmental Conditions	37
12.5 Test Results.....	38
13 FCC §15.247(a) (1) - Hopping Channel Separation.....	39
13.1 Applicable Standards	39
13.2 Test Procedure	39
13.3 Test Equipment List and Details.....	39
13.4 Test Environmental Conditions	39
13.5 Test Results.....	40
14 FCC §15.247(d) - Spurious Emissions at Antenna Terminals	42
14.1 Applicable Standards	42
14.2 Test Procedure	42
14.3 Test Equipment List and Details.....	42
14.4 Test Environmental Conditions	42
14.5 Test Results.....	43
15 Exhibit A - FCC Equipment Labeling Requirements	45
15.1 FCC ID Label Requirements	45
15.2 FCC ID Label Contents and Location.....	46
16 Exhibit B - Test Setup Photographs.....	47
16.1 Radiated Emission below 1 GHz Front View	47
16.2 Radiated Emission below 1 GHz Rear View	47
16.3 Radiated Emission above 1 GHz Front View	48
16.4 Radiated Emission above 1 GHz Rear View	48
16.5 AC Line Conducted Emission Front View	49
16.6 AC Line Conducted Emission Side View	49
17 Exhibit C - EUT Photographs	50
17.1 EUT – Front View	50
17.2 EUT – Back View	50
17.3 EUT – Top View.....	51
17.4 EUT – Bottom View	51
17.5 EUT – Left View	52
17.6 EUT – Right View	52
17.7 EUT – Open Case View 1.....	53
17.8 EUT – Open Case View 2.....	53

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	R1605195-247 DSS	Original Report	2016-06-01

1 General Description

1.1 Product Description for Equipment Under Test (EUT)

This test and measurement report was prepared on behalf of *Intel Corporation*, and their product model: *Shark Jumper*, FCC ID: 2AB8ZND19 or the “EUT” as referred to in this report. It is a Sports activity device with BLE and 900 MHz radio functions.

1.2 Mechanical Description of EUT

The EUT measures approximately 40 mm (L) x 35 mm (W) x 20 mm (H) and weight 0.05lb.

The test data gathered are from typical production sample, serial number: R1605195-01 assigned by BACL

1.3 Objective

This report is prepared on behalf of *Intel Corporation*, in accordance with Part 2, Subpart J, and Part 15, Subparts B and C of the Federal Communication Commission’s rules.

The objective is to determine compliance with FCC Part 15.247 for Output Power, Antenna Requirements, 20 dB Bandwidth, 100 kHz Bandwidth of Band Edges Measurement, Conducted and Radiated Spurious Emissions, Number of Hopping Channels, Dwell Time, and Hopping Channel Separation.

1.4 Related Submittal(s)/Grant(s)

FCC Part 15, Subpart C, Equipment DTS with FCC ID: 2AB8ZND19

1.5 Test Methodology

All measurements contained in this report were conducted in accordance with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

1.6 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR16-4-2:2011, The Treatment of Uncertainty in EMC Measurements, the values ranging from ± 2.0 dB for Conducted Emissions tests and ± 4.0 dB for Radiated Emissions tests are the most accurate estimates pertaining to uncertainty of EMC measurements at BACL Corp.

1.7 Test Facility

Bay area compliance Laboratories Corp. (BACL) is:

1- An independent Commercial Test Laboratory accredited to **ISO 17025: 2005** by **A2LA**, in the fields of: Electromagnetic Compatibility & Telecommunications covering Emissions, Immunity, Radio, RF Exposure, Safety and Telecom. This includes NEBS (Network Equipment Building System), Wireless RF, Telecommunications Terminal Equipment (TTE); Network Equipment; Information Technology Equipment (ITE); Medical Electrical Equipment; Industrial, Commercial, and Medical Test Equipment; Professional Audio and Video Equipment; Electronic (Digital) Products; Industrial and Scientific Instruments; Cabled Distribution Systems and Energy Efficiency Lighting.

2- An ENERGY STAR Recognized Laboratory, for the LM80 Testing, a wide variety of Luminaires and Computers.

3- A NIST Designated Phase-I and Phase-II CAB including: ACMA (Australian Communication and Media Authority), BSMI (Bureau of Standards, Metrology and Inspection of Taiwan), IDA (Infocomm Development Authority of Singapore), IC(Industry Canada), Korea (Ministry of Communications Radio Research Laboratory), NCC (Formerly DGT; Directorate General of Telecommunication of Chinese Taipei) OFTA (Office of the Telecommunications Authority of Hong Kong), Vietnam, VCCI - Voluntary Control Council for Interference of Japan and a designated EU CAB (Conformity Assessment Body) (Notified Body) for the EMC and R&TTE Directives.

4- A Product Certification Body accredited to **ISO 17065: 2012** by **A2LA** to certify:

2. Radio Standards Specifications (RSS) in the Category I Equipment Standards List and All Broadcasting Technical Standards (BETS) in Category I Equipment Standards List for Industry Canada.

3. Radio Communication Equipment for Singapore.

4. Radio Equipment Specifications, GMDSS Marine Radio Equipment Specifications, and Fixed Network Equipment Specifications for Hong Kong.

5. Japan MIC Telecommunication Business Law (A1, A2) and Radio Law (B1, B2 and B3).

6. Audio/Video, Battery Charging Systems, Computers, Displays, Enterprise Servers, Imaging Equipment, Set-Top Boxes, Telephony, Televisions, Ceiling Fans, CFLs (Including GU24s),Decorative Light Strings, Integral LED Lamps, Luminaires, Residential Ventilating Fans.

The test site used by BACL Corp. to collect radiated and conducted emissions measurement data is located at its facility in Sunnyvale, California, USA.

The test site at BACL Corp. has been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997, and Article 8 of the VCCI regulations on December 25, 1997. The test site also complies with the test methods and procedures set forth in CISPR 22:2008 §10.4 for measurements below 1 GHz and §10.6 for measurements above 1 GHz as well as ANSI C63.10-2013, ANSI C63.4-2014, TIA/EIA-603 & CISPR 24:2010.

The Federal Communications Commission and Voluntary Control Council for Interference have the reports on file and they are listed under FCC registration number: 90464 and VCCI Registration No.: A-0027. The test site has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, BACL Corp. is an American Association for Laboratory Accreditation (A2LA) accredited laboratory (Lab Code 3297-02). The current scope of accreditations can be found at

<http://www.a2la.org/scopepdf/3297-02.pdf?CFID=1132286&CFTOKEN=e42a3240dac3f6ba-6DE17DCB-1851-9E57-477422F667031258&jsessionid=8430d44f1f47cf2996124343c704b367816b>

2 System Test Configuration

2.1 Justification

The EUT was configured for testing in accordance to ANSI C63.10.

The worst-case data rates are determined by measuring the peak power across all data rates.

2.2 EUT Exercise Software

The test utility used was Cutecom; the software was verified by *Jin Yang* to comply with the standard requirements being tested against.

2.3 Duty Cycle Correction Factor

According to KDB 558074 D01 DTS Meas Guidance v03r04 section 6.0:

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be utilized to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration (T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data is being acquired (i.e., no transmitter off-time is to be considered).


Radio Frequency (MHz)	On Time (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)
902.26	7.667	50	13.22	8.79
915.26	7.667	50	13.22	8.79
927.74	7.667	50	13.22	8.79

Duty Cycle = On Time (ms) / Period (ms)


Duty Cycle Correction Factor (dB) = $10 \log(1/\text{Duty Cycle})$

Please refer to the following plots.


902.26 MHz

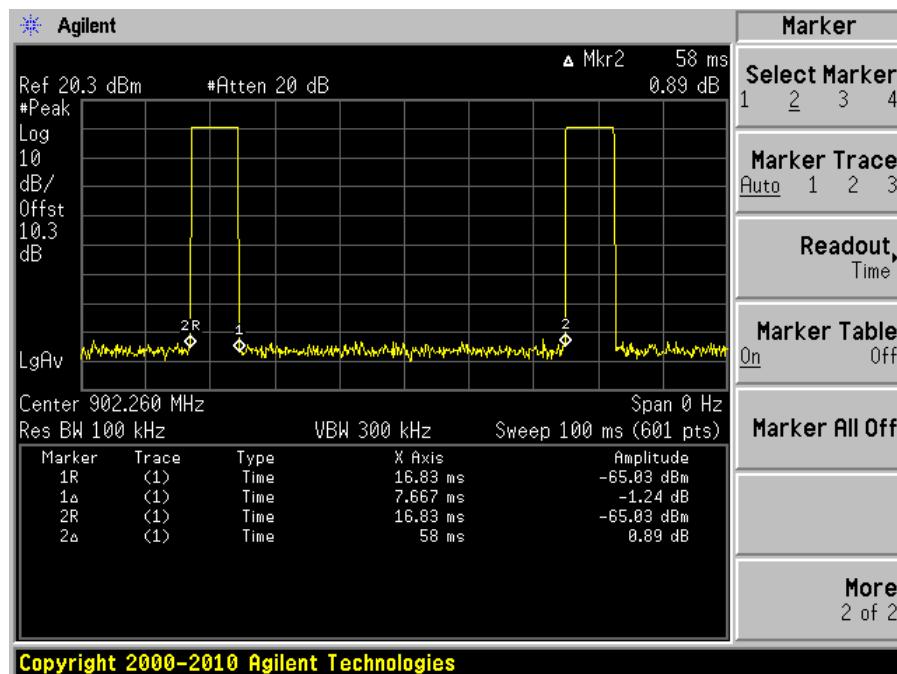

915.26 MHz

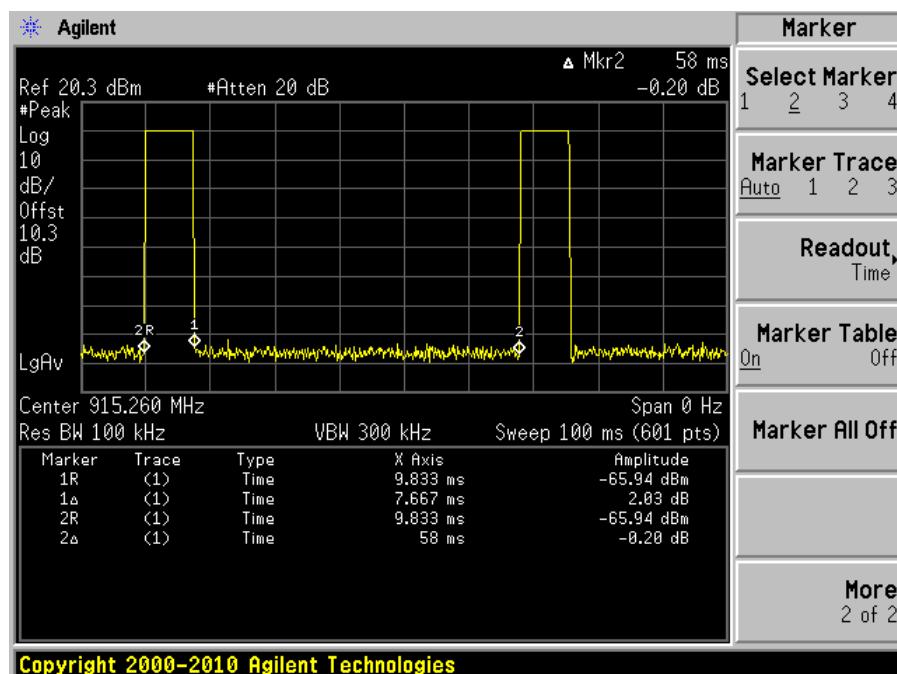

927.74 MHz

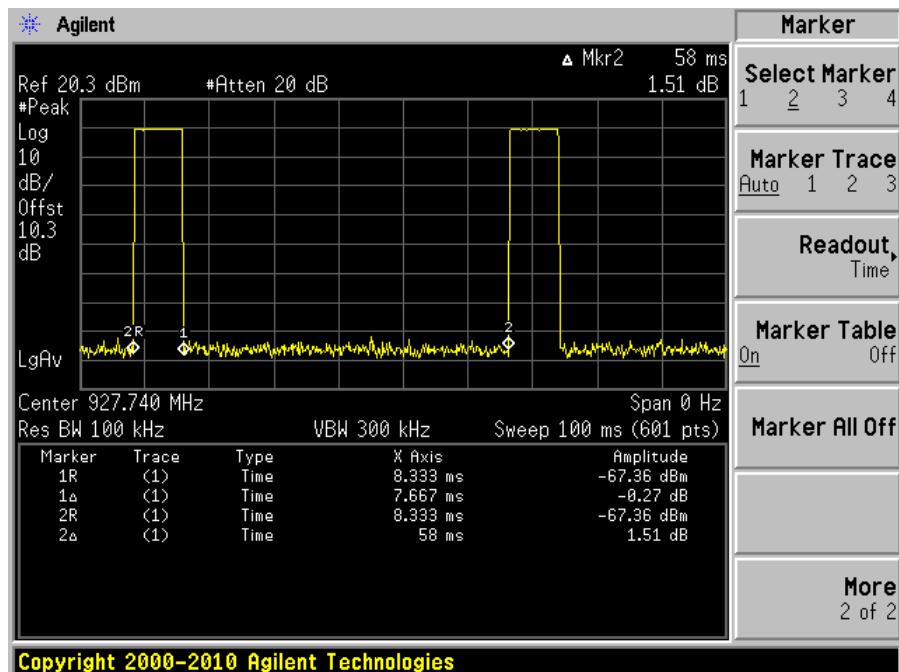

2.4 Equipment Modifications

N/A

2.5 Local Support Equipment

Manufacturer	Description	Model
Lenovo	Laptop	Yoga 2 11

2.6 EUT Internal Configuration Details

Manufacturer	Description	Model
Nordic	BLE module	nRF51822
TI	900MHz module	CC1200
Intel	PCB board	SJ4D

2.7 Interface Ports and Cabling

Cable Description	Length (m)	To	From
USB Cable	< 1 m	Laptop	EUT
SMA cable	< 1 m	EUT	PSA

2.8 Support Equipment

N/A

3 Summary of Test Results

Results reported relate only to the product tested.

FCC Rules	Description of Test	Results
FCC §15.203	Antenna Requirement	Compliant
FCC §2.1091, §15.247(i)	RF Exposure	Compliant
FCC §2.1051, §15.247 (d)	Spurious Emissions at Antenna Port	Compliant
FCC §2.1053, §15.205, §15.209, §15.247(d)	Radiated Spurious Emissions	Compliant
FCC §15.247(a)(1)(i)	20 dB & 99% Emission Bandwidth	Compliant
FCC §15.247(b)(2)	Maximum Peak Output Power	Compliant
FCC §15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
FCC §15.247(a)(1)(i)	Number of Hopping Channels	Compliant
FCC §15.247(a)(1)	Hopping Channel Separation	Compliant
FCC §15.247(a)(1)(i)	Dwell Time	Compliant

4 FCC §15.203 - Antenna Requirements

4.1 Applicable Standards

According to FCC §15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

And according to FCC §15.247 (b) (4), if transmitting antennas of directional gain greater than 6 dBi are used the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.2 Antenna Description

The antennas used by the EUT have unique coupling to the intentional radiator.

Maximum Antenna Gain @ BLE	Maximum Antenna Gain @ 900 MHz
-2 dBi	-2.5 dBi

5 FCC §2.1091 & §15.247(i) - RF Exposure

5.1 Applicable Standards

According to FCC §15.247(i) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for General Population/Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	* (100)	30
1.34-30	824/f	2.19/f	* (180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

5.2 MPE Prediction

Predication of MPE limit at a given distance, Equation from OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

Where: S = power density

P = power input to antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

5.3 MPE Results

<u>Maximum peak output power at antenna input terminal (dBm):</u>	<u>10.91</u>
<u>Maximum peak output power at antenna input terminal (mW):</u>	<u>12.331</u>
<u>Prediction distance (cm):</u>	<u>20</u>
<u>Prediction frequency (MHz):</u>	<u>902.26</u>
<u>Maximum Antenna Gain, typical (dBi):</u>	<u>-2.5</u>
<u>Maximum Antenna Gain (numeric):</u>	<u>0.56234</u>
<u>Power density of prediction frequency at 20.0 cm (mW/cm²):</u>	<u>0.00138</u>
<u>FCC MPE limit for uncontrolled exposure at prediction frequency (mW/cm²):</u>	<u>0.602</u>

The device is compliant with the requirement MPE limit for uncontrolled exposure. The maximum power density at the distance of 20 cm is 0.00138 mW/cm². Limit is 0.602 mW/cm².

6 FCC §15.207– AC Line Conducted Emissions

6.1 Applicable Standards

As per FCC §15.207 Conducted limits:

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56 ^{Note1}	56 to 46 ^{Note2}
0.5-5	56	46
5-30	60	50

Note1: Decreases with the logarithm of the frequency.

Note2: A linear average detector is required

6.2 Test Setup

The measurement was performed at shield room, using the setup per ANSI C63.10-2013 measurement procedure. The specification used were FCC §15.207 limits.

External I/O cables were draped along the edge of the test table and bundle when necessary.

The AC/DC power adapter of the laptop was connected with LISN-1 which provided 120 V/60 Hz AC power.

6.3 Test Procedure

During the conducted emissions test, the power cord of the EUT host system was connected to the mains outlet of the LISN-1 and the power cords of support equipment were connected to LISN-2.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data were recorded in the peak, quasi-peak, and average detection mode. Quasi-Peak readings are distinguished with a “QP.” Average readings are distinguished with an “Ave”.

6.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude (CA) is calculated by adding the Cable Loss (CL), the Attenuator Factor (Atten) to indicated Amplitude (Ai) reading. The basic equation is as follows:


$$CA = Ai + CL + Atten$$

For example, a corrected amplitude of 46.2 dBuV = Indicated Reading (32.5 dBuV) + Cable Loss (3.7 dB) + Attenuator (10 dB)

The “Margin” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

6.5 Test Setup Block Diagram

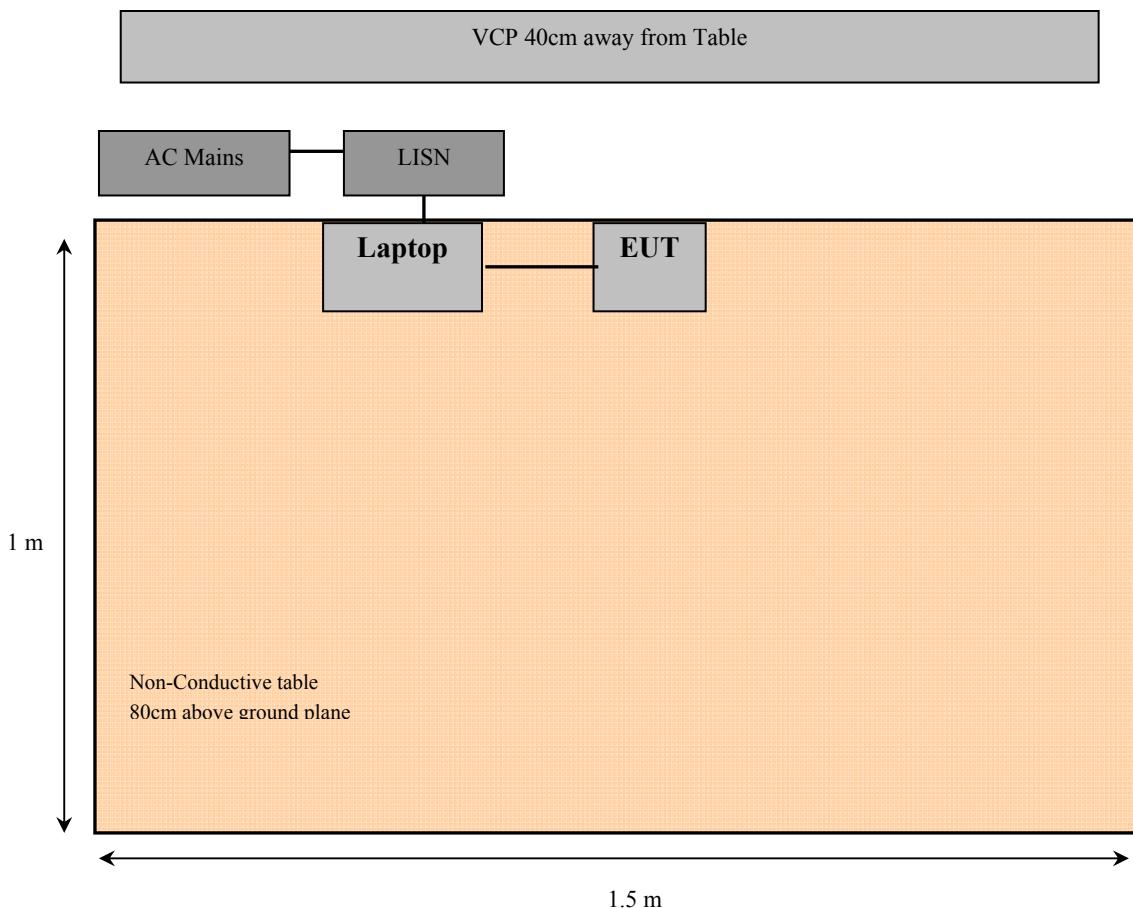

6.6 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Rohde & Schwarz	Receiver, EMI Test	ESCI 1166.5950K03	100044	2015-07-23	1 year
Rohde & Schwarz	Impulse Limiter	ESH3-Z2	101963	2015-07-15	1 year
Keysight Technologies	RF Limiter	11867A	MY42242931	2015-12-15	1 year
Solar Electronics Company	High Pass Filter	Type 7930-100	7930150204	2016-03-16	1 year
Suirong	30 ft conductive emission cable	LMR 400	-	2015-07-02	1 year
FCC	LISN	FCC-LISN-50-25-2-10-CISPR16	160129	2016-04-11	1 year

Statement of Traceability: **BACL Corp.** attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

6.7 Test Environmental Conditions

Temperature:	23° C
Relative Humidity:	44 %
ATM Pressure:	102.1 kPa

The testing was performed by Jin Yang on 2016-06-01.


6.8 Summary of Test Results

According to the recorded data in following table, the EUT complied with the FCC 15C and IC RSS-Gen standard's conducted emissions limits, with the margin reading of:

Connection: Adaptor of Laptop connected to 120 V/60 Hz, AC			
Margin (dB)	Frequency (MHz)	Conductor Mode (Live/Neutral)	Range (MHz)
-4.84	0.157574	Live	0.15-30

6.9 Conducted Emissions Test Plots and Data


120 V, 60 Hz – Line

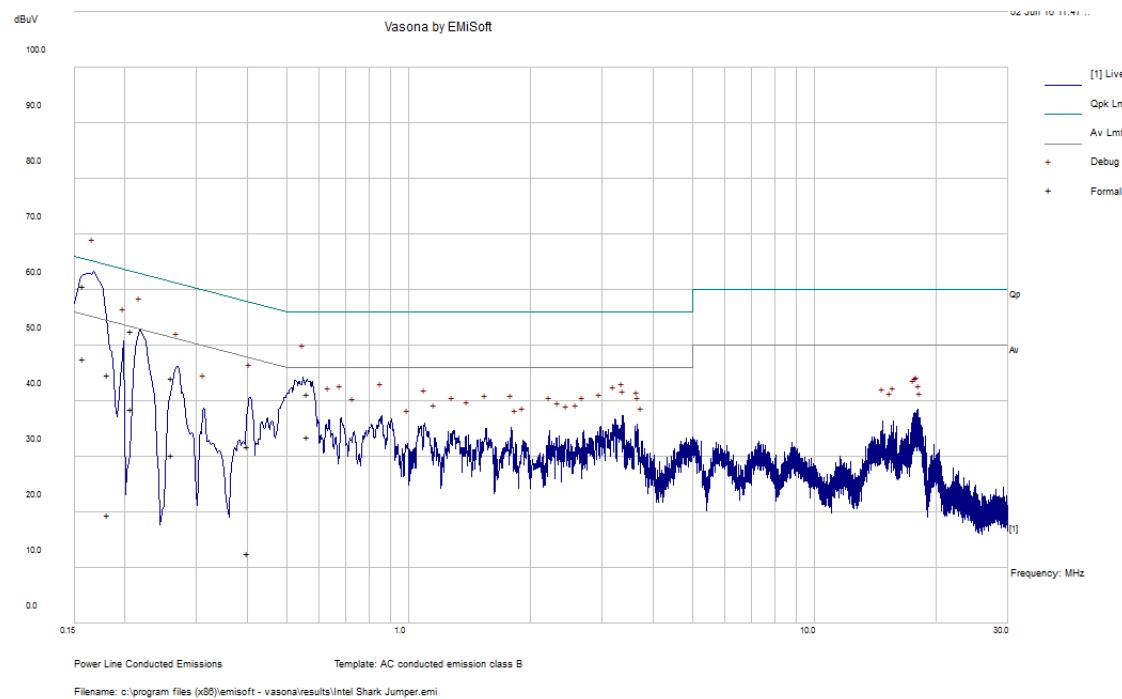

Frequency (MHz)	Corrected Amplitude (dBuV)	Conductor (Line/Neutral)	Limit (dBuV)	Margin (dB)	Detector (QP/Ave.)
0.157574	60.75	Line	65.59	-4.84	QP
0.207204	52.53	Line	63.32	-10.79	QP
0.561979	41.26	Line	56	-14.74	QP
0.181385	44.71	Line	64.42	-19.71	QP
0.260986	44.13	Line	61.4	-17.27	QP
0.400588	31.84	Line	57.84	-26	QP

Frequency (MHz)	Corrected Amplitude (dBuV)	Conductor (Line/Neutral)	Limit (dBuV)	Margin (dB)	Detector (QP/Ave.)
0.157574	47.56	Line	55.59	-8.03	Ave.
0.207204	38.5	Line	53.32	-14.82	Ave.
0.561979	33.55	Line	46	-12.45	Ave.
0.181385	19.65	Line	54.42	-34.77	Ave.
0.260986	30.25	Line	51.4	-21.15	Ave.
0.400588	12.62	Line	47.84	-35.22	Ave.

120 V, 60 Hz – Neutral

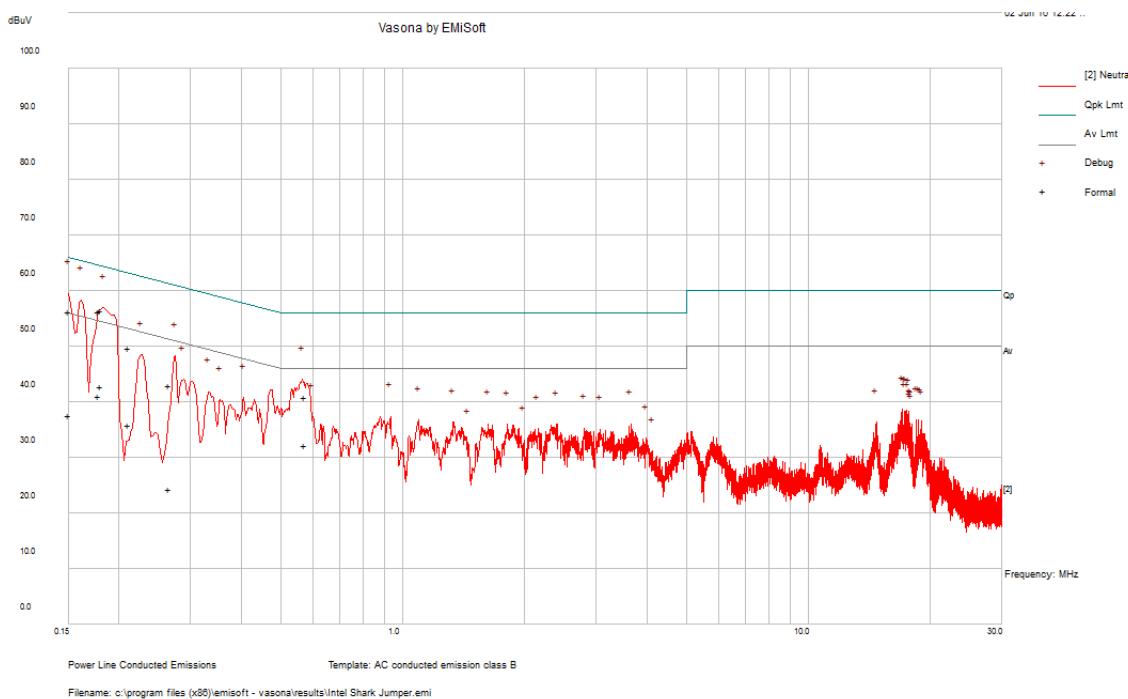

Frequency (MHz)	Corrected Amplitude (dBuV)	Conductor (Line/Neutral)	Limit (dBuV)	Margin (dB)	Detector (QP/Ave.)
0.15	56.21	Neutral	66	-9.79	QP
0.178365	56.29	Neutral	64.56	-8.27	QP
0.180375	56.37	Neutral	64.47	-8.1	QP
0.574845	40.82	Neutral	56	-15.18	QP
0.264945	43.01	Neutral	61.27	-18.27	QP
0.21151	49.69	Neutral	63.15	-13.46	QP

Frequency (MHz)	Corrected Amplitude (dBuV)	Conductor (Line/Neutral)	Limit (dBuV)	Margin (dB)	Detector (QP/Ave.)
0.15	37.54	Neutral	56	-18.46	Ave.
0.178365	41.05	Neutral	54.56	-13.51	Ave.
0.180375	42.76	Neutral	54.47	-11.71	Ave.
0.574845	32.2	Neutral	46	-13.8	Ave.
0.264945	24.34	Neutral	51.27	-26.94	Ave.
0.21151	35.8	Neutral	53.15	-17.34	Ave.

7 FCC §15.209 & §15.247(d) - Spurious Radiated Emissions

7.1 Applicable Standards

As per FCC §15.35(d): Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1 MHz.

As Per FCC §15.205(a) except as show in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423	960 – 1240	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	1300 – 1427	5.35 – 5.46
2.1735 – 2.1905	25.5 – 25.67	1435 – 1626.5	7.25 – 7.75
4.125 – 4.128	37.5 – 38.25	1645.5 – 1646.5	8.025 – 8.5
4.17725 – 4.17775	73 – 74.6	1660 – 1710	9.0 – 9.2
4.20725 – 4.20775	74.8 – 75.2	1718.8 – 1722.2	9.3 – 9.5
6.215 – 6.218	108 – 121.94	2200 – 2300	10.6 – 12.7
6.26775 – 6.26825	123 – 138	2310 – 2390	13.25 – 13.4
6.31175 – 6.31225	149.9 – 150.05	2483.5 – 2500	14.47 – 14.5
8.291 – 8.294	156.52475 – 156.52525	2690 – 2900	15.35 – 16.2
8.362 – 8.366	156.7 – 156.9	3260 – 3267	17.7 – 21.4
8.37625 – 8.38675	162.0125 – 167.17	3.332 – 3.339	22.01 – 23.12
8.41425 – 8.41475	167.72 – 173.2	3.3458 – 3.358	23.6 – 24.0
12.29 – 12.293	240 – 285	3.600 – 4.400	31.2 – 31.8
12.51975 – 12.52025	322 – 335.4		36.43 – 36.5
12.57675 – 12.57725	399.9 – 410		Above 38.6
13.36 – 13.41	608 – 614		

As per FCC §15.209(a): Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (micro volts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

As per FCC §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.2 Test Setup

The radiated emissions tests were performed in the 5-meter Chamber, using the setup in accordance with ANSI C63.10-2013. The specification used was the FCC 15 Subpart C limits.

The spacing between the peripherals was 10 centimeters.

External I/O cables were draped along the edge of the test table and bundle when necessary.

7.3 Test Procedure

For the radiated emissions test, the EUT host, and all support equipment power cords was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The EUT was set 3 meter away from the testing antenna, which was varied from 1-4 meter, and the EUT was placed on a turntable, which was 0.8 meter and 1.5 meter above the ground plane for below and above 1000 MHz measurements, the table shall be rotated for 360 degrees to find out the highest emission. The receiving antenna should be changed the polarization both of horizontal and vertical.

The spectrum analyzer or receiver is set as:

Below 1000 MHz:

$$\text{RBW} = 100 \text{ kHz} / \text{VBW} = 300 \text{ kHz} / \text{Sweep} = \text{Auto}$$

Above 1000 MHz:

- (1) Peak: $\text{RBW} = 1\text{MHz} / \text{VBW} = 1\text{MHz} / \text{Sweep} = \text{Auto}$
- (2) Average: $\text{RBW} = 1\text{MHz} / \text{VBW} = 10\text{Hz} / \text{Sweep} = \text{Auto}$

7.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude (CA) is calculated by adding the Antenna Factor (AF), the Cable Loss (CL), the Attenuator Factor (Atten) and subtracting the Amplifier Gain (Ga) to indicated Amplitude (Ai) reading. The basic equation is as follows:

$$CA = Ai + AF + CL + Atten - Ga$$

For example, a corrected amplitude of 40.3 dBuV/m = Indicated Reading (32.5 dBuV) + Antenna Factor (+23.5dB) + Cable Loss (3.7 dB) + Attenuator (10 dB) - Amplifier Gain (29.4 dB)

The “Margin” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

7.5 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Rohde & Schwarz	EMI Test Receiver	ESCI 1166.5950K03	100044	2015-07-23	1 year
Agilent	Analyzer, Spectrum	E4440A	MY44303352	2015-06-22	1 year
Sunol Science Corp	System Controller	SC99V	011003-1	N/R	N/R
Sunol Sciences	Antenna, Biconi-Log	JB3	A020106-2	2015-07-11	2 Years
EMCO	Antenna, Horn	3115	9511-4627	2016-01-18	2 years
Agilent	Pre-Amplifier	8447D	2944A10187	2015-03-20	1 year
Suirong	30 ft conductive emission cable	LMR 400	-	2015-03-05	1 year
-	SMA cable	-	C0002	Each time ¹	N/A
IW Microwave	High Frequency Cable	DC-1438	SPS-2303-3840-SPS	2016-01-18	1 year
Hewlett-Packard	5 ft N-type RF cable	-	1268	2015-05-15	1 year
Hewlett	Pre-Amplifier	8449B	3008A01978	2015-03-11	1 year

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: *BACL attests that all calibrations have been performed per the A2LA requirements, traceable to NIST.*

7.6 Test Environmental Conditions

Temperature:	20-22 °C
Relative Humidity:	42-50 %
ATM Pressure:	102.7 kPa

The testing was performed by Jin Yang from 2016-05-31 in 5m chamber 3.

7.7 Summary of Test Results

According to the data hereinafter, the EUT complied with FCC Title 47, Part 15C standard's radiated emissions limits, and had the worst margin of:


Mode: Transmitting			
Margin (dB)	Frequency (MHz)	Polarization (Horizontal/Vertical)	Transmitting Channel
-4.7	3609.04	Horizontal	902.26MHz

Please refer to the following table and plots for specific test result details.

7.8 Radiated Emissions Test Results

Note: the duty cycle correction factor already add in the final result.

1) 30 MHz – 1 GHz Worst Case, Measured at 3 meters

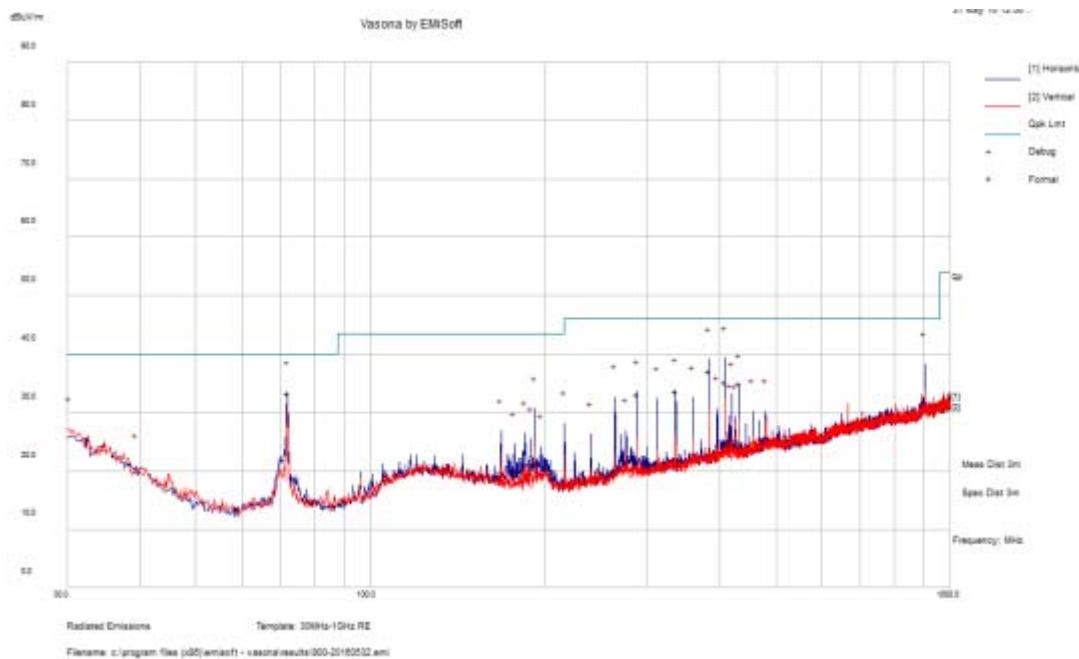

Frequency (MHz)	Corrected Amplitude (dB μ V/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dB μ V/m)	Margin (dB)	Comment
71.99175	33.35	240	H	249	40	-6.65	QP
408.054	36	101	H	311	46	-10	QP
384.00425	38.76	101	H	326	46	-7.24	QP
902.2485	35.52	103	H	234	46	-10.48	QP
432.0365	32.4	242	H	307	46	-13.6	QP
335.9945	31.92	101	H	199	46	-14.08	QP

2) Above 1 GHz, Measured at 3 meters

Frequency (MHz)	Receiver		Rx Antenna		Cable Loss (dB)	Amp. Gain (dB)	Cord. Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin dB
	Reading (dB μ V)	Reading (dB μ V)	Detector (PK/AV)	Polar (H/V)					
Low CH, 902.26 MHz									
902.26	67.45	PK	H	22.94	3.71	0.00	94.10	N/A	N/A
902.26	61.87	PK	V	22.94	3.71	0.00	88.52	N/A	N/A
902	26.59	PK	H	22.94	3.71	0.00	53.24	74.10	-20.86
902	22.46	PK	V	22.94	3.71	0.00	49.11	68.52	-19.41
1804.52	62.51	PK	H	27.23	4.38	35.83	58.29	74.00	-15.71
1804.52	44.75	AV	H	27.23	4.38	35.83	40.53	54.00	-13.47
2706.78	62.86	PK	H	29.07	6.06	35.50	62.49	74.00	-11.51
2706.78	45.1	AV	H	29.07	6.06	35.50	44.73	54.00	-9.27
3609.04	64.84	PK	H	31.47	6.95	36.20	67.06	74.00	-6.94
3609.04	47.08	AV	H	31.47	6.95	36.20	49.30	54.00	-4.70
Mid CH, 915.26 MHz									
915.26	66.86	PK	H	22.91	3.68	0.00	93.45	N/A	N/A
915.26	61.41	PK	V	22.91	3.68	0.00	88.00	N/A	N/A
1830.52	63.48	PK	H	27.32	4.42	35.76	59.46	74.00	-14.54
1830.52	45.72	AV	H	27.32	4.42	35.76	41.70	54.00	-12.30
2745.78	63.36	PK	H	29.03	6.09	35.55	62.93	74.00	-11.07
2745.78	45.6	AV	H	29.03	6.09	35.55	45.17	54.00	-8.83
3661.04	64.18	PK	H	31.71	6.93	36.18	66.64	74.00	-7.36
3661.04	46.42	AV	H	31.71	6.93	36.18	48.88	54.00	-5.12
High CH, 927.74 MHz									
927.74	66.46	PK	H	23.00	3.70	0.00	93.16	N/A	N/A
927.74	61.95	PK	V	23.00	3.70	0.00	88.65	N/A	N/A
928	26.86	PK	H	23.00	3.70	0.00	53.56	73.16	-19.60
928	24.56	PK	V	23.00	3.70	0.00	51.26	68.65	-17.39
1855.48	65.19	PK	H	27.41	4.46	35.70	61.36	74.00	-12.64
1855.48	47.43	AV	H	27.41	4.46	35.70	43.60	54.00	-10.40
2783.22	64.7	PK	H	28.99	6.13	35.60	64.22	74.00	-9.78
2783.22	46.94	AV	H	28.99	6.13	35.60	46.46	54.00	-7.54
3710.96	62.1	PK	H	31.99	6.91	36.15	64.85	74.00	-9.15
3710.96	44.34	AV	H	31.99	6.91	36.15	47.09	54.00	-6.91

8 FCC §15.247(a) (1)(i) - Emission Bandwidth

8.1 Applicable Standards

According to FCC §15.247(a) (1)(i):

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

8.2 Measurement Procedure

Span = approximately 2 to 5 times the 99% occupied bandwidth, centered on a hopping channel

RBW = 1% to 5 % of the 99% occupied bandwidth

VBW = 3RBW

Sweep = auto

Detector function = peak

Trace = max hold

8.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Analyzer, Spectrum	E4440A	MY44303352	2015-06-22	1 year
-	SMA cable	-	-	Each time ¹	N/A
-	10 dB attenuator	-	-	Each time ¹	N/A

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: *BACL Corp.* attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

8.4 Test Environmental Conditions

Temperature:	22° C
Relative Humidity:	42 %
ATM Pressure:	102.7 KPa


The testing was performed by Jin Yang on 2016-05-31 in RF site.

8.5 Test Results


Channel	Frequency (MHz)	99% OBW (kHz)	20 dB OBW (kHz)
Low	902.26	71.5352	84.097
Middle	915.26	71.5794	84.210
High	927.74	70.9421	84.238

Please refer to the following plots for detailed test results.


Low Channel 902.26 MHz

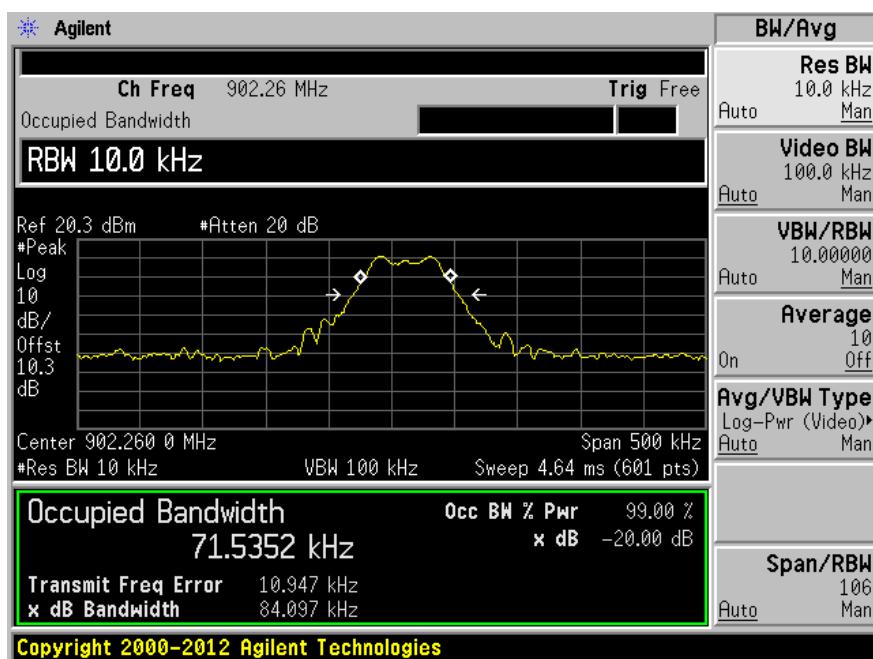

Middle Channel 915.26 MHz

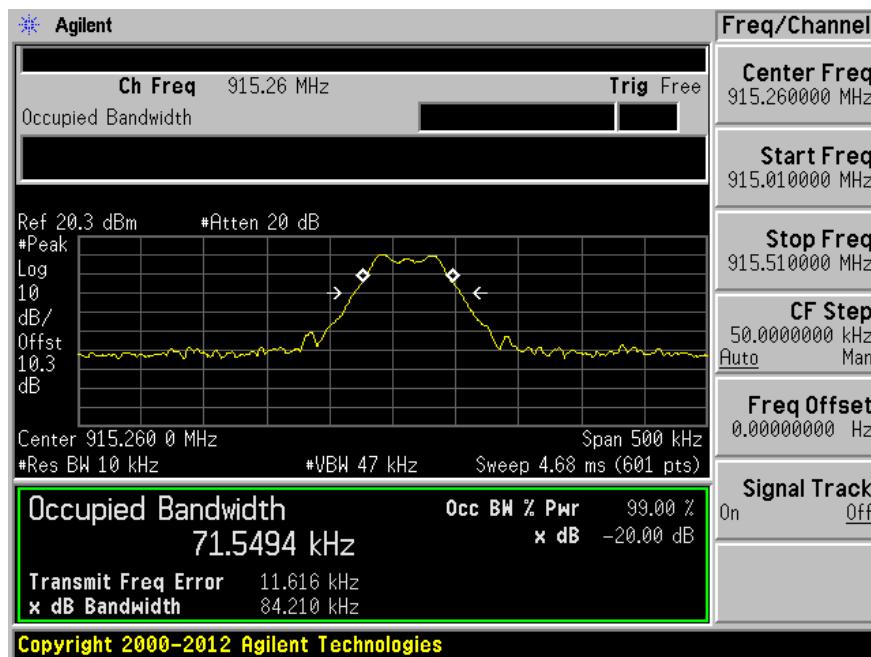

High Channel 927.74 MHz

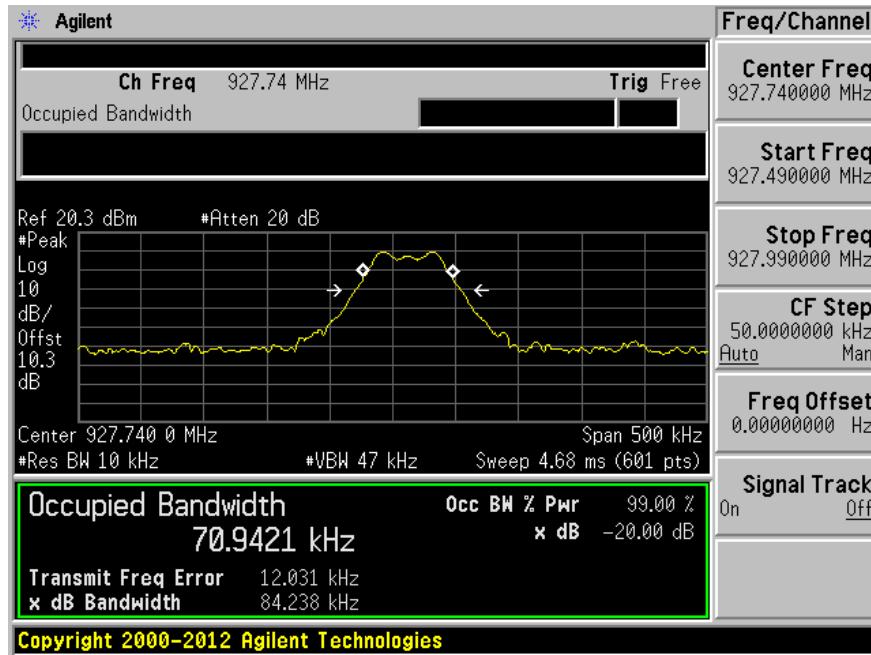

9 FCC §15.247(b) (2) - Output Power

9.1 Applicable Standards

According to FCC §15.247(b) (2): For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

9.2 Measurement Procedure

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW > the 20 dB bandwidth of the emission being measured

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

9.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Analyzer, Spectrum	E4440A	MY44303352	2015-06-22	1 year
-	SMA cable	-	-	Each time ¹	N/A
-	10dB attenuator	-	-	Each time ¹	N/A

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: *BACL Corp.* attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

9.4 Test Environmental Conditions

Temperature:	22° C
Relative Humidity:	42 %
ATM Pressure:	102.7 KPa

The testing was performed by Jin Yang on 2016-05-31 in RF site.


9.5 Test Results

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)
Low	902.26	10.91	30
Middle	915.26	10.32	30
High	927.74	9.71	30


Please refer to the following plots for detailed test results.



Middle Channel 915.26 MHz

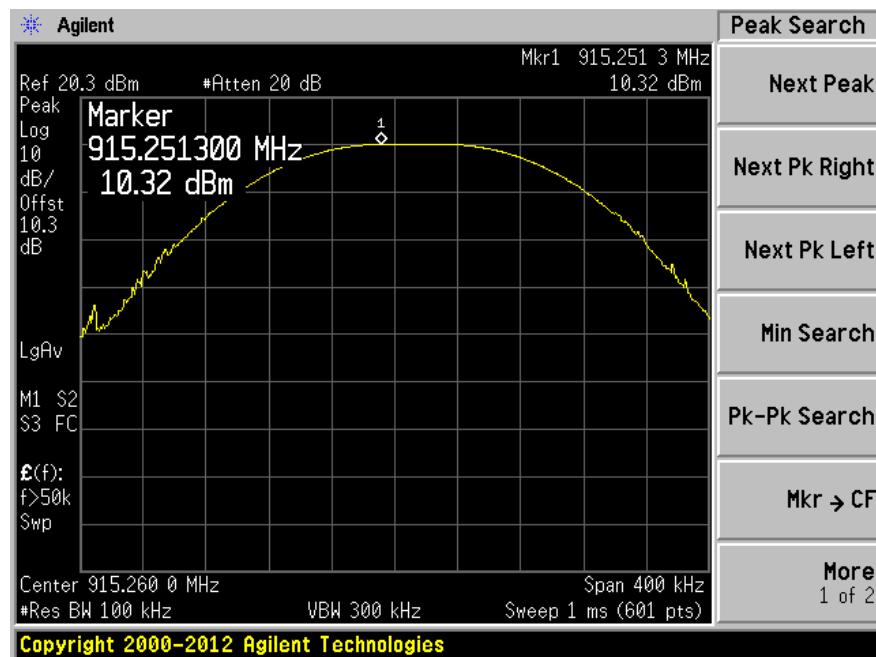

High Channel 927.74 MHz

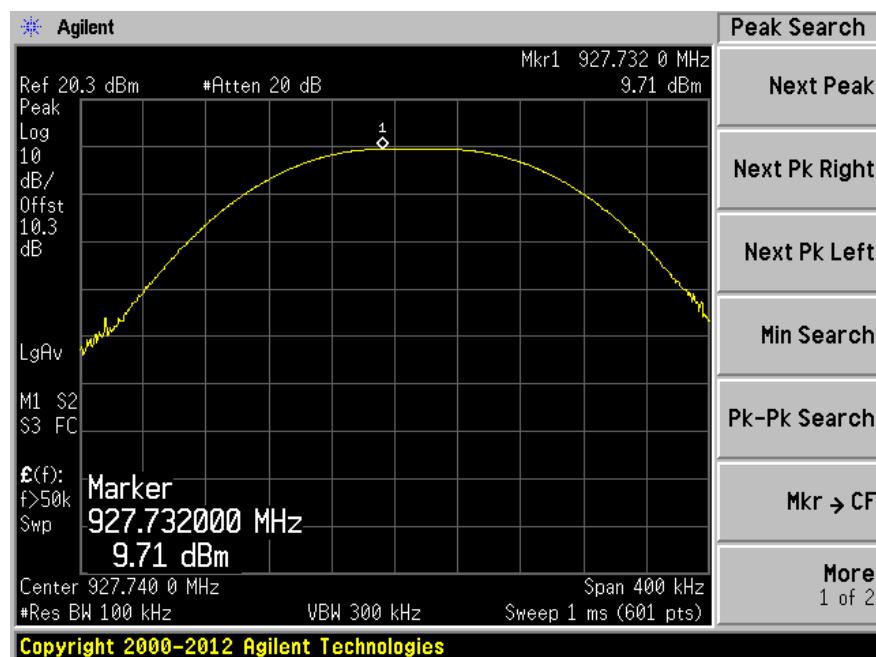

10 FCC §15.247(d) - 100 kHz Bandwidth of Band Edges

10.1 Applicable Standards

According to FCC §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emissions limits specified in §15.209(a) see §15.205(c).

10.2 Measurement Procedure

Span = wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation

RBW = 100 kHz

VBW = 300 kHz

Sweep = coupled

Detector function = peak

Trace = max hold

10.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Analyzer, Spectrum	E4440A	MY44303352	2015-06-22	1 year
-	SMA cable	-	-	Each time ¹	N/A
-	10 dB attenuator	-	-	Each time ¹	N/A

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: *BACL Corp.* attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.


10.4 Test Environmental Conditions

Temperature:	22° C
Relative Humidity:	42 %
ATM Pressure:	102.7 KPa


The testing was performed by Jin Yang on 2016-05-31 in RF site.

10.5 Test Results

Low Channel 902.26 MHz

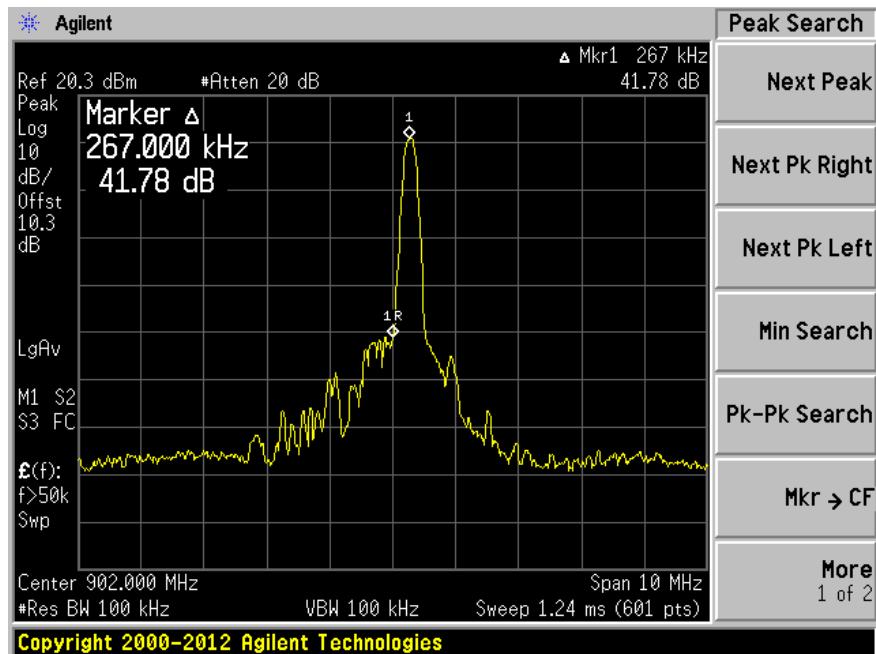

High Channel 927.74 MHz

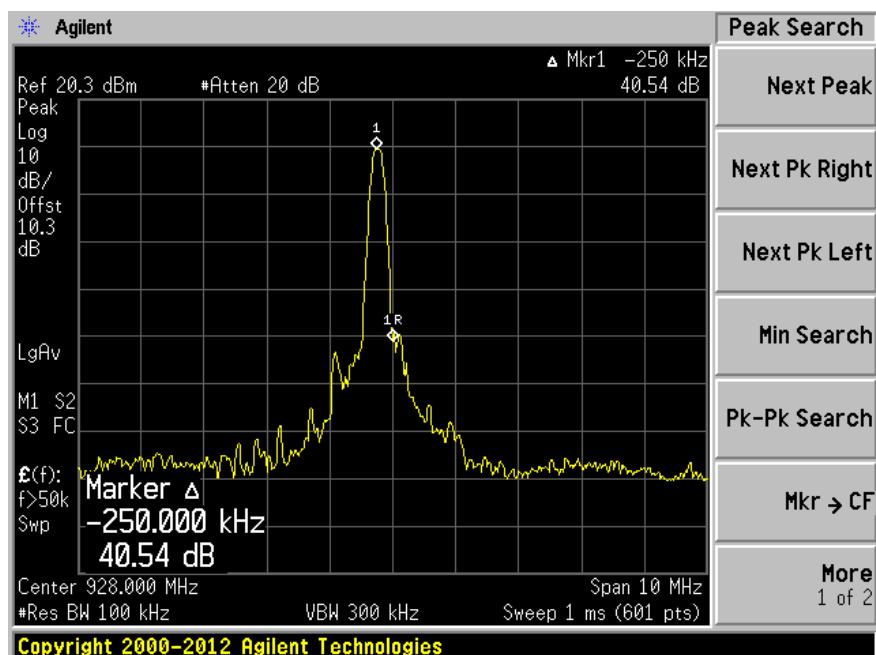

11 FCC §15.247(a) (1) (i) - Dwell Time

11.1 Applicable Standards

According to FCC §15.247(a) (1) (i): For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz

11.2 Measurement Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = zero span, centered on a hopping channel

RBW \leq channel spacing and where possible RBW should be set $\gg 1/T$, where T is the expected dwell time per channel

Sweep = as necessary to capture the entire dwell time per hopping channel

Detector function = peak

Trace = max hold

Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

Repeat the measurement using a longer sweep time to determine the number of hops over the period specified in the requirements. The sweep time shall be equal to, or less than, the period specified in the requirements. Determine the number of hops over the sweep time and calculate the total number of hops in the period specified in the requirements, using the following equation:

(Number of hops in the period specified in the requirements) =
(number of hops on spectrum analyzer) x (period specified in the requirements / analyzer sweep time)

The average time of occupancy is calculated from the transmit time per hop multiplied by the number of hops in the period specified. If the number of hops in a specific time varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation.

11.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Rohde & Schwarz	Signal Analyzer	FSQ26	200749	2015-03-09	1 year
-	SMA cable	-	-	Each time ¹	N/A
-	10 dB attenuator	-	-	Each time ¹	N/A

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: *BACL Corp.* attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

11.4 Test Environmental Conditions

Temperature:	22° C
Relative Humidity:	42 %
ATM Pressure:	102.7 KPa

The testing was performed by Jin Yang on 2016-06-01 in RF site.


11.5 Test Results

Channel	Pulse Width (ms)	Number of Hops in the Period Specified in the Requirements	Average Time of Occupancy (s)	Limit (sec)	Results
Low	5.833	20	0.11666	0.4	compliant
Middle	5.917	28	0.165676	0.4	compliant
High	5.917	20	0.11834	0.4	compliant


Please refer to the following plots for detailed test results.

Pulse time


Low Channel 902.26 MHz

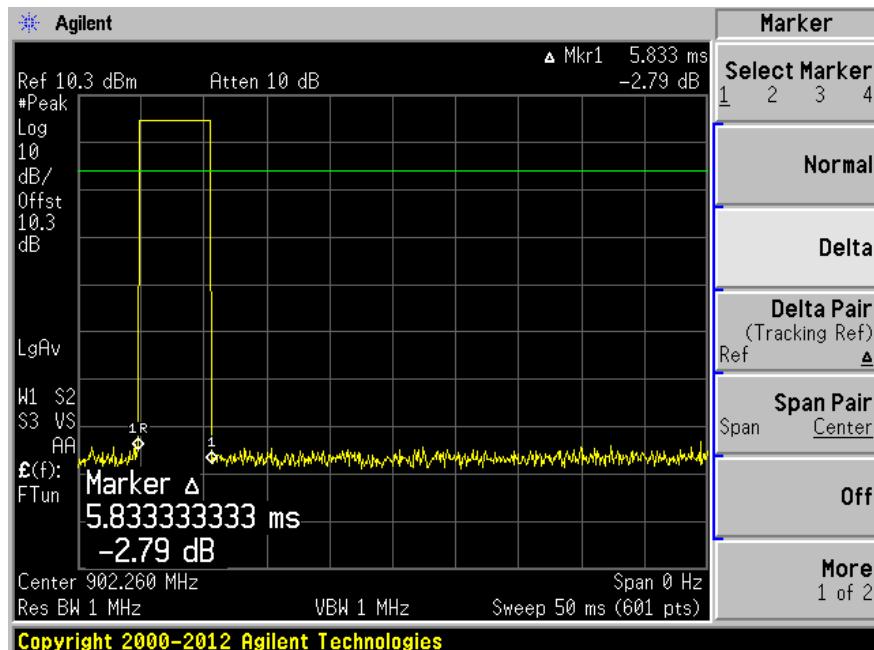

Middle Channel 915.26 MHz

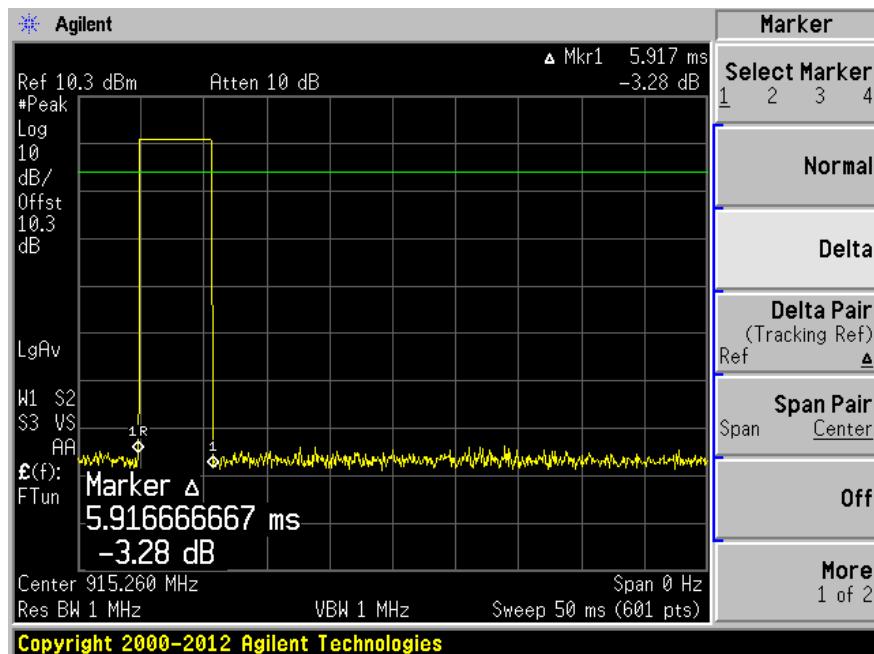


High Channel 927.74 MHz

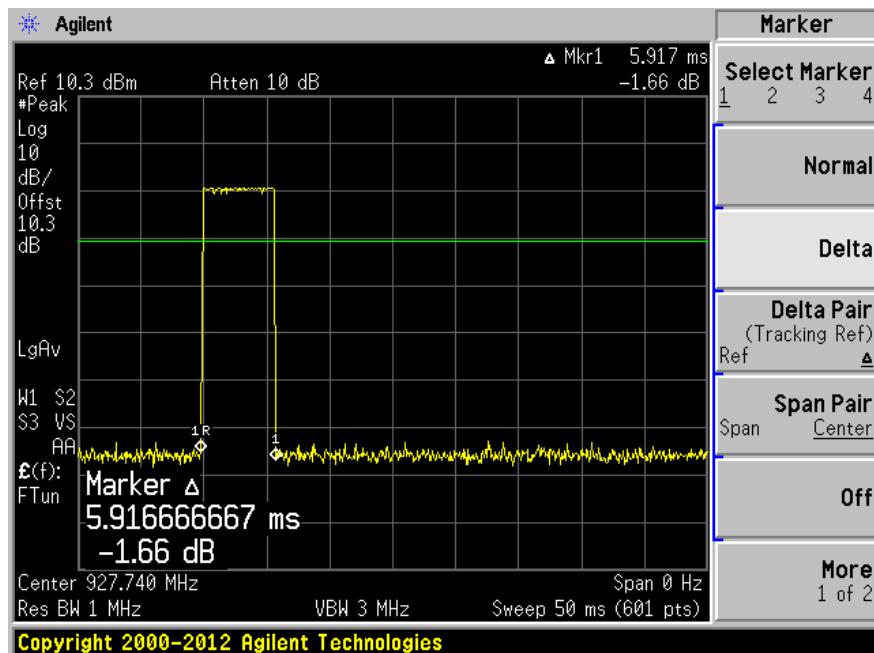


Number of Pulses


Low Channel 902.26 MHz

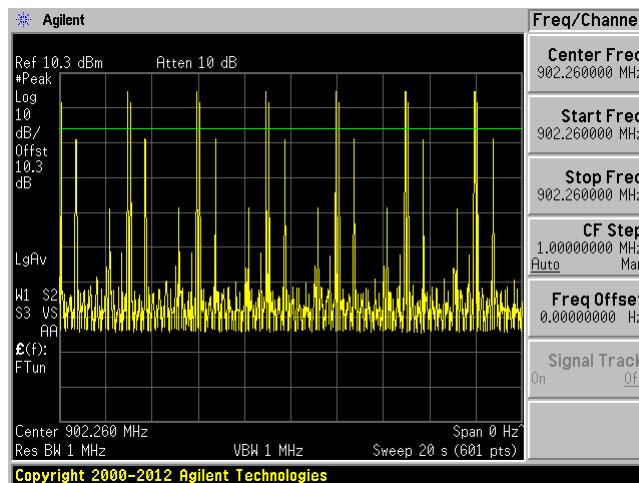

Middle Channel 915.26 MHz

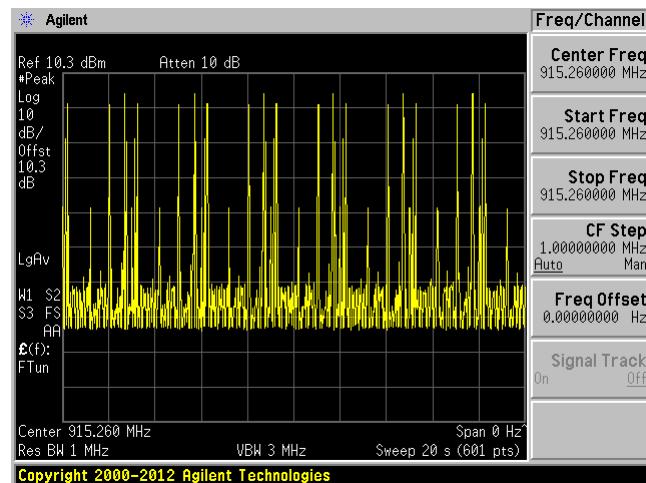

High Channel 927.74 MHz

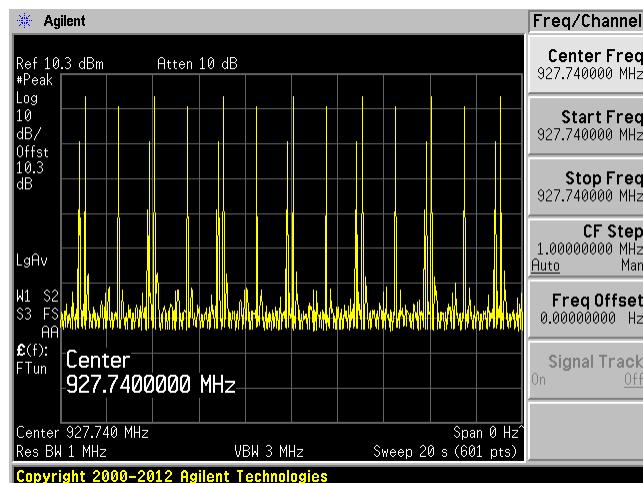

12 FCC §15.247(a)(1)(i) - Number of Hopping Channels

12.1 Applicable Standards

According to FCC §15.247(a) (1) (i) : For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz

12.2 Test Procedure

Span = the frequency band of operation

RBW < 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

12.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Analyzer, Spectrum	E4440A	MY44303352	2015-06-22	1 year
-	SMA cable	-	-	Each time ¹	N/A
-	10dB attenuator	-	-	Each time ¹	N/A

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: *BACL Corp.* attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.


12.4 Test Environmental Conditions

Temperature:	22° C
Relative Humidity:	42 %
ATM Pressure:	102.7 KPa

The testing was performed by Jin Yang on 2016-06-01 in RF site.

12.5 Test Results

Total 50 channels; please refer to the plots hereinafter.

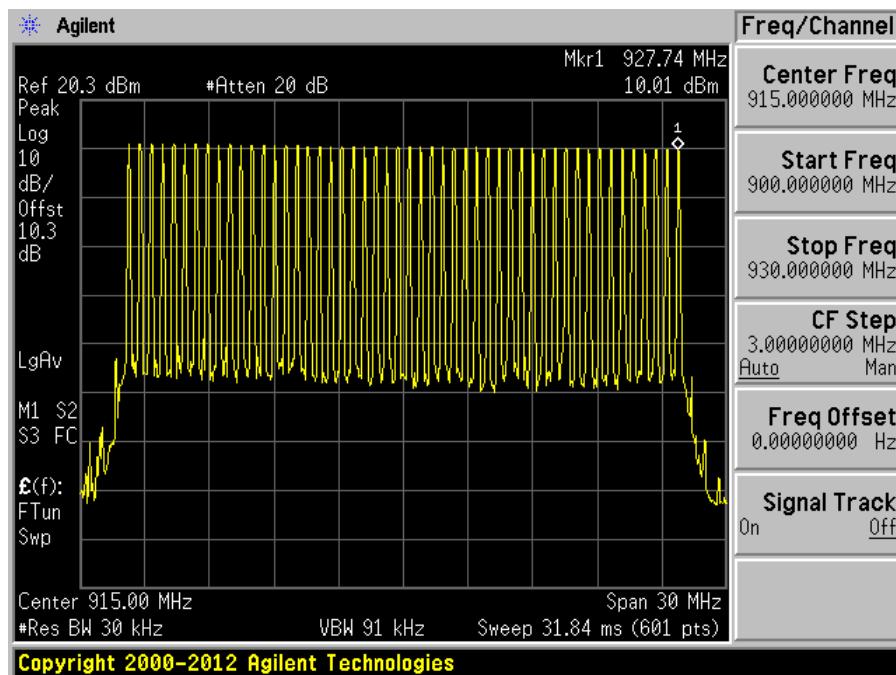

13 FCC §15.247(a) (1) - Hopping Channel Separation

13.1 Applicable Standards

According to FCC §15.247(a) (1) : Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

According to FCC §15.247(a) (1) (i): For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz

13.2 Test Procedure

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) \approx 30% of the channel spacing, adjust as necessary to best identify the center of each individual channel

Video (or Average) Bandwidth (VBW) \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

13.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Analyzer, Spectrum	E4440A	MY44303352	2015-06-22	1 year
-	SMA cable	-	-	Each time ¹	N/A
-	10dB attenuator	-	-	Each time ¹	N/A

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: BACL Corp. attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

13.4 Test Environmental Conditions

Temperature:	22° C
Relative Humidity:	42 %
ATM Pressure:	102.7 KPa


The testing was performed by Jin Yang on 2016-05-31 in RF site.

13.5 Test Results


Channel	Frequency (MHz)	Channel Separation (kHz)	Limit > 20 dB OBW (kHz)
Low	902.06	519.6	84.097
Middle	915.26	519.6	84.210
High	927.74	520.8	84.238

Please refer to following plots.


Low Channel 902.26 MHz

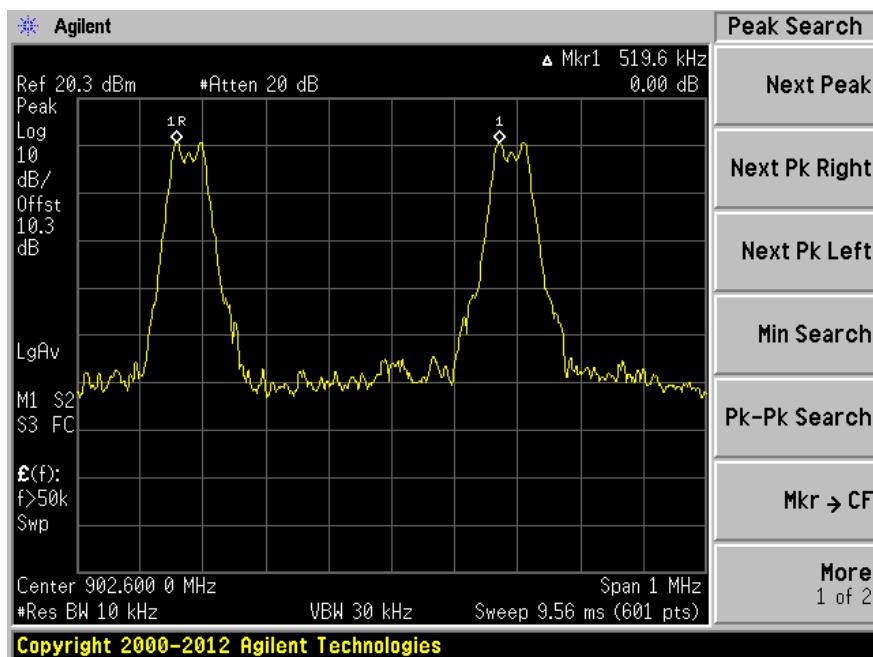

Middle Channel 915.26 MHz

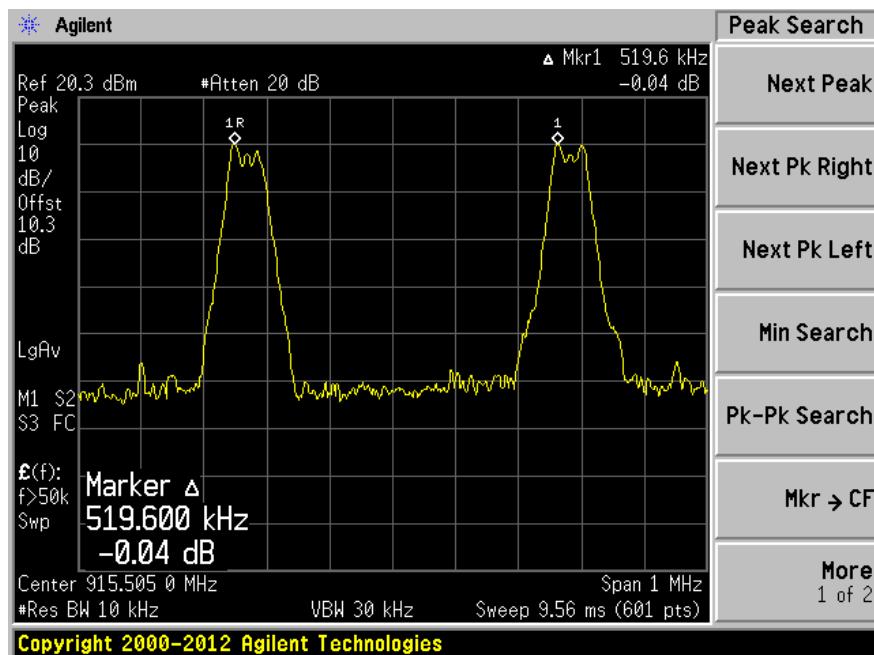

High Channel 927.74 MHz

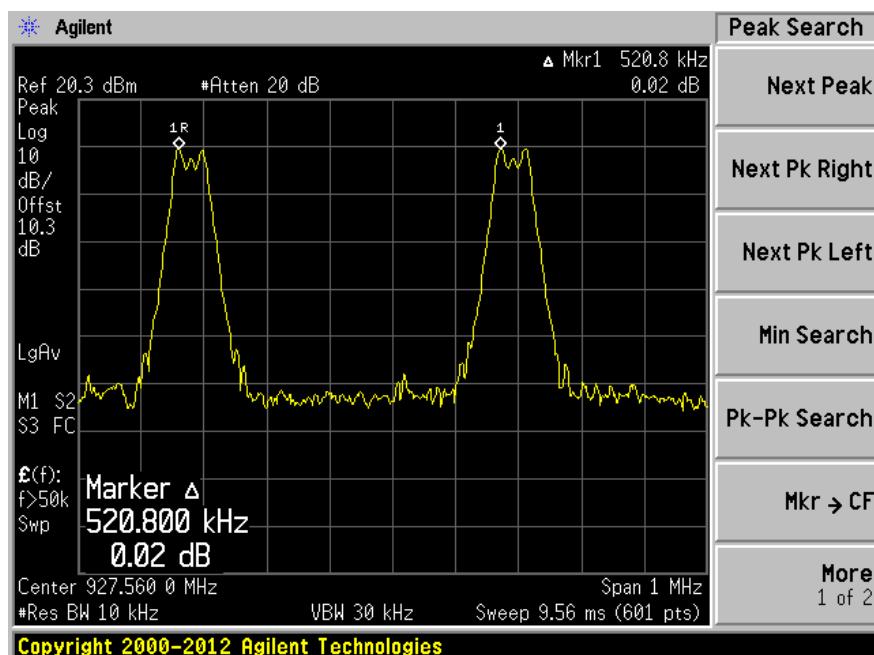

14 FCC §15.247(d) - Spurious Emissions at Antenna Terminals

14.1 Applicable Standards

For FCC §15.247(d) in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

14.2 Test Procedure

The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

14.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Analyzer, Spectrum	E4440A	MY44303352	2015-06-22	1 year
-	SMA cable	-	-	Each time ¹	N/A
-	10dB attenuator	-	-	Each time ¹	N/A

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: BACL Corp. attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

14.4 Test Environmental Conditions


Temperature:	22° C
Relative Humidity:	42 %
ATM Pressure:	102.7 KPa

The testing was performed by Jin Yang on 2016-05-31 in RF site.


14.5 Test Results

Please refer to following plots.


Low Channel 30 MHz – 1 GHz

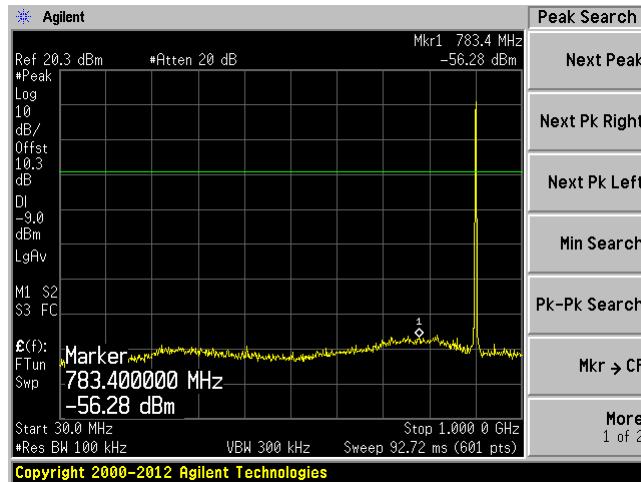


Low Channels 1GHz – 10 GHz

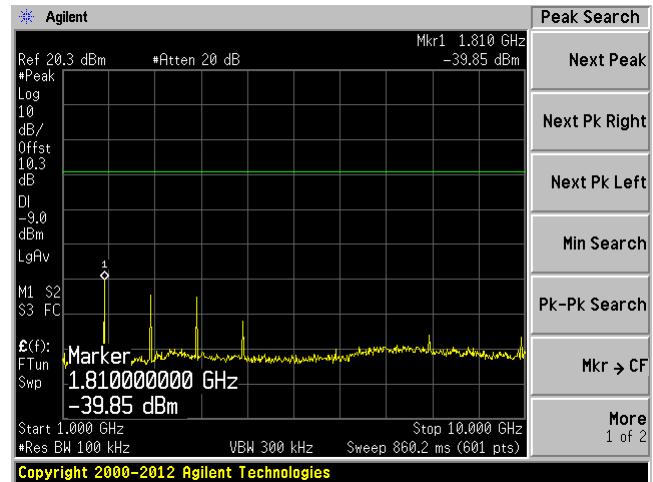


Middle Channel 30 MHz – 1 GHz

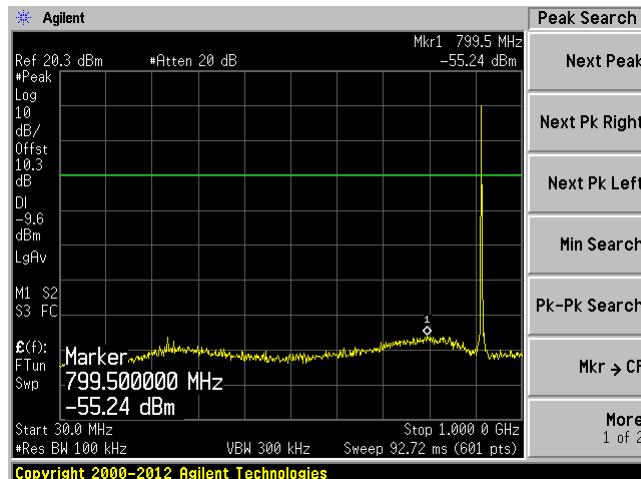

Middle Channels 1 GHz – 10 GHz

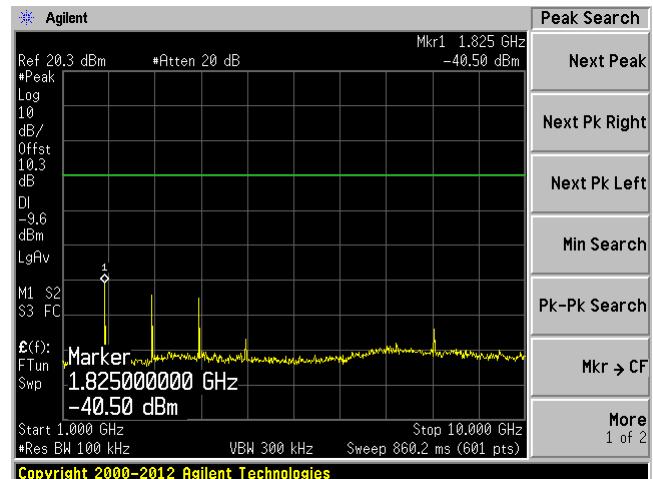

High Channel 30 MHz – 1 GHz

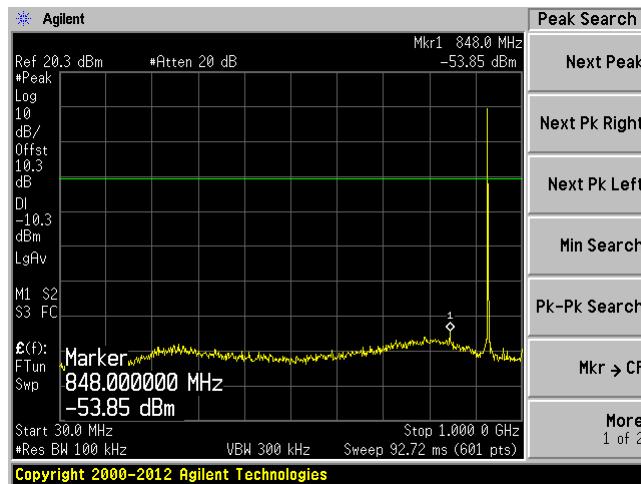

High Channels 1 GHz – 10 GHz

