

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501 www.e-ctk.com

TEST REPORT

FCC Standards: FCC 47CFR part 15 subpart C

Test Report No. : CTK-2014-00673

Date of Issue : 2014-06-09

FCC ID 2AB99CMITBT200

CMIT-BT200 Model/Type No. :

Kind of Product Bluetooth USB Dongle

Applicant Carman International Co., Ltd.

Applicant Address #1212, 12th Floor, Hoseo Univ. Venture Tower, 70, Gasan

digital 1-ro, Geumcheon-gu, Seoul, 153-711, Korea

Manufacturer Carman International Co., Ltd.

Manufacturer Address : #1212, 12th Floor, Hoseo Univ. Venture Tower, 70, Gasan

digital 1-ro, Geumcheon-gu, Seoul, 153-711, Korea

Contact Person Ahn Tae Min / Associate Research Engineer :

Telephone +82-2-2627-4592

Received Date 2014-04-14

Test period Start: 2014-05-13 End: 2014-06-01

The test results presented in this report relate only to the object tested.

Tested by

Won-Jae, Hwang Test Engineer

Date: 2014-06-09

Reviewed by

Young-Joon, Park Technical Manager

Date: 2014-06-09

Test Report No.: CTK-2014-00673 Page 1 of 54



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501 www.e-ctk.com

REPORT REVISION HISTORY

Date	Revision	Page No
2014-06-09	Issued (CTK-2014-00673)	All

This report shall not be reproduced except in full, without the written approval of CTK Co., Ltd. This document may be altered or revised by CTK Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by CTK Co., Ltd. will constitute fraud and shall nullify the document.

Test Report No.: CTK-2014-00673 Page 2 of 54



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501 www.e-ctk.com

TABLE OF CONTENTS

REPORT	REVISION HISTORY	. 2
1.0	General Product Description	. 4
	Tested Frequency	
1.2	Tested Mode	. 4
1.3	Device Modifications	. 5
1.4	Peripheral Devices	. 5
1.5	Calibration Details of Equipment Used for Measurement	. 5
	Test Facility	
1.7	Laboratory Accreditations and Listings	. 6
2.0	Summary of tests	
2.1	Transmitter Requirements	. 8
2.1.	1 Carrier Frequency Separation	. 8
2.1.	2 Number of Hopping Frequencies	10
2.1.	4 Time of Occupancy (Dwell Time)	19
2.1.		
2.1.		
2.1.	7 Field Strength of Emissions	41
2.1.	8 AC Conducted Emissions	51
APPEND	IX A – Test Equipment Used For Tests	54

Test Report No.: CTK-2014-00673



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Fax: +82-31-624-9501 www.e-ctk.com

1.0 General Product Description

CTK Co., Ltd.

Basic Model/Type No.	CMIT-BT200
Serial number	Prototype
EUT condition	Pre-production, not damaged
Antenna type	Chip antenna Gain 2 dBi
Frequency Range	2402 MHz - 2480 MHz
RF power	3.864 dBm Peak Conducted (GFSK) 4.250 dBm Peak Conducted (8-DPSK)
Number of channels	79
Channel Spacing	1 MHz
Channel Access Protocol	Frequency Hopping
Type of Modulation	GFSK(1 Mbps), DQPSK(2 Mbps), 8-DPSK(3 Mbps)
Power Source	DC 5 V (Power from USB)

1.1 Tested Frequency

	LOW	MID	HIGH
Frequency (MHz)	2402	2441	2480

1.2 Tested Mode

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Modulation Technology	Modulation Type	Packet Type
FHSS	GFSK	DH 5
FHSS	8-DPSK	3DH 5
	Technology FHSS	Technology FHSS GFSK

Test Report No.: CTK-2014-00673 Page 4 of 54



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501 www.e-ctk.com

1.3 Device Modifications

The following modifications was applied by the applicant:

Not applicable

1.4 Peripheral Devices

Device	Manufacturer	Model No.	Serial No.
Note Computer	DELL INC.	Inspiron 6400	-
Switching Adapter2	DDongguang Lite Power 2nd Plant	LA65NS0-00	-

1.5 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less. All test equipment calibrations are traceable to the Korea Research Institute of Standards and Science (KRISS), therefore, all test data recorded in this report is traceable to KRISS.

1.6 Test Facility

The measurement facility is located at (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea. The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

Test Report No.: CTK-2014-00673 Page 5 of 54



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501 www.e-ctk.com

Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation Logo	
USA	FCC	3 m & 10 m SAC and Conducted Test Site to perform FCC Part 15/18 measurements	FC 805871
JAPAN	VCCI	3 m & 10 m SAC and Conducted Test Site R-948, C-986	
KOREA	ксс	EMI (10 m SAC and Conducted Test Site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and Interruptions)	No. 51, KR0025
International	KOLAS	EMC	KOLAS PROPERTING NO. 119 BILLION

Test Report No.: CTK-2014-00673 Page 6 of 54



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501 www.e-ctk.com

2.0 Summary of tests

FCC Part Section(s)	Parameter	Limit	Test Condition	Status (note 1)
15.247(a)	Carrier Frequency Separation	> 25 kHz		С
15.247(a)	Number of Hopping Frequencies	> 15 hops		С
15.247(a)	20 dB Bandwidth	NA		С
15.247	Dwell Time	< 0.4 seconds	Conducted	С
15.247(b)	Transmitter Output Power	< 0.125 Watts		С
15.247(d)	Conducted Spurious emission	> 20 dBc		С
15.247(d)	Band Edge	> 20 dBc		С
15.209	Field Strength of Harmonics	15.209(a)	Radiated	С
15.207	AC Conducted Emissions	15.207(a)	Line Conducted	С

<u>Note 1</u>: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: The data in this test report are traceable to the national or international standards.

The sample was tested according to the following specification:

- FCC Part 15.247, ANSI C63.4-2003

The tests were performed according to the method of measurements prescribed in DA 00-705.

Test Report No.: CTK-2014-00673 Page 7 of 54



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501 www.e-ctk.com

2.1 Transmitter Requirements

2.1.1 Carrier Frequency Separation

Test Location

RF Test Room

Test Procedures

The carrier frequency separation was measured with a spectrum analyzer connected to the antenna terminal, while EUT has its hopping function enabled.

After the trace being stable, the reading value between the peaks of the adjacent channels using the marker-delta function was recorded as the measurement results.

The spectrum analyzer is set to:

Span = 3 MHz (wide enough to capture the peaks of two adjacent channels)

RBW = 30 kHz (\geq 1% of the span) Sweep = auto

 $VBW = 30 \text{ kHz} \ (\geq RBW)$ Detector function = peak

Trace = max hold



Figure 1: Measurement setup for the carrier frequency separation

Limit

§15.247(a)(1) Frequency hopping system operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-third of 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Results

Test mode: GFSK, CFG PKT Packet Type: 15 Packet Size: 339(DH5)

rest mode : di sit, ei d i ki i deket i y		ype i is i acket sizi			
		Adjacent Hopping	Two-third of 20dB	Minimum	
	Channel	Channel Separation	bandwidth	Bandwidth	Result
		(kHz)	(kHz)	(kHz)	
	2441MHz	1010	551.1	25	Complies

Test mode: 8-DPSK, CFG PKT Packet Type: 31 Packet Size: 1021(3DH5)

. cot illoue i c	Di Dity C. C. itt i deket	. ypc . o = . acket o.	(55.	,
Channel	Adjacent Hopping Channel Separation (kHz)	Two-third of 20dB bandwidth (kHz)	Minimum Bandwidth (kHz)	Result
2441MHz	1005	824.7	25	Complies

See next pages for actual measured spectrum plots.


Test Report No.: CTK-2014-00673 Page 8 of 54



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501 www.e-ctk.com

Carrier Frequency Separation

Data Rate: GFSK

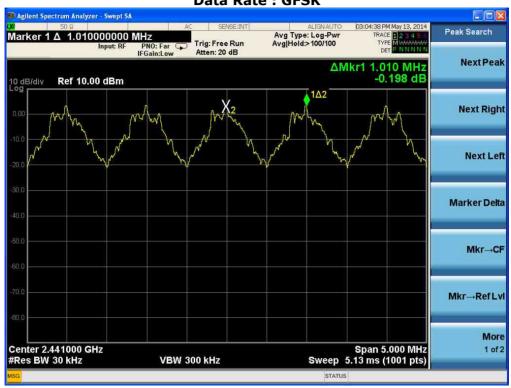

Data Rate: 8-DPSK



Test Report No.: CTK-2014-00673 Page 9 of 54



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501 www.e-ctk.com

2.1.2 Number of Hopping Frequencies

Test Location

RF Test Room

Test Procedures

The number of hopping frequencies was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

The spectrum analyzer is set to:

Frequency range 1: Start = 2389.5 MHz, Stop = 2439.5 MHz


2: Start = 2439.5 MHz, Stop = 2489.5 MHz

Span = 50 MHz

RBW = 300 kHz (\geq 1% of the span) Sweep = auto

VBW = 300 kHz (≥ RBW) Detector function = peak

Trace = max hold



Limit

§15.247(a)(1)(iii) For frequency hopping system operating in the 2400-2483.5 MHz band shall use at least 15 hopping frequencies.

Test Results

Test mode: GFSK, CFG PKT Packet Type: 15 Packet Size: 339(DH5)

Total number of Hopping Channels	Result
79	Complies

Test mode: 8-DPSK, CFG PKT Packet Type: 31 Packet Size: 1021(3DH5)

Total number of Hopping Channels	Result
79	Complies

See next pages for actual measured spectrum plots.

Test Report No.: CTK-2014-00673 Page 10 of 54



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501 www.e-ctk.com

Number of Hopping Frequencies(GFSK)






Test Report No.: CTK-2014-00673 Page 11 of 54



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501 www.e-ctk.com

Number of Hopping Frequencies(8-DPSK)

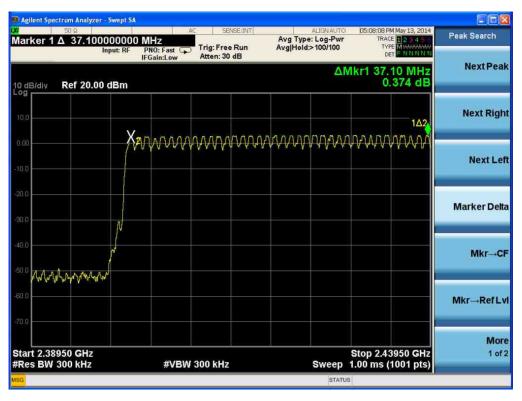



Test Report No.: CTK-2014-00673 Page 12 of 54

Date: 2014-06-09

Form No.: CTK-RF-EF-Part15 SubpartC(Rev.2)



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501 www.e-ctk.com

2.1.3 20 dB bandwidth

Test Location

RF Test Room

Test Procedures

The bandwidth at 20 dB below the highest inband spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels. After the trace being stable, Use the marker-to peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels Span = 2 MHz (approximately 2 or 3 times of the 20 dB bandwidth)

RBW = 30 kHz (\geq 1% of the span) Sweep = auto

VBW = 30 kHz (≥ RBW) Detector function = peak

Trace = max hold

EUT Spectrum Analyzer

Limit

Limit: N/A

Test Report No.: CTK-2014-00673 Page 13 of 54 Date: 2014-06-09



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501 www.e-ctk.com

Test Results (20 dB bandwidth)

Test mode: GFSK, CFG PKT Packet Type: 15 Packet Size: 339(DH5)

		,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,		
Frequency (MHz)	Channel Number.	Measured Bandwidth (MHz)	Result	
2402	0	0.827	Complies	
2441	39	0.802	Complies	
2480	78	0.826	Complies	

Test mode: 8-DPSK, CFG PKT Packet Type: 31 Packet Size: 1021(3DH5)

1000 0 0	, o. o ao	, p	<u> () </u>
Frequency (MHz)	Channel Number.	Measured Bandwidth (MHz)	Result
2402	0	1.237	Complies
2441	39	1.228	Complies
2480	78	1.230	Complies

Test Results (Occupied Bandwidth)

Test mode: GFSK, CFG PKT Packet Type: 15 Packet Size: 339(DH5)

1 000 mode 1 01 014, 01 0 1 111 1 uchet 1 ,		, pe : == : acket =:= : == (=:=)		
Frequency (MHz)	Channel Number.	Measured Bandwidth (MHz)	Result	
2402	0	0.850	Complies	
2441	39	0.845	Complies	
2480	78	0.851	Complies	

Test mode: 8-DPSK, CFG PKT Packet Type: 31 Packet Size: 1021(3DH5)

Frequency (MHz)	Channel Number.	Measured Bandwidth (MHz)	Result
2402	0	1.151	Complies
2441	39	1.153	Complies
2480	78	1.149	Complies

See next pages for actual measured spectrum plots.

Test Report No.: CTK-2014-00673 Page 14 of 54



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501 www.e-ctk.com

20 dB Bandwidth, Occupied Bandwidth - GFSK





Test Report No.: CTK-2014-00673 Page 15 of 54



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501 www.e-ctk.com




Test Report No.: CTK-2014-00673 Page 16 of 54



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501 www.e-ctk.com

20 dB Bandwidth, Occupied Bandwidth - 8-DPSK



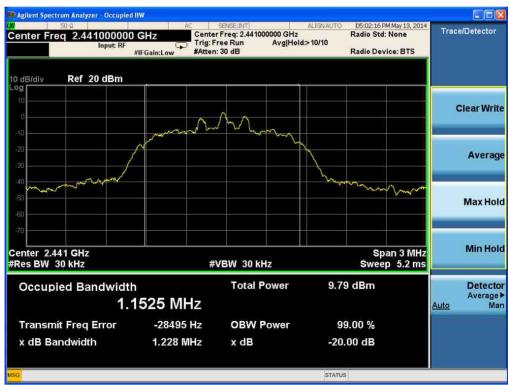


Test Report No.: CTK-2014-00673 Page 17 of 54

Date: 2014-06-09

Form No.: CTK-RF-EF-Part15 SubpartC(Rev.2)



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501 www.e-ctk.com

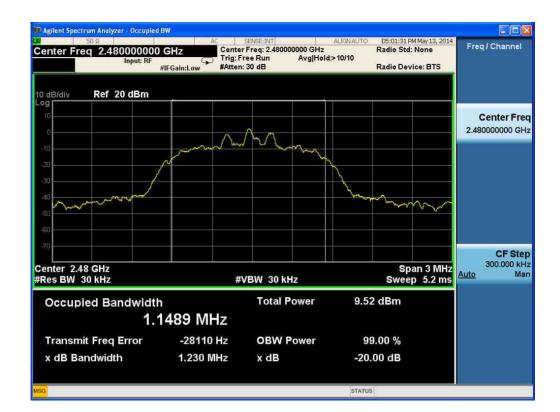

Test Report No.: CTK-2014-00673 Page 18 of 54



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501 www.e-ctk.com

2.1.4 Time of Occupancy (Dwell Time)

Test Location

RF Test Room

Test Procedures

The dwell time was measured with a spectrum analyzer connected to the antenna terminal, while EUT has its hopping function enabled.

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Position the EUT as shown in test setup without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- 3. Adjust the center frequency of spectrum analyzer on any frequency be measured and set spectrum analyzer to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- 4. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- 5. Repeat above procedures until all frequencies measured were complete.
- 6. The CMIT-BT200 has 3 type of payload, DH1, DH3, DH5. The hopping rate is 1600 per second.

The spectrum analyzer is set to:


Center frequency = the highest, middle, and the lowest channels

Span = zero

RBW = 1 MHz Trace = max hold

 $VBW = 1 MHz (\ge RBW)$ Detector function = peak

Sweep = as necessary to capture the entire dwell time per hopping channel



Limit

§15.247(a)(1)(iii) For frequency hopping system operating in 2400-2483.5 MHz band, the average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

Test Report No.: CTK-2014-00673 Page 19 of 54



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501 www.e-ctk.com

Test Results

Time of occupancy on the TX channel in 31.6 sec = time domain slot length \times hop rate \div number of hop per channel \times 31.6

Test mode: GFSK

	1000 11010 1 01010					
Channel Frequency (MHz)	Packet Type	Dwell Time (ms)	Test Results			
			Time of occupancy on the TX channel in 31.6sec (ms)	Result		
	DH 1	0.435	139.2	Complies		
2441	DH 3	1.690	270.4	Complies		
	DH 5	2.935	313.1	Complies		

DH1 Dwell time = 0.435 ms \times (1600÷2) \div 79 \times 31.6 = 139.2 ms DH3 Dwell time = 1.690 ms \times (1600÷4) \div 79 \times 31.6 = 270.4 ms DH5 Dwell time = 2.935 ms \times (1600÷6) \div 79 \times 31.6 = 313.1 ms

Test mode: 8-DPSK

1001 111040 1 0 21 012					
Channel Frequency (MHz)	Packet Type	Dwell Time (ms)	Test Results		
			Time of occupancy on the TX channel in 31.6sec (ms)	Result	
	3DH 1	0.450	144.0	Complies	
2441	3DH 3	1.700	272.0	Complies	
	3DH 5	2.940	313.6	Complies	

3DH1 Dwell time = 0.450 ms \times (1600÷2) \div 79 \times 31.6 = 144.0 ms 3DH3 Dwell time = 1.700 ms \times (1600÷4) \div 79 \times 31.6 = 272.0 ms 3DH5 Dwell time = 2.940 ms \times (1600÷6) \div 79 \times 31.6 = 313.6 ms


See next pages for actual measured spectrum plots.

Test Report No.: CTK-2014-00673 Page 20 of 54




(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501 www.e-ctk.com

Time of Occupancy for PACKET Type DH1(GFSK)

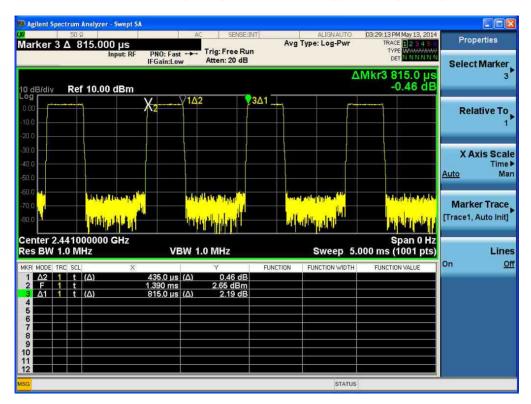

Time of Occupancy for PACKET Type DH3(GFSK)

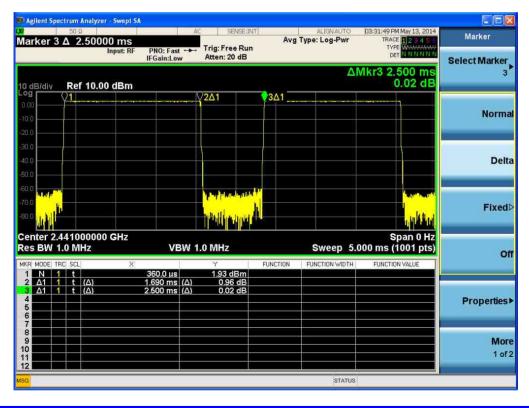


Test Report No.: CTK-2014-00673 Page 21 of 54



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501 www.e-ctk.com

Time of Occupancy for PACKET Type DH5(GFSK)

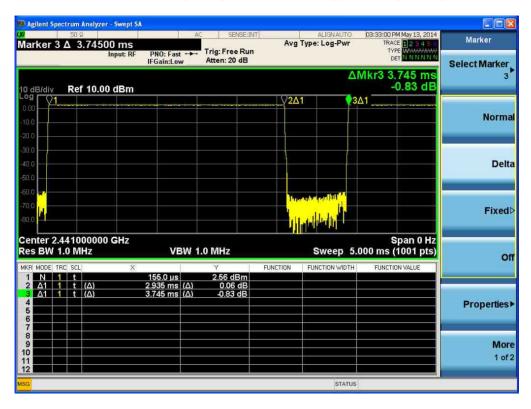


Test Report No.: CTK-2014-00673 Page 22 of 54




(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501 www.e-ctk.com

Time of Occupancy for PACKET Type 3DH1(8-DPSK)

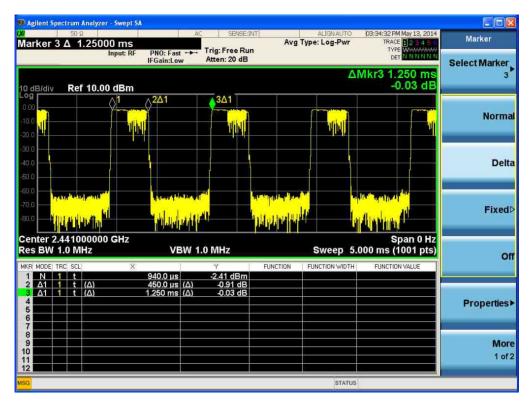

Time of Occupancy for PACKET Type 3DH3(8-DPSK)

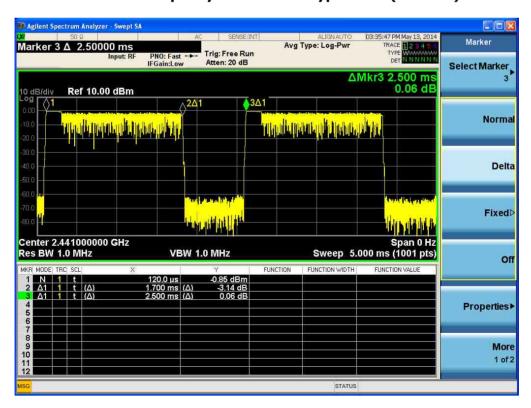

Test Report No.: CTK-2014-00673 Page 23 of 54


Date: 2014-06-09

Form No.: CTK-RF-EF-Part15 SubpartC(Rev.2)



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501 www.e-ctk.com

Time of Occupancy for PACKET Type 3DH5(8-DPSK)

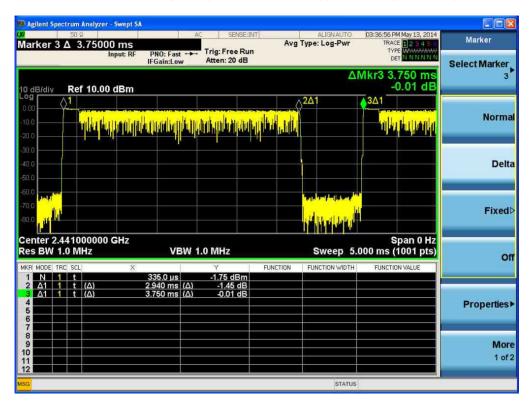

Test Report No.: CTK-2014-00673 Page 24 of 54



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501 www.e-ctk.com

2.1.5 Maximum peak Conducted Output Power

Test Location

RF Test Room

Test Procedures

The maximum peak conducted output power was measured with a spectrum analyzer connected to the antenna terminal, while EUT has its hopping function disabled at the highest, middle and the lowest available channels.

The spectrum analyzer is set to:


Center frequency = the highest, middle, and the lowest channels

Span = 5 MHz (approximately 5 times of the 20 dB bandwidth)

RBW = 1 MHz (greater than the 20 dB bandwidth of the emission being measured)

 $VBW = 1 MHz (\ge RBW)$ Detector function = peak

Trace = \max hold Sweep = auto



Limit

§5.247(b)(1) The Maximum Peak Output Power Measurement is 0.125 Watts for frequency hopping system operating in 2400-2483.5 MHz employing at least 15 Hopping channels.

Test Results

Test mode: GFSK, CFG PKT Packet Type: 15 Packet Size: 339(DH5)

Frequency (MHz)	Channel No.	Peak output power(dBm)	Peak output power(mW)	Result
2402	0	3.463	2.220	Complies
2441	39	3.864	2.434	Complies
2480	78	3.600	2.291	Complies

Test mode: 8-DPSK, CFG PKT Packet Type: 31 Packet Size: 1021(3DH5)

Frequency (MHz)	Channel No.	Peak output power(dBm)	Peak output power(mW)	Result
2402	0	3.363	2.169	Complies
2441	39	4.250	2.661	Complies
2480	78	3.785	2.391	Complies

See next pages for actual measured spectrum plots.

Test Report No.: CTK-2014-00673 Page 25 of 54



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501 www.e-ctk.com

Maximum peak Conducted Output Power - GFSK





Test Report No.: CTK-2014-00673 Page 26 of 54

Date: 2014-06-09

Form No.: CTK-RF-EF-Part15 SubpartC(Rev.2)



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501 www.e-ctk.com



Test Report No.: CTK-2014-00673 Page 27 of 54



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501 www.e-ctk.com

Maximum peak Conducted Output Power - 8-DPSK





Test Report No.: CTK-2014-00673 Page 28 of 54

Date: 2014-06-09

Form No.: CTK-RF-EF-Part15 SubpartC(Rev.2)



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501 www.e-ctk.com



Test Report No.: CTK-2014-00673 Page 29 of 54



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501 www.e-ctk.com

2.1.6 Band-edge

Test Location

RF Test Room

Test Procedures

The bandwidth at 20 dB down from the highest inband spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT has its hopping function disabled at the highest, middle and the lowest available channels.

The spectrum analyzer is set to:


Center frequency = the highest, middle, and the lowest channels

RBW = 100 kHz

 $VBW = 100 \text{ kHz} (\geq RBW)$

Span = 10 MHz Detector function = peak

Trace = \max hold Sweep = auto



Limit

> 20 dBc

Test Results

All conducted emission in any 100 kHz bandwidth outside of the spectrum band was at least 20 dB lower than the highest level of the inband spectral density. Therefore the applying equipment meets the requirement.

See next pages for actual measured spectrum plots.

Test Report No.: CTK-2014-00673 Page 30 of 54



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501 www.e-ctk.com

Band - edge (with Hopping) - GFSK





Test Report No.: CTK-2014-00673 Page 31 of 54



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501 www.e-ctk.com

Band - edge (without Hopping) - GFSK





Test Report No.: CTK-2014-00673 Page 32 of 54

Date: 2014-06-09

Form No.: CTK-RF-EF-Part15 SubpartC(Rev.2)



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501 www.e-ctk.com

Band - edge (with Hopping) - 8-DPSK





Test Report No.: CTK-2014-00673 Page 33 of 54



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501 www.e-ctk.com

Band - edge (without Hopping) - 8-DPSK





Test Report No.: CTK-2014-00673 Page 34 of 54

Date: 2014-06-09

Form No.: CTK-RF-EF-Part15 SubpartC(Rev.2)



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501 www.e-ctk.com

> Band – edge (at 20 dB blow) – Low channel Frequency Range = 30 MHz \sim 10th harmonic (GFSK : Worst-Case)






Test Report No.: CTK-2014-00673 Page 35 of 54



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501 www.e-ctk.com

> Band – edge (at 20 dB blow) – Mid channel Frequency Range = 30 MHz $\sim 10^{th}$ harmonic (GFSK: Worst-Case)

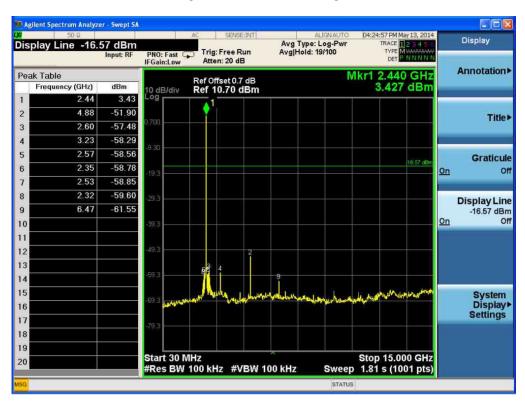



Test Report No.: CTK-2014-00673 Page 36 of 54



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501 www.e-ctk.com

> Band – edge (at 20 dB blow) – High channel Frequency Range = 30 MHz ~ 10th harmonic (GFSK : Worst-Case)







Test Report No.: CTK-2014-00673 Page 37 of 54



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501 www.e-ctk.com

> Band – edge (at 20 dB blow) – Low channel Frequency Range = 30 MHz $\sim 10^{th}$ harmonic (8-DPSK : Worst-Case)

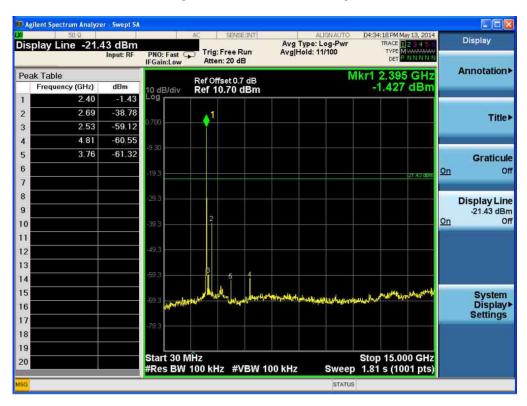

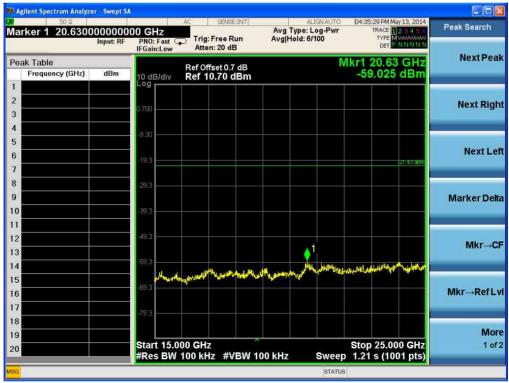


Test Report No.: CTK-2014-00673 Page 38 of 54



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501 www.e-ctk.com

> Band – edge (at 20 dB blow) – Mid channel Frequency Range = 30 MHz $\sim 10^{th}$ harmonic (8-DPSK : Worst-Case)

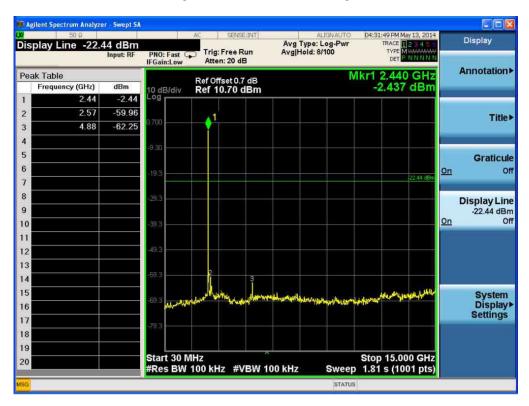



Test Report No.: CTK-2014-00673 Page 39 of 54



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501 www.e-ctk.com

> Band – edge (at 20 dB blow) – High channel Frequency Range = 30 MHz ~ 10th harmonic (8-DPSK : Worst-Case)





Test Report No.: CTK-2014-00673 Page 40 of 54



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501 www.e-ctk.com

2.1.7 Field Strength of Emissions

Test Location

 \boxtimes 10 m SAC (test distance : \square 10 m, \boxtimes 3 m)

 \boxtimes 3 m SAC (test distance : 3 m)

Test Procedures

- 1) In the frequency range of 9 kHz to 30 MHz, magnetic field is measured with Loop Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- 2) In the frequency rage above 30 MHz, Bi-Log Test Antenna(30 MHz to 1 GHz) and Horn Test Antenna(above 1 GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is carried from 1m to 4m above the ground to determine the maximum value of the field strength. The emissions levels at both horizontal and vertical polarizations should be tested.

The spectrum analyzer is set to:

Frequency Range = 9 kHz \sim 25 GHz (2.4 GHz 10^{th} harmonic) RBW = 1 MHz for f \geq 1 GHz, 100 kHz for f < 1 GHz, 9 kHz for f < 30 MHz VBW \geq RBW Sweep = auto

Limit

- 15.209(a)

Frequency(MHz)	Field Strength uV/m@3m	Field Strength dBuV/m@3m	Deasurement Distance (meters)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705-30	30	-	30
30-88	100**	40	3
88-216	150**	43.5	3
216-960	200**	46	3
Above 960	500	54	3

^{**} Except as provided in 15.209(g).fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72MHz, 76-88MHz, 174-216MHz, 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g.15.231 and 15.241.

Note:

- For above 1 GHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.
- 2) For above 1 GHz, limit field strength of harmonics : 54 dBuV/m@3m (AV) and 74 dBuV/m@3m (PK)


Test Report No.: CTK-2014-00673 Page 41 of 54




(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501 www.e-ctk.com

Test Setup:

1) For field strength of emissions from 9 kHz to 30 MHz

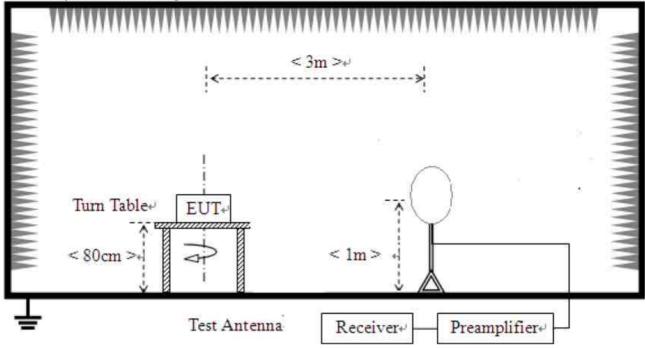

2) For field strength of emissions from 30 MHz to 1 GHz

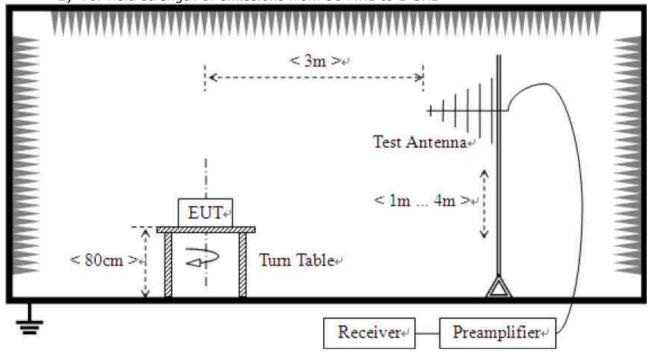

Test Report No.: CTK-2014-00673

Date: 2014-06-09


This Report shall not be reproduced except in full without the written approval of CTK

Form No.: CTK-RF-EF-Part15 SubpartC(Rev.2)



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501 www.e-ctk.com

3) For field strength of emissions above 1 GHz

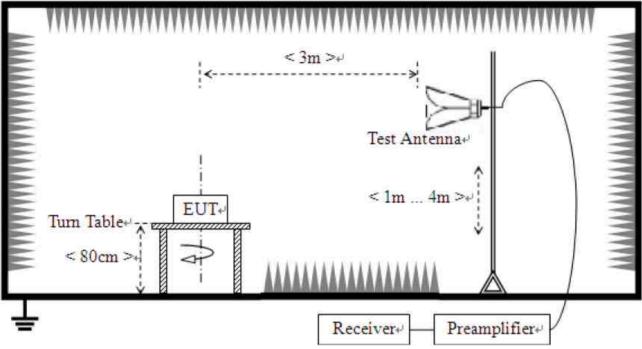

Test Results 1) 9 kHz to 30 MHz

Test mode: GFSK, CFG PKT Packet Type: 15 Packet Size: 339(DH5)
Test mode: 8-DPSK, CFG PKT Packet Type: 31 Packet Size: 1021(3DH5)

EUT	Bluetooth USB Dongle	Measurement Detail	-
Model	CMIT-BT200	Frequency Range	9 kHz – 30 MHz
Test mode	GFSK, 8-DPSK	Detector function	Quasi-Peak

The requirements are:

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
-	-	-	See note

Note:

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor = 40 log (specific distance / test distance) (dB)

Test Report No.: CTK-2014-00673 Page 43 of 54



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501 www.e-ctk.com


2) 30 MHz to 1 GHz

Test mode: GFSK, CFG PKT Packet Type: 15 Packet Size: 339(DH5)

EUT	Bluetooth USB Dongle	Measurement Detail			
Model	CMIT-BT200	Frequency Range	Below 1000MHz		
Test mode	GFSK	Detector function	Quasi-Peak / Peak		

The requirements are:

Frequency	Measured Data	Margin	Remark				
(MHz)	(dBuV/m)	(dB)					
No emissions were detected at a level greater than 20dB below limit.							

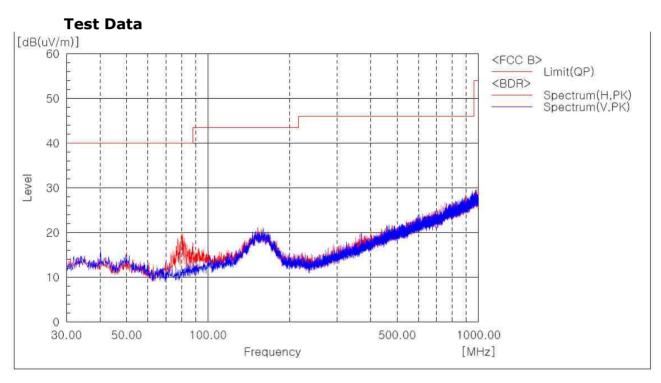

Final Result
No. Frequency (P)

c.f Height Angle

[MHz] [dB(1/m)] [cm] [deg]

Remark:

1. The field strength of spurious emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(X axis) and the worst case was recorded.

Test Report No.: CTK-2014-00673 Page 44 of 54




(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501 www.e-ctk.com

Test mode: 8-DPSK, CFG PKT Packet Type: 31 Packet Size: 1021(3DH5)

EUT	Bluetooth USB Dongle	Measurement Detail	
Model	CMIT-BT200	Frequency Range	Below 1000MHz
Test mode	8-DPSK	Detector function	Quasi-Peak / Peak

The requirements are:

	Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark	
No emissions were detected at a level greater than 20dB below limit.					

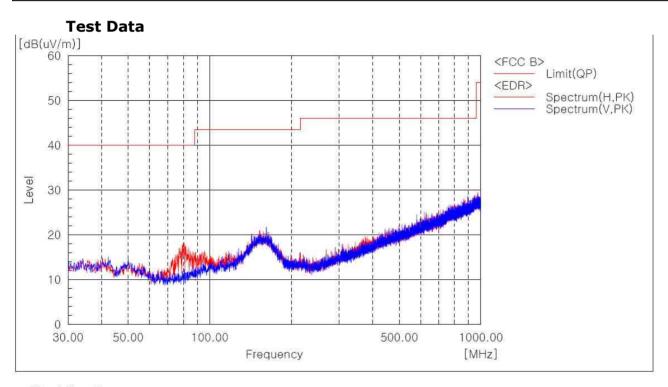

Final Result No. Frequency (P) c.f Height Angle [MHz] [dB(1/m)] [cm] [deg]

Remark:

1. The field strength of spurious emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(X axis) and the worst case was recorded.

Test Report No.: CTK-2014-00673 Page 45 of 54



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501 www.e-ctk.com

3) above 1 GHz

Test mode: GFSK, CFG PKT Packet Type: 15 Packet Size: 339(DH5)

EUT	Bluetooth USB Dongle	Measurement Detail		
Model	CMIT-BT200	Frequency Range	1-25GHz	
		Detector function	Average / Peak	

Remarks

We have tested three mode (X, Y, Z). The worst mode (X axis) for final test.

The requirements are:

□ Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
2485.7	43.28	10.72	Average

Test Data

Ch.0(Low Channel)

Frequency	Reading [dBuV/m]	Pol.	Correction Factor [dB]		Limits [dBuV/m]	Result [dBuV/m]	Margin [dB]
[MHz]	AV/Peak		Ant	CL+Amp	AV / Peak	AV / Peak	AV / Peak

No emissions were detected at a level greater than 20dB below limit.

Ch.39(Mid Channel)

Frequenc	Reading		Correction Factor [dB]		Limits	Result	Margin
riequenc	[dBuV/m]	Pol.			[dBuV/m]	[dBuV/m]	[dB]
[MHz]	AV/Peak		Ant	CL+Amp	AV / Peak	AV / Peak	AV / Peak

No emissions were detected at a level greater than 20dB below limit.

Ch.78(High Channel)

Frequency Reading			Correction Factor		Limits	Result	Margin
Frequency	[dBuV/m]	Pol.	[dB]		[dBuV/m]	[dBuV/m]	[dB]
[MHz]	AV/Peak		Ant	CL+Amp	AV / Peak	AV / Peak	AV / Peak

No emissions were detected at a level greater than 20dB below limit.

Restricted band edge test data

Measured frequency range: 2310-2390 MHz, 2483.5-2500 MHz

	Frequency	[dBuV/m] Pol. [dB]		Limits [dBuV/m]		Result [dBuV/m]		Margin [dB]			
l	[MHz]	AV/Peak		Ant	CL+Amp	AV /	Peak	AV ,	/ Peak	AV /	Peak
ſ	2485.70	35.10 49.40	Н	32.00	-23.82	54.00	74.00	43.28	57.58	10.72	16.42
	2485.70	28.80 41.40	V	32.00	-23.82	54.00	74.00	36.98	49.58	17.02	24.42

Test Report No.: CTK-2014-00673 Page 46 of 54

Date: 2014-06-09

This Report shall not be reproduced except in full without the written approval of CTK

Form No.: CTK-RF-EF-Part15 SubpartC(Rev.2)



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501 www.e-ctk.com

Test mode: 8-DPSK, CFG PKT Packet Type: 31 Packet Size: 1021(3DH5)

EUT	Bluetooth USB Dongle	Measurement Detail	
Model	CMIT RT200	Frequency Range	1-25GHz
Model	CMIT-BT200	Detector function	Average / Peak

Remarks

We have tested three mode (X, Y, Z). The worst mode (X axis) for final test.

The requirements are:

Frequency	Measured Data	Margin	Remark
(MHz)	(dBuV/m)	(dB)	
2483.5	44.08	9.92	Average

Test Data

Ch.0(Low Channel)

ĺ		Reading		Correctio	n Factor	Limits	Result	Margin
ı	Frequency	[dBuV/m]	Pol.	[dE	3]	[dBuV/m]	[dBuV/m]	[dB]
Į	[MHz]	AV/Peak		Ant	CL+Amp	AV / Peak	AV / Peak	AV / Peak

No emissions were detected at a level greater than 20dB below limit.

Ch.39(Mid Channel)

Eroguenev	Reading		Correctio	n Factor	Limits	Result	Margin
Frequency	[dBuV/m]	Pol.	[dE	3]	[dBuV/m]	[dBuV/m]	[dB]
[MHz]	AV/Peak		Ant	CL+Amp	AV / Peak	AV / Peak	AV / Peak

No emissions were detected at a level greater than 20dB below limit.

Ch.78(High Channel)

Frequency	Reading		Correctio	n Factor	Limits	Result	Margin
requericy	[dBuV/m]	Pol.	[di	3]	[dBuV/m]	[dBuV/m]	[dB]
[MHz]	AV/Peak		Ant	CL+Amp	AV / Peak	AV / Peak	AV / Peak

No emissions were detected at a level greater than 20dB below limit.

Restricted band edge test data

Measured frequency range: 2310-2390 MHz, 2483.5-2500 MHz

Frequency	Reading [dBuV/m]	Pol.	Correctio [dl		Limits [dBuV/m]	Result [dBuV/m]	Margin [dB]
[MHz]	AV/Peak		Ant	CL+Amp	AV / Peak	AV / Peak	AV / Peak
2483.50	35.90 51.60	Н	32.00	-23.82	54.00 74.00	44.08 59.78	9.92 14.22
2483.50	29.70 43.40	V	32.00	-23.82	54.00 74.00	37.88 51.58	16.12 22.42

Test Report No.: CTK-2014-00673 Page 47 of 54



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501 www.e-ctk.com

Test Results 1) 9 kHz to 30 MHz

Test mode: Receiver

EUT	Bluetooth USB Dongle	Measurement Detail	
Model	CMIT-BT200	Frequency Range	9 kHz – 30 MHz
Test mode	Receiver	Detector function	Quasi-Peak

The requirements are:

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
-	-	-	See note

Note:

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor = 40 log (specific distance / test distance) (dB)

Test Report No.: CTK-2014-00673 Page 48 of 54



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501 www.e-ctk.com


2) 30 MHz to 1 GHz

Test mode: Receiver

EUT	Bluetooth USB Dongle	Measurement Detail	
Model	CMIT-BT200	Frequency Range	Below 1000MHz
Test mode	Receiver	Detector function	Quasi-Peak / Peak

The requirements are:

_	□ complics			
	Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
		were detected at a		20dB below limit.

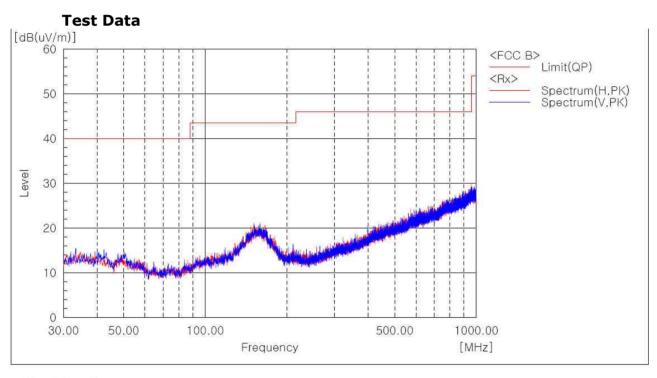

Final Result

No. Frequency (P) c.f Height Angle
[MHz] [dB(1/m)] [cm] [deg]

Remark:

1. The field strength of spurious emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(X axis) and the worst case was recorded.

Test Report No.: CTK-2014-00673 Page 49 of 54



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501 www.e-ctk.com

3) above 1 GHz

Test mode: Receiver

EUT	Bluetooth USB Dongle	Measurement Detail	
Model	CMIT RT200	Frequency Range	1-25GHz
Model	CMIT-BT200	Detector function	Average / Peak

Remarks

We have tested three mode (X, Y, Z). The worst mode (X axis) for final test.

The requirements are:

□ Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
No emissions	were detected at a	level greater than	20dB below limit.

Test Data

Ch.0(Low Channel)

Frequency	Reading [dBuV/m]	Pol.	Correctio [di		Limits [dBuV/m]	Result [dBuV/m]	Margin [dB]
[MHz]	AV/Peak		Ant	CL+Amp	AV / Peak	AV / Peak	AV / Peak

No emissions were detected at a level greater than 20dB below limit.

Ch.39(Mid Channel)

Frequenc	Reading		Correctio	n Factor	Limits	Result	Margin
riequenc	[dBuV/m]	Pol.	Pol. [dB]		[dBuV/m]	[dBuV/m]	[dB]
[MHz]	AV/Peak		Ant	CL+Amp	AV / Peak	AV / Peak	AV / Peak

No emissions were detected at a level greater than 20dB below limit.

Ch.78(High Channel)

Frequency	Reading		Correctio	n Factor	Limits	Result	Margin
Frequency	[dBuV/m]	Pol.	[di	3]	[dBuV/m]	[dBuV/m]	[dB]
[MHz]	AV/Peak		Ant	CL+Amp	AV / Peak	AV / Peak	AV / Peak

No emissions were detected at a level greater than 20dB below limit.

Restricted band edge test data

Measured frequency range: 2310-2390 MHz, 2483.5-2500 MHz

Eroguanav	Reading		Correctio	n Factor	Limits	Result	Margin
Frequency	[dBuV/m]	Pol.	[dB]		[dBuV/m]	[dBuV/m]	[dB]
[MHz]	AV/Peak		Ant	CL+Amp	AV / Peak	AV / Peak	AV / Peak

No emissions were detected at a level greater than 20dB below limit.

Test Report No.: CTK-2014-00673 Page 50 of 54



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501

2.1.8 AC Conducted Emissions

Test Location

Shielded Room

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Procedures

The EUT was placed on a non-metallic table 0.8m above the metallic, grounded floor and 0.4m from the reference ground plane wall. The distance to other metallic surfaces was at least 0.8m.

Amplitude measurements were performed with a quasi-peak detector and an average detector.

Limit

<u>- 15.207(a</u>)

Frequency	Conducted Limit (dBuV)					
(MHz)	Quasi-peak	Average				
0.15 ~ 0.5	66 to 56*	56 to 46*				
0.5 ~ 5	56	46				
5 ~ 30	60	50				

^{*} Decreases with the logarithm of the frequency.

Test Results

The requirements are:

Test mode: USB Charge, AC Adaptor Charge

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
0.15	60.5	5.5	Quasi-Peak


Test Report No.: CTK-2014-00673 Page 51 of 54



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501 www.e-ctk.com

Test Data

[HOT] CISPR 22 Class B_L1

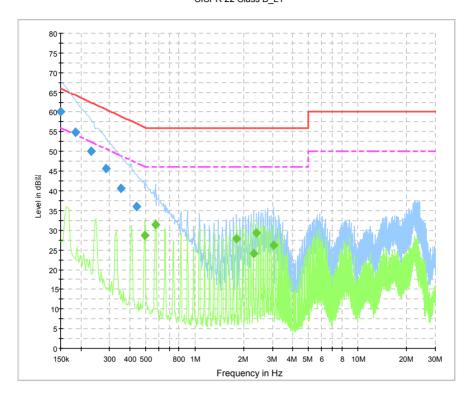

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	60.1	1000.0	9.000	On	L1	10.0	5.9	66.0
0.186000	54.8	1000.0	9.000	On	L1	10.1	9.4	64.2
0.231000	50.0	1000.0	9.000	On	L1	9.9	12.4	62.4
0.285000	45.6	1000.0	9.000	On	L1	10.0	15.1	60.7
0.352500	40.6	1000.0	9.000	On	L1	10.1	18.3	58.9
0.438000	36.0	1000.0	9.000	On	L1	10.1	21.1	57.1

Final Result 2

Frequency (MHz)	CAverage (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.492000	28.7	1000.0	9.000	On	L1	10.2	17.4	46.1
0.573000	31.4	1000.0	9.000	On	L1	10.1	14.6	46.0
1.806000	27.8	1000.0	9.000	On	L1	9.9	18.2	46.0
2.296500	24.0	1000.0	9.000	On	L1	9.9	22.0	46.0
2.382000	29.2	1000.0	9.000	On	L1	9.8	16.8	46.0
3.039000	26.2	1000.0	9.000	On	L1	9.8	19.8	46.0


Test Report No.: CTK-2014-00673 Page 52 of 54



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501 www.e-ctk.com

[NEUTRAL]

CISPR 22 Class B_N

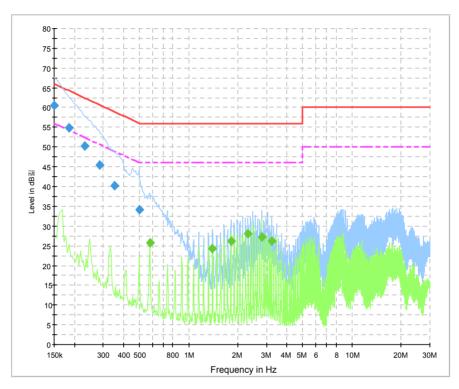

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	60.5	1000.0	9.000	On	N	9.7	5.5	66.0
0.186000	55.0	1000.0	9.000	On	N	10.1	9.2	64.2
0.231000	50.3	1000.0	9.000	On	N	10.0	12.1	62.4
0.285000	45.4	1000.0	9.000	On	N	10.1	15.3	60.7
0.352500	40.3	1000.0	9.000	On	N	10.1	18.6	58.9
0.496500	34.2	1000.0	9.000	On	N	10.2	21.8	56.1

Final Result 2

Frequency (MHz)	CAverage (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.577500	25.7	1000.0	9.000	On	N	10.1	20.3	46.0
1.401000	24.3	1000.0	9.000	On	N	9.9	21.7	46.0
1.815000	26.2	1000.0	9.000	On	N	9.9	19.8	46.0
2.310000	28.0	1000.0	9.000	On	N	9.9	18.0	46.0
2.805000	27.2	1000.0	9.000	On	N	9.9	18.8	46.0
3.219000	26.2	1000.0	9.000	On	N	9.9	19.8	46.0

Test Report No.: CTK-2014-00673



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501 www.e-ctk.com

APPENDIX A – Test Equipment Used For Tests

	Name of Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Signal Analyzer	Agilent	N9020A	MY48011598	2013-11-08	2014-11-08
2	Spectrum Analyzer	Rohde & Schwarz	FSP-30	100994	2013-11-08	2014-11-08
3	EMI Test Receiver	Rohde & Schwarz	ESCI7	100814	2013-12-06	2014-12-06
4	EMI Test Receiver	Rohde & Schwarz	ESCI7	100816	2013-12-06	2014-12-06
5	Trilog Broadband Antenna	SCHWARZBECK	VULB 9161 SE	9161-4133	2012-06-11	2014-06-11
6	Active Loop Antenna	SCHWARZBECK	FMZB 1513	1513-126	2014-05-19	2016-05-19
7	Attenuator	HP	8498A	1801A06913	2013-11-12	2014-11-12
8	EPM Series Power Meter	HP	E4418A	GB38272734	2013-11-08	2014-11-08
9	Power Sensor	HP	8487A	3318A03524	2014-05-15	2015-05-15
10	Audio Analyzer	HP	8903B	2747A03432	2013-11-08	2014-11-08
11	ESG-D Series Signal Generator	Agilent	E4432B	US40054094	2013-11-08	2014-11-08
12	SYNTHESIZED SWEEPER	HP	8341B	2819A01563	2013-11-08	2014-11-08
13	Attenuator	HP	8494A	3308A33351	2013-11-12	2014-11-12
14	Temp&Humi Chamber	Kunpoong	JT-TH-556-1	9QE5-002	2014-01-16	2015-01-16
15	DC POWER SUPPLY	Agilent	E3632A	MY40011638	2013-11-08	2014-11-08
16	Horn Antenna	ETS-Lindgren	3115	00078895	2013-02-28	2015-02-28
17	Horn Antenna	ETS-Lindgren	3115	00078894	2013-05-13	2015-05-13
18	Horn Antenna	ETS-Lindgren	3116	00062916	2013-03-20	2015-03-20
19	Horn Antenna	ETS-Lindgren	3116	00062504	2013-05-27	2015-05-27
20	Horn Antenna	ETS-Lindgren	3117	00154525	2013-07-03	2015-07-03
21	OPT H64 AMPLIFIER	HP	8447F	3113A06814	2014-03-20	2015-03-20
22	PREAMPLIFIER	Agilent	8449B	3008A02307	2013-11-08	2014-11-08
23	Radio Communication Tester	Rohde & Schwarz	CMU200	106765	2014-02-06	2015-02-06
24	LISN	Rohde & Schwarz	ENV216	101235	2013-08-02	2014-08-02
25	LISN	Rohde & Schwarz	ENV216	101236	2013-08-02	2014-08-02
26	LISN	Rohde & Schwarz	ENV216	101151	2013-11-08	2014-11-08
27	DC POWER SUPPLY	Agilent	E3632A	MY40011638	2013-11-08	2014-11-08
28	EMI Test Receiver	Rohde & Schwarz	ESCI3	100032	2014-02-04	2015-02-04
29	6dB Attenuator	R&S	DNF	272.4110.50	2013-11-12	2014-11-12
30	AMPLIFIER	Sonoma Instrument Co.	310	291721	2014-02-06	2015-02-26
31	EMI Test Receiver	Rohde & Schwarz	ESU40	100336	2014-05-15	2015-05-15
32	Signal Generator	Rohde & Schwarz	SMBV100A	258008	2013-09-07	2014-09-07

Test Report No.: CTK-2014-00673 Page 54 of 54

Date: 2014-06-09

This Report shall not be reproduced except in full without the written approval of CTK

Form No.: CTK-RF-EF-Part15 SubpartC(Rev.2)