



FCC REPORT

Report Reference No..... : TRE1404000801 R/C.....: 26547
FCC ID..... : 2AB9CT722G
Applicant's name..... : EVOLUCION TECNOLOGICA ETL S.A.
Address..... : ULTIMA PARK #8 SAN JOSE COST RICA
Manufacturer..... : KAYVE GROUP LIMITED
Address..... : 8 Connaught Place, Central, Hong Kong
Test item description : Tablet pc
Trade Mark : ZIF
Model/Type reference..... : T722G
List Model : /
Standard : **FCC Part 22: PUBLIC MOBILE SERVICES**
FCC Part 24: PERSONAL COMMUNICATIONS SERVICES
Date of receipt of test sample..... : Apr 03 2014
Date of testing..... : Apr 03 2014 ~ Apr 23 2014
Date of issue..... : Apr 24 2014
Result..... : **Pass**

Compiled by
(position+printed name+signature)...: File administrators Jerome Luo

Jerome Luo

Supervised by
(position+printed name+signature)...: Test Engineer Yuchao Wang

yuchao.wang

Approved by
(position+printed name+signature)...: Manager Hans Hu

Hans Hu

Testing Laboratory Name : Shenzhen Huatongwei International Inspection Co., Ltd

Address..... : Keji Nan No.12 Road, Hi-tech Park, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Contents

<u>1.</u>	<u>TEST STANDARDS AND TEST DESCRIPTION</u>	<u>3</u>
1.1.	Test Standards	3
1.2.	Test Description	3
<u>2.</u>	<u>SUMMARY</u>	<u>4</u>
2.1.	Client Information	4
2.2.	Product Description	4
2.3.	EUT operation mode	5
2.4.	EUT configuration	5
2.5.	Modifications	5
<u>3.</u>	<u>TEST ENVIRONMENT</u>	<u>6</u>
3.1.	Address of the test laboratory	6
3.2.	Test Facility	6
3.3.	Environmental conditions	7
3.4.	Statement of the measurement uncertainty	7
3.5.	Equipments Used during the Test	8
<u>4.</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>9</u>
4.1.	Conducted Emissions Test	9
4.2.	Conducted Peak Output Power	12
4.3.	Occupy Bandwidth	13
4.4.	Out of band emission at antenna terminals	22
4.5.	Band Edge compliance	33
4.6.	Radiated Power Measurement	38
4.7.	Radiated Spurious Emssion	41
4.8.	Frequency stability V.S. Temperature measurement	47
4.9.	Frequency stability V.S. Temperature measurement	49
<u>5.</u>	<u>TEST SETUP PHOTOS OF THE EUT</u>	<u>50</u>
<u>6.</u>	<u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u>	<u>51</u>

1. TEST STANDARDS AND TEST DESCRIPTION

1.1. Test Standards

The tests were performed according to following standards:

[FCC Part 22 \(10-1-13 Edition\)](#): PRIVATE LAND MOBILE RADIO SERVICES.

[FCC Part 24\(10-1-13 Edition\)](#): PUBLIC MOBILE SERVICES

[TIA/EIA 603 D June 2010](#): Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

[47 CFR FCC Part 15 Subpart B](#): - Unintentional Radiators

[FCC Part 2](#): FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS

[KDB971168 D01:2013-06-07](#) Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems

[ANSI C63.4:2009](#) Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

1.2. Test Description

Test Item	Section in CFR 47	Result
AC Power Conducted Emission	Part 15.207	Pass
RF Output Power	Part 2.1046 Part 22.913 (a)(2) Part 24.232 (c)	Pass
Modulation Characteristics	Part 2.1047	Pass
99% & -26 dB Occupied Bandwidth	Part 2.1049 Part 22.917 Part 24.238	Pass
Spurious Emissions at Antenna Terminal	Part 2.1051 Part 22.917 (a) Part 24.238 (a)	Pass
Field Strength of Spurious Radiation	Part 2.1053 Part 22.917 (a) Part 24.238 (a)	Pass
Out of band emission, Band Edge	Part 22.917 (a) Part 24.238 (a)	Pass
Frequency stability vs. temperature	Part 2.1055(a)(1)(b)	Pass
Frequency stability vs. voltage	Part 2.1055(d)(1)(2)	Pass

Remark: The measurement uncertainty is not included in the test result.

2. SUMMARY

2.1. Client Information

Applicant:	EVOLUCION TECNOLOGICA ETL S.A.
Address:	ULTIMA PARK #8 SAN JOSE COST RICA
Manufacturer:	KAYVE GROUP LIMITED
Address:	8 Connaught Place, Central, Hong Kong

2.2. Product Description

Name of EUT	Tablet pc
Trade Mark:	ZIF
Model No.:	T722G
List Model:	/
Power supply:	DC 3.7V for lithium battery
Adapter information:	Model No.:THX-050200KKU Input: AC 100~240V, 50/60Hz, 0.65A Output: DC 5.0V 2A
2G:	
Support Network:	GSM, GPRS, EGPRS
Support Band:	GSM850, DCS1900
Modulation:	GSM/GPRS: GMSK EGPRS: GMSK
Transmit Frequency:	GSM850: 824.20MHz-848.80MHz PCS1900: 1850.20MHz-1909.80MHz
Receive Frequency:	GSM850: 869.20MHz-893.80MHz PCS1900: 1930.20MHz-1989.80MHz
GPRS Class:	12
EGPRS Class:	12
Antenna type:	Intergal Antenna
Antenna gain:	-0.50dBi
Software version:	MT83X2_MR706_MR7063H1Z2W1.2014041016
Hardware version:	ELINK_MR706_D3_V6
3G:	
Operation Band:	FDD Band II and FDD Band V
Power Class:	Power Class 3
Modulation Type:	QPSK for WCDMA/HSUPA/HSDPA
WCDMA Release Version:	R7
HSDPA Release Version:	Release 10
HSUPA Release Version:	Release 6
DC-HSUPA Release Version:	Not Supported
Antenna type:	Intergal Antenna
Antenna gain:	-0.50dBi
Hardware version:	ELINK_MR706_D3_V6
Software version:	MT83X2_MR706_MR7063H1Z2W1.2014041016

Test Frequency:

GSM 850		PCS1900	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
128	824.20	512	1850.20
190	836.60	661	1880.00
251	848.80	810	1909.80

FDD Band II		FDD Band V	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
9262	1852.4	4132	826.40
9400	1880.0	4182	836.60
9538	1907.6	4233	846.60

2.3. EUT operation mode

The EUT has been tested under typical operating condition. The Applicant provides software to control the EUT for staying in continuous transmitting and receiving mode for testing.

2.4. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

☐	Power Cable	Length (m) :	/
☐		Shield :	/
☐		Detachable :	/
☐	Multimeter	Manufacturer :	/
☐		Model No. :	/

2.5. Modifications

No modifications were implemented to meet testing criteria.

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Test Laboratory: Shenzhen Huatongwei International Inspection Co., Ltd
Address: Keji Nan No.12 Road, Hi-tech Park, Shenzhen, China
Phone: 86-755-26715686 Fax: 86-755-26748089

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories, Date of Registration: Mar. 29, 2012. Valid time is until Feb. 28, 2015.

A2LA-Lab Cert. No. 2243.01

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing. Valid time is until Sept. 30, 2013.

FCC-Registration No.: 662850

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 662850, Renewal date June. 01, 2012, valid time is until June. 01, 2015.

IC-Registration No.: 5377A

The 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 5377A on Jan. 25, 2011, valid time is until Jan. 24, 2014.

ACA

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

VCCI

The 3m Semi-anechoic chamber (12.2m×7.95m×6.7m) and Shielded Room (8m×4m×3m) of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-292. Date of Registration: Dec. 24, 2010. Valid time is until Dec. 23, 2013.

Main Ports Conducted Interference Measurement of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: C-2726. Date of Registration: Dec. 20, 2012. Valid time is until Dec. 19, 2015.

Telecommunication Ports Conducted Interference Measurement of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: T-1837. Date of Registration: May 07, 2013. Valid time is until May 06, 2016.

DNV

Shenzhen Huatongwei International Inspection Co., Ltd. has been found to comply with the requirements of DNV towards subcontractor of EMC and safety testing services in conjunction with the EMC and Low voltage Directives and in the voluntary field. The acceptance is based on a formal quality Audit and follow-ups according to relevant parts of ISO/IEC Guide 17025 (2005), in accordance with the requirements of the DNV Laboratory Quality Manual towards subcontractors. Valid time is until Aug. 24, 2016.

3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature/Tnor:	15~35°C
Relative Humidity	30~60 %
Air Pressure	950-1050 hPa

3.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report according to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd quality system according to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Huatongwei laboratory is reported:

Test Items	Measurement Uncertainty	Notes
Frequency stability	25 Hz	(1)
Transmitter power conducted	0.57 dB	(1)
Transmitter power Radiated	2.20 dB	(1)
Conducted spurious emission 9KHz-12.75 GHz	1.60 dB	(1)
Conducted Emission 9KHz-30MHz	3.39 dB	(1)
Radiated Emission 30~1000MHz	4.24 dB	(1)
Radiated Emission 1~18GHz	5.16 dB	(1)
Radiated Emission 18-40GHz	5.54 dB	(1)
Occupied Bandwidth	-----	(1)
Emission Mask	-----	(1)
Modulation Characteristic	-----	(1)
Transmitter Frequency Behavior	-----	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

3.5. Equipments Used during the Test

AC Power Conducted Emission					
No.	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Artificial Mains	Rohde&Schwarz	ESH2-Z5	100028	2013/10/26
2	EMI Test Receiver	Rohde&Schwarz	ESCS 30	100038	2013/10/26
3	Pulse Limiter	Rohde&Schwarz	ESHSZ2	100044	2013/10/26
4	EMI Test Software	Rohde&Schwarz	ES-K1 V1.71	N/A	N/
5	UNIVERSAL RADIO COMMUNICATION	Rohde&Schwarz	CMU200	112012	2013/10/26

Output Power(Conducted) & Occupied Bandwidth & Emission Bandwidth & Band Edge Compliance & Conducted Spurious Emission					
No.	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	UNIVERSAL RADIO COMMUNICATION	Rohde&Schwarz	CMU200	112012	2013/10/26
2	Spectrum Analyzer	Rohde&Schwarz	FSU26	201141	2013/10/26
3	Splitter	Mini-Circuit	ZAPD-4	400059	2013/10/26

Frequency Stability					
No.	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	UNIVERSAL RADIO COMMUNICATION	Rohde&Schwarz	CMU200	112012	2013/10/26
2	Spectrum Analyzer	Rohde&Schwarz	FSU26	201141	2013/10/26
3	Climate Chamber	ESPEC	EL-10KA	05107008	2013/10/26
4	Splitter	Mini-Circuit	ZAPD-4	400059	2013/10/26

Output Power (Radiated) & Radiated Spurious Emission					
No.	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	UNIVERSAL RADIO COMMUNICATION	Rohde&Schwarz	CMU200	112012	2013/10/26
2	Spectrum Analyzer	Rohde&Schwarz	FSU26	201141	2013/10/26
3	HORN ANTENNA	ShwarzBeck	9120D	1012	2013/10/26
4	HORN ANTENNA	ShwarzBeck	9120D	1011	2013/10/26
5	Ultra-Broadband Antenna	ShwarzBeck	VULB9163	538	2013/10/26
6	Ultra-Broadband Antenna	ShwarzBeck	VULB9163	539	2013/10/26
7	TURNTABLE	MATURO	TT2.0	----	N/A
8	ANTENNA MAST	MATURO	TAM-4.0-P	----	N/A
9	EMI Test Software	Audix	E3	N/A	N/A
10	EMI Test Receiver	Rohde&Schwarz	ESIB 26	100009	2013/10/26
11	RF Test Panel	Rohde&Schwarz	TS / RSP	335015/ 0017	N/A
12	High pass filter	Compliance Direction systems	BSU-6	34202	2013/10/26
13	Splitter	Mini-Circuit	ZAPD-4	400059	2013/10/26
14	Horn Antenna	SCHWARZBECK	BBHA9170	25841	2013/10/26
15	Horn Antenna	SCHWARZBECK	BBHA9170	25842	2013/10/26
16	Preamplifier	ShwarzBeck	BBV 9718	BBV 9718	2013/10/26
17	Broadband Preamplifier	ShwarzBeck	BBV743	9743-0079	2013/10/26
18	Signal Generator	Rohde&Schwarz	SMF100A	101932	2013/10/26
19	Amplifier	Compliance Direction systems	PAP1-4060	120	2013/10/26
20	TURNTABLE	ETS	2088	2149	N/A
21	ANTENNA MAST	ETS	2075	2346	N/A
22	HORN ANTENNA	Rohde&Schwarz	HF906	100068	2013/10/26
23	HORN ANTENNA	Rohde&Schwarz	HF906	100039	2013/10/26

The calibration interval was one year.

4. TEST CONDITIONS AND RESULTS


4.1. Conducted Emissions Test

LIMIT:

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreasing linearly with the logarithm of the frequency

TEST CONFIGURATION

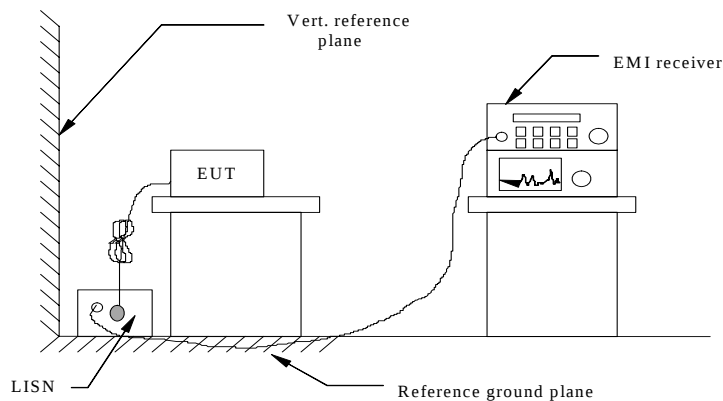

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4-2009.
- 2 Support equipment, if needed, was placed as per ANSI C63.4-2009.
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4-2009.
- 4 If a EUT received DC power from the adapter, the adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

TEST RESULTS


Note: We tested all modes and recorded the worst case at GSM900

GSM850

Test mode:	GSM900	Polarization	L
------------	--------	--------------	---

SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description: 150K-30M Voltage

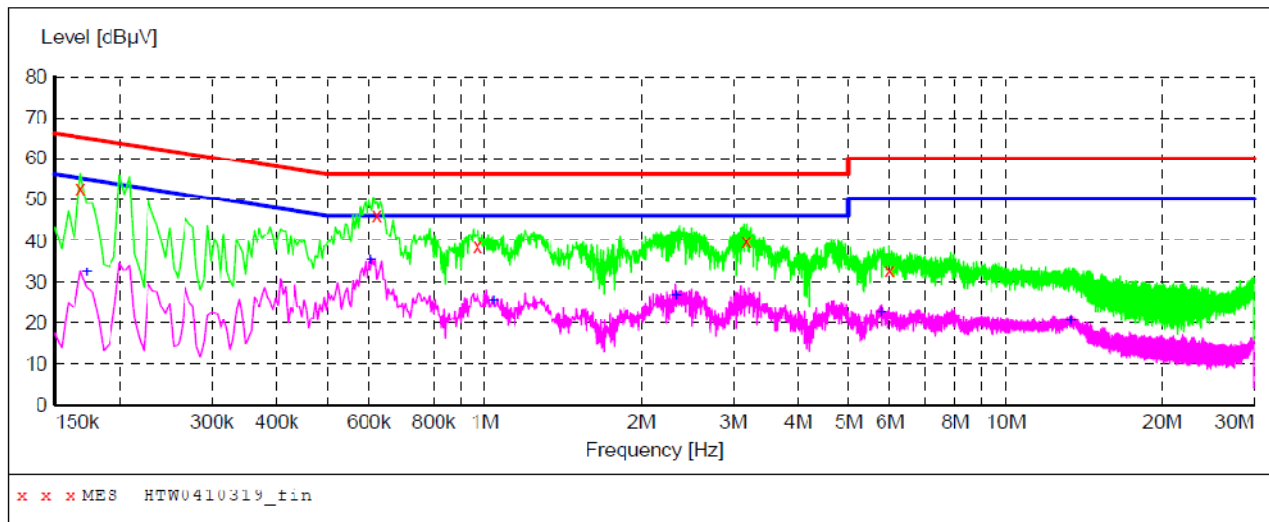**MEASUREMENT RESULT: "HTW0410319_fin"**

4/10/2014 3:45PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.160000	52.70	10.3	65.1	12.4	QP	L1	GND
0.622500	46.20	10.3	56.0	9.8	QP	L1	GND
0.969000	38.50	10.2	56.0	17.5	QP	L1	GND
3.187500	39.80	10.3	56.0	16.2	QP	L1	GND
5.995500	32.90	10.3	60.0	27.1	QP	L1	GND

MEASUREMENT RESULT: "HTW0410319_fin2"


4/10/2014 3:45PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.172500	32.20	10.3	54.8	22.6	AV	L1	GND
0.604500	35.30	10.3	46.0	10.7	AV	L1	GND
1.041000	25.50	10.3	46.0	20.5	AV	L1	GND
2.332500	26.50	10.3	46.0	19.5	AV	L1	GND
5.766000	22.30	10.3	50.0	27.7	AV	L1	GND
13.339500	20.40	10.7	50.0	29.6	AV	L1	GND

Test mode:	GSM900	Polarization	N
------------	--------	--------------	---

SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description: 150K-30M Voltage

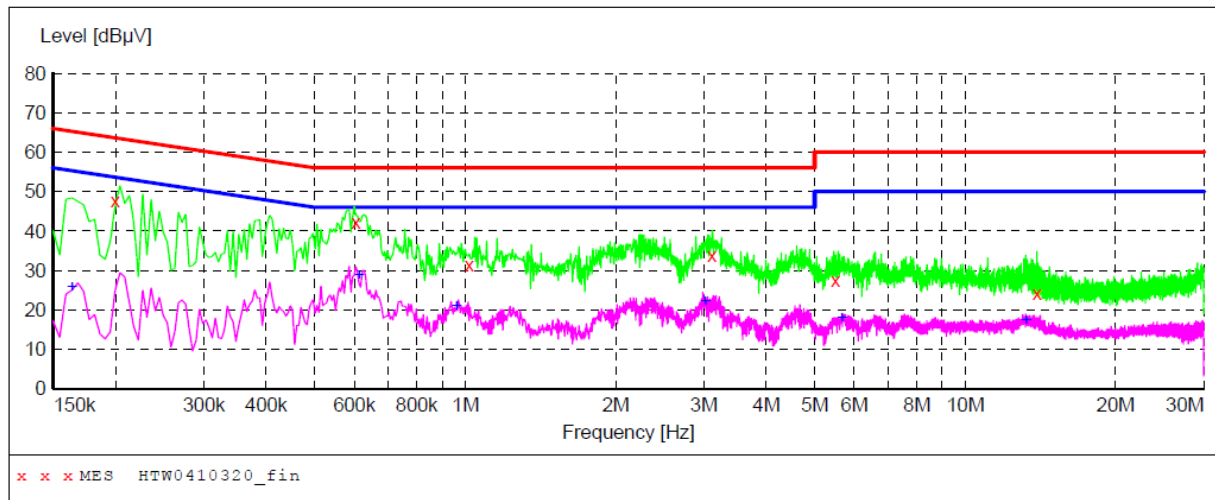**MEASUREMENT RESULT: "HTW0410320_fin"**

4/10/2014 3:49PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.199500	47.70	10.4	63.6	15.9	QP	N	GND
0.604500	42.30	10.3	56.0	13.7	QP	N	GND
1.018500	31.30	10.3	56.0	24.7	QP	N	GND
3.111000	33.80	10.3	56.0	22.2	QP	N	GND
5.500500	27.60	10.3	60.0	32.4	QP	N	GND
13.915500	24.20	10.7	60.0	35.8	QP	N	GND

MEASUREMENT RESULT: "HTW0410320_fin2"

4/10/2014 3:49PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.163500	25.70	10.3	55.3	29.6	AV	N	GND
0.613500	28.70	10.3	46.0	17.3	AV	N	GND
0.960000	20.90	10.2	46.0	25.1	AV	N	GND
3.021000	22.00	10.3	46.0	24.0	AV	N	GND
5.662500	17.80	10.3	50.0	32.2	AV	N	GND
13.218000	17.40	10.7	50.0	32.6	AV	N	GND


4.2. Conducted Peak Output Power

LIMIT:

GSM850/WCDMA Band V: 7W

PCS1900/WCDMA Band II: 2W

TEST CONFIGURATION

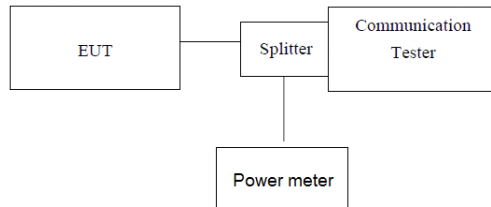

Note: Measurement setup for testing on Antenna connector

TEST PROCEDURE


1. The transmitter output port was connected to base station.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator, the path loss was compensated to the results for each measurement.
3. Set EUT at maximum power through base station.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure the maximum burst average power.

TEST RESULTS

EUT Mode	Channel	Frequency (MHz)	PK power (dBm)	Limit (dBm)	Result
GSM 850 (GMSK)	128	824.20	32.15	38.45	Pass
	190	836.60	32.00		
	251	848.80	32.02		
GPRS850 (GMSK,1Slot)	128	824.20	32.16	38.45	Pass
	190	836.60	32.01		
	251	848.80	32.04		
EGPRS850 (GMSK,1Slot)	128	824.20	32.10	38.45	Pass
	190	836.60	31.95		
	251	848.80	31.95		
PCS1900 (GMSK)	512	1850.20	29.71	33.01	Pass
	661	1880.00	30.21		
	810	1909.80	30.61		
GPRS1900 (GMSK,1Slot)	512	1850.20	29.72	33.01	Pass
	661	1880.00	30.25		
	810	1909.80	30.65		
EGPRS1900 (GMSK,1Slot)	512	1850.20	29.65	33.01	Pass
	661	1880.00	30.19		
	810	1909.80	30.55		
WCDMA Band II	9262	1852.40	23.82	33.01	Pass
	9400	1880.00	23.76		
	9538	1907.60	23.99		
WCDMA Band V	4132	826.40	23.86	38.45	Pass
	4183	836.60	24.34		
	4233	846.60	24.30		

4.3. Occupy Bandwidth

TEST CONFIGURATION

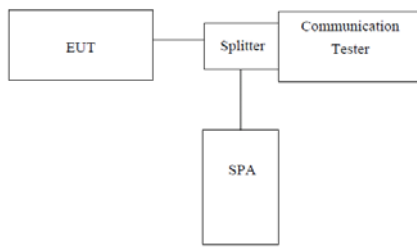

Note: Measurement setup for testing on Antenna connector

TEST PROCEDURE


1. The EUT's output RF connector was connected with a short cable to the spectrum analyzer
2. RBW was set to about 1% of emission BW, VBW= 3 times RBW.
3. -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

TEST RESULTS


EUT Mode	Channel	Frequency (MHz)	99% Occupy bandwidth (KHz)	-26dB bandwidth (KHz)
GSM 850 (GMSK)	128	824.20	245.19	313.30
	190	836.60	248.40	310.10
	251	848.80	242.79	313.30
GPRS850 (GMSK,1Slot)	128	824.20	242.79	305.29
	190	836.60	247.60	307.70
	251	848.80	245.19	316.50
EGPRS850 (GMSK,1Slot)	128	824.20	244.39	311.70
	190	836.60	244.39	314.10
	251	848.80	242.79	314.90
PCS1900 (GMSK)	512	1850.20	242.79	314.10
	661	1880.00	244.39	317.30
	810	1909.80	247.60	310.90
GPRS1900 (GMSK,1Slot)	512	1850.20	245.19	317.31
	661	1880.00	245.99	315.71
	810	1909.80	244.39	315.71
EGPRS1900 (GMSK,1Slot)	512	1850.20	245.19	318.11
	661	1880.00	246.79	312.50
	810	1909.80	247.60	313.30
WCDMA Band II	9262	1852.4	4166.67	4679.49
	9400	1880.0	4166.67	4695.51
	9538	1907.6	4182.69	4695.51
WCDMA Band V	4132	826.4	4150.64	4679.49
	4183	836.6	4150.64	4647.44
	4233	846.6	4150.64	4663.46

GSM850 For GMSK Moudlation


99% Occupy bandwidth

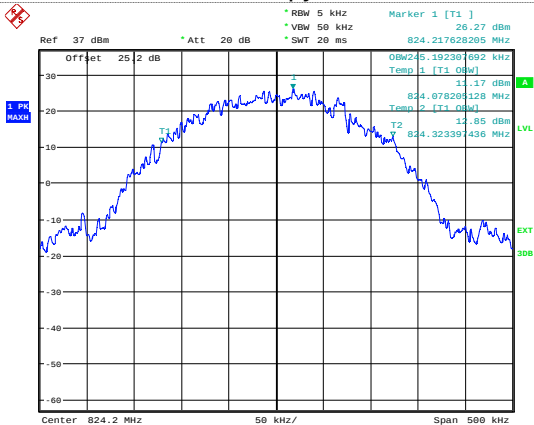


-26dB bandwidth

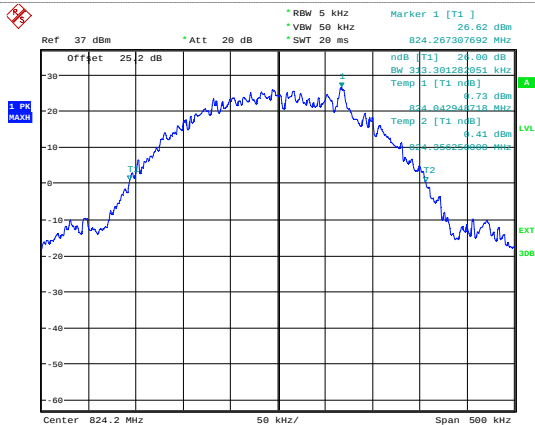


Channel 128

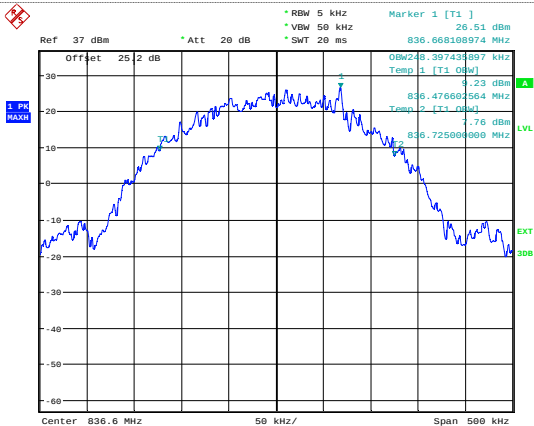


Channel 128

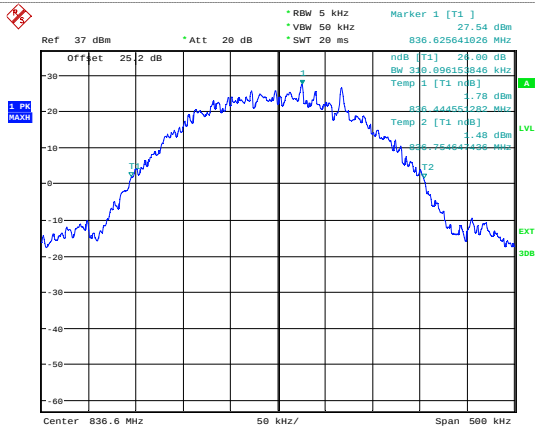

Channel 190

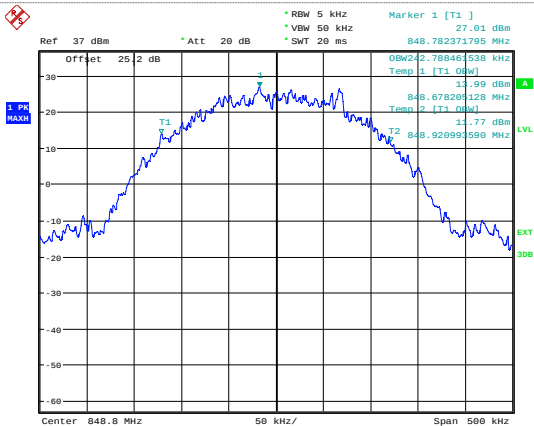

Channel 190

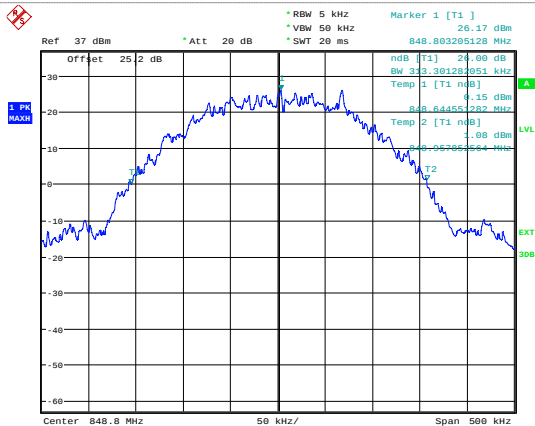


Channel 251


Channel 251

GPRS850 For GMSK Moudlation


99% Occupy bandwidth

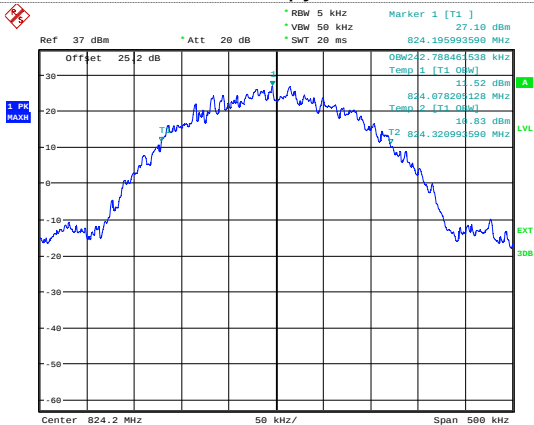


-26dB bandwidth

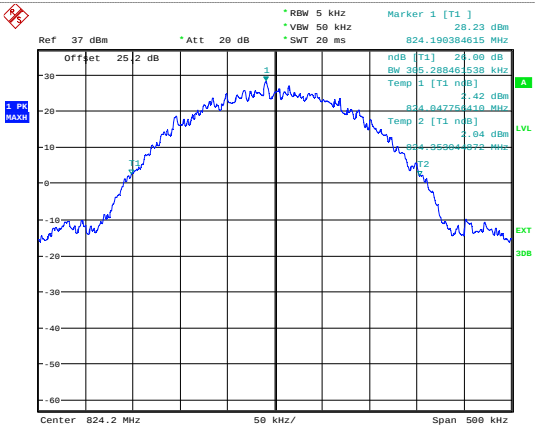


Channel 128

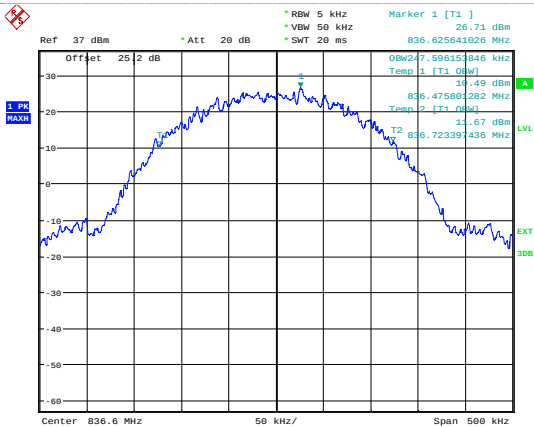


Channel 128

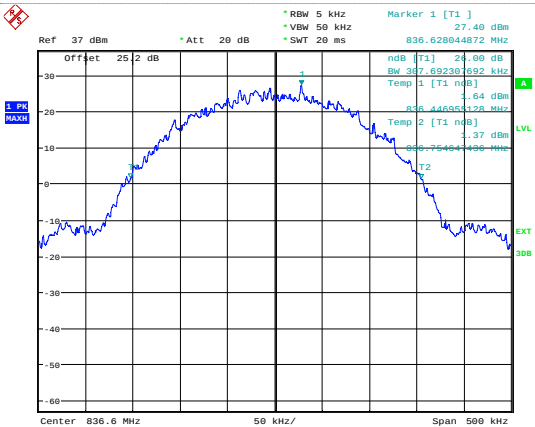

Channel 190

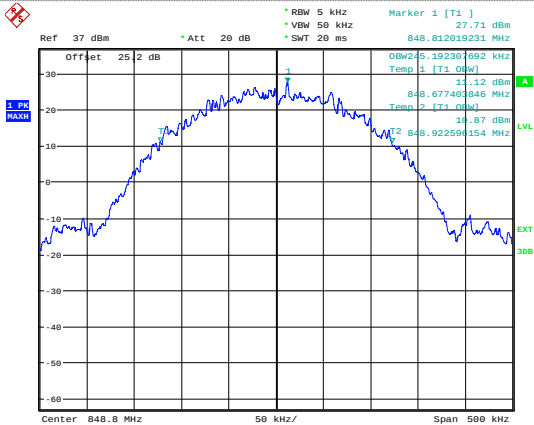

Channel 190

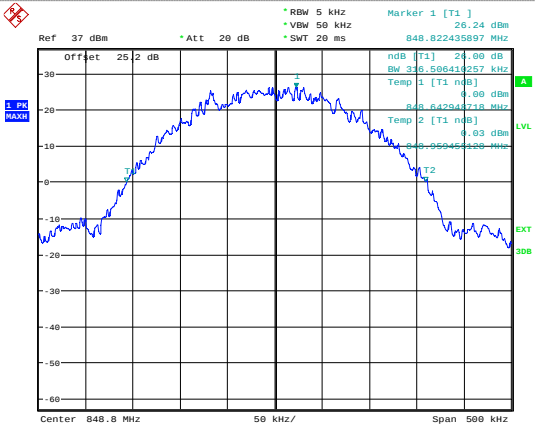


Channel 251


Channel 251

EGPRS850 For GMSK Moudlation

99% Occupy bandwidth

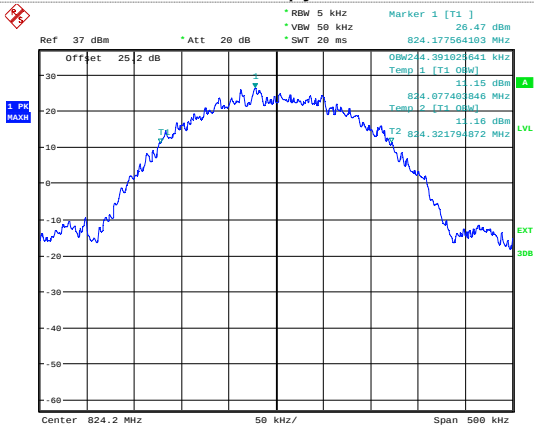


-26dB bandwidth

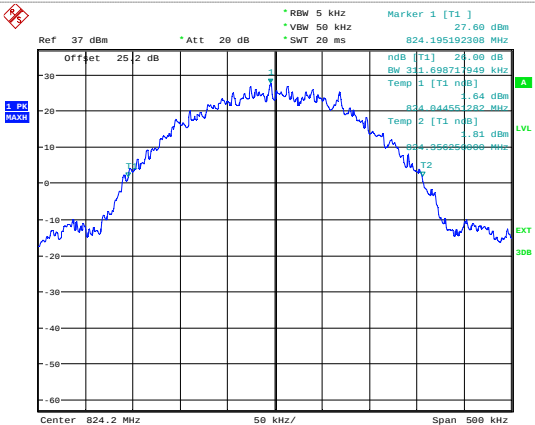


Date: 10.DEC.2013 14:01:26


Channel 128

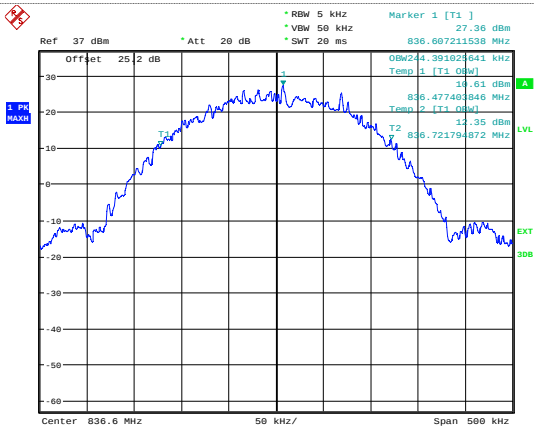


Channel 128

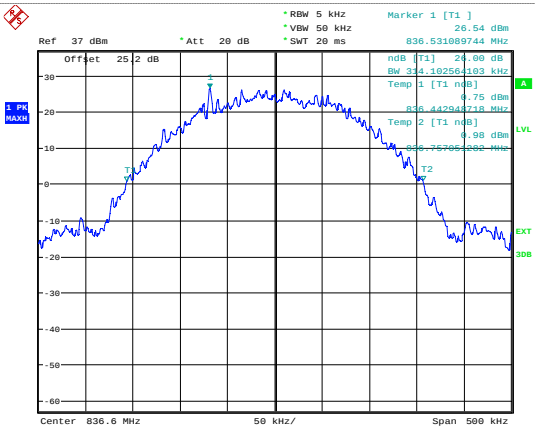

Channel 190

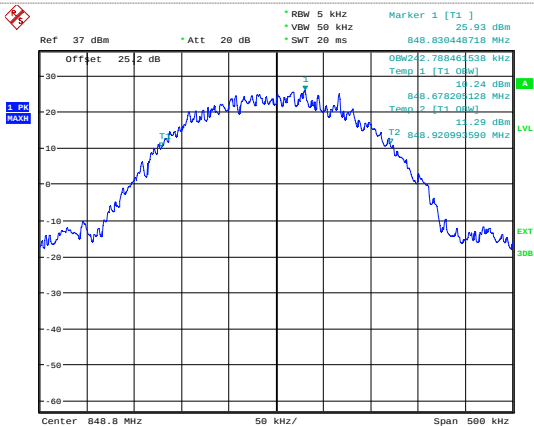

Channel 190

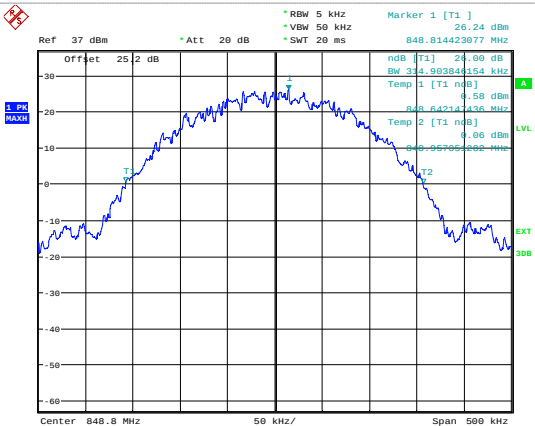


Channel 251


Channel 251

PCS1900 For GMSK Moudlation


99% Occupy bandwidth

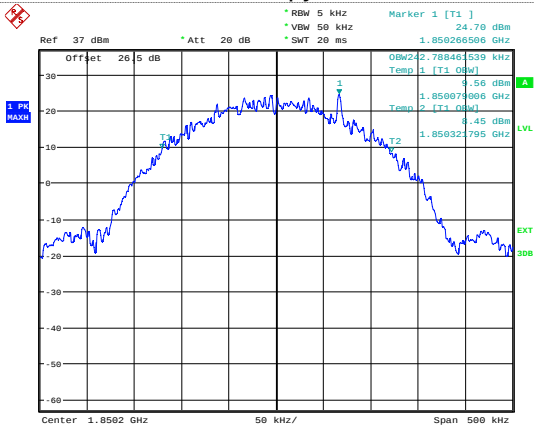


-26dB bandwidth

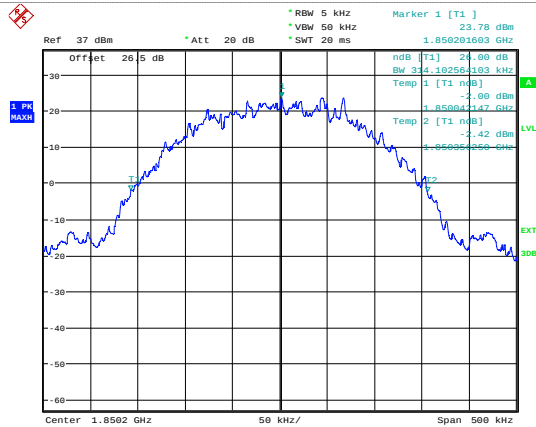


Channel 512

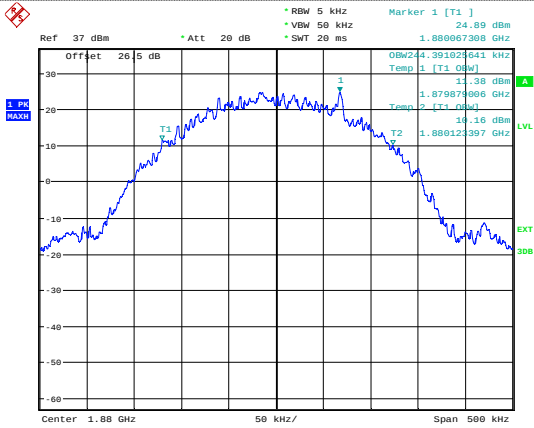


Channel 512

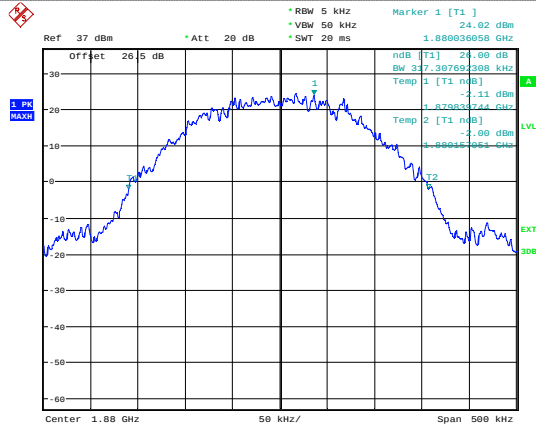

Channel 661

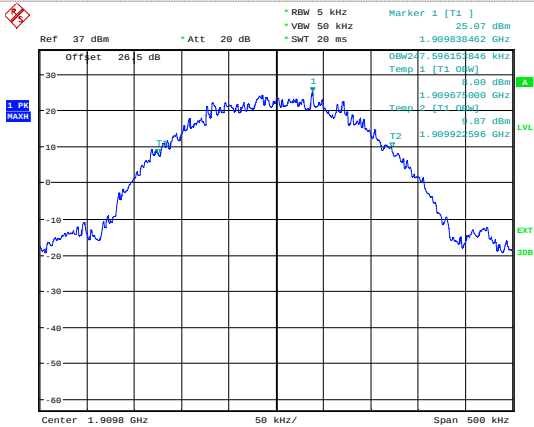

Channel 661

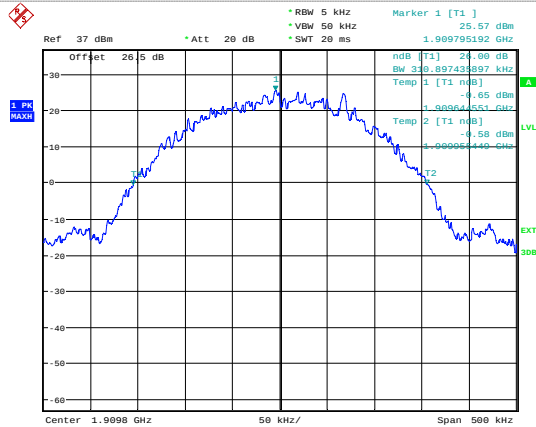


Channel 810


Channel 810

GPRS1900 For GMSK Moudlation


99% Occupy bandwidth

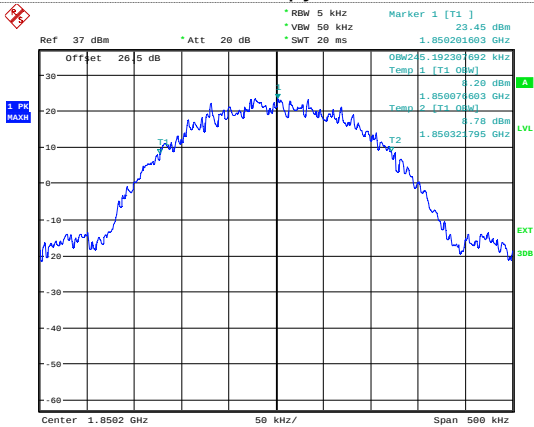


-26dB bandwidth

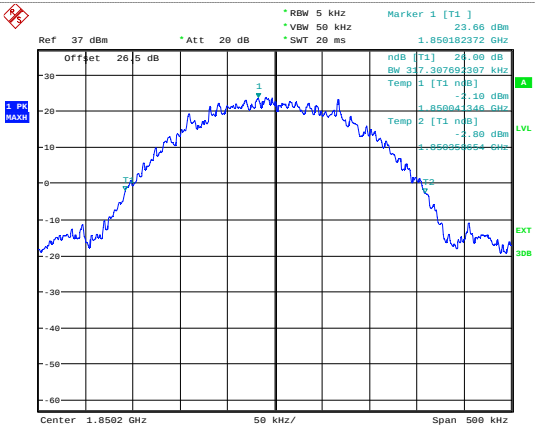


Channel 512

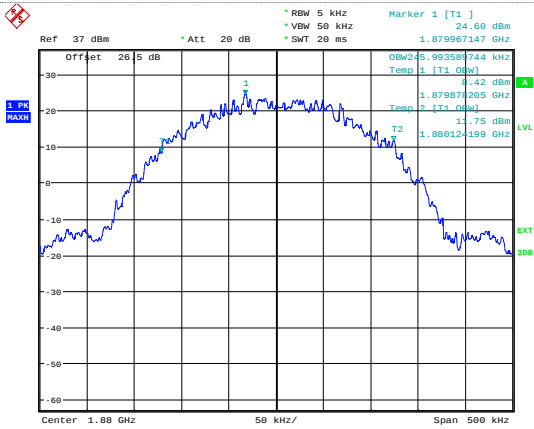


Channel 512

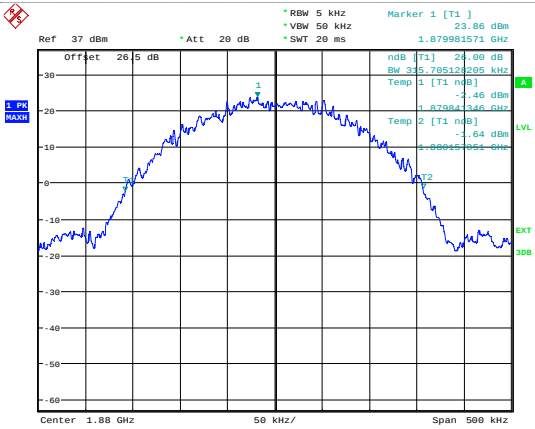

Channel 661

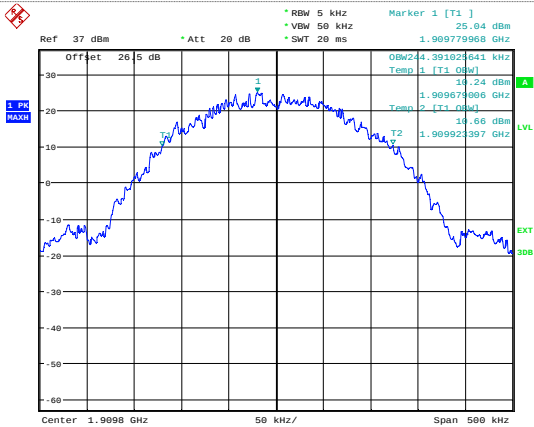

Channel 661

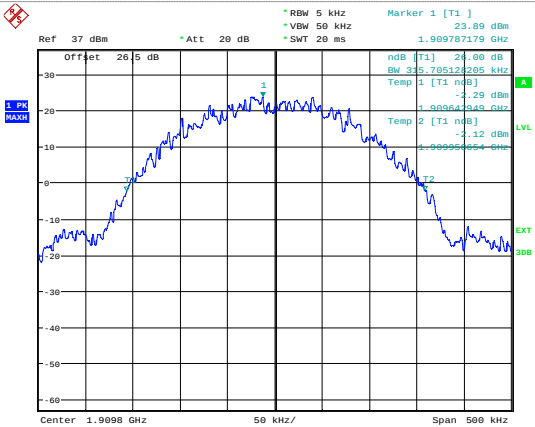


Channel 810


Channel 810

EGPRS1900 For GMSK Moudlation


99% Occupancy bandwidth

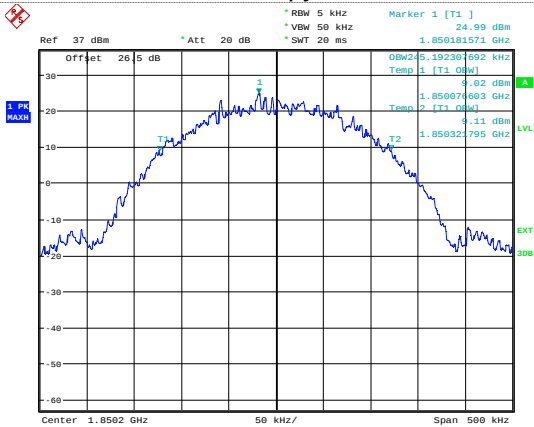


-26dB bandwidth

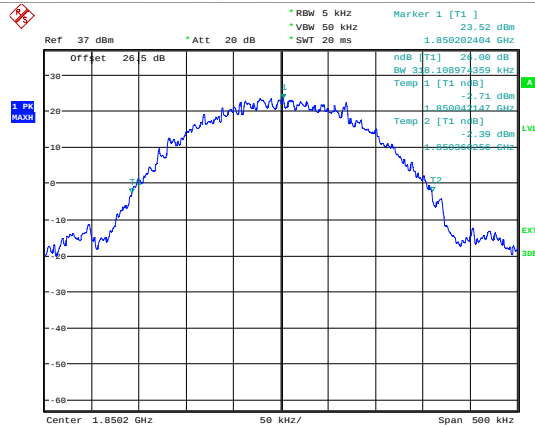


Channel 512

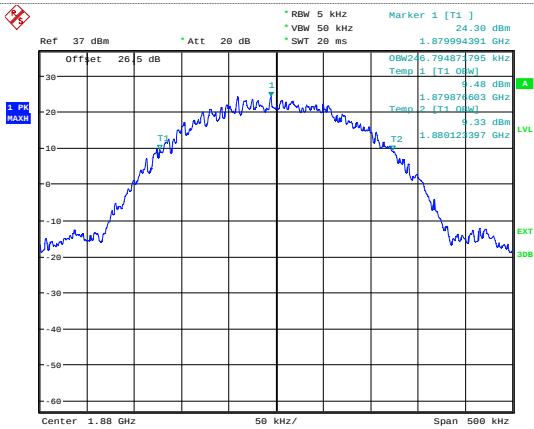


Channel 512

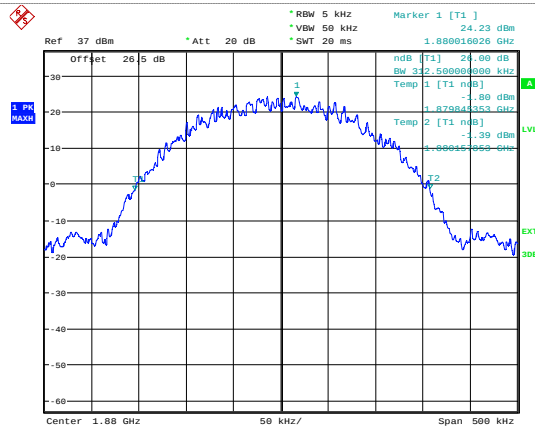

Channel 661

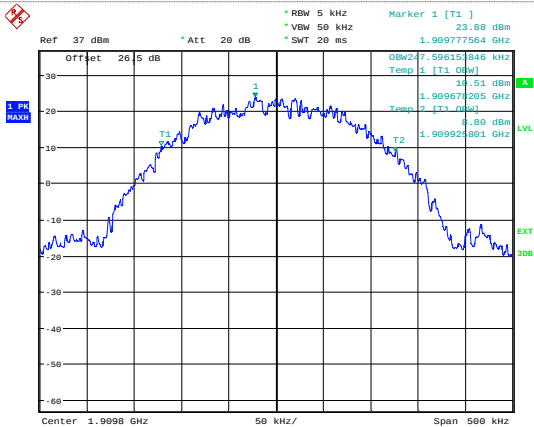

Channel 661

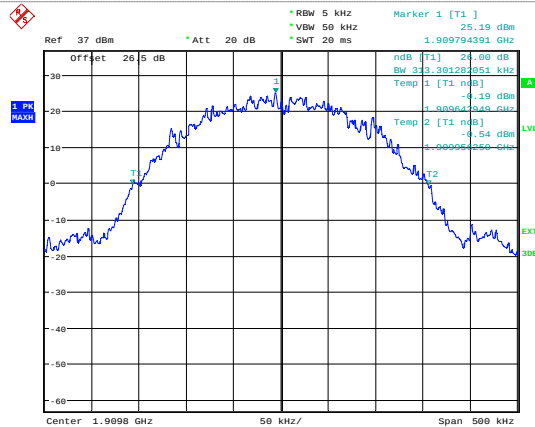


Channel 810


Channel 810

WCDMA Band II


99% Occupancy bandwidth

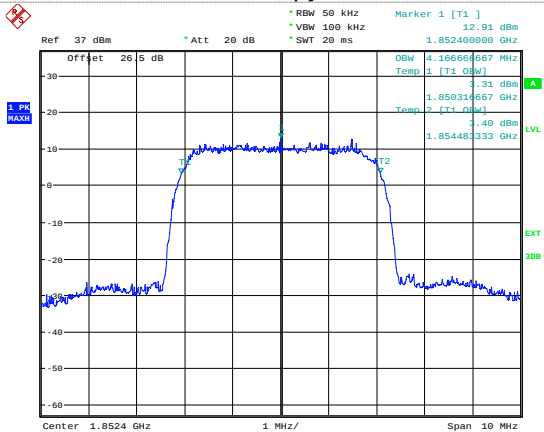


-26dB bandwidth

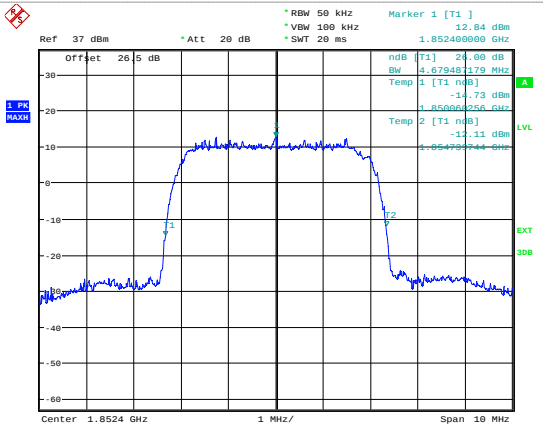


Channel 9262

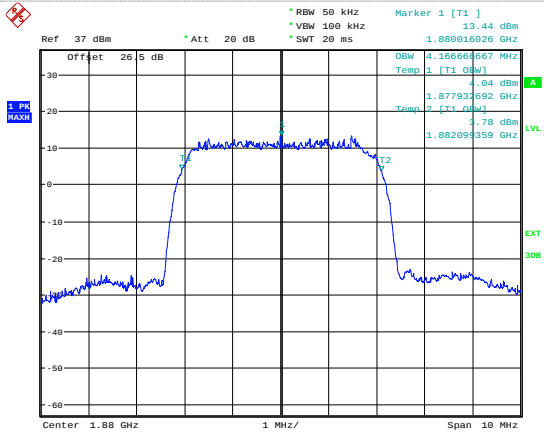


Channel 9262

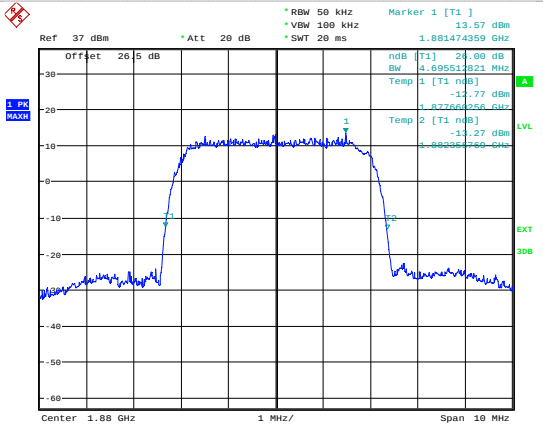

Channel 9400

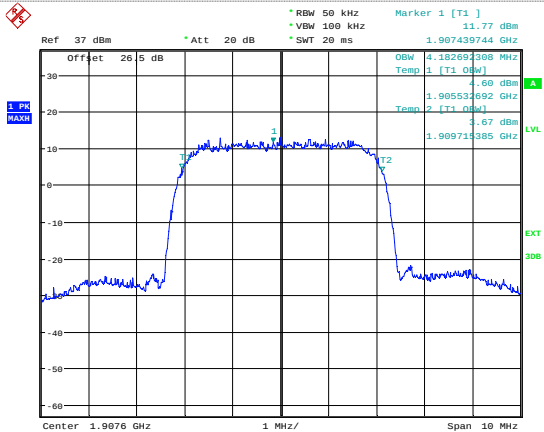

Channel 9400

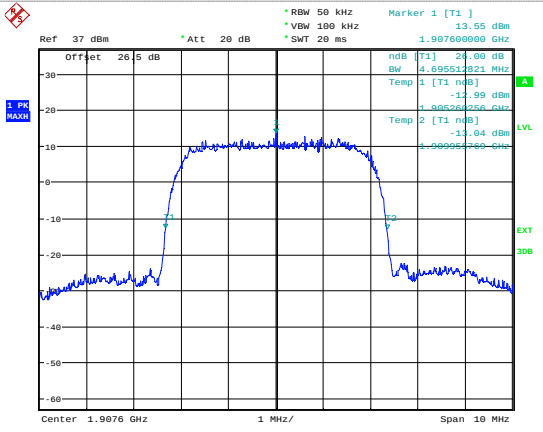


Channel 9538


Channel 9538

WCDMA Band V


99% Occupancy bandwidth

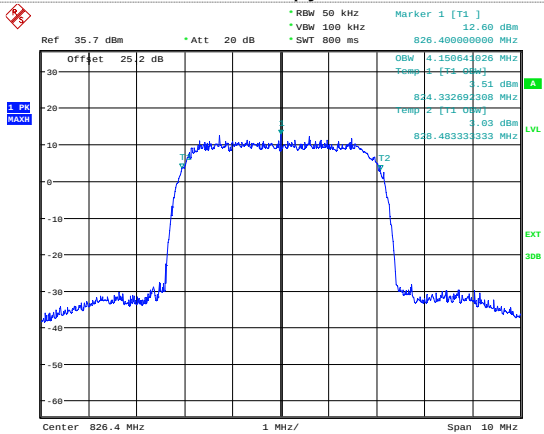


-26dB bandwidth

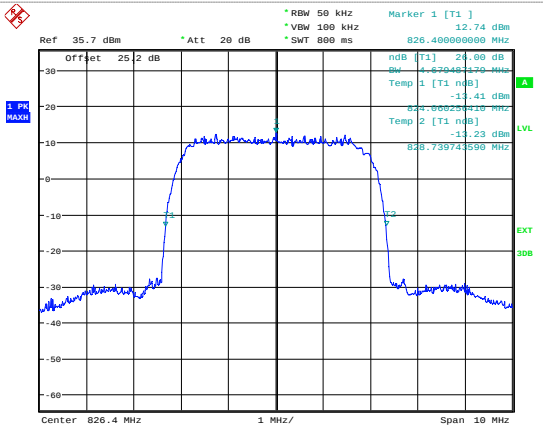


Channel 4132

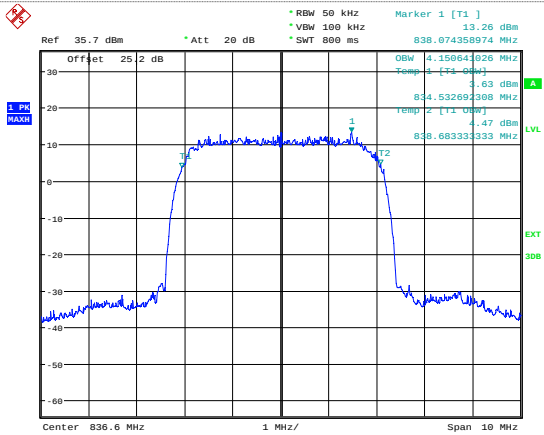


Channel 4132

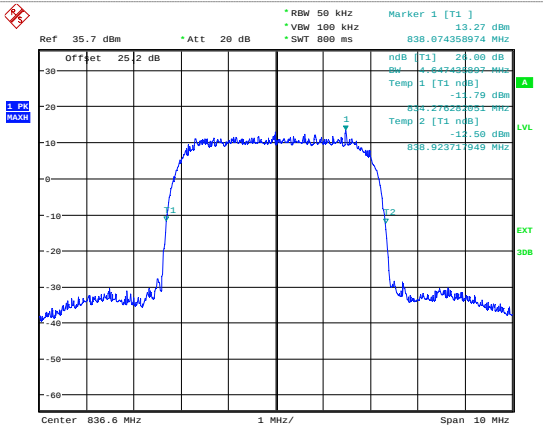

Channel 4183

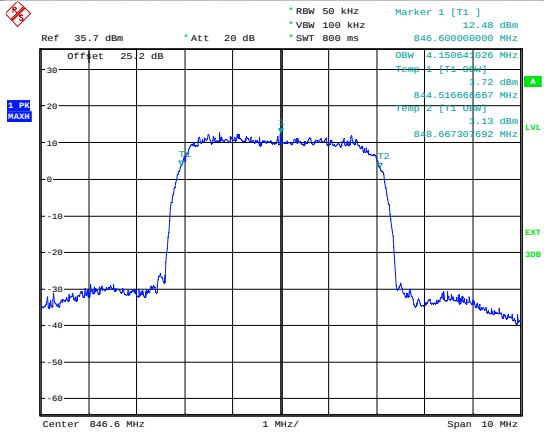

Channel 4183

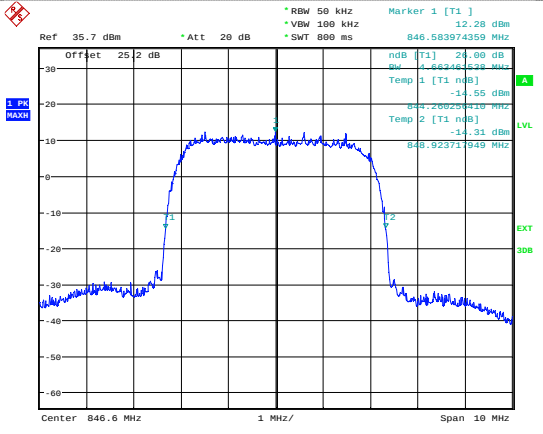

Channel 4233

Channel 4233


4.4. Out of band emission at antenna terminals

LIMIT

Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.


TEST CONFIGURATION


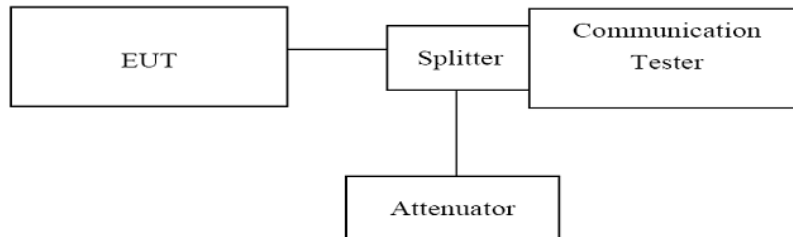



TEST PROCEDURE

1. The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation.
2. The resolution bandwidth of the spectrum analyzer was set at 1MHz, sufficient scans were taken to show the out of band Emissions if any up to 10th harmonic.
3. For the out of band: Set the RBW, VBW = 1MHz, Start=30MHz, Stop= 10th harmonic.

TEST RESULTS

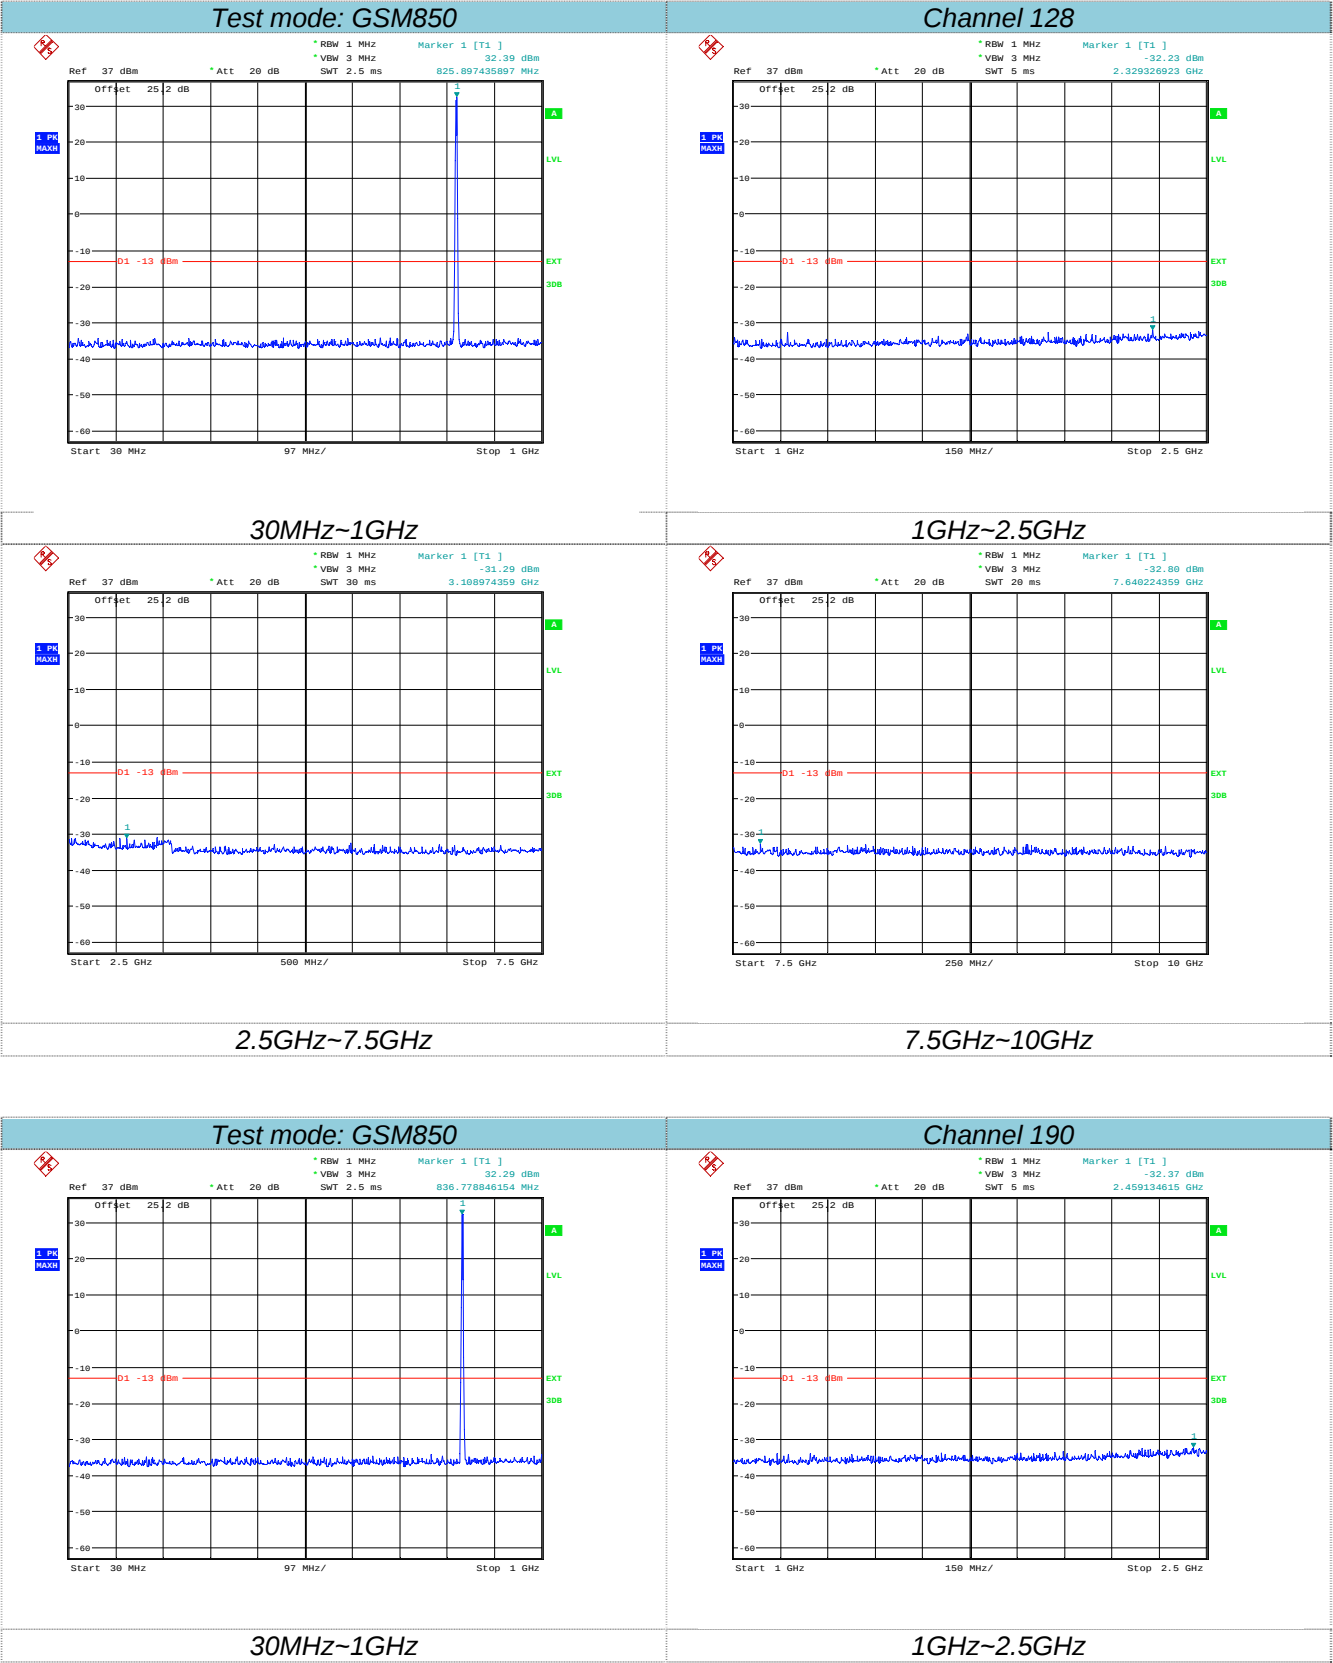

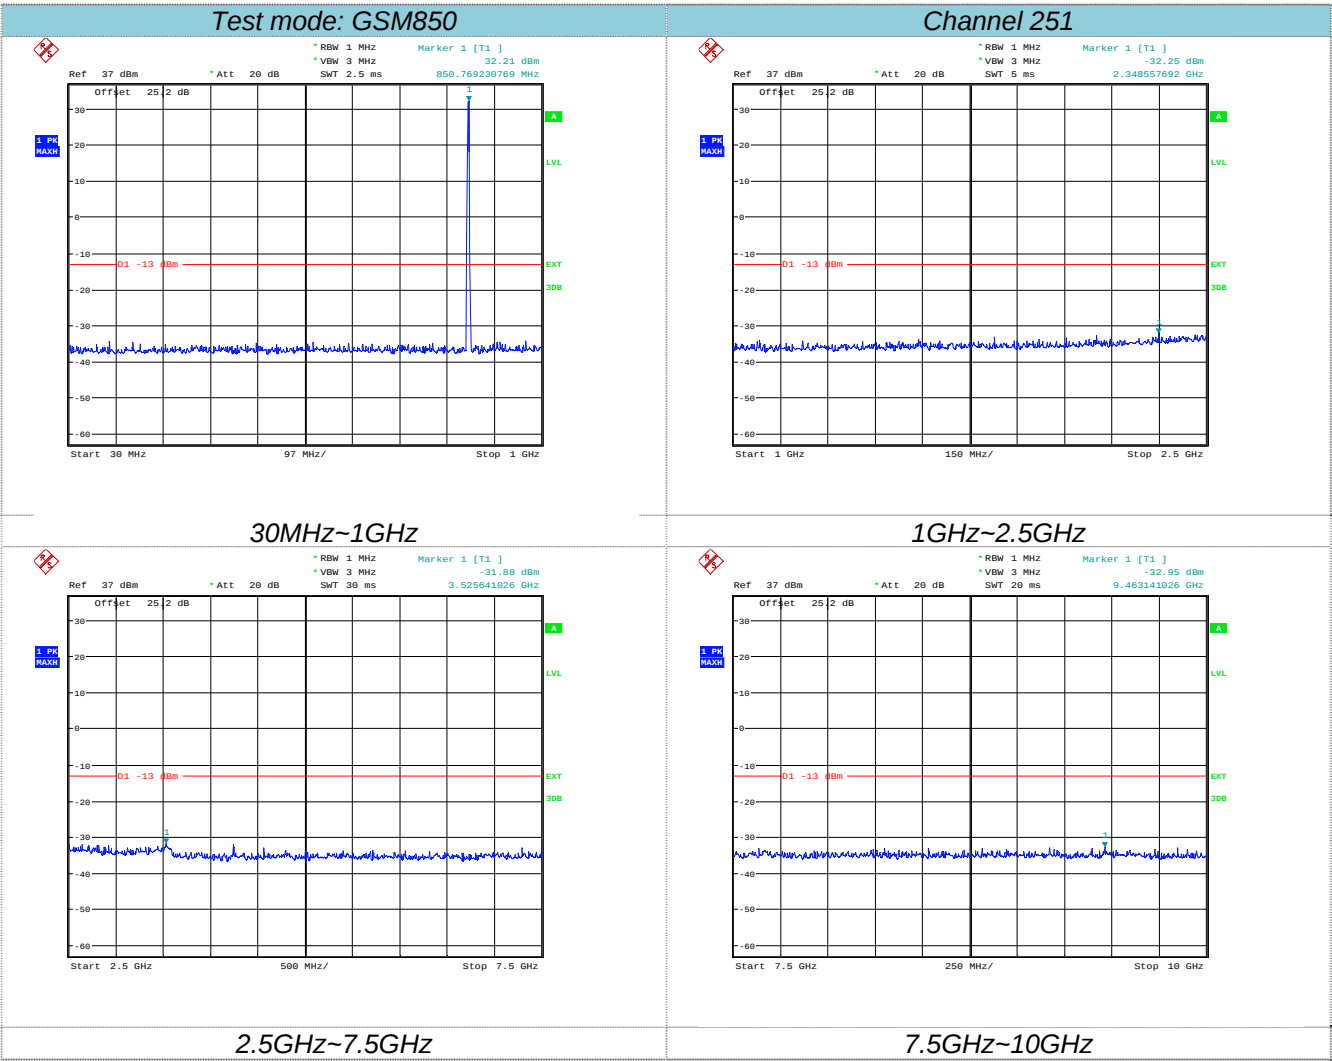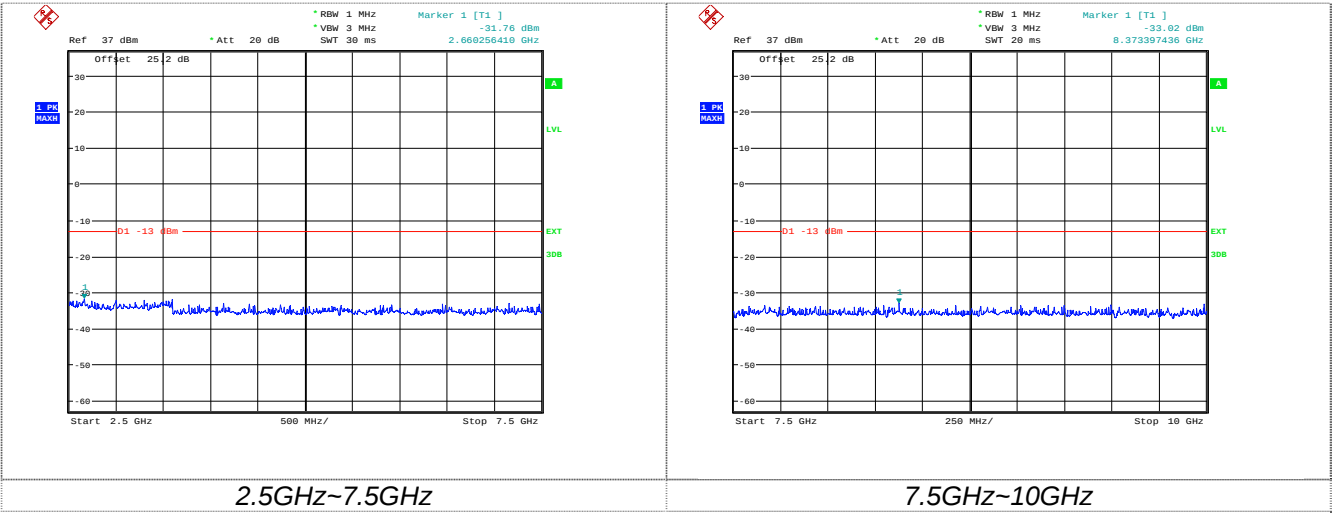

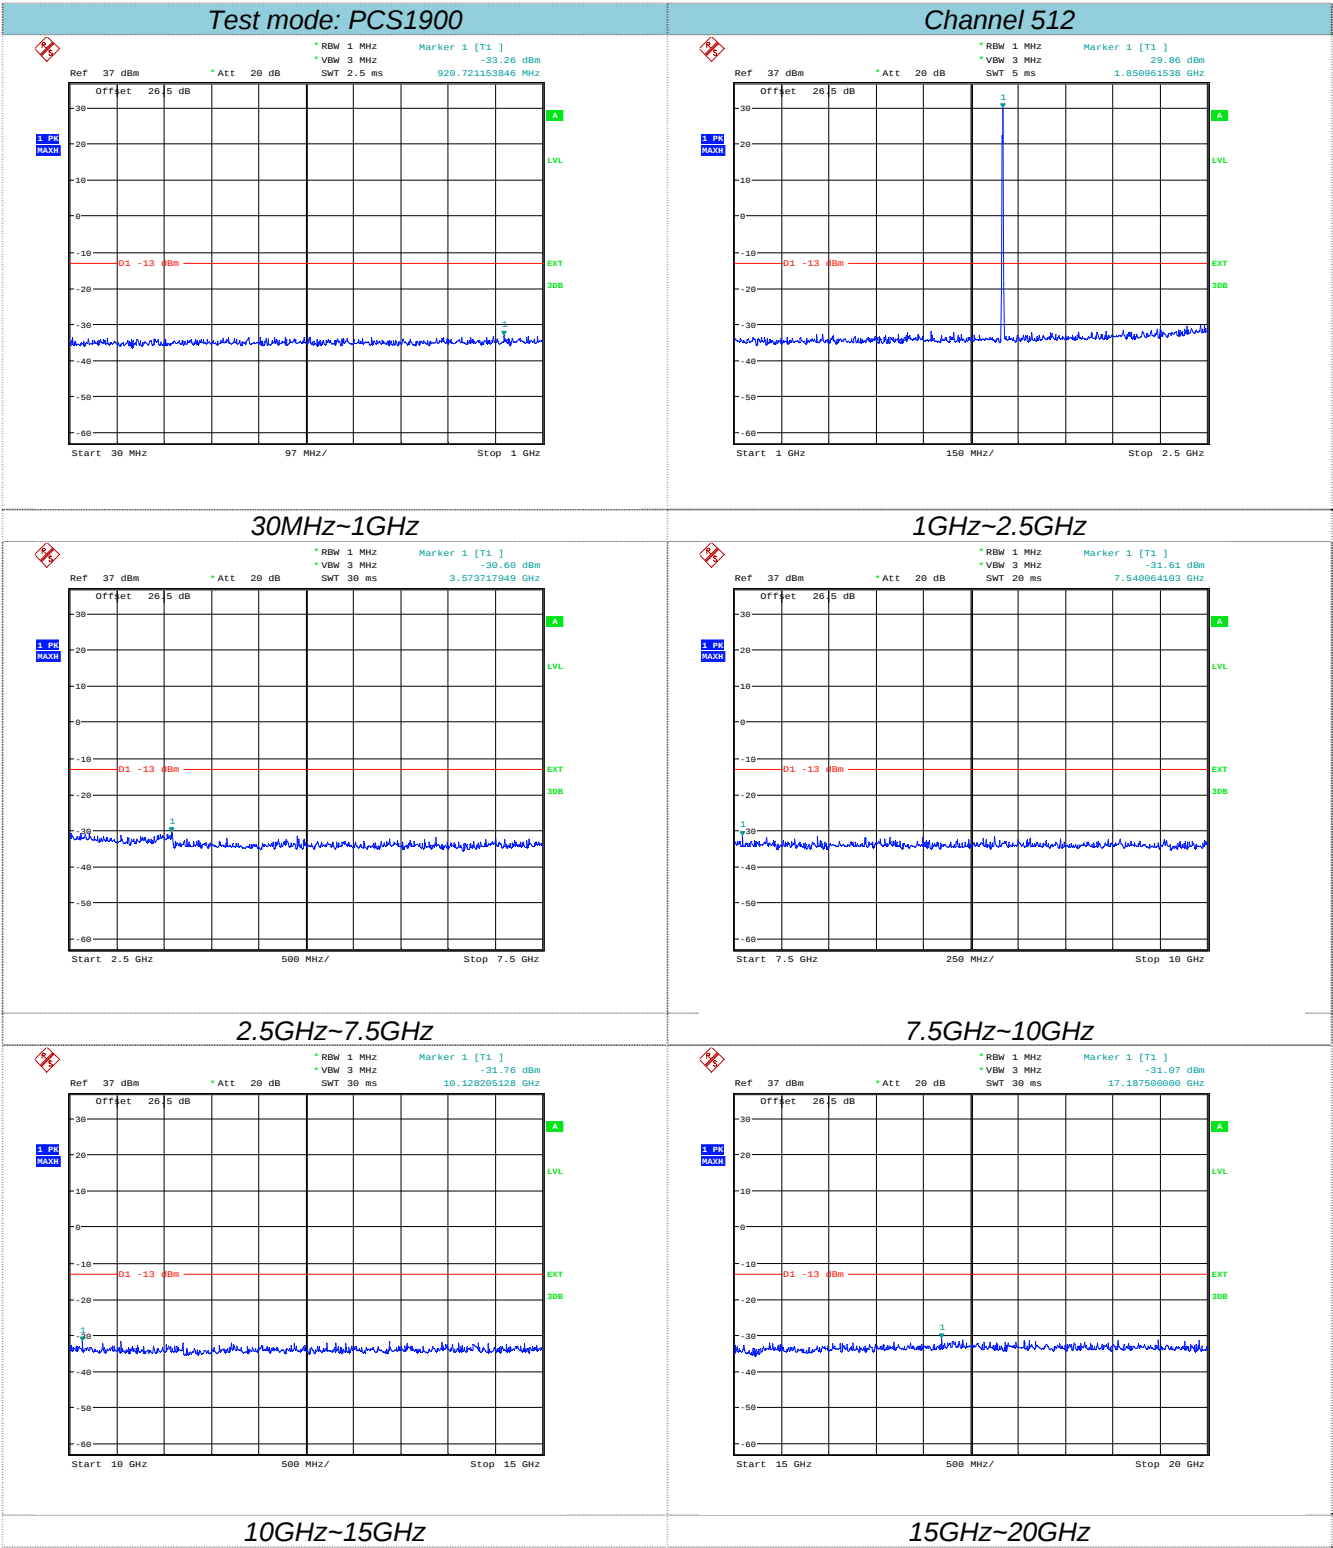

30MHz~1GHz

Ref 37 dBm

Offset 26.5 dB

* Att 20 dB

* RBW 1 MHz

* VBW 3 MHz

SWT 30 ms

Marker 1 [T1]

-30.60 dBm

3.573717949 GHz

1 PK

MAXH

Start 2.5 GHz

500 MHz/

Stop 7.5 GHz

1

30

20

10

0

-10

-20

-30

-40

-50

-60

A

LVL

EXT

30B

1GHz~2.5GHz

Ref 37 dBm

Offset 26.5 dB

* Att 20 dB

* RBW 1 MHz

* VBW 3 MHz

SWT 20 ms

Marker 1 [T1]

-31.61 dBm

7.548064193 GHz

1 PK

MAXH

Start 7.5 GHz

250 MHz/

Stop 10 GHz

1

30

20

10

0

-10

-20

-30

-40

-50

-60

A

LVL

EXT

30B

2.5GHz~7.5GHz

Ref 37 dBm

Offset 26.5 dB

* Att 20 dB

* RBW 1 MHz

* VBW 3 MHz

SWT 30 ms

Marker 1 [T1]

-31.76 dBm

10.128285128 GHz

1 PK

MAXH

Start 10 GHz

500 MHz/

Stop 15 GHz

1

30

20

10

0

-10

-20

-30

-40

-50

-60

A

LVL

EXT

30B

7.5GHz~10GHz

Ref 37 dBm

Offset 26.5 dB

* Att 20 dB

* RBW 1 MHz

* VBW 3 MHz

SWT 30 ms

Marker 1 [T1]

-31.07 dBm

17.187500000 GHz

1 PK

MAXH

Start 15 GHz

500 MHz/

Stop 20 GHz

1

30

20

10

0

-10

-20

-30

-40

-50

-60

A


LVL


EXT


30B


10GHz~15GHz


15GHz~20GHz

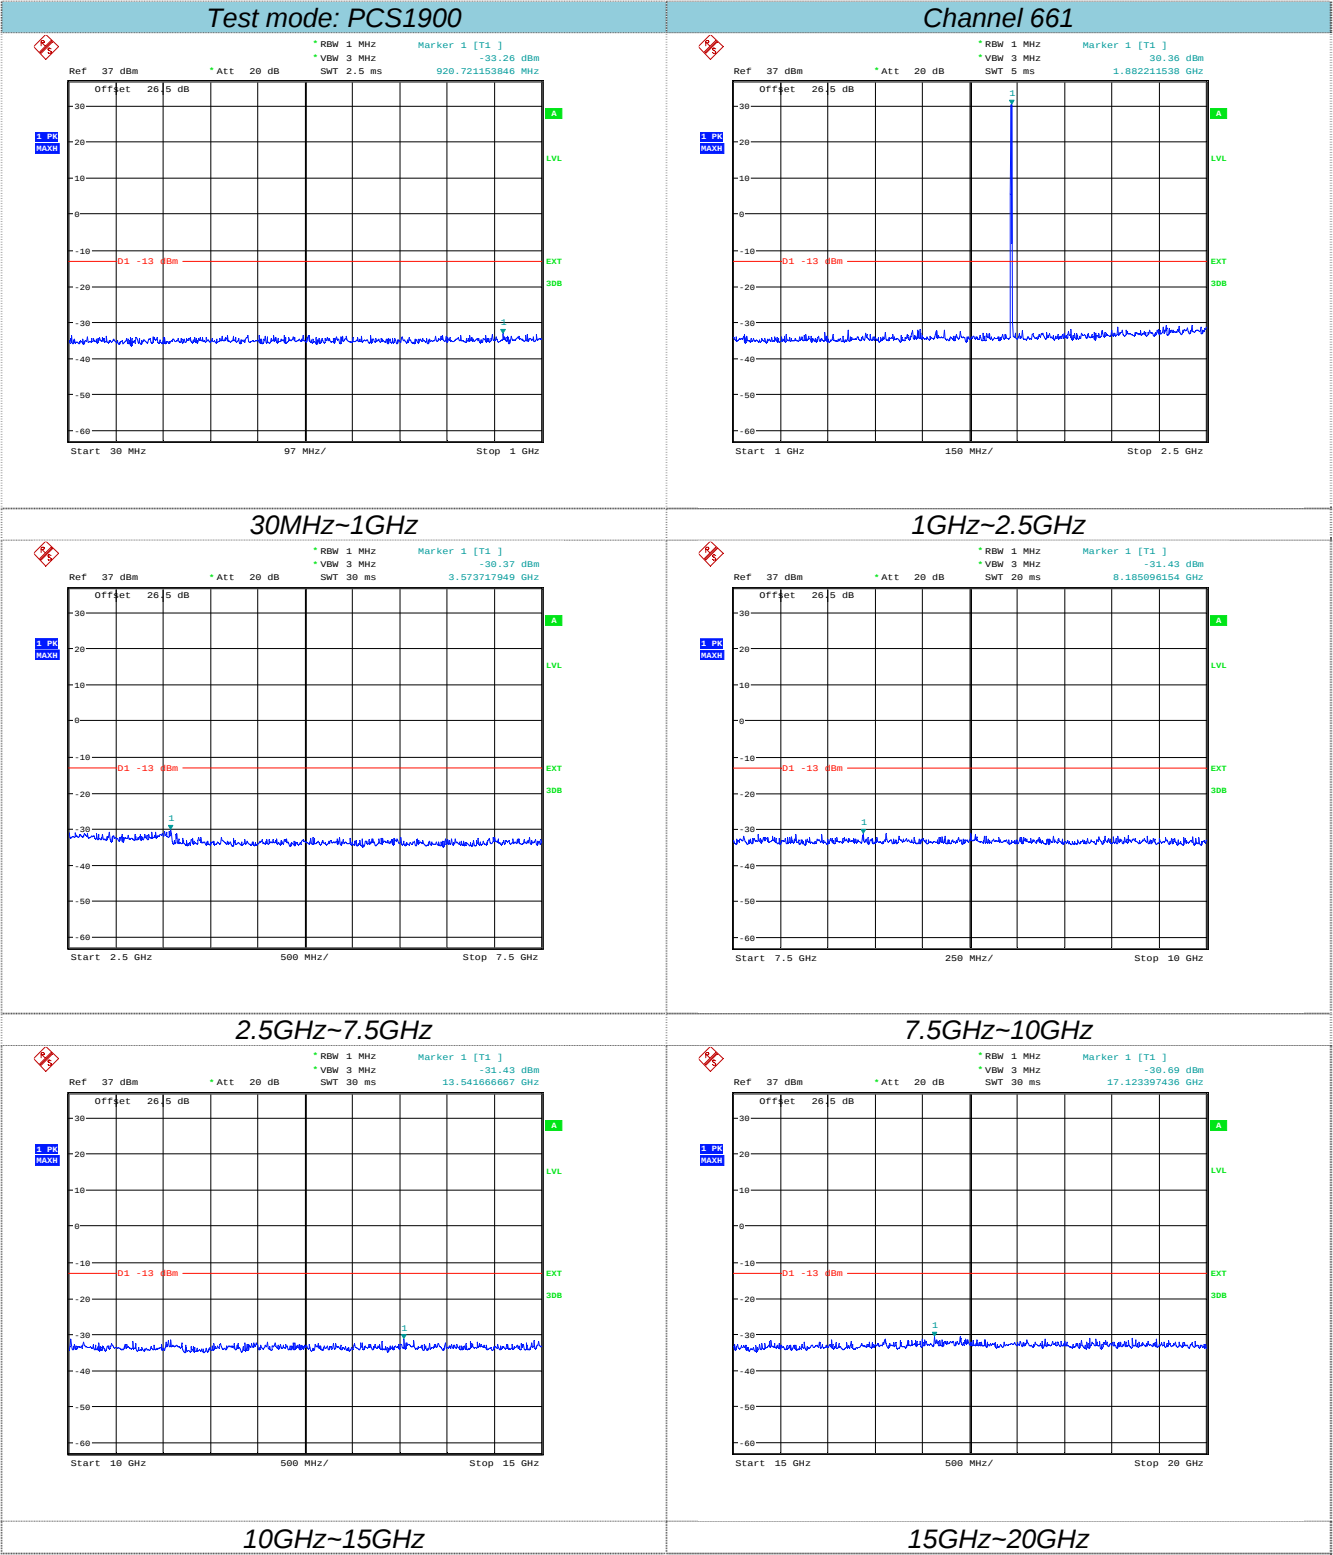



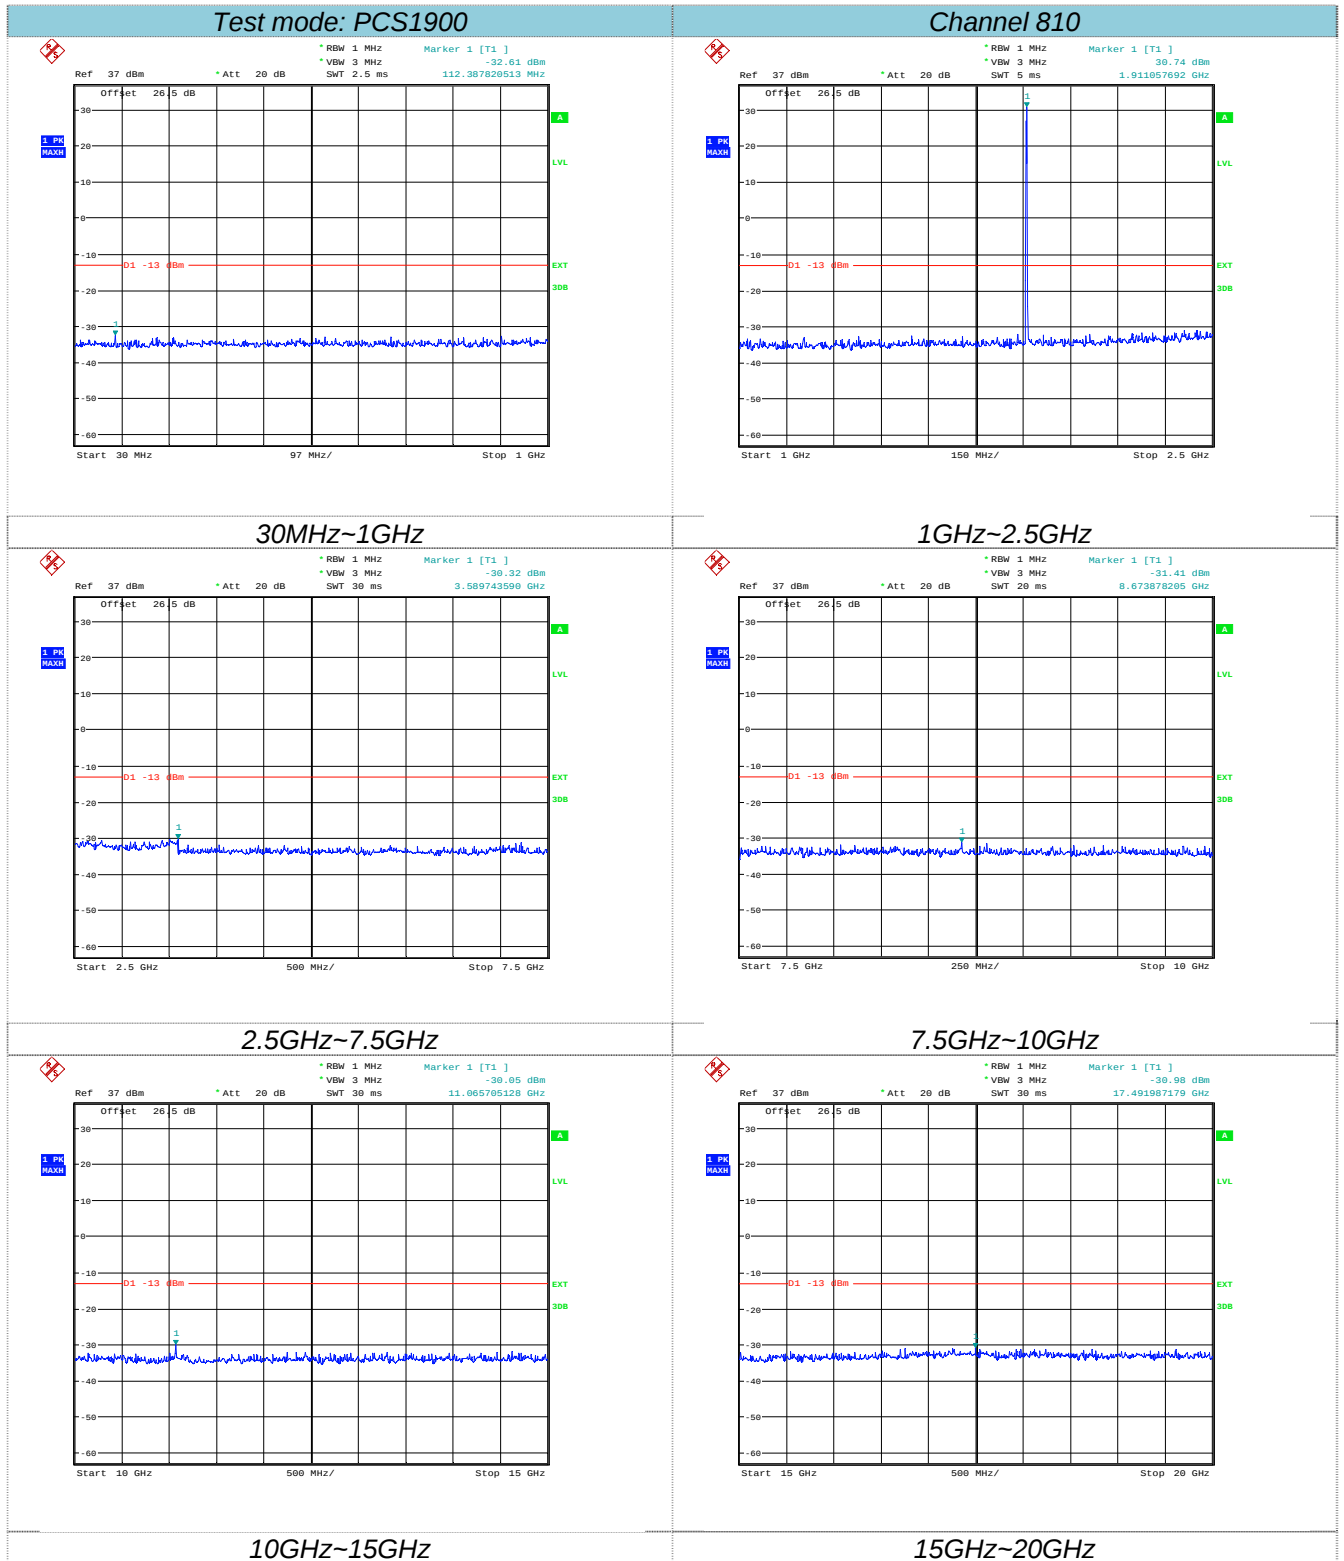


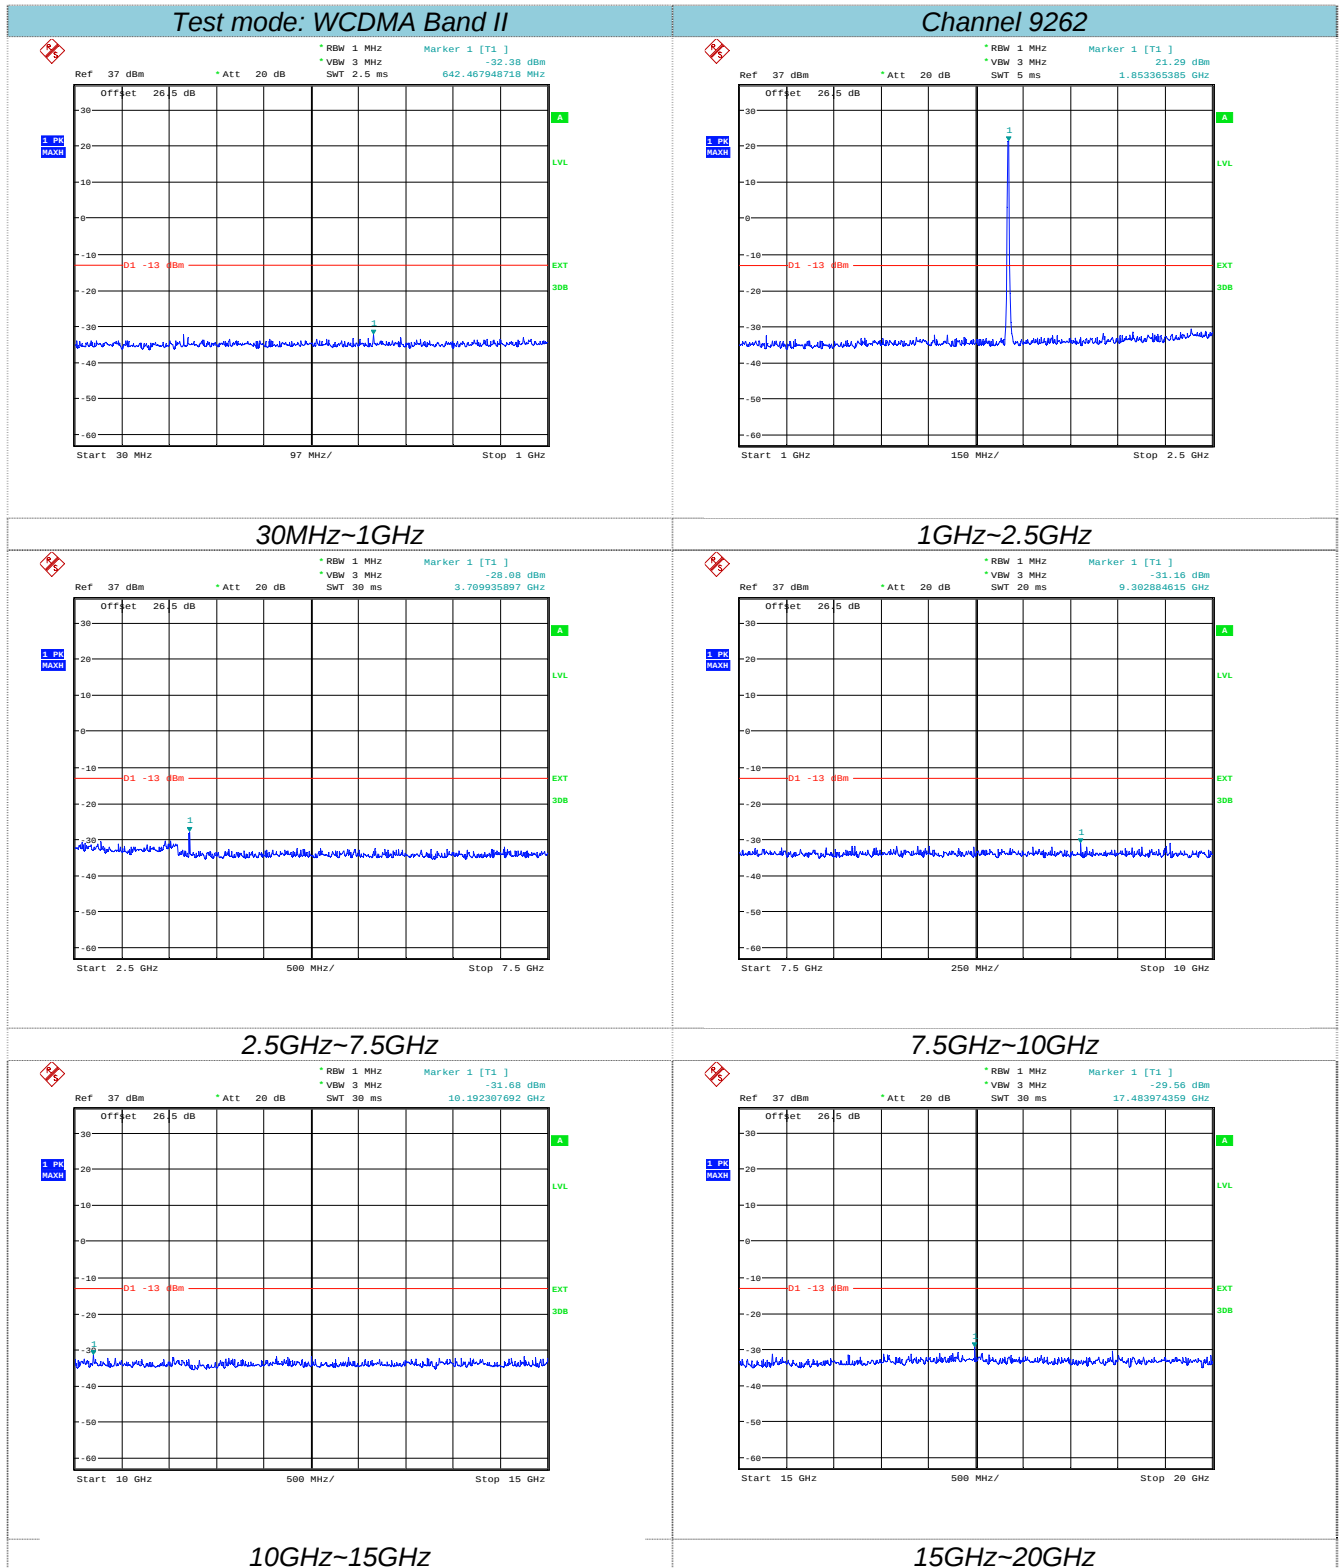

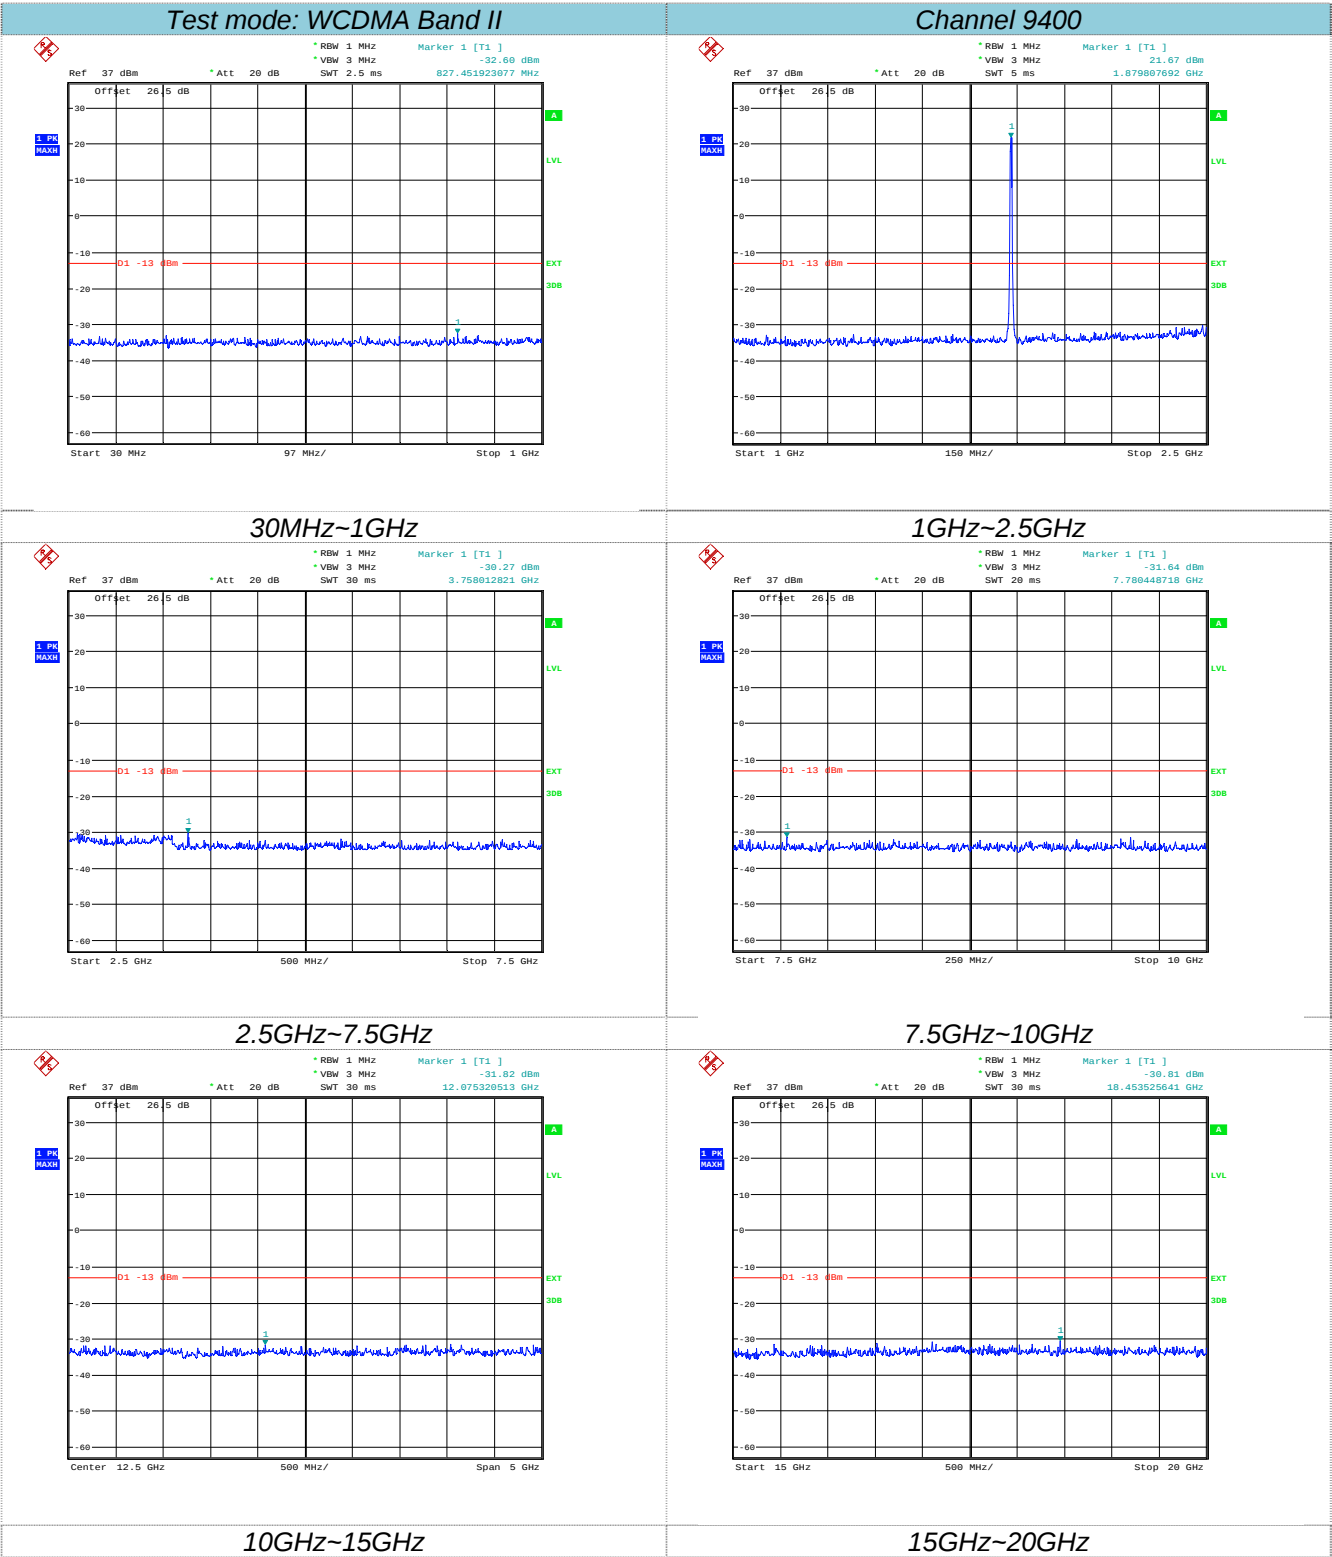

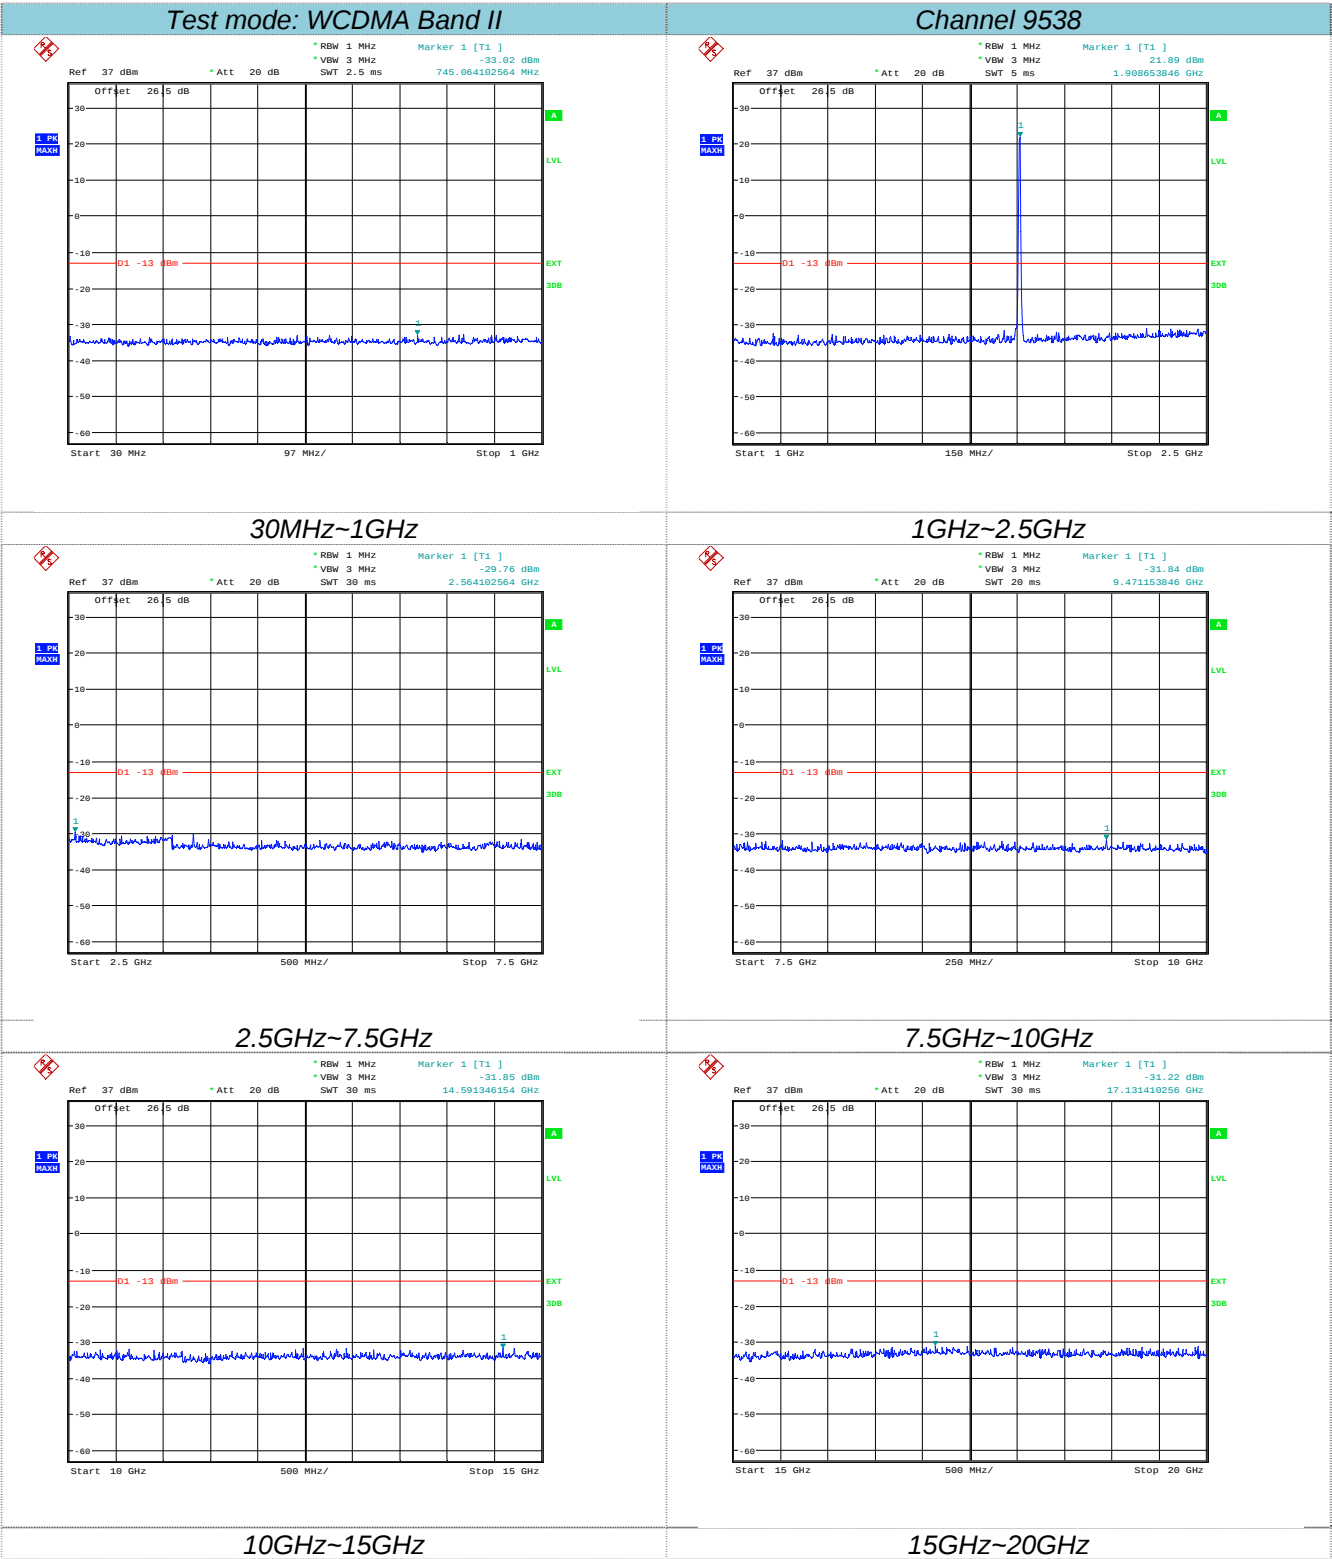

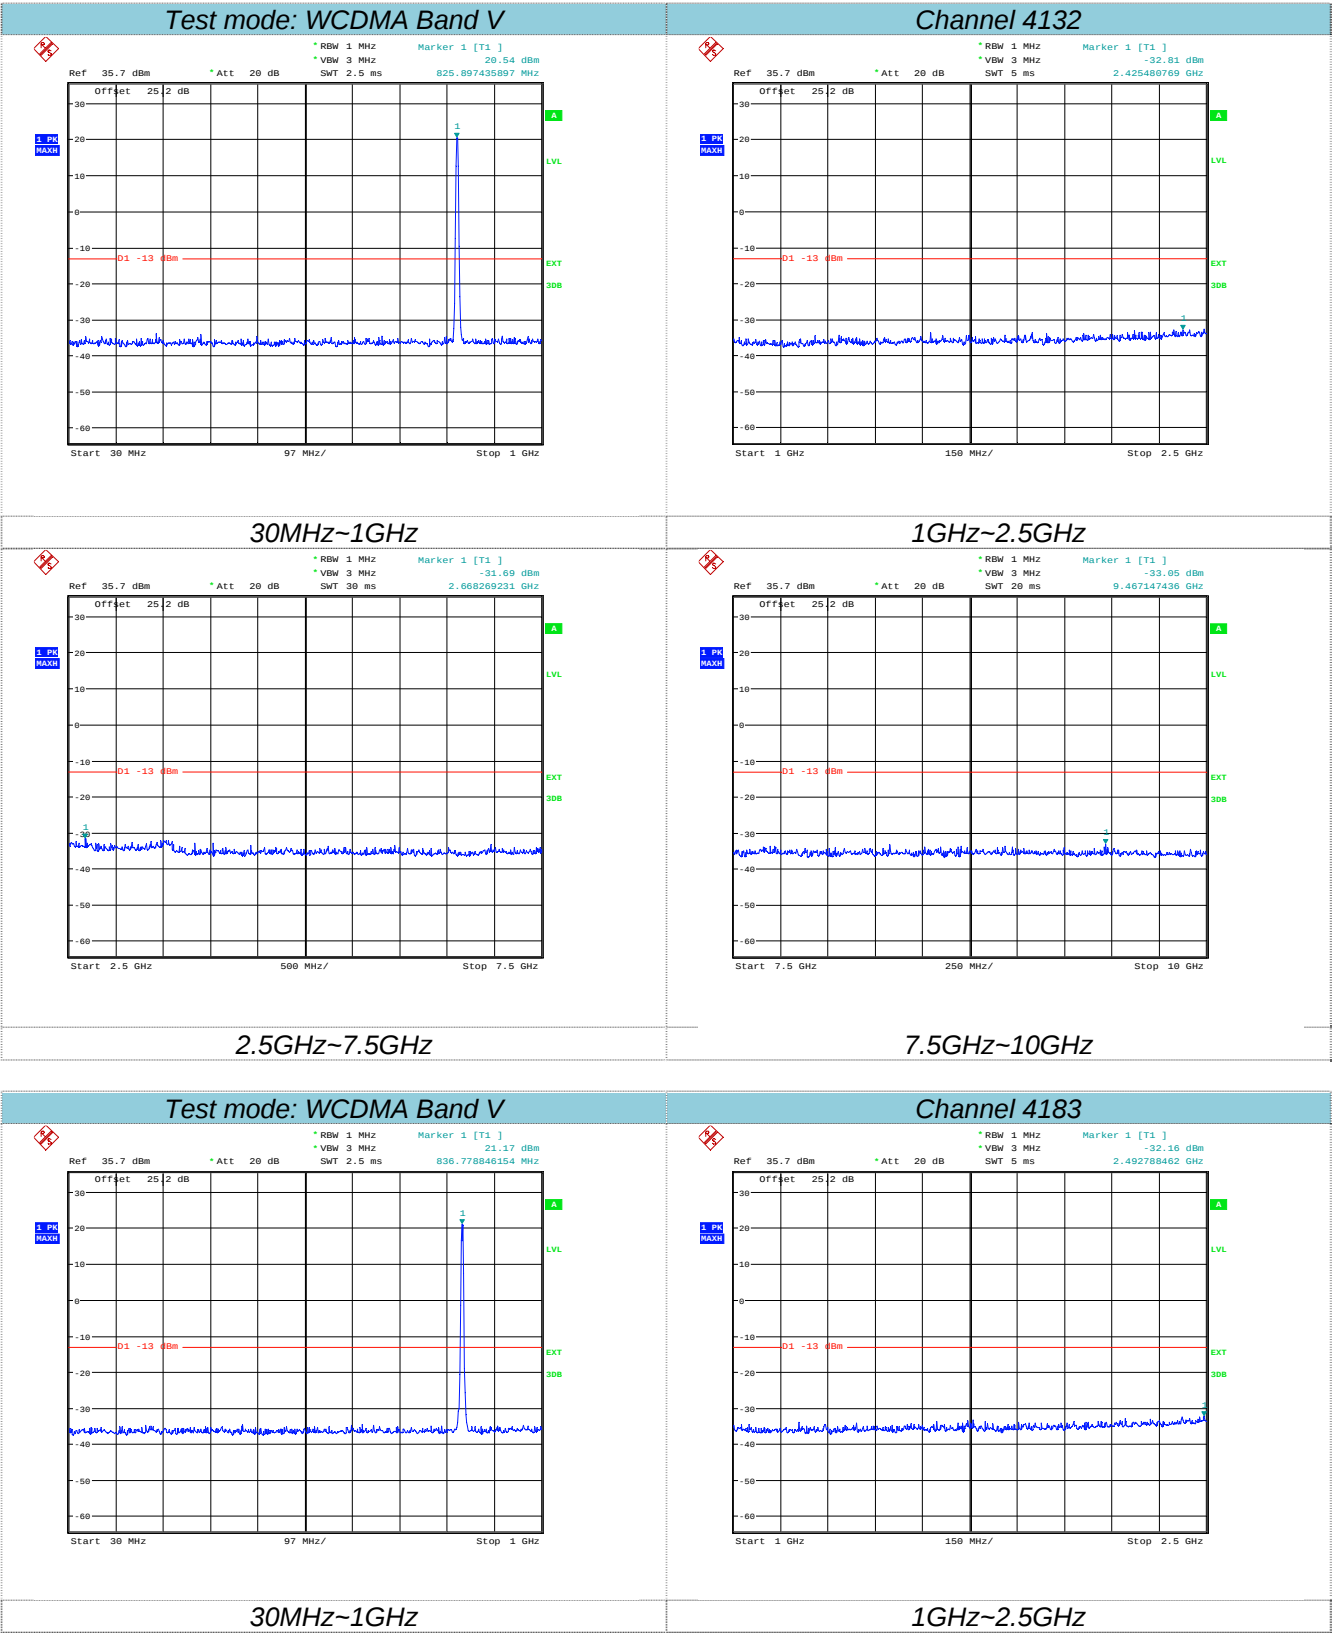

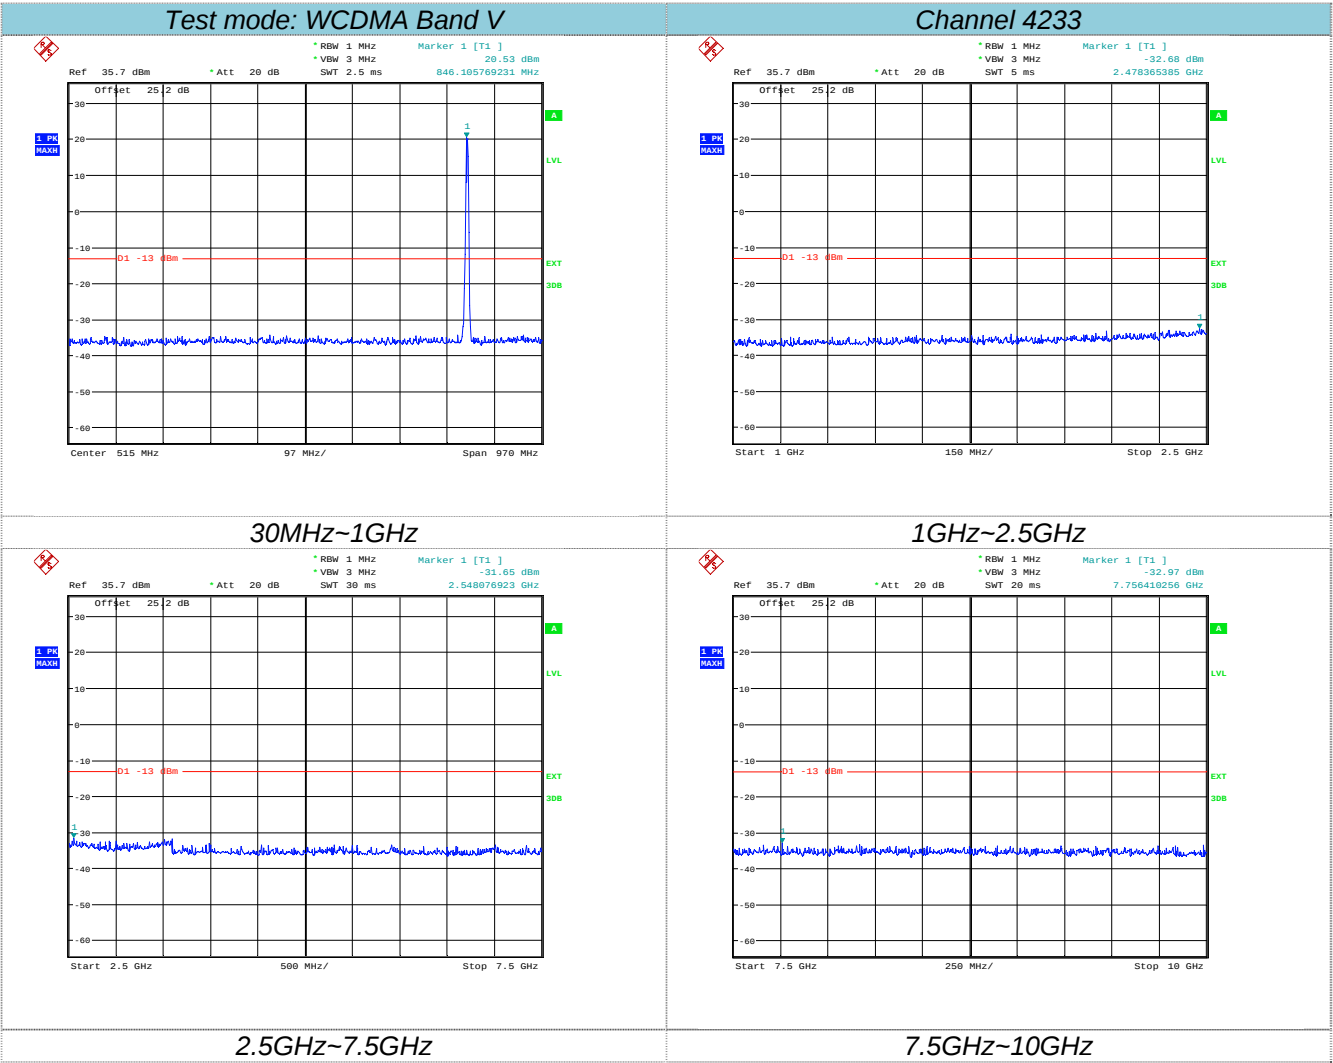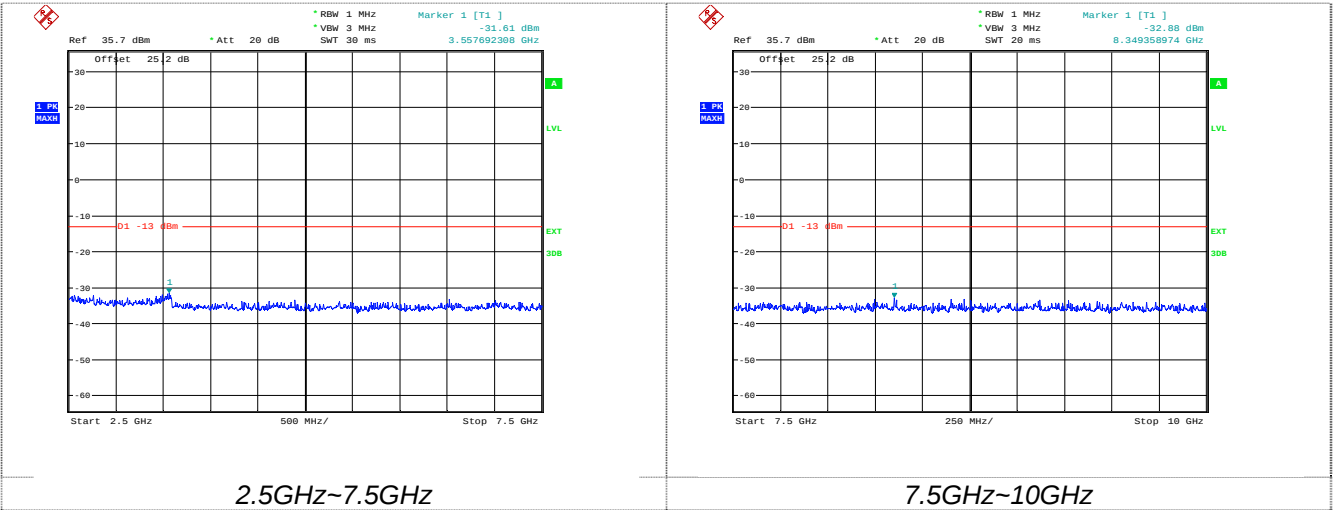


4.5. Band Edge compliance

LIMIT

Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

TEST CONFIGURATION

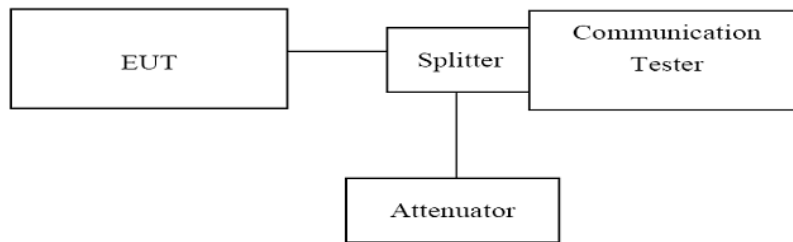

TEST PROCEDURE

1. The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation.
2. For the bandedge: 2G: Set the RBW=5KHz, VBW = 50KHz, Span=1MHz Sweep time= Auto
3G: Set the RBW=5KHz, VBW = 50KHz, Span=5MHz Sweep time= Auto

TEST RESULTS

GSM850					
Channel Number	Frequency (MHz)	Measurement Results		Limit (dBm)	Verdict
		Frequency (MHz)	Values (dBm)		
128	824.20	823.98	-13.89	-13.00	Pass
251	848.80	849.00	-13.33	-13.00	Pass

GPRS850					
Channel Number	Frequency (MHz)	Measurement Results		Limit (dBm)	Verdict
		Frequency (MHz)	Values (dBm)		
128	824.20	824.00	-13.23	-13.00	Pass
251	848.80	849.00	-13.13	-13.00	Pass

EGPRS850					
Channel Number	Frequency (MHz)	Measurement Results		Limit (dBm)	Verdict
		Frequency (MHz)	Values (dBm)		
128	824.20	824.00	-13.76	-13.00	Pass
251	848.80	849.00	-13.57	-13.00	Pass

PCS1900					
Channel Number	Frequency (MHz)	Measurement Results		Limit (dBm)	Verdict
		Frequency (MHz)	Values (dBm)		
512	1850.20	1850.00	-14.06	-13.00	Pass
810	1909.80	1910.00	-13.53	-13.00	Pass

PCS1900					
Channel Number	Frequency (MHz)	Measurement Results		Limit (dBm)	Verdict
		Frequency (MHz)	Values (dBm)		
512	1850.20	1850.00	-14.06	-13.00	Pass
810	1909.80	1910.00	-13.53	-13.00	Pass



GPRS1900					
Channel Number	Frequency (MHz)	Measurement Results		Limit (dBm)	Verdict
		Frequency (MHz)	Values (dBm)		
512	1850.20	1850.00	-13.93	-13.00	Pass
810	1909.80	1910.00	-14.35	-13.00	Pass

EGPRS1900					
Channel Number	Frequency (MHz)	Measurement Results		Limit (dBm)	Verdict
		Frequency (MHz)	Values (dBm)		
512	1850.20	1850.00	-13.56	-13.00	Pass
810	1909.80	1910.00	-13.14	-13.00	Pass

WCDMA Band II					
Channel Number	Frequency (MHz)	Measurement Results		Limit (dBm)	Verdict
		Frequency (MHz)	Values (dBm)		
9262	1852.4	1850.00	-22.71	-13.00	Pass
9538	1907.6	1910.69	-18.77	-13.00	Pass

WCDMA Band V					
Channel Number	Frequency (MHz)	Measurement Results		Limit (dBm)	Verdict
		Frequency (MHz)	Values (dBm)		
4132	826.4	824.00	-23.86	-13.00	Pass
4233	846.6	849.09	-28.07	-13.00	Pass



GSM850 For GMSK Moudlation

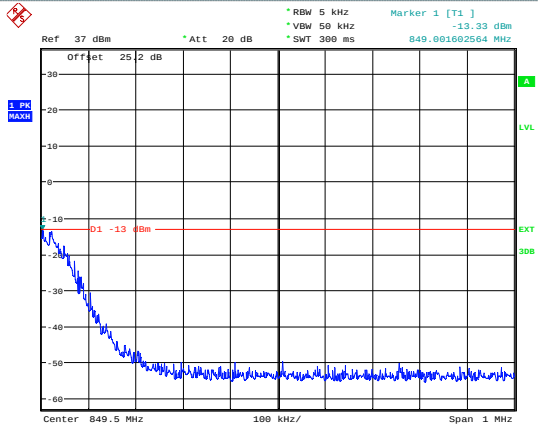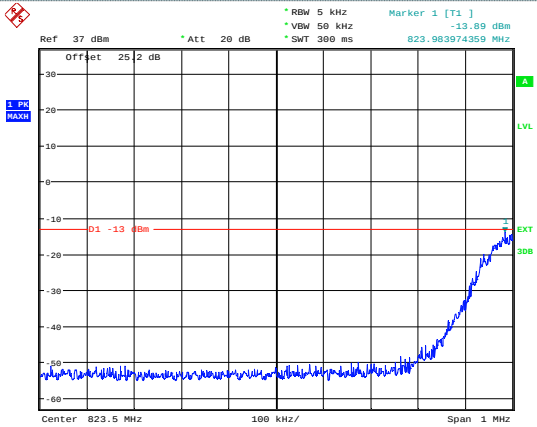

Channel 128

Channel 251



GPMS850 For GMSK Moudlation

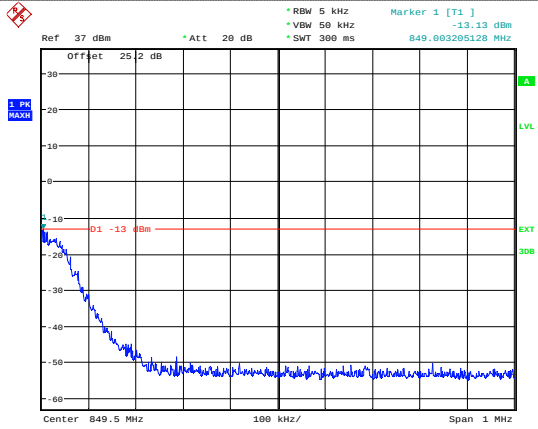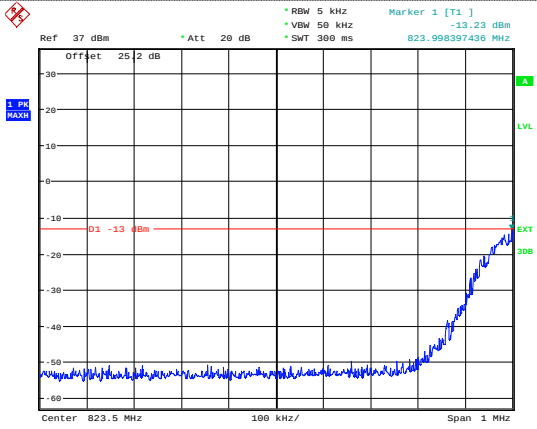

Channel 128

Channel 251



EGPMS850 For GMSK Moudlation

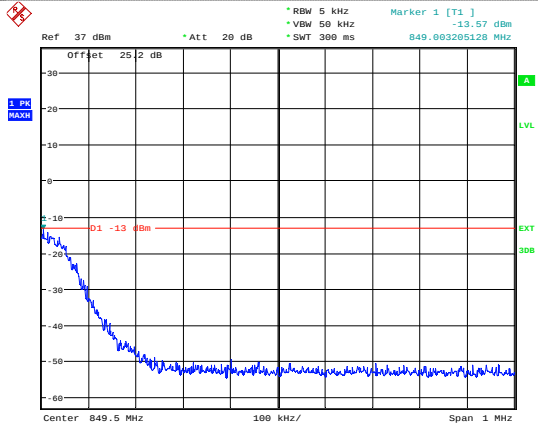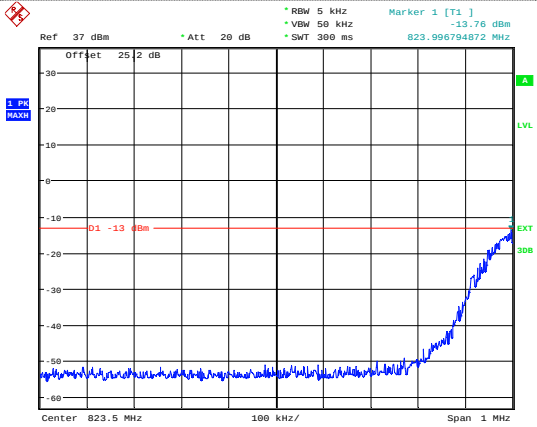

Channel 128

Channel 251



PCS1900 For GMSK Moudlation

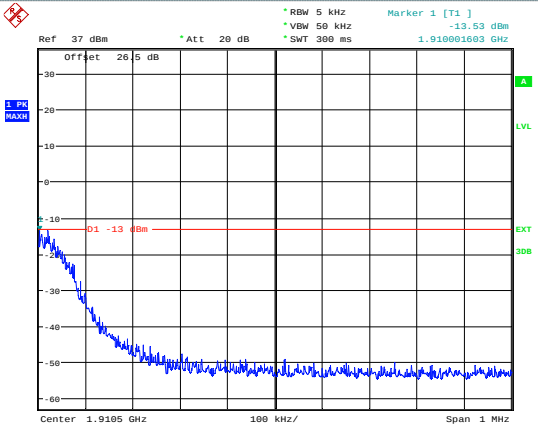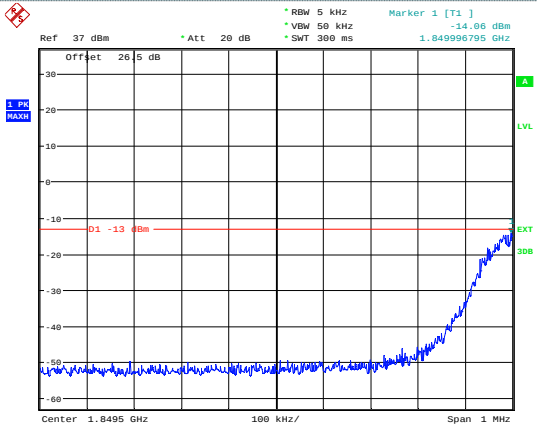

Channel 512

Channel 810



GPRS1900 For GMSK Moudlation

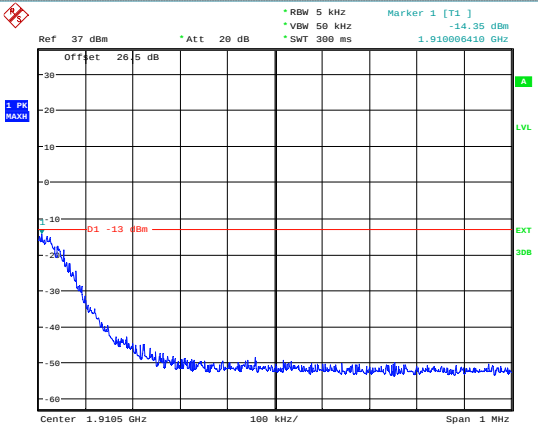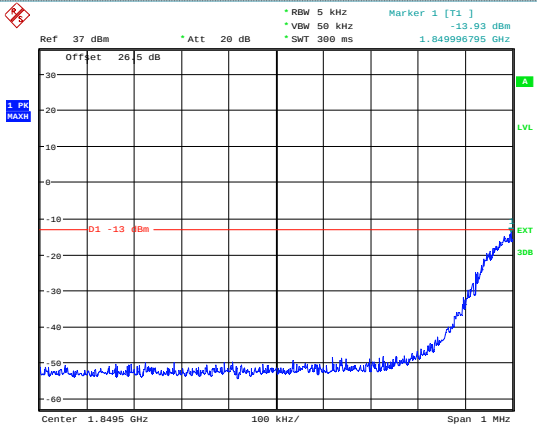

Channel 512

Channel 810


EGPRS1900 For GMSK Moudlation

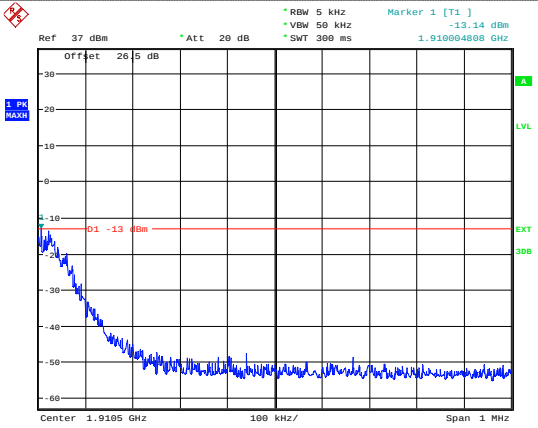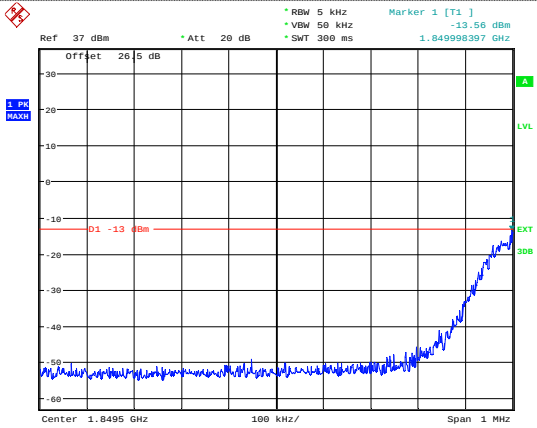


Channel 512

Channel 810

WCDMA Band II

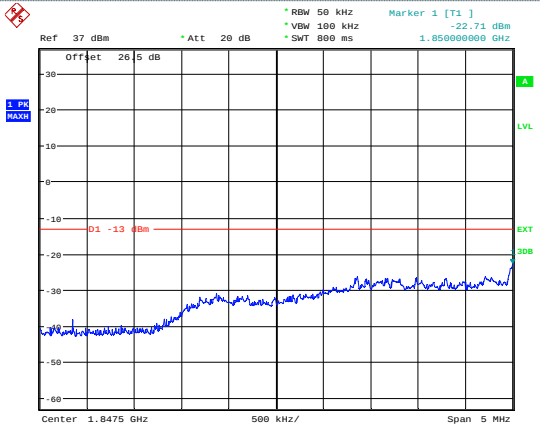


Channel 9262

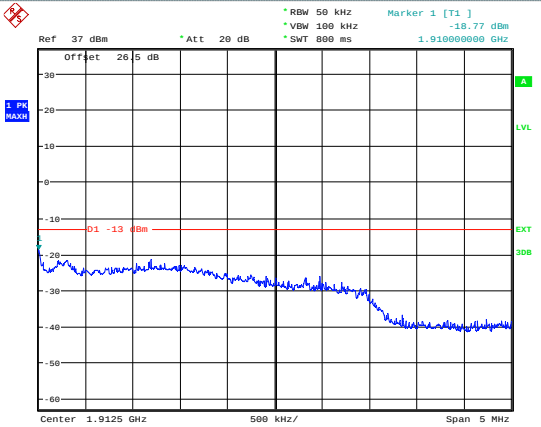


Channel 9538

WCDMA Band V

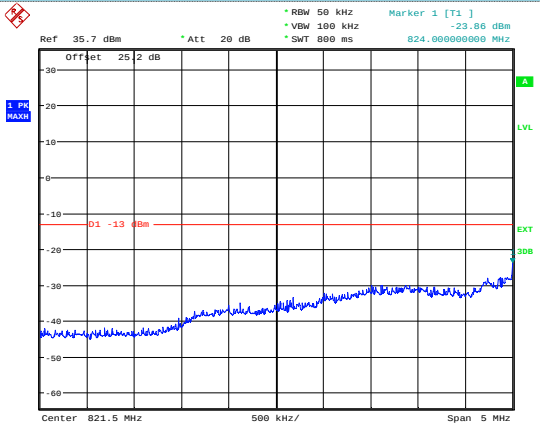

Channel 4132

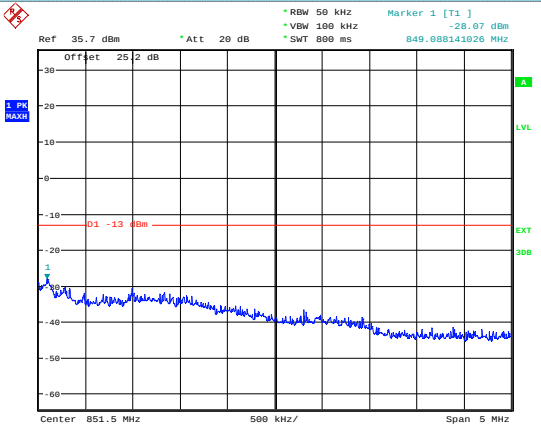

Channel 4233


4.6. Radiated Power Measurement

LIMIT

GSM850/WCDMA Band V: 7W ERP

PCS1900/WCDMA Band II: 2W EIRP

TEST CONFIGURATION

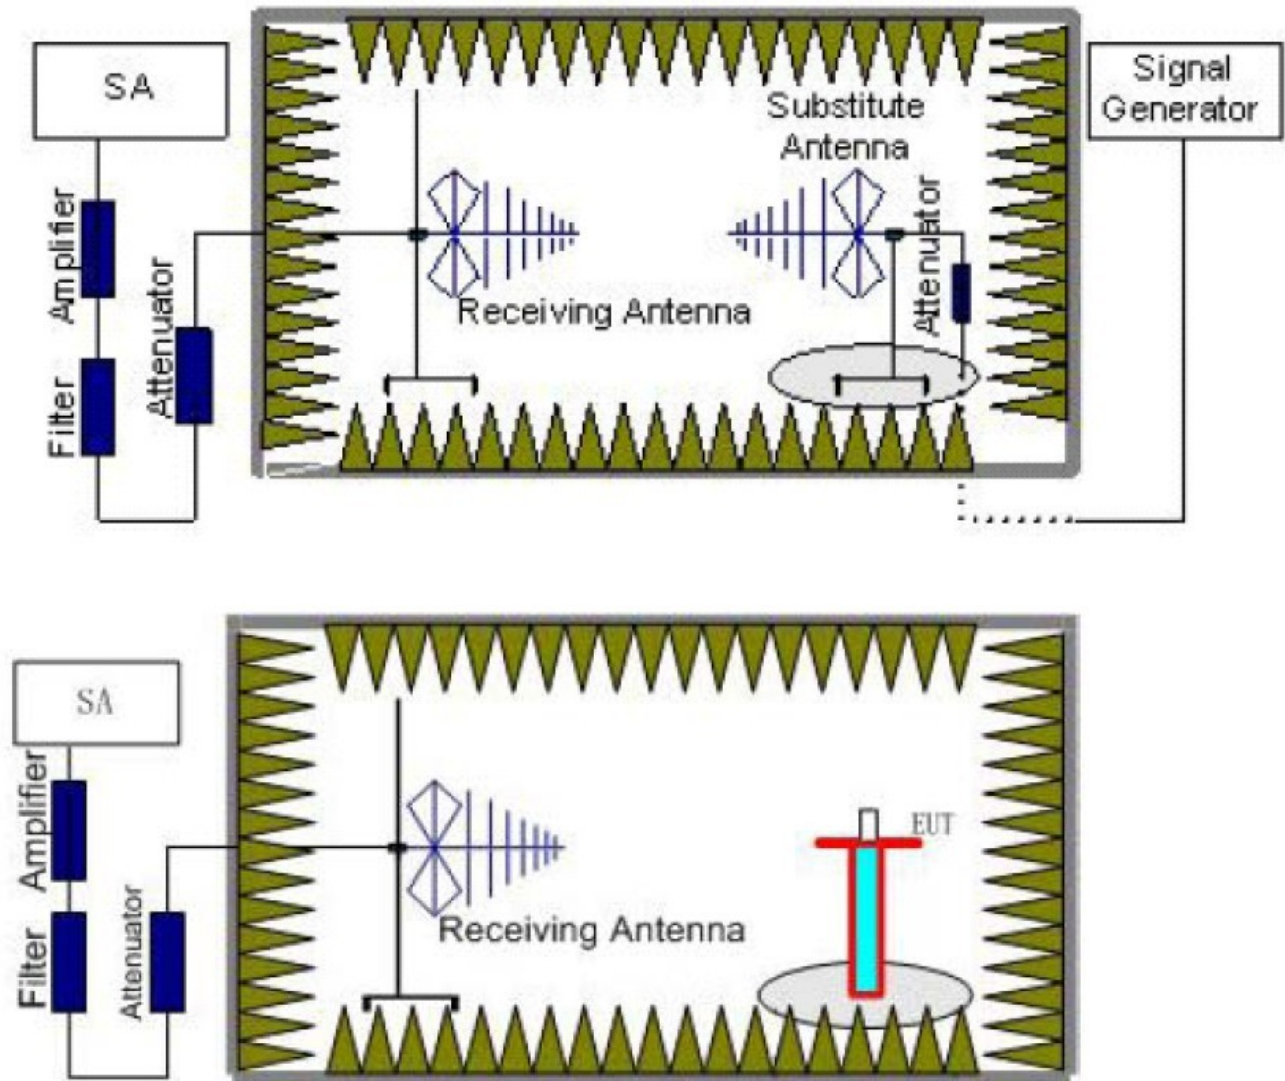

TEST PROCEDURE

1. EUT was placed on a 1.50 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.50m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as (Pr).

4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
6. The measurement results are obtained as described below:
 $\text{Power(EIRP)} = \text{PMea} - \text{PAg} - \text{Pcl} + \text{Ga}$
 We used SMF100A microwave signal generator which signal level can up to 33dBm,so we not used power Amplifier for substitution test; The measurement results are amend as described below:
 $\text{Power(EIRP)} = \text{PMea} - \text{Pcl} + \text{Ga}$
7. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
 ERP can be calculated from EIRP by subtracting the gain of the dipole, $\text{ERP} = \text{EIRP} - 2.15\text{dBi}$.

TEST RESULTS

GSM:

Mode	Channel	Antenna Pol.	ERP	Limit (dBm)	Result
GSM850	128	V	32.39	38.45	Pass
		H	27.55		
	190	V	32.25		
		H	28.06		
	251	V	32.11		
		H	27.41		
GPRS850	128	V	32.40	38.45	Pass
		H	27.56		
	190	V	32.27		
		H	28.07		
	251	V	32.12		
		H	27.43		
EGPRS850	128	V	32.34	38.45	Pass
		H	27.50		
	190	V	32.18		
		H	28.01		
	251	V	32.06		
		H	27.34		

Mode	Channel	Antenna Pol.	EIRP	Limit (dBm)	Result
PCS1900	512	V	30.66	33.01	Pass
		H	25.59		
	661	V	31.52		
		H	26.31		
	810	V	30.29		
		H	25.76		
GPRS1900	512	V	29.67	33.01	Pass
		H	25.63		
	661	V	31.56		
		H	26.32		
	810	V	30.33		
		H	25.80		
EGPRS 1900	512	V	29.60	33.01	Pass
		H	25.57		
	661	V	31.46		
		H	26.25		
	810	V	30.27		
		H	25.70		

WCDMA:

Mode	Channel	Antenna Pol.	EIRP	Limit (dBm)	Result
WCDMA Band II	9262	V	23.20	33.01	Pass
		H	18.16		
	9400	V	22.98		
		H	18.89		
	9538	V	23.14		
		H	18.67		


Mode	Channel	Antenna Pol.	ERP	Limit (dBm)	Result
WCDMA Band V	4132	V	21.25	38.45	Pass
		H	16.16		
	4182	V	20.98		
		H	16.89		
	4233	V	21.14		
		H	16.67		

4.7. Radiated Spurious Emission

LIMIT

-13dBm

TEST CONFIGURATION

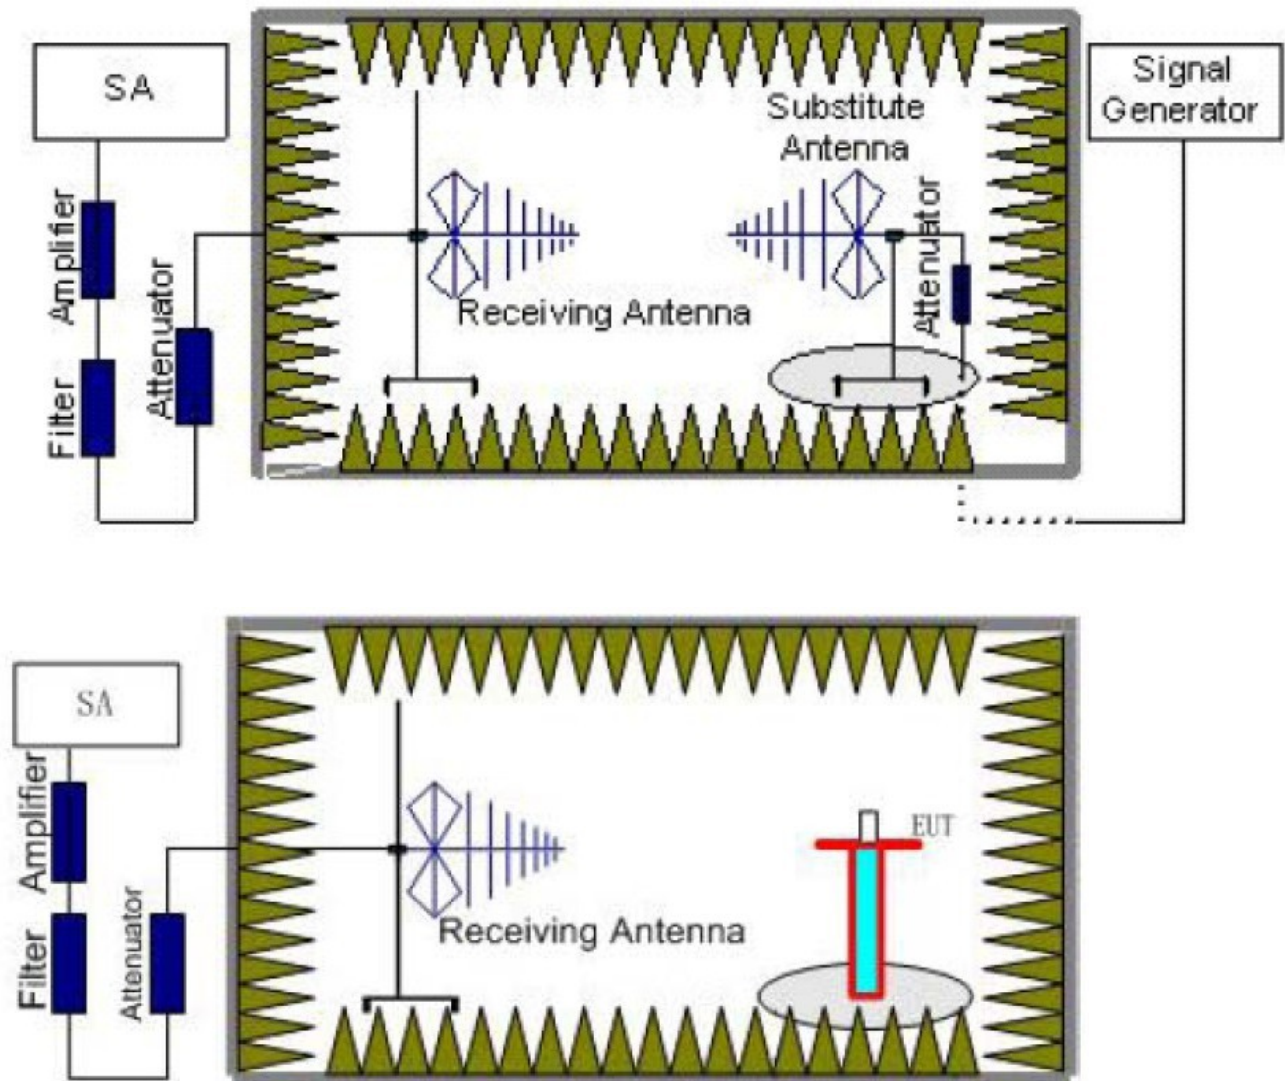

TEST RESULTS

1. EUT was placed on a 1.50 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.50m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as (Pr).

4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
6. The measurement results are obtained as described below:
Power(EIRP)=PMea- PAg - Pcl + Ga
We used SMF100A micowave signal generator which signal level can up to 33dBm,so we not used power Amplifier for substitution test; The measurement results are amend as described below:
Power(EIRP)=PMea- Pcl + Ga
7. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP-2.15dBi.

TEST RESULTS

GSM850					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
128	1648.40	Vertical	-34.71	-13.00	Pass
	2472.60	V	-37.39		
	3296.80	V	-39.59		
	4121.00	V	-41.73		
	4945.20	V	---		
	1648.40	Horizontal	-39.85	-13.00	Pass
	2472.60	H	-43.64		
	3296.80	H	-45.15		
	4121.00	H	-47.8		
	4945.20	H	---		
190	1673.20	Vertical	-35.83	-13.00	Pass
	2509.80	V	-38.06		
	3346.40	V	-39.90		
	4183.00	V	-41.69		
	5019.60	V	---		
	1673.20	Horizontal	-42.68	-13.00	Pass
	2509.80	H	-45.84		
	3346.40	H	-47.10		
	4183.00	H	-49.31		
	5019.60	H	---		
251	1697.60	Vertical	-40.12	-13.00	Pass
	2546.40	V	-43.28		
	3395.20	V	-44.54		
	4244.00	V	-46.75		
	5092.80	V	---		
	1697.60	Horizontal	-39.69	-13.00	Pass
	2546.40	H	-42.51		
	3395.20	H	-43.63		
	4244.00	H	-45.60		
	5092.80	H	---		

Remark :

1. The emission behaviour belongs to narrowband spurious emission.
2. Remark"---" means that the emission level is too low to be measured
3. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

PCS1900					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
512	3700.40	Vertical	-34.92	-13.00	Pass
	5550.60	V	-37.28		
	7400.80	V	-39.23		
	9251.00	V	-41.12		
	11101.20	V	---		
	3700.40	Horizontal	-39.46	-13.00	Pass
	5550.60	H	-42.81		
	7400.80	H	-44.14		
	9251.00	H	-46.48		
	11101.20	H	---		
661	3760.00	Vertical	-32.88	-13.00	Pass
	5640.00	V	-35.31		
	7520.00	V	-37.31		
	9400.00	V	-39.27		
	11280.00	V	---		
	3760.00	Horizontal	-37.56	-13.00	Pass
	5640.00	H	-41.00		
	7520.00	H	-42.38		
	9400.00	H	-44.79		
	11280.00	H	---		
810	3819.60	Vertical	-33.93	-13.00	Pass
	5729.40	V	-36.29		
	7639.20	V	-38.24		
	9549.00	V	-40.13		
	11458.80	V	---		
	3819.60	Horizontal	-38.47	-13.00	Pass
	5729.40	H	-41.82		
	7639.20	H	-43.15		
	9549.00	H	-45.49		
	11458.80	H	---		

Remark :

1. The emission behaviour belongs to narrowband spurious emission.
2. Remark"---" means that the emission level is too low to be measured
3. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

WCDMA Band II					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
9262	3704.80	Vertical	-34.59	-13.00	Pass
	5557.20	V	-61.39		
	5557.20	V	-38.38		
	7409.60	V	-41.94		
	9262.00	V	---		
	3704.80	Horizontal	-39.73	-13.00	Pass
	5557.20	H	-67.64		
	5557.20	H	-43.94		
	7409.60	H	-48.01		
	9262.00	H	---		
9400	3760.00	Vertical	-35.71	-13.00	Pass
	5640.00	V	-62.06		
	5640.00	V	-38.69		
	7520.00	V	-41.90		
	9400.00	V	---		
	3760.00	Horizontal	-42.56	-13.00	Pass
	5640.00	H	-69.84		
	5640.00	H	-45.89		
	7520.00	H	-49.52		
	9400.00	H	---		
9538	3815.20	Vertical	-40.00	-13.00	Pass
	5722.80	V	-67.28		
	5722.80	V	-43.33		
	7630.40	V	-46.96		
	9538.00	V	---		
	3815.20	Horizontal	-39.57	-13.00	Pass
	5722.80	H	-66.51		
	5722.80	H	-42.42		
	7630.40	H	-45.81		
	9538.00	H	---		

Remark :

4. The emission behaviour belongs to narrowband spurious emission.
5. Remark"---" means that the emission level is too low to be measured
6. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

WCDMA Band V					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
4132	1652.80	Vertical	-34.92	-13.00	Pass
	2479.20	V	-37.28		
	2479.20	V	-39.23		
	3305.60	V	-41.12		
	4132.00	V	---		
	1652.80	Horizontal	-39.46	-13.00	Pass
	2479.20	H	-42.81		
	2479.20	H	-44.14		
	3305.60	H	-46.48		
	4132.00	H	---		
4182	1673.20	Vertical	-32.88	-13.00	Pass
	2509.80	V	-35.31		
	2509.80	V	-37.31		
	3346.40	V	-39.27		
	4183.00	V	---		
	1673.20	Horizontal	-37.56	-13.00	Pass
	2509.80	H	-41.00		
	2509.80	H	-42.38		
	3346.40	H	-44.79		
	4183.00	H	---		
4233	1693.20	Vertical	-33.93	-13.00	Pass
	2539.80	V	-36.29		
	2539.80	V	-38.24		
	3386.40	V	-40.13		
	4233.00	V	---		
	1693.20	Horizontal	-38.47	-13.00	Pass
	2539.80	H	-41.82		
	2539.80	H	-43.15		
	3386.40	H	-45.49		
	4233.00	H	---		

Remark :


4. The emission behaviour belongs to narrowband spurious emission.
5. Remark"---" means that the emission level is too low to be measured
6. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

4.8. Frequency stability V.S. Temperature measurement

LIMIT

2.5ppm

TEST CONFIGURATION

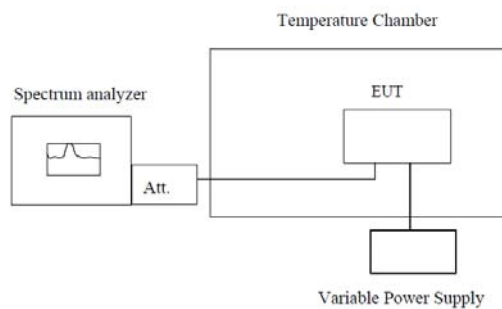

Note : Measurement setup for testing on Antenna connector

TEST PROCEDURE

1. The equipment under test was connected to an external DC power supply and input rated voltage.
2. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators.
3. The EUT was placed inside the temperature chamber.
4. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25°C operating frequency as reference frequency.
5. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency.
6. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

TEST RESULTS

Reference Frequency: GSM850 Middle channel=190 channel=836.6MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	45	0.054	2.5	Pass
	-20	41	0.049		
	-10	34	0.041		
	0	32	0.038		
	10	31	0.037		
	20	26	0.031		
	30	35	0.042		
	40	37	0.044		
	50	31	0.037		
Reference Frequency: PCS1900 Middle channel=661 channel=1880MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	38	0.020	2.5	Pass
	-20	36	0.019		
	-10	31	0.016		
	0	39	0.021		
	10	28	0.015		
	20	24	0.013		
	30	32	0.017		
	40	31	0.016		
	50	33	0.018		


Reference Frequency: WCDMA Band II Middle channel=9400 channel=1880MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	44	0.023	2.5	Pass
	-20	46	0.024		
	-10	35	0.019		
	0	33	0.018		
	10	35	0.019		
	20	26	0.014		
	30	35	0.019		
	40	36	0.019		
	50	37	0.020		
Reference Frequency: WCDMA Band V Middle channel=4182 channel=836.6MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	37	0.044	2.5	Pass
	-20	36	0.043		
	-10	35	0.042		
	0	39	0.047		
	10	27	0.032		
	20	26	0.031		
	30	33	0.039		
	40	33	0.039		
	50	32	0.038		

4.9. Frequency stability V.S. Temperature measurement

LIMIT

2.5ppm

TEST CONFIGURATION

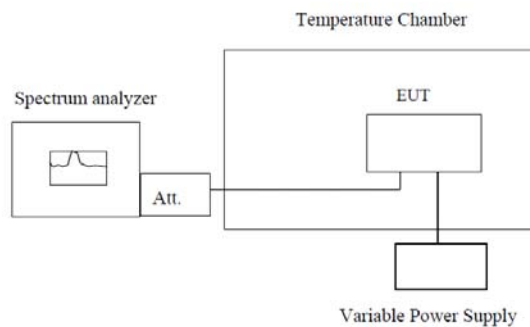

Note : Measurement setup for testing on Antenna connector

TEST PROCEDURE



1. Set chamber temperature to 25°C. Use a variable DC power source to power the EUT and set the voltage to rated voltage.
2. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.
3. Reduce the input voltage to specified extreme voltage variation (+/- 15%) and endpoint, record the maximum frequency change.

TEST RESULTS

Reference Frequency: GSM850 (GSM link) Middle channel=190 channel=836.6MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	28	0.033	2.5	Pass
	3.70	26	0.031		
	3.40	34	0.041		
Reference Frequency: PCS1900 (GSM link) Middle channel=661 channel=1880MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	53	0.028	2.5	Pass
	3.70	44	0.023		
	3.40	56	0.030		
Reference Frequency: WCDMA Band II Middle channel=9400 channel=1880MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	51	0.027	2.5	Pass
	3.70	56	0.030		
	3.40	51	0.027		
Reference Frequency: WCDMA Band V Middle channel=4182 channel=836.6MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	68	0.081	2.5	Pass
	3.70	49	0.059		
	3.40	64	0.077		

5. Test Setup Photos of the EUT

Radiated emission:

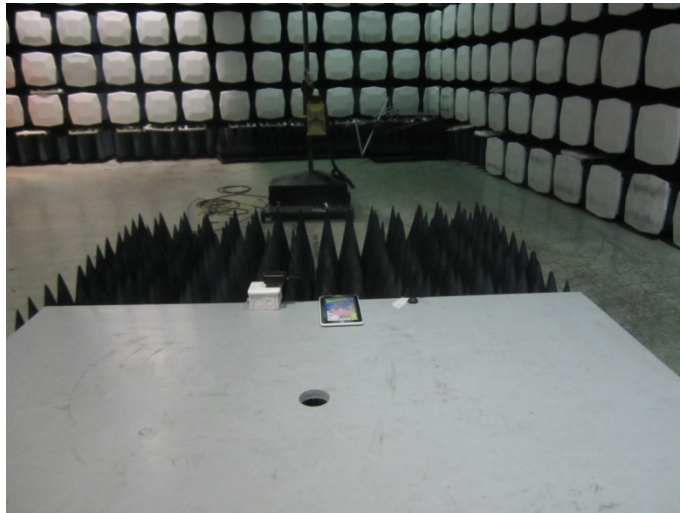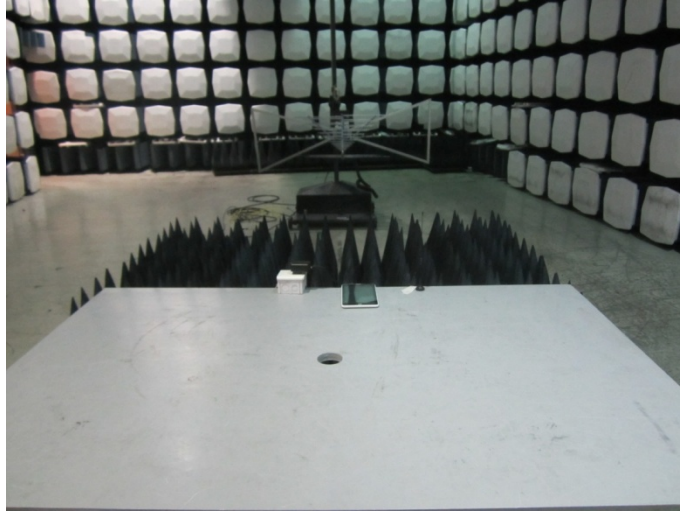

Conducted emission:







6. External and Internal Photos of the EUT










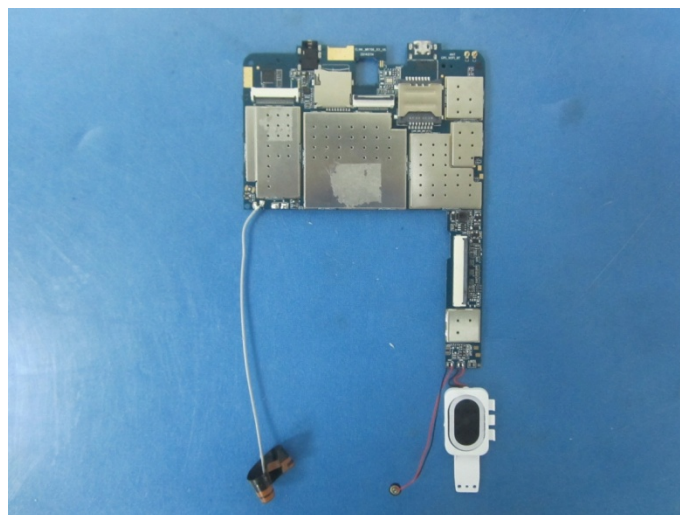

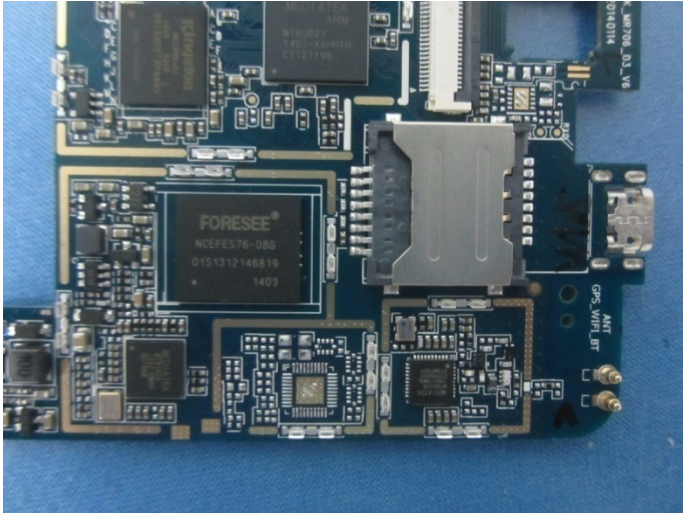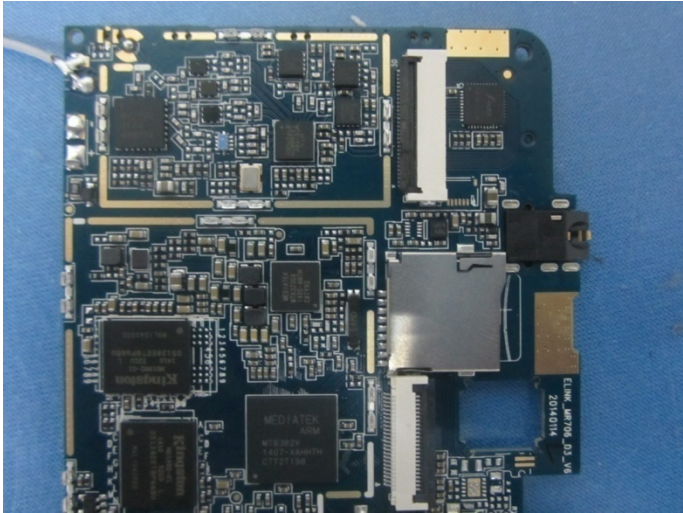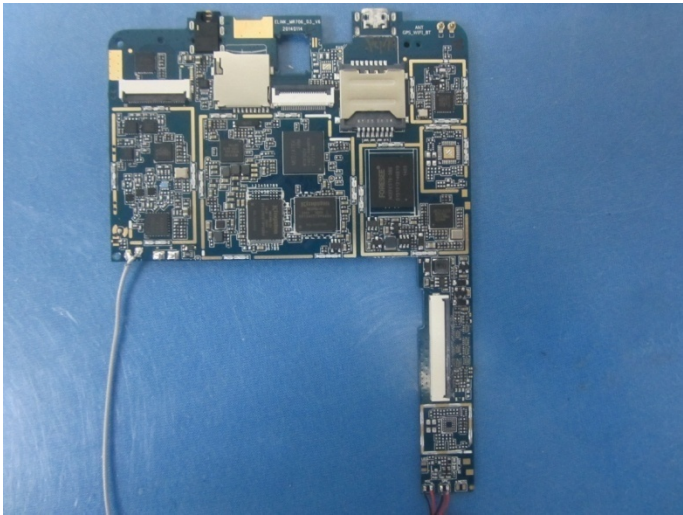

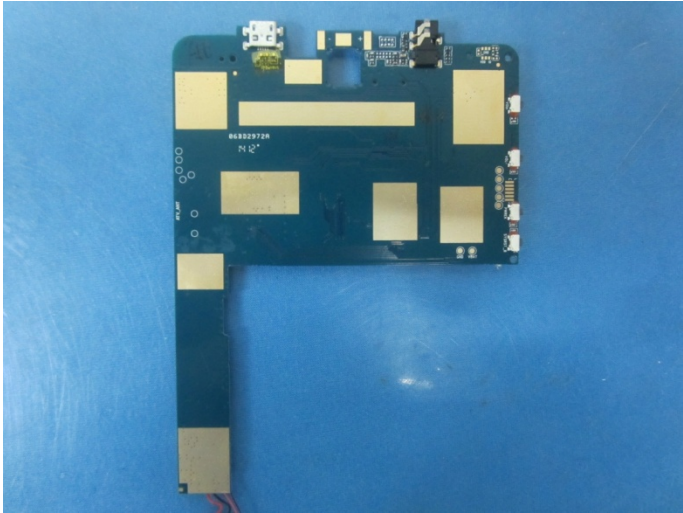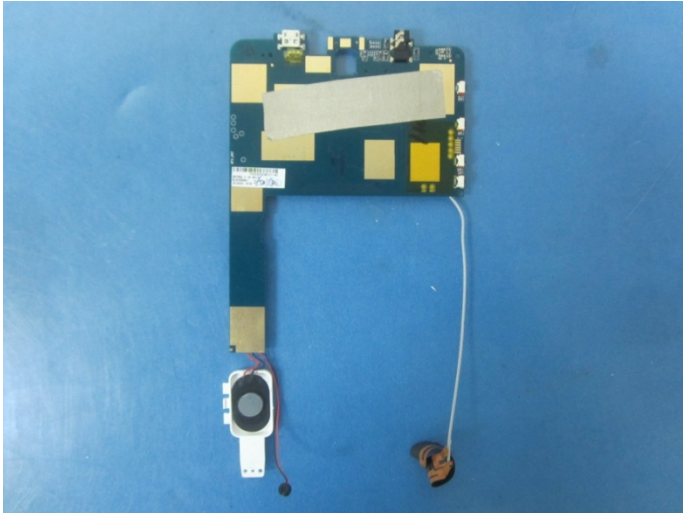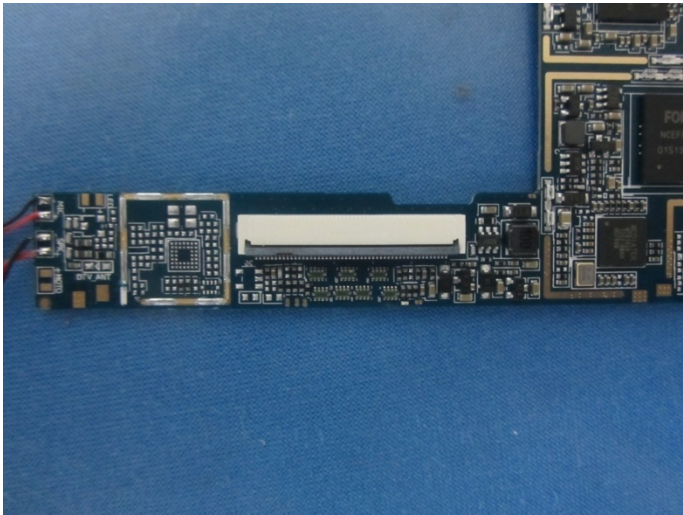

.....End of Report.....