


FCC RADIO TEST REPORT

Prepared For	CAMI (HK) COMPANY LIMITED
Product Name:	Universal Tablet mount
Trade Name:	N/A
Model Name :	IPD-UNVBT, UM-10-3R, UM-10-3F, UM-10-3, IPD-UNV
FCC ID:	2AB9ZIPD-UNVBT
Prepared By	DongGuan Precise Testing Service Co.,Ltd.
	Room 203-204, 2F, Xinye Building, No.67 Shijing, Guanzhang Road, Dongguan, China
Report No.	PTS20140412F1
Test Date:	Apr. 09 ~ Apr. 16, 2014
Date of Report :	Apr.16, 2014

VERIFICATION OF COMPLIANCE


Applicant:	CAMI (HK) COMPANY LIMITED
Address	Room 903, 9/F, New commerce centre, 19 On Sum Street, Shatin, N.T. Hong Kong
Manufacturer Name:	JIANGMEN CITY XANTOUR TECHNOLOGY CO., LTD
Address:	Room 101-102, building 8, die cui garden. NO.37 zhen xing road 1, xin hui area, jiang men city, Guangdong province, China
Product Description:	Universal Tablet mount
Brand Name:	N/A
Model Name:	IPD-UNVBT, UM-10-3R, UM-10-3F, UM-10-3, IPD-UNV
Model difference:	Only model names are different.
Test procedure	ANSI C63.4
Standards	FCC Part15.239

Prepared by :




Assistant

Reviewer :



Supervisor

Approved & Authorized Signer :



Jacky Ou / Manager

Table of Contents	Page
1 . SUMMARY OF TEST RESULTS	4
1.1 TEST FACILITY	5
1.2 MEASUREMENT UNCERTAINTY	5
2 . GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 DESCRIPTION OF TEST MODES	7
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	8
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	9
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	10
3 . ANTENNA REQUIREMENT	11
3.1 STANDARD REQUIREMENT	11
3.2 EUT ANTENNA	11
3.3 CONDUCTED EMISSION MEASUREMENT	12
3.3.1 POWER LINE CONDUCTED EMISSION LIMITS	12
3.3.2 TEST PROCEDURE	13
3.3.3 DEVIATION FROM TEST STANDARD	13
3.3.4 TEST SETUP	13
3.2.5 TEST RESULT	14
3.4 RADIATED EMISSION MEASUREMENT	15
3.4.1 RADIATED EMISSION LIMITS	15
3.4.2 TEST PROCEDURE	16
3.4.3 DEVIATION FROM TEST STANDARD	16
3.4.4 TEST SETUP	17
3.4.5 TEST RESULTS (BLOW 30MHZ)	19
3.4.6 TEST RESULTS (BETWEEN 30 – 1000 MHZ)	20
4 . BANDWIDTH TEST	26
4.1 TEST PROCEDURE	26
4.2 DEVIATION FROM STANDARD	26
4.3 TEST SETUP	26
4.4 TEST RESULTS	27
5 . EUT TEST PHOTO	30
APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15, Subpart C (15.239)

Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	N/A	
15.203	Antenna Requirement	Pass	
15.239	Radiated Spurious Emission	Pass	
15.239	Occupied Bandwidth	Pass	

1.1 TEST FACILITY

NTEK Testing Technology Co., Ltd

Add. : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen P.R. China.

FCC FRN Registration No.:238937; IC Registration No.:9270A-1

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %** .

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^\circ\text{C}$
7	Humidity	$\pm 2\%$

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Universal Tablet mount												
Trade Name	N/A												
Model Name	IPD-UNVBT												
Serial Model	UM-10-3R, UM-10-3F, UM-10-3, IPD-UNV												
Model Difference	Only model names are different.												
Product Description	<p>The EUT is a Universal Tablet mount</p> <table border="1"> <tr> <td>Operation Frequency:</td> <td>88.1-107.9MHz</td> </tr> <tr> <td>Modulation Type:</td> <td>FM</td> </tr> <tr> <td>Number Of Channel</td> <td>199CH(See NOTE 2)</td> </tr> <tr> <td>Antenna Designation:</td> <td>integral antenna</td> </tr> <tr> <td>Antenna Gain(Peak)</td> <td>1.0dBi</td> </tr> <tr> <td>Output Power:</td> <td>46.32 dBuV/m (AV Max.)</td> </tr> </table> <p>Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.</p>	Operation Frequency:	88.1-107.9MHz	Modulation Type:	FM	Number Of Channel	199CH(See NOTE 2)	Antenna Designation:	integral antenna	Antenna Gain(Peak)	1.0dBi	Output Power:	46.32 dBuV/m (AV Max.)
Operation Frequency:	88.1-107.9MHz												
Modulation Type:	FM												
Number Of Channel	199CH(See NOTE 2)												
Antenna Designation:	integral antenna												
Antenna Gain(Peak)	1.0dBi												
Output Power:	46.32 dBuV/m (AV Max.)												
Adapter	DC 12V												
Battery	N/A												

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

Channel	Frequency (MHz)
01	88.1
02	88.2
.....
99	97.9
100	98.0
.....
198	107.8
199	107.9

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	88.1MHz
Mode 2	98.1MHz
Mode 3	107.9MHz


For Conducted Emission	
Final Test Mode	Description
Mode 4	N/A

For Radiated Emission	
Final Test Mode	Description
Mode 1	88.1MHz
Mode 2	98.1MHz
Mode 3	107.9MHz

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) During testing, the EUT was actively playing music set to its maximum audio volume in order to generate the worst case emissions (e.g. to generate the maximum bandwidth during bandwidth test). The tuning range of the EUT was manually verified and the conclusion is that it only works at selected channels within 88.1-107.9MHz, not below and not above this range.

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

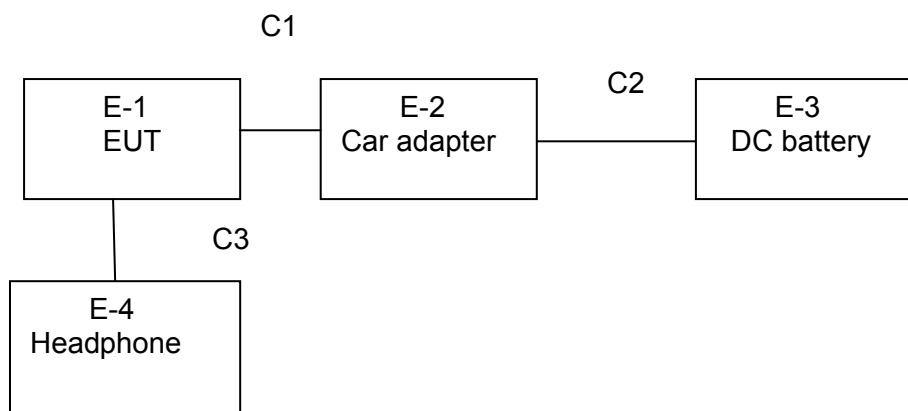

2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Universal Tablet mount	N/A	IPD-UNVBT	N/A	EUT
E-2	Car Adapter	N/A	SK02G-0520200U	N/A	N/A
E-3	DC battery	N/A	12V	N/A	Auxiliary equipment
E-4	Headphone	N/A	N/A	N/A	N/A
E-5	iPod touch(FM receiver)	ipad	16G ME179CH/A	N/A	Auxiliary equipment

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	0.7m	
C-2	NO	NO	0.8m	
C-3	NO	NO	0.8m	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in «Length» column.

2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2013.07.06	2014.07.05	1 year
2	Test Receiver	R&S	ESPI	101318	2013.06.07	2014.06.06	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2013.07.06	2014.07.05	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2013.06.07	2014.06.06	1 year
5	Spectrum Analyzer	ADVANTEST	R3132	150900201	2013.06.07	2014.06.06	1 year
6	Horn Antenna	EM	EM-AH-10180	2011071402	2013.07.06	2014.07.05	1 year
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2013.07.06	2014.07.05	1 year
8	Amplifier	EM	EM-30180	060538	2013.12.22	2014.12.21	1 year
9	Loop Antenna	ARA	PLA-1030/B	1029	2013.06.08	2014.06.07	1 year
10	Power Meter	R&S	NRVS	100696	2013.07.06	2014.07.05	1 year
11	Power Sensor	R&S	URV5-Z4	0395.1619.05	2013.07.06	2014.07.05	1 year

3. ANTENNA REQUIREMENT

3.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

3.2 EUT ANTENNA

The EUT antenna is integral Antenna. It comply with the standard requirement.

3.3 CONDUCTED EMISSION MEASUREMENT

3.3.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5			66 - 56 *	56 - 46 *	CISPR
0.50 -5.0			56.00	46.00	CISPR
5.0 -30.0			60.00	50.00	CISPR

0.15 -0.5			66 - 56 *	56 - 46 *	LP002.
0.50 -5.0			56.00	46.00	LP002.
5.0 -30.0			60.00	50.00	LP002.

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.3.2 TEST PROCEDURE

- a. The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.3.3 DEVIATION FROM TEST STANDARD

No deviation

3.3.4 TEST SETUP

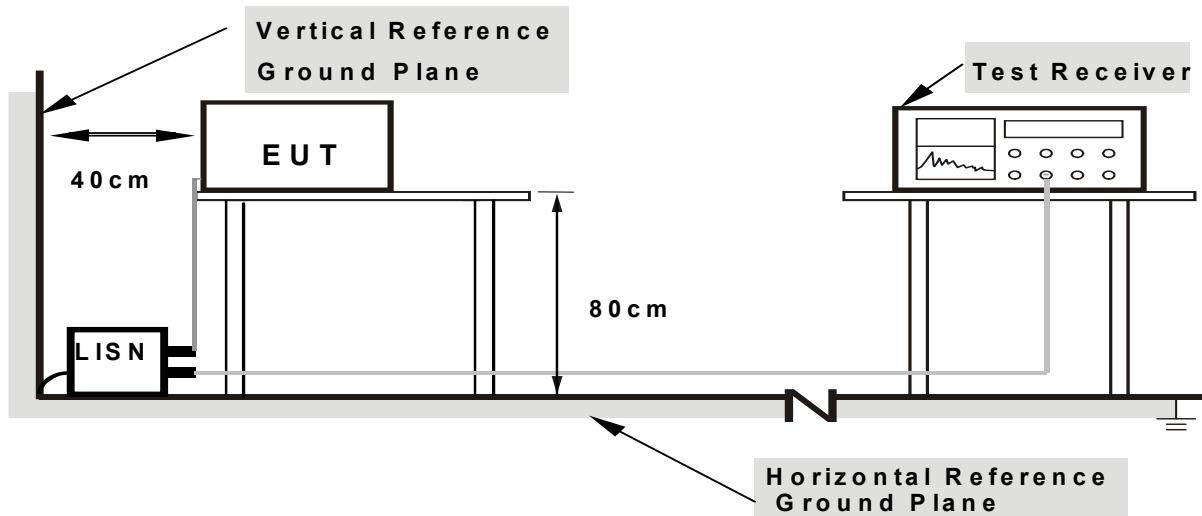

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.2.5 TEST RESULT

EUT :	Universal Tablet mount	Model Name. :	IPD-UNVBT
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	N/A	Test Mode :	N/A

NOTE:This EUT is installed in a car and powered by the car battery only, this test item is not applicable.

3.4 RADIATED EMISSION MEASUREMENT

3.4.1 Radiated Emission Limits (FCC 15.209)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission level (dB μ V/m)=20log Emission level (uV/m).

LIMITS OF RADIATED EMISSION MEASUREMENT (FCC 15.239)

Frequency of Emission (MHz)	Field Strength of fundamental (dB μ V/m)	
	Peak	Average
88-108	68	48

Notes:

- (1) Fcc part15.239 (b) The field strength of any emissions within the permitted 200 kHz band shall not exceed 250 microvolts/meter at 3 meters. The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in Section 15.35 for limiting peak emissions apply.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1MHz / 1MHz for Peak

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.4.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3m meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.4.3 DEVIATION FROM TEST STANDARD


No deviation

3.4.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

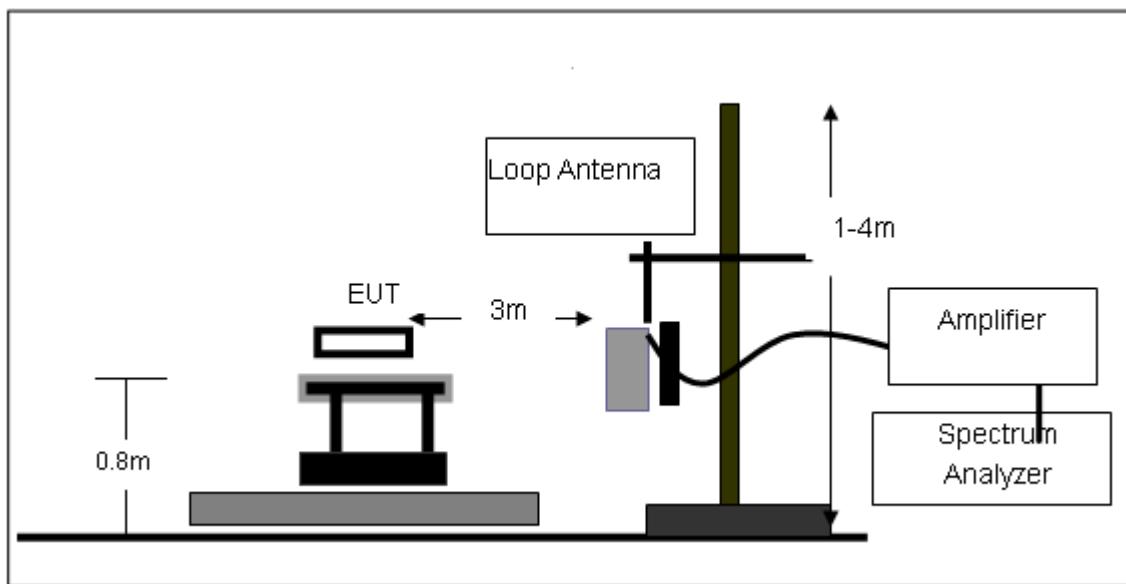

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

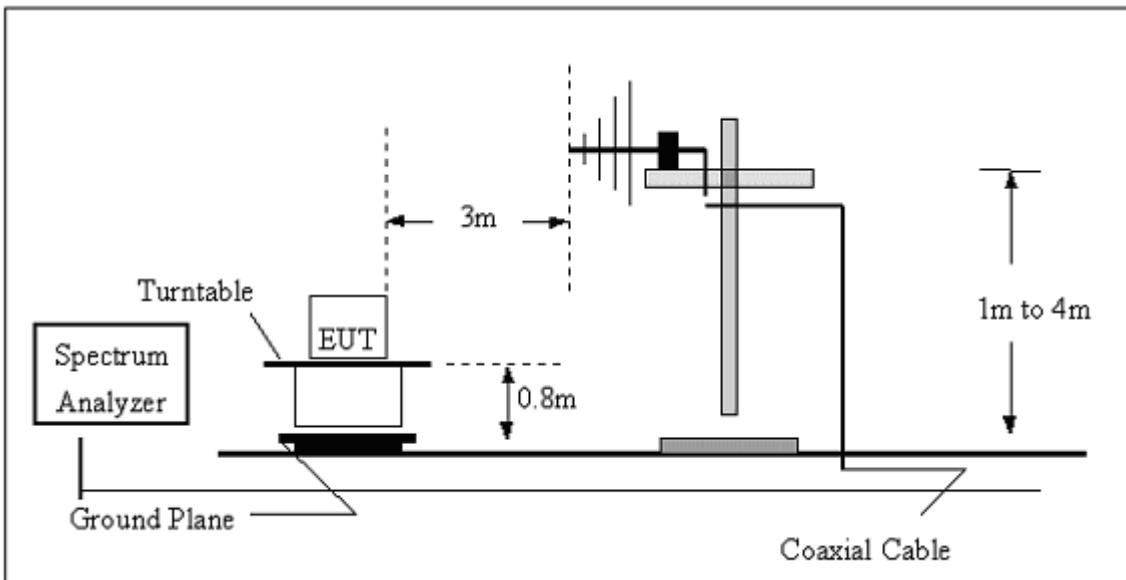

(C) Radiated Emission Test-Up Frequency Above 1GHz

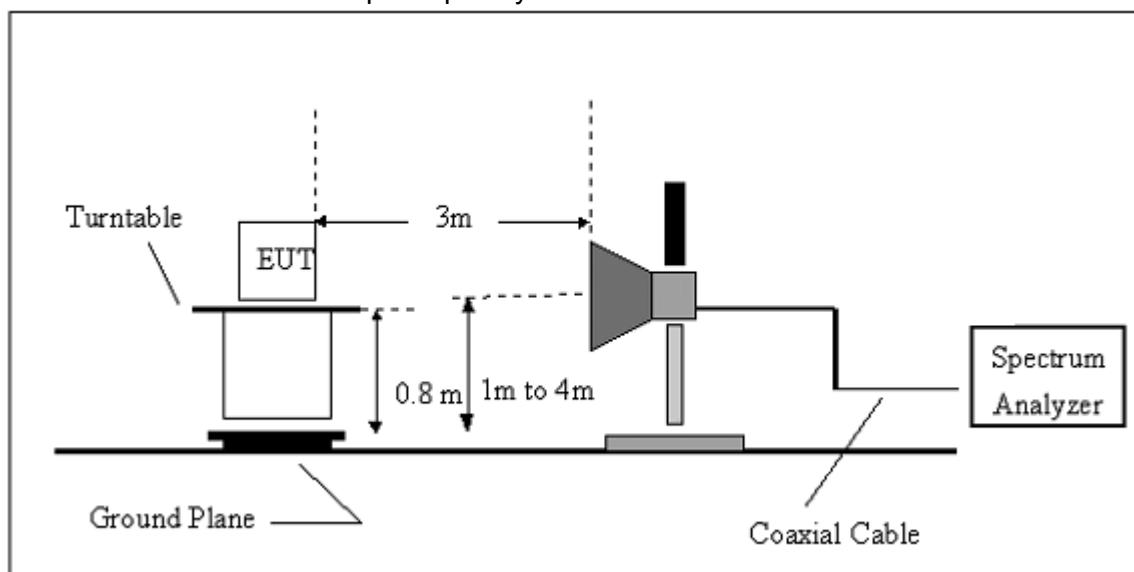

3.4.5 TEST RESULTS (BLOW 30MHz)

EUT :	Universal Tablet mount	Model Name. :	IPD-UNVBT
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 12V
Test Mode :	TX	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})$ (dB);
 Limit line = specific limits(dBuV) + distance extrapolation factor.


3.4.6 TEST RESULTS (BETWEEN 30 – 1000 MHZ)

EUT :	Universal Tablet mount	Model Name :	IPD-UNVBT
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 12V
Test Mode :	88.1MHz	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
35.6699	13.93	15.36	29.29	40	-10.71	QP
69.45	25.28	5.93	31.21	40	-8.79	QP
88.1	43.06	9.09	52.15	68	-15.85	peak
88.1	37.23	9.09	46.32	48	-1.68	AVG
176.2	26.56	9.69	36.25	43.5	-7.25	QP
264.3	23.34	13.94	37.28	46	-8.72	QP

Remark:


1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

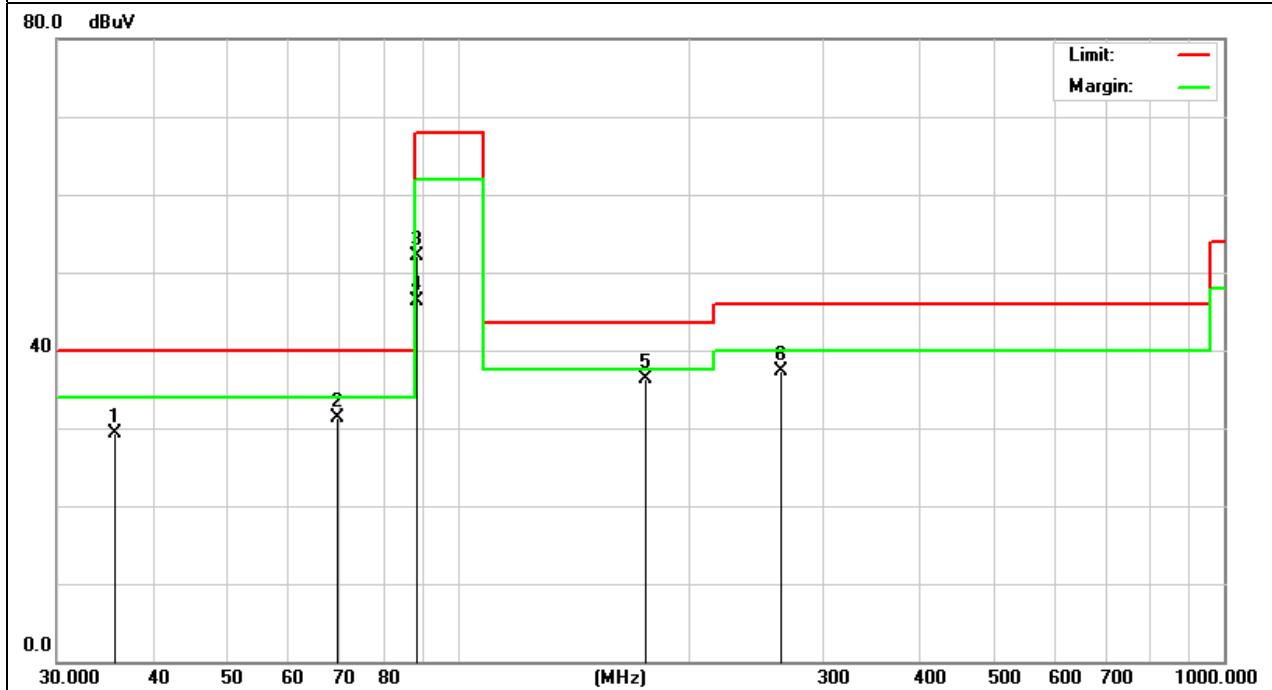

EUT :	Universal Tablet mount	Model Name :	IPD-UNVBT
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 12V
Test Mode :	88.1MHz	Polarization :	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
50.12	17.07	8.12	25.19	40	-14.81	QP
70.45	29.02	6.09	35.11	40	-4.89	QP
88.1	40.1	9.09	49.19	68	-18.81	peak
88.1	35.24	9.09	44.33	48	-3.67	AVG
176.2	20.56	9.69	30.25	43.5	-13.25	QP
264.3	21.84	13.94	35.78	46	-10.22	QP

Remark:

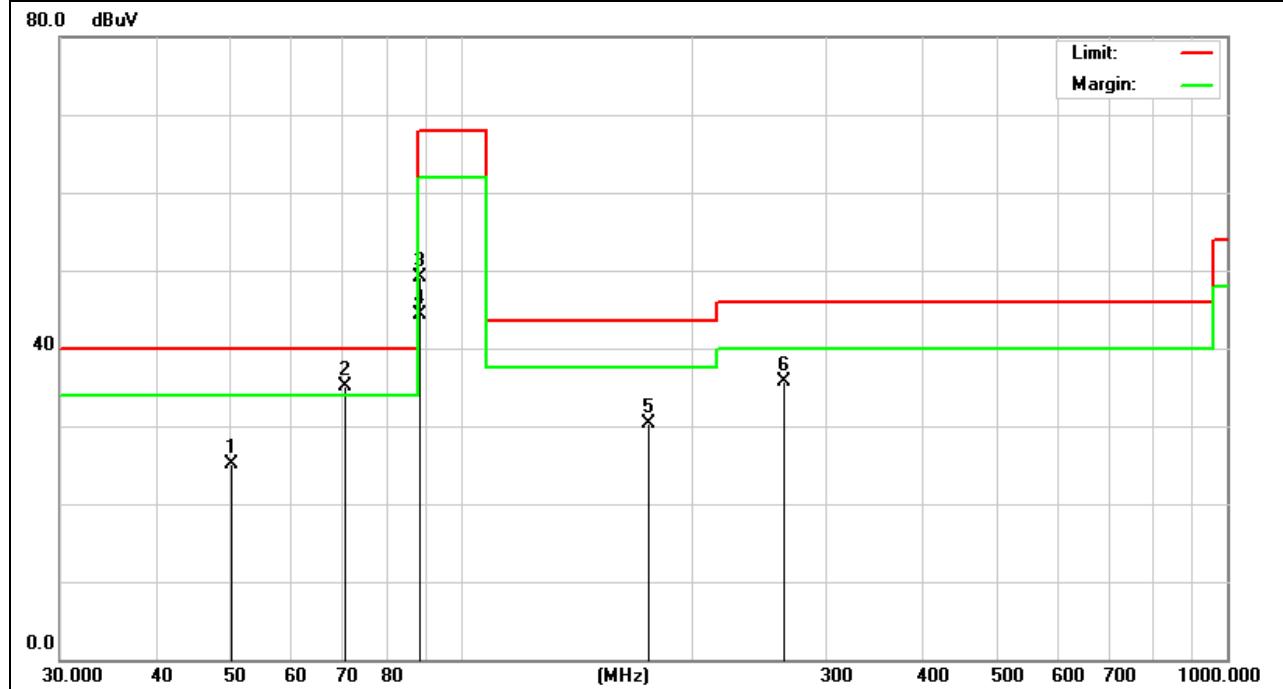
 1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.


EUT :	Universal Tablet mount	Model Name :	IPD-UNVBT
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 12V
Test Mode :	98.1MHz	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
35.6699	13.93	15.36	29.29	40	-10.71	QP
69.45	25.28	5.93	31.21	40	-8.79	QP
98.1	40.89	10.3	51.19	68	-16.81	peak
98.1	35.59	10.3	45.89	48	-2.11	AVG
196.2	32.19	8.68	40.87	43.5	-2.63	QP
294.3	19.88	14.3	34.18	46	-11.82	QP

Remark:


1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

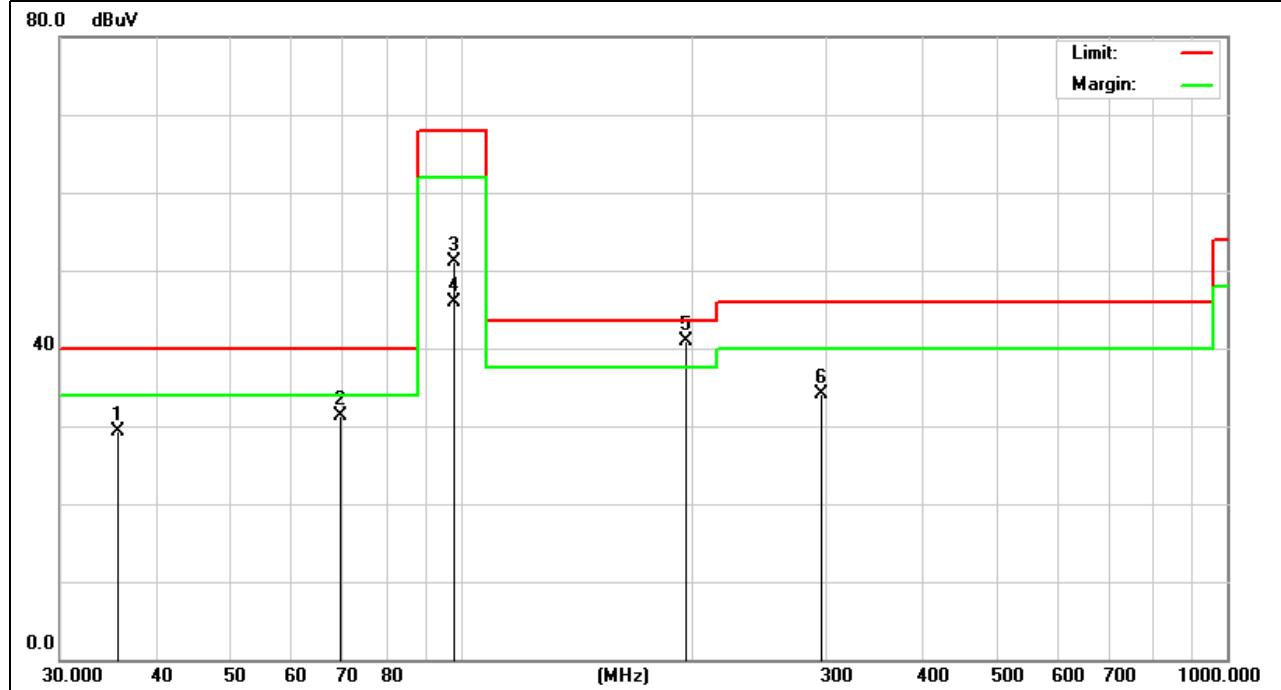

EUT :	Universal Tablet mount	Model Name :	IPD-UNVBT
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 12V
Test Mode :	98.1MHz	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
50.12	17.07	8.12	25.19	40	-14.81	QP
70.45	29.02	6.09	35.11	40	-4.89	QP
98.1	42.48	10.3	52.78	68	-15.22	peak
98.1	34.43	10.3	44.73	48	-3.27	AVG
196.2	22.8	8.68	31.48	43.5	-12.02	QP
294.3	22.59	14.3	36.89	46	-9.11	QP

Remark:

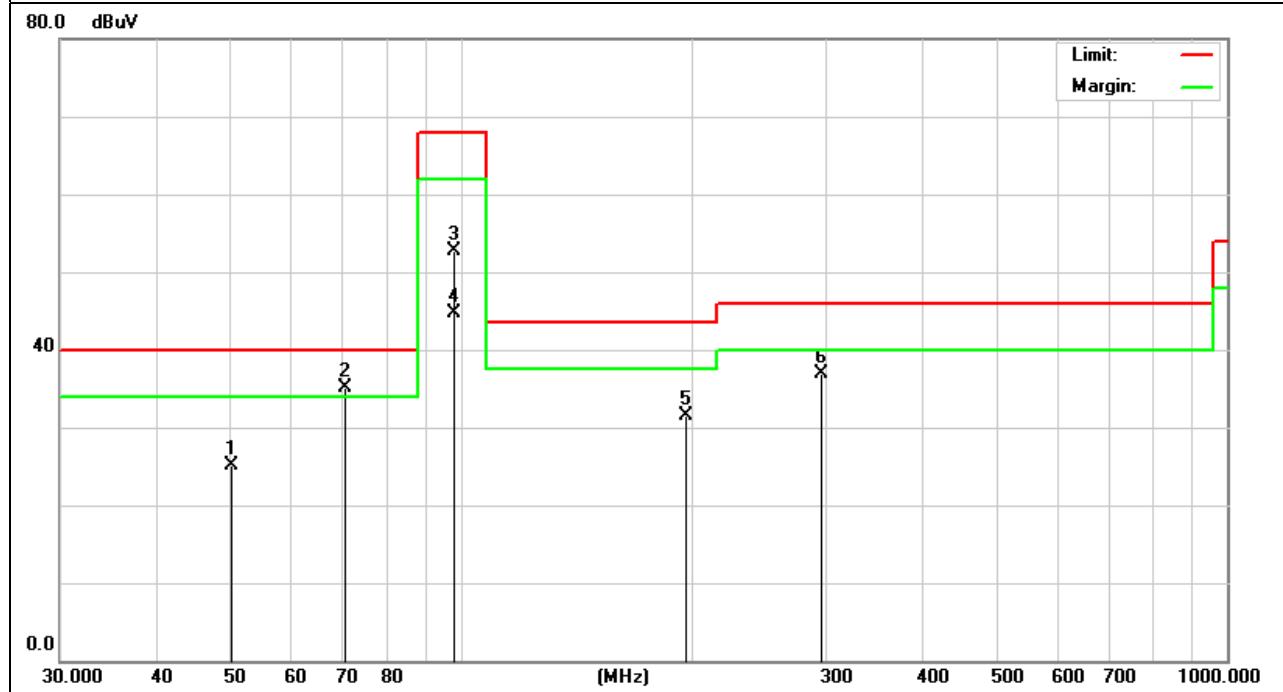
 1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.


EUT :	Universal Tablet mount	Model Name :	IPD-UNVBT
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 12V
Test Mode :	107.9MHz	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
35.6699	13.93	15.36	29.29	40	-10.71	QP
69.45	25.28	5.93	31.21	40	-8.79	QP
107.9	41.67	11.21	52.88	68	-15.12	peak
107.9	35.06	11.21	46.27	48	-1.73	AVG
215.8	26.79	9.5	36.29	43.5	-7.21	QP
323.7	18.75	14.81	33.56	46	-12.44	QP

Remark:


1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

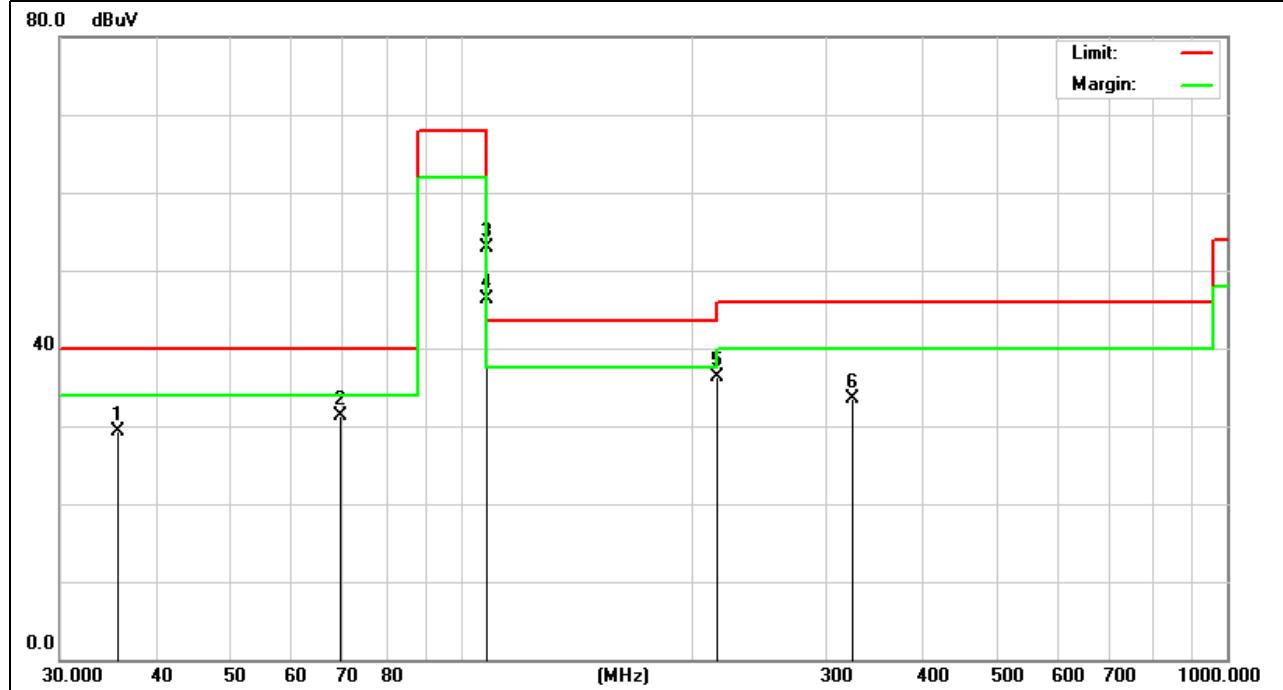

EUT :	Universal Tablet mount	Model Name :	IPD-UNVBT
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 12V
Test Mode :	107.9MHz	Polarization :	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
50.12	17.07	8.12	25.19	40	-14.81	QP
70.45	29.02	6.09	35.11	40	-4.89	QP
107.9	43.08	11.21	54.29	68	-13.71	peak
107.9	34.77	11.21	45.98	48	-2.02	AVG
215.8	20.75	9.5	30.25	43.5	-13.25	QP
323.7	21.1	14.81	35.91	46	-10.09	QP

Remark:

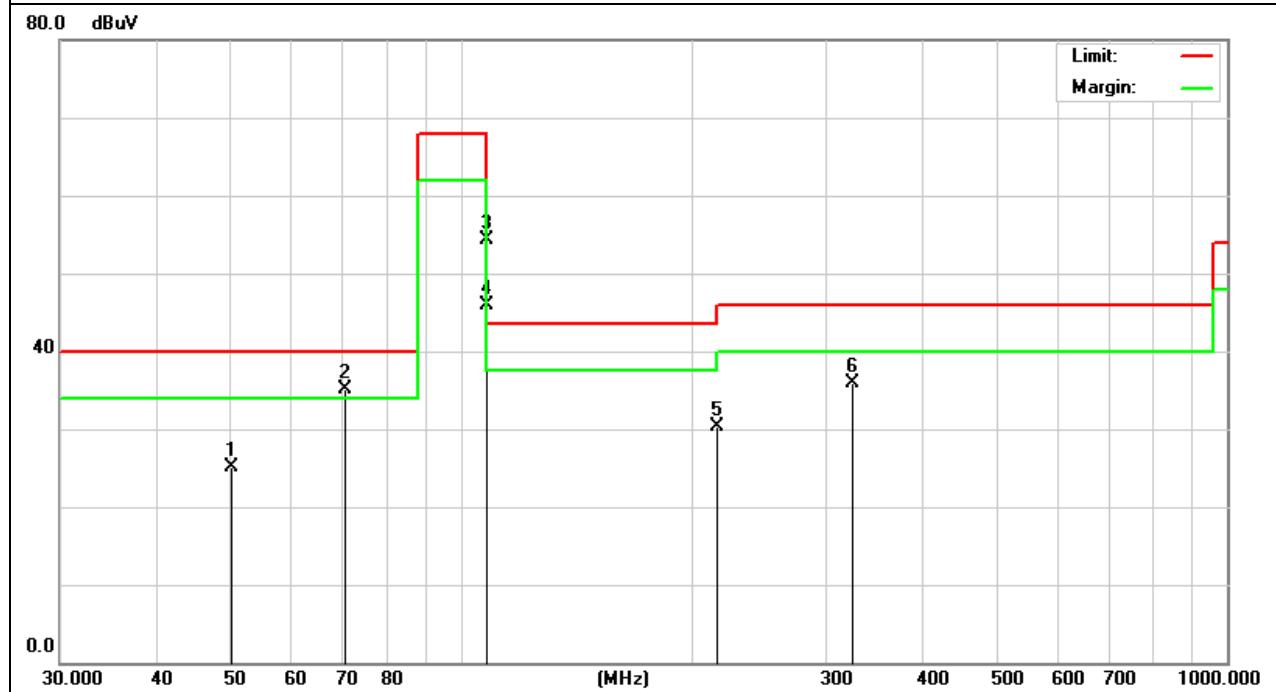 1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.


4. BANDWIDTH TEST


4.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting : RBW= 10KHz, VBW \geq RBW, Sweep time = Auto.

4.2 DEVIATION FROM STANDARD

No deviation.

4.3 TEST SETUP

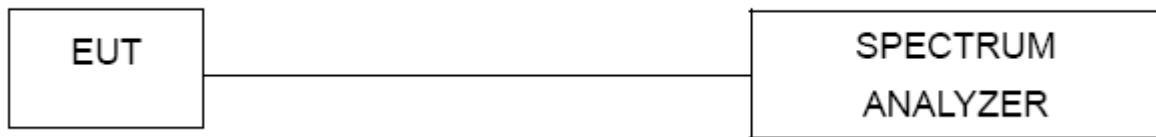


4.4 TEST RESULTS


EUT :	Universal Tablet mount	Model Name :	IPD-UNVBT
Temperature :	26 °C	Relative Humidity :	53%
Pressure :	1020 hPa	Test Power :	DC 12V
Test Mode :	TX		

Test Channel	Frequency (MHz)	20 dBc Bandwidth (KHz)	Limit (KHz)
Low	88.1	131.442	200
Mid	98.1	156.372	200
High	107.9	156.635	200


The Lowest Channel: 88.1MHz

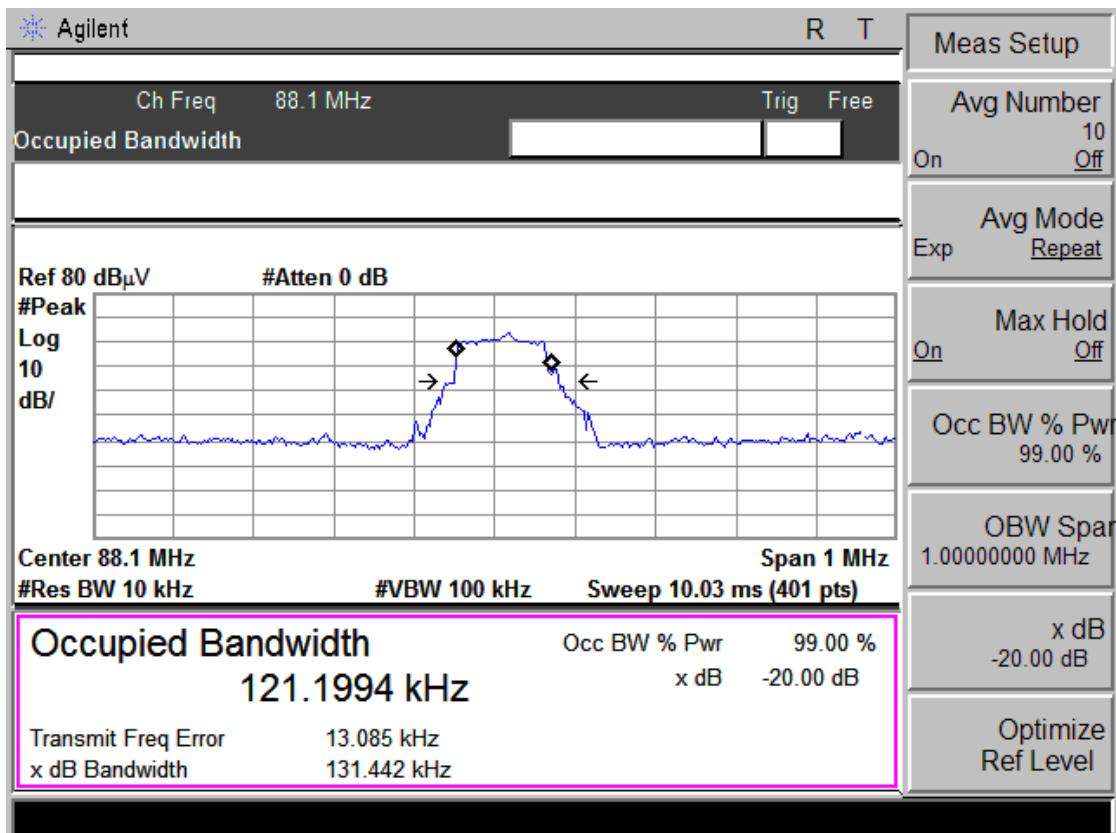

The Middle Channel: 98.1MHz

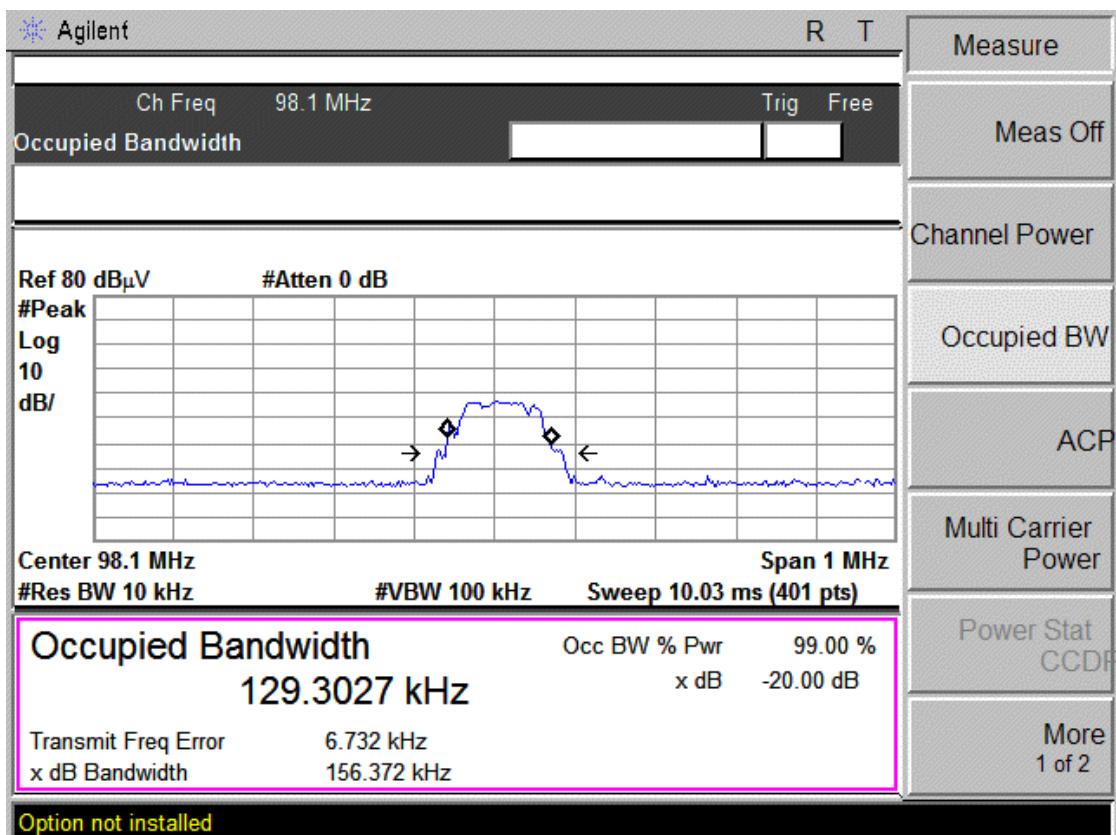

The High Channel:107.9MHz

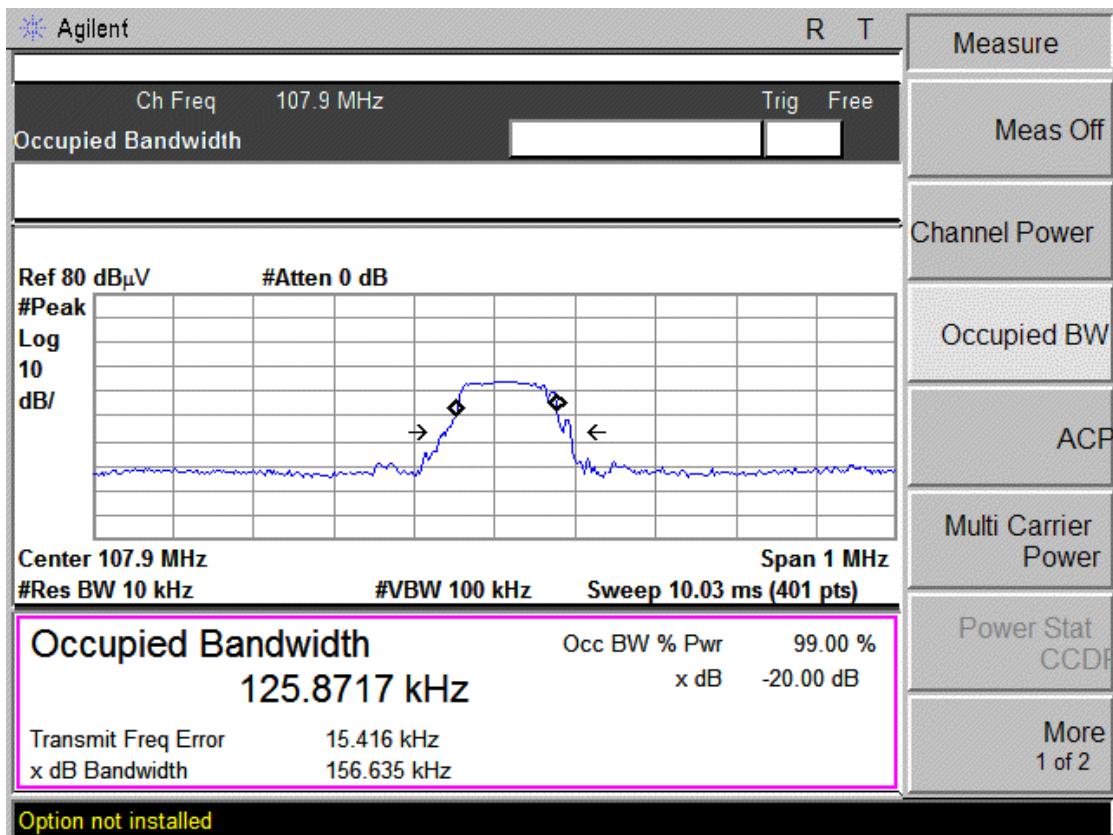

5. EUT TEST PHOTO

Radiated Measurement Photos

