



Shenzhen Lejin radio frequency technology Co., LTD

SPECIFICATIONS FOR APPROVAL

Customer Name: SHENZHEN ELECTRON TECHNOLOGY CO.,LTD

Product Name: WIFI Antenna

Product Model: NW2493

Part Number: LJF02-22050908-R0A

Write By : Huxuwen

Issued Date: 2022-05-09

CUSTOMER

ENGINEER R&D DEPT	BUSSINESS DEPT	APPROVAL

LEJIN

R&D DEPT	ENGINEER DEPT	APPROVAL

REV	MODIFIED DESCRIPTION	DATE	REMARK
V1.0	Initial Draft Release	2022/05/09	



Index

1. Cover	1
2. Index	2
3. Product Specification	3
4. Test Equipment & Conditions	3
5. Test Report	4
6. Reliability Test	5
7. Assemble type	6
8. Product Drawing	7

3.Product Specification

A. Electrical Characteristics	
Frequency	2400MHz ~2500 MHz 5150MHz ~5850 MHz
VSWR	<2.0
Efficiency	≥40%
Impedance	50Ohm
Polarization	Linear
Gain(2.4GHz)	≤2.0dBi
Gain(5.8GHz)	≤2.5dBi
B. Material & Mechanical Characteristics	
Material of Radiator	FPC(Black),LJWF27BF
Cable Type	Φ1.13mm,L268mm,Black
Connector Type	IPX1
Dimension	26.0*18.8mm
C. Environmental	
Operation Temperature	- 20 °C ~ + 70 °C
Storage Temperature	- 30 °C ~ + 85 °C
Humidity	40%~95%

4.Test Equipment & Conditions

- | | |
|----------------------------------|---------------------|
| 1.Network Analyzers | Agilent 8753D/5071C |
| 2.HSPA and LTE protocol test set | R&S CMW500 -PT |
| 3.Communications Test Set | Agilent 8960 |
| 4.3D Chamber Test System | |


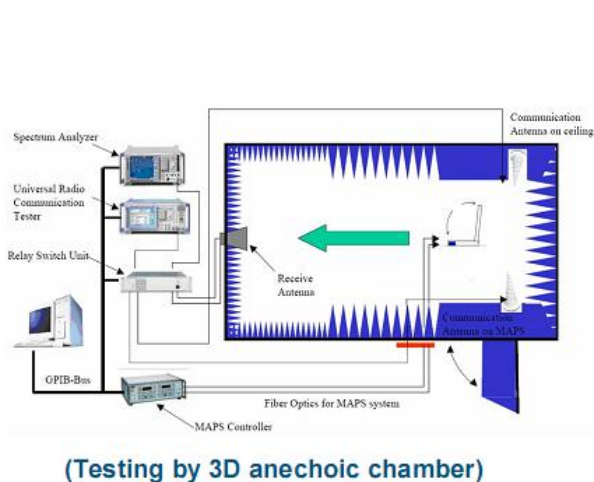


Chart 1 Test topology

5.Test Report

5.1 Voltage Standing Wave Ratio(VSWR).




Chart 2 VSWR

5.2 Efficient and gain.

Passive	Freq(MHz)	2400	2410	2420	2430	2440	2450	2460	2470	2480	2490	2500
Test For	Effi(%)	45.65	48.12	51.20	51.27	53.83	49.54	52.23	51.10	54.04	47.21	43.67
	Gain(dBi)	1.96	1.92	1.91	1.95	2.00	2.00	1.99	1.96	1.95	1.93	1.85



Passive	Freq(MHz)	5150	5200	5250	5300	5350	5400	5450	5500	5550	5600	5650	5700	5750	5800	5850
Test For	Effi(%)	49.58	50.82	49.85	47.93	52.08	52.55	55.11	58.12	56.12	52.62	49.63	49.61	49.72	50.12	47.66
	Gain(dBi)	2.23	2.50	2.29	2.40	2.31	2.43	2.38	2.29	2.48	2.14	2.25	2.27	2.50	2.48	2.22

5.3 Radiation pattern.

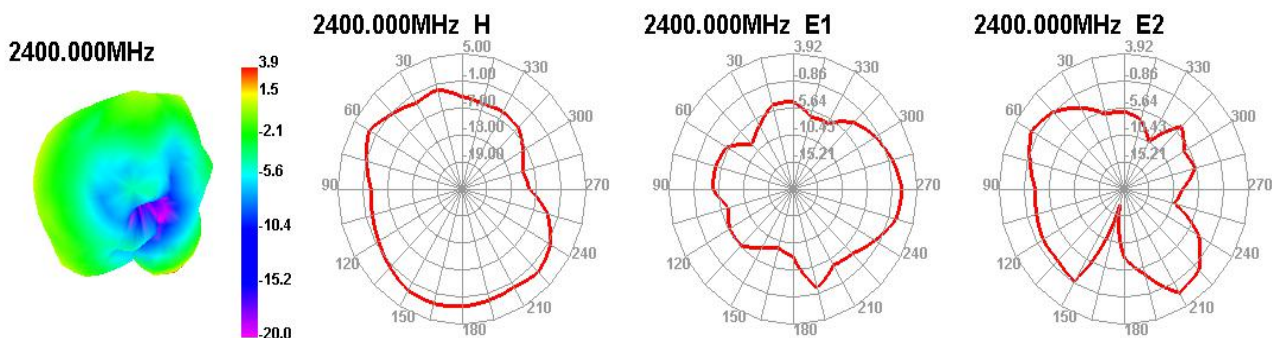





2450.000MHz




2450.000MHz H





2450.000MHz E1




2450.000MHz E2




2500.000MHz




2500.000MHz H





2500.000MHz E1




2500.000MHz E2




5200.000MHz




5200.000MHz H





5200.000MHz E1




5200.000MHz E2




5550.000MHz




5550.000MHz H





5550.000MHz E1




5550.000MHz E2




6000.000MHz




6000.000MHz H



6000.000MHz E1



6000.000MHz E2



6. Reliability Test

Test Item	Test condition	Equipment	Specification	Result
1 Low Temp. Storage Test	Temperature: -30℃, Time:48hrs Test condition: Placing antenna in a Low/High Temperature Chamber, keep the temp is 25℃ and humidity is 65% for one hour, then step-down the temp. to -30℃ in one hour, store antenna for 44 hours; step-up temp to 25℃, test antenna after 2 hours.	Temp.&Humidity Tester	No material deformation is allowed. Electronic Performance is ok.	PASS
2 High Temp./High Humid Storage Test	Temperature: 85℃ Humidity: 85% RH Time:48hrs Test condition: Placing antenna in a Low/High Temperature Chamber, keep the temp is 25℃ and humidity is 65% for one hour, then step-up the temp. to 80℃ and the humidity up to 85% in one hour, store antenna for 44 hours; step-down temp to 25℃, test antenna after 2 hours.	Temp.&Humidity Tester	No material deformation is allowed. Electronic Performance is ok.	PASS
3 Salt-Spray Test	Placing antenna in the Salt-Spray Tester, set the test condition, Temp: $35 \pm 2^\circ\text{C}$ Humidity: 85% NaCl salt spray: $5 \pm 1\%$ PH value: 6.5~7.2 Testtime: 24 hours	Salt-Spray Tester	No color change No appearance rusting	PASS

7. Assemble type

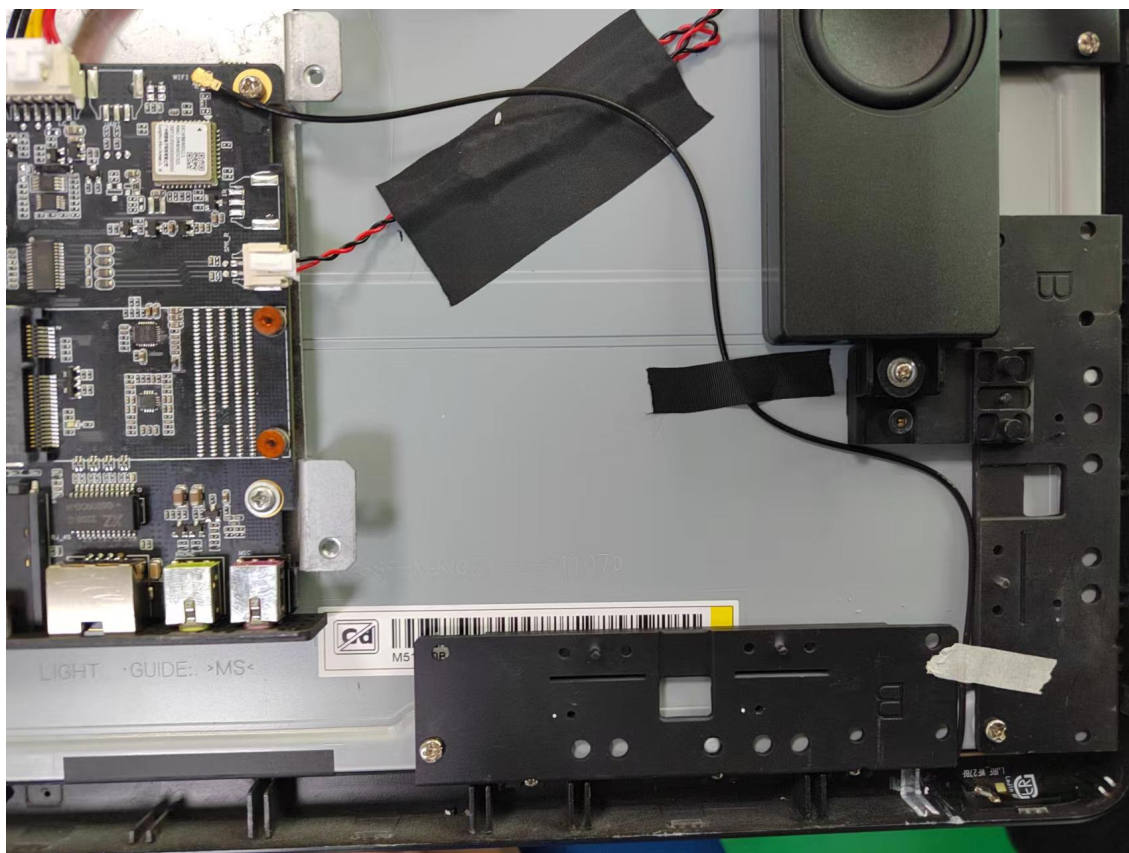


Chart 3 NW2495 assemble type

8. Product Drawing

1		2		3		由 Autodesk 教育版产品制作		6		7		8	
RoHS Compliant G P												A	
LeJin RF LJRF-WF27BF 25.98 18.80 268.0 ± 2.0mm 1.37 黑线, KCC1代端子 1.8-1.7-1.0												A	
A													
D													
Rev													
1													
2													
3													
Date													
Remark													
Location													
0~10 ±0.05 Third Angle 0.02 Project ELC Date 2021-03-06													
10~18 ±0.10 10~18 ±0.10 0.02 Part Name WIFI/BT ANT													
18~30 ±0.12 18~30 ±0.12 0.02 Part No. LJWF27BF													
30~40 ±0.15 30~40 ±0.15 0.04 Material													
40~ ±0.20 40~ ±0.20 0.04 Treatment LJRF2-22050908-R0A													
Unit mm Scale FIT Rev A													
由 Autodesk 教育版产品制作													

1		2		3		由 Autodesk 教育版产品制作		6		7		8	
RoHS Compliant G P												A	
LeJin RF LJRF-WF27BF 25.98 18.80 268.0 ± 2.0mm 1.37 黑线, KCC1代端子 1.8-1.7-1.0												A	
A													
D													
Rev													
1													
2													
3													
Date													
Remark													
Location													
0~10 ±0.05 Third Angle 0.02 Project ELC Date 2021-03-06													
10~18 ±0.10 10~18 ±0.10 0.02 Part Name WIFI/BT ANT													
18~30 ±0.12 18~30 ±0.12 0.02 Part No. LJWF27BF													
30~40 ±0.15 30~40 ±0.15 0.04 Material													
40~ ±0.20 40~ ±0.20 0.04 Treatment LJRF2-22050908-R0A													
Unit mm Scale FIT Rev A													
由 Autodesk 教育版产品制作													