



Shenzhen Lejin radio frequency technology Co., LTD

SPECIFICATIONS FOR APPROVAL

Customer Name: SHENZHEN ELECTRON TECHNOLOGY CO.,LTD

Product Name: WIFI Antenna(WIFI1)

Product Model: WF3205T

Part Number: LJF02-22072608A-R0A

Write By : Huxuwen

Issued Date: 2022-07-26

CUSTOMER

ENGINEER R&D DEPT	BUSSINESS DEPT	APPROVAL
		刘建红

LEJIN

R&D DEPT	ENGINEER DEPT	APPROVAL

REV	MODIFIED DESCRIPTION	DATE	REMARK
V1.0	Initial Draft Release	2022/07/26	



Index

1. Cover	1
2. Index	2
3. Product Specification	3
4. Test Equipment & Conditions	3
5. Test Report	4
6. Reliability Test	5
7. Assemble type	6
8. Product Drawing	8

3.Product Specification

A. Electrical Characteristics	
Frequency	2400MHz ~2500 MHz 5150MHz ~5850 MHz
VSWR	<2.0
Efficiency	≥45%
Impedance	50Ohm
Polarization	Linear
B. Material & Mechanical Characteristics	
Material of Radiator	PCB(Black)
Cable Type	Φ1.13mm,L415mm,Black
Connector Type	IPX1
Dimension	49.0*14.mm
C. Environmental	
Operation Temperature	- 20 °C ~ + 70 °C
Storage Temperature	- 30 °C ~ + 85 °C
Humidity	40%~95%

4.Test Equipment & Conditions

- | | |
|----------------------------------|---------------------|
| 1.Network Analyzers | Agilent 8753D/5071C |
| 2.HSPA and LTE protocol test set | R&S CMW500 -PT |
| 3.Communications Test Set | Agilent 8960 |
| 4.3D Chamber Test System | |

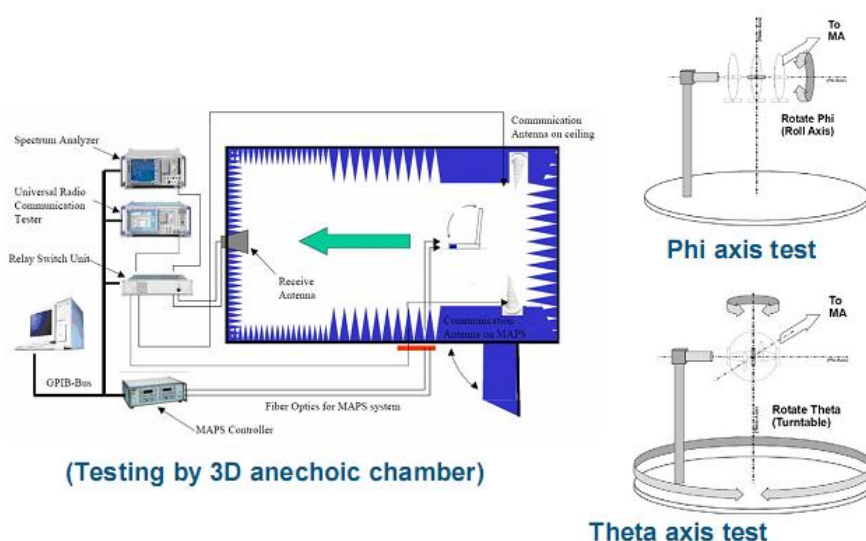


Chart 1 Test topology

5. Test Report

5.1 Voltage Standing Wave Ratio(VSWR).

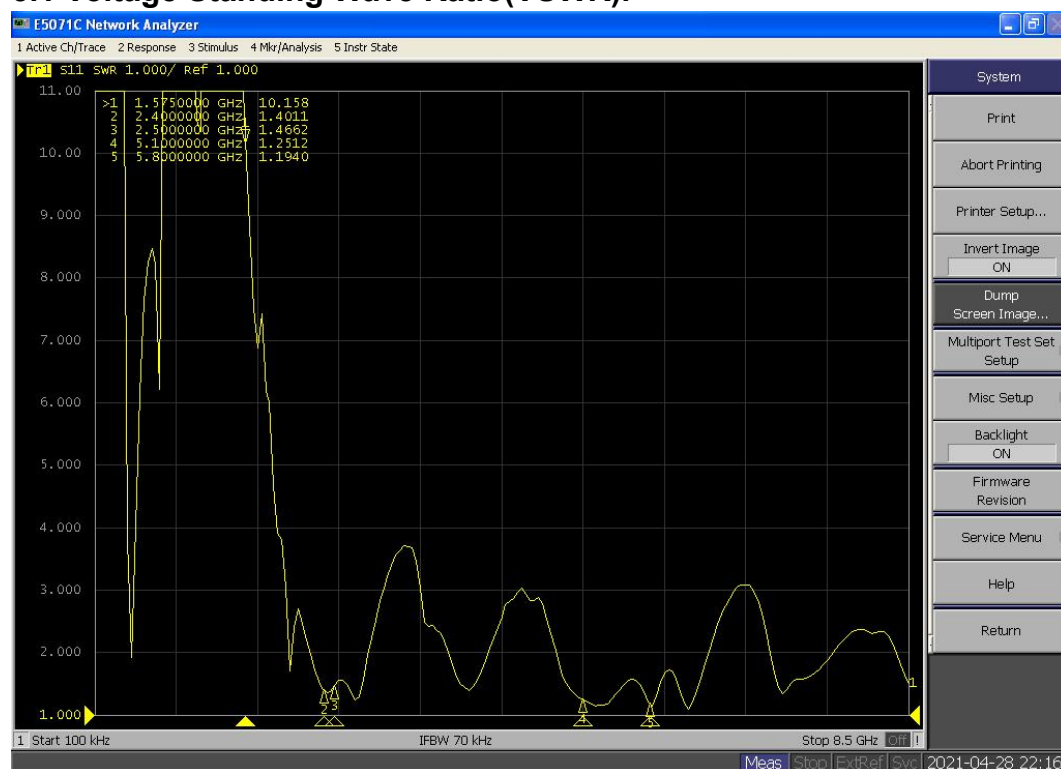


Chart 2 VSWR


5.2 Efficient and gain.

Passive Test For 2.4G	Freq(MHz)	2400	2410	2420	2430	2440	2450	2460	2470	2480	2490	2500
	Effi(%)	52.39	53.08	55.47	58.44	61.55	59.22	63.77	56.72	53.40	53.04	50.96
	Gain(dBi)	2.19	2.11	2.21	2.16	2.13	2.29	2.25	2.27	2.10	2.15	2.07


Passive Test For WIFI 5G	Freq(MHz)	5150	5200	5250	5300	5350	5400	5450	5500	5550	5600	5650	5700	5750	5800	5850
	Effi(%)	56.12	57.89	55.78	59.20	57.21	59.31	61.57	57.47	59.26	55.52	60.42	56.38	57.92	61.61	56.75
	Gain(dBi)	2.14	2.30	2.23	2.28	2.26	2.38	2.48	2.22	2.45	2.39	2.47	2.38	2.28	2.25	2.19

5.3 Radiation pattern.


2400.000MHz




2400.000MHz H




2400.000MHz E1



2400.000MHz E2



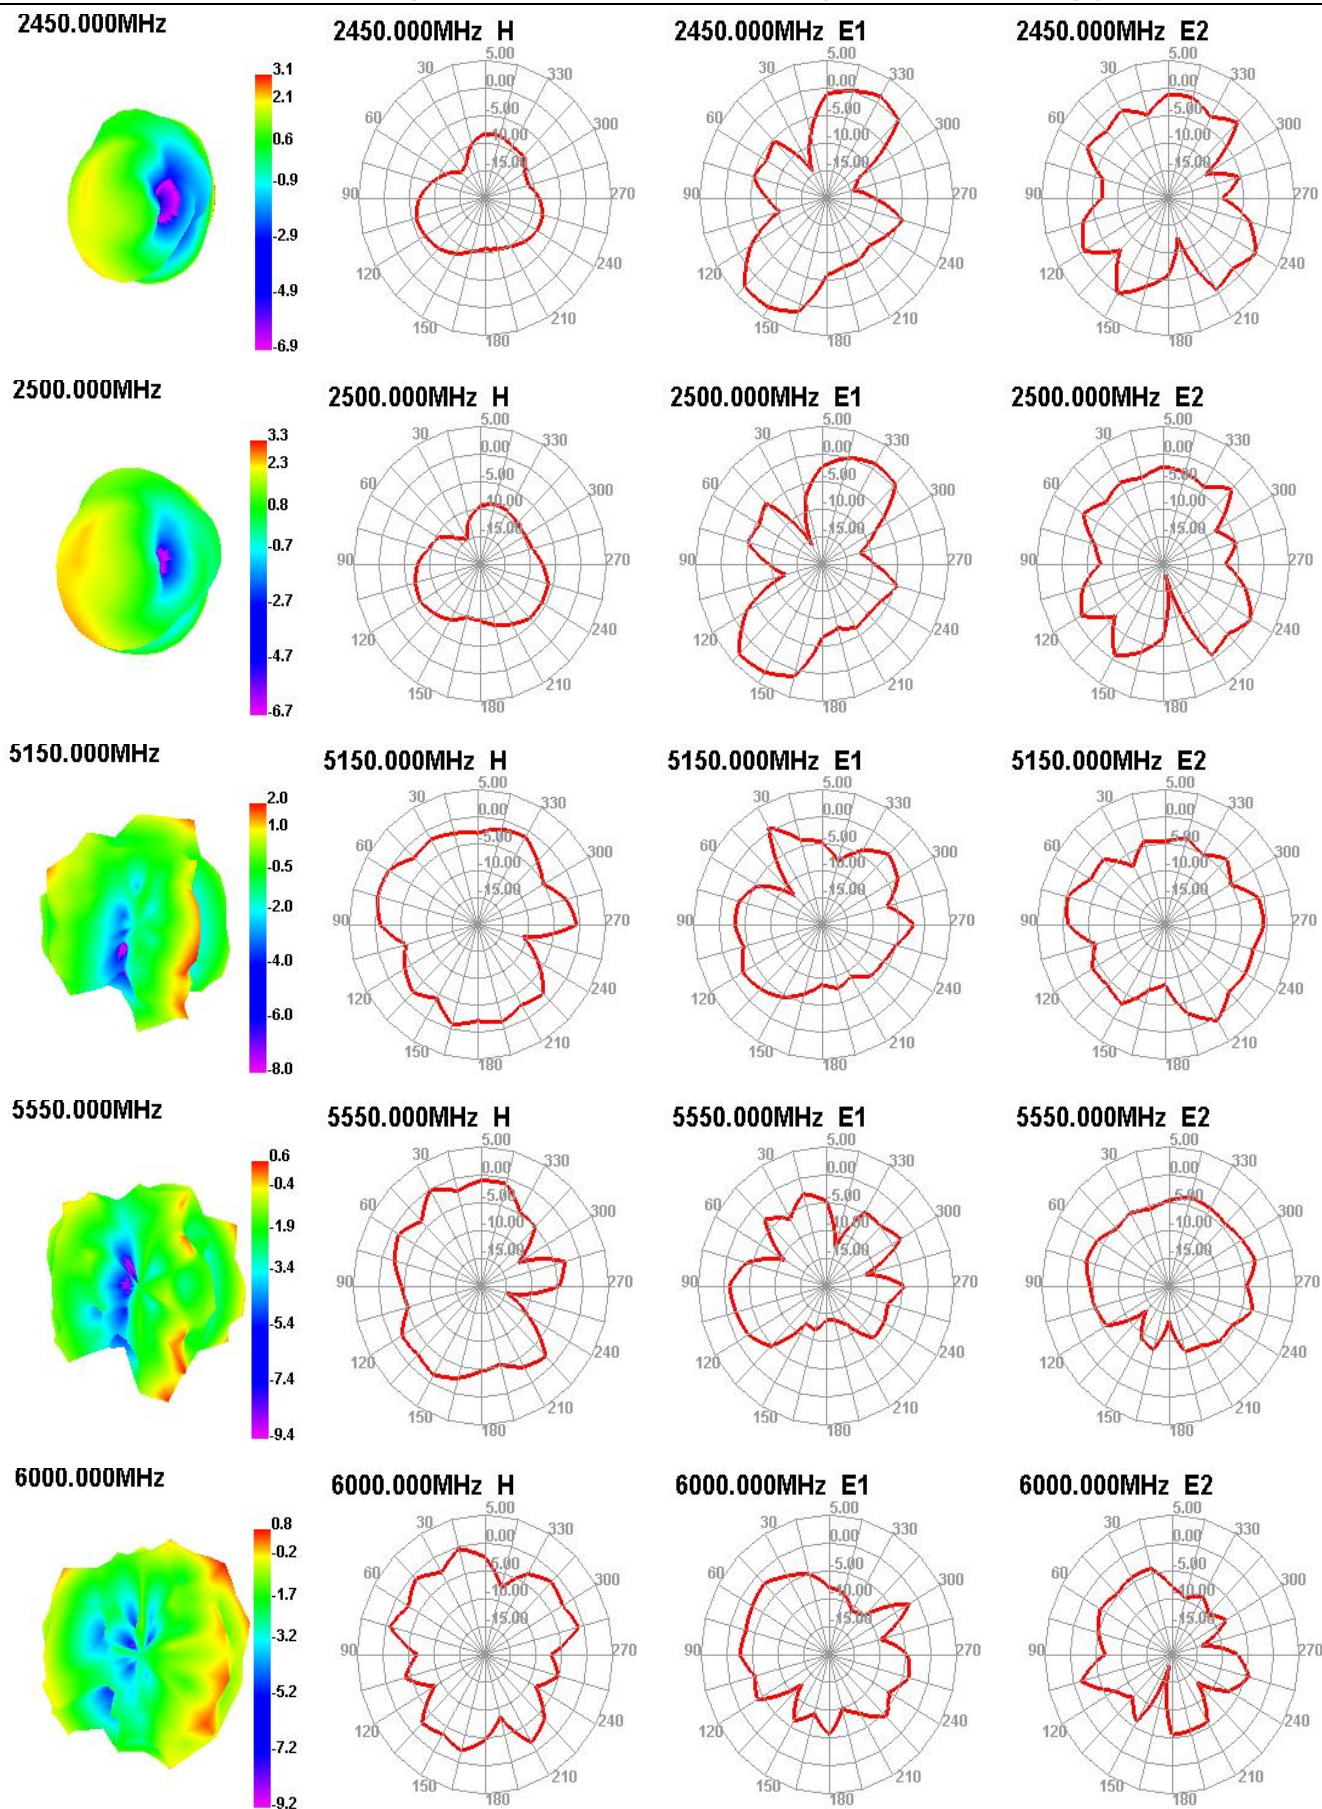



6. Reliability Test

Test Item		Test condition	Equipment	Specification	Result
1	Low Temp. Storage Test	Temperature: -30℃, Time:48hrs Test condition: Placing antenna in a Low/High Temperature Chamber, keep the temp is 25℃ and humidity is 65% for one hour, then step-down the temp. to -30℃ in one hour, store antenna for 44 hours; step-up temp to 25℃, test antenna after 2 hours.	Temp.&Humidity Tester	No material deformation is allowed. Electronic Performance is ok.	PASS
2	High Temp./High Humid Storage Test	Temperature: 85℃ Humidity: 85% RH Time:48hrs Test condition: Placing antenna in a Low/High Temperature Chamber, keep the temp is 25℃ and humidity is 65% for one hour, then step-up the temp. to 80℃ and the humidity up to 85% in one hour, store antenna for 44 hours; step-down temp to 25℃, test antenna after 2 hours.	Temp.&Humidity Tester	No material deformation is allowed. Electronic Performance is ok.	PASS
3	Salt-Spray 6 pray Test	Placing antenna in the Salt-Spray Tester, set the test condition, Temp: $35 \pm 2^\circ\text{C}$ Humidity: 85% NaCl salt spray: $5 \pm 1\%$. PH value: 6.5~7.2 Testtime: 24 hours	Salt-Spray Tester	No color change No appearance rusting	PASS

7. Assemble type

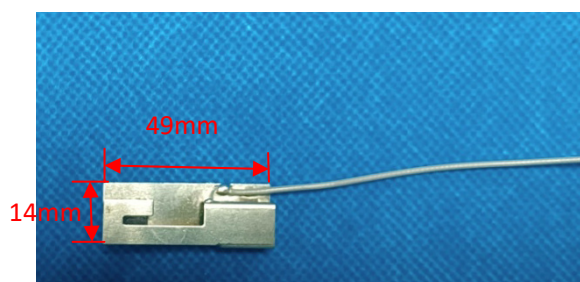
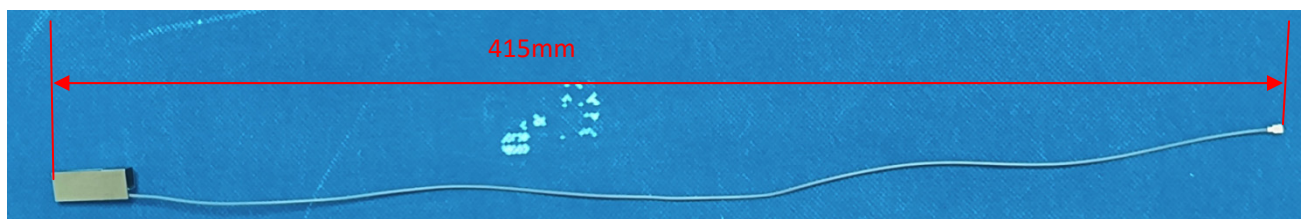


Chart 3 WF3205T assemble type