



# TEST REPORT

**Report No.** SST2504E0552

**Applicant:** SHENZHEN ELECTRON TECHNOLOGY CO., LTD.

**Address of Applicant:** Bld.2, Yingfeng Industrial Zone, Tantou Community, Songgang Street, Bao'an, Shenzhen, China.

**Product Name:** Smart Screen

**Trade Mark:** /

**Standard(s):** FCC CFR Title 47 Part 15 Subpart E Section 15.247  
ANSI C63.10-2020

**FCC ID:** 2ABC5-E0090

**Test Report Form No:** SST-RD-7.5-02-E01(A/0)

**Date of sample receipt:** 2025/3/12

**Date of Test:** 2025/3/12 - 2025/4/22

**Date of report issued:** 2025/4/27

\*The equipment complies with the requirements according to the standard(s) or Specification above, it is applicable only to the tested sample identified in the report.

Prepared by:



Reviewed by:

Approved by:

\*The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## Revision History

Version	Description	Date of Issue
V1.0	Original	2025/4/27



## 2 Contents

	Page
1 COVER PAGE .....	1
2 CONTENTS .....	3
3 TEST SUMMARY .....	4
4 MEASUREMENT UNCERTAINTY .....	4
5 GENERAL INFORMATION .....	5
5.1 CLIENT INFORMATION .....	5
5.2 GENERAL DESCRIPTION OF EUT .....	5
5.3 TEST MODE(S) .....	6
5.4 TEST FACILITY .....	7
5.5 DESCRIPTION OF SUPPORT UNITS .....	7
5.6 ADDITIONAL INSTRUCTIONS .....	7
5.7 ANTENNA INFORMATION .....	7
5.8 OTHERS .....	7
6 TECHNICAL REQUIREMENT AND MEASUREMENT DATA .....	8
6.1 GENERALLY REQUIREMENT .....	8
6.2 DUTY CYCLE .....	9
6.3 CONDUCTED PEAK OUTPUT POWER .....	10
6.4 CHANNEL BANDWIDTH .....	11
6.5 POWER SPECTRAL DENSITY .....	12
6.6 CONDUCTED EMISSION .....	13
6.7 RADIATED SPURIOUS EMISSION .....	14
6.8 CONDUCTED EMISSIONS .....	18
7 TEST SETUP PHOTO .....	21
8 EUT CONSTRUCTIONAL DETAILS .....	21
ANNEX A --TEST INSTRUMENTS LIST .....	22

### 3 Test Summary

Test items	Basics standards	Result
Antenna requirement	FCC part 15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	FCC part 15.207	Pass
Conducted Peak Output Power	FCC part 15.247 (b)(3)	Pass
Channel Bandwidth & 99% OCB	FCC part 15.247 (a)(2)	Pass
Power Spectral Density	FCC part 15.247 (e)	Pass
Band Edge	FCC part 15.247(d)	Pass
Spurious Emission	FCC part 15.205/15.209	Pass

Notes:

1: NA =Not Applicable

2: Determining compliance based on the results of the compliance measurement, not taking into account measurement uncertainty. If necessary, the applicant shall inform the test lab in advance

3: Additions, Deviations and Exclusions from Standards: None.

### 4 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

Item	Uncertainty ( $\pm$ ) ( $k=2$ , 95%)	
Output Power, Conducted		0.54
Power Spectral Density, Conducted		1.28
Spurious Emissions, Conducted		1.28
Radiated Emissions(<1GHz)	9kHz~30MHz	2.6
	30MHz~1GHz	5.08
Radiated Emissions(>1GHz)	1GHz~6GHz	4.02
	6GHz~18GHz	4.62
	18GHz~40GHz	4.7
Occupied Bandwidth		1.14
Conducted Emissions—AC mains	9kHz~150KHz	1.76
	150kHz~30MHz	2.52
Conducted Emissions—Telecom		2.64

## 5 General Information

### 5.1 Client Information

**Applicant:** SHENZHEN ELECTRON TECHNOLOGY CO., LTD.  
**Address of applicant:** Bld.2, Yingfeng Industrial Zone, Tantou Community, Songgang Street, Bao'an, Shenzhen, China.  
**Manufacturer:** Same as applicant  
**Address of Manufacturer:** Same as applicant  
**Factory:** Same as applicant  
**Address of Factory:** Same as applicant

### 5.2 General Description of EUT

Product Name:	Smart Screen
Model No.:	NW1699T
Test sample(s) ID:	2503110107
Sample(s) Status:	Continuously transmitter
S/N:	/
Hardware version:	/
Software version:	/
Operation Frequency:	2412MHz~2462MHz
Technic and Modulation:	802.11b: DSSS 802.11g/802.11n: OFDM 802.11ax: OFDMA
Supported bandwidth:	20MHz, 40MHz
Antenna gain:	Refer to section 5.7 for details
Power supply:	SWITCHING ADAPTOR MODEL: FJ-SW126G1202000U INPUT: 100-240V, 50/60Hz, 0.6A OUTPUT: DC 12V, 2A

### 5.3 Test mode(s)

Mode 1:	continuously transmitting, with its lowest data rate which emit the max power level
Mode 2:	
Mode 3:	

Channel list for 802.11							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		



## 5.4 Test Facility

The test facility is recognized, certified, or accredited by these organizations:	<b>FCC Accredited Lab</b> Test Firm Registration Number: 638130 Designation Number: CN1359
	<b>IC Registration Lab</b> CAB Identifier No. CN0154
	<b>A2LA Accreditation Lab</b> Certificate No.:7057.01
Test Performed at:	<b>Name</b> GuangDong Set Sail Testing Co., Ltd.
	<b>Address</b> 101, No.19, Tianxin Hudie 1st Road, Huangjiang Town, Dongguan, Guangdong, China

## 5.5 Description of Support Units

Device Type	Brand	Model	Series No.	Note
Notebook PC	HP	ZHAN 66P	---	---

## 5.6 Additional Instructions

Test Software	Special test command provided by manufacturer(adb command)
Command version	V1.0
Power level setup	Default

## 5.7 Antenna Information

Ant	Manufacturer	Model	Antenna Type	Antenna Gain (dBi)	Note
1	Shenzhen Yishengbang Technology Co., Ltd	/	IPEX	1.93	WiFi, BT

All above information provided by the applicant which is fully responsible for those information.

## 5.8 Others

<p>The laboratory responsible for all the information provided in the report, except those information provided by the applicant.</p> <p>The applicant shall fully responsible for the information they provided.</p> <p>The report would be invalid without a stamp of test laboratory and the signatures of compiler and approver.</p> <p>The laboratory has not been responsible for the sampling stage; the test report merely corresponds to the test sample received.</p> <p>Any objection to the test report shall submitted to the test laboratory within 15 days from the date of receipt of the report.</p> <p>It is not permitted to copy extracts of these test result without the written permission of the test laboratory.</p>
---

## 6 Technical Requirement and Measurement Data

### 6.1 Generally requirement

#### 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

#### 15.247(c) (1)(i) requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

#### EUT Antenna:

Reference to the appendix II for details


OYSST

## 6.2 Duty Cycle
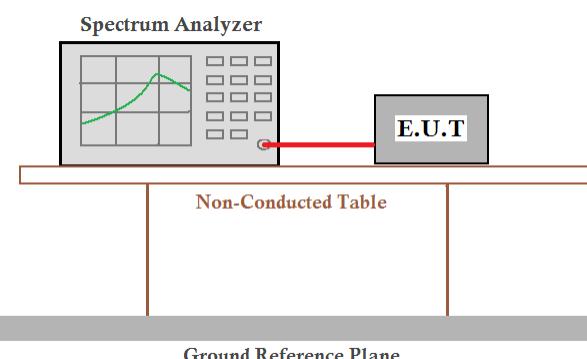
<b>Limit</b>
Report for use
<b>Block diagram of Test Setup</b>

<b>Test Instrument</b>
Refer to Annex A for details
<b>Test Procedures</b>
<p>The transmitter output connected to the Spectrum Analyzer.  Test according to Procedure 6.0)b in KDB 558074 v05r02.</p> <p>1.RBW=8 MHz(the largest available value)  2.VBW=8 MHz(&gt;RBW)  3.SPAN = 0 Hz  4.Detector = Peak  5.Number of points in sweep: 30001  6.Trace mode: Clear write  7.Measure <math>T_{total}</math> and <math>T_{on}</math>  8.Calculate Duty Cycle = <math>T_{on}/T_{total}</math> and Duty Cycle Factor = <math>10\log(1/\text{Duty Cycle})</math></p>
<b>Verdict</b>
Pass

**Measurement Data:** The detailed test data see Appendix

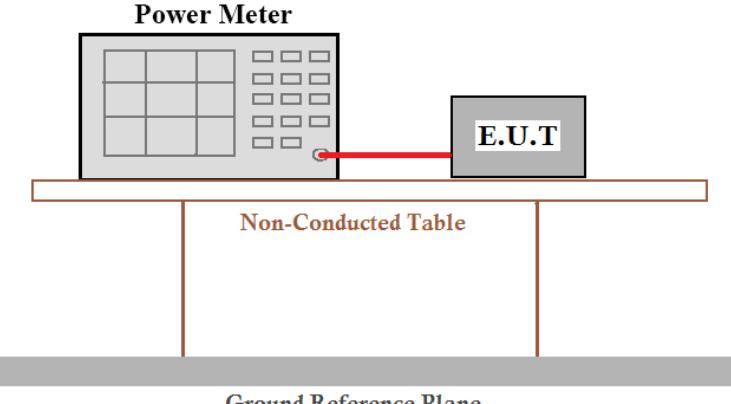
### 6.3 Conducted Peak Output Power

<b>Limit</b> 1W(30dBm)
<b>Block diagram of Test Setup</b>

<b>Test Instrument</b> Refer to Annex A for details
<b>Test Procedures</b> Test applies to KDB558074 D01 15.247 Meas Guidance v05r02
<b>Verdict</b> Pass

Measurement Data: The detailed test data see Appendix


OYSST
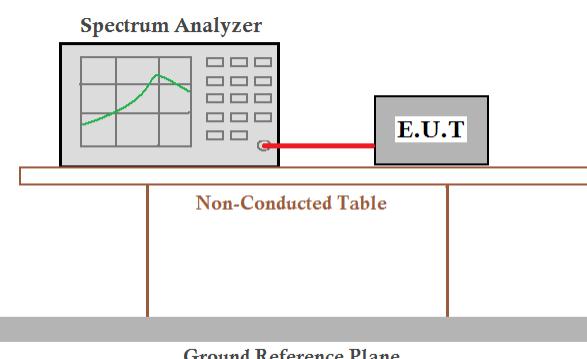
## 6.4 Channel Bandwidth

<b>Limit</b>	>500KHz
<b>Block diagram of Test Setup</b>	
	
<b>Test Instrument</b>	
Refer to Annex A for details	
<b>Test Procedures</b>	
<p>The steps for the first option are as follows:</p> <ol style="list-style-type: none"> <li>Set RBW = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz.</li> <li>Set the VBW <math>\geq [3 \times \text{RBW}]</math>.</li> <li>Detector = peak.</li> <li>Trace mode = max-hold.</li> <li>Sweep = No faster than coupled (auto) time.</li> <li>Allow the trace to stabilize.</li> <li>Measure the maximum width of the emission by placing two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-6 dB down amplitude”. If a marker is below this “-6 dB down amplitude” value, then it shall be as close as possible to this value.</li> </ol>	
<b>Verdict</b>	
Pass	

**Measurement Data:** The detailed test data see Appendix

## 6.5 Power Spectral Density
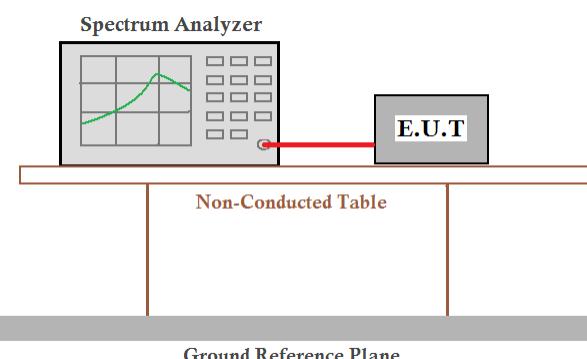
<b>Limit</b>	8dBm/3kHz
<b>Block diagram of Test Setup</b>	
	
<b>Test Instrument</b>	
Refer to Annex A for details	
<b>Test Procedures</b>	
<ol style="list-style-type: none"> <li>Set analyzer center frequency to DTS channel center frequency.</li> <li>Set the span <math>&gt;1.5</math> times the DTS bandwidth.</li> <li>Set the RBW to <math>3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}</math>.</li> <li>Set the VBW <math>\geq [3 \times \text{RBW}]</math>.</li> <li>Detector = peak.</li> <li>Sweep time = No faster than coupled (auto) time.</li> <li>Trace mode = max-hold.</li> <li>Allow trace to fully stabilize.</li> <li>Use the peak marker function to determine the maximum amplitude level within the RBW.</li> </ol>	
<b>Verdict</b>	
Pass	


**Measurement Data:** The detailed test data see Appendix

## 6.6 Conducted Emission

### Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### Block diagram of Test Setup

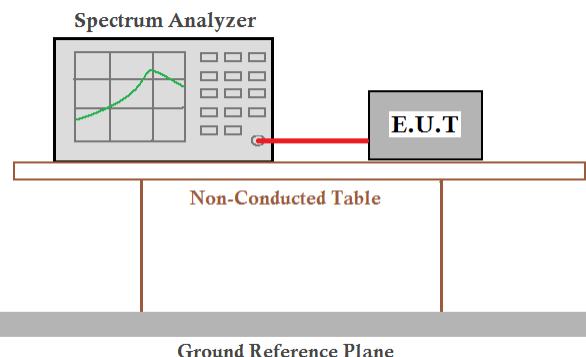

### Test Instrument

Refer to Annex A for details

### Test Procedures

Establish a reference level by using the following procedure:

- Set instrument center frequency to DTS channel center frequency.
- Set the span to  $\geq 1.5$  times the DTS bandwidth.
- Set the RBW = 100 kHz.
- Set the VBW  $\geq [3 \times RBW]$ .
- Detector = peak.
- Sweep time = No faster than coupled (auto) time.
- Trace mode = max-hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level

Establish an emission level by using the following procedure:

- Set the center frequency and span to encompass frequency range to be measured. Note that the frequency range might need to be divided into multiple frequency ranges to retain frequency resolution. NOTE—the number of points can also be increased for large spans to retain frequency resolution
- Set the RBW = 100 kHz.
- Set the VBW  $\geq [3 \times RBW]$ .
- Detector = peak.
- Sweep time = No faster than coupled (auto) time.
- Trace mode = max-hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

### Verdict

Pass

**Measurement Data: The detailed test data see Appendix**

## 6.7 Radiated Spurious Emission

### Limit


Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30	30
30–88	100 **	3
88–216	150 **	3
216–960	200 **	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54–72 MHz, 76–88 MHz, 174–216 MHz or 470–806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.


### Block diagram of Test Setup

For table-top equipment       For floor standing equipment


#### For radiated emissions from 9kHz to 30MHz

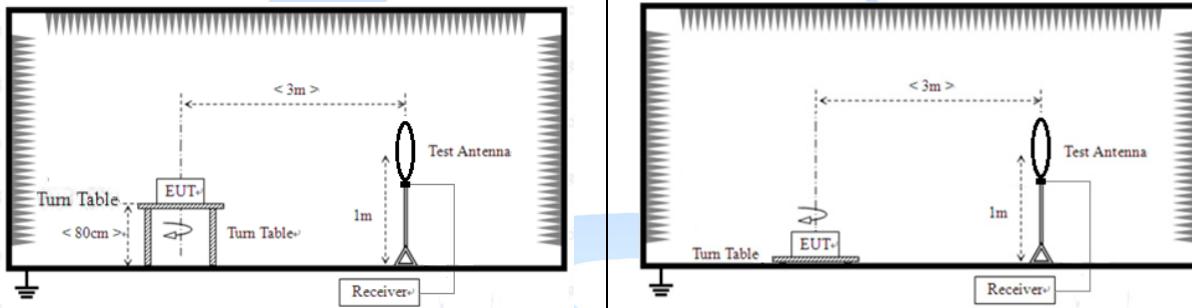

#### For radiated emissions from 30MHz to 1GHz

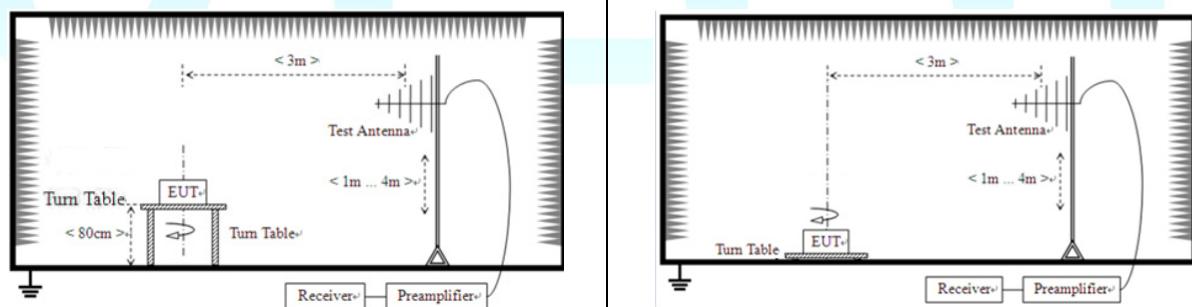

#### For radiated emissions above 1GHz

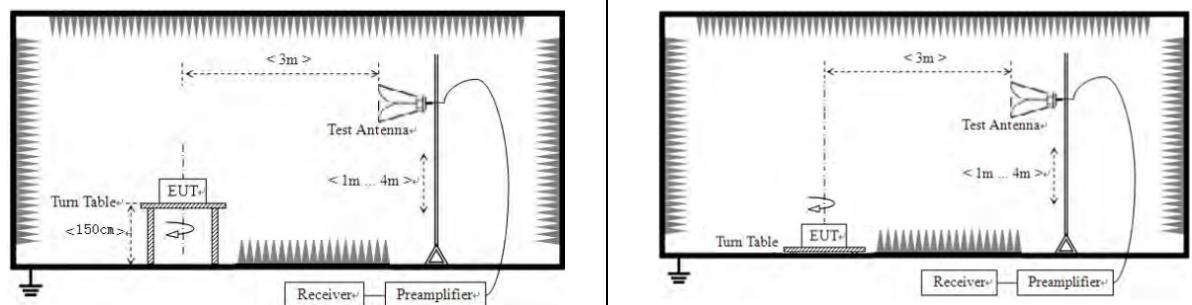

### Test Instrument


GuangDong Set Sail Testing Co., Ltd.  
101, No.19, Tianxin Hudie 1st Road, Huangjiang Town, Dongguan, Guangdong, China

Refer to Annex A for details
<b>Test Procedures</b>
Test applies to KDB558074 D01 15.247 Meas Guidance v05r02 & C63.10
<b>Verdict</b>
Pass


*Note: The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o), the test result no need to reported.*

*Note2: For those undesirable emission (in the Restricted Bands and out-of-band spurious) above 1GHz, According to KDB 558074 and ANSI C63.10 subclause 11, as an alternative, antenna-port conducted measurements in conjunction with cabinet emissions tests will be permitted to demonstrate compliance.*

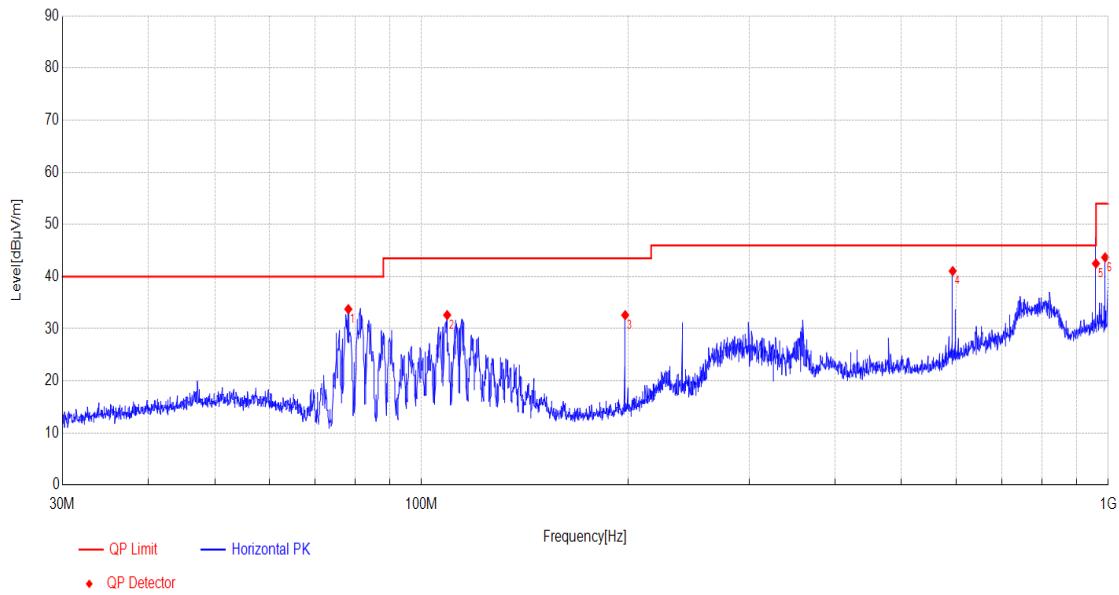

Test Result(30M~1GHz)							
Test mode	Mode 1		Polarity	Horizontal			
Test voltage	AC 120V/60Hz		Temp. /Hum.	25 °C/60%			
							
NO.	Freq. [MHz]	Factor [dB]	QP Value [dB $\mu$ V/m]	QP Limit [dB $\mu$ V/m]	QP Margin [dB]	Polarity	Verdict
1	78.2572	8.52	33.77	40.00	6.23	Horizontal	PASS
2	108.9935	12.51	32.63	43.50	10.87	Horizontal	PASS
3	197.973	11.99	32.62	43.50	10.88	Horizontal	PASS
4	593.6472	20.76	41.07	46.00	4.93	Horizontal	PASS
5	959.6451	25.68	42.51	46.00	3.49	Horizontal	PASS
6	989.5381	25.98	43.69	54.00	10.31	Horizontal	PASS

Note: Final Level = Receiver Read level + Factor  
Factor = Antenna Factor + Cable Loss – Preamplifier Factor  
Only the worst case report ( 802.11b 2412MHz)

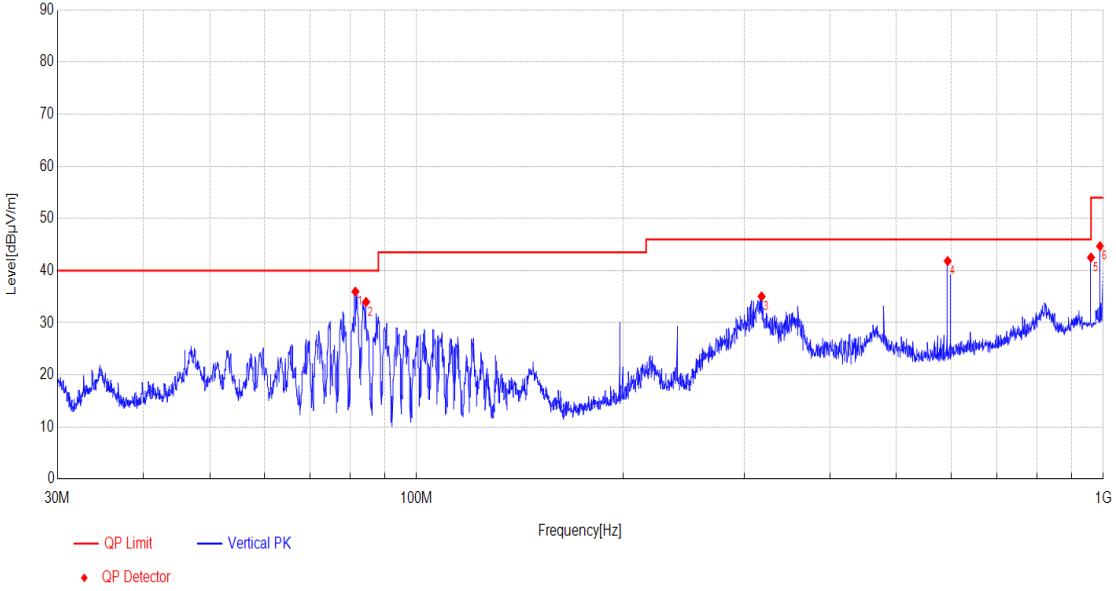Test Result(30M~1GHz)							
Test mode	Mode 1		Polarity	Vertical			
Test voltage	AC 120V/60Hz		Temp. /Hum.	25 °C/60%			
							
NO.	Freq. [MHz]	Factor [dB]	QP Value [dB $\mu$ V/m]	QP Limit [dB $\mu$ V/m]	QP Margin [dB]	Polarity	Verdict
1	81.4767	8.44	35.97	40.00	4.03	Vertical	PASS
2	84.4576	8.99	34.00	40.00	6.00	Vertical	PASS
3	318.0708	15.64	35.06	46.00	10.94	Vertical	PASS
4	593.6472	20.76	41.84	46.00	4.16	Vertical	PASS
5	959.6451	25.68	42.52	46.00	3.48	Vertical	PASS
6	989.5381	25.98	44.69	54.00	9.31	Vertical	PASS

Note: Final Level = Receiver Read level + Factor  
Factor = Antenna Factor + Cable Loss – Preamplifier Factor  
Only the worst case report (802.11b 2412MHz)

## 6.8 Conducted Emissions

### Limit


Frequency (MHz)	Quasi-peak	Average
0.15~0.50	66 to 56*	56 to 46*
0.50~5.0	56	46
5.0~30	60	50

\*Decreases with the logarithm of the frequency.


If the limit for the measurement with the average detector is met when using a receiver with a quasi-peak detector, the equipment under test shall be deemed to meet both limits and the measurement using the receiver with an average detector need not be carried out

### Block diagram of Test Setup

For table-top equipment

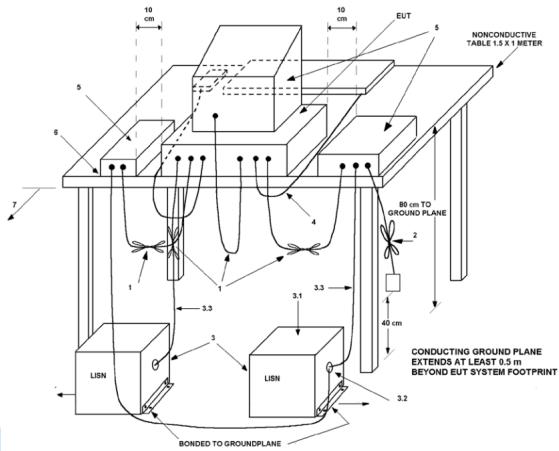

For floor standing equipment

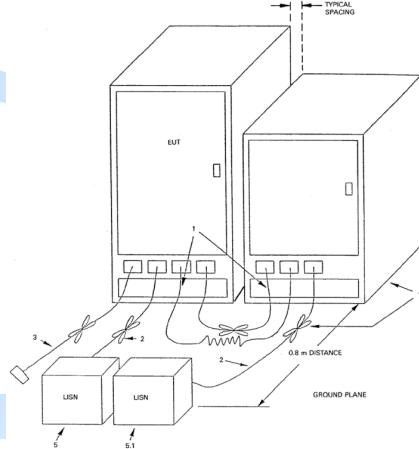

### Test Instrument

Refer to Annex A for details

### Test Procedures

The measurement was performed in a shield room.

Measured levels of ac power-line conducted emission shall be the radio-noise voltage from the voltage probe, where permitted, or across the 50 Ω LISN port (to which the EUT is connected), as terminated into a 50 Ω EMI receiver or spectrum analyzer. All radio-noise voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord or calibrated extension cord by the use of mating plugs and receptacles on the EUT and LISN, if used. The manufacturer shall test equipment with power cords that are normally supplied or recommended by the manufacturer and that have electrical and shielding characteristics that are the same as those cords normally supplied or recommended. For measurements using a LISN, the 50 Ω measuring port is terminated into a 50 Ω EMI receiver or spectrum analyzer. All other ports are terminated into 50 Ω loads.


Table top devices shall be placed on a platform of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The vertical conducting plane or wall of an RF-shielded (screened) room shall be located 40 cm to the rear of the EUT. Floor-standing devices shall be placed either directly on the reference ground-plane or on insulating material as described in ANSI C63.4. All other surfaces of tabletop or floor-standing EUTs shall be at least 80 cm from any other grounded conducting surface, including the case or cases of one or more LISNs.

The bandwidth of the test receiver is set at 9 kHz.

### Verdict

Pass

<b>Test Result</b>			
Test mode	Mode 1	Polarity	Line
Test voltage	AC 120V/60Hz	Temp. /Hum.	25 °C/60%

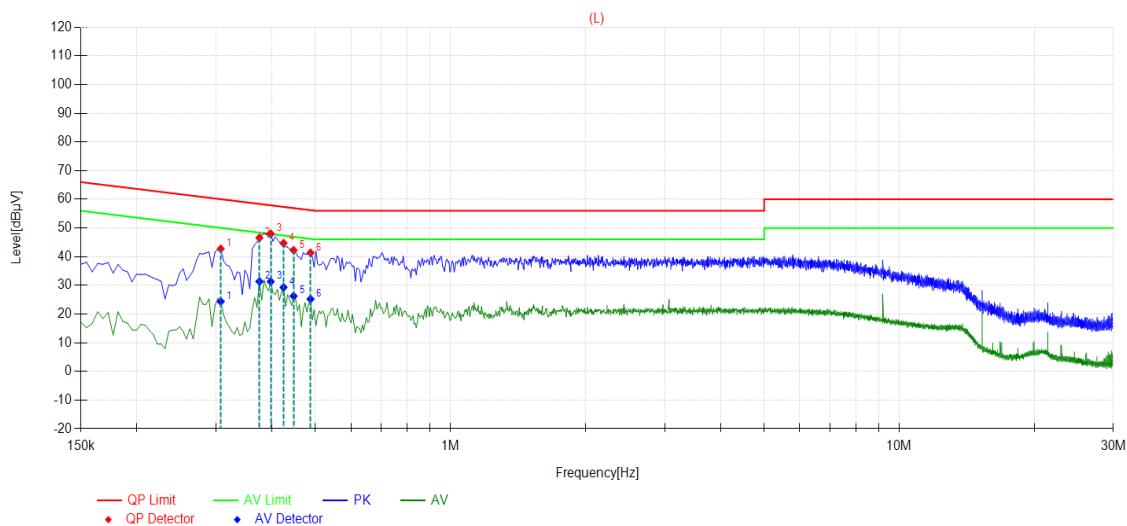


Final Data List								
NO.	Freq. [MHz]	QP Value [dB $\mu$ V]	QP Limit [dB $\mu$ V]	QP Margin [dB]	AV Value [dB $\mu$ V]	AV Limit [dB $\mu$ V]	AV Margin [dB]	Type
1	0.3075	42.75	60.04	17.29	24.38	50.04	25.66	L
2	0.375	46.59	58.39	11.80	31.34	48.39	17.05	L
3	0.3975	47.97	57.91	9.94	31.31	47.91	16.60	L
4	0.4245	44.71	57.36	12.65	29.31	47.36	18.05	L
5	0.447	42.25	56.93	14.68	26.26	46.93	20.67	L
6	0.4875	41.35	56.21	14.86	25.22	46.21	20.99	L

*Note: Final Level = Receiver Read level + Factor*

*Factor = LISN Factor + Cable Loss*

Only the worst case report (802.11b 2462MHz)

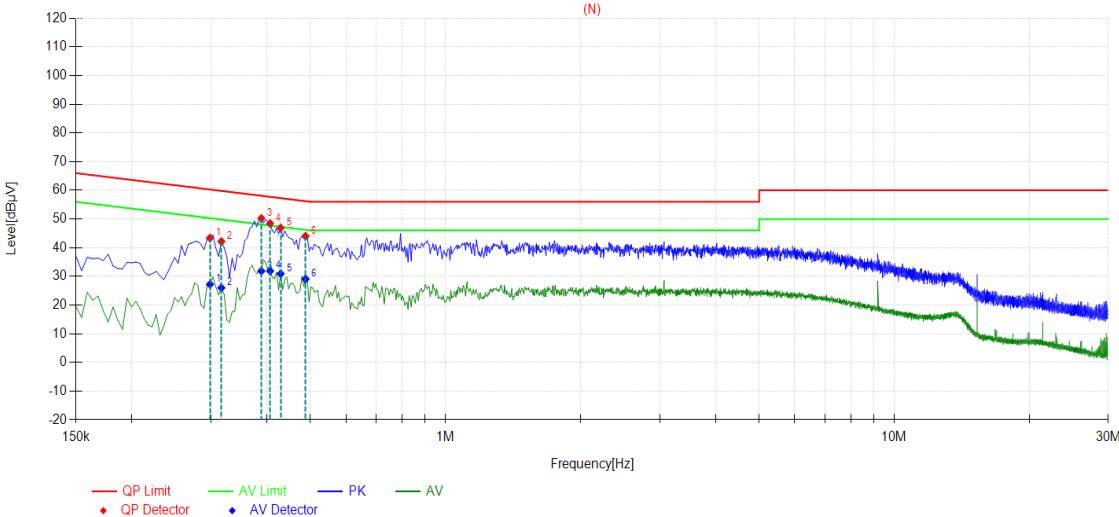Test Result																	
Test mode		Mode 1		Polarity			Neutral										
Test voltage		AC 120V/60Hz		Temp. /Hum.			25 °C/60%										
(N)																	
																	
Final Data List																	
NO.	Freq. [MHz]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Type									
1	0.2985	43.37	60.28	16.91	27.22	50.28	23.06	N									
2	0.3165	42.16	59.80	17.64	25.99	49.80	23.81	N									
3	0.3885	50.22	58.10	7.88	31.83	48.10	16.27	N									
4	0.4065	48.43	57.72	9.29	31.87	47.72	15.85	N									
5	0.429	46.88	57.27	10.39	30.90	47.27	16.37	N									
6	0.4875	44.03	56.21	12.18	29.06	46.21	17.15	N									

Note: Final Level = Receiver Read level + Factor  
Factor= LISN Factor + Cable Loss  
Only the worst case report (802.11b 2462MHz)

## 7 Test Setup Photo

Reference to the **appendix I** for details.

## 8 EUT Constructional Details

Reference to the **appendix II** for details.



## Annex A --Test Instruments list

Radiated Emission:					
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. cycle	Cal.Date
3m Semi- Anechoic Chamber	BOST	966	/	3 years	2023.01.07
Control Room	BOST	333	/	3 years	2023.01.07
Breiband TRILOG Messantenne	Schwarzbeck	VULB 9162	00556	1 year	2025.04.19
Broad-band Horn Antenna	Schwarzbeck	BBHA 9120 D	02783	1 year	2025.04.19
EMI Test Receiver	R&S	ESU8	100372	1 year	2025.04.17
Amplifier (1-18GHz)	TSTPASS	LNA10180G45	TSAM2303003	1 year	2025.04.17
Spectrum Analyzer	keysight	N9020A	MY51280659	1 year	2025.04.17
Amplifier (40G)	RFsystem	TRLA-180400G45B	23060801	1 year	2025.04.18
Broadband Horn Antenna (40G)	Schwarzbeck	BBHA9170	01306	1 year	2025.04.19
Spectrum analyzer	R&S	FSV40-N	101791	1 year	2025.04.17
Loop Antenna	Schwarzbeck	FMZB 1513-60B	1513-60B 044	1 year	2025.04.18
5W 6dB attenuator	/	DC-6GHz	/	Internal calibration	/
Thermohygrometer	KTJ	TA218A	879030	1 year	2025.04.21
EMI Test Software	Tonscend	TS+	V5.0	/	/

Conducted Emission					
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. cycle	Cal.Date
Shielding Room	BOST	854	/	3 year	2023.01.07
EMI Test Receiver	R&S	ESR3	103057	1 year	2025.04.17
LISN	R&S	ENV 216	102832	1 year	2025.04.17
ISN	Schwarzbeck	NTFM 8158	00347	1 year	2025.04.17
ISN	Schwarzbeck	CAT3 8158	00279	1 year	2025.04.17
ISN	Schwarzbeck	CAT5 8158	00524	1 year	2025.04.17
Sensor probe	TCTEST	CSP 9160A	81837	1 year	2025.04.17
High impedance capacitive voltage probe	Schwarzbeck	CVP 9222C	00221	1 year	2025.04.22
Voltage probe	Schwarzbeck	TK 9420	01304	1 year	2025.04.17
Antenna port test assembly	/	DC-3GHz	/	Internal calibration	/
Thermohygrometer	KTJ	TA218A	879036	1 year	2025.04.21
EMI Test Software	Tonscend	TS+	V4.0	/	/

RF conducted					
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. cycle	Cal.Date
Shielding Room	BOST	543	/	3 year	2023.01.07
Spectrum analyzer	keysight	N9020A	MY51280659	1 year	2025.04.17
Analog signal source	Agilent	N5181A	MY48180054	1 year	2025.04.17
Vector signal source	keysight	N5172B	MY57281610	1 year	2025.04.17
Thermohygrometer	KTJ	TA218A	879032	1 year	2025.04.21
Spectrum analyzer	R&S	FSV40-N	/	1 year	2025.04.17
Power meter 1	TST	TST V2	/	1 year	2025.04.17
Test Software	TST PASS	TST PASS	V2.0	/	/
Temperature and humidity chamber	Guangdong fenghe	FH-TH-1000	FH24032017	1 year	2024.04.26



▶▶▶ END OF REPORT ◀◀◀

