

# FCC Test Report

Report No. : 1812C50143512504

SHENZHEN ELECTRON TECHNOLOGY **Applicant** 

CO.,LTD.

**Bld.2, Yingfeng Industrial Zone, Tantou** 

: Community, Songgang Street, Baoan, Shenzhen, **Address** 

China

**Product Name** : Digital Calendar

**Report Date** : 2025-06-17

**Shenzhen Anbotek Compliance Laboratory Limited** 




Hotline



FCC ID: 2ABC5-E0094

# **Contents**

1. General Information	6
1.1. Client Information 1.2. Description of Device (EUT) 1.3. Auxiliary Equipment Used During Test 1.4. Operation channel list 1.5. Description of Test Modes 1.6. Measurement Uncertainty 1.7. Additional Instructions 1.8. Test Summary 1.9. Description of Test Facility 1.10. Disclaimer 1.11. Test Equipment List	
2. Conducted Emission at AC power line	15
2.1. EUT Operation	15 16
3. Duty Cycle	
3.1. EUT Operation	18
4. Emission bandwidth and occupied bandwidth	19
4.1. EUT Operation	21
5. Maximum conducted output power	22
5.1. EUT Operation	23
6. Power spectral density	24
6.1. EUT Operation	25
7. Band edge emissions (Radiated)	26
7.1. EUT Operation	29
8. Undesirable emission limits (below 1GHz)	35
8.1. EUT Operation	38
9 Undesirable emission limits (above 1GHz)	43





9.1. EUT Operation	45
9.2. Test Setup	
9.3. Test Data	
APPENDIX I TEST SETUP PHOTOGRAPH	48
APPENDIX II EXTERNAL PHOTOGRAPH	
APPENDIX III INTERNAL PHOTOGRAPH	48



FCC ID: 2ABC5-E0094

# **TEST REPORT**

SHENZHEN ELECTRON TECHNOLOGY CO.,LTD. **Applicant** 

Manufacturer SHENZHEN ELECTRON TECHNOLOGY CO.,LTD.

**Product Name** Digital Calendar

Model No. FA1569T

**Apolosign** Trade Mark

Input: 12V=2A Rating(s)

47 CFR Part 15E

Test Standard(s) ANSI C63.10-2020

KDB 789033 D02 General UNII Test Procedures New Rules v02r01

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with above listed standard(s) requirements. This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt:	2025-04-08	
Date of Test:	2025-04-08 to 2025-06-17	
Prepared By:	Haidi Huang	
	(Haidi Huang)	
Approved & Authorized Signer:	Lingkongjin	
	(KingKong Jin)	



# **Revision History**

Report Version	Description	Issued Date
R00	Original Issue.	2025-06-17



# 1. General Information

#### 1.1. Client Information

	1	
Applicant	:	SHENZHEN ELECTRON TECHNOLOGY CO.,LTD.
Address	:	Bld.2, Yingfeng Industrial Zone, Tantou Community, Songgang Street, Baoan, Shenzhen, China
Manufacturer	:	SHENZHEN ELECTRON TECHNOLOGY CO.,LTD.
Address	:	Bld.2,Yingfeng Industrial Zone,Tantou Community, Songgang Street,Baoan, Shenzhen, China
Factory	:	SHENZHEN ELECTRON TECHNOLOGY CO.,LTD.
Address	:	Bld.2,Yingfeng Industrial Zone,Tantou Community, Songgang Street,Baoan, Shenzhen, China

# 1.2. Description of Device (EUT)

1.2. Boothplion of Bovios (201)				
Product Name	·	Digital Calendar		
Model No.	:	FA1569T		
Trade Mark	·	N/A		
Test Power Supply	:	DC 12V from adapter input AC 120V/60Hz		
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)		
Adapter	Model: ADS-24DN-12Y 12024EPCU Input: 100-240V~50/60Hz Max 0.7A Output: 12.0V-2.0A, 24.0W			
RF Specification				
Operation Frequency	:	802.11a/n(HT20)/ac(HT20)/ax(HE20): U-NII Band 1: 5180MHz to 5240MHz; U-NII Band 3: 5745MHz to 5825MHz;  802.11n(HT40)/ac(HT40)/ax(HE40): U-NII Band 1: 5190MHz to 5230MHz; U-NII Band 3: 5755MHz to 5795MHz;  802.11ac(HT80)/ax(HE80): U-NII Band 1: 5210MHz; U-NII Band 3: 5775MHz		
Number of Channel		802.11a/n(HT20)/ac(HT20)/ax(HE20): U-NII Band 1: 4; U-NII Band 3: 5;  802.11n(HT40)/ac(HT40)/ax(HE40): U-NII Band 1: 2; U-NII Band 3: 2;  802.11ac(HT80)/ax(HE80): U-NII Band 1: 1; U-NII Band 3: 1		

#### **Shenzhen Anbotek Compliance Laboratory Limited**





Modulation Type	:	802.11a: OFDM(BPSK, QPSK, 16QAM, 64QAM); 802.11n: OFDM (BPSK, QPSK, 16QAM, 64QAM); 802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM); 802.11ax: OFDM/OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM)
Device Type	:	Client Devices
Antenna Type	:	FPC Antenna
Antenna Gain(Peak)	:	Wifi 5.2G: 2.60dBi Wifi 5.8G: 2.51dBi

#### Remark:

- (1) All of the RF specification are provided by customer.
- (2) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- (3)Since this model has two hardware versions, we have conducted differential tests for the radiated emissions(below 1G)
- (4)80211ax mode only support full resource unit size.

#### Hardware Versions difference:

Hardware Versions	Difference		
R155-V1.0A	Reserve excess materials		
R155-V1.0B	Removed the redundant reserved materials		
For detailed information on the differences, please refer to the Difference Statement Letter.			



FCC ID: 2ABC5-E0094

# 1.3. Auxiliary Equipment Used During Test

Title	Manufacturer	Model No.	Serial No.
1	1	/	1

# 1.4. Operation channel list

Operation Band: U-NII Band 1

operation band. O 14h Band 1					
Bandwidth:	20MHz	Bandwidth:	40MHz	Bandwidth:	80MHz
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230	/	1
44	5220	/	/	/	1
48	5240	/	/	/	/

Operation Band: U-NII Band 3

Bandwidth:	20MHz	Bandwidth:	40MHz	Bandwidth:	80MHz
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795	1	1
157	5785	1	/	1	1
161	5805	1	/	1	1
165	5825	1	/	1	/



FCC ID: 2ABC5-E0094

#### 1.5. Description of Test Modes

Pretest Modes	Descriptions
TM1	Keep the EUT in continuously transmitting mode with 802.11a modulation type at lowest, middle and highest channel. All data rates has been tested and found the data rate @ 6Mbps is the worst case.  Only the data of worst case is recorded in the report.
TM2	Keep the EUT in continuously transmitting mode with 802.11n modulation type at lowest, middle and highest channel. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report.
TM3	Keep the EUT in continuously transmitting mode with 802.11ac modulation type at lowest, middle and highest channel. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report.
TM4	Keep the EUT in continuously transmitting mode with 802.11ax modulation type at lowest, middle and highest channel. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report.

### 1.6. Measurement Uncertainty

Parameter	Uncertainty
Conducted emissions (AMN 150kHz~30MHz)	3.2dB
Dwell Time	2%
Occupied Bandwidth	925Hz
Conducted Output Power	0.76dB
Power Spectral Density	0.76dB
Radiated spurious emissions (above 1GHz)	1G-6GHz: 4.64dB; 6G-18GHz: 4.82dB 18G-40GHz: 5.62dB
Radiated emissions (Below 30MHz)	3.26dB
Radiated spurious emissions (30MHz~1GHz)	Horizontal: 3.70dB; Vertical: 4.42dB

The measurement uncertainty and decision risk evaluated according to AB/WI-RF-F-032. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



#### 1.7. Additional Instructions

Power level setup in software

Operation Band: U-NII Band 1

Mode	Power level	Transmitting type
802.11a	default	data pack TX
802.11n(HT20)	default	data pack TX
802.11n(HT40)	default	data pack TX
802.11ac(VHT20)	default	data pack TX
802.11ac(VHT40)	default	data pack TX
802.11ac(VHT80)	default	data pack TX
802.11ax(HEW20)	default	data pack TX
802.11ax(HEW40)	default	data pack TX
802.11ax(HEW80)	default	data pack TX

Operation Band: U-NII Band 3

Mode	Power level	Transmitting type
802.11a	default	data pack TX
802.11n(HT20)	default	data pack TX
802.11n(HT40)	default	data pack TX
802.11ac(VHT20)	default	data pack TX
802.11ac(VHT40)	default	data pack TX
802.11ac(VHT80)	default	data pack TX
802.11ax(HEW20)	default	data pack TX
802.11ax(HEW40)	default	data pack TX
802.11ax(HEW80)	default	data pack TX



# 1.8. Test Summary

Test Items	Test Modes	Status
Conducted Emission at AC power line	Mode1,2,3,4	Р
Duty Cycle	Mode1,2,3,4	Р
Emission bandwidth and occupied bandwidth	Mode1,2,3,4	Р
Maximum conducted output power	Mode1,2,3,4	Р
Power spectral density	Mode1,2,3,4	Р
Band edge emissions (Radiated)	Mode1,2,3,4	Р
Undesirable emission limits (below 1GHz)	Mode1,2,3,4	Р
Undesirable emission limits (above 1GHz)	Mode1,2,3,4	Р
Note:		•

Note:

P: Pass

N: N/A, not applicable



FCC ID: 2ABC5-E0094

#### 1.9. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### FCC-Registration No.:279531

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 279531.

#### **Test Location**

Shenzhen Anbotek Compliance Laboratory Limited.

Sogood Industrial Zone Laboratory & 1/F. of Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Subdistrict, Bao'an District, Shenzhen, Guangdong, China.

#### 1.10. Disclaimer

- The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- 2. The test report is invalid if there is any evidence and/or falsification.
- 3. The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- 4. This document may not be altered or revised in any way unless done so by Anbotek and all revisions are duly noted in the revisions section.
- 5. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- 6. The authenticity of the information provided by the customer is the responsibility of the customer and the laboratory is not responsible for its authenticity.
- 7. The data in this report will be synchronized with the corresponding national market supervision and management departments and cross-border e-commerce platforms as required by regulatory agencies.

The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.





# 1.11. Test Equipment List

Cond	Conducted Emission at AC power line					
Item Equipment		Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due Date
1	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	2024-09-09	2025-09-08
2	Three Phase V- type Artificial Power Network	CYBERTEK	EM5040DT	E215040D T001	2025-01-13	2026-01-12
3	Software Name EZ-EMC	Farad Technology	ANB-03A	N/A	1	/
4	EMI Test Receiver(CE2#)	Rohde & Schwarz	ESPI3	100926	2024-09-09	2025-09-08

**Duty Cycle** 

Emission bandwidth and occupied bandwidth

Maximum conducted output power

Power spectral density							
Item Equipment		Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due Date
1		Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ- KHWS80B	N/A	2024-10-14	2025-10-13
	2 DC Power Supply		IVYTECH	IV3605	1804D360 510	2024-09-09	2025-09-08
	3 Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102150	2024-05-06 2025-04-25	2025-05-05 2026-04-24	
	4	4 MXA Spectrum KEYSIGHT Analysis		N9020A	MY505318 23	2024-09-09	2025-09-08
	5 Oscilloscope		Tektronix	MDO3012	C020298	2024-10-10	2025-10-09
	6	MXG RF Vector Signal Generator	Agilent	N5182A	MY474206 47	2025-01-14	2026-01-13



1	Band edge emissions (Radiated) Undesirable emission limits (above 1GHz)					
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due Date
1	EMI Test Receiver(RE2/3#) Rohde & Schwarz		ESR26	101481	2025-01-14	2026-01-13
2	2 EMI Preamplifier SKET Electronic		LNPA- 0118G-45	SKET-PA- 002	2025-01-13	2026-01-12
3	Double Ridged Horn Antenna			02555	2022-10-16	2025-10-15
4	EMI Test Software EZ-EMC SHURPLE		N/A	N/A	1	1
5	Horn Antenna	tenna A-INFO		J2110606 28	2024-01-22	2027-01-21
6	Spectrum Analyzer Rohde & Schwarz		FSV40-N	102150	2024-05-06 2025-04-25	2025-05-05 2026-04-24
7			TLLA18G40 G-50-30	23022802	2025-02-24	2026-02-23

Unde	Undesirable emission limits (below 1GHz)					
Item Equipment		Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due Date
1	EMI Test Receiver(RE2/3#)	L Ronde X. Schwarz		101481	2025-01-14	2026-01-13
2	2 Pre-amplifier SONOMA		310N	186860	2025-01-14	2026-01-13
3	3 Bilog Broadband Schwarzbeck		VULB9163	345	2022-10-23	2025-10-22
4	4 Loop Antenna (9K-30M) Schwarzbeck		FMZB1519 B	00053	2024-09-12	2025-09-11
5	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	/	/



FCC ID: 2ABC5-E0094

## 2. Conducted Emission at AC power line

case is recorded in the report.

Test Requirement:	47 CFR Part 15.207(a)		
	Frequency of emission (MHz)	Conducted limit (dBµV)	
		Quasi-peak	Average
_ ,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	0.15-0.5	66 to 56*	56 to 46*
Test Limit:	0.5-5	56	46
	5-30	60	50
	*Decreases with the logarithm of t	he frequency.	
Test Method:	ANSI C63.10-2020 section 6.2		

#### 2.1. EUT Operation

Operating Environment:		
	1: 802.11a mode: Keep the EUT in continuously transmitting mode with 802.11a modulation type at lowest, middle and highest channel. All data rates has been tested and found the data rate @ 6Mbps is the worst case. Only the data of worst	


2: 802.11n mode: Keep the EUT in continuously transmitting mode with 802.11n modulation type at lowest, middle and highest channel. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report.

Test mode:

3: 802.11ac mode: Keep the EUT in continuously transmitting mode with 802.11ac modulation type at lowest, middle and highest channel. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report.

4: 802.11ax mode: Keep the EUT in continuously transmitting mode with 802.11ax modulation type at lowest, middle and highest channel. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report.

#### 2.2. Test Setup

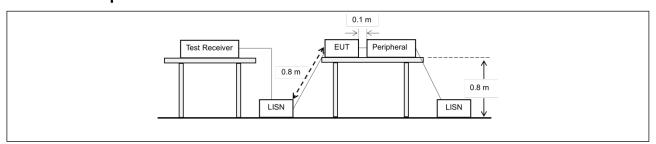




FCC ID: 2ABC5-E0094

#### 2.3. Test Data


22.2 °C Temperature: Humidity: 51 % Atmospheric Pressure: 101 kPa

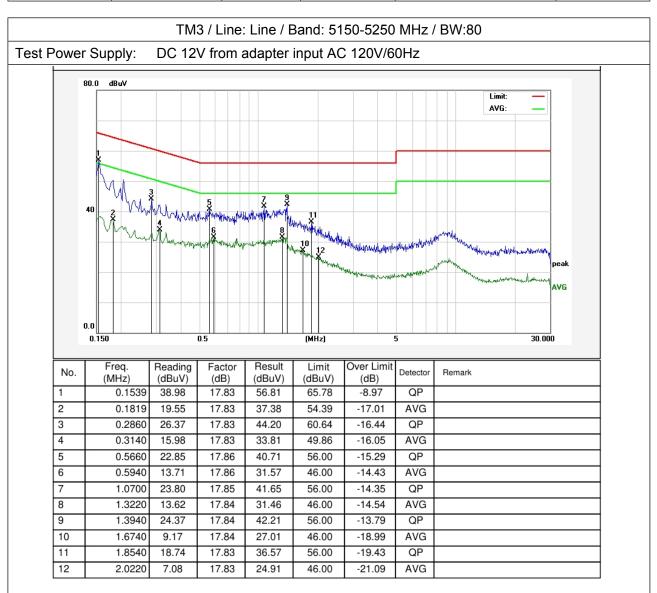



FCC ID: 2ABC5-E0094

	Temperature:	22.2 °C	Humidity:	51 %	Atmospheric Pressure:	101 kPa	
--	--------------	---------	-----------	------	-----------------------	---------	--

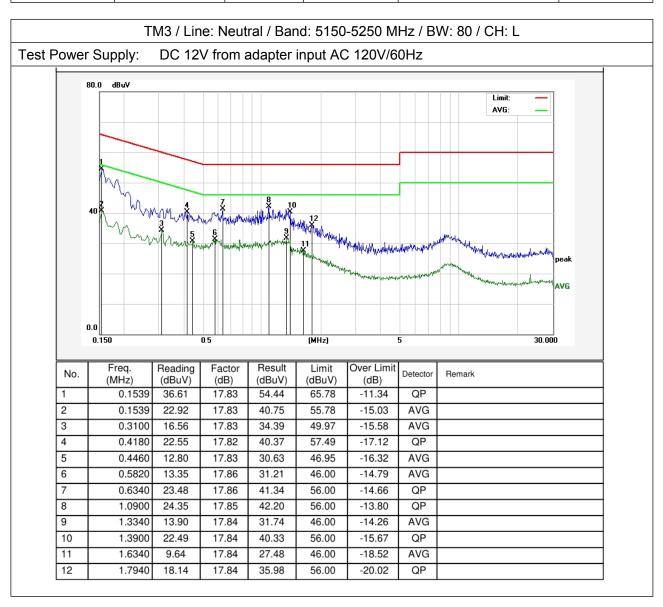

#### Note:

- 1. Only the worst case data was showed in the report.
- 2. Result(dB $\mu$ V) = Reading(dB $\mu$ V) + Factor(dB); Over Limit(dB) = Result(dB $\mu$ V) - Limit(dB $\mu$ V)



FCC ID: 2ABC5-E0094


# 3. Duty Cycle

Test Requirement:	All measurements are to be performed with the EUT transmitting at 100% duty cycle at its maximum power control level; however, if 100% duty cycle cannot be achieved, measurements of duty cycle, x, and maximum-power transmission duration, T, are required for each tested mode of operation.
Test Limit:	No limits, only for report use.
Test Method:	ANSI C63.10-2020 section 12.2 (b)
Procedure:	<ul> <li>i) Set the center frequency of the instrument to the center frequency of the transmission.</li> <li>ii) Set RBW &gt;= EBW if possible; otherwise, set RBW to the largest available value.</li> <li>iii) Set VBW &gt;= RBW.</li> <li>iv) Set detector = peak.</li> <li>v) The zero-span measurement method shall not be used unless both RBW and VBW are &gt; 50/T, where T is defined in item a1) of 12.2, and the number of sweep points across duration T exceeds 100.</li> </ul>

#### 3.1. EUT Operation

Operating Envi	ronment:
Test mode:	1: 802.11a mode: Keep the EUT in continuously transmitting mode with 802.11a modulation type at lowest, middle and highest channel. All data rates has been tested and found the data rate @ 6Mbps is the worst case. Only the data of worst case is recorded in the report.  2: 802.11n mode: Keep the EUT in continuously transmitting mode with 802.11n modulation type at lowest, middle and highest channel. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report.  3: 802.11ac mode: Keep the EUT in continuously transmitting mode with 802.11ac modulation type at lowest, middle and highest channel. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report.  4: 802.11ax mode: Keep the EUT in continuously transmitting mode with 802.11ax modulation type at lowest, middle and highest channel. All bandwidth and data rates

#### 3.2. Test Setup



has been tested and found the data rate @ MCS0 is the worst case. Only the data

#### 3.3. Test Data

Temper	ature:	25.6 °C	Humidity:	49 %	Atmospheric Pressure:	101 kPa
--------	--------	---------	-----------	------	-----------------------	---------

Please Refer to Appendix for Details.

#### **Shenzhen Anbotek Compliance Laboratory Limited**

of worst case is recorded in the report.



FCC ID: 2ABC5-E0094

# 4. Emission bandwidth and occupied bandwidth

Test Requirement:  U-NII 3, U-NII 4: 47 CFR Part 15:407(e)  U-NII 1, U-NII 2A, U-NII 2C: No limits, only for report use.  U-NII 3, U-NII 4: Within the 5.725-5.850 GHz and 5.850-5.895 GHz bands, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.  Test Method:  ANSI C63.10-2020, section 6.9 & 12.5 KDB 789033 D02, Clause C.2  Emission bandwidth: a) Set RBW = approximately 1% of the emission bandwidth. b) Set the VBW > RBW. c) Detector = peak. d) Trace mode = max hold. e) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.  Occupied bandwidth: a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW. b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement. c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than [10 log (OBW/RBW)] below the reference level. Specific guidance is given in 4.1.5.2. d) Step a) through step c) might require iteration to adjust within the specified range. e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be		U-NII 1, U-NII 2A, U-NII 2C: No limits, only for report use.
U-NII 1, U-NII 2A, U-NII 2C: No limits, only for report use.  U-NII 3, U-NII 4: Within the 5.725-5.850 GHz and 5.850-5.895 GHz bands, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.  ANSI C63.10-2020, section 6.9 & 12.5 KDB 789033 D02, Clause C.2  Emission bandwidth:  a) Set RBW = approximately 1% of the emission bandwidth. b) Set the VBW > RBW. c) Detector = peak. d) Trace mode = max hold. e) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.  Occupied bandwidth: a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW. b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement. c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than [10 log (OBW/RBW)] below the reference level. Specific guidance is given in 4.1.5.2. d) Step a) through step c) might require iteration to adjust within the specified range. e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace	Test Requirement:	
Test Limit:  U-NII 3, U-NII 4: Within the 5.725-5.850 GHz and 5.850-5.895 GHz bands, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.  ANSI C63.10-2020, section 6.9 & 12.5 KDB 789033 D02, Clause C.2  Emission bandwidth:  a) Set RBW = approximately 1% of the emission bandwidth. b) Set the VBW > RBW. c) Detector = peak. d) Trace mode = max hold. e) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.  Occupied bandwidth: a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW. b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement. c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than [10 log (OBW/RBW)] below the reference level. Specific guidance is given in 4.1.5.2. d) Step a) through step c) might require iteration to adjust within the specified range. e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace		
Test Method:  ANSI C63.10-2020, section 6.9 & 12.5 KDB 789033 D02, Clause C.2  Emission bandwidth: a) Set RBW = approximately 1% of the emission bandwidth. b) Set the VBW > RBW. c) Detector = peak. d) Trace mode = max hold. e) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.  Occupied bandwidth: a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW. b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement. c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than [10 log (OBW/RBW)] below the reference level. Specific guidance is given in 4.1.5.2. d) Step a) through step c) might require iteration to adjust within the specified range. e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace		U-NII 1, U-NII 2A, U-NII 2C: No limits, only for report use.
Emission bandwidth: a) Set RBW = approximately 1% of the emission bandwidth. b) Set the VBW > RBW. c) Detector = peak. d) Trace mode = max hold. e) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.  Occupied bandwidth: a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW. b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement. c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than [10 log (OBW/RBW)] below the reference level. Specific guidance is given in 4.1.5.2. d) Step a) through step c) might require iteration to adjust within the specified range. e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace	Test Limit:	
a) Set RBW = approximately 1% of the emission bandwidth. b) Set the VBW > RBW. c) Detector = peak. d) Trace mode = max hold. e) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.  Occupied bandwidth: a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW. b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement. c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than [10 log (OBW/RBW)] below the reference level. Specific guidance is given in 4.1.5.2. d) Step a) through step c) might require iteration to adjust within the specified range. e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace	Test Method:	, ,
used. f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth. g) If the instrument does not have a 99% power bandwidth function, then the trace data points are	Procedure:	Emission bandwidth: a) Set RBW = approximately 1% of the emission bandwidth. b) Set the VBW > RBW. c) Detector = peak. d) Trace mode = max hold. e) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.  Occupied bandwidth: a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW. b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement. c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than [10 log (OBW/RBW)] below the reference level. Specific guidance is given in 4.1.5.2. d) Step a) through step c) might require iteration to adjust within the specified range. e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used. Otherwise, peak detection of the instrument (if available) and report the measured bandwidth. g) If the instrument does not have a 99% power bandwidth function, then the





FCC ID: 2ABC5-E0094

recovered and directly summed in linear power terms. The recovered amplitude data points,

beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached;

that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the

total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is

the difference between these two frequencies.

h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument

display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may

be reported in addition to the plot(s).

6 dB emission bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) ≥ 3 >= RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

#### 4.1. EUT Operation

#### Operating Environment:

1: 802.11a mode: Keep the EUT in continuously transmitting mode with 802.11a modulation type at lowest, middle and highest channel. All data rates has been tested and found the data rate @ 6Mbps is the worst case. Only the data of worst case is recorded in the report.

2: 802.11n mode: Keep the EUT in continuously transmitting mode with 802.11n modulation type at lowest, middle and highest channel. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report.


#### Test mode:

3: 802.11ac mode: Keep the EUT in continuously transmitting mode with 802.11ac modulation type at lowest, middle and highest channel. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report.

4: 802.11ax mode: Keep the EUT in continuously transmitting mode with 802.11ax modulation type at lowest, middle and highest channel. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report.



# 4.2. Test Setup



#### 4.3. Test Data

mperature: 25.6 °C Humidi	ity: 49 %	Atmospheric Pressure:	101 kPa
---------------------------	-----------	-----------------------	---------

Please Refer to Appendix for Details.



FCC ID: 2ABC5-E0094

# 5. Maximum conducted output power

Test Requirement:	47 CFR Part 15.407(a)(1)(iv) 47 CFR Part 15.407(a)(3)(i)
Test Limit:	For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.  For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
Test Method:	ANSI C63.10-2020, section 12.4.2.4
Procedure:	Refer to ANSI C63.10-2020 section 12.4.2.4

# 5.1. EUT Operation


Operating Environment:				
Test mode:	1: 802.11a mode: Keep the EUT in continuously transmitting mode with 802.11a modulation type at lowest, middle and highest channel. All data rates has been tested and found the data rate @ 6Mbps is the worst case. Only the data of worst case is recorded in the report.  2: 802.11n mode: Keep the EUT in continuously transmitting mode with 802.11n modulation type at lowest, middle and highest channel. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report.  3: 802.11ac mode: Keep the EUT in continuously transmitting mode with 802.11ac modulation type at lowest, middle and highest channel. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report.  4: 802.11ax mode: Keep the EUT in continuously transmitting mode with 802.11ax modulation type at lowest, middle and highest channel. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report.			





FCC ID: 2ABC5-E0094

# 5.2. Test Setup



#### 5.3. Test Data

mperature: 25.6 °C Humidi	ity: 49 %	Atmospheric Pressure:	101 kPa
---------------------------	-----------	-----------------------	---------

Please Refer to Appendix for Details.



FCC ID: 2ABC5-E0094

# 6. Power spectral density

Test Requirement:	47 CFR Part 15.407(a)(1)(iv) 47 CFR Part 15.407(a)(3)(i)
Test Limit:	For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.  For the band 5.725-5.850 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas
	with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power.  Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
Test Method:	ANSI C63.10-2020, section 12.6
Procedure:	Refer to ANSI C63.10-2020, section 12.6

# 6.1. EUT Operation


Operating Environment:				
Test mode:	1: 802.11a mode: Keep the EUT in continuously transmitting mode with 802.11a modulation type at lowest, middle and highest channel. All data rates has been tested and found the data rate @ 6Mbps is the worst case. Only the data of worst case is recorded in the report.  2: 802.11n mode: Keep the EUT in continuously transmitting mode with 802.11n modulation type at lowest, middle and highest channel. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report.  3: 802.11ac mode: Keep the EUT in continuously transmitting mode with 802.11ac modulation type at lowest, middle and highest channel. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report.  4: 802.11ax mode: Keep the EUT in continuously transmitting mode with 802.11ax modulation type at lowest, middle and highest channel. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report.			





FCC ID: 2ABC5-E0094

# 6.2. Test Setup



#### 6.3. Test Data

mperature: 25.6 °C Humidi	ity: 49 %	Atmospheric Pressure:	101 kPa
---------------------------	-----------	-----------------------	---------

Please Refer to Appendix for Details.



FCC ID: 2ABC5-E0094

# 7. Band edge emissions (Radiated)

	47 CFR Part 15.407(b)(1) 47 CFR Part 15.407(b)(4) 47 CFR Part 15.407(b)(10)					
	For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of −27 dBm/MHz.					
	For transmitters opera All emissions shall be above or below the ba above or below the ba edge increasing linear	limited to a level of - and edge increasing I and edge, and from 2 ly to a level of 15.6 d	·27 dBm/MHz at inearly to 10 dBr 5 MHz above or IBm/MHz at 5 MI	75 MHz or more n/MHz at 25 MHz below the band Hz above or		
	below the band edge, increasing linearly to a					
	MHz	MHz	MHz	GHz		
	0.090-0.110	16.42-16.423	399.9-410	4.5-5.15		
	10.495-0.505	16.69475- 16.69525	608-614	5.35-5.46		
	2.1735-2.1905	16.80425- 16.80475	960-1240	7.25-7.75		
	4.125-4.128	25.5-25.67	1300-1427	8.025-8.5		
	4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2		
	4.20725-4.20775	73-74.6	1645.5- 1646.5	9.3-9.5		
	6.215-6.218	74.8-75.2	1660-1710	10.6-12.7		
Test Limit:	6.26775-6.26825	108-121.94	1718.8- 1722.2	13.25-13.4		
TOST EITHL.	6.31175-6.31225	123-138	2200-2300	14.47-14.5		
	8.291-8.294	149.9-150.05	2310-2390	15.35-16.2		
	8.362-8.366	156.52475- 156.52525	2483.5-2500	17.7-21.4		
	8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12		
	8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0		
	12.29-12.293	167.72-173.2	3332-3339	31.2-31.8		
	12.51975-12.52025	240-285	3345.8-3358	36.43-36.5		
	12.57675-12.57725	322-335.4	3600-4400	(2)		
	13.36-13.41					

emissions. The provisions in § 15.35apply to these measurements.

#### **Shenzhen Anbotek Compliance Laboratory Limited**





FCC ID: 2ABC5-E0094

Except as provided elsewhe	ere in this subpart, the emissions from an
intentional radiator shall not	exceed the field strength levels specified in the
following table:	

ionorming table.							
Frequency (MHz)	Field strength	Measurement					
	(microvolts/meter)	distance					
		(meters)					
0.009-0.490	2400/F(kHz)	300					
0.490-1.705	24000/F(kHz)	30					
1.705-30.0	30	30					
30-88	100 **	3					
88-216	150 **	3					
216-960	200 **	3					
Above 960	500	3					

<sup>\*\*</sup> Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.

In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

#### Test Method:

ANSI C63.10-2020, section 12.7.4, 12.7.6, 12.7.7

#### Above 1GHz:

- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst

# Procedure:

#### **Shenzhen Anbotek Compliance Laboratory Limited**



FCC ID: 2ABC5-E0094

#### case.

- i. Repeat above procedures until all frequencies measured was complete.
- 1. Result( $dB\mu V/m$ ) = Reading( $dB\mu V$ ) + Factor(dB/m);Over Limit(dB) = Result(dBµV/m) - Limit(dBµV/m)
- 2. Scan from 18GHz to 40GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.
- 4. The disturbance above 18GHz were very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.

#### Alternative(conducted measurements)

- a) Cabinet emissions measurements—A radiated test shall be performed to confirm that cabinet emissions are below the emission limits. For the cabinet-emission measurements the antenna may be replaced by a termination matching the nominal impedance of the antenna.
- Impedance matching—Conducted tests shall be performed using equipment that matches the nominal impedance of the antenna assembly used with the EUT.
- EIRP calculation—A value representative of an upper bound on out-ofband antenna gain (in dBi) shall be added to the measured antenna-port conducted emission power to compute EIRP within the specified measurement bandwidth. (For emissions in the restricted-bands, additional calculations are required to convert EIRP to field strength at the specified distance.) The upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater.86 However, for devices that operate in multiple bands using the same transmit antenna, the highest gain of the antenna within the operating band nearest to the out-of-band frequency being measured may be used, in lieu of the overall highest gain, when measuring emissions at frequencies within 20% of the absolute frequency at the nearest edge of that band, but in no case shall a value less than 2 dBi be selected.
- d) EIRP corrections for multiple outputs—For devices with multiple outputs occupying the same or overlapping frequency ranges in the same band (e.g., MIMO or beamforming devices), compute the total EIRP as follows:
- 1) Compute EIRP for each output, as described in step c).
- 2) Follow the procedures specified in Clause 14 for summing emissions across the outputs, or correcting emission levels measured on individual outputs by [10 log (NANT)], where NANT is the number of outputs.





FCC ID: 2ABC5-E0094

### 7.1. EUT Operation

#### Operating Environment:

1: 802.11a mode: Keep the EUT in continuously transmitting mode with 802.11a modulation type at lowest, middle and highest channel. All data rates has been tested and found the data rate @ 6Mbps is the worst case. Only the data of worst case is recorded in the report.


2: 802.11n mode: Keep the EUT in continuously transmitting mode with 802.11n modulation type at lowest, middle and highest channel. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report.

Test mode:

3: 802.11ac mode: Keep the EUT in continuously transmitting mode with 802.11ac modulation type at lowest, middle and highest channel. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report.

4: 802.11ax mode: Keep the EUT in continuously transmitting mode with 802.11ax modulation type at lowest, middle and highest channel. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report.

#### 7.2. Test Setup

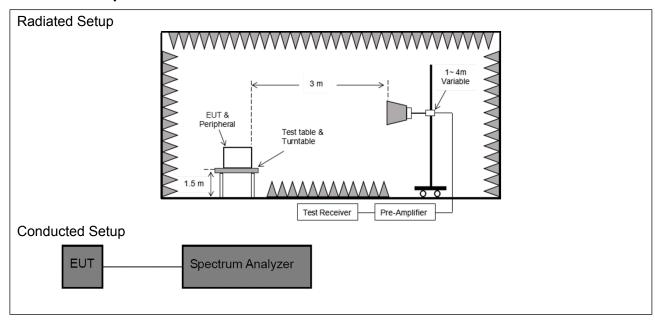



FCC ID: 2ABC5-E0094

#### 7.3. Test Data

Temperature:	25.6 °C	Humidity:	49 %	Atmospheric Pressure:	101 kPa
--------------	---------	-----------	------	-----------------------	---------

	TM1 / Band: 5150-5250 MHz / BW: 20 / L								
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector		
5150.00	36.96	15.99	52.95	68.20	-15.25	Н	Peak		
5150.00	39.02	15.99	55.01	68.20	-13.19	V	Peak		
5150.00	26.90	15.99	42.89	54.00	-11.11	Н	AVG		
5150.00	28.95	15.99	44.94	54.00	-9.06	V	AVG		
		TM1 / B	and: 5150-52	250 MHz / BV	V: 20 / H				
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector		
5350.00	37.41	16.43	53.84	68.20	-14.36	Н	Peak		
5350.00	40.34	16.43	56.77	68.20	-11.43	V	Peak		
5350.00	28.73	16.43	45.16	54.00	-8.84	Н	AVG		
5350.00	29.63	16.43	46.06	54.00	-7.94	V	AVG		

Remark: 1. Result=Reading + Factor

	TM2 / Band: 5150-5250 MHz / BW: 20 / L								
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector		
5150.00	35.91	15.99	51.90	68.20	-16.30	Н	Peak		
5150.00	37.30	15.99	53.29	68.20	-14.91	V	Peak		
5150.00	26.63	15.99	42.62	54.00	-11.38	Н	AVG		
5150.00	27.62	15.99	43.61	54.00	-10.39	V	AVG		
		TM2 / B	and: 5150-52	250 MHz / BV	V: 20 / H				
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector		
5350.00	37.73	16.43	54.16	68.20	-14.04	Н	Peak		
5350.00	38.77	16.43	55.20	68.20	-13.00	V	Peak		
5350.00	27.76	16.43	44.19	54.00	-9.81	Н	AVG		
5350.00	29.20	16.43	45.63	54.00	-8.37	V	AVG		

Remark: 1. Result=Reading + Factor



	TM2 / Band: 5150-5250 MHz / BW: 40 / L								
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector		
5150.00	36.45	15.99	52.44	68.20	-15.76	Н	Peak		
5150.00	38.30	15.99	54.29	68.20	-13.91	V	Peak		
5150.00	27.01	15.99	43.00	54.00	-11.00	Н	AVG		
5150.00	28.73	15.99	44.72	54.00	-9.28	V	AVG		
		TM2 / B	and: 5150-52	250 MHz / BV	V: 40 / H				
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector		
5350.00	38.06	16.43	54.49	68.20	-13.71	Н	Peak		
5350.00	36.93	16.43	53.36	68.20	-14.84	V	Peak		
5350.00	28.26	16.43	44.69	54.00	-9.31	Н	AVG		
5350.00	29.46	16.43	45.89	54.00	-8.11	V	AVG		

Remark: 1. Result=Reading + Factor

	TM3 / Band: 5150-5250 MHz / BW: 20 / L								
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector		
5150.00	36.90	15.99	52.89	68.20	-15.31	Н	Peak		
5150.00	38.65	15.99	54.64	68.20	-13.56	V	Peak		
5150.00	26.54	15.99	42.53	54.00	-11.47	Н	AVG		
5150.00	28.73	15.99	44.72	54.00	-9.28	V	AVG		
		TM3 / B	and: 5150-52	250 MHz / BV	V: 20 / H				
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector		
5350.00	37.86	16.43	54.29	68.20	-13.91	Н	Peak		
5350.00	38.11	16.43	54.54	68.20	-13.66	V	Peak		
5350.00	27.77	16.43	44.20	54.00	-9.80	Н	AVG		
5350.00	28.32	16.43	44.75	54.00	-9.25	V	AVG		

Remark: 1. Result=Reading + Factor



	TM3 / Band: 5150-5250 MHz / BW: 40 / L								
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector		
5150.00	35.86	15.99	51.85	68.20	-16.35	Н	Peak		
5150.00	36.31	15.99	52.30	68.20	-15.90	V	Peak		
5150.00	26.03	15.99	42.02	54.00	-11.98	Н	AVG		
5150.00	26.78	15.99	42.77	54.00	-11.23	V	AVG		
		TM3 / B	and: 5150-52	250 MHz / BV	V: 40 / H				
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector		
5350.00	38.01	16.43	54.44	68.20	-13.76	Н	Peak		
5350.00	37.16	16.43	53.59	68.20	-14.61	V	Peak		
5350.00	27.47	16.43	43.90	54.00	-10.10	Н	AVG		
5350.00	27.43	16.43	43.86	54.00	-10.14	V	AVG		

Remark: 1. Result=Reading + Factor

	TM3 / Band: 5150-5250 MHz / BW: 80 / L								
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector		
5150.00	36.00	15.99	51.99	68.20	-16.21	Н	Peak		
5150.00	36.39	15.99	52.38	68.20	-15.82	V	Peak		
5150.00	26.53	15.99	42.52	54.00	-11.48	Н	AVG		
5150.00	26.81	15.99	42.80	54.00	-11.20	V	AVG		
		TM3 / B	and: 5150-52	250 MHz / BV	V: 80 / H				
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector		
5350.00	38.25	16.43	54.68	68.20	-13.52	Н	Peak		
5350.00	37.41	16.43	53.84	68.20	-14.36	V	Peak		
5350.00	28.74	16.43	45.17	54.00	-8.83	Н	AVG		
5350.00	28.08	16.43	44.51	54.00	-9.49	V	AVG		

Remark: 1. Result=Reading + Factor



	TM4 / Band: 5150-5250 MHz / BW: 20 / L								
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector		
5150.00	35.95	15.99	51.94	68.20	-16.26	Н	Peak		
5150.00	37.35	15.99	53.34	68.20	-14.86	V	Peak		
5150.00	26.67	15.99	42.66	54.00	-11.34	Н	AVG		
5150.00	27.66	15.99	43.65	54.00	-10.35	V	AVG		
		TM4 / B	and: 5150-52	250 MHz / BV	V: 20 / H				
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector		
5350.00	37.78	16.43	54.21	68.20	-13.99	Н	Peak		
5350.00	38.81	16.43	55.24	68.20	-12.96	V	Peak		
5350.00	27.81	16.43	44.24	54.00	-9.76	Н	AVG		
5350.00	29.28	16.43	45.71	54.00	-8.29	V	AVG		

Remark: 1. Result=Reading + Factor

	TM4 / Band: 5150-5250 MHz / BW: 40 / L								
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector		
5150.00	36.51	15.99	52.50	68.20	-15.70	Н	Peak		
5150.00	38.36	15.99	54.35	68.20	-13.85	V	Peak		
5150.00	27.09	15.99	43.08	54.00	-10.92	Н	AVG		
5150.00	28.76	15.99	44.75	54.00	-9.25	V	AVG		
		TM4 / B	and: 5150-52	250 MHz / BV	V: 40 / H				
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector		
5350.00	38.11	16.43	54.54	68.20	-13.66	Н	Peak		
5350.00	36.96	16.43	53.39	68.20	-14.81	V	Peak		
5350.00	28.34	16.43	44.77	54.00	-9.23	Н	AVG		
5350.00	29.55	16.43	45.98	54.00	-8.02	V	AVG		

Remark: 1. Result=Reading + Factor



	TM4 / Band: 5150-5250 MHz / BW: 80 / L								
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector		
5150.00	36.04	15.99	52.03	68.20	-16.17	Н	Peak		
5150.00	36.48	15.99	52.47	68.20	-15.73	V	Peak		
5150.00	26.62	15.99	42.61	54.00	-11.39	Н	AVG		
5150.00	26.87	15.99	42.86	54.00	-11.14	V	AVG		
		TM4 / B	and: 5150-52	250 MHz / BV	V: 80 / H				
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector		
5350.00	38.34	16.43	54.77	68.20	-13.43	Н	Peak		
5350.00	37.47	16.43	53.90	68.20	-14.30	V	Peak		
5350.00	28.84	16.43	45.27	54.00	-8.73	Н	AVG		
5350.00	28.14	16.43	44.57	54.00	-9.43	V	AVG		

Remark: 1. Result=Reading + Factor



FCC ID: 2ABC5-E0094

# 8. Undesirable emission limits (below 1GHz)

Test Requirement:	47 CFR Part 15.407(b)(	9)					
	Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209.  Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:						
	0.009-0.490 0.490-1.705	Field strength (microvolts/meter)  2400/F(kHz)  24000/F(kHz)	Measurement distance (meters) 300 30				
	1.705-30.0	30	30				
	30-88	100 **	3				
Test Limit:	88-216	150 **	3				
	216-960	200 **	3				
	Above 960	500 paragraph (g), fundamental e	3				
	intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.						
Test Method:	ANSI C63.10-2020, sec	tion 12.7.4, 12.7.5					
Procedure:	ANSI C63.10-2020, section 12.7.4, 12.7.5  Below 1GHz: a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin						

#### **Shenzhen Anbotek Compliance Laboratory Limited**





FCC ID: 2ABC5-E0094

would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.

- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete. Remark:
- 1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
- 2. Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3. The disturbance below 1GHz was very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.

#### Above 1GHz:

- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete. Remark:
- 1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
- 2. Scan from 18GHz to 40GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB





FCC ID: 2ABC5-E0094

below the limit need not be reported.

- 3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.
- 4. The disturbance above 18GHz were very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.

# 8.1. EUT Operation

### Operating Environment:

1: 802.11a mode: Keep the EUT in continuously transmitting mode with 802.11a modulation type at lowest, middle and highest channel. All data rates has been tested and found the data rate @ 6Mbps is the worst case. Only the data of worst case is recorded in the report.


2: 802.11n mode: Keep the EUT in continuously transmitting mode with 802.11n modulation type at lowest, middle and highest channel. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report.

Test mode:

- 3: 802.11ac mode: Keep the EUT in continuously transmitting mode with 802.11ac modulation type at lowest, middle and highest channel. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report.
- 4: 802.11ax mode: Keep the EUT in continuously transmitting mode with 802.11ax modulation type at lowest, middle and highest channel. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report.



# 8.2. Test Setup

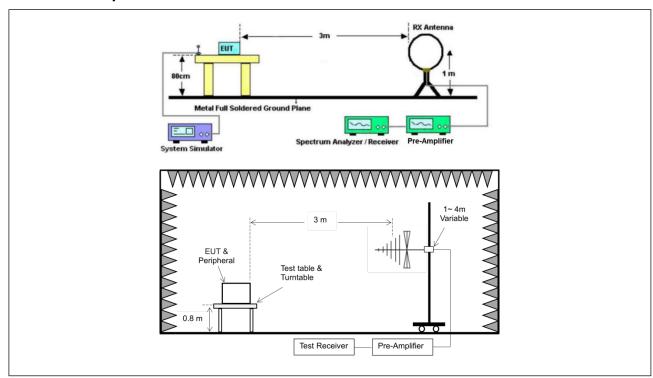




FCC ID: 2ABC5-E0094

### 8.3. Test Data

The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.


Module No.: R153\_1.0A


Temperature: 25.1 °C Humidity: 55 % Atmospheric Pressure: 101 kPa

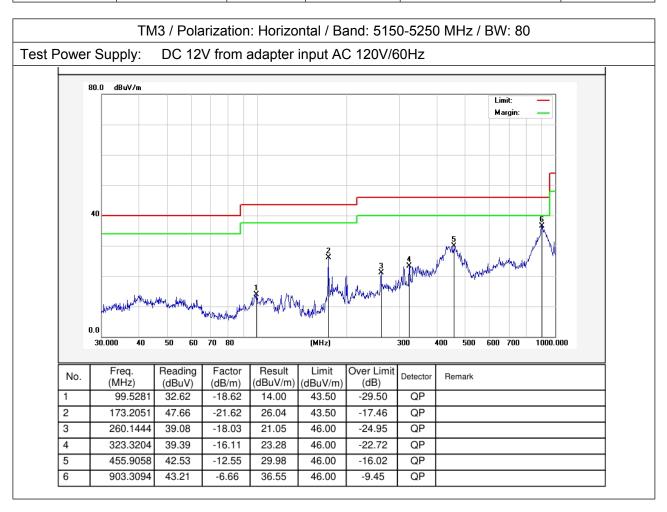



FCC ID: 2ABC5-E0094




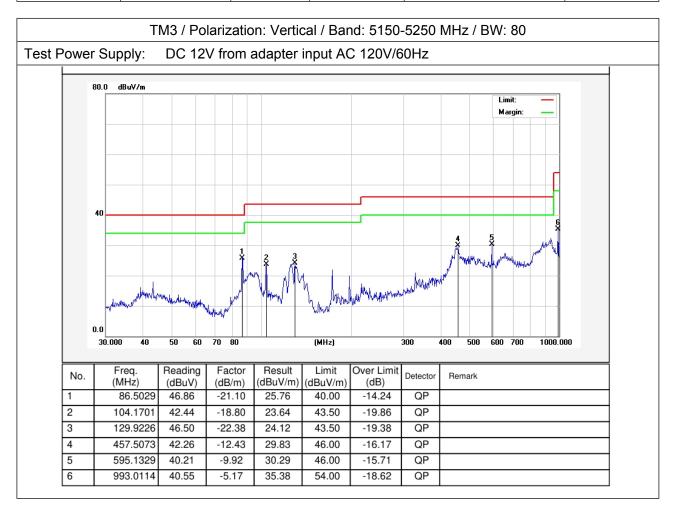




Module No.: R153\_V1.0B

Temperature: 25.1 °C Humidity: 55 % Atmospheric Pressure: 101 kPa

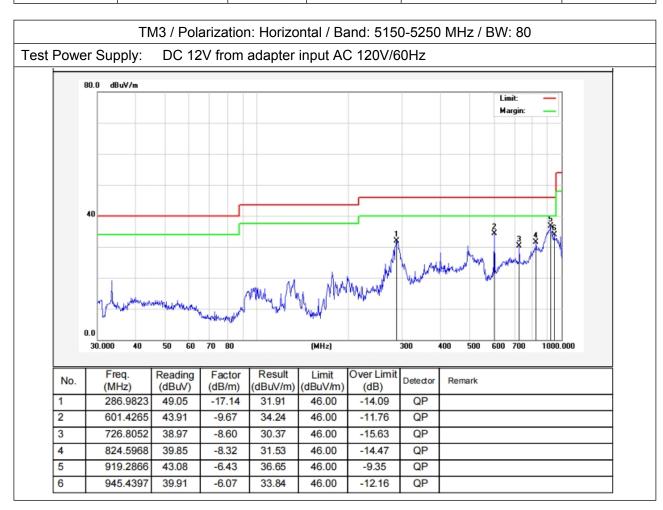



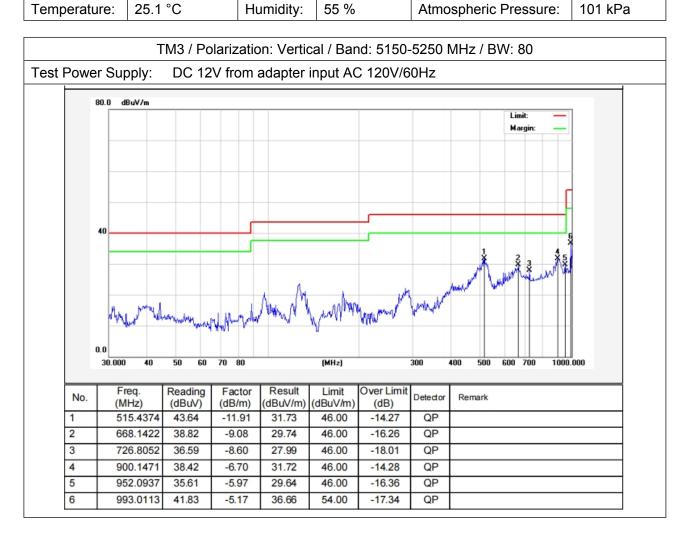

#### Note:

- 1. Only the worst case data was showed in the report.
- 2. Result(dB $\mu$ V) = Reading(dB $\mu$ V) + Factor(dB); Over Limit(dB) = Result(dB $\mu$ V) - Limit(dB $\mu$ V)



FCC ID: 2ABC5-E0094

# 9. Undesirable emission limits (above 1GHz)

Test Requirement:	47 CED Dort 15 407/h	.\/1\						
rest Requirement.		47 CFR Part 15.407(b)(1)						
	47 CFR Part 15.407(b)(4)							
	,	47 CFR Part 15.407(b)(10)  For transmitters operating in the 5.15-5.25 GHz band: All emissions outside						
	of the 5.15-5.35 GHz	band shall not exceed	u an e.i.r.p. oi –z	ZZ UBITI/IVITZ.				
	For transmitters opera	iting solely in the 5.7:	25-5 850 GHz ba	and:				
	All emissions shall be							
	above or below the ba							
	above or below the ba							
	edge increasing linear	edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or						
	below the band edge, and from 5 MHz above or below the band edge							
	increasing linearly to a	a level of 27 dBm/MH	z at the band ed	ge.				
	MHz	MHz	MHz	GHz				
	0.090-0.110	16.42-16.423	399.9-410	4.5-5.15				
	1 0.495-0.505	16.69475-	608-614	5.35-5.46				
	0.4505.0.4005	16.69525	000 1010					
	2.1735-2.1905	16.80425-	960-1240	7.25-7.75				
	4 105 4 100	16.80475	1200 1427	0.005.0.5				
	4.125-4.128 4.17725-4.17775	25.5-25.67 37.5-38.25	1300-1427 1435-1626.5	8.025-8.5 9.0-9.2				
	4.20725-4.20775	73-74.6	1645.5-	9.3-9.5				
	4.20123-4.20113	73-74.0	1646.5	3.3-3.3				
	6.215-6.218	74.8-75.2	1660-1710	10.6-12.7				
	6.26775-6.26825	108-121.94	1718.8-	13.25-13.4				
Foot Limit			1722.2					
Гest Limit:	6.31175-6.31225	123-138	2200-2300	14.47-14.5				
	8.291-8.294	149.9-150.05	2310-2390	15.35-16.2				
	8.362-8.366	156.52475-	2483.5-2500	17.7-21.4				
		156.52525						
	8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12				
	8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0				
	12.29-12.293	167.72-173.2	3332-3339	31.2-31.8				
	12.51975-12.52025	240-285	3345.8-3358	36.43-36.5				
	12.57675-12.57725	322-335.4	3600-4400	(2)				
	13.36-13.41							

detector. Above 1000 MHz, compliance with the emission limits in §

emissions. The provisions in § 15.35apply to these measurements.

15.209shall be demonstrated based on the average value of the measured



Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength	Measurement
·	(microvolts/meter)	distance
		(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100 **	3
88-216	150 **	3
216-960	200 **	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.

In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

#### Test Method:

ANSI C63.10-2020, section 12.7.4, 12.7.6, 12.7.7

#### Above 1GHz:

- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case

# Procedure:



FCC ID: 2ABC5-E0094

- i. Repeat above procedures until all frequencies measured was complete. Remark:
- 1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
- 2. Scan from 18GHz to 40GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.
- 4. The disturbance above 18GHz were very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.

Alternative(conducted measurements)

- a) Cabinet emissions measurements—A radiated test shall be performed to confirm that cabinet emissions are below the emission limits. For the cabinet-emission measurements the antenna may be replaced by a termination matching the nominal impedance of the antenna.
- b) Impedance matching—Conducted tests shall be performed using equipment that matches the nominal impedance of the antenna assembly used with the EUT.
- c) EIRP calculation—A value representative of an upper bound on out-ofband antenna gain (in dBi) shall be added to the measured antenna-port conducted emission power to compute EIRP within the specified measurement bandwidth. (For emissions in the restricted-bands, additional calculations are required to convert EIRP to field strength at the specified distance.) The upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater.86 However, for devices that operate in multiple bands using the same transmit antenna, the highest gain of the antenna within the operating band nearest to the out-of-band frequency being measured may be used, in lieu of the overall highest gain, when measuring emissions at frequencies within 20% of the absolute frequency at the nearest edge of that band, but in no case shall a value less than 2 dBi be selected.
- d) EIRP corrections for multiple outputs—For devices with multiple outputs occupying the same or overlapping frequency ranges in the same band (e.g., MIMO or beamforming devices), compute the total EIRP as follows:
- Compute EIRP for each output, as described in step c).
- Follow the procedures specified in Clause 14 for summing emissions across the outputs, or correcting emission levels measured on individual outputs by [10 log (NANT)], where NANT is the number of outputs.

## 9.1. EUT Operation

Operating Environment:

Test mode: 1: 802.11a mode: Keep the EUT in continuously transmitting mode with 802.11a








modulation type at lowest, middle and highest channel. All data rates has been tested and found the data rate @ 6Mbps is the worst case. Only the data of worst case is recorded in the report.

- 2: 802.11n mode: Keep the EUT in continuously transmitting mode with 802.11n modulation type at lowest, middle and highest channel. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report.
- 3: 802.11ac mode: Keep the EUT in continuously transmitting mode with 802.11ac modulation type at lowest, middle and highest channel. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report.
- 4: 802.11ax mode: Keep the EUT in continuously transmitting mode with 802.11ax modulation type at lowest, middle and highest channel. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report.

## 9.2. Test Setup

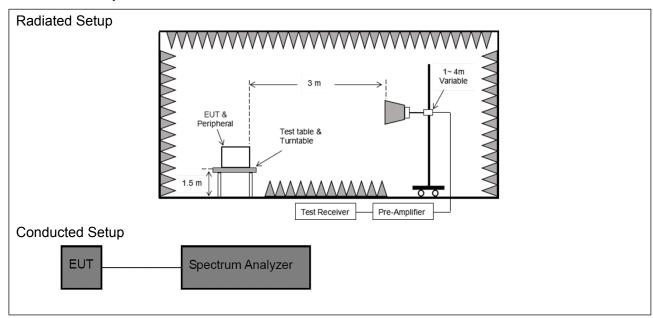



### 9.3. Test Data

Temperature:	25.6 °C	Humidity:	49 %	Atmospheric Pressure:	101 kPa
--------------	---------	-----------	------	-----------------------	---------

TM3/ Band: 5150-5250 MHz / BW: 80								
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector	
10420.00	30.00	23.81	53.81	68.20	-14.39	V	Peak	
15630.00	30.67	29.36	60.03	68.20	-8.17	V	Peak	
10420.00	30.91	23.81	54.72	68.20	-13.48	Н	Peak	
15630.00	32.16	29.36	61.52	68.20	-6.68	Н	Peak	
10420.00	20.49	23.81	44.30	54.00	-9.70	V	AVG	
15630.00	21.41	29.36	50.77	54.00	-3.23	V	AVG	
10420.00	20.62	23.81	44.43	54.00	-9.57	Н	AVG	
15630.00	21.60	29.36	50.96	54.00	-3.04	Н	AVG	

#### Remark:

- 1. 1.Result =Reading + Factor
- 2. 2.Only the worst case (802.11ac(HT80)) is recorded in the report.
- 3. 3.Test frequency are from 1GHz to 40GHz, the amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported.

TM3 / Band: 5725-5850 MHz / BW: 80							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
11550.000	30.12	23.40	53.52	68.20	-14.68	V	Peak
17325.000	30.85	32.13	62.98	68.20	-5.22	V	Peak
11550.000	31.11	23.40	54.51	68.20	-13.69	Н	Peak
17325.000	31.36	32.13	63.49	68.20	-4.71	Н	Peak
11550.000	17.62	23.40	41.02	54.00	-12.98	V	AVG
17325.000	18.19	32.13	50.32	54.00	-3.68	V	AVG
11550.000	17.74	23.40	41.14	54.00	-12.86	Н	AVG
17325.000	18.75	32.13	50.88	54.00	-3.12	Н	AVG

### Remark:

- 1. 1. Result =Reading + Factor
- 2. Only the worst case (802.11ac(HT80)) is recorded in the report.
- 3. 3. Test frequency are from 1GHz to 40GHz, the amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported.







FCC ID: 2ABC5-E0094

# **APPENDIX I -- TEST SETUP PHOTOGRAPH**

Please refer to separated files Appendix I -- Test Setup Photograph\_RF

# **APPENDIX II -- EXTERNAL PHOTOGRAPH**

Please refer to separated files Appendix II -- External Photograph

# APPENDIX III -- INTERNAL PHOTOGRAPH

Please refer to separated files Appendix III -- Internal Photograph

