FCC TEST REPORT

For

Xingmeixing Electronics Co., Ltd

Bluetooth Speaker

Model No.: 289

Prepared for : Xingmeixing Electronics Co., Ltd

Address : Room 3166, Block B, Electronic Science & Technology Bldg., 2070

Shennan Zhong Road, Shenzhen, Guangdong, China

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.

Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue,

Bao'an District, Shenzhen, Guangdong, China

Tel : (+86)755-82591330 Fax : (+86)755-82591332 Web : www.LCS-cert.com

Mail : webmaster@LCS-cert.com

Date of receipt of test sample : May 05, 2015

Number of tested samples : 1

Serial number : Prototype

Date of Test : May 05, 2015 - May 23, 2015

Date of Report : May 23, 2015

FCC TEST REPORT FCC CFR 47 PART 15 C(15.247): 2014

Report Reference No.: LCS1504251219E

Date of Issue.....: May 23, 2015

Testing Laboratory Name: Shenzhen LCS Compliance Testing Laboratory Ltd.

Address..... : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue,

Bao'an District, Shenzhen, Guangdong, China

Testing Location/ Procedure: Full application of Harmonised standards

Partial application of Harmonised standards \Box

Other standard testing method \square

Applicant's Name: Xingmeixing Electronics Co., Ltd

Address.....: Room 3166, Block B, Electronic Science & Technology Bldg.,

2070 Shennan Zhong Road, Shenzhen, Guangdong, China

Test Specification

Standard....: FCC CFR 47 PART 15 C(15.247): 2014

Test Report Form No.: LCSEMC-1.0

TRF Originator.....: Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF: Dated 2011-03

Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description.....: Bluetooth Speaker

Trade Mark: N/A

Model/ Type reference: 289

Ratings..... : DC 3.7V by battery (600mAh)

Recharge Voltage: 5V-, 1A

Result: Positive

Compiled by:

Supervised by:

Approved by:

Dick Su/ File administrators

Danny Huang / Technique principal

Gavin Liang/ Manager

FCC -- TEST REPORT

Test Report No.: LCS1504251219E

May 23, 2015

Date of issue

Type / Model..... : 289 EUT.....: Bluetooth Speaker Applicant..... : Xingmeixing Electronics Co., Ltd Address..... : Room 3166, Block B, Electronic Science & Technology Bldg., 2070 Shennan Zhong Road, Shenzhen, Guangdong, China Telephone..... Fax..... Manufacturer..... : Xingmeixing Electronics Co., Ltd : Room 3166, Block B, Electronic Science & Technology Bldg., 2070 Address..... Shennan Zhong Road, Shenzhen, Guangdong, China Telephone..... Fax..... Factory..... : Xingmeixing Electronics Co., Ltd Address..... : Room 3166, Block B, Electronic Science & Technology Bldg., 2070 Shennan Zhong Road, Shenzhen, Guangdong, China Telephone..... Fax.....

Test Result Positive

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

TABLE OF CONTENTS

| Description | Pag |
|---|-----|
| 1. GENERAL INFORMATION | 5 |
| 1.1. DESCRIPTION OF DEVICE (EUT) | |
| 1.2. SUPPORT EQUIPMENT LIST | |
| 1.3. External I/O | |
| 1.4. DESCRIPTION OF TEST FACILITY. | |
| 1.5. STATEMENT OF THE MEASUREMENT UNCERTAINTY | 6 |
| 1.6. MEASUREMENT UNCERTAINTY | |
| 1.7. DESCRIPTION OF TEST MODES | 7 |
| 2. TEST METHODOLOGY | |
| 2.1. EUT CONFIGURATION | |
| 2.2. EUT Exercise | |
| 2.3. GENERAL TEST PROCEDURES | 8 |
| 3. SYSTEM TEST CONFIGURATION | 9 |
| 3.1. JUSTIFICATION | |
| 3.2. EUT Exercise Software | |
| 3.3. SPECIAL ACCESSORIES | 9 |
| 3.4. BLOCK DIAGRAM/SCHEMATICS | |
| 3.5. EQUIPMENT MODIFICATIONS | |
| 3.6. TEST SETUP | 9 |
| I. SUMMARY OF TEST RESULTS | |
| 5. TEST RESULT | |
| 5.1. MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT | 11 |
| 5.2. POWER SPECTRAL DENSITY MEASUREMENT | |
| 5.3. 6 DB SPECTRUM BANDWIDTH MEASUREMENT | |
| 5.4. OCCUPIED BANDWIDTH | |
| 5.5. RADIATED EMISSIONS MEASUREMENT | |
| 5.6. CONDUCTED SPURIOUS EMISSIONS AND BAND EDGES TEST | |
| 5.7. POWER LINE CONDUCTED EMISSIONS | |
| 5.8. ANTENNA CONNECTED CONSTRUCTION | 34 |
| 6. LIST OF MEASURING EQUIPMENTS | 35 |

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT : Bluetooth Speaker

Model No. : 289

Frequency Range : 2.402-2.480GHz

Channel Number : 40 channels for Bluetooth V4.0 (DTS)

Channel frequency : 2402.00-2480.00MHz (Channel Frequency=2402+2(K-1), K=1, 2,

340);

Channel Spacing : 2MHz for Bluetooth V4.0 (DTS)

Modulation Type : V4.0(BLE): GFSK

Bluetooth Version : V4.0

Antenna Gain : Internal antenna,0dBi(Max.)

Input Voltage : DC 3.7V by battery (600mAh)

Recharge Voltage: 5V=, 1A

1.2. Support equipment List

| | Manufacturer | Description | Model | Serial Number | Certificate |
|---|--------------|-------------|-------|---------------|-------------|
| 3 | Lenovo | PC | B470 | 13:50 | DOC |

1.3. External I/O

| I/O Port Description | Quantity | Cable |
|----------------------|----------|-------|
| AUX IN | 1. (P) | N/A |
| USB Port | 2 | N/A |
| TF Port | 5 105 | N/A |

1.4. Description of Test Facility

Site Description

EMC Lab.

: CNAS Registration Number. is L4595.

FCC Registration Number. is 899208.

Industry Canada Registration Number. is 9642A-1.

VCCI Registration Number. is C-4260 and R-3804.

ESMD Registration Number. is ARCB0108. UL Registration Number. is 100571-492.

TUV SUD Registration Number. is SCN1081.

TUV RH Registration Number. is UA 50296516-001

1.5. Statement of The Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

1.6. Measurement Uncertainty

| Test Item | | Frequency Range | Uncertainty | Note |
|------------------------|---|-----------------|-------------|------|
| (35) | | 9KHz~30MHz | 3.10dB | (1) |
| | 9 | 30MHz~200MHz | 2.96dB | (1) |
| Radiation Uncertainty | : | 200MHz~1000MHz | 3.10dB | (1) |
| | | 1GHz~26.5GHz | 3.80dB | (1) |
| | | 26.5GHz~40GHz | 3.90dB | (1) |
| Conduction Uncertainty | : | 150kHz~30MHz | 1.63dB | (1) |
| Power disturbance | : | 30MHz~300MHz | 1.60dB | (1) |

^{(1).} This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.7. Description Of Test Modes

Bluetooth operates in the unlicensed ISM Band at 2.4GHz. The following operating modes were applied for the related test items.

This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position. During test, the EUT is set to transmit in 100% duty cycle. And its related average correction factor is 0.

All test modes were tested, only the result of the worst case was recorded in the report.

| , | J | 1 |
|--------------------|--------------------------|------------------|
| Mode of Operations | Frequency Range (MHz) | Data Rate (Mbps) |
| (35) | 2402 | 123 |
| GFSK | 2440 | 1 |
| 23 23 | 2480 | 3 1 |
| | For Conducted Emission | |
| Test Mode | 1200 | TX Mode |
| | For Radiated Emission | |
| Test Mode | (32) | TX Mode |
| | | |

2. TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

The radiated testing was performed at an antenna-to-EUT distance of 3 meters. All radiated and conducted emissions measurement was performed at Shenzhen LCS Compliance Testing Laboratory Ltd..

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to FCC's request, Test Procedure KDB 558074 is required to be used for this kind of FCC 15.247 digital modulation device.

According to its specifications, the EUT must comply with the requirements of the Section 15.203, 15.205, 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C

2.3. General Test Procedures

2.3.1 Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

2.3.2 Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4

3. SYSTEM TEST CONFIGURATION

3.1. Justification

The system was configured for testing in a continuous transmit condition.

3.2. EUT Exercise Software

N/A

3.3. Special Accessories

N/A

3.4. Block Diagram/Schematics

Please refer to the related document

3.5. Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

3.6. Test Setup

Please refer to the test setup photo.

4. SUMMARY OF TEST RESULTS

| FCC Rules | Description of Test | Result |
|---------------------|---|-----------|
| §15.247(b) | Maximum Conducted Output Power | Compliant |
| §15.247(e) | Power Spectral Density | Compliant |
| §15.247(a)(2) | 6dB Bandwidth | Compliant |
| §15.247(a) | Occupied Bandwidth | Compliant |
| §15.209, §15.247(d) | Radiated and Conducted Spurious Emissions | Compliant |
| §15.205 | Emissions at Restricted Band | Compliant |
| §15.207(a) | Line Conducted Emissions | Compliant |
| §15.203 | Antenna Requirements | Compliant |

5. TEST RESULT

5.1. Maximum Conducted Output Power Measurement

5.1.1. Standard Applicable

According to §15.247(b) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.


5.1.2. Measuring Instruments

Please refer to section 6 of equipments list in this report.

5.1.3. Test Procedures

The transmitter output (antenna port) was connected to the power meter.

5.1.4. Test Setup Layout



5.1.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.1.6. Test Result of Maximum Conducted Output Power(Peak)

| Modulation | Frequency (MHz) | Output Power (dBm) | Output Power (mW) | Limit (mW) | Result |
|------------|-----------------|--------------------|-------------------|---------------|--------|
| 0.00 | 2402 | 7.81 | 6.04 | 1000 | Pass |
| GFSK | 2440 | 7.76 | 5.97 | 1000 | Pass |
| P. P. | 2480 | 7.53 | 5.66 | 1000 | Pass |

5.2. Power Spectral Density Measurement

5.2.1. Standard Applicable

According to §15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


5.2.2. Measuring Instruments

Please refer to section 6 of equipments list in this report.

5.2.3. Test Procedures

- 1. The transmitter was connected directly to a Spectrum Analyzer through a directional couple.
- 2. The power was monitored at the coupler port with a Spectrum Analyzer. The power level was set to the maximum level.
- 3. Set the RBW = 3 kHz.
- 4. Set the VBW \geq 3*RBW.
- 5. Set the span to 1.5 times the DTS channel bandwidth.
- 6. Detector = peak.
- 7. Sweep time = auto couple.
- 8. Trace mode = max hold.
- 9. Allow trace to fully stabilize.
- 10. Use the peak marker function to determine the maximum power level in any 3 kHz band segment within the fundamental EBW.

5.2.4. Test Setup Layout



5.2.5. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

5.2.6. Test Result of Power Spectral Density


| Modulation | Frequency (MHz) | Reading Level (dBm) | Max. Limit (dBm/3KHz) | Result |
|------------|-----------------|---------------------|--------------------------|--------|
| 13 | 2402 | -9.612 | 8 | Pass |
| GFSK | 2440 | -8.576 | 8 | Pass |
| 2 23 | 2480 | -8.144 | 8 | Pass |

The test data refer to the following page.


Low Channel, 2402MHz

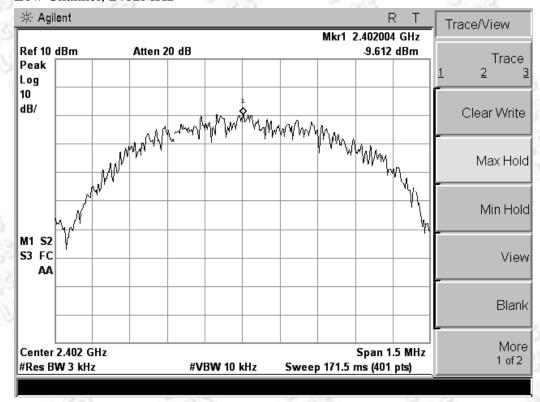

Middle Channel, 2440MHz

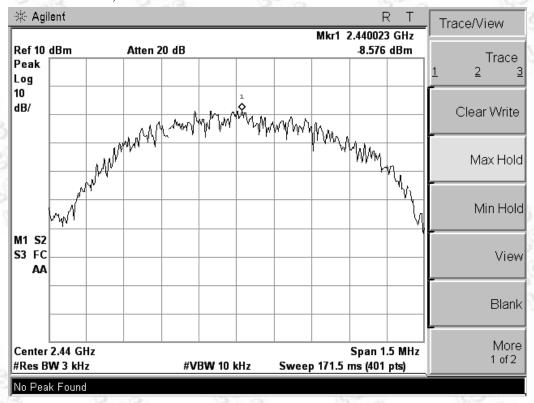

High Channel, 2480MHz

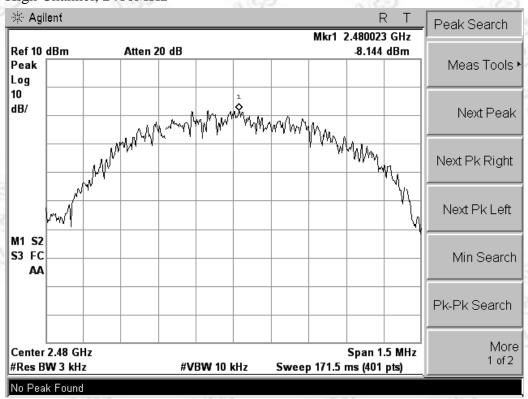

5.3. 6 dB Spectrum Bandwidth Measurement

5.3.1. Standard Applicable

According to §15.247(a)(2) For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

5.3.2. Measuring Instruments and Setting


Please refer to section 6 of equipments list in this report. The following table is the setting of the Spectrum Analyzer.

| · · | | | |
|--------------------|----------|-------|--------|
| Spectrum Parameter | Setting | 7.65 | 183 |
| Attenuation | Auto | 23 | 23 |
| Span Frequency | > RBW | 5-23 | 120031 |
| Detector | Peak | Page | Book |
| Trace | Max Hold | 17.05 | 1300 |
| Sweep Time | 100ms | 1/50 | (35) |

5.3.3. Test Procedures

- 1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
- 2. The resolution bandwidth and the video bandwidth were set according to KDB 558074.
- 3. Measured the spectrum width with power higher than 6dB below carrier.

5.3.4. Test Setup Layout



5.3.5. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

5.3.6. Test Result of 6dB Spectrum Bandwidth


| Modulation | Frequency (MHz) | 6dB Bandwidth (KHz) | Min. Limit (KHz) | Result |
|------------|--------------------|------------------------|---------------------|----------|
| Ball | 2402 | 742.608 | 500 | Complies |
| GFSK | 2440 | 742.412 | 500 | Complies |
| | 2480 | 748.224 | 500 | Complies |

The test data refer to the following page.


Low Channel, 2402MHz

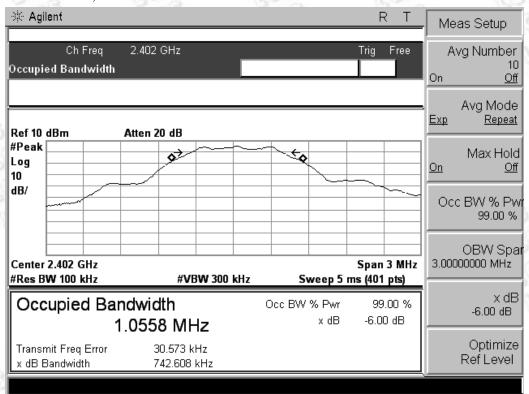

Middle Channel, 2440MHz

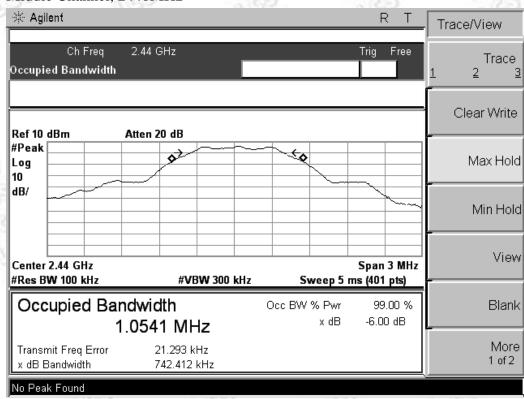

High Channel, 2480MHz

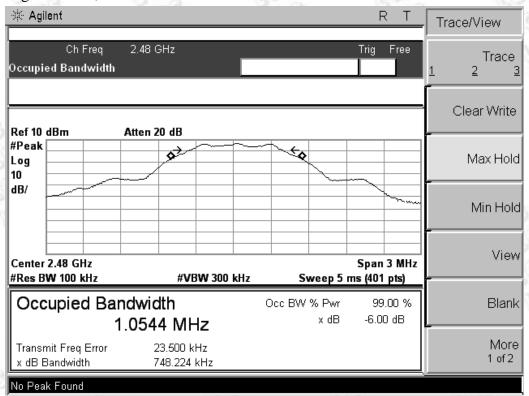

5.4. Occupied Bandwidth

5.4.1. Standard Applicable

According to §15.247(a) Operation under the provisions of this section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

For systems using digital modulation techniques, the EUT may operate in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

5.4.2. Measuring Instruments and Setting

Please refer to section 6 of equipments list in this report. The following table is the setting of the Spectrum Analyzer.


| Spectrum Parameter | Setting | | |
|--------------------|-----------------|--------|-------|
| Attenuation | Auto | Paris. | 0,50 |
| Span Frequency | > RBW | 13.50 | 11.50 |
| RBW | RBW = 100kHz | 100 | 20 |
| VBW | 3 times the RBW | | 3 |
| Detector | Peak | 55 | 5 |
| Trace | Max Hold | 23 | aB |
| Sweep Time | 100ms | 7.3 | 233 |

5

5.4.3. Test Procedures

The transmitter output is connected to the spectrum analyzer. The RBW is set to 100kHz. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal bandwidth measurement function is utilized.

5.4.4. Test Setup Layout




5.4.5. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.


5.4.6. Test Result of 99% Occupied Bandwidth.

| | | 99% OBW |
|---------|-----------|---------|
| Channel | Frequency | (MHz) |
| 131.a | 2402 | 1.240 |
| 20 | 2440 | 1.230 |
| 40 | 2480 | 1.356 |

The test data refer to the following page:

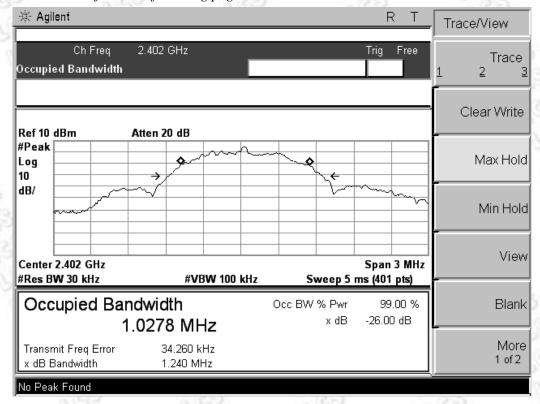

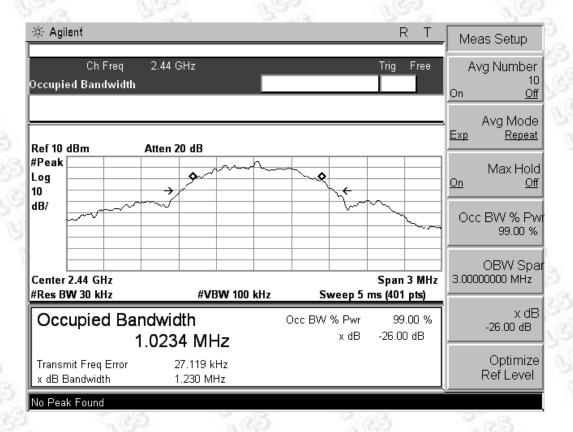

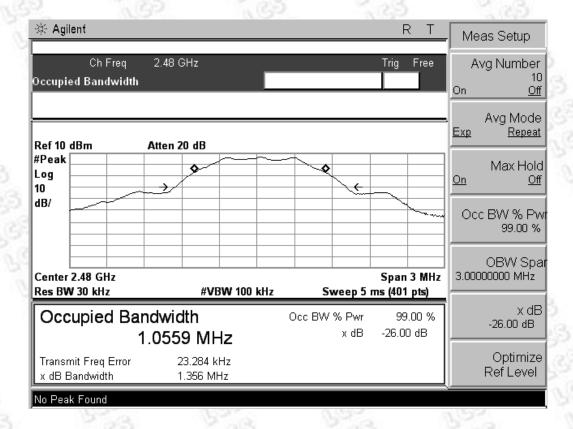

5.5. Radiated Emissions Measurement

5.5.1. Standard Applicable

According to §15.247 (d) 20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequencies(MHz) | Field Strength(microvolts/meter) | Measurement Distance(meters) | | | | |
|------------------|----------------------------------|------------------------------|--|--|--|--|
| 0.009~0.490 | 2400/F(KHz) | 300 | | | | |
| 0.490~1.705 | 24000/F(KHz) | 30 | | | | |
| 1.705~30.0 | 30 | 30 | | | | |
| 30~88 | 100 | 3 | | | | |
| 88~216 | 150 | 3 | | | | |
| 216~960 | 200 | 3 | | | | |
| Above 960 | 500 | 3 | | | | |

5.5.2. Measuring Instruments and Setting

Please refer to section 6 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

| Spectrum Parameter | Setting | | | | | |
|---|--|--|--|--|--|--|
| Attenuation | Auto | | | | | |
| Start Frequency | 1000 MHz | | | | | |
| Stop Frequency | 10th carrier harmonic | | | | | |
| RB / VB (Emission in restricted band) | 1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average | | | | | |
| RB / VB (Emission in non-restricted band) | 1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average | | | | | |


| Spectrum Parameter | Setting |
|------------------------|----------------------------------|
| Attenuation | Auto |
| Start ~ Stop Frequency | 9kHz~150kHz / RB 200Hz for QP |
| Start ~ Stop Frequency | 150kHz~30MHz / RB 9kHz for QP |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB 100kHz for QP |

5.5.3. Test Procedures


- 1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.

- 4. For each suspected emissions, the antenna tower was scan (from 1 m to 4 m) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.
- 5.5.4. Test Setup Layout


For radiated emissions below 30MHz

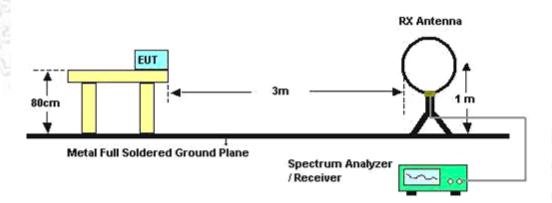

For radiated emissions above 30MHz

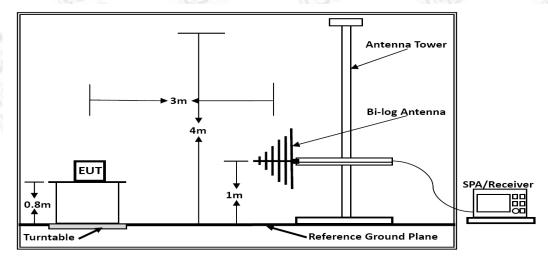

Below 1GHz

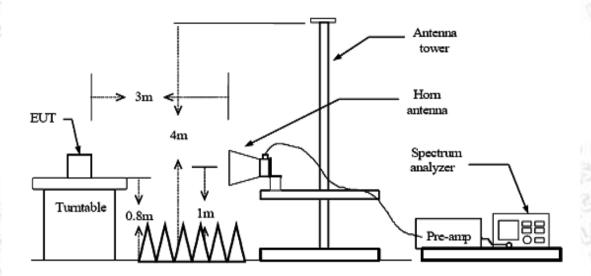

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade form 3m to 1.5m.

Distance extrapolation factor = 20 log (specific distanc [3m] / test distance [1.5m]) (dB); Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

5.5.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.5.6. Results of Radiated Emissions (9kHz~30MHz)

| Temperature | 25°C | Humidty | 60% |
|---------------|---------|----------------|---------|
| Test Engineer | Dick Su | Configurations | BT V4.0 |

| Freq. | Level | Over Limit | Over Limit | Remark | |
|---------|--------|------------|------------|----------|--|
| (MHz) | (dBuV) | (dB) | (dBuV) | | |
| 30 - 13 | 500 | 99 - 1 | - 3 | See Note | |

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = 40 log (specific distance / test distance) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

5.5.7. Results of Radiated Emissions (30MHz~1GHz)

PASS.

The test data please refer to following page:

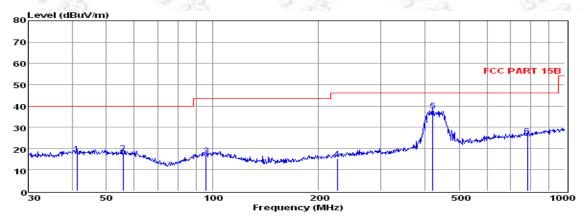

Env./Ins: 24℃/56%

EUT: Bluetooth Speaker

M/N: 289

Power Rating:

DC 3.7V TX-Low Channel Test Mode:


Operator: Dick

Memo:

pol: VERTICAL

| | Freq | Reading | CabLos | Antfac | Measured | Limit | Over | Remark |
|---|--------|---------|--------|--------|----------|--------|--------|--------|
| | MHz | dBuV | dВ | dB/m | dBuV/m | dBuV/m | dВ | |
| 1 | 41.28 | 3.49 | 0.50 | 13.57 | 17.56 | 40.00 | -22.44 | QP |
| 2 | 55.80 | 4.45 | 0.47 | 12.97 | 17.89 | 40.00 | -22.11 | QP |
| 3 | 95.76 | 3.27 | 0.58 | 12.89 | 16.74 | 43.50 | -26.76 | QP |
| 4 | 226.10 | 2.90 | 0.89 | 11.47 | 15.26 | 46.00 | -30.74 | QP |
| 5 | 422.06 | 20.87 | 1.33 | 15.48 | 37.68 | 46.00 | -8.32 | QP |
| 6 | 782.35 | 4.46 | 1.63 | 19.84 | 25.93 | 46.00 | -20.07 | QP |

- Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that ate 20db blow the offficial limit are not reported

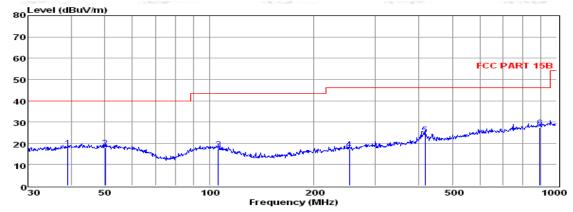

24℃/56% Env./Ins:

EUT: Bluetooth Speaker

M/N: 289

DC 3.7V Power Rating:

Test Mode: TX-Low Channel

Operator: Memo:

pol: HORIZONTAL

| | Freq | Reading | CabLos | Antfac | Measured | Limit | Over | Remark |
|---|--------|---------|--------|--------|----------|--------|--------|--------|
| | MHz | dBuV | dВ | dB/m | dBuV/m | dBuV/m | dB | |
| 1 | 39.16 | 4.02 | 0.38 | 13.37 | 17.77 | 40.00 | -22.23 | QP |
| 2 | 50.06 | 4.05 | 0.54 | 13.25 | 17.84 | 40.00 | -22.16 | QP |
| 3 | 106.01 | 4.03 | 0.68 | 12.61 | 17.32 | 43.50 | -26.18 | QP |
| 4 | 252.95 | 4.40 | 0.90 | 12.06 | 17.36 | 46.00 | -28.64 | QP |
| 5 | 417.64 | 7.36 | 1.32 | 15.42 | 24.10 | 46.00 | -21.90 | QP |
| 6 | 893.86 | 4.40 | 1.84 | 21.03 | 27.27 | 46.00 | -18.73 | QP |
| | | | | | | | | |

- Note: 1. All readings are Quasi-peak values. 2. Measured= Reading + Antenna Factor + Cable Loss
- 3. The emission that ate 20db blow the offficial limit are not reported

***Note: Pre-scan all mode and recorded the worst case results in this report.

5.5.8. Results for Radiated Emissions (Above 1GHz)

Channel 1

| Freq. MHz | Reading Level dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol. |
|--------------|--------------------------|----------------------|--------------------|--------------------|--------------------|-----------------|--------------|---------|------------|
| 4804.00 | 46.41 | 33.06 | 35.04 | 3.94 | 48.37 | 74 | -25.63 | Peak | Horizontal |
| 4804.00 | 36.45 | 33.06 | 35.04 | 3.94 | 38.41 | 54 | -15.59 | Average | Horizontal |
| 4804.00 | 49.84 | 33.06 | 35.04 | 3.94 | 51.80 | 74 | -22.20 | Peak | Vertical |
| 4804.00 | 37.82 | 33.06 | 35.04 | 3.94 | 39.78 | 54 | -14.22 | Average | Vertical |

Channel 20

| Freq. MHz | Reading Level dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol. |
|--------------|--------------------------|----------------------|--------------------|--------------------|--------------------|-----------------|--------------|---------|------------|
| 4880.00 | 50.91 | 33.16 | 35.15 | 3.96 | 52.88 | 74 | -21.12 | Peak | Horizontal |
| 4880.00 | 38.47 | 33.16 | 35.15 | 3.96 | 40.44 | 54 | -13.56 | Average | Horizontal |
| 4880.00 | 49.09 | 33.16 | 35.15 | 3.96 | 51.06 | 74 | -22.94 | Peak | Vertical |
| 4880.00 | 41.56 | 33.16 | 35.15 | 3.96 | 43.53 | 54 | -10.47 | Average | Vertical |

Channel 40

| Freq. MHz | Reading Level dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol. |
|--------------|--------------------------|----------------------|--------------------|--------------------|--------------------|-----------------|--------------|---------|------------|
| 4960.00 | 49.42 | 33.26 | 35.14 | 3.98 | 51.52 | 74 | -22.48 | Peak | Horizontal |
| 4960.00 | 36.04 | 33.26 | 35.14 | 3.98 | 38.14 | 54 | -15.86 | Average | Horizontal |
| 4960.00 | 50.53 | 33.26 | 35.14 | 3.98 | 52.63 | 74 | -21.37 | Peak | Vertical |
| 4960.00 | 40.66 | 33.26 | 35.14 | 3.98 | 42.76 | 54 | -11.24 | Average | Vertical |

Notes:

- 1. Measuring frequencies from 9k~10th harmonic (ex. 26GHz), No emission found between lowest internal used/generated frequency to 30 MHz.
- 2. Radiated emissions measured in frequency range from 9k~10th harmonic (ex. 26GHz) were made with an instrument using Peak detector mode.
- 3. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

5.5.9. Results for Band edge Testing (Radiated)

Tx-2402

| Freq. MHz | Reading Level dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol. |
|--------------|--------------------------|----------------------|--------------------|--------------------|--------------------|-----------------|--------------|---------|------------|
| 2362.46 | 42.52 | 32.89 | 35.16 | 3.51 | 43.76 | 74 | -30.24 | Peak | Horizontal |
| 2362.67 | 36.31 | 32.90 | 35.16 | 3.51 | 37.56 | 54 | -16.44 | Average | Horizontal |
| 2400.00 | 47.60 | 32.92 | 35.16 | 3.54 | 48.90 | 74 | -25.10 | Peak | Horizontal |
| 2400.00 | 39.82 | 32.92 | 35.16 | 3.54 | 41.12 | 54 | -12.88 | Average | Horizontal |
| 2376.18 | 45.21 | 32.89 | 35.16 | 3.51 | 46.45 | 74 | -27.55 | Peak | Vertical |
| 2376.37 | 36.39 | 32.90 | 35.16 | 3.51 | 37.64 | 54 | -16.36 | Average | Vertical |
| 2400.00 | 48.80 | 32.92 | 35.16 | 3.54 | 50.10 | 74 | -23.90 | Peak | Vertical |
| 2400.00 | 38.69 | 32.92 | 35.16 | 3.54 | 39.99 | 54 | -14.01 | Average | Vertical |

 $T_{x}-2480$

| | 1A 2TOO | | | | | | | | |
|--------------|--------------------------|----------------------|--------------------|--------------------|--------------------|-----------------|--------------|---------|------------|
| Freq. MHz | Reading Level dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol. |
| 2483.50 | 46.41 | 33.06 | 35.18 | 3.60 | 47.89 | 74 | -26.11 | Peak | Horizontal |
| 2483.50 | 34.74 | 33.08 | 35.18 | 3.60 | 36.24 | 54 | -17.76 | Average | Horizontal |
| 2487.24 | 43.97 | 33.08 | 35.18 | 3.62 | 45.49 | 74 | -28.51 | Peak | Horizontal |
| 2487.56 | 35.63 | 33.08 | 35.18 | 3.62 | 37.15 | 54 | -16.85 | Average | Horizontal |
| 2483.50 | 47.35 | 33.06 | 35.18 | 3.60 | 48.83 | 74 | -25.17 | Peak | Vertical |
| 2483.50 | 33.72 | 33.08 | 35.18 | 3.60 | 35.22 | 54 | -18.78 | Average | Vertical |
| 2493.64 | 46.84 | 33.08 | 35.18 | 3.62 | 48.36 | 74 | -25.64 | Peak | Vertical |
| 2493.67 | 36.71 | 33.08 | 35.18 | 3.62 | 38.23 | 54 | -15.77 | Average | Vertical |
| 1233 | | | 1 | | | | | | |

5.6. Conducted Spurious Emissions And Band Edges Test

5.6.1. Standard Applicable

According to §15.247 (d) & A8.5: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

5.6.2. Measuring Instruments and Setting

Please refer to section 6 of equipments list in this report. The following table is the setting of the spectrum analyzer.

| Spectrum Parameter | Setting |
|---|---------------|
| Detector | Peak |
| Attenuation | Auto |
| RB / VB (Emission in restricted band) | 100KHz/300KHz |
| RB / VB (Emission in non-restricted band) | 100KHz/300KHz |

5.6.3. Test Procedures

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

5.6.4. Test Setup Layout


This test setup layout is the same as that shown in section 5.4.4.

5.6.5. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

5.6.6. Test Results of Conducted Spurious Emissions


Test Result of Low Channel:

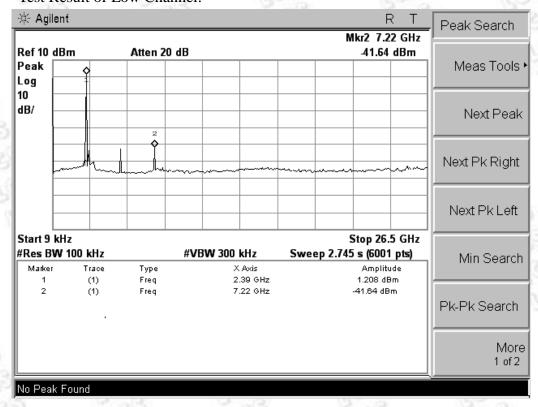


Test Result of Middle Channel:

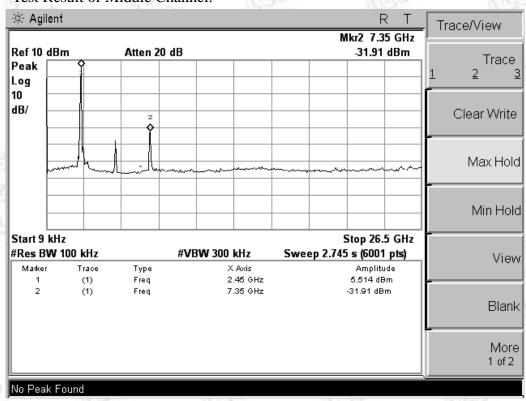


Test Result of High Channel:

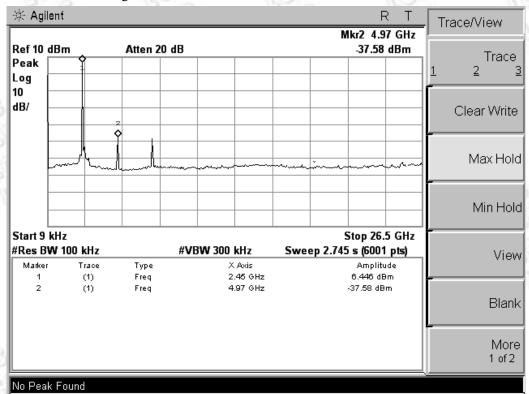

5.6.7. Test Results of Band Edges Test

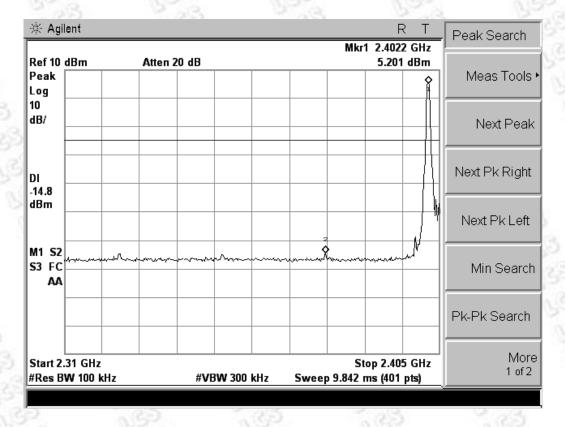

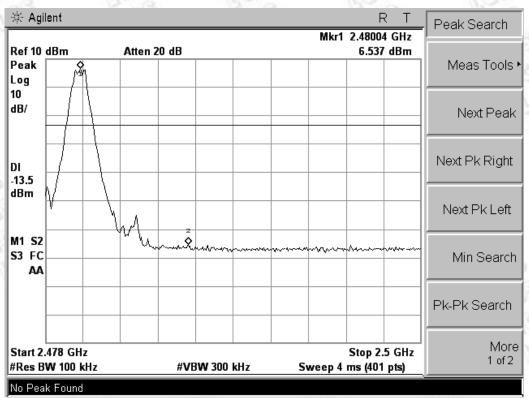


5.7. Power line conducted emissions

5.7.1 Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

| Frequency Range | Limits (dBµV) | | | |
|-----------------|---------------|----------|--|--|
| (MHz) | Quasi-peak | Average | | |
| 0.15 to 0.50 | 66 to 56 | 56 to 46 | | |
| 0.50 to 5 | 56 | 46 | | |
| 5 to 30 | 60 | 50 | | |


5.7.2 Block Diagram of Test Setup

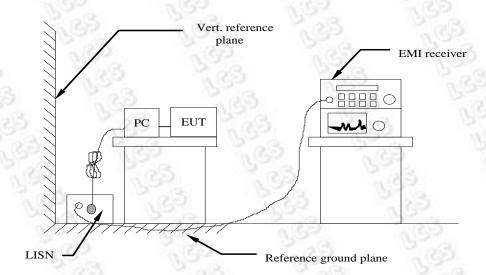

5.7.3 Test Results

PASS.

The test data please refer to following page.

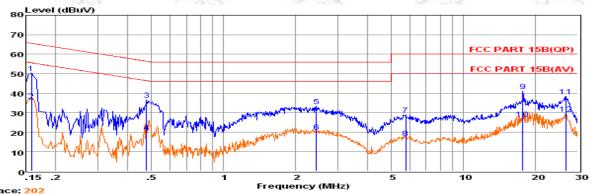

Trace: 202 Env. Ins: EUT: M/N: Power Rating:

Bluetooth Speaker


Test Mode: Operator: Memo:

289 AC 120V/60Hz TX-Low Channel Dick

NEUTRAL Pol:

| Freq | Reading | LisnFac | CabLos | Atten_Fac | Measured | Limit | 0ver | Remark |
|---|--|--|--|--|--|--|--|---|
| MHz | dBuV | dВ | dB | dB | dBuV | dBuV | dB | |
| 1 0.15816 2 0.15826 3 0.47865 4 0.47875 5 2.43463 6 2.43563 7 5.74381 8 5.74481 917.66612 | 30.58 16.39 16.84 0.20 13.54 0.66 9.12 -2.78 21.09 6.73 | 9.68 9.62 9.62 9.64 9.64 9.67 9.67 9.79 | 0.02 0.02 0.04 0.04 0.05 0.05 0.06 0.06 | 10.00 10.00 10.00 10.00 10.00 10.00 10.00 10.00 | 50.28 36.09 36.50 19.86 33.23 20.35 28.85 16.95 40.99 26.63 | 65.56 55.55 56.36 46.36 56.00 46.00 50.00 50.00 | -15.28 -19.46 -19.86 -26.50 -22.77 -25.65 -31.15 -33.05 -19.01 -23.37 | QP Average QP Average QP Average QP Average QP Average QP Average |
| 1126.84106 1226.84206 | 18.46 9.37 | 9.83 9.83 | 0.13 0.13 | 10.00 10.00 | 38.42 29.33 | 60.00 50.00 | -21.58 -20.67 | QP Average |

Measured = Reading + Lisn Factor +Cable Loss+Atten_F
The emission levels that are 20dB below the official
limit are not reported.

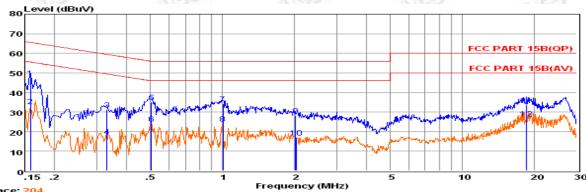

Trace: 204 Env. Ins: EUT: M/N:

24*/56%

Power Rating:

24*/56% Bluetooth Speaker 289 AC 120V/60Hz TX-Low Channel Dick

Test Mode: Operator:

Memo: Pol: LINE

| | Freq | Reading | ${\tt LisnFac}$ | CabLos | Atten_Fac | Measured | Limit | 0ver | Remark |
|-----|----------|---------|-----------------|--------|-----------|----------|-------|--------|---------|
| | MHz | dBu∀ | dB | dВ | dB | dBu∀ | dBu∀ | dB | |
| 1 | 0.15816 | 28.11 | 9.58 | 0.02 | 10.00 | 47.71 | 65.56 | -17.85 | QP |
| 2 | 0.15826 | 13.31 | 9.58 | 0.02 | 10.00 | 32.91 | 55.55 | -22.64 | Average |
| 3 | 0.33033 | 11.59 | 9.62 | 0.03 | 10.00 | 31.24 | 59.44 | -28.20 | QP |
| 4 | 0.33043 | -2.08 | 9.62 | 0.03 | 10.00 | 17.57 | 49.44 | -31.87 | Average |
| - 5 | 0.50469 | 15.46 | 9.62 | 0.04 | 10.00 | 35.12 | 56.00 | -20.88 | QP |
| 6 | 0.50479 | 4.37 | 9.62 | 0.04 | 10.00 | 24.03 | 46.00 | -21.97 | Average |
| 7 | 1.00499 | 14.39 | 9.63 | 0.05 | 10.00 | 34.07 | 56.00 | -21.93 | QP |
| 8 | 1.00599 | 4.32 | 9.63 | 0.05 | 10.00 | 24.00 | 46.00 | -22.00 | Average |
| 9 | 2.02254 | 8.69 | 9.64 | 0.05 | 10.00 | 28.38 | 56.00 | -27.62 | QP |
| 10 | 2.02354 | -2.65 | 9.64 | 0.05 | 10.00 | 17.04 | 46.00 | -28.96 | Average |
| 111 | L8.52369 | 13.86 | 9.75 | 0.11 | 10.00 | 33.72 | 60.00 | -26.28 | QP |
| 121 | 18.52469 | 6.92 | 9.75 | 0.11 | 10.00 | 26.78 | 50.00 | -23.22 | Average |

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss+Atten_Fac.
2. The emission levels that are 20dB below the official limit are not reported.

***Note: Pre-scan all mode and recorded the worst case results in this report (802.11b (Low Channel)).

5.8. Antenna Connected Construction

5.8.1. Standard Applicable

According to §15.203 & RSS-Gen, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

5.8.2. Antenna Connector Construction

The directional gains of antenna used for transmitting is 0dBi, and the antenna is connect to PCB board and no consideration of replacement. Please see EUT photo for details.

5.8.3. Results: Compliance.

Measurement parameters:

| Measurement parameter | | | | | | |
|-----------------------|----------|--|--|--|--|--|
| Detector: Peak | | | | | | |
| Sweep time: | Auto | | | | | |
| Resolution bandwidth: | 3 MHz | | | | | |
| Video bandwidth: | 3 MHz | | | | | |
| Trace-Mode: | Max hold | | | | | |

Note: The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module. For normal Bluetooth devices, the GFSK mode is used.

Limits:

| | FCC | | | IC | |
|-----|-------|-----------|------|-----|--|
| 35 | N.C.S | Antenna G | Bain | 300 | |
| 100 | 133 | 6.0dBi | 1,33 | 185 | |

| Tnom | | | 2402 MHZ 2440 MHZ | | highest channel 2480 MHz | |
|---|--|----------------------------|---------------------|---------------------|-----------------------------|--|
| Conducted power [dBm] Measured with GFSK modulation | | 7.80 7.73 | | 7.49 | | |
| Measu | Radiated power [dBm] Measured with GFSK modulation | | 7.69 | 7.47 | | |
| Gain [dBi] Calculated | | nin [dBi] Calculated -0.03 | | -0.02 | | |
| Me | Measurement unce | | ± 1.6 dB (cond.) |) / ± 3.8 dB (rad.) | | |

Result: -/-

6. LIST OF MEASURING EQUIPMENTS

| Description | Manufacturer | Model | Serial Number | Cal. Date | Due Date |
|-----------------------------------|-------------------|---|---------------|------------|------------|
| Temperature/Humidity Meter | zhicheng | ZC1-2 | TR8-TH | 2014/05/07 | 2015/05/06 |
| Splitter /Combiner (Qty: 2) | Mini-Circuits | ZAPD-50W 4.2-6.0 GHz | NN256400424 | 2015/03/27 | 2016/03/26 |
| Splitter/Combine (Qty: 2) | MCLI | PS3-7 | 4463/4464 | 2015/03/27 | 2016/03/26 |
| ATT (Qty: 1) | Mini-Circuits | VAT-30+ | 30912 | 2015/03/27 | 2016/03/26 |
| RF Cable (Qty: 6) | Mini-Circuits | N/A | DFS-1~6 | 2015/03/27 | 2016/03/26 |
| DC Power Supply | IDRC | CD-035-020PR | 977272 | 2014/09/15 | 2015/09/14 |
| 3m Semi Anechoic Chambe | SIDT FRANKONIA | SAC-3M | 03СН03-НҮ | 2014/06/18 | 2015/06/17 |
| Amplifier | SCHAFFNER | COA9231A | 18667 | 2014/06/18 | 2015/06/17 |
| Amplifier | Agilent | 8449B | 3008A02120 | 2014/06/16 | 2015/06/15 |
| Amplifier | MITEQ | AMF-6F-260400 | 9121372 | 2014/06/16 | 2015/06/15 |
| Spectrum Analyzer | Agilent | E4407B | MY41440292 | 2014/06/16 | 2015/06/15 |
| Signal analyzer | Agilent | E4448A(Externa l mixers to 40GHz) | US44300469 | 2014/06/16 | 2015/06/15 |
| Loop Antenna | R&S | HFH2-Z2 | 860004/001 | 2014/06/18 | 2015/06/17 |
| By-log Antenna | SCHWARZBECK | VULB9163 | 9163-470 | 2014/06/10 | 2015/06/09 |
| Horn Antenna | EMCO | 3115 | 6741 | 2014/06/10 | 2015/06/09 |
| Horn Antenna | SCHWARZBECK | BBHA9170 | BBHA9170154 | 2014/06/10 | 2015/06/09 |
| RF Cable-R03m | Jye Bao | RG142 | CB021 | 2014/06/18 | 2015/06/17 |
| RF Cable-HIGH | SUHNER | SUCOFLEX 106 | 03CH03-HY | 2014/06/18 | 2015/06/17 |
| Signal Generator | R&S | SMR40 | 10016 | 2014/06/16 | 2015/06/15 |

-----THE END OF REPORT-----