







ISO/IEC17025Accredited Lab.

Report No: FCC 1309112 File reference No: 2013-11-25

Wise Billion Industrial Ltd Applicant:

Product: Multimedia Speaker

Model No: WB-1301, MCP-50, MCP-100

Trademark: DIGISOUND, PURE ACOUSTICS

Test Standards: FCC Part 15.247

It is herewith confirmed and found to comply with the Test result:

requirements set up by ANSI C63.4, FCC Part 15 Subpart C,

Paragraph 15.247 regulations for the evaluation

electromagnetic compatibility

Approved By

Jack Chung

Jack Chung Manager

Dated: November 25, 2013

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

5/F,Block 4, Anhua Industrial Zone.,No.8 TaiRan Rd.CheGongMiao,FuTian District, Shenzhen, CHINA.

> Tel (755) 83448688 Fax (755) 83442996

Report No: 1309112 Page 2 of 106

Date: 2013-11-25



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meets with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:1999 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.:899988.

IC- Registration No.: IC5205A-02

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration No.: IC 5205A-02.

Page 3 of 106

Report No: 1309112 Date: 2013-11-25



Test Report Conclusion Content

1.0	General Details	4
1.1	Test Lab Details	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	4
1.5	Test Duration.	4
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment.	6
3.0	Technical Details	7
3.1	Summary of Test Results.	7
3.2	Test Standards	7
4.0	EUT Modification.	7
5.0	Power Line Conducted Emission Test.	8
5.1	Schematics of the Test.	8
5.2	Test Method and Test Procedure.	8
5.3	Configuration of the EUT	8
5.4	EUT Operating Condition.	9
5.5	Conducted Emission Limit.	9
5.6	Test Result.	9
6.0	Radiated Emission test.	12
6.1	Test Method and Test Procedure.	12
6.2	Configuration of the EUT	12
6.3	EUT Operation Condition.	12
6.4	Radiated Emission Limit.	13
7.0	20dB Bandwidth Measurement.	28
8.0	Maximum Peak Output Power	40
9.0	Carrier Frequency Separation.	53
10.0	Number of Hopping Channel.	57
11.0	Time of Occupancy (Dwell Time).	61
12.0	Out of Band Measurement.	74
13.0	Antenna Requirement.	95
14.0	FCC IC Label.	96
15.0	Photo of Test Setup and EUT View.	97

Report No: 1309112 Page 4 of 106

Date: 2013-11-25



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO., LTD

Address: 5/F,Block 4, Anhua Industrial Zone.,No.8 TaiRan Rd.CheGongMiao,FuTian District,

Shenzhen, CHINA.

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 899988

For 3m & 10 m OATS

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A-02

For 3m & 10 m OATS

1.2 Applicant Details

Applicant: Wise Billion Industrial Ltd.

Address: Rm 2512, 25/F, Langham Place Office Tower, 8 Argyle Street, Hong Kong

Telephone: 852-21501910/86-13828796091

Fax: 852-30074331

1.3 Description of EUT

Product: Multimedia Speaker

Manufacturer: Wise Billion Industrial Ltd.

Address: Rm 2512, 25/F, Langham Place Office Tower, 8 Argyle Street, Hong Kong

Brand Name: DIGISOUND.

Additional Brand Name: PURE ACOUSTICS

Model Number: WB-1301

Additional Model Number: MCP-50, MCP-100

Type of Modulation GFSK, 月/4-DQPSK, 8DPSK for Bluetooth

Frequency range 2402-2480MHz for Bluetooth

Channel Spacing 1MHz for Bluetooth

Frequency Selection By software

Channel Number 79 channel for Bluetooth

Antenna: Integral Antenna used, the antenna gain is 2.0dBi

1.4 Submitted Sample: 2 Samples

1.5 Test Duration

2013-09-25 to 2013-11-25

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: 1309112 Page 5 of 106

Date: 2013-11-25



1.6 Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB Radiated Emissions Uncertainty =4.7dB

1.7 Test Engineer Terry Tang

The sample tested by

Print Name: Terry Tang

Page 6 of 106

Report No: 1309112 Date: 2013-11-25



2.0	Test Equipments							
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date			
ESPI Test Receiver	ROHDE&SCHWARZ	ESPI 3	100379	2013-08-23	2014-08-22			
TWO Line-V-NETW	ROHDE&SCHWARZ	EZH3-Z5	100294	2013-08-23	2014-08-22			
TWO Line-V-NETW	ROHDE&SCHWARZ	EZH3-Z5	100253	2013-08-23	2014-08-22			
Ultra Broadband ANT	ROHDE&SCHWARZ	HL562	100157	2013-08-25	2014-08-24			
ESDV Test Receiver	ROHDE&SCHWARZ	ESDV	100008	2013-08-23	2014-08-22			
Impuls-Begrenzer	ROHDE&SCHWARZ	ESH3-Z2	100281	2013-08-24	2014-08-23			
System Controller	CT	SC100	•					
Printer	EPSON	РНОТО ЕХЗ	CFNH234850					
Computer	IBM	8434	1S8434KCE99BLXL O*	-	-			
Loop Antenna	EMCO	6502	00042960	2013-08-23	2014-08-22			
ESPI Test Receiver	ROHDE&SCHWARZ	ESI26	838786/013	2013-08-23	2014-08-22			
3m OATS			N/A	2013-08-22	2014-08-21			
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170265	2013-08-24	2014-08-23			
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-631	2013-08-24	2014-08-23			
Power meter	Anritsu	ML2487A	6K00003613	2013-08-24	2014-08-23			
Power sensor	Anritsu	MA2491A	32263	2013-08-24	2014-08-23			
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2013-08-21	2014-08-20			
LISN	AFJ	LS16C	10010947251	2013-08-21	2014-08-20			
LISN (Three Phase)	Schwarebeck	NSLK 8126	8126453	2013-08-23	2014-08-22			
9*6*6 Anechoic			N/A	2013-08-22	2014-08-21			
EMI Test Receiver	RS	ESCS30	100139	2013-08-23	2014-08-22			
LISN	AFJ	LS16C	10010947251	2013-08-23	2014-08-22			
LISN (Three Phase)	Schwarebeck	NSLK 8126	8126453	2013-08-23	2014-08-22			

Report No: 1309112 Page 7 of 106

Date: 2013-11-25



3.0 Technical Details

3.1 Summary of test results

The EUT has been tested according to the following specifications:

Requirement	CFR 47 Section	Result	Notes
Antenna Requirement	15.203, 15.247(b)(4)	PASS	Complies
Maximum Peak Out Power	15.247 (b)(1), (4)	PASS	Complies
Carrier Frequency Separation	15.247(a)(1)	PASS	Complies
20dB Channel Bandwidth	15.247 (a)(1)	PASS	Complies
Number of Hopping Channels	15.247(a)(iii), 15.247(b)(1)	PASS	Complies
Time of Occupancy (Dwell Time)	15.247(a)(iii)	PASS	Complies
Spurious Emission, Band Edge, and	15.247(d),15.205(a),	PASS	Complies
Restricted bands	15.209 (a),15.109		
Conducted Emissions	15.207(a), 15.107	PASS	Complies
RF Exposure	15.247(i), 1.1307(b)(1)	PASS	Complies

3.2 Test Standards

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

4.0 EUT Modification

No modification by Shenzhen Timeway Technology Consulting Co., Ltd


Report No: 1309112 Page 8 of 106

Date: 2013-11-25



5. Power Line Conducted Emission Test

5.1 Schematics of the test

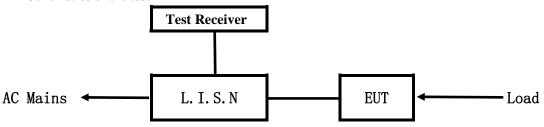


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2003. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4 –2003.

Test Voltage: 120V~60Hz Block diagram of Test setup

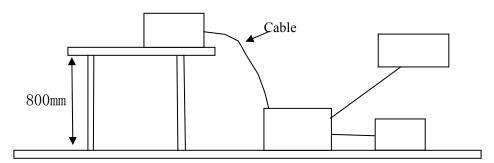

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.4-2003. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

Report No: 1309112 Page 9 of 106

Date: 2013-11-25



A. EUT

Device	Manufacturer	Model	FCC ID
Multimedia Speaker	Wise Billion Industrial Ltd	WB-1301, MCP-50,	2ABE7-WB-1310
		MCP-100	27 DE7 WB-1310

B. Internal Device

Device	Manufacturer	Model	Rating

C. Peripherals

Device	Manufacturer	Model	FCC ID/DOC	Cable

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.4 -2003.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.107, 15.207

Frequency	Class A Limits (dB µ V)		Class B Lim	nits (dB µ V)
(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level
$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*
$0.50 \sim 5.00$	73.0	60.0	56.0	46.0
5.00 ~ 30.00	73.0	60.0	60.0	50.0

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Date: 2013-11-25



A: Conducted Emission on Live Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep Transmitting

Equipment Level: Class B

Results: PASS

Please refer to following diagram for individual

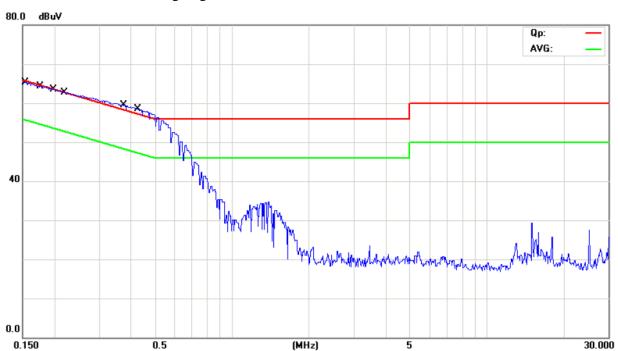

Frequency	ncy Line Reading(dBμV)		Limit(dBµV)		
(MHz)	Line	Quasi-peak	Average	Quasi-peak	Average
0.151	Live	57.90	8.90	65.93	55.93
0.176	Live	57.13	10.43	64.66	54.66
0.200	Live	55.95	3.75	63.58	53.58
0.219	Live	55.57	3.37	62.84	52.84
0.372	Live	51.93	3.33	58.46	48.46
0.429	Live	50.90	3.59	57.27	47.27

Date: 2013-11-25



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep Transmitting

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

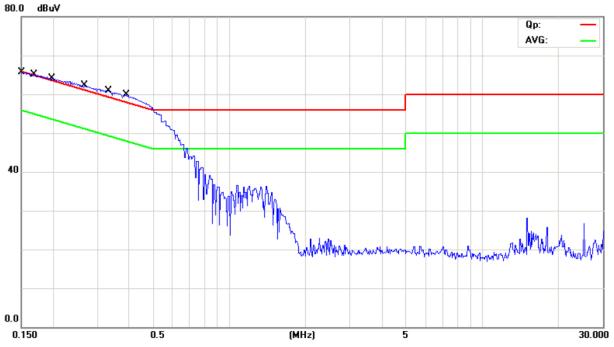

Frequency	y Line Reading(dBμV)		Limit(dBµV)		
(MHz)	Line	Quasi-peak	Average	Quasi-peak	Average
0.151	Neutral	58.20	18.80	65.91	55.91
0.167	Neutral	56.92	7.12	65.08	55.08
0.197	Neutral	55.95	4.25	63.74	53.74
0.270	Neutral	54.13	2.33	61.10	51.10
0.332	Neutral	52.89	1.79	59.38	49.38
0.390	Neutral	51.75	2.05	58.06	48.06

Report No: 1309112 Page 12 of 106


Date: 2013-11-25



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.4 –2003. The radiated test was performed at Timeway Laboratory. This site is on file with the FCC laboratory division, Registration No.899988
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.4-2003.
- (3) The frequency spectrum from 30 MHz to 1 GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup

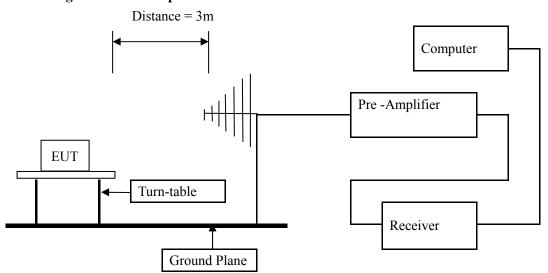

- 6.2 Configuration of The EUT

 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.

Report No: 1309112 Page 13 of 106

Date: 2013-11-25



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequencies in restricted band are complied to limit on Paragraph 15.209 and 15.109

	4	8 1
Frequency Range (MHz)	Distance (m)	Field strength (dB µ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT

Report No: 1309112 Page 14 of 106



Test result

Date: 2013-11-25

General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Transmitting

Results: Pass


Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)
323.960	29.85	Н	46.00
324.000	33.64	V	46.00

Report No: 1309112 Page 15 of 106

Date: 2013-11-25



Test Figure:

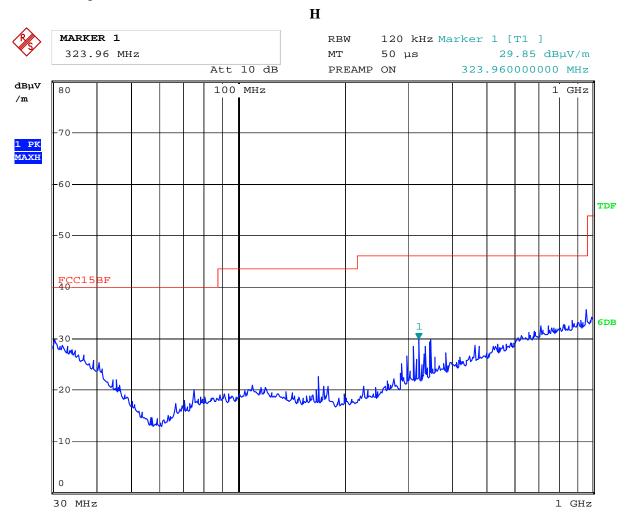


Date: 10.0CT.2013 16:07:16

Report No: 1309112 Page 16 of 106

Date: 2013-11-25



Test Figure:

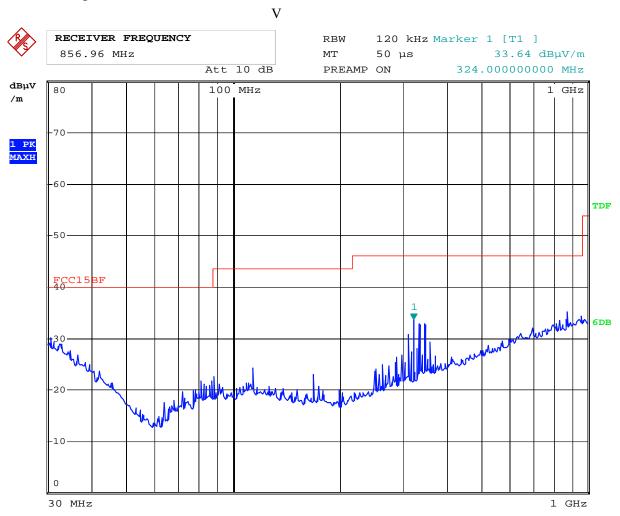

Date: 10.OCT.2013 16:09:46

Report No: 1309112 Page 17 of 106

Date: 2013-11-25



Operation Mode: Transmitting under Low Channel (2402MHz) (BDR Mode)

	0		-
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
2402	91.42 (PK)	Н	Fundamental Frequency
2402	91.37 (PK)	V	Fundamental Frequency
4804		Н	74(Peak)/ 54(AV)
4804		V	74(Peak)/ 54(AV)
7206		H/V	74(Peak)/ 54(AV)
9608		H/V	74(Peak)/ 54(AV)
12010		H/V	74(Peak)/ 54(AV)
14412		H/V	74(Peak)/ 54(AV)
16814		H/V	74(Peak)/ 54(AV)
19216		H/V	74(Peak)/ 54(AV)
21618		H/V	74(Peak)/ 54(AV)
24020		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

Operation Mode: Transmitting g under Middle Channel (2441MHz) (BDR Mode)

· · · · · · · · · · · · · · · · · · ·					
Frequency (MHz)	Level@3m (dB \u03bc V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)		
2441	89.36 (PK)	Н	Eundamental Eraguenay		
2441	89.36 (PK)	V	Fundamental Frequency		
4882		Н	74(Peak)/ 54(AV)		
4882		V	74(Peak)/ 54(AV)		
7323		H/V	74(Peak)/ 54(AV)		
9764		H/V	74(Peak)/ 54(AV)		
12205		H/V	74(Peak)/ 54(AV)		
14646		H/V	74(Peak)/ 54(AV)		
17087		H/V	74(Peak)/ 54(AV)		
19528		H/V	74(Peak)/ 54(AV)		
21969		H/V	74(Peak)/ 54(AV)		
24410		H/V	74(Peak)/ 54(AV)		

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

Report No: 1309112 Page 18 of 106

Date: 2013-11-25



Operation Mode: Transmitting under High Channel (2480MHz) (BDR Mode)

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB µ V/m)
2480	90.98 (PK)	Н	Fundamental Frequency
2480	90.82 (PK)	V	Fundamental Frequency
4960.	-	Н	74(Peak)/ 54(AV)
4960.		V	74(Peak)/ 54(AV)
7440		H/V	74(Peak)/ 54(AV)
9920		H/V	74(Peak)/ 54(AV)
12400		H/V	74(Peak)/ 54(AV)
14880		H/V	74(Peak)/ 54(AV)
17360		H/V	74(Peak)/ 54(AV)
19840		H/V	74(Peak)/ 54(AV)
22320		H/V	74(Peak)/ 54(AV)
24800		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit


^{2.} Remark "---" means that the emissions level is too low to be measured

Report No: 1309112 Date: 2013-11-25




Please refer to the following test plots for details:

Low Channel: Horizontal

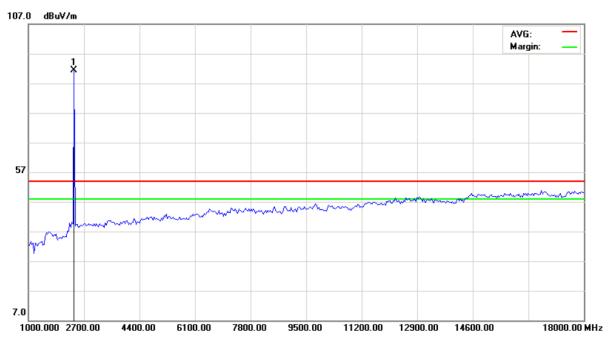

Low Channel: Vertical

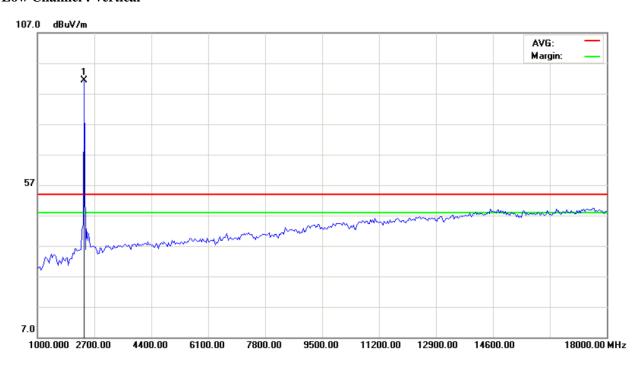

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 20 of 106


Report No: 1309112 Date: 2013-11-25



Middle Channel: Horizontal

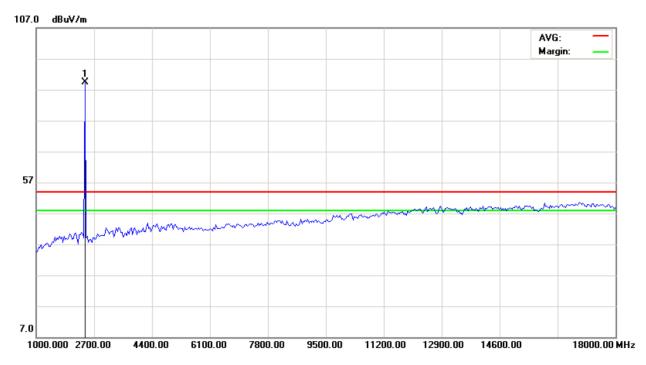

Middle Channel :: Vertical

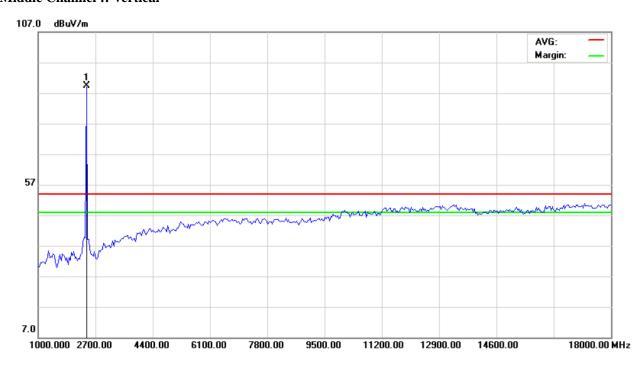

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 21 of 106


Report No: 1309112 Date: 2013-11-25



High Channel: Horizontal

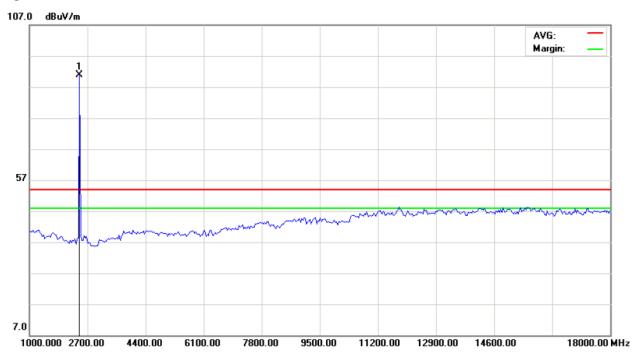

High Channel: Vertical

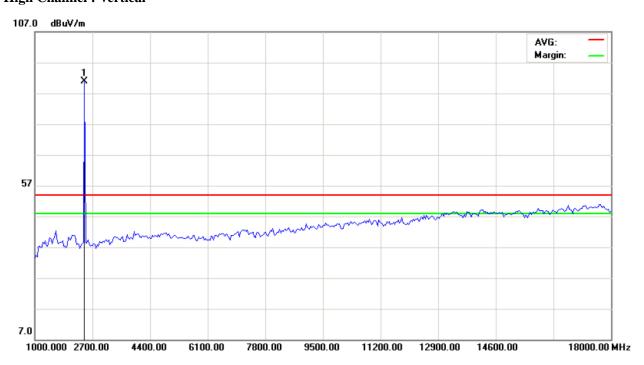

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 22 of 106


Report No: 1309112 Date: 2013-11-25



High Channel: Horizontal

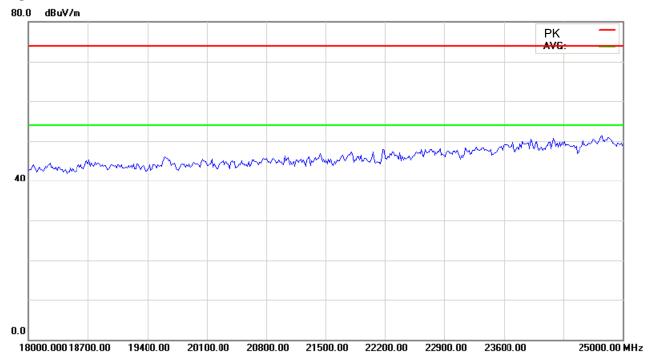

High Channel: Vertical

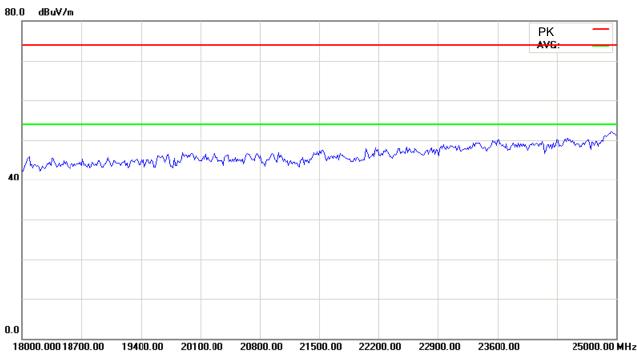

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: 1309112 Page 23 of 106

Date: 2013-11-25



Operation Mode: Transmitting under Low Channel (2402MHz) (EDR Mode)

	0		-
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
2402	89.42 (PK)	Н	Fundamental Frequency
2402	89.37 (PK)	V	Fundamental Frequency
4804		Н	74(Peak)/ 54(AV)
4804		V	74(Peak)/ 54(AV)
7206		H/V	74(Peak)/ 54(AV)
9608		H/V	74(Peak)/ 54(AV)
12010		H/V	74(Peak)/ 54(AV)
14412		H/V	74(Peak)/ 54(AV)
16814		H/V	74(Peak)/ 54(AV)
19216		H/V	74(Peak)/ 54(AV)
21618		H/V	74(Peak)/ 54(AV)
24020		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

Operation Mode: Transmitting g under Middle Channel (2441MHz) (EDR Mode)

o F () ()					
Frequency (MHz)	Level@3m (dB \u03bc V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)		
2441	88.36 (PK)	Н	Fundamental Frequency		
2441	88.36 (PK)	V	Fundamental Frequency		
4882		Н	74(Peak)/ 54(AV)		
4882		V	74(Peak)/ 54(AV)		
7323		H/V	74(Peak)/ 54(AV)		
9764		H/V	74(Peak)/ 54(AV)		
12205		H/V	74(Peak)/ 54(AV)		
14646		H/V	74(Peak)/ 54(AV)		
17087		H/V	74(Peak)/ 54(AV)		
19528		H/V	74(Peak)/ 54(AV)		
21969		H/V	74(Peak)/ 54(AV)		
24410		H/V	74(Peak)/ 54(AV)		

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

Report No: 1309112 Page 24 of 106

Date: 2013-11-25



Operation Mode: Transmitting under High Channel (2480MHz) (EDR Mode)

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB µ V/m)
2480	87.48 (PK)	Н	Fundamental Frequency
2480	87.32 (PK)	V	rundamentai rrequency
4960.	1	Н	74(Peak)/ 54(AV)
4960.	1	V	74(Peak)/ 54(AV)
7440	1	H/V	74(Peak)/ 54(AV)
9920	1	H/V	74(Peak)/ 54(AV)
12400		H/V	74(Peak)/ 54(AV)
14880	1	H/V	74(Peak)/ 54(AV)
17360	-	H/V	74(Peak)/ 54(AV)
19840	1	H/V	74(Peak)/ 54(AV)
22320	-	H/V	74(Peak)/ 54(AV)
24800		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit


^{2.} Remark "---" means that the emissions level is too low to be measured

Report No: 1309112 Date: 2013-11-25




Please refer to the following test plots for details:

Low Channel: Horizontal

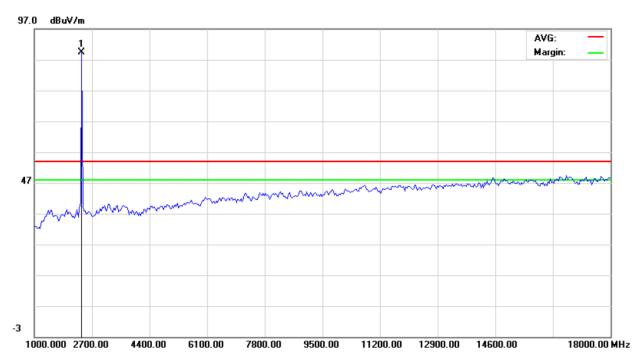

Low Channel: Vertical

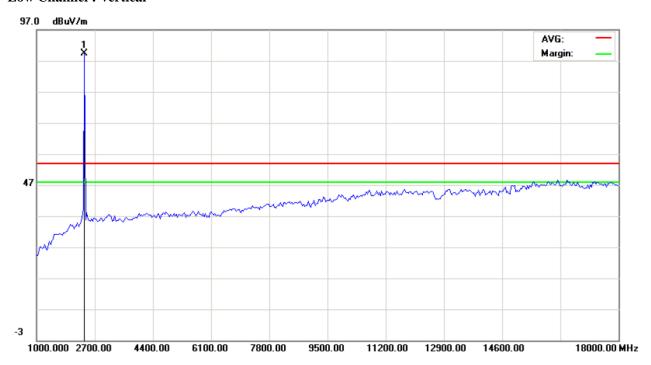

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 26 of 106


Report No: 1309112 Date: 2013-11-25



Middle Channel: Horizontal

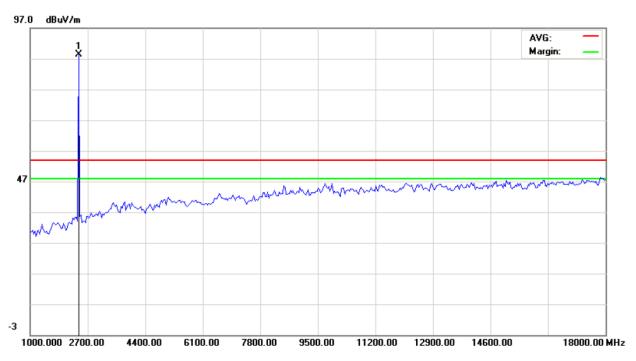

Middle Channel :: Vertical

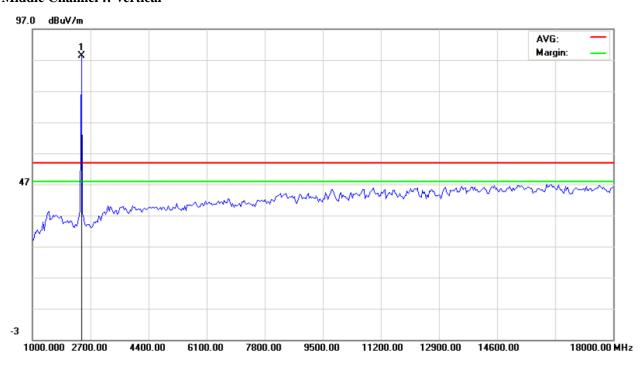

The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 27 of 106


Report No: 1309112 Date: 2013-11-25



High Channel: Horizontal

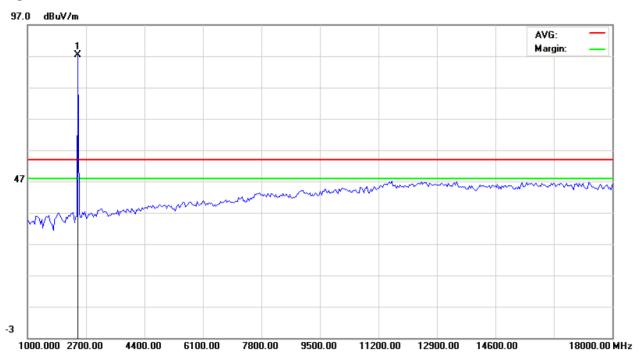

High Channel: Vertical

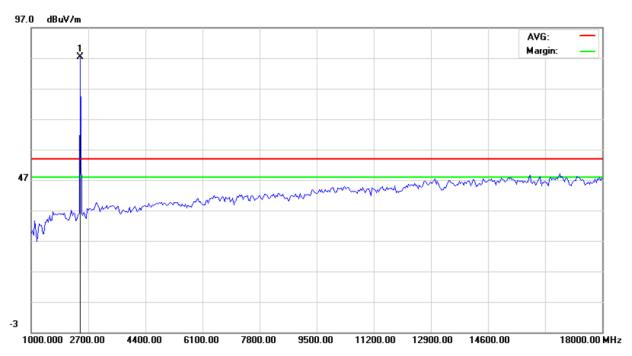

Note: for the radiated emissions above 18G, it is the floor noise.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: 1309112 Page 28 of 106

Date: 2013-11-25



7.0 20dB Bandwidth Measurement

7.1 Regulation

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

7.2 Limits of 20dB Bandwidth Measurement

N/A

7.3 Test Procedure.

- 1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span =3MHz, VBW =30 kHz, RBW=100 kHz, Sweep = auto Detector function = peak, Trace = max hold
- 3. Measure the highest amplitude appearing on spectral display and record the level to calculate results. 6. Repeat above procedures until all frequencies measured were complete.

7.4 Test Result

Type of Modulation: GFSK

EUT	Mu	Multimedia Speaker		WB-1301, MCP-50, MCP-100
Mode	Ko	Keep Transmitting		120V
Temperat	ure	24 deg. C,	Humidity	56% RH
Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Maximum Limit (kHz)	Pass/ Fail
Low	2402	858		Pass
Middle	2441	840		Pass
High	2480	864		Pass


Report No: 1309112 Page 29 of 106

Date: 2013-11-25



Test Figure:

1. Condition: Low Channel

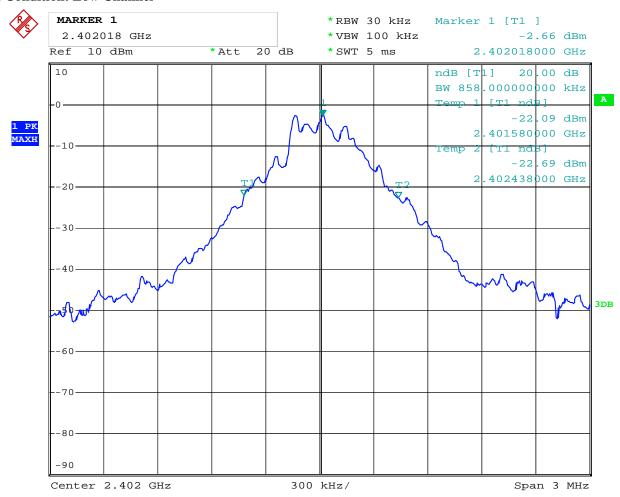


Date: 15.NOV.2013 14:04:11

Report No: 1309112 Page 30 of 106

Date: 2013-11-25



2. Condition: Middle Channel

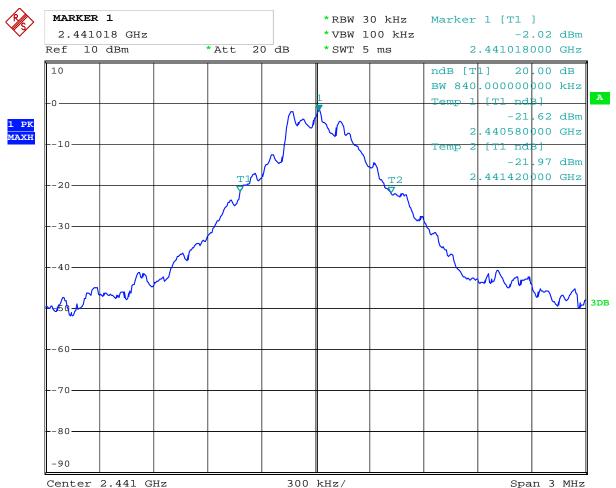


Date: 15.NOV.2013 14:05:07

Report No: 1309112 Page 31 of 106

Date: 2013-11-25



3. High Channel

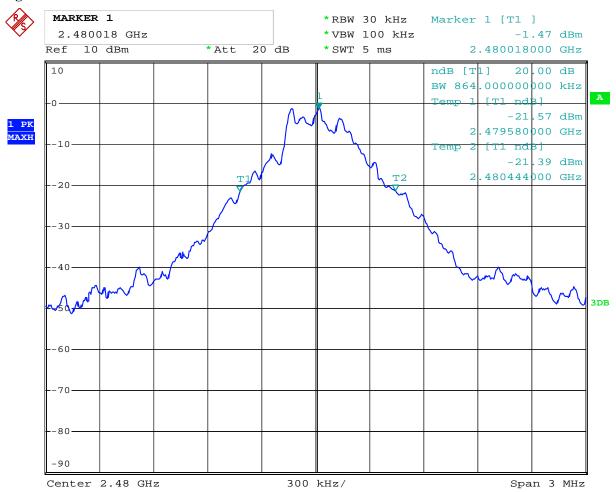

Date: 15.NOV.2013 14:05:53

Report No: 1309112 Page 32 of 106

Date: 2013-11-25



Test Result

Type of Modulation: $\pi/4$ -DQPSK

EUT	Mı	Multimedia Speaker		WB-1301, MCP-50, MCP-100
Mode	Ko	Keep Transmitting		120V
Temperat	ure	24 deg. C,		56% RH
Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Maximum Limit (kHz)	Pass/ Fail
Low	2402	1224		Pass
Middle	2441	1218		Pass
High	2480	1218		Pass


Report No: 1309112 Page 33 of 106

Date: 2013-11-25



Test Figure:

1. Condition: Low Channel

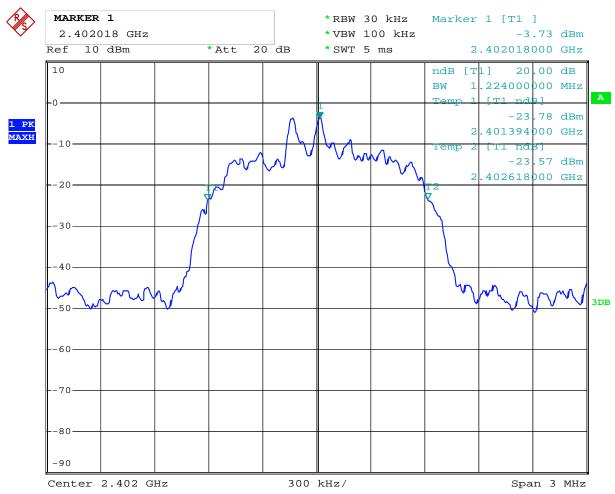


Date: 15.NOV.2013 14:03:23

Report No: 1309112 Page 34 of 106

Date: 2013-11-25



2. Condition: Middle Channel

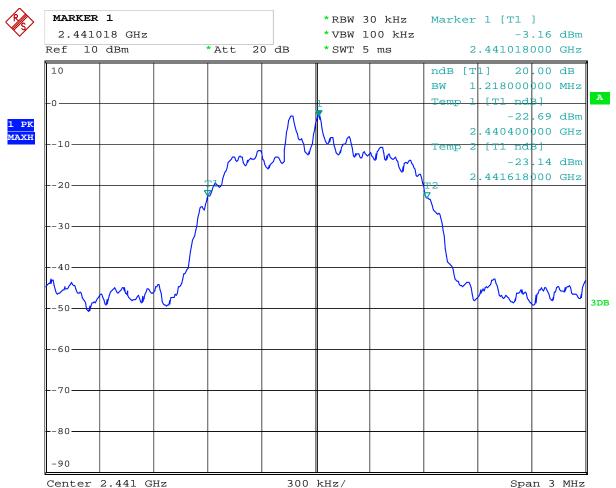


Date: 15.NOV.2013 14:02:46

Report No: 1309112 Page 35 of 106

Date: 2013-11-25



3. High Channel

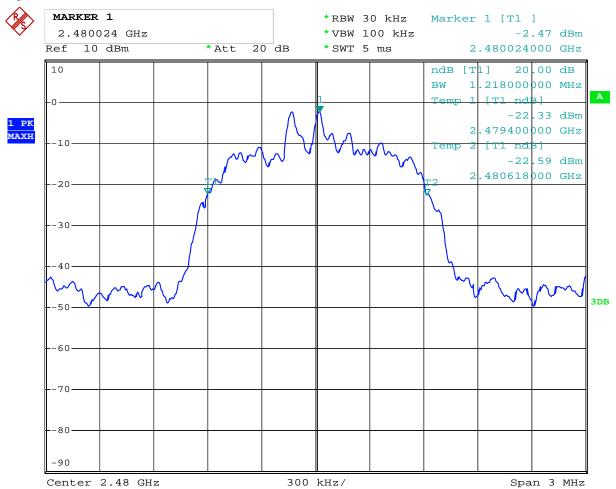

Date: 15.NOV.2013 14:02:00

Report No: 1309112 Page 36 of 106

Date: 2013-11-25



Test Result

Type of Modulation: 8DPSK

EUT	Mu	Multimedia Speaker		WB-1301, MCP-50, MCP-100
Mode	Ko	Keep Transmitting		120V
Temperat	ure	24 deg. C,	Humidity	56% RH
Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Maximum Limit (kHz)	Pass/ Fail
Low	2402	1218		Pass
Middle	2441	1218		Pass
High	2480	1212		Pass


Report No: 1309112 Page 37 of 106

Date: 2013-11-25



Test Figure:

1. Condition: Low Channel

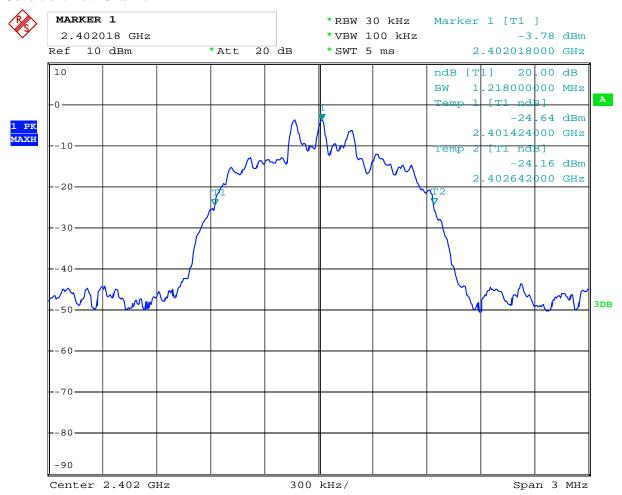


Date: 15.NOV.2013 14:07:53

Report No: 1309112 Page 38 of 106

Date: 2013-11-25



2. Condition: Middle Channel

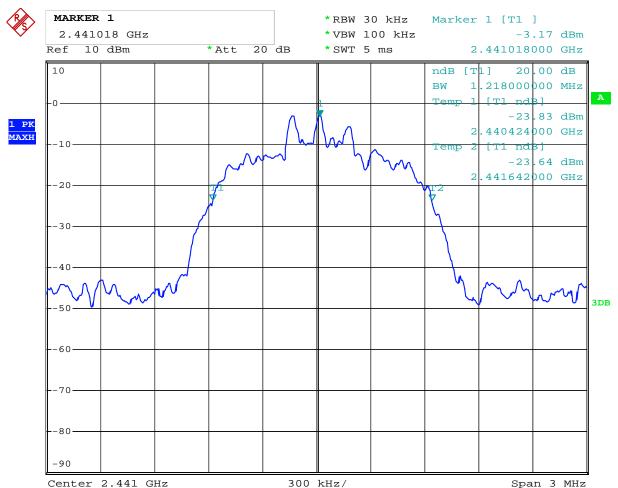


Date: 15.NOV.2013 14:07:09

Report No: 1309112 Page 39 of 106

Date: 2013-11-25



3. High Channel

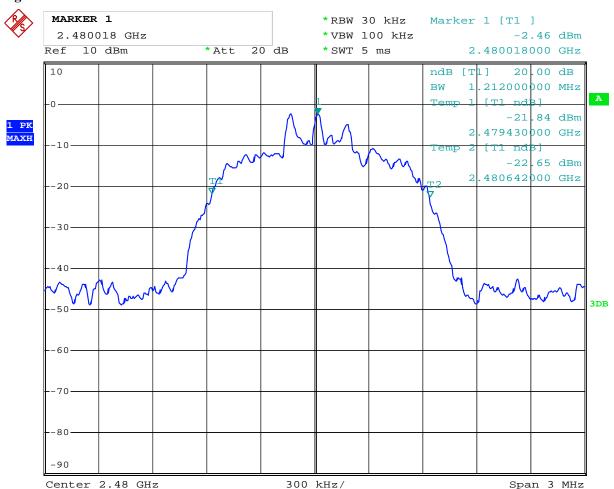

Date: 15.NOV.2013 14:06:29

Report No: 1309112 Page 40 of 106

Date: 2013-11-25



8. Maximum Peak Output Power

8.1 Regulation

According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5MHz band:0.125 watts. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.2 Limits of Maximum Peak Output Power

The Maximum Peak Output Power Measurement is 30dBm.

8.3 Test Procedure

- 1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = 10MHz, centered on a hopping channel; RBW > the 20 dB bandwidth of the emission being measured; VBW =10MHz, RBW=3MHz;

Sweep = auto; Detector function = peak; Trace = max hold

- 3. Measure the highest amplitude appearing on spectral display and record the level to calculate results.
- 4. Repeat above procedures until all frequencies measured were complete.

Report No: 1309112 Page 41 of 106

Date: 2013-11-25



8.4Test Results

Type of Modulation: GFSK

EUT	Mu	ltimedia Speaker	ľ	Model	WB-1301, MCP-50, MCP-100	
Mode	Ke	ep Transmitting	Input Voltage		120V	
Temperatur	re	24 deg. C, Humidity		umidity	56% RH	
Channel	Channel Frequency (MHz)	Peak Power Output (dBm))	Peak Power Limit (dBm)	Pass/ Fail	
Low	2402	-0.77		30	Pass	
Middle	2441	-0.10		30	Pass	
High	2480	0.45	30		Pass	

Note: 1. the result basic equation calculation as follow:

Peak Power Output = Peak Power Reading + Cable loss + Attenuator

2. The worse case was recorded


Report No: 1309112 Page 42 of 106

Date: 2013-11-25



Test Figure:

1. Condition: Low Channel

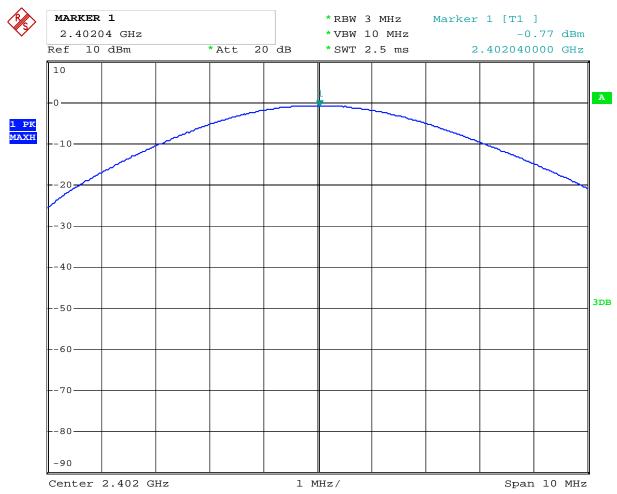


Date: 15.NOV.2013 14:12:50

Report No: 1309112 Page 43 of 106

Date: 2013-11-25



2. Condition: Middle Channel

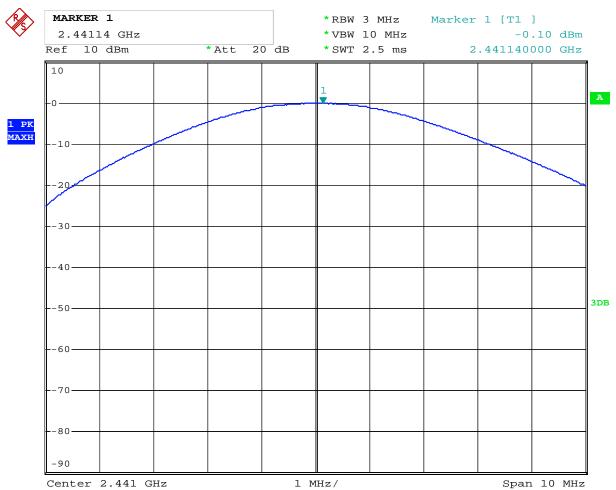


Date: 15.NOV.2013 14:13:22

Report No: 1309112 Page 44 of 106

Date: 2013-11-25



3. Condition: High Channel

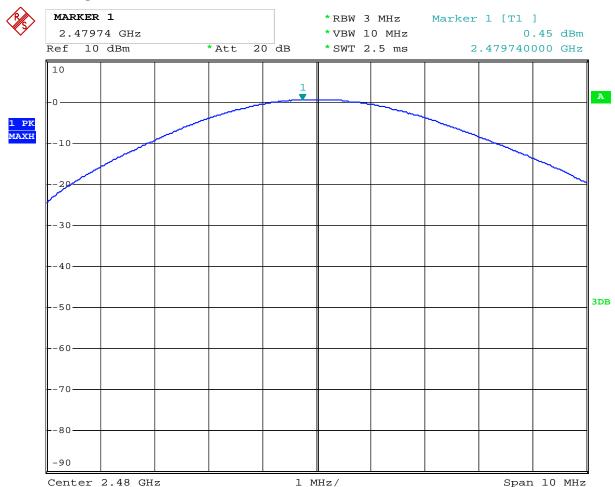

Date: 15.NOV.2013 14:13:51

Report No: 1309112 Page 45 of 106

Date: 2013-11-25



Type of Modulation: $\pi/4$ -DQPSK

EUT	Mu	ltimedia Speaker	N	Model	WB-1301, MCP-50, MCP-100
Mode	Ke	ep Transmitting	Input Voltage		120V
Temperatur	perature 24 deg. C, Hi		umidity	56% RH	
Channel	Channel Frequency (MHz) Peak Power Output (dBm))	Peak Power Limit (dBm)	Pass/ Fail
Low	2402	-1.84		21	Pass
Middle	2441	-1.14		21	Pass
High	2480	-0.56		21	Pass

Note: 1. the result basic equation calculation as follow:

Peak Power Output = Peak Power Reading + Cable loss + Attenuator

2. The worse case was recorded


Report No: 1309112 Page 46 of 106

Date: 2013-11-25



Test Figure:

1. Condition: Low Channel

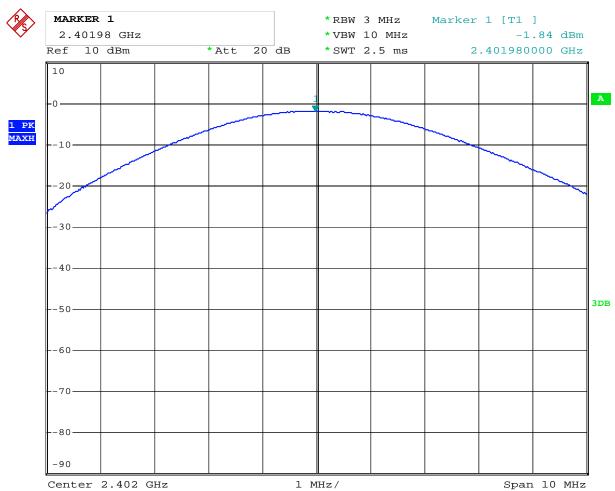


Date: 15.NOV.2013 14:11:49

Report No: 1309112 Page 47 of 106

Date: 2013-11-25



2. Condition: Middle Channel

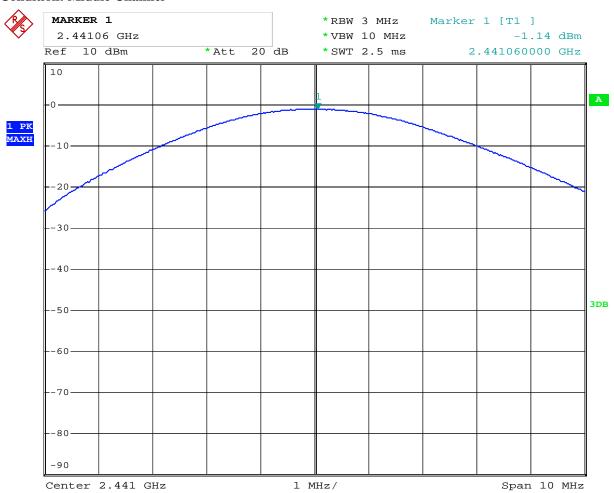


Date: 15.NOV.2013 14:10:35

Report No: 1309112 Page 48 of 106

Date: 2013-11-25



3. Condition: High Channel

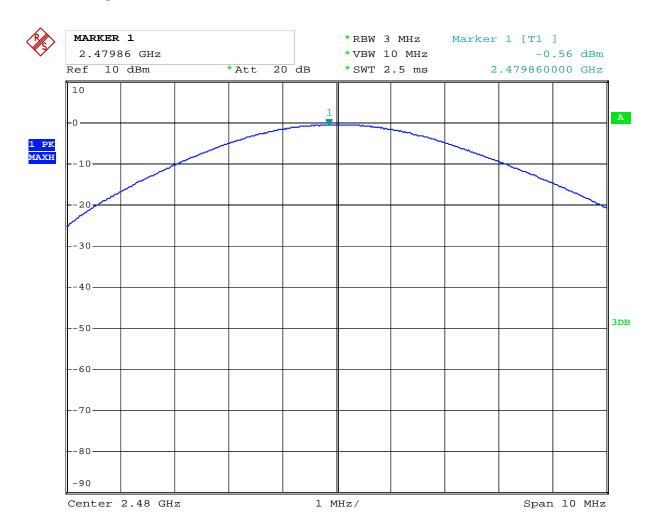

Date: 15.NOV.2013 14:10:07

Report No: 1309112 Page 49 of 106

Date: 2013-11-25



Type of Modulation: 8DPSK

EUT	Mu	ltimedia Speaker	N	Model	WB-1301, MCP-50, MCP-100
Mode	Ke	Keep Transmitting		it Voltage	120V
Temperatur	nperature 24 deg. C, H		umidity	56% RH	
Channel	Channel Frequency (MHz)	Peak Power Output (dBm)		Peak Power Limit (dBm)	Pass/ Fail
Low	2402	2402 -1.60		21	Pass
Middle	2441	2441 -0.96		21	Pass
High	2480	2480 -0.41		21	Pass

Note: 1. the result basic equation calculation as follow:

Peak Power Output = Peak Power Reading + Cable loss + Attenuator

2. The worse case was recorded


Report No: 1309112 Page 50 of 106

Date: 2013-11-25



Test Figure:

1. Condition: Low Channel

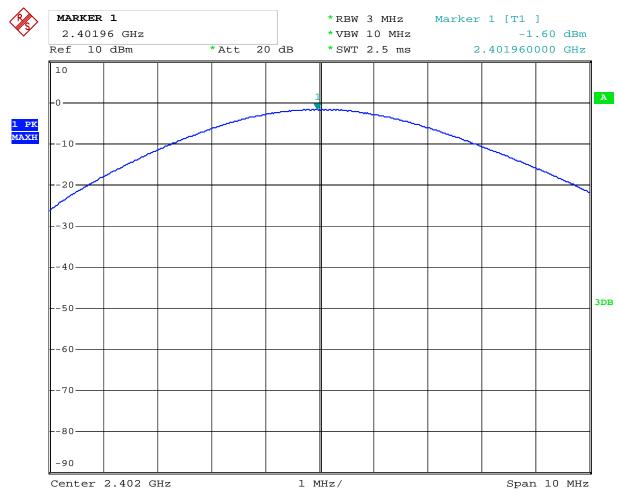


Date: 15.NOV.2013 14:08:32

Report No: 1309112 Page 51 of 106

Date: 2013-11-25



2. Condition: Middle Channel

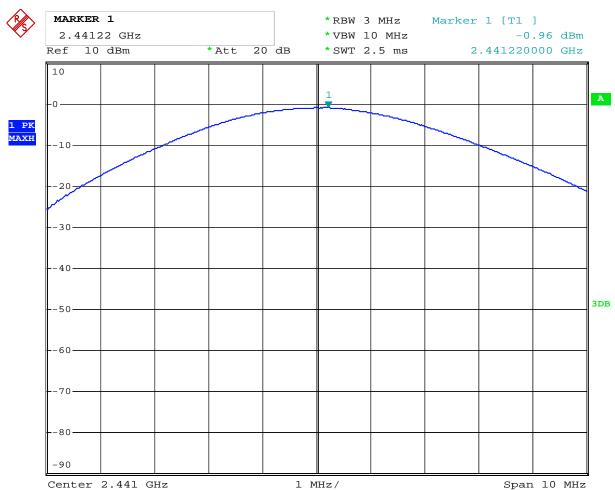


Date: 15.NOV.2013 14:09:04

Report No: 1309112 Page 52 of 106

Date: 2013-11-25



3. Condition: High Channel

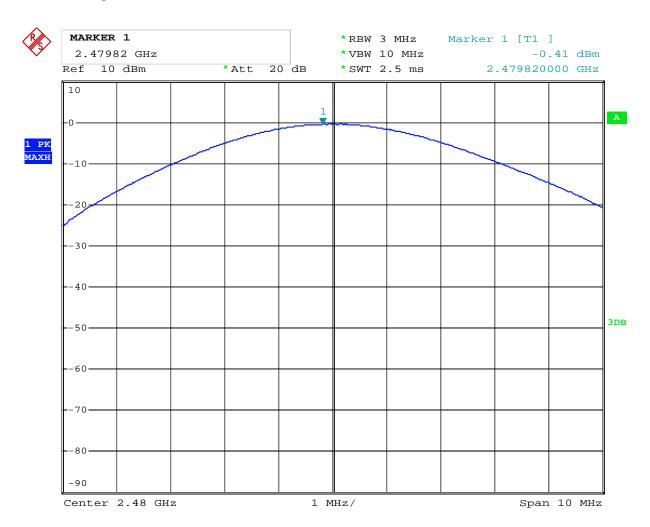

Date: 15.NOV.2013 14:09:37

Report No: 1309112 Page 53 of 106

Date: 2013-11-25



9. Carrier Frequency Separation

9.1 Regulation

According to §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

9.2 Limits of Carrier Frequency Separation

The minimum Carrier Frequency Separation is 25kHz or two-thirds of the 20dB bandwidth of the hopping Channel which is great.

9.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = wide enough to capture the peaks of two adjacent channels: Resolution (or IF) Bandwidth (RBW) \geq 1% of the span; Video (or Average) Bandwidth (VBW) \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold
- 3. Measure the separation between the peaks of the adjacent channels using the marker-delta function.
- 4. Repeat above procedures until all frequencies measured were complete.

Page 54 of 106

Report No: 1309112 Date: 2013-11-25




9.4Test Result

Type of Modulation: GFSK

EUT	Multimedia Spo	Model	WB	-1301, MCP-50, MCP-100		
Mode	Hopping O	Input Voltage		120V		
Temperature	24 deg. C,	Humidity			56% RH	
Carrier I	Frequency Separation		Limit		Pass/ Fail	
	1000kHz	≥ 25 kHz or 20 dB bandwidth			Pass	

Test Plots

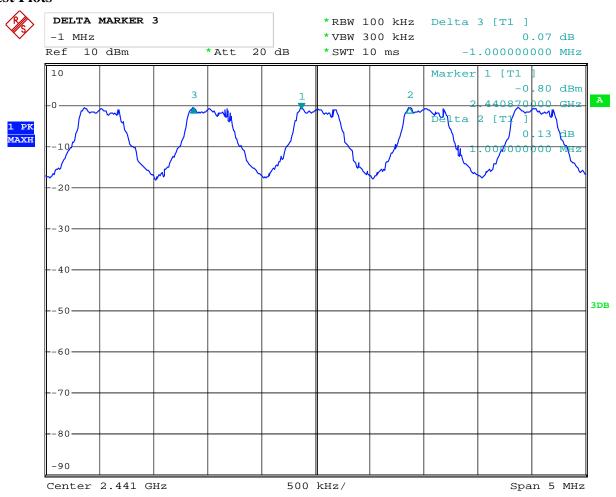

Date: 15.NOV.2013 11:56:38

Page 55 of 106


Report No: 1309112 Date: 2013-11-25



Type of Modulation: $\pi/4$ -DQPSK

EUT	Multimedia Spo	Model	WB	-1301, MCP-50, MCP-100		
Mode	Hopping O	Input Voltage		120V		
Temperature	24 deg. C,	Humidity		56% RH		
Carrier I	Frequency Separation	Limit			Pass/ Fail	
	1.000MHz	≥ 25 kHz or 2/3 of 20 dB bandwidth			Pass	

Test Plots

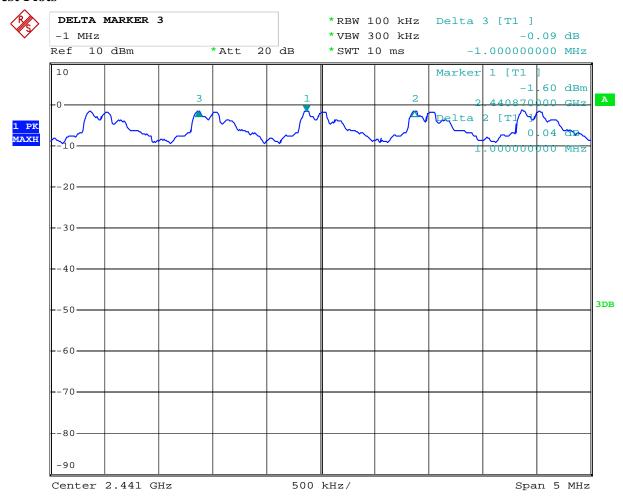

Date: 15.NOV.2013 11:52:02

Page 56 of 106


Report No: 1309112 Date: 2013-11-25



Type of Modulation: 8DPSK

EUT	Multimedia Spo	Model	WB	-1301, MCP-50, MCP-100			
Mode	Mode Hopping On				120V		
Temperature	24 deg. C,	Humidity		56% RH			
Carrier I	Frequency Separation	Limit			Pass/ Fail		
	1.000MHz	≥ 25 kHz or 2/3 of 20 dB bandwidth			Pass		

Test Plots

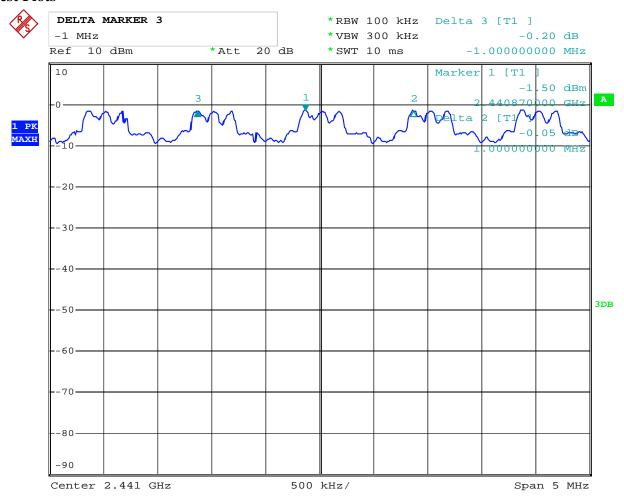

Date: 15.NOV.2013 11:44:18

Report No: 1309112 Page 57 of 106

Date: 2013-11-25



10. Number of Hopping Channels

10.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used. According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

10.2 Limits of Number of Hopping Channels

The frequency hopping systems in the 2400-2483.5MHz band shall use at least 15 channels.

10.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = the frequency band of operation; RBW=VBW=100 kHz; Sweep = auto; Detector function = peak; Trace = max hold
- 3. Record the number of hopping channels.

Page 58 of 106

Report No: 1309112 Date: 2013-11-25




10.4Test Result

Type of Modulation: GFSK

EUT	Multimedia Speaker		Model	WB-13	-1301, MCP-50,	
					MCP-100	
Mode	Hopping On		Input Voltage	120V		
Temperature		24 deg. C,	Humidity	56% RH		
Operating Frequency		Number of hopp	Limit	Pass/ Fail		
2402-2480MHz		79	≥ 15	Pass		

Test Plot

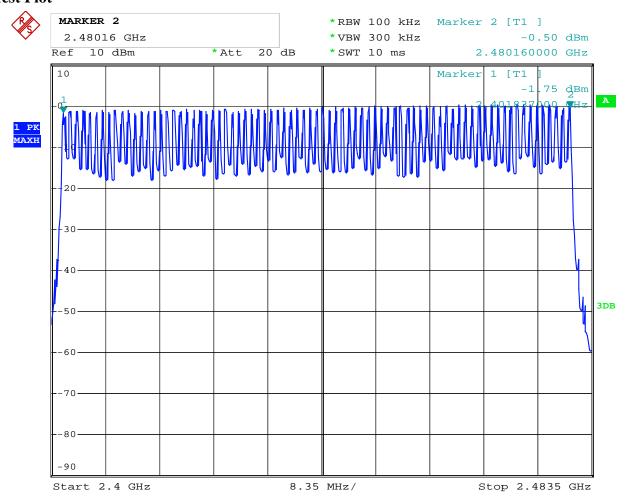

Date: 15.NOV.2013 11:27:06

Report No: 1309112 Page 59 of 106


Date: 2013-11-25



Type of Modulation: $\pi/4$ -DQPSK

EUT	Multimedia Speaker		Mo	Model		01, MCP-50,
					N	MCP-100
Mode	Hopping On		Input Voltage		120V	
Temperature	24 deg. C,		Humidity		56% RH	
Operating Frequency		Number of hopp channels	oing	Liı	nit	Pass/ Fail
2402-2480MHz		79		>	15	Pass

Test Plot

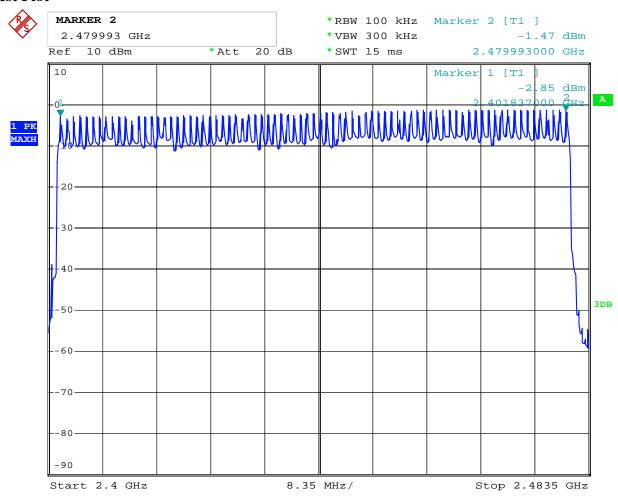

Date: 15.NOV.2013 14:35:29

Page 60 of 106


Report No: 1309112 Date: 2013-11-25



Type of Modulation: 8DPSK

EUT	Multimedia Speaker		Mo	Model		01, MCP-50,
					N	MCP-100
Mode	Hopping On		Input Voltage		120V	
Temperature		24 deg. C,	Humidity		56% RH	
Operating Frequency		Number of hopp channels		Lir	nit	Pass/ Fail
2402-2480MHz		79		≥ 15		Pass

Test Plot

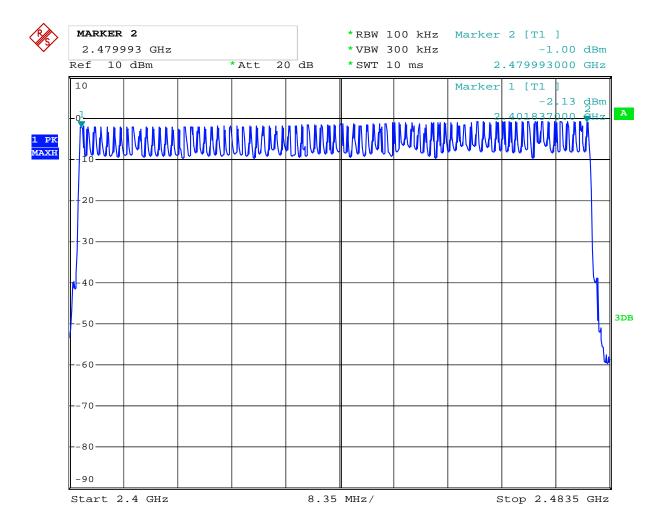

Date: 15.NOV.2013 11:35:13

Report No: 1309112 Page 61 of 106

Date: 2013-11-25



11. Time of Occupancy (Dwell Time)

11.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

11.2 Limits of Carrier Frequency Separation

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed

11.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW
- ≥ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold
- 3. Measure the dwell time using the marker-delta function.
- 4. Repeat above procedures until all frequencies measured were complete.
- 5. Repeat this test for different modes of operation (e.g., data rate, modulation format, etc.), if applicable.

Report No: 1309112 Page 62 of 106

Date: 2013-11-25



11.4 Test Result

Type of Modulation: GFSK

EUT	UT Multimedia		Speaker	Model		WB-1301, MCP-50,
						MCP-100
Mode	Mode Keep Transmitting		mitting	Input Voltage		120V
Temperatu	re	24 deg.	24 deg. C, Humi		nidity	56% RH
Channel		Reading	Hoping Rate		Actual	Limit
Low		2.98	266.667 hop/s		0.318	0.4s
Middle		2.96	266.667 hop/s		0.316	0.4s
High		2.96	266.667 hop/s		0.316	0.4s

Actual = Reading \times (Hopping rate / Number of channels) \times Test period, Test period = 0.4 [seconds / channel] \times 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625 μ s with 79 channels. A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

Note: DH5 was the worse case


Report No: 1309112 Page 63 of 106



Test Plots:

Low Channel:

Date: 2013-11-25

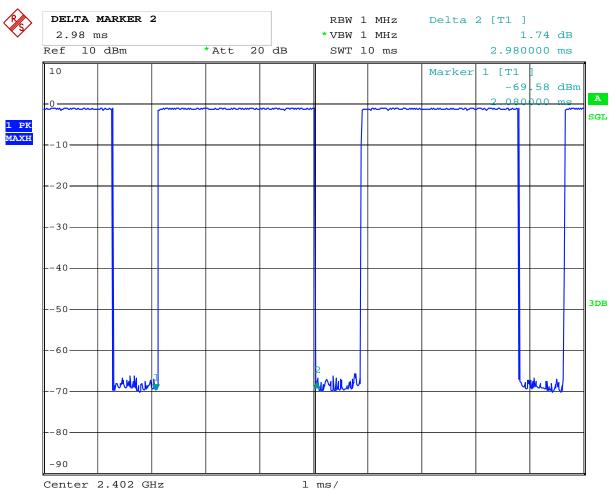


Date: 15.NOV.2013 14:16:52

Report No: 1309112 Page 64 of 106

Date: 2013-11-25



Middle Channel:

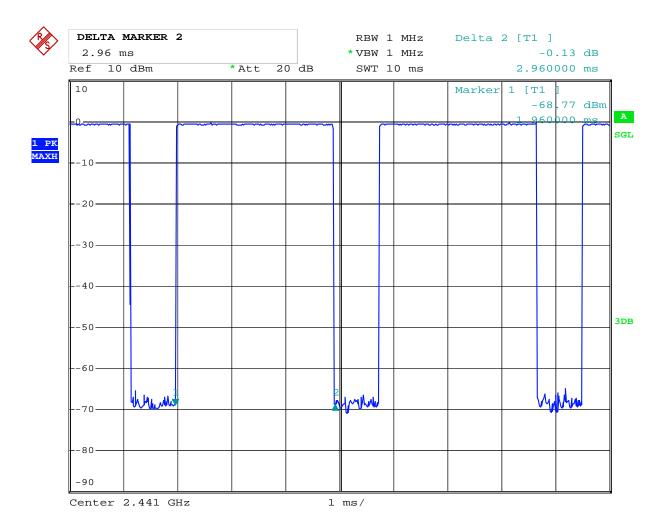


Date: 15.NOV.2013 14:15:58

Page 65 of 106

Report No: 1309112 Date: 2013-11-25



High Channel

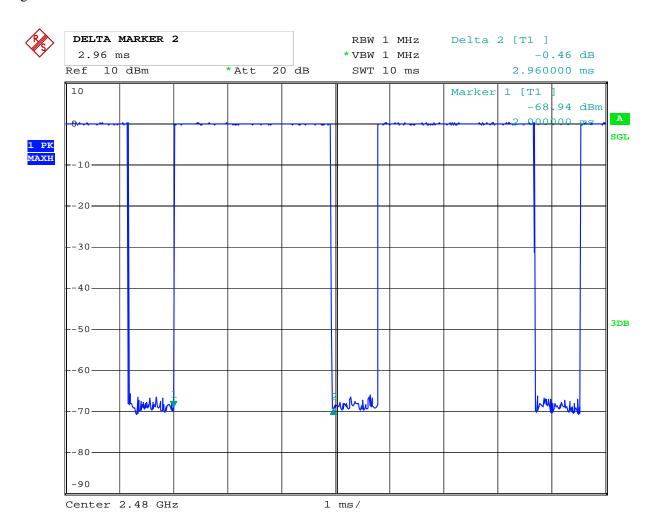

Date: 15.NOV.2013 14:15:02

Report No: 1309112 Page 66 of 106

Date: 2013-11-25



Test Result

Type of Modulation: $\pi/4$ -DQPSK

EUT	T Multimedia S		peaker	Model		WB-1301, MCP-50,		
							MCP-100	
Mode	Mode Keep Transmitting Input Voltage		ltage		120V			
Temperatu	re	24 deg. (C,	Humid	Humidity		56% RH	
Channel		Reading	Hoping Rate		Actı	ıal	Limit	
Low		2.98	266.667	hop/s	0.318		0.4s	
Middle		3.02	266.667 hop/s		0.322		0.4s	
High		2.98	266.667 hop/s		0.318		0.4s	

Actual = Reading \times (Hopping rate / Number of channels) \times Test period, Test period = 0.4 [seconds / channel] \times 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625 μ s with 79 channels. A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

Note: DH5 was the worse case


Report No: 1309112 Page 67 of 106

Date: 2013-11-25



Test Plots:

Low Channel:

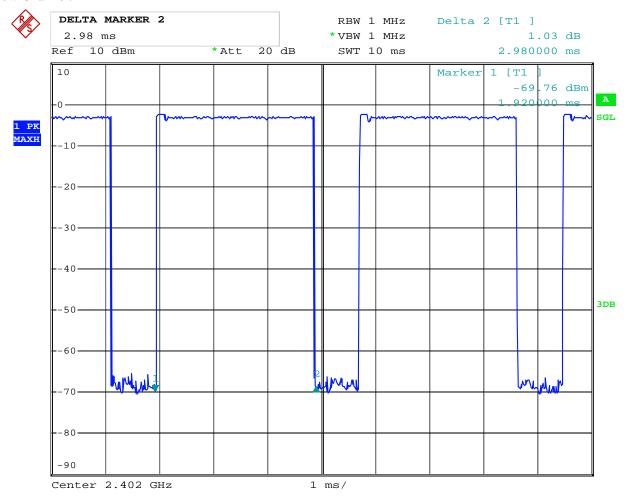


Date: 15.NOV.2013 14:17:45

Report No: 1309112 Page 68 of 106

Date: 2013-11-25



Middle Channel:

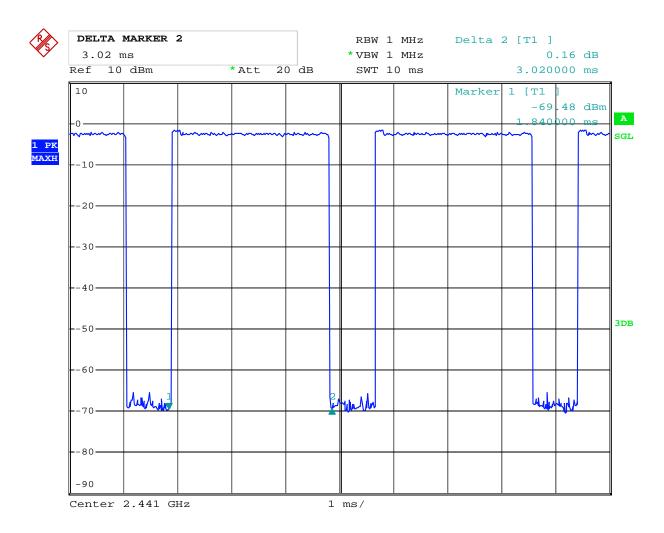


Date: 15.NOV.2013 14:18:43

Report No: 1309112 Page 69 of 106

Date: 2013-11-25



High Channel

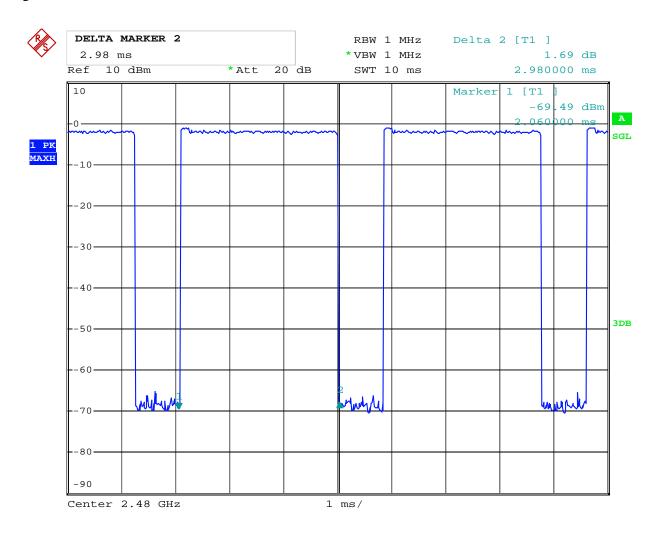

Date: 15.NOV.2013 14:19:44

Report No: 1309112 Page 70 of 106

Date: 2013-11-25



Type of Modulation: 8DPSK

EUT	EUT Multimedia Sp		peaker	Model		WB-1301, MCP-50,		
						MCP-100		
Mode	Mode Keep Transmitting Input Voltage		/oltage	120V				
Temperatu	re	24 deg. (Ξ,	Hum	Humidity		56% RH	
Channel		Reading	Hoping Rate		Actu	al	Limit	
Low		3.00	266.667 hop/s		0.320		0.4s	
Middle	3.04		266.667 hop/s		0.324		0.4s	
High	3.00		266.667 hop/s		0.320		0.4s	

Actual = Reading \times (Hopping rate / Number of channels) \times Test period, Test period = 0.4 [seconds / channel] \times 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625 μ s with 79 channels. A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

Note: DH5 was the worse case


Report No: 1309112 Page 71 of 106

Date: 2013-11-25



Test Plots:

Low Channel:

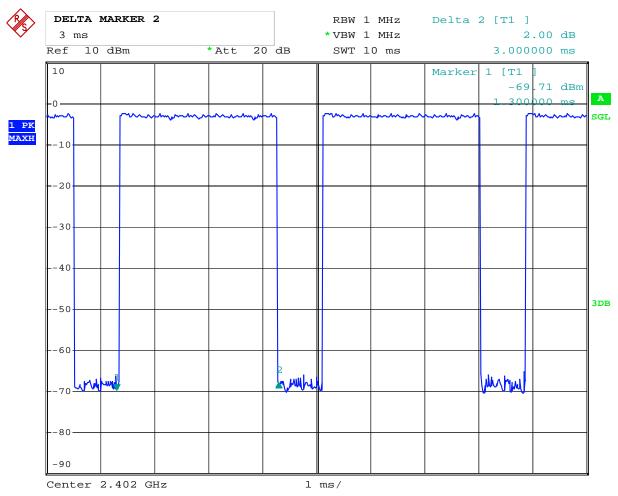


Date: 15.NOV.2013 14:22:33

Report No: 1309112 Page 72 of 106

Date: 2013-11-25



Middle Channel:

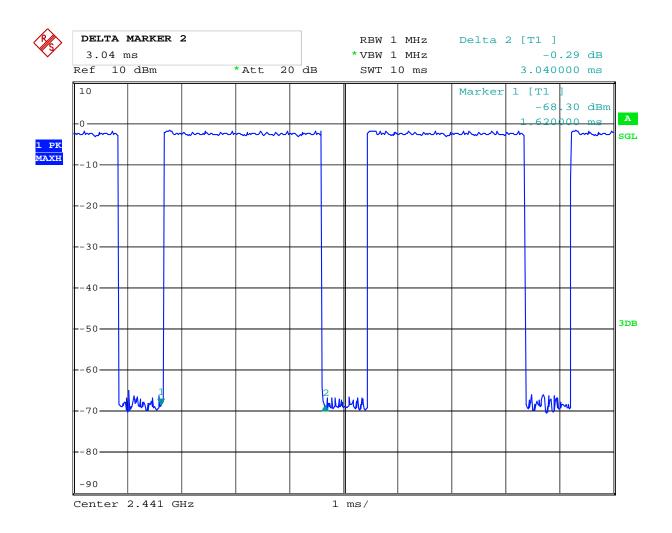


Date: 15.NOV.2013 14:21:27

Report No: 1309112 Page 73 of 106

Date: 2013-11-25



High Channel

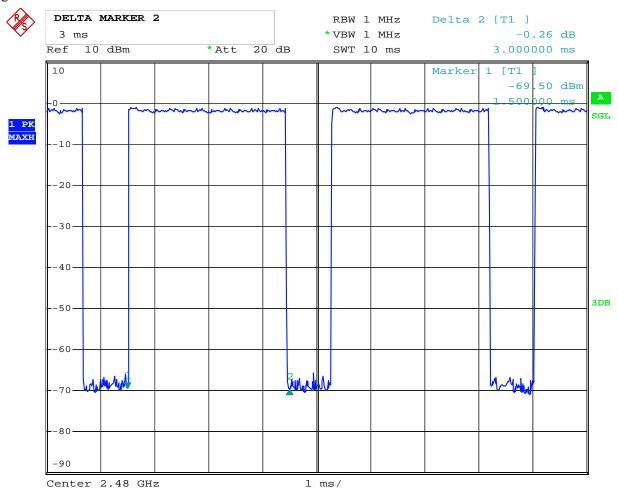

Date: 15.NOV.2013 14:20:30


Report No: 1309112 Page 74 of 106

Date: 2013-11-25



12 Out of Band Measurement

12.1 Test Setup



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

12.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

12.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of radiated emission test. Peak values with RBW=VBW=1MHz and PK detector.

For bandage test, the spectrum set as follows: RBW=100, VBW=300 kHz. A conducted measurement used

Note: 1. For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.

2. For Restrict band measurement, only the worse case was recorded. GSKF was the worse case.

Page 75 of 106

Report No: 1309112 Date: 2013-11-25




Type of Modulation: GFSK

12.4 Band edge Test Result

Product:	Multimedia Speaker	Test Mode:	Low Channel
Mode	Keeping Transmitting	Input Voltage	120V
Temperature	24 deg. C	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

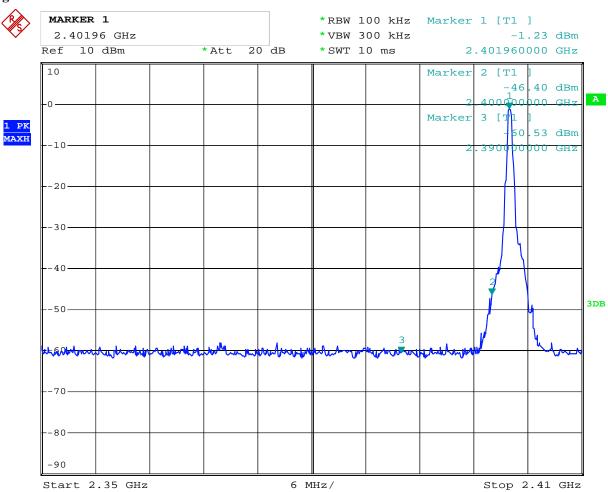

Date: 15.NOV.2013 11:59:15

Page 76 of 106

Report No: 1309112 Date: 2013-11-25




Type of Modulation: GFSK

12.4 Band edge Test Result

Product:	Multimedia Speaker	Test Mode:	High Channel
Mode	Keeping Transmitting	Input Voltage	120V
Temperature	24 deg. C	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

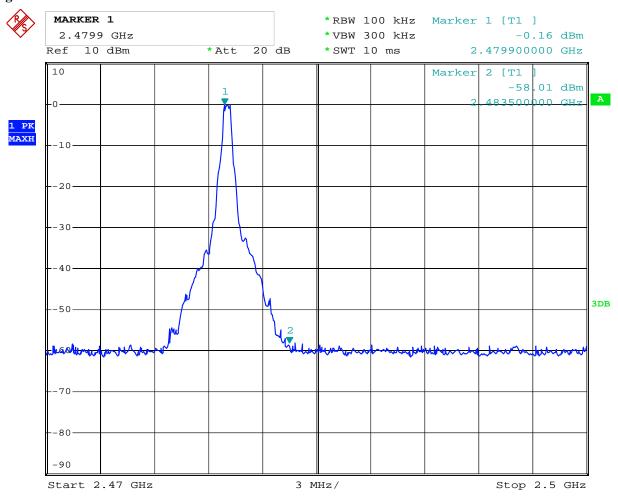

Date: 15.NOV.2013 12:10:56

Report No: 1309112 Page 77 of 106

Date: 2013-11-25




Type of Modulation: GFSK

12.4 Band edge Test Result

Product:	Multimedia Speaker	Test Mode:	Hopping mode
Mode	Hopping On	Input Voltage	120V
Temperature	24 deg. C	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

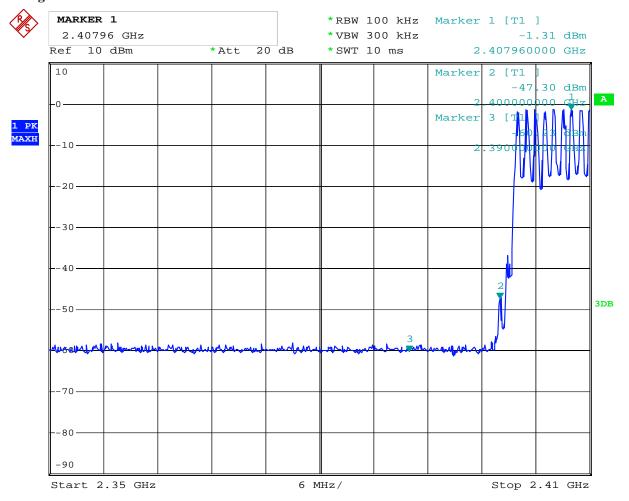

Date: 15.NOV.2013 11:58:34

Report No: 1309112 Page 78 of 106

Date: 2013-11-25




Type of Modulation: GFSK

12.4 Band edge Test Result

Product:	Multimedia Speaker	Test Mode:	Hopping mode
Mode	Hopping On	Input Voltage	120V
Temperature	24 deg. C	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

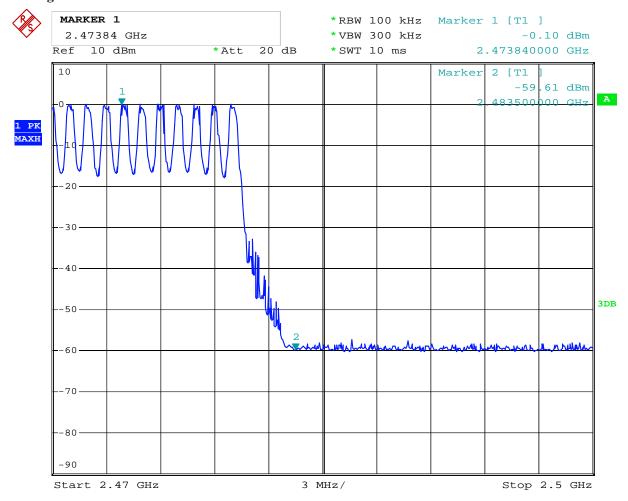

Date: 15.NOV.2013 12:12:50

Page 79 of 106

Report No: 1309112 Date: 2013-11-25




Type of Modulation: $\sqrt{1/4}$ -DQPSK

12.4 Band edge Test Result

Product:	Multimedia Speaker	Test Mode:	Low Channel
Mode	Keeping Transmitting	Input Voltage	120V
Temperature	24 deg. C	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

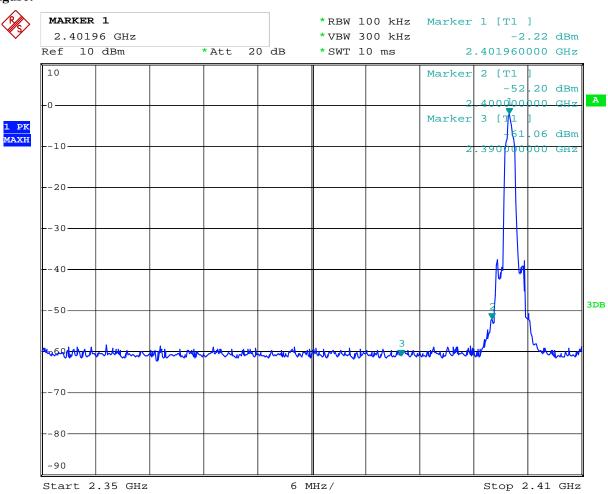

Date: 15.NOV.2013 11:59:48

Page 80 of 106

Report No: 1309112 Date: 2013-11-25




Type of Modulation: $\sqrt{1/4}$ -DQPSK

12.4 Band edge Test Result

Product:	Multimedia Speaker	Test Mode:	High Channel
Mode	Keeping Transmitting	Input Voltage	120V
Temperature	24 deg. C	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

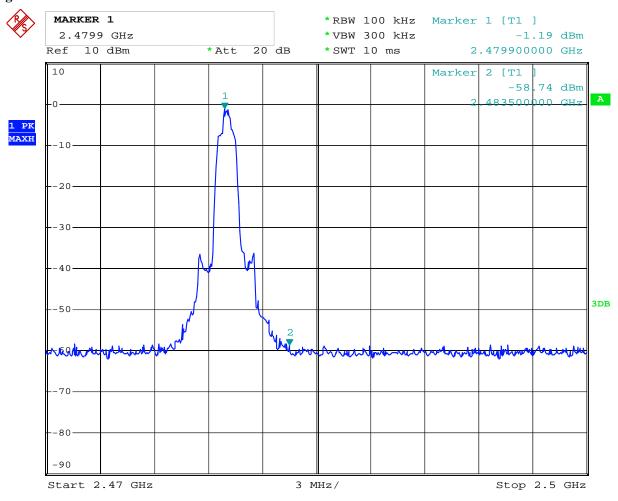

Date: 15.NOV.2013 12:10:15

Page 81 of 106

Date: 2013-11-25

Report No: 1309112




Type of Modulation: JI/4-DQPSK

12.4 Band edge Test Result

Product:	Multimedia Speaker	Test Mode:	Hopping mode
Mode	Hopping On	Input Voltage	120V
Temperature	24 deg. C	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

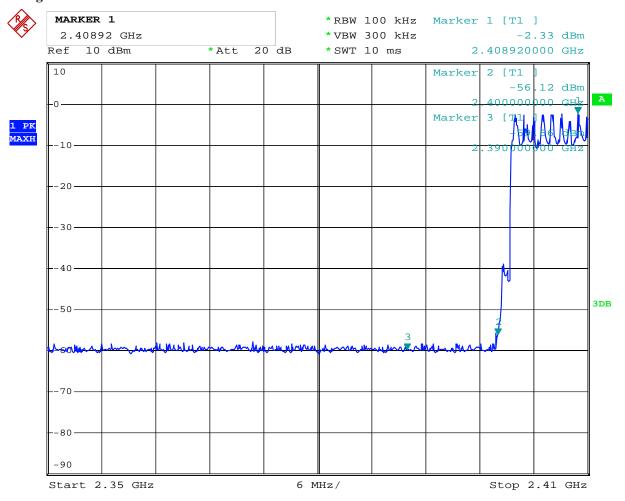

Date: 15.NOV.2013 12:01:31

Report No: 1309112 Page 82 of 106

Date: 2013-11-25




Type of Modulation: $\pi/4$ -DQPSK

12.4 Band edge Test Result

Product:	Multimedia Speaker	Test Mode:	Hopping mode
Mode	Hopping On	Input Voltage	120V
Temperature	24 deg. C	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

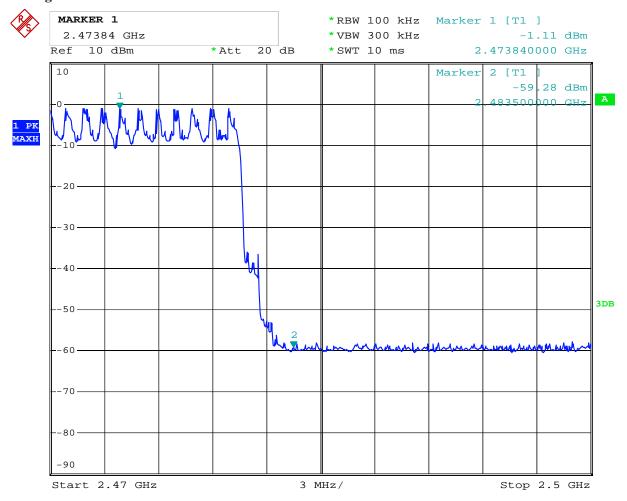

Date: 15.NOV.2013 12:09:41

Page 83 of 106

Report No: 1309112 Date: 2013-11-25




Type of Modulation: 8DPSK

12.4 Band edge Test Result

Product:	Multimedia Speaker	Test Mode:	Low Channel
Mode	Keeping Transmitting	Input Voltage	120V
Temperature	24 deg. C	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

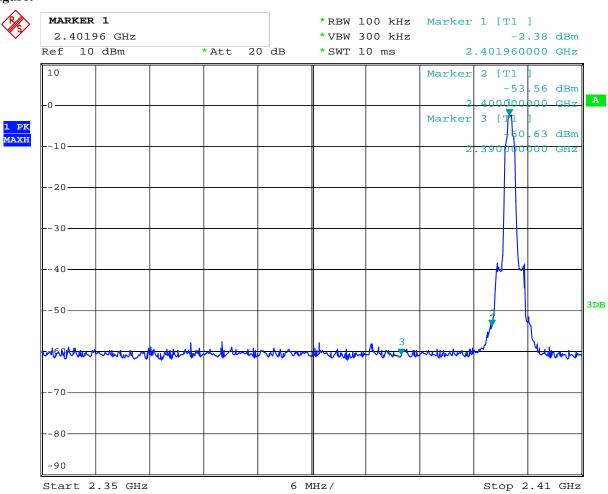

Date: 15.NOV.2013 12:04:55

Page 84 of 106

Report No: 1309112 Date: 2013-11-25




Type of Modulation: 8DPSK

12.4 Band edge Test Result

Product:	Multimedia Speaker	Test Mode:	High Channel
Mode	Keeping Transmitting	Input Voltage	120V
Temperature	24 deg. C	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

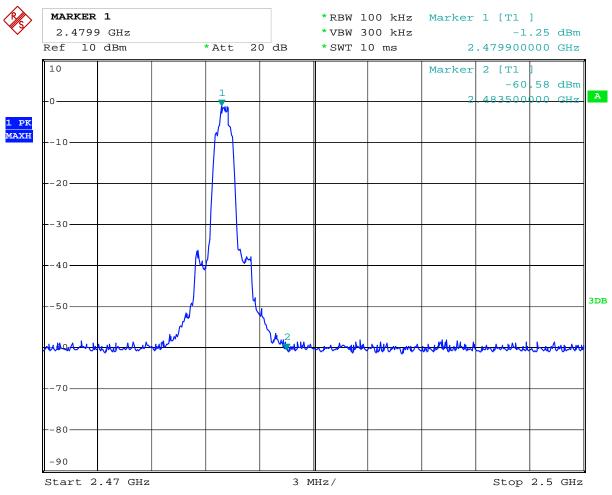

Date: 15.NOV.2013 12:05:43

Page 85 of 106

Report No: 1309112 Date: 2013-11-25




Type of Modulation: 8DPSK

12.4 Band edge Test Result

Product:	Multimedia Speaker	Test Mode:	Hopping mode
Mode	Hopping On	Input Voltage	120V
Temperature	24 deg. C	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

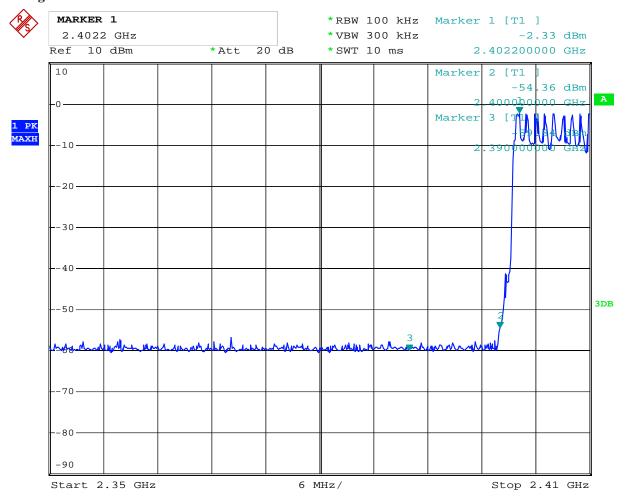

Date: 15.NOV.2013 12:04:14

Report No: 1309112 Page 86 of 106

Date: 2013-11-25




Type of Modulation: 8DPSK

12.4 Band edge Test Result

Product:	Multimedia Speaker	Test Mode:	Hopping mode
Mode	Hopping On	Input Voltage	120V
Temperature	24 deg. C	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

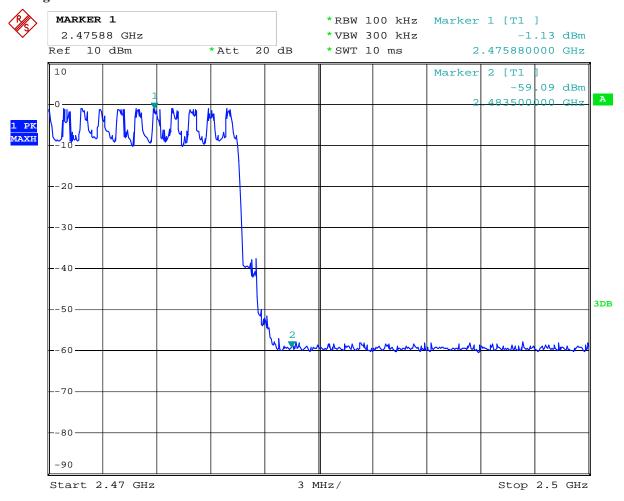

Date: 15.NOV.2013 12:07:47

Report No: 1309112 Page 87 of 106


Date: 2013-11-25



12.4 Restricted band Measurement (Worse case: GFSK Mode)

Product:	Multimedia Speaker		Test Mode:	Low Channel
Mode	Keeping Transmitting		Input Voltage	120V~
Temperature	24 deg. C		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 36.99			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m) 29.16		Limit	54(dBµV/m)
2390MHz				

Test Figure: Horizontal

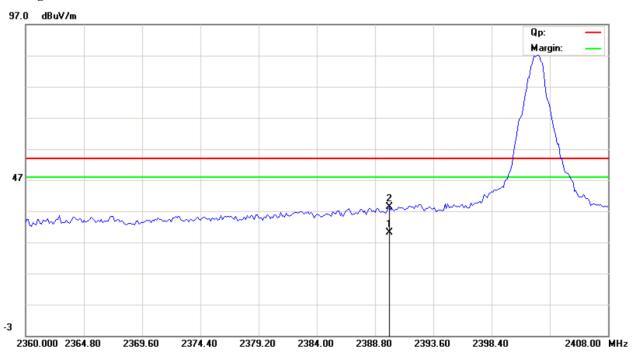

Report No: 1309112 Page 88 of 106


Date: 2013-11-25



12.4 Restricted band Measurement (Worse case: GFSK Mode)

Product:	Multimedia Speaker		Test Mode:	Low Channel
Mode	Keeping Transmitting		Input Voltage	120V~
Temperature	24 deg. C		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 38.49			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m) 30.08		Limit	54(dBµV/m)
2390MHz				



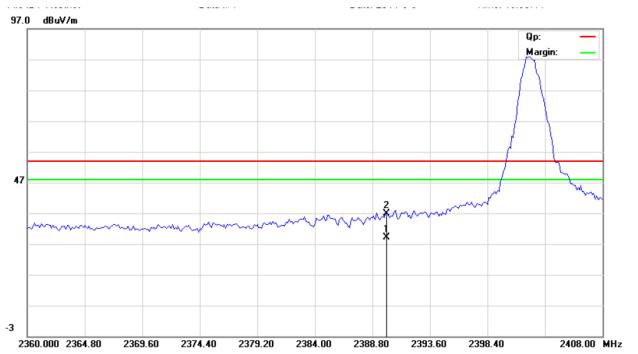

Report No: 1309112 Page 89 of 106


Date: 2013-11-25



12.4 Restricted band Measurement (Worse case: GFSK Mode)

Product:	Multimedia Speaker		Test Mode:	High Channel
Mode	Keeping Transmitting		Input Voltage	120V~
Temperature	24 deg. C		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 41.48			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m) 31.37		Limit	54(dBµV/m)
2483.5MHz				

Test Figure: Horizontal

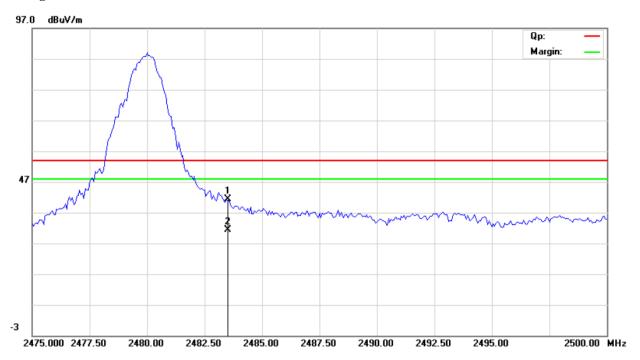

Report No: 1309112 Page 90 of 106


Date: 2013-11-25



12.4 Restricted band Measurement (Worse case: GFSK Mode)

Product:	Multimedia Speaker		Test Mode:	High Channel
Mode	Keeping Transmitting		Input Voltage	120V~
Temperature	24 deg. C		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 39.56			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m) 30.04		Limit	54(dBµV/m)
2483.5MHz				

Test Figure: Vertical

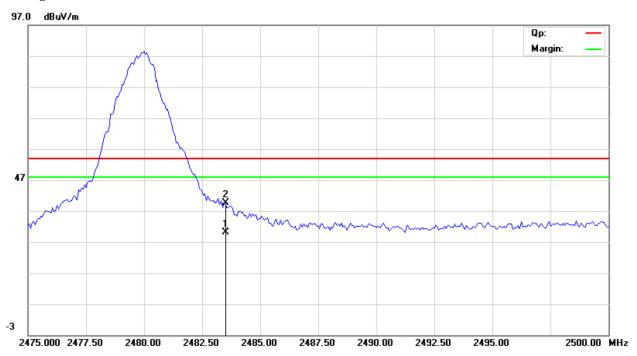

Report No: 1309112 Page 91 of 106


Date: 2013-11-25



12.4 Restricted band Measurement (Worse case: GFSK Mode)

Product:	Multimedia Speaker		Test Mode:	Hopping Mode
Mode	Keeping Transmitting		Input Voltage	120V~
Temperature	24 deg. C		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 37.19			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m) 29.02		Limit	54(dBµV/m)
2390MHz				

Test Figure: Horizontal

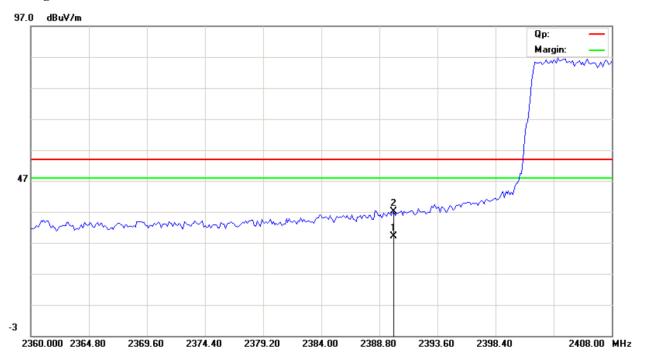

Report No: 1309112 Page 92 of 106


Date: 2013-11-25



12.4 Restricted band Measurement (Worse case: GFSK Mode)

Product:	Multimedia Speaker		Test Mode:	Hopping Mode
Mode	Keeping Transmitting		Input Voltage	120V~
Temperature	24 deg. C		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 36.32			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m) 29.11		Limit	54(dBµV/m)
2390MHz				

Test Figure: Vertical

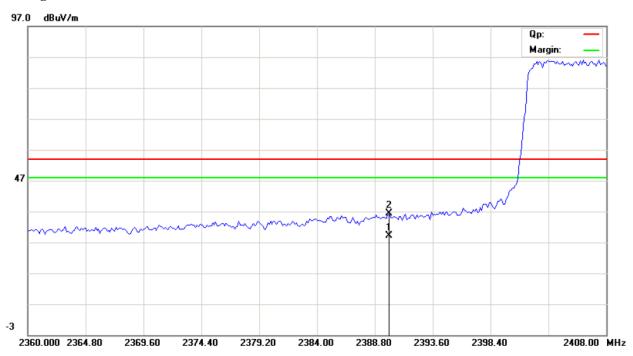

Report No: 1309112 Page 93 of 106


Date: 2013-11-25



12.4 Restricted band Measurement (Worse case: GFSK Mode)

Product:	Multimedia Speaker		Test Mode:	Hopping Mode
Mode	Keeping Transmitting		Input Voltage	120V~
Temperature	24 deg. C		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 38.20			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m) 29.67		Limit	54(dBµV/m)
2483.5MHz				

Test Figure: Horizontal

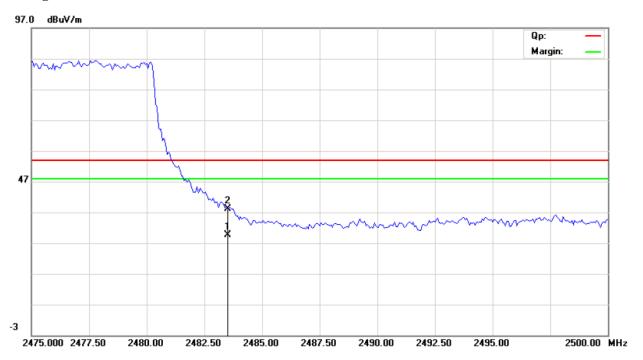

Report No: 1309112 Page 94 of 106


Date: 2013-11-25



12.4 Restricted band Measurement (Worse case: GFSK Mode)

Product:	Multimedia Speaker		Test Mode:	Hopping Mode
Mode	Keeping Transmitting		Input Voltage	120V~
Temperature	24 deg. C		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 38.97			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m) 30.25		Limit	54(dBμV/m)
2483.5MHz				

Test Figure: Vertical

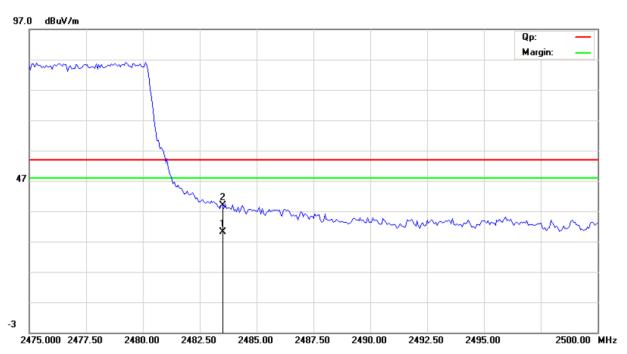

Report No: 1309112 Page 95 of 106

Date: 2013-11-25



13.0 Antenna Requirement

13.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

13.2 Antenna Connected constructions

Integral antenna used. The maximum Gain of the antennas is 2.0dBi.

Page 96 of 106

Report No: 1309112 Date: 2013-11-25




14.0 FCC ID Label

FCC ID: 2ABE7-WB-1310

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

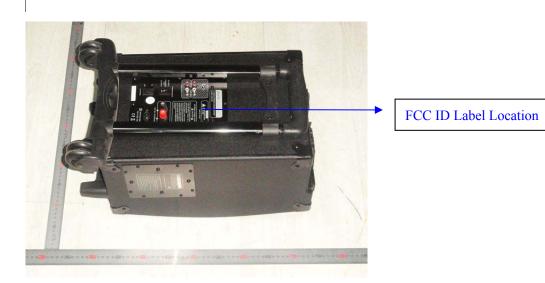


Report No: 1309112 Page 97 of 106

Date: 2013-11-25



15.0 Photo of testing

Conducted Emission Test Setup:

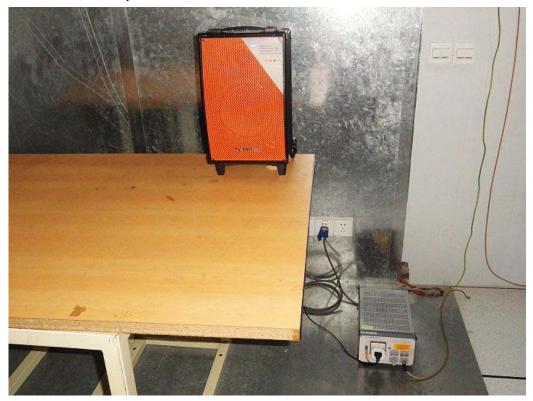

Report No: 1309112 Date: 2013-11-25



Radiated Emission Test Setup:





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it. or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: 1309112 Date: 2013-11-25



Photographs - EUT

Photo for the EUT

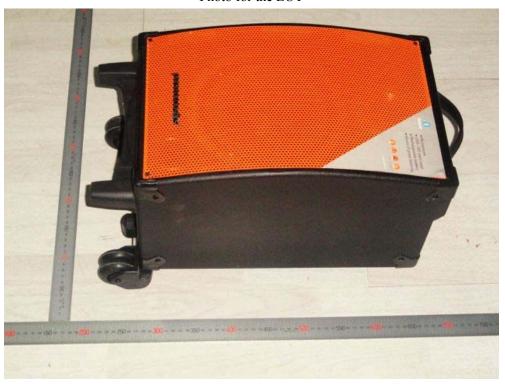



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

Page 100 of 106

Report No: 1309112 Date: 2013-11-25



Photo for the EUT





The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it. or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

Report No: 1309112 Date: 2013-11-25



Photo for the EUT

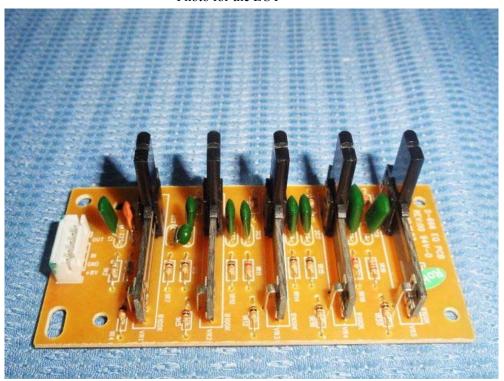

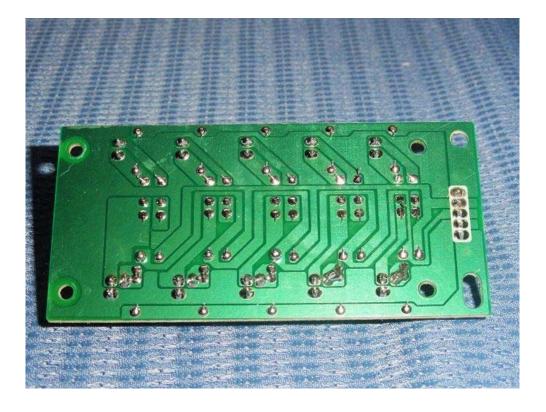

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to


Page 102 of 106

Report No: 1309112 Date: 2013-11-25



Photo for the EUT

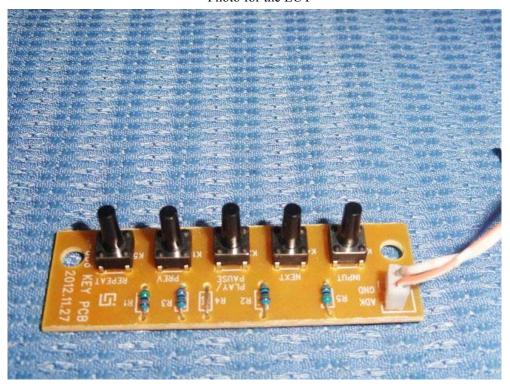

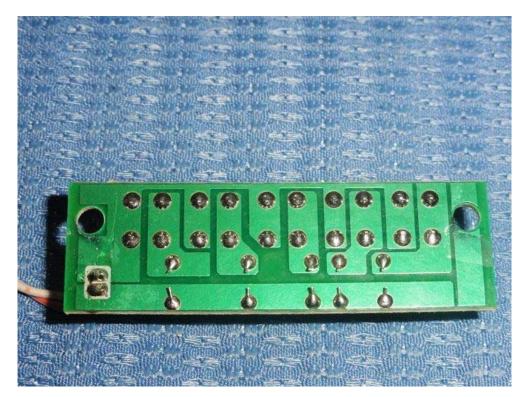

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

Page 103 of 106

Report No: 1309112 Date: 2013-11-25



Photo for the EUT

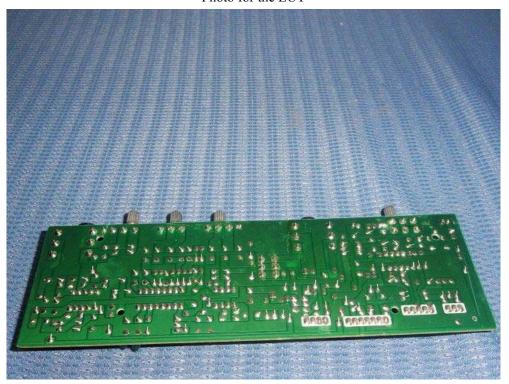



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it. or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd vill not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 104 of 106

Report No: 1309112 Date: 2013-11-25



Photo for the EUT





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 105 of 106

Report No: 1309112 Date: 2013-11-25



Photo for the EUT





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it. or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd vill not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 106 of 106

Report No: 1309112 Date: 2013-11-25



Photo for the EUT





End of the report

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it. or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to