











Test Report FCC Part15 Subpart C

Product Name : Remote Control

Model No. : YC-RFXA,YC-RFXB,YC-RFXC,YC-RFXD

FCC ID : 2ABG5-TZFDDZKJ2FR

Applicant: TAIZHOU FENGDENG ELECTRONIC TECHNOLOGY CO.,LTD

Address: No.15-3, Hongjia Shangyang Bridge, Jiaojiang Area, Taizhou, Zhejiang

Date of Receipt: Apr. 26th, 2017

Test Date : Apr. 27th, 2017~ May. 25th, 2017

Issued Date : Jul. 03rd, 2017

Report No. : 1742156R-RF-US-P06V02

Report Version : V1.0

The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by CNAS, TAF or any agency of the government. The test report shall not be reproduced without the written approval of DEKRA Testing & Certification (Suzhou) Co., Ltd.



Test Report Certification

Issued Date: Jul. 03rd 2017

Report No. : 1742156R-RF-US-P06V02



Product Name : Remote Control

Applicant : TAIZHOU FENGDENG ELECTRONIC TECHNOLOGY

CO.,LTD

Address : No.15-3, Hongjia Shangyang Bridge, Jiaojiang Area

Taizhou, Zhejiang

Manufacturer : TAIZHOU FENGDENG ELECTRONIC TECHNOLOGY

CO.,LTD

Address : No.15-3, Hongjia Shangyang Bridge, Jiaojiang Area

Taizhou, Zhejiang

Model No. : YC-RFXA,YC-RFXB,YC-RFXC,YC-RFXD

FCC ID : 2ABG5-TZFDDZKJ2FR

EUT Voltage : DC 3V

Applicable Standard : FCC CFR Title 47 Part 15 Subpart C: 2014

ANSI C63.10: 2013; ANSI C63.4: 2014

Test Result : Complied

Performed Location : DEKRA Testing & Certification (Suzhou) Co., Ltd.

No.99 Hongye Rd., Suzhou Industrial Park, Suzhou, 215006,

Jiangsu, China

TEL: +86-512-6251-5088 / FAX: +86-512-6251-5098

FCC Registration Number: 800392

Documented By : Kathy Fer

(Adm. Specialist: Kathy Feng)

Reviewed By :

(Senior Engineer: Frank He)

Approved By : Harry 2ho

(Engineering Manager: Harry Zhao)



TABLE OF CONTENTS

Des	cription	Page
1.	General Information	6
1.1.	EUT Description	6
1.2.	Mode of Operation	7
1.3.	Tested System Details	8
1.4.	Configuration of Tested System	9
1.5.	EUT Exercise Software	10
2.	Technical Test	11
2.1.	Summary of Test Result	11
2.2.	Test Environment	12
3.	Conducted Emission	13
3.1.	Test Equipment	13
3.2.	Test Setup	13
3.3.	Limit	14
3.4.	Test Procedure	14
3.5.	Uncertainty	14
3.6.	Test Result	15
4.	Radiated Emission	16
4.1.	Test Equipment	16
4.2.	Test Setup	17
4.3.	Limit	18
4.4.	Test Procedure	19
4.5.	Uncertainty	19
4.6.	Test Result	20
5.	20dB Bandwidth	22
5.1.	Test Equipment	22
5.2.	Test Setup	22
5.3.	Limit	22
5.4.	Test Procedure	23
5.5.	Uncertainty	23
5.6.		
6.	Release Time Measurement	25
6.1.	Test Equipment	25
6.2.	Test Setup	25
	Limit	
	Test Procedure	
	Uncertainty	
	Test Result	





7.	Antenna Requirement	27
7.1.	Requirement	27
7.2.	Result	27



History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
1742156R-RF-US-P06V02	V1.0	Initial Issued Report	Jul. 03rd, 2017



1. General Information

1.1. EUT Description

Product Name	Remote Control
Model No.	YC-RFXA,YC-RFXB,YC-RFXC,YC-RFXD
Working Voltage	DC 3V
Frequency Range	433.92MHz
Channel Number	1
Type of Modulation	ASK
Data Rate	<1kbps
Antenna Type	PCB Antenna

Note: The difference of above models (YC-RFXA,YC-RFXB,YC-RFXC,YC-RFXD) is the enclosure, the RF module is identical, so only the YC-RF02A was tested in the report.

YC-RFXA,X means number of the buttons, from 1 to 21.

For example,

If the remote control has two buttons, the model NO. is YC-RF02A.

If the remote control has four buttons, the model NO. is YC-RF04A.

If the remote control has eleven buttons, the model NO. is YC-RF11A.

YC-RFXB,X means number of the buttons, from 1 to 8.

For example, If the remote control has eight buttons, the model NO. is YC-RF8B.

YC-RFXC,X means number of the buttons, from 1 to 4.

For example, If the remote control has four buttons, the model NO. is YC-RF4C.

YC-RFXD,X means number of the buttons, from 1 to 24.

For example, If the remote control has Twenty-four buttons, the model NO. is YC-RF24D.



1.2. Mode of Operation

Test Mode

Mode 1: Transmit

Note:

- 1. Regards to the frequency band operation: the lowest middle and highest frequency of channel were selected to perform the test, then shown on this report.
- 2. For portable device, radiated spurious emission was verified over X, Y, Z Axis, and shown the worst case on this report.




1.3. Tested System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	Power Cord
1 N/A	N/A	N/A	N/A	N/A



1.4. Configuration of Tested System

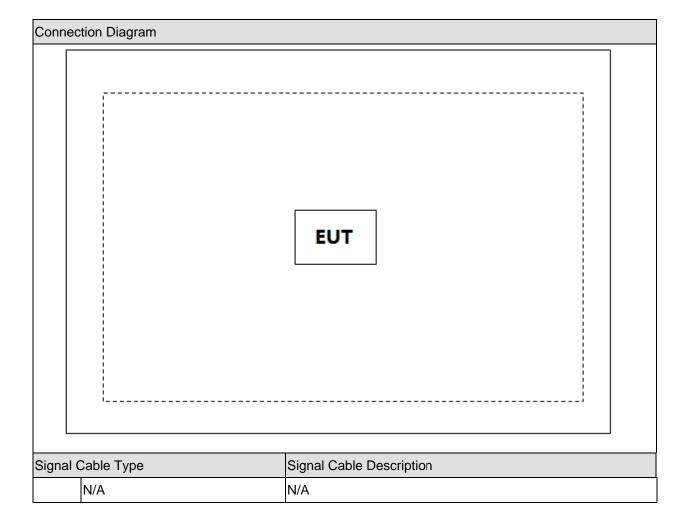



1.5. EUT Exercise Software

1	Setup the EUT and simulators as shown on above.	
2	Turn on the power of all equipment. and start to test	

Page: 10 of 27



2. Technical Test

2.1. Summary of Test Result

No deviations from the test standards
Deviations from the test standards as below description:

Dowform and Took Itams	Normative Deferences	Test	Daviation	
Performed Test Item	Normative References	Performed	Deviation	
Conducted Emission	FCC CFR Title 47 Part 15 Subpart C: 2014	N/A*)	No	
	Section 15.207			
Radiated Emission	FCC CFR Title 47 Part 15 Subpart C: 2014	Yes	No	
	Section 15.209 & 15.231(b)			
20dB Bandwidth	FCC CFR Title 47 Part 15 Subpart C: 2014	Yes	No	
	Section 15.231(c)			
Release Time	FCC CFR Title 47 Part 15 Subpart C: 2014	Yes	No	
	Section 15.231(a)(1)			
Antenna Requirement	FCC CFR Title 47 Part 15 Subpart C: 2014	Yes	No	
Section 15.203				
*) Note: The FUT has no AC	input port, test is not applicable.			



2.2. Test Environment

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	21
Humidity (%RH)	25-75	50
Barometric pressure (mbar)	860-1060	950-1000

Page: 12 of 27



3. Conducted Emission


3.1. Test Equipment

Conducted Emission / TR-1

Instrument	Manufacturer	Type No.	Serial No.	Cal. Due Date
EMI Test Receiver	R&S	ESCI	100726	2017.09.16
Two-Line V-Network	R&S	ENV216	100043	2017.08.07
Two-Line V-Network	R&S	ENV216	100044	2017.09.16
50ohm Coaxial Switch	Anritsu	MP59B	6200464462	N/A
50ohm Termination	SHX	TF2	07081401	2017.09.16
Temperature/Humidity	zhioh on a	ZC1-2	TD4 TU	2018.01.07
Meter	zhicheng	201-2	TR1-TH	2016.01.07

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

3.2. Test Setup

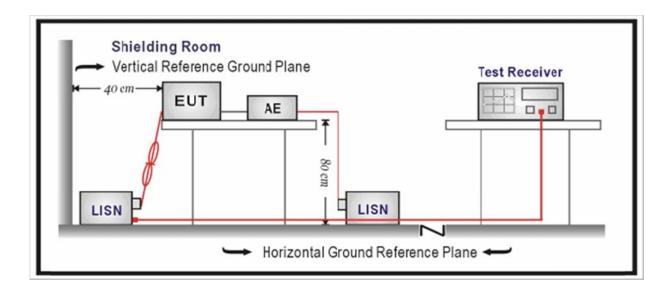



3.3. Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits					
Frequency (MHz)	QP (dBuV)	AV (dBuV)			
0.15 - 0.50	66 - 56	56 – 46			
0.50 - 5.0	56	46			
5.0 - 30	60	50			

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

3.4. Test Procedure

The EUT was setup according to ANSI C63.4: 2014, and tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.

The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.

3.5. Uncertainty

The measurement uncertainty is defined as ± 2.02 dB



3.6. Test Result

The EUT is powered by battery, so this test item is not applicable.

Page: 15 of 27



4. Radiated Emission

4.1. Test Equipment

Radiated Emission / AC-2

Instrument	Manufacturer	Type No.	Serial No.	Cal. Due Date
EMI Test Receiver	R&S	ESCI	100573	2018.03.10
Loop Antenna	R&S	HFH2-Z2	833799/003	2017.11.25
Bilog Antenna	Teseq GmbH	CBL6112D	27611	2017.10.10
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC2-C	2018.02.28
Temperature/Humidit				
y Meter	Zhicheng	ZC1-2	AC2-TH	2018.01.07

Radiated Emission / AC-5


Instrument	Manufacturer	Type No.	Serial No.	Cali. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2018.05.12
Preamplifier	Miteq	NSP1800-25	1364185	2018.05.03
Preamplifier	QuieTek	AP-040G	CHM-0906001	2018.05.03
Bilog Antenna	Teseq GmbH	CBL6112D	27612	2017.10.15
Broad-Band Horn				
Antenna	Schwarzbeck	BBHA9120D	733	2018.02.26
DRG Horn	ETS-Lindgren	3117	001670:55	2017.07.16
Broad-Band Horn				
Antenna	Schwarzbeck	BBHA9170	294	2018.04.10
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C1	2018.02.28
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C2	2018.02.28
Coaxial Cable	Huber+Suhner	SUCOFLEX 102	AC5-C3	2018.02.28
Temperature/Humidit				
y Meter	Zhicheng	ZC1-2	AC5-TH	2018.01.07

Page: 16 of 27




4.2. Test Setup

Below 1GHz Test Setup:

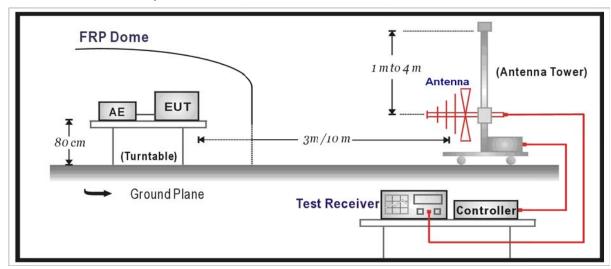

Above 1GHz Test Setup:

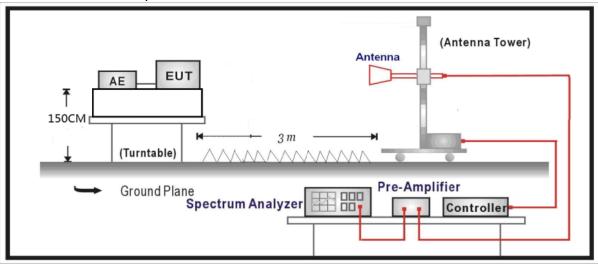



4.3. Limit

FCC Part 15 Subpart C Paragraph 15.209					
Frequency (MHz)	Distance (m)	Level (dB μ V/m)			
30 - 88	3	40			
88 - 216	3	43.5			
216 - 960	3	46			
Above 960	3	54			

Note 1: The lower limit shall apply at the transition frequency.

Note 2: Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

Note 3: E field strength (dB μ V/m) = 20 log E field strength (μ V/m)

Field strength of emissions from intentional radiators operated under 15.231(b) shall not exceed the following:

Fundamental frequency	Field strength of	Field strength of spurious
(MHz)	fundamental (μV/m)	emissions (μ V/m)
40.66-40.70	2250	225
70-130	1250	125
130-174	11250 to 3750	1125 to 375
174-260	3750	375
260-470	13750 to 12500	1375 to 1250
Above 470	12500	1250

(1) The above field strength limits are specified at a distance of 3 meters. The tighter limits apply at the band edges.

(2) Intentional radiators operating under the provisions of this section shall demonstrate compliance with the limits on the field strength of emissions, as shown in the above table, based on the average value of the measured emissions. As an alternative, compliance with the limits in the above table may be based on the use of measurement instrumentation with a CISPR quasi-peak detector. The specific method of measurement employed shall be specified in the application for equipment authorization. If average emission measurements are employed, the provisions in §15.35 for averaging pulsed emissions and for limiting peak emissions apply. Further, compliance with the provisions of §15.205 shall be demonstrated using the measurement instrumentation specified in that section.



(3) Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follow: for the band 130-174MHz, μ V/m at 3 meters= 56.81818(F)-6136.3636; for the band 260-470MHz, μ V/m at 3 meters=41.6667(F)-7083.3333.

4.4. Test Procedure

The EUT was setup according to ANSI C63.4: 2014 & ANSI C63.10: 2013 for compliance to FCC 47CFR 15.231 requirements.

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.4: 2014 on radiated measurement.

The resolution bandwidth below 1GHz setting on the field strength meter is 120 kHz and above 1GHz is 1MHz.

The frequency range from 30MHz to 10th harmonic is checked.

Note: When doing emission measurement above 1GHz, the horn antenna will be bended down a little (as horn antenna has the narrow beamwidth) in order to keeping the antenna in the "cone of radiation" of EUT. The 3dB beamwidth is 10~60 degrees for H-plane and 10~90 degrees for E-plane.

4.5. Uncertainty

The measurement uncertainty above 1G is defined as \pm 3.9 dB below 1G is defined as \pm 3.8 dB



4.6. Test Result


All of the test result shown indicates the worst case, and spectrum analyzer parameters setting as shown below:

Peak detector: RBW = 1MHz, VBW = 3MHz, sweep time = 100ms;

Average detector: Peak Level - DCCF

For the operating frequency 433.92MHz, the fundamental emission limit level shall be 41.6667*(433.92)-7083.3333uV/m= 80.83dB μ V/m, the harmonics emission limit level shall be 60.83 dB μ V/m, based on average detector.

For the DCCF (Duty cycle correction factor)

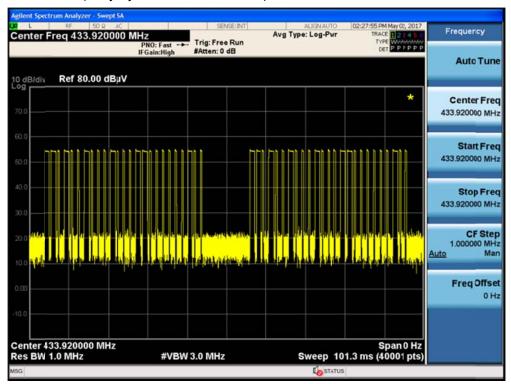

DCCF=-20log(13405/40001)=9.50dB

Note1: The transmission train is hard to mark, so we use the points which are above -40dBm to show transmission train total time. And the points over the whole points is the duty cycle.



Mode 1: Transmitter

Ante	Frequency	Reading	Factor	Measured	DCCF	Measured	Lim	nit	Over	Limit
nna	(MHz)	Level	(dB)	Peak Level	(dB)	Averaged	(dBu\	//m)	(d	В)
		(dBuV/m)		(dBuV/m)		Level				
						(dBuV/m)	PK	AV	PK	AV
Н	433.88	55.28	26.46	81.74	9.50	72.24	100.83	80.83	-19.09	-8.59
V	433.88	39.67	24.95	64.62	9.50	55.12	100.83	80.83	-36.21	-25.71
Н	867.72	16.92	31.86	48.78	9.50	39.28	80.83	60.83	-32.05	-21.55
V	867.72	5.00	32.79	37.79	9.50	28.29	80.83	60.83	-43.04	-32.54
Н	1301.76	41.35	-2.72	38.63	9.50	29.13	74.00	54.00	-35.37	-24.87
V	1301.76	41.27	-2.72	38.55	9.50	29.05	74.00	54.00	-35.45	-24.95
Н	1735.68	41.34	-0.56	40.78	9.50	31.28	80.83	60.83	-40.05	-29.55
V	1735.68	40.27	-0.56	39.71	9.50	30.21	80.83	60.83	-41.12	-30.62
Н	2169.60	39.52	2.08	41.60	9.50	32.10	80.83	60.83	-39.23	-28.73
V	2169.60	39.31	2.08	41.39	9.50	31.89	80.83	60.83	-39.44	-28.94

Note 1: When the harmonic emission falls into the 15.205 restriction band, use 15.209 limits.

Note 2: The radiated emission was verified over X, Y, Z Axis, and found the worst case is Y Axis. Only record the test data of this direction.

Note 3: For below 1GHz, Measure Level = Reading Level + Cable Loss + Antenna Factor; For above 1GHz, Measure Level = Reading Level + Cable Loss + Antenna Factor - Preamplifier Gain. Note 4: For frequency higher than 2169.6MHz and other frequency, no significant emission

detected.

Test Result	Pass



5. 20dB Bandwidth


5.1. Test Equipment

20dB Bandwidth / AC-3

Instrument	Manufacturer	Type No.	Serial No.	Cal. Due Date
EMI Test Receiver	R&S	ESCI	100573	2018.03.10
Loop Antenna	R&S	HFH2-Z2	833799/003	2017.11.25
Bilog Antenna	Teseq GmbH	CBL6112D	27611	2017.10.10
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC2-C	2018.02.28
Temperature/Humidity				
Meter	Zhicheng	ZC1-2	AC2-TH	2018.01.07

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

5.2. Test Setup

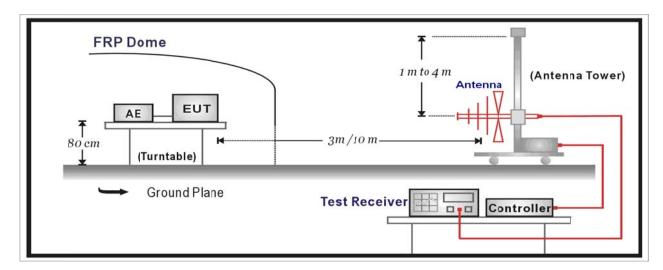

5.3. Limit

The 20 dB bandwidth of the emission shall be no wider than 0.25% of the center frequency. Therefore, the 20dB bandwidth of the emission limit shall be 433.92MHz * 0.25% = 1.0848MHz.



5.4. Test Procedure

The EUT was tested according to ANSI C63.10: 2013 for compliance to FCC 47CFR 15.231(c) requirements.

Set RBW = 10 kHz, VBW = 30kHz, Span=1MHz, use 20dB bandwidth function to test the result.

5.5. Uncertainty


The measurement uncertainty is defined as \pm 1 kHz



5.6. Test Result

Product	:	emote Control	
Test Item	• •	20dB Bandwidth	
Test Site	• •	AC-3	
Test Mode	:	Mode 1: Transmit	

Frequency	20dB Bandwidth	99% Bandwidth	Limit	Result
(MHz)	(kHz)	(kHz)	(kHz)	
433.92	54.59	180.57	1084.8	Pass

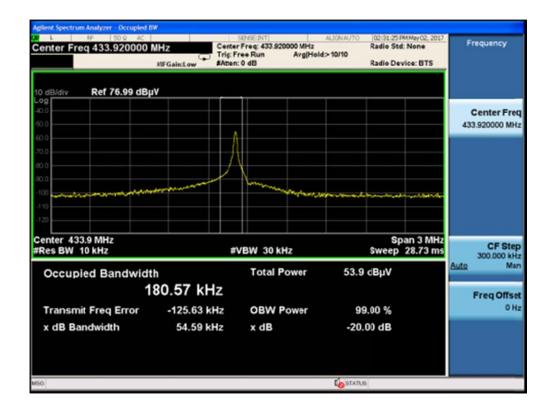



6. Release Time Measurement


6.1. Test Equipment

20dB Bandwidth / TR-8

Instrument	Manufacturer	Туре No.	Serial No.	Cal. Due Date
EMI Test Receiver	R&S	ESCI	100573	2018.03.10
Loop Antenna	R&S	HFH2-Z2	833799/003	2017.11.25
Bilog Antenna	Teseq GmbH	CBL6112D	27611	2017.10.10
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC2-C	2018.02.28
Temperature/Humidity Meter	Zhicheng	ZC1-2	AC2-TH	2018.01.07

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

6.2. Test Setup

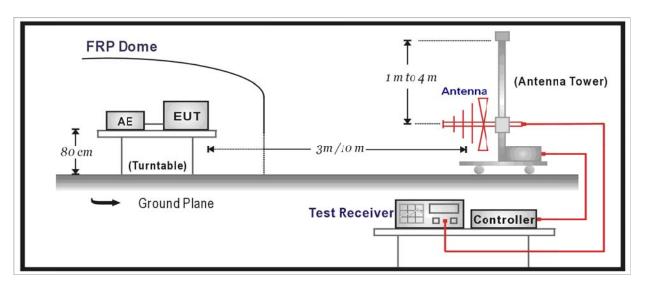

6.3. Limit

A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

6.4. Test Procedure

The EUT was tested under radiated method. Set the center frequency at the operating frequency and set the span to zero. Set suitable sweep time and capture the transmission after make the switch on. After release the switch record the time plots to check the release time.

6.5. Uncertainty

The measurement uncertainty is defined as \pm 0.00005ms.



6.6. Test Result

Press on the EUT and then release, and it will be shut down within 195ms, cease transmitting within 5s, so the test result for this item is pass. The release time is marked as Mkr1 and the stop transmitting time is marked as \triangle Mkr1.





7. Antenna Requirement

7.1. Requirement

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

7.2. Result

The EUT is equipped with integrate antenna, which can't be replaced by other antenna. So the EU
complied with the antenna requirement of section 15.203.
The End

Page: 27 of 27