

FCC ID TEST REPORT

for

Infrared wireless alert system(Transmitter)

Model: DZ-342

FCC ID: 2ABG6DZ-342

Prepared for: SHENZHEN JYHCHIUN ELECTRONIC INDUSTRIAL

COMPANYLIMITED

Building A1. West Industrial Zone 2. FengMin Road MinZhu ShaJing

BaoAn District ShenZhen City China

Prepared by: Shenzhen TCT Testing Technology Co.,Ltd

1F, Building 1, Yibaolai Industrial Park, Qiaotou Village, Fuyong Town,

Baoan District, Shenzhen, Guangdong, China

TEL: +86-0755-27363339 FAX: +86-0755-27673332

Report Number: TCT131203018F2-1 Date of Test: Dec. 05~Dec.17, 2013

Date of Report: Dec.17, 2013

The results detailed in this test report relate only to the specific sample(s) tested. It is the Application's responsibility to ensure that all production units are manufactured with equivalent EMC characteristics. This report is not to be reproduced except in full, without written approval from TCT Testing Technology.



Table of Contents

1.0	General Details	3
1.1	Test Lab Details	3
1.2	Applicant Details	3
1.3	Description of EUT	4
1.4	Submitted Sample	4
1.5	Test By	4
2.0	List of Measurement Equipment	5
3.0	Technical Details	6
3.1	Summary of Test Results	6
3.2	Test Standards.	6
4.0	EUT Modification	6
5.0	Measurement Uncertainty	6
6.0	Power Line Conducted Emission Test	7
6.1	Schematics of the test.	7
6.2	Test Method and Test Procedure	7
6.3	EUT Operating Condition.	7
6.4	Test Equipment.	7
5.5	Conducted Emission Limit.	8
6.6	Test specification.	8
6.7	Test result.	8
7.0	Manually Activated Transmitter	11
7.1	Block diagram of Test setup.	11
7.2	Limit	11
7.3	Test Equipment.	11
7.4	Test specification	11
7.5	Test result.	11
8.0	Radiation Emission.	13
8.1	Test Method and test Procedure	13
8.2	Block diagram of Test setup.	13
8.3	Limit	15
8.4	Test Equipment.	16
8.5	Test specification.	16
8.6	Test result.	17
9.0	Occupied Bandwidth	20
10.0	Antenna Requirement	22
11.0	FCC ID Label	23



1.0 General Details

1.1 Test Lab Details

Name: Shenzhen Tongce Testing Lab

Address: 1F, Leinuo Watch Building, Fuyong Town, Baoan Dist, Shenzhen, China

Telephone: 13410377511

Fax: --

The test facility is recognized, certified, or accredited by the following organizations:

FCC Registration Number: 572331

Shenzhen TCT Testing Technology Co., Ltd., Shenzhen EMC Laboratory: Shenzhen Tongce Testing Lab The 3m Semi-anechoic chamber has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

Registration Number: 572331

Industry Canada (IC)

The 3m Semi-anechoic chamber of Shenzhen TCT Testing Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

Registration Number IC: 10668A-1

1.2 Applicant Details

Applicant: SHENZHEN JYHCHIUN ELECTRONIC INDUSTRIAL COMPANYLIMITED

Address: Building A1. West Industrial Zone 2. FengMin Road MinZhu ShaJing

BaoAn District ShenZhen City China

Telephone: 075561532166 Fax: 075527720716

Manufacturer: SHENZHEN JYHCHIUN ELECTRONIC INDUSTRIAL COMPANYLIMITED

Address: Building A1. West Industrial Zone 2. FengMin Road MinZhu ShaJing

BaoAn District ShenZhen City China

Telephone: 075561532166 Fax: 075527720716



1.3 Description of EUT

Product: Infrared wireless alert system(Transmitter)

Model No.: DZ-342
Additional Model No.: N.A.
Brand Name: N.A.
Additional Trade Name: N.A.
Rating: DC 9V

The battery information: DC 9V

Brand name: GP Model: 1604E 6F22

Operation Frequency: 433.92MHz

Modulation: ASK

Antenna Designation: A integral antenna and the maximum gain is 2 dBi.

1.4 Statement: N.A.

1.5 Test Engineer

The sample tested by

Printed name: Jack Kang



2.0 Test equipments and Associated Equipment used during the test.

2.1 Test Equipments

Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test	ROHDE&SCHWARZ	ESPI 3	100379	July 07, 2013	July 06, 2014
Receiver	KOHDE&SCHWARZ	ESFI 5	100379		
Spectrum	ROHDE&SCHWARZ	FSEM	848597/001	July 07, 2013	July 06, 2014
Analyzer	KUNDE&SCHWAKZ	LSEM	646397/001	July 07, 2013	July 00, 2014
Pre-amplifier	Teseq	LAN6900		July 08, 2013	July 07, 2014
Pre-amplifier	Agilent	8447D	83153007374	July 08, 2013	July 07, 2014
Pre-amplifier	Agilent	8449B	3008A01738	July 08, 2013	July 07, 2014
Loop antenna	A.R.A.	PLA-1030/B	1029	July 8, 2013	July 7, 2014
Ultra Broadband	ROHDE&SCHWARZ	III 560	100157	Index 09, 2012	July 07, 2014
ANT	RUHDE&SCHWARZ	HL562	100157	July 08, 2013	July 07, 2014
Horn Antenna	ETS LINDGREN	3117		July 08, 2013	July 07, 2014

2.2 AE used during the test

Equipment type	Manufacturer	Model
N.A.		

2.3. Block Diagram of EUT Configuration

EUT	

Note: New batteries are used for E.U.T during the test



3.0 Technical Details

3.1 Summary of test results

The EUT has been tested according to the following specifications

Requirement	CFR 47 Section	Result	Notes
Conduction Emission, 0.15MHz to 30MHz	15.207	N.A.	N.A.
Manually Activated Transmitter	15.231(a)	PASS	Complies
Radiation Emission	15.231(b), 15.205, 15.209, 15.35	PASS	Complies
Occupied Bandwidth	15.231(c)	PASS	Complies

3.2 Test Standards

FCC Part 15:2012 Subpart C, Paragraph 15.231

4.0 EUT Modification

No modification by Shenzhen TCT Testing Technology Co., Ltd

5.0 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	MU
1.	Radio Frequency	$\pm 1 \times 10^{-9}$
2.	Temperature	±0.1℃
3.	Humidity	±1.0%
4.	RF power, conducted	±0.34dB
5.	RF power density, conducted	±1.45dB
6.	Spurious emissions, conducted	±3.70dB
7.	All emissions, radiated	±4.50dB


Note: 1) The EUT is a Infrared wireless alert system(Transmitter). The EUT can be powered by batteries, and New Batteries were used during all tests.

- 2) Working transmission frequency: 433.92MHz
- 3) N.A. means Not Applicable.



6.0 Power Line Conducted Emission Test

6.1 Schematics of the test

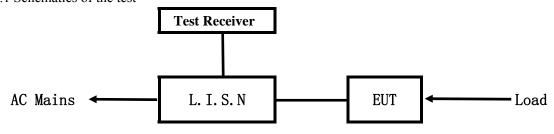


EUT: Equipment Under Test

6.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2009and ANSI C63.4-2003.

The Frequency spectrum From 0.15MHz to 30MHz was investigated.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

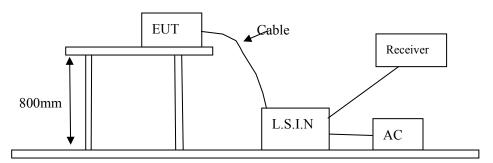

6.3 EUT Operating Condition

Operating condition is according to ANSI C63.10 -2009 and ANSI C63.4-2003

- 1) Setup the EUT and simulators as shown on the following
- 2) Enable AF signal and confirm EUT active to normal condition

6.4 Test Equipment

Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
EMI Test Receiver	R&S	ESCS30	100139	July 7, 2013	July 6, 2014
LISN	AFJ	LS16C	16010222119	July 7, 2013	July 6, 2014



6.5 Conducted Emission Limit

Eraguanay (MHz)	Class A Lir	nits (dB µ V)	Class B Lim	nits (dB µ V)
Frequency(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level
$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*
$0.50 \sim 5.00$	73.0	60.0	56.0	46.0
$5.00 \sim 30.00$	73.0	60.0	60.0	50.0

Notes:

- 1) *Decreasing linearly with logarithm of frequency.
- 2) The tighter limit shall apply at the transition frequencies

6.6 Test specification:

Environmental conditions: Temperature: 26° C Humidity: 55% Atmospheric pressure: 103kPa

Frequency range: 0.15 MHz – 30 MHz

The test was carried out in the following operation mode(s):

TX Mode

6.7 Test result

N.A.

The requirements are FULFILLED

Remarks: 1) According to FCC part 15.207.



A Conducted Emission on Line Terminal of the power line (150kHz to 30MHz)

EUT Description:	N.A.
Operation Mode:	N.A.
Tested By:	N.A.
Test date:	N.A.

Start Frequency	Stop Frequency	Step	IF BW	Detector	Final M-Time
0.15MHz	30MHz	4.5KHz	10KHz	QP+AV	1s

N.A.



B Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT Description:	N.A.
Operation Mode:	N.A.
Tested By:	N.A.
Test date:	N.A.

Start Frequency	Stop Frequency	Step	IF BW	Detector	Final M-Time
0.15MHz	30MHz	4.5KHz	10KHz	QP+AV	1s


N.A.

Note: The power supply of this equipment is battery, so this test item is not applicable



7.0 Manually Activated Transmitter

7.1 Block diagram of Test setup



7.2 Limit

A transmitter activated automatically shall cease transmission within 5 seconds after activation.

7.3 Test Equipment:

Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
Spectrum Analyzer	ROHDE&SCHWARZ	FSEM	848597/001	July 7, 2013	July 6, 2014

7.4 Test specification:

Environmental conditions: Temperature 23° C Humidity: 50% Atmospheric pressure: 103kPa


7.5 Test result

Result: Pass



Test data

Working Mode	Working Frequency(MHz)	Activate Time(s)	Limit(s)
Transmitting	433.92	2.455	5

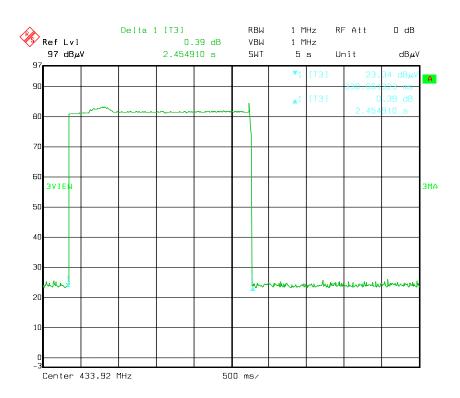




8.0 Radiated Emission Test

- 8.1 Test Method and test Procedure:
 - 1) The EUT was tested according to ANSI C63.10 –2009 and ANSI C63.4-2003.
 - 2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2009 and ANSI C63.4-2003.
 - 3) The frequency spectrum from 9kHz to 5GHz was investigated. All readings from 9kHz to 30MHz are quasi-peak values with a resolution bandwidth of 10 kHz, measured with loop antenna. All readings from 30MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz, measured with Bi-log antenna. All readings are above 1 GHz are peak values with a resolution bandwidth of 1 MHz, measured with horn antenna.
 - 4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for above 30MHz each frequency. The antenna high is 1 m to find the maximum emission for each frequency below 30MHz
 - 5) Tested distance: 3 meters
 - 6) The antenna polarization: Vertical polarization and Horizontal polarization.
 - 7) Each azimuth of E.U.T will be tested.


8.2 Block diagram of Test setup

Block diagram of Test setup for frequency 30-1000MHz

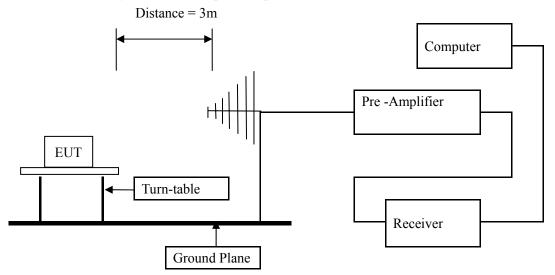




Block diagram of Test setup for frequency below 30MHz

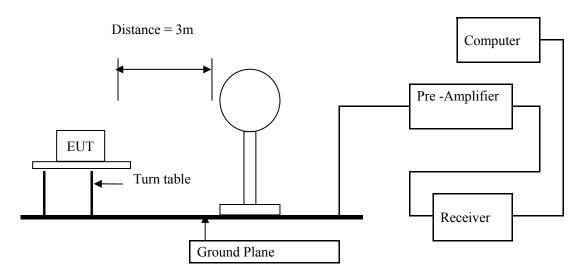

Block diagram of Test setup for frequency above 1GHz

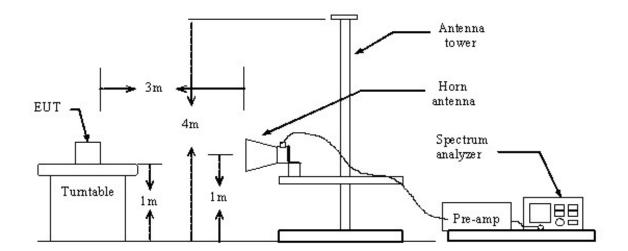



8.3 Limit

According to 15.231(b) requirements, the field strength of emissions from intentional radiators operated under this Section shall not exceed the following

Fundamental Frequency	Filed Strength of Fundamental	Filed Strength of Spurious
(MHz)	(microvolts/meter)	Emission (microvolts/meter)
40.66-40.70	2250	225
70-130	1250	125
130-174	1250 to 3750*	125 to 375*
174-260	3750	375
260-470	3750 to 12500*	375 to 1250*
Above 470	12500	1250

^{*}Linear interpolations

[Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz, μ V/m at 3 meters = 56.81818(F) - 6136.3636; for the band 260-470 MHz, μ V/m at 3 meters = 41.6667(F) - 7083.3333. The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.]

For this E.U.T

Working	Filed Strength of	Filed Strength of Spurious
Frequency(MHz)	Fundamental(dB µ V/m)	Emission(dB μ V/m)
433.92	80.8	60.8

Intentional radiators operating under the provisions of this Section shall demonstrate compliance with the limits on the field strength of emissions, as shown in the above table, based on the average value of the measured emissions.

According to 15.35, on any frequency or frequencies below or equal to 1000 MHz, the limits Shown are based on measuring equipment employing a CISPR quasi-peak detector function and related measurement bandwidths, unless otherwise specified the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test.



According to 15.231(b), The limits on the field strength of the spurious emissions in the above table are based on the fundamental frequency of the intentional radiator. Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in Section 15.209, whichever limit permits a higher field strength. Frequencies in restricted band are complied to limit on Paragraph 15.209.

	_	
Frequency Range (MHz)	Distance (m)	Field strength (dB µ V/m)
0.009-0.490	3	20log 2400/F (kHz) + 80
0.490-1.705	3	20log 24000/F (kHz) + 40
1.705-30	3	20log 30 + 40
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1) RF Voltage (dBuV) = 20 log RF Voltage (uV)
- 2) In the Above Table, the tighter limit applies at the band edges.
- 3) Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4)The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.
- 5) If measurement is made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula Ld1 = Ld2 * (d2/d1)

8.4 Test Equipment:

Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	ROHDE&SCHWARZ	ESPI 3	100379	July 7, 2013	July 6, 2014
Spectrum Analyzer	ROHDE&SCHWARZ	FSEM	848597/001	July 7, 2013	July 6, 2014
Pre-amplifier	Teseq	LAN6900	-	July 8, 2013	July 7, 2014
Pre-amplifier	Agilent	8447D	83153007374	July 8, 2013	July 7, 2014
Pre-amplifier	Agilent	8449B	3008A01738	July 8, 2013	July 7, 2014
Triple-loop antenna	ROHDE&SCHWARZ	HM020	843885/002	July 8, 2013	July 7, 2014
Ultra Broadband ANT	ROHDE&SCHWARZ	HL562	100157	July 8, 2013	July 7, 2014
Horn Antenna	ETS LINDGREN	3117	-	July 8, 2013	July 7, 2014
Horn Antenna	ETS LINDGREN	3160		July 8, 2013	July 7, 2014

8.5 Test specification:

Environmental conditions: Temperature 23° C Humidity: 50% Atmospheric pressure: 103kPa



8.6 Test result Result: Pass

A Fundamental Radiated Emission

Frequency (MHz)	Emission Level@3m	Antenna Polarity	Limit@3m	Remark
	$(dB\mu V/m)$		$(dB\mu V/m)$	
433.92	80.40	Н	100.8	Peak
433.92	69.04	V	100.8	Peak

Frequency (MHz)	Peak Emission Level@3m (dBµV/m)	AV Factor (dB)	AV Emission Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBμV/m)	Remark
433.92	80.40	-11.37	69.03	Н	80.8	AV
433.92	69.04	-11.37	57.67	V	80.8	AV

B Harmonics and spurious Radiated Emission

Frequency (MHz)	Emission Level@3m	Antenna Polarity	Limit@3m	Remark
	$(dB\mu V/m)$		$(dB\mu V/m)$	
35.8316	29.63	Н	80.8	Peak
867.809	32.68	Н	80.8	Peak
1302.610	34.52	Н	74	Peak
35.8316	26.10	V	80.8	Peak
867.809	30.52	V	80.8	Peak
1302.610	32.31	V	74	Peak

Frequency	Peak Emission	AV	AV Emission	Antenna	Limit@3m	Remark
(MHz)	Level@3m	Factor	Level@3m	Polarity	(dBµV/m)	Remark
(WITIZ)	$(dB\mu V/m)$	(dB)	$(dB\mu V/m)$	Totality	(α Βμ ν /III)	
35.8316	29.63	-11.37	18.26	Н	60.8	AV
867.809	32.68	-11.37	21.31	Н	60.8	AV
1302.610	34.52	-11.37	23.15	Н	54	AV
35.8316	26.10	-11.37	14.73	V	60.8	AV
867.809	30.52	-11.37	19.15	V	60.8	AV
1302.610	32.31	-11.37	20.94	V	54	AV



Note:


- 1) Emission Level=Reading+ Cable loss+ Antenna factor-Amp factor
- 2) Test Frequency form 9kHz to 5GHz, the emission levels are 20 dB below the limit value, which are not reported. It is deemed to comply with the requirement
- 3) AV=Average
- 4) AV Emission level = Peak Emissions level +AV Factor
- 5) AV Factor = 20 log(Duty Cycle)

Duty cycle test data as follows


Total time one cycle	Effective time one cycle	Duty Cycle	AV Factor(dB)
38.80	10.42	0.27	-11.37

Note: Effective time one cycle=20*0.521=10.42

Duty Cycle= Effective time one cycle/ Total time one cycle=0.27

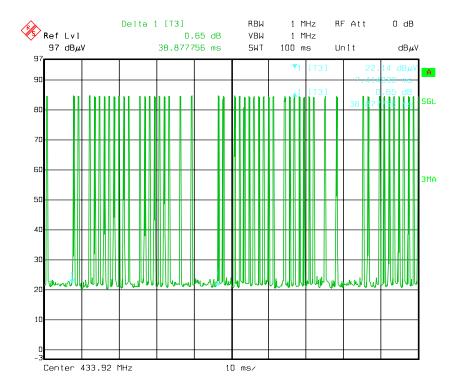



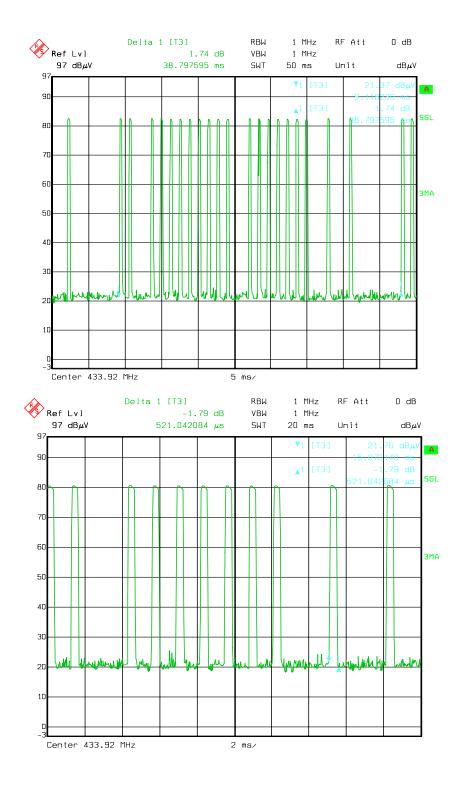



9.0 Occupied Bandwidth

9.1 Block diagram of Test setup



9.2 Test Specification:

Environmental conditions: Temperature 22° C Humidity: 50% Atmospheric pressure: 103kPa

9.3 Test Equipment:

Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
Spectrum Analyzer	ROHDE&SCHWARZ	FSEM	848597/001	July 7, 2013	July 6, 2014

9.4 Limit


According to 15.231(c), The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.



9.6 Test Result:

Channel	20dB Bandwidth (kHz)	Limit (kHz)	Conclusion
(Low)	428.9	1084.8	PASS

Note: Limit = 433.92MHz *0.25% = 1084.8 kHz

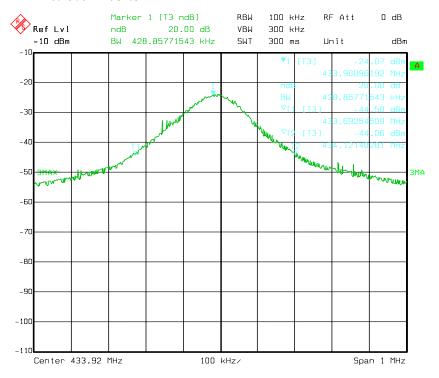




10.0 Antenna Requirement

10.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

10.2 Antenna Specification

According to the manufacturer declared, the EUT has a integral antenna; the directional gain of antenna is 2 dBi, and no consideration of replacement. Therefore the EUT is considered sufficient to comply with the provision.

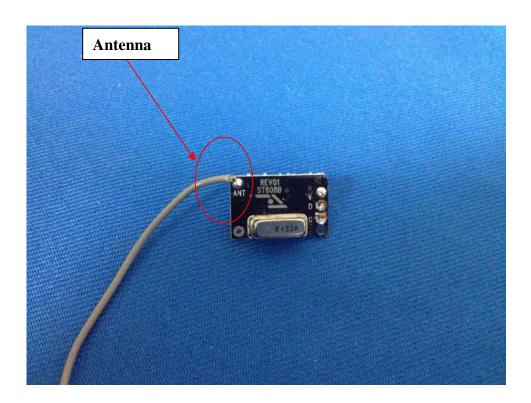



11.0 FCC ID Label

FCC ID: 2ABG6DZ-342

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:



-- End of the report--