

Report No.: AGC01321140703FE02 Page 1 of 98

FCC Test Report

Report No.: AGC01321140703FE02

FCC ID : 2ABGBE40

APPLICATION PURPOSE : Original Equipment

PRODUCT DESIGNATION: Mobile Phone

BRAND NAME : Magicon

MODEL NAME : Hero E40

CLIENT : Conplex International Limited

DATE OF ISSUE : July 24, 2014

STANDARD(S) : FCC Part 22H & 24E Rules

REPORT VERSION: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd.

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.

Page 2 of 98

REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	July 24, 2014	Valid	Original Report

TABLE OF CONTENTS

1.VERIFICATION OF COMPLIANCE	5
2. GENERAL INFORMATION	6
2.1 PRODUCT DESCRIPTION	6
2.2 RELATED SUBMITTAL(S) / GRANT (S)	8
2.3 TEST METHODOLOGY	8
2.4 TEST FACILITY	
2.5 MEASUREMENT INSTRUMENTS	8
2.6 SPECIAL ACCESSORIES	9
2.7 EQUIPMENT MODIFICATIONS	9
3. SYSTEM TEST CONFIGURATION	10
3.1 EUT CONFIGURATION	10
3.2 EUT EXERCISE	10
3.3 GENERAL TECHNICAL REQUIREMENTS	10
3.4 CONFIGURATION OF EUT SYSTEM	11
4. SUMMARY OF TEST RESULTS	12
5. DESCRIPTION OF TEST MODES	12
6. OUTPUT POWER	13
6.1 Conducted Output Power	13
6.2 RADIATED OUTPUT POWER	20
6.3. Peak-to-Average Ratio	23
7. SPURIOUS EMISSION	25
7.1 CONDUCTED SPURIOUS EMISSION	25
7.2 Radiated Spurious Emission	28
8. MAINS CONDUCTED EMISSION	32
8.1 MEASUREMENT METHOD	32
8.2 PROVISIONS APPLICABLE	32
8.3 MEASUREMENT RESULT	33
a ERECHENCY STABILITY	35

9.1 MEASUREMENT METHOD	35
9.2 PROVISIONS APPLICABLE	35
9.3 MEASUREMENT RESULT (WORST)	36
10. OCCUPIED BANDWIDTH	39
10.1 MEASUREMENT METHOD	39
10.2 PROVISIONS APPLICABLE	39
10.3 MEASUREMENT RESULT	39
11. EMISSION BANDWIDTH	41
11.1 MEASUREMENT METHOD	41
11.2 PROVISIONS APPLICABLE	41
11.3 MEASUREMENT RESULT	41
12. BAND EDGE	43
12.1 MEASUREMENT METHOD	43
12.2 PROVISIONS APPLICABLE	43
12.3 MEASUREMENT RESULT	43
APPENDIX A	44
TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION	44
APPENDIX B	72
TEST PLOTS FOR OCCUPIED BANDWIDTH (99%)	72
EMISSION BANDWIDTH (-26DBC)	72
APPENDIX C	82
TEST PLOTS FOR BAND EDGES	82
APPENDIX D	89
PHOTOGRAPHS OF TEST SETUP	89
APPENDIX E	92
PHOTOGRAPHS OF FUT	92

Page 5 of 98

1. VERIFICATION OF COMPLIANCE

Applicant	Conplex International Limited
Address	Unit 902-904, 9 th Floor, Tower B, Hung Hom Commercial Centre, 37, Ma Tau Wai Road, Hung Hum, Kowloon, HongKong.
Manufacturer	Conplex International Limited
Address	Unit 902-904, 9th Floor, Tower B, Hung Hom Commercial Centre, 37, Ma Tau Wai Road, Hung Hum, Kowloon, HongKong.
Product Designation	Mobile Phone
Brand Name	Magicon
Test Model	Hero E40
Date of test	July 16, 2014 to July 22, 2014
Deviation	None
Condition of Test Sample	Normal

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C 63.4:2003 and TIA/EIA 603. The sample tested as described in this report is in compliance with the FCC Rules Part 22H and 24E.

The test results of this report relate only to the tested sample identified in this report.

Tested By :	East He		
	Bart Xie	July 24, 2014	
Reviewed By :	kill	of try	
	Kidd Yang	July 24, 2014	
Approved By:	Solzer	Zhang	
	Solger Zhang	July 24, 2014	

Report No.: AGC01321140703FE02 Page 6 of 98

2. GENERAL INFORMATION

2.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

Product Designation:	Mobile Phone		
Hardware version:	P100_MB_V1.3_1211		
Software version:	N/A		
Frequency Bands:	☐GSM 850 ☐PCS 1900 (U.S. Bands) ☐GSM 900 ☐DCS 1800 (Non-U.S. Bands) ☐UMTS FDD Band II ☐UMTS FDD Band V (U.S. Bands) ☐UMTS FDD Band I ☐UMTS FDD Band VIII (Non-U.S. Bands)		
Antenna:	PIFA Antenna		
Antenna gain:	-1.0dBi(GSM/WCDMA 850), -0.8dBi (GSM/WCDMA 1900)		
Power Supply:	DC 3.7V by Battery		
Battery parameter:	DC3.7V/1150 mAh		
Adapter Input:	AC100-240V 50/60Hz, 0.2A		
Adapter Output:	DC5V, 1A		
Dual Card: WCDMA / GSM Card Slot GSM Card Slot			
GPRS Class	12		
Extreme Vol. Limits:	DC3.4 V to 4.2 V (Normal: DC3.7 V)		
Extreme Temp. Tolerance -10℃ to +50℃			
*** Note: The High Voltage DC4.2V and Low Voltage DC3.4V were declared by manufacturer, The EUT couldn't be operating normally with higher or lower voltage. Other functions have been performed according to verification procedure except for Bluetooth and			

MS function. Card 1 can't transmit with Card 2 simultaneously.

*** Note: The maximum power levels are GSM for MCS-4: GMSK link, EDGE for MCS-9:8PSK link, and RMC 12.2kbps mode for WCDMA band II, WCDMA band V, only these modes were used for all tests.

We found out the test mode with the highest power level after we analyze all the data rates. So we chose worst case as a representative.

Page 7 of 98

WCDMA Card Slot:

	Maximum ERP/EIRP	Max. Conducted Power	Max. Average
	(dBm)	(dBm)	Burst Power (dBm)
GSM 850	30.68	32.48	31.83
PCS 1900	27.67	29.43	28.82
UMTS BAND II	21.96	23.17	22.71
UMTS BAND V	21.76	23.36	22.91

GSM Card Slot:

	Maximum ERP/EIRP		Max. Average	
	(dBm)	(dBm)	Burst Power (dBm)	
GSM 850	30.22	32.12	31.49	
PCS 1900	27.31	29.08	28.46	

Page 8 of 98

2.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2ABGBE40**, filing to comply with the FCC Part 22H&24E requirements.

2.3 TEST METHODOLOGY

The radiated emission testing was performed according to the procedures of ANSI C 63.4: 2003; TIA/EIA 603 and FCC CFR 47 Rules of 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057.

KDB 971168 D01 Power Meas License Digital Systems v02r01

2.4 TEST FACILITY

The test site used to collect the radiated data is located at:

Attestation of Global Compliance (Shenzhen) Co., Ltd.

2/F., Building 2, No.1-No.4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

FCC register No.: 259865

2.5 MEASUREMENT INSTRUMENTS

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	Calibration Date	Calibration Due.
SPECTRUM ANALYZER	AGILENT	E4440A	US41421290	July 16, 2014	July 15, 2015
TEST RECEIVER	R&S	ESCI	100694	July 16, 2014	July 15, 2015
COMMUNICATION TESTER	AGILENT	8960	122500087	Oct.21, 2013	Oct.20, 2014
COMMUNICATION TESTER	R&S	CMU200	122500166	Feb.27,2014	Feb.26,2015
SIGNAL GENERATOR	AGILENT	E4438C	MY44260051	Feb.23,2014	Feb. 22,2015
LISN	R&S	ESH3-Z5	8389791009	July 16, 2014	July 15, 2015
CLIMATE CHAMBER	ALBATROSS			July 16, 2014	July 15, 2015
Loop Antenna	A.H.	SAS-562B	SEL0097	July 16, 2014	July 15, 2015
Bilogical Antenna	A.H. Systems Inc.	SAS-521-4	26	June 6, 2014	June 5, 2015
Substitution Antenna	EMCO	3142C		June 6, 2014	June 5, 2015
Substitution Antenna	EM	EM-AH-10180	69	Apr.19, 2014	Apr.18, 2015
Horn Antenna	EM	EM-AH-10180	67	Apr.19, 2014	Apr.18, 2015
Horn Antenna	A.H. Systems Inc.	SAS-574		June 6, 2014	June 5, 2015

Page 9 of 98

2.6 SPECIAL ACCESSORIES

The battery and the charger, earphone supplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.

2.7 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

Page 10 of 98

3. SYSTEM TEST CONFIGURATION

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

3.3 GENERAL TECHNICAL REQUIREMENTS

Item Number	Item	FCC Rules		
4	Output Dower	Conducted output power	2.1046/22.913(a) (2) / 24.232	
'	Output Power	Radiated output power	(c)	
2	Peak-to-Average Ratio	Peak-to-Average Ratio	24.232(d)	
		Conducted		
3	Spurious Emission	spurious emission	2.1051 / 22.917 / 24.238	
		Radiated spurious emission		
4	Mains Conducted Emi	ssion	15.107 / 15.207	
5	Frequency Stability		2.1055/22.355 /24.235	
6	Occupied Bandwidth		2.1049 (h)(i)	
7	Emission Bandwidth		22.917(a)/24.238(a)	
8	Band Edge		22.917(a)/24.238(a)	

Page 11 of 98

3.4 CONFIGURATION OF EUT SYSTEM

Fig. 2-1 Configuration of EUT System




Table 2-1 Equipment Used in EUT System

Item	Equipment	Model No.	ID or Specification	Note
1	Mobile Phone	Hero E40	FCC ID: 2ABGBE40	EUT
2	Adapter	Hero E40	DC5.0V / 1A	Accessory
3	Battery	Hero E40	DC3.7V / 1150 mAh	Accessory
4	Earphone	Hero E40	N/A	Accessory
5	USB Cable	Hero E40	N/A	Accessory

^{***}Note: All the accessories have been used during the test. The following "EUT" in setup diagram means EUT system.

Page 12 of 98

4. SUMMARY OF TEST RESULTS

Item Number	Item Description		FCC Rules	Result		
1	Output Power	Conducted Output Power	2.1046/22.913(a) (2) /	Pass		
	Radiated	Radiated Output Power	24.232 (c)			
2	Peak-to-Average Ratio	Peak-to-Average Ratio	24.232(d)	Pass		
3	Spurious Emission	Conducted Spurious Emission	2.1051 / 22.917 / 24.238	Pass		
3	Opunous Emission	Radiated Spurious Emission				
4	Mains Conducted En	nission	15.107 / 15.207	Pass		
5	Frequency Stability		2.1055/22.355 /24.235	Pass		
6	Occupied Bandwidth		2.1049 (h)(i)	Pass		
7	Emission Bandwidth		22.917(a)/24.238(a)	Pass		
8	Band Edge		Band Edge		22.917(a)/24.238(a)	Pass

5. DESCRIPTION OF TEST MODES

During the testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication Tester (CMU 200) to ensure max power transmission and proper modulation. Three channels (The top channel, the middle channel and the bottom channel) were chosen for testing on both GSM and PCS frequency band.

***Note: GSM/GPRS/EGPRS 850, GSM/GPRS/EGPRS 1900, WCDMA/HSPA band II, WCDMA/HSPA band V, mode have been tested during the test.

The worst condition was recorded in the test report if no other modes test data.

Page 13 of 98

6. OUTPUT POWER

6.1 Conducted Output Power

6.1.1 MEASUREMENT METHOD

The transmitter output port was connected to base station.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Measure the maximum burst average power and average power for other modulation signal.

The EUT was setup for the max output power with pseudo random data modulation. Power was measured with Spectrum Analyzer. The measurements were performed on all modes (GSM/GPRS/EGPRS 850, GSM/GPRS/EGPRS1900, WCDMA/HSPA band II, WCDMA/HSPA band V) at 3 typical channels (the Top Channel, the Middle Channel and the Bottom Channel) for each band.

6.1.2 MEASUREMENT RESULT

	Conducted Output Power Limits for GSM850/EDGE band					
Mode	Nominal Peak Power	Tolerance(dB)				
GSM	33 dBm (2W)	- 2				
EDGE	27 dBm(0.5W)	±2				
	Conducted Output Power Limits for PCS1900/EDGE band					
Mode	Nominal Peak Power	Tolerance(dB)				
GSM	30 dBm (1W)	- 2				
EDGE	26 dBm (0.4W)	±2				
	Conducted Output Power Limits for	UMTS band II				
Mode	Nominal Peak Power	Tolerance(dB)				
WCDMA	24 dBm (0.25W)	- 2				
	Conducted Output Power Limits for UMTS band V					
Mode	Nominal Peak Power	Tolerance(dB)				
WCDMA	24 dBm (0.25W)	- 2				

Page 14 of 98

GSM 850:

Mada	Frequency	Reference	Peak	Tolerance	Avg.Burst	Duty cycle	Frame
Mode	(MHz)	Power	Power		Power	Factor(dB)	Power(dBm)
	824.2	33	32.33	-0.67	31.75	-9	22.75
GSM850	836.6	33	32.41	-0.59	31.77	-9	22.77
	848.8	33	32.48	-0.52	31.83	-9	22.83
CDDC0E0	824.2	33	32.32	-0.68	31.68	-9	22.68
GPRS850	836.6	33	32.37	-0.63	31.72	-9	22.72
(1 Slot)	848.8	33	32.42	-0.58	31.75	-9	22.75
CDDCoco	824.2	30	29.31	-0.69	28.67	-6	22.67
GPRS850	836.6	30	29.36	-0.64	28.72	-6	22.72
(2 Slot)	848.8	30	29.38	-0.62	28.75	-6	22.75
CDDC0E0	824.2	28.23	27.36	-0.87	26.56	-4.26	22.3
GPRS850	836.6	28.23	27.42	-0.81	26.59	-4.26	22.33
(3 Slot)	848.8	28.23	27.47	-0.76	26.64	-4.26	22.38
CDDC0E0	824.2	27	26.32	-0.68	25.49	-3	22.49
GPRS850	836.6	27	26.35	-0.65	25.52	-3	22.52
(4 Slot)	848.8	27	26.39	-0.61	25.57	-3	22.57

Mode	Channel	Frequency	Peak Power	Avg.Burst Power
Wiode		(MHz)	(dBm)	(dBm)
EDGE	128	824.2	26.72	26.28
	189	836.6	26.74	26.33
(1 Slot)	251	848.8	26.79	26.36
EDGE	128	824.2	25.33	24.63
(2 Slot)	189	836.6	25.47	24.65
(2 3101)	251	848.8	25.49	24.71
EDGE	128	824.2	23.51	22.67
(3 Slot)	189	836.6	23.56	22.72
(3 3101)	251	848.8	23.59	22.74
EDGE	128	824.2	22.45	21.77
	189	836.6	22.49	21.78
(4 Slot)	251	848.8	22.53	21.82

Report No.: AGC01321140703FE02 Page 15 of 98

PCS 1900:

Mode	Frequency (MHz)	Reference Power	Peak Power	Tolerance	Avg.Burst Power	Duty cycle Factor(dB)	Frame Power(dBm)
	1850.2	30	29.37	-0.63	28.77	-9	19.77
GSM1900	1880	30	29.39	-0.61	28.8	-9	19.8
	1909.8	30	29.43	-0.57	28.82	-9	19.82
CDDC4000	1850.2	30	29.28	-0.72	28.59	-9	19.59
GPRS1900	1880	30	29.37	-0.63	28.66	-9	19.66
(1 Slot)	1909.8	30	29.41	-0.59	28.68	-9	19.68
CDDC1000	1850.2	27	26.39	-0.61	25.62	-6	19.62
GPRS1900	1880	27	26.43	-0.57	25.67	-6	19.67
(2 Slot)	1909.8	27	26.38	-0.62	25.69	-6	19.69
CDDC1000	1850.2	25.23	24.38	-0.85	23.72	-4.26	19.46
GPRS1900	1880	25.23	24.44	-0.79	23.76	-4.26	19.5
(3 Slot)	1909.8	25.23	24.47	-0.76	23.83	-4.26	19.57
00004000	1850.2	24	23.41	-0.59	22.69	-3	19.69
GPRS1900	1880	24	23.45	-0.55	22.74	-3	19.74
(4 Slot)	1909.8	24	23.49	-0.51	22.78	-3	19.78

Mode	Channel	Frequency	Peak Power	Avg.Burst Power
Wiode		(MHz)	(dBm)	(dBm)
EDGE	512	1850.2	25.52	25.13
(1 Slot)	661	1880	25.59	25.22
(1 3101)	810	1909.8	25.64	25.25
EDGE	512	1850.2	24.32	23.76
(2 Slot)	661	1880	24.41	23.82
(2 3101)	810	1909.8	24.49	23.86
EDGE	512	1850.2	22.33	22.08
	661	1880	22.45	22.12
(3 Slot)	810	1909.8	22.52	22.17
EDCE	512	1850.2	21.36	20.82
EDGE	661	1880	21.47	20.88
(4 Slot)	810	1909.8	21.56	20.92

Report No.: AGC01321140703FE02 Page 16 of 98

UMTS BAND II

Mode	Frequency (MHz)	Reference power	Peak Power	Tolerance	Avg.Burst Power
WCDMA 1900 - RMC -	1852.4	24	23.11	-0.89	22.62
	1880	24	23.13	-0.87	22.68
	1907.6	24	23.17	-0.83	22.71
WCDMA 4000	1852.4	24	22.65	-1.35	22.27
WCDMA 1900 - AMR -	1880	24	22.69	-1.31	22.28
AIVIR	1907.6	24	22.78	-1.22	22.31
LICDDA	1852.4	24	22.52	-1.48	22.14
HSDPA - Subtest 1 -	1880	24	22.55	-1.45	22.17
Sublest 1	1907.6	24	22.58	-1.42	22.23
HSDPA	1852.4	24	22.61	-1.39	22.16
Subtest 2	1880	24	22.57	-1.43	22.18
Sublest 2	1907.6	24	22.63	-1.37	22.22
LICDDA	1852.4	24	22.57	-1.43	22.21
HSDPA	1880	24	22.52	-1.48	22.24
Subtest 3	1907.6	24	22.63	-1.37	22.27
HSDPA	1852.4	24	22.53	-1.47	22.16
Subtest 4	1880	24	22.56	-1.44	22.18
Sublest 4	1907.6	24	22.65	-1.35	22.22
HSUPA	1852.4	24	22.52	-1.48	22.13
Subtest 1	1880	24	22.57	-1.43	22.15
Sublest 1	1907.6	24	22.62	-1.38	22.18
HSUPA	1852.4	24	22.44	-1.56	22.12
Subtest 2	1880	24	22.47	-1.53	22.15
Sublest 2	1907.6	24	22.53	-1.47	22.16
HSUPA	1852.4	24	22.52	-1.48	22.08
Subtest 3	1880	24	22.56	-1.44	22.11
Sublest 3	1907.6	24	22.59	-1.41	22.15
HSUPA	1852.4	24	22.38	-1.62	22.02
Subtest 4	1880	24	22.42	-1.58	22.05
Juniesi 4	1907.6	24	22.49	-1.51	22.09
HSUPA	1852.4	24	22.52	-1.48	22.11
Subtest 5	1880	24	22.56	-1.44	22.14
Sublest 5	1907.6	24	22.63	-1.37	22.19

Report No.: AGC01321140703FE02 Page 17 of 98

UMTS BAND V

Mode	Frequency (MHz)	Reference power	Peak Power	Tolerance	Avg.Burst Power
	826.4	24	23.31	-0.69	22.84
WCDMA 850 -	836.6	24	23.36	-0.64	22.91
RMC	846.6	24	23.35	-0.65	22.85
14/00144 050	826.4	24	22.52	-1.48	22.18
WCDMA 850	836.6	24	22.58	-1.42	22.24
AMR -	846.6	24	22.48	-1.52	22.17
LICDDA	826.4	24	22.43	-1.57	22.11
HSDPA	836.6	24	22.47	-1.53	22.14
Subtest 1	846.6	24	22.41	-1.59	22.09
LICDDA	826.4	24	22.44	-1.56	22.15
HSDPA	836.6	24	22.48	-1.52	22.16
Subtest 2	846.6	24	22.35	-1.65	22.11
LICODO	826.4	24	22.51	-1.49	22.13
HSDPA Subtest 3	836.6	24	22.48	-1.52	22.17
	846.6	24	22.45	-1.55	22.12
LICDDA	826.4	24	22.67	-1.33	22.16
HSDPA	836.6	24	22.61	-1.39	22.15
Subtest 4	846.6	24	22.56	-1.44	22.1
LICLIDA	826.4	24	22.51	-1.49	22.17
HSUPA - Subtest 1 -	836.6	24	22.47	-1.53	22.13
Sublest i	846.6	24	22.45	-1.55	22.15
LICLIDA	826.4	24	22.52	-1.48	22.12
HSUPA - Subtest 2 -	836.6	24	22.47	-1.53	22.17
Sublest 2	846.6	24	22.43	-1.57	22.14
LICLIDA	826.4	24	22.44	-1.56	22.11
HSUPA	836.6	24	22.45	-1.55	22.16
Subtest 3	846.6	24	22.41	-1.59	22.09
HOUDA	826.4	24	22.42	-1.58	22.08
HSUPA	836.6	24	22.46	-1.54	22.14
Subtest 4	846.6	24	22.37	-1.63	22.07
HOUDA	826.4	24	22.38	-1.62	22.06
HSUPA	836.6	24	22.46	-1.54	22.13
Subtest 5	846.6	24	22.41	-1.59	22.08

Page 18 of 98

According to 3GPP 25.101 sub-clause 6.2.2 , the maximum output power is allowed to be reduced by following the table.

Table 6.1aA: UE maximum output power with HS-DPCCH and E-DCH

UE Transmit Channel Configuration	CM(db)	MPR(db)	
For all combinations of ,DPDCH,DPCCH	0≤ CM≤3.5	MAY/CM 1 O	
HS-DPDCH,E-DPDCH and E-DPCCH	05 CIVI23.5	MAX(CM-1,0)	

Note: CM=1 for $~\beta$ c/ β d=12/15, $~\beta$ hs/ β c=24/15.For all other combinations of DPDCH, DPCCH,

HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Page 19 of 98

The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to average ratios (PAR) of the HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (a function of the combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH).

When E-DPDCH channels are present the beta gains on those channels are reduced firsts to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.

The SW currently recalculates the cubic metric every time the beta gains on the E-DPDCH are reduced. The cubic metric will likely get lower each time this is done. However, there is no reported reduction of maximum output power in the HSUPA mode since the device also provides a compensate for the power back-off by increasing the gain of TX. AGC in the transceiver (PA) device.

The end effect is that the DUT output power is identical to the case where there is no MPR in the device.

Page 20 of 98

6.2 RADIATED OUTPUT POWER

6.2.1 MEASUREMENT METHOD

The measurements procedures specified in TIA-603C-2004 were applied.

- In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference centre of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (Pin) is applied to the input of the dipole, and the power received (Pr) at the chamber's probe antenna is recorded.
- 2 The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established as ARpl=Pin + 2.15 Pr. The ARpl is the attenuation of "reference path loss", and including the gain of receive antenna, the cable loss and the air loss. The measurement results are obtained as described below: Power=PMea+ARpl
- 3 The EUT is substituted for the dipole at the reference centre of the chamber and a scan is performed to obtain the radiation pattern.
- 4 From the radiation pattern, the co-ordinates where the maximum antenna gain occurs are identified.
- 5 The EUT is then put into continuously transmitting mode at its maximum power level.
- Power mode measurements are performed with the receiving antenna placed at the coordinates determined in Step 3 to determine the output power as defined in Rule 24.232 (b) and (c). The "reference path loss" from Step1 is added to this result.
- 7 This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.15 dBi) and known input power (Pin).
- 8 ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP -2.15dBi...

6.2.2 PROVISIONS APPLICABLE

This is the test for the maximum radiated power from the EUT. Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage." Rule Part 22.913(a) specifies "Maximum ERP. The effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 Watts. The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."

Mode	Nominal Peak Power
GSM 850/EDGE	<=38.45 dBm (7W)
PCS 1900/EDGE	<=33 dBm (2W)
UMTS BAND II	<=33 dBm (2W)
UMTS BANDV	<=38.45 dBm (7W)

Page 21 of 98

6.2.3 MEASUREMENT RESULT

Radiated Power (ERP) for GSM 850/EDGE 8						
		Res				
Mode	Frequency	Max. Peak ERP	Polarization	Conclusion		
		(dBm)	Of Max. ERP			
	824.2	30.56	Horizontal	Pass		
	836.6	30.65	Horizontal	Pass		
CCMOEO	848.8	30.68	Horizontal	Pass		
GSM850	824.2	28.86	Vertical	Pass		
	836.6	28.78	Vertical	Pass		
	848.8	29.06	Vertical	Pass		
	824.2	25.48	Horizontal	Pass		
	836.6	25.54	Horizontal	Pass		
EDOE -	848.8	25.66	Horizontal	Pass		
EDGE -	824.2	25.51	Vertical	Pass		
	836.6	25.56	Vertical	Pass		
	848.8	25.61	Vertical	Pass		

Radiated Power (E.I.R.P) for PCS 1900/EDGE 8						
	Result					
Mode	Frequency	Max. Peak	Polarization	Conclusion		
		E.I.R.P.(dBm)	Of Max. E.I.R.P.			
	1850.2	27.58	Horizontal	Pass		
	1880.0	27.64	Horizontal	Pass		
GSM 1900	1909.8	27.67	Horizontal	Pass		
30W 1300 =	1850.2	26.48	Vertical	Pass		
	1880.0	26.51	Vertical	Pass		
	1909.8	26.56	Vertical	Pass		
	1850.2	24.36	Horizontal	Pass		
	1880.0	24.45	Horizontal	Pass		
EDCE	1909.8	24.49	Horizontal	Pass		
EDGE	1850.2	23.39	Vertical	Pass		
	1880.0	23.42	Vertical	Pass		
	1909.8	23.47	Vertical	Pass		

Report No.: AGC01321140703FE02 Page 22 of 98

Radiated Power (E.I.R.P) for UMTS band II						
		Res	Result			
Mode	Frequency	Max. Peak E.I.R.P	Polarization			
		(dBm)	Of Max. E.I.R.P			
	1852.4	21.84	Horizontal	Pass		
	1880	21.88	Horizontal	Pass		
RMC	1907.6	21.96	Horizontal	Pass		
12.2kbps	1852.4	21.55	Vertical	Pass		
	1880	21.58	Vertical	Pass		
	1907.6	21.61	Vertical	Pass		

Radiated Power (ERP) for UMTS band V						
Mode	Frequency	Max. Peak ERP	Polarization	Conclusion		
		(dBm)	Of Max. E.I.R.P.			
	826.4	21.67	Horizontal	Pass		
	836.6	21.69	Horizontal	Pass		
RMC	846.6	21.76	Horizontal	Pass		
12.2kbps	826.4	20.98	Vertical	Pass		
	836.6	20.96	Vertical	Pass		
	846.6	21.12	Vertical	Pass		

Note: Above is worst mode data.

Page 23 of 98

6.3. Peak-to-Average Ratio

6.3.1 MEASUREMENT METHOD

Use one of the procedures presented in 4.1 to measure the total peak power and record as PPk. Use one of the applicable procedures presented 4.2 to measure the total average power and record as PAvg. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

PAPR(dB) = PPk(dBm) - PAvg(dBm).

6.3.2 PROVISIONS APPLICABLE

This is the test for the Peak-to-Average Ratio from the EUT.

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

6.3.3 MEASUREMENT RESULT

Oloio IIII./ COT/LINE/TT T/LOOL!					
Modes	GSM850(GSM)				
Channel	128	190	251		
	(Low)	(Mid)	(High)		
Frequency	924.2	926.6 949.9			
(MHz)	824.2	836.6	848.8		
Peak-To-Average Ratio (dB)/GSM	0.58	0.64	0.65		
Peak-To-Average Ratio (dB)/EDGE	0.44	0.41	0.43		

Modes	PCS 1900 (GSM)			
Channel	512	661	810	
	(Low)	(Mid)	(High)	
Frequency (MHz)	1850.2	1880	1909.8	
Peak-To-Average Ratio (dB)/GSM	0.6	0.59	0.61	
Peak-To-Average Ratio (dB)/EDGE	0.39	0.37	0.39	

Page 24 of 98

Modes	UMTS BAND II		
Channel	9662	9800	9938
	(Low)	(Mid)	(High)
Frequency (MHz)	1852.4	1880	1907.6
Peak-To-Average Ratio (dB)	0.49	0.45	0.46

Modes	UMTS BAND V		
Channel	4357	4408	4458
	(Low)	(Mid)	(High)
Frequency (MHz)	826.4	836.6	846.6
Peak-To-Average Ratio (dB)	0.47	0.45	0.5

Page 25 of 98

7. SPURIOUS EMISSION

7.1 CONDUCTED SPURIOUS EMISSION

7.1.1 MEASUREMENT METHOD

The following steps outline the procedure used to measure the conducted emissions from the EUT.

- 1, Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of PCS1900 band, this equates to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz. For GSM 850, data taken from 30 MHz to 9 GHz.
- 2, Determine EUT transmit frequencies: the following typical channels were chosen to conducted emissions testing.

Typical Channels for testing of GSM 850/EDGE 8				
Channel	Frequency (MHz)			
128	824.2			
190	836.6			
251	848.8			

Typical Channels for testing of PCS 1900/EDGE 8					
Channel	Frequency (MHz)				
512	1850.2				
661	1880.0				
810	1909.8				

Report No.: AGC01321140703FE02 Page 26 of 98

Typical Channels for testing of UMTS band II				
Channel	Frequency (MHz)			
9662	1852.4			
9800	1880			
9938	1907.6			

Typical Channels for testing of UMTS band V					
Channel	Frequency (MHz)				
4357	826.4				
4408	836.6				
4458	846.6				

Page 27 of 98

7.1.2 PROVISIONS APPLICABLE

On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least 43+10Log(P) dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

7.1.3 MEASUREMENT RESULT

PLEASE REFER TO: APPENDIX I TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION

Note: 1. Below 30MHZ no Spurious found and The GSM modes is the worst condition.

2. As no emission found in standby or receive mode, no recording in this report.

Page 28 of 98


7.2 Radiated Spurious Emission

7.2.1 MEASUREMENT METHOD

The measurements procedures specified in TIA-603C-2004 were used for testing. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment. The resolution bandwidth is set 1MHz as outlined in Part 24.238. The measurements were performed on all modes(GPRS/EGPRS 850, GPRS/EGPRS 1900, HSPA band II, HSPA band V) at 3 typical channels (the Top Channel, the Middle Channel and the Bottom Channel) for each band.


The procedure of radiated spurious emissions is as follows:

a) Pre-calibration With pre-calibration method, the Radiated Spurious Emissions(RSE) is calculated as, RSE=Rx(dBuV)+CL(dB)+SA(dB)+Gain(dBi)-107(dBuV to dBm) The SA is calibrated using following setup.

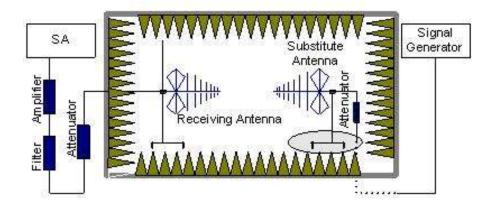

b) EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the test item for emission measurements. The height of receiving antenna is 0.8m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the test item and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1MHz bandwidth.

Report No.: AGC01321140703FE02 Page 29 of 98

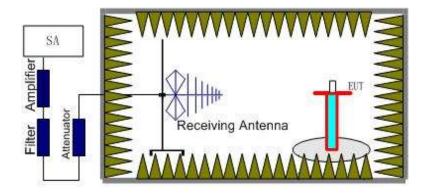

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the PCS 1900 band (1850.2 MHz, 1880 MHz and 1909.8 MHz) ,GSM850 band (824.2MHz, 836.6MHz, 848.8MHz), UMTS band II(1852.4MHz, 1880MHz, 1907.6MHz), UMTS band V(826.4MHz, 836.6MHz, 846.6MHz) . It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of any band into any of the other blocks.

The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss and the air loss. The measurement results are obtained as described below: Power=P_{Mea}+A_{Rpl}

7.2.2 PROVISIONS APPLICABLE

(a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least 43+10Log(P) dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least 43 + 10 log (P) dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Note: only result the worst condition of each test mode:

Page 30 of 98

7.2.3 MEASUREMENT RESULT

GSM 850:

The Worst Test Results for Channel 251/848.8 MHz					
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit(dBm)	Polarity
1685.23	-43.28	-5.01	-48.29	-13.00	Horizontal
2456.12	-46.39	-2.18	-48.57	-13.00	Vertical
3645.78	-48.45	3.46	-44.99	-13.00	Vertical
4536.58	-45.61	2.79	-42.82	-13.00	Horizontal

GSM 850(EDGE 8):

The Worst Test Results for Channel 251/848.8 MHz					
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit(dBm)	Polarity
1696.28	-47.71	-2.26	-49.97	-13.00	Horizontal
2162.19	-46.65	-3.12	-49.77	-13.00	Vertical
3645.78	-45.41	-1.74	-47.15	-13.00	Vertical
9257.65	-42.63	8.46	-34.17	-13.00	Horizontal

PCS 1900:

<u> </u>					
The Worst Test Results for Channel 810/1909.8MHz					
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit (dBm)	Polarity
1429.36	-46.28	-3.22	-49.50	-13.00	Vertical
2563.47	-47.41	-0.24	-47.65	-13.00	Vertical
3645.26	-47.47	3.98	-43.49	-13.00	Horizontal
4563.56	-46.17	11.56	-34.61	-13.00	Vertical
5689.25	-45.68	17.89	-27.79	-13.00	Horizontal

PCS 1900(EDGE 8):

<u> </u>					,				
The Worst Test Results for Channel 810/1909.8MHz									
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit (dBm)	Polarity				
1430.15	-53.63	2.7	-50.93	-13.00	Vertical				
9367.91	-53.39	11.6	-41.79	-13.00	Vertical				
13356.68	-53.41	14.89	-38.52	-13.00	Horizontal				
15249.71	-54.12	13.87	-40.25	-13.00	Vertical				
17913.63	-57.82	19.76	-38.06	-13.00	Horizontal				

Page 31 of 98

UMTS band II:

The Worst Test Results for Channel 9938/1907.6MHz								
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit (dBm)	Polarity			
2000.00	-38.72	-2.25	-40.97	-13.00	Vertical			
9548.50	-41.39	-3.03	-44.42	-13.00	Horizontal			
13367.40	-44.19	-1.87	-46.06	-13.00	Horizontal			
15277.80	-39.61	8.52	-31.09	-13.00	Vertical			
17931.60	-55.34	18.7	-36.64	-13.00	Horizontal			

UMTS band V:

The Worst Test Results for Channel 4458/846.6MHz									
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit (dBm)	Polarity				
1598.26	-39.71	-2.26	-41.97	-13.00	Vertical				
2365.78	-38.61	-3.12	-41.73	-13.00	Horizontal				
4967.65	-41.59	-1.74	-43.33	-13.00	Horizontal				
6457.86	-38.27	8.74	-29.53	-13.00	Vertical				
7896.56	-41.46	17.89	-23.57	-13.00	Horizontal				

Note: ARpl= Factor=Antenna Factor+ Cable loss-Amplifier gain.

The "Factor" value can be calculated automatically by software of measurement system.

Below 30MHZ no Spurious found and The GSM modes is the worst condition.

Page 32 of 98

8. MAINS CONDUCTED EMISSION

8.1 MEASUREMENT METHOD

The measurement procedure specified in ANSI C63.4-2003 was used for testing. Conducted Emission was measured with travel charger.

8.2 PROVISIONS APPLICABLE


Frequency of Emission (MHz)	Conducted Limit(dBuV)					
, ,	Quasi-Peak	Average				
0.15 – 0.5	66 to 56 *	56 to 46 *				
0.5 – 5	56	46				
5 – 30	60	50				
*Decreases with the logarithm of the frequency.						
*The lower limit shall apply at the transition frequency.						

Note: The GSM850 mode is the worst condition and the test result as following:

Page 33 of 98

8.3 MEASUREMENT RESULT

LINE CONDUCTED EMISSION - L

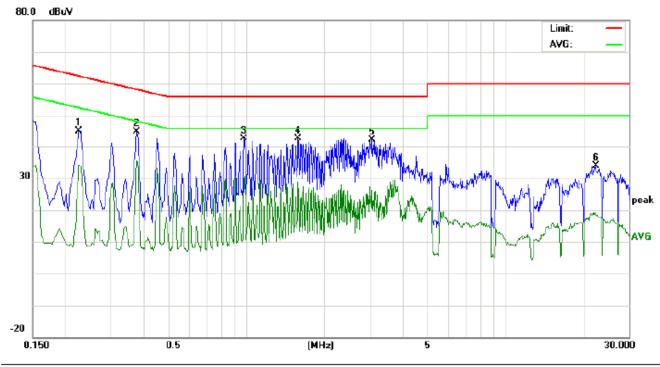


Site: Conduction Phase: L1 Temperature: 26
Limit: FCC Class B Conduction(QP) Power: AC 120V/60Hz Humidity: 60 %

EUT: Mobile Phone M/N: Hero E40 Mode: Call Note:

No.	Freq. (dBuV)			Correct Factor	Measurement (dBuV)		Limit Margin (dBuV) (dB)			P/F	Comment			
	(MHz)	Peak	QP	AVG	dB	Peak	Q.	AVG	QP	AVG	QP	AVG		
1	0.2260	34.98		23.91	10.24	45.22		34.15	62.59	52.59	-17.37	-18.44	Р	
2	0.3780	34.52		25.43	10.32	44.84		35.75	58.32	48.32	-13.48	-12.57	Р	
3	0.9820	32.15		19.14	10.38	42.53		29.52	56.00	46.00	-13.47	-16.48	Р	
4	1.5900	32.22		18.53	10.35	42.57		28.88	56.00	46.00	-13.43	-17.12	Р	
5	3.0620	31.70		15.61	10.55	42.25		26.16	56.00	46.00	-13.75	-19.84	Р	
6	22.3100	23.80		8.28	10.12	33.92		18.40	60.00	50.00	-26.08	-31.60	Р	

Page 34 of 98

LINE CONDUCTED EMISSION - N

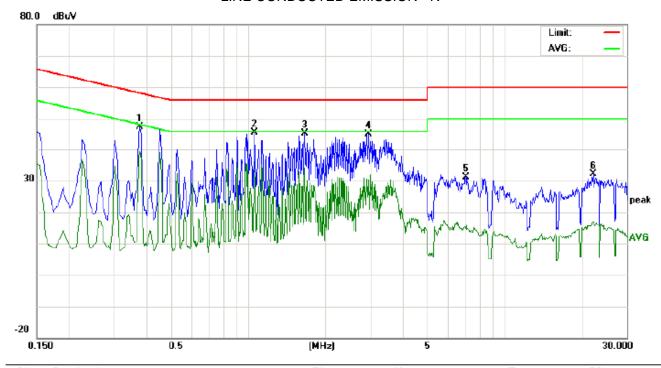

Site: Conduction Phase: N Temperature: 26
Limit: FCC Class B Conduction(QP) Power: AC 120V/60Hz Humidity: 60 %

EUT: Mobile Phone M/N: Hero E40 Mode: Call Note:

No.	Freq.	Rea	ding_L (dBuV)		Correct Factor	Measurement (dBuV)		Limit (dBuV)		Margin (dB)		P/F	Comment	
	(MHz)	Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.3780	37.00		29.10	10.32	47.32		39.42	58.32	48.32	-11.00	-8.90	Р	
2	1.0620	35.19		25.82	10.37	45.56		36.19	56.00	46.00	-10.44	-9.81	Р	
3	1.6660	35.06		23.69	10.33	45.39		34.02	56.00	46.00	-10.61	-11.98	Р	
4	2.9500	34.58		19.82	10.54	45.12		30.36	56.00	46.00	-10.88	-15.64	Р	
5	7.0900	20.81		4.57	10.35	31.16		14.92	60.00	50.00	-28.84	-35.08	Р	
6	22.2260	22.09		6.79	10.12	32.21		16.91	60.00	50.00	-27.79	-33.09	Р	

Note: The GSM850 mode is the worst condition.

Page 35 of 98

9. FREQUENCY STABILITY

9.1 MEASUREMENT METHOD

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

- 1 , Measure the carrier frequency at room temperature.
- 2 , Subject the EUT to overnight soak at -10 $^{\circ}$ C.
- 3 , With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on channel 661 for PCS 1900 band , channel 190 for GSM 850 band, channel 9400 for UMTS band II and channel 4175 for UMTS band V measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 4 , Repeat the above measurements at 10° C increments from -10°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 5 , Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
- 6 , Subject the EUT to overnight soak at +50°C.
- 7 , With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 8 , Repeat the above measurements at 10° C increments from +50°C to -10°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 9 , At all temperature levels hold the temperature to +/- 0.5 ℃ during the measurement procedure.

9.2 PROVISIONS APPLICABLE

9.2.1 For Hand carried battery powered equipment

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 6.3VDC and 8.5VDC, with a nominal voltage of 7.4VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.

Page 36 of 98

9.2.2 For equipment powered by primary supply voltage

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment, the normal environment temperature is 20°C.

9.3 MEASUREMENT RESULT (WORST)

Frequency Error Against Voltage for GSM850/EDGE 8 band									
	G	SM	EDGE 8						
Voltage(V)	Frequency error(Hz)	Frequency error(Hz) Frequency error(ppm) Frequence		Frequency error(ppm)					
3.4	18	0.022	27	0.032					
3.7	24	0.029	17	0.020					
4.2	22	0.026	23	0.028					

Frequency Error Against Temperature for GSM850/EDGE 8 band										
	GS	М	EDG	E 8						
temperature(°C)	Frequency error(Hz)	Frequency error(ppm)	Frequency error(Hz)	Frequency error(ppm)						
-10	24	0.029	25	0.030						
0	21	0.025	23	0.028						
10	22	0.026	22	0.026						
20	26	0.031	23	0.028						
30	23	0.028	24	0.029						
40	27	0.032	22	0.026						
50	21	0.025	22	0.026						

Note: The EUT doesn't work below -10℃

Report No.: AGC01321140703FE02 Page 37 of 98

Frequency Error Against Voltage for PCS1900/EDGE 8 band					
	G	SM	EDGE 8		
Voltage(V)	Frequency error(Hz)	Frequency error(ppm)	Frequency error(Hz)	Frequency error(ppm)	
3.4	22	0.012	23	0.012	
3.7	24	0.013	22	0.012	
4.2	27	0.014	25	0.013	

Frequency Error Against Voltage for PCS1900/EDGE 8 band				
	GSM		EDGE 8	
temperature(°C)	Frequency error(Hz)	Frequency error(ppm)	Frequency error(Hz)	Frequency error(ppm)
-10	23	0.012	24	0.013
0	24	0.013	23	0.012
10	22	0.012	25	0.013
20	18	0.010	19	0.010
30	21	0.011	28	0.015
40	27	0.014	27	0.014
50	26	0.014	22	0.012

Note: The EUT doesn't work below -10℃

Frequency Error Against Voltage for UMTS band II				
Voltage(V) Frequency error(Hz) Frequency error(ppm)				
3.4	34	0.018		
3.7	22	0.012		
4.2	28	0.015		

Frequency Error Against Temperature for UMTS band II				
temperature($^{\circ}$) Frequency error(Hz)		Frequency error(ppm)		
-10	33	0.018		
0	35	0.019		
10	37	0.020		
20	32	0.017		
30	31	0.016		
40	36	0.019		
50	31	0.016		

Note: The EUT doesn't work below -10 $^{\circ}\mathrm{C}$

Page 38 of 98

Frequency Error Against Voltage for UMTS band V				
Voltage(V) Frequency error(Hz) Frequency error(ppm)				
6.3	24	0.029		
7.4	23	0.028		
8.5	26	0.031		

Frequency Error Against Temperature for UMTS band V			
temperature(°C)	Frequency error(Hz)	Frequency error(ppm)	
-10	24	0.029	
0	22	0.026	
10	24	0.029	
20	26	0.031	
30	23	0.028	
40	29	0.035	
50	33	0.040	

Note: The EUT doesn't work below -10 $^{\circ}\mathrm{C}$

Page 39 of 98

10. OCCUPIED BANDWIDTH

10.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

10.2 PROVISIONS APPLICABLE

The emission bandwidth is defined as two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power

10.3 MEASUREMENT RESULT

Occupied Bandwidth (99%) for GSM850 band			
	Mode	Frequency(MHz)	Occupied Bandwidth (99%)(kHz)
GSM	Low Channel	824.2	246.01
GSIVI	Middle Channel	836.6	243.16
	High Channel	848.8	248.41
	Low Channel	824.2	241.74
EDGE 8	Middle Channel	836.6	241.07
	High Channel	848.8	246.91

Occupied Bandwidth (99%) for PCS1900 band			
	Mode	Frequency(MHz)	Occupied Bandwidth (99%)(kHz)
GSM	Low Channel	1850.2	243.34
OO!!!	Middle Channel	1880.0	249.11
	High Channel	1909.8	247.11
	Low Channel	1850.2	241.96
EDGE 8	Middle Channel	1880.0	236.27
	High Channel	1909.8	239.31

Page 40 of 98

Occupied Bandwidth (99%) for UMTS band II				
Mode Frequency(MHz) Occupied Bandwidth (99%)(MHz)				
Low Channel	1852.4	4.21		
Middle Channel	1880	4.20		
High Channel	1907.6	4.20		

Occupied Bandwidth (99%) for UMTS band V				
Mode Frequency(MHz) Occupied Bandwidth (99%)(MHz)				
Low Channel	826.4	4.17		
Middle Channel	836.6	4.16		
High Channel	846.6	4.15		

Page 41 of 98

11. EMISSION BANDWIDTH

11.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

11.2 PROVISIONS APPLICABLE

The emission bandwidth is defined as two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power

11.3 MEASUREMENT RESULT

Emission Bandwidth (-26dBc) for GSM850 (EDGE 8) band			
	Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(kHz)
GSM	Low Channel	824.2	308.59
GSIVI	Middle Channel	836.6	309.01
	High Channel	848.8	314.26
	Low Channel	824.2	314.34
EDGE 8	Middle Channel	836.6	312.93
	High Channel	848.8	319.21

Emission Bandwidth (-26dBc) for PCS1900 (EDGE 8) band			
	Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(kHz)
GSM	Low Channel	1850.2	311.80
30	Middle Channel	1880.0	309.00
	High Channel	1909.8	310.66
	Low Channel	1850.2	316.70
EDGE 8	Middle Channel	1880.0	315.21
	High Channel	1909.8	321.52

Page 42 of 98

Emission Bandwidth (-26dBc) for UMTS band II		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)(MHz)
Low Channel	1852.4	5.00
Middle Channel	1880	5.00
High Channel	1907.6	4.93

Emission Bandwidth (-26dBc) for UMTS band V		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)(MHz)
Low Channel	826.4	4.69
Middle Channel	836.6	4.73
High Channel	846.6	4.70

Page 43 of 98

12. BAND EDGE

12.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

12.2 PROVISIONS APPLICABLE

As Specified in FCC rules of 22.917(a) and 24.238(a)

12.3 MEASUREMENT RESULT

Please refers to Appendix III for compliance test plots for band edges


Report No.: AGC01321140703FE02 Page 44 of 98

APPENDIX A TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION


Page 45 of 98

CONDUCTED EMISSION IN GSM850 BAND


Conducted Emission Transmitting Mode CH 128 30MHz - 1GHz

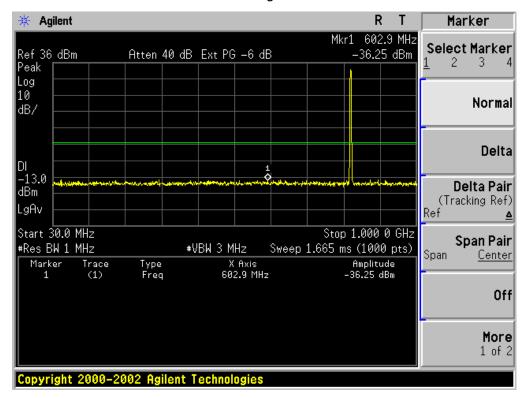


Conducted Emission Transmitting Mode CH 128 1GHz - 9GHz

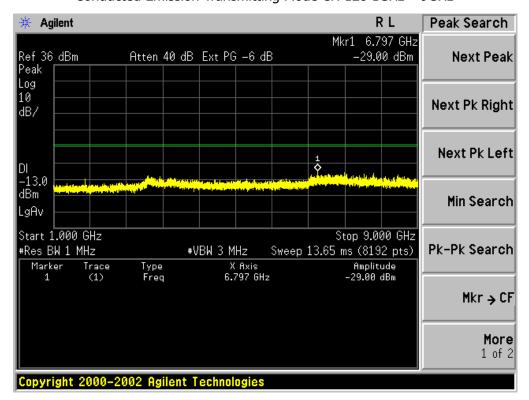


Conducted Emission Transmitting Mode CH 190 30MHz - 1GHz

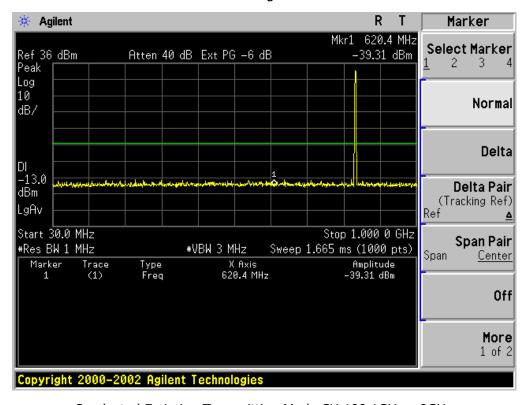


Conducted Emission Transmitting Mode CH 190 1GHz - 9GHz

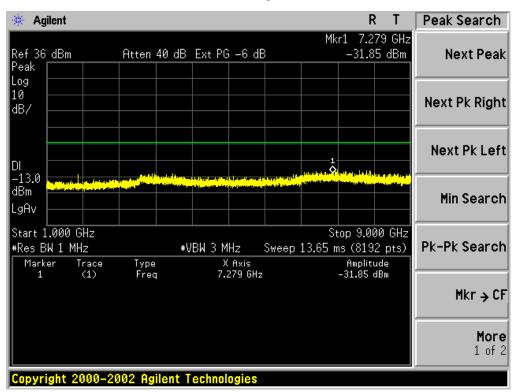

Conducted Emission Transmitting Mode CH 251 30MHz - 1GHz

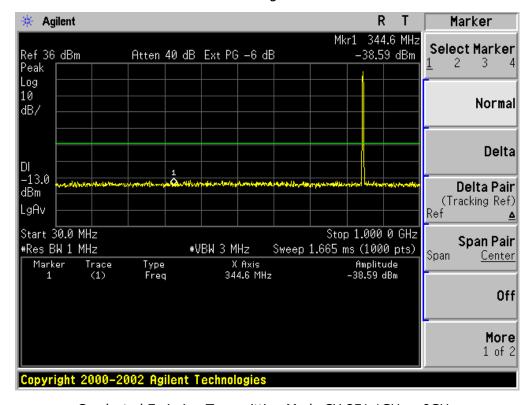


Conducted Emission Transmitting Mode CH 251 1GHz – 9GHz

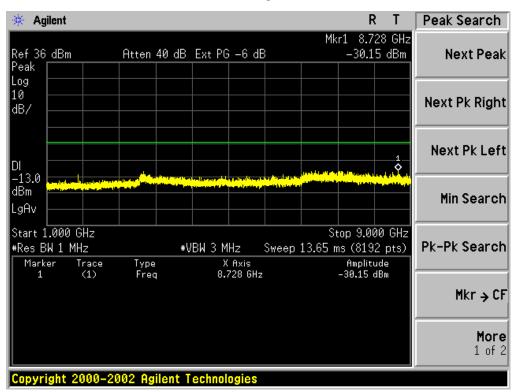


Page 48 of 98

CONDUCTED EMISSION IN GSM850 (EDGE 8) BAND


Conducted Emission Transmitting Mode CH 128 30MHz - 1GHz

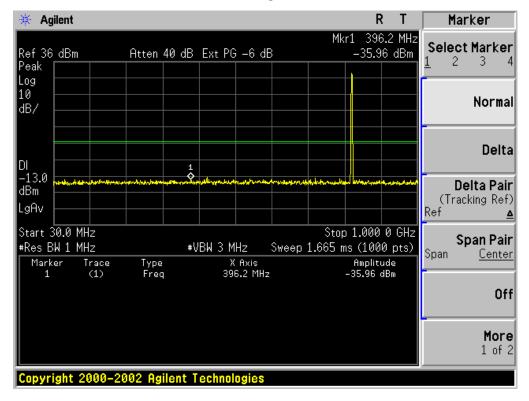


Conducted Emission Transmitting Mode CH 128 1GHz - 9GHz

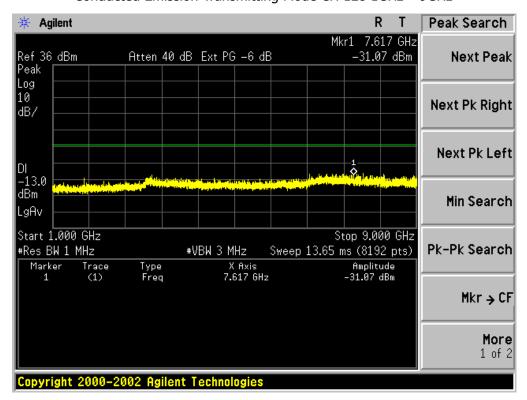


Conducted Emission Transmitting Mode CH 190 30MHz - 1GHz

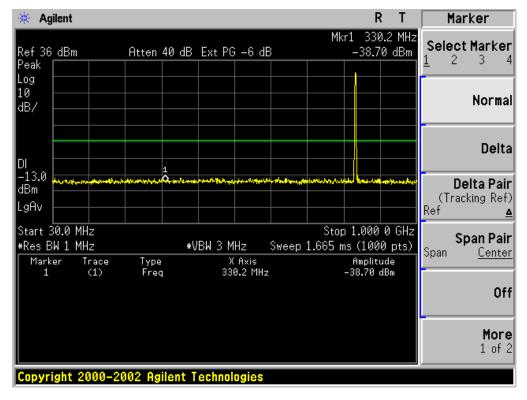


Conducted Emission Transmitting Mode CH 190 1GHz - 9GHz

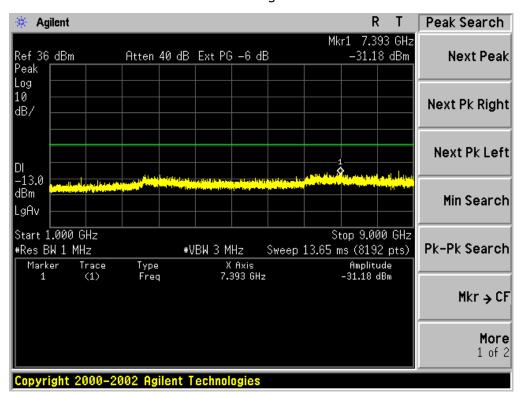

Conducted Emission Transmitting Mode CH 251 30MHz - 1GHz

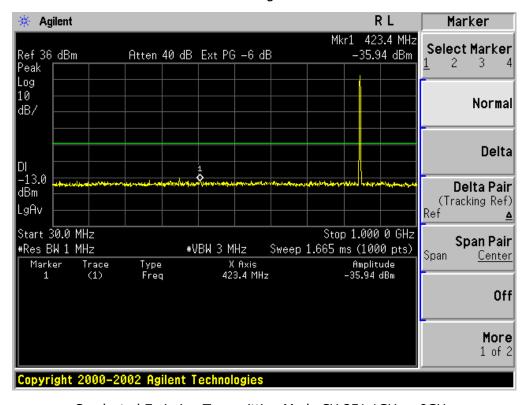


Conducted Emission Transmitting Mode CH 251 1GHz - 9GHz

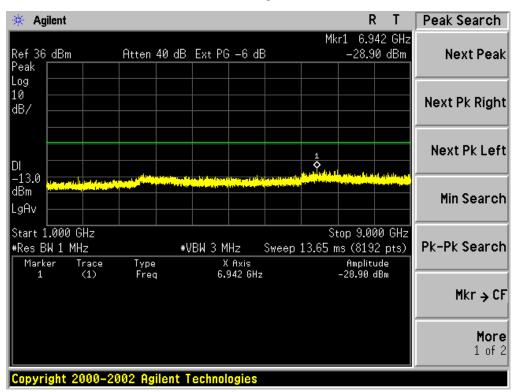


Page 51 of 98

CONDUCTED EMISSION IN PCS1900 BAND


Conducted Emission Transmitting Mode CH 512 30MHz - 1GHz

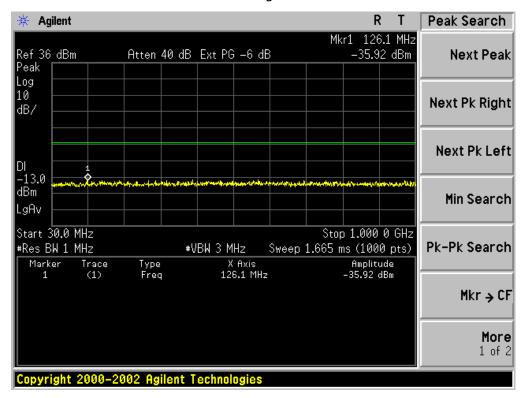


Conducted Emission Transmitting Mode CH 512 1GHz - 7GHz

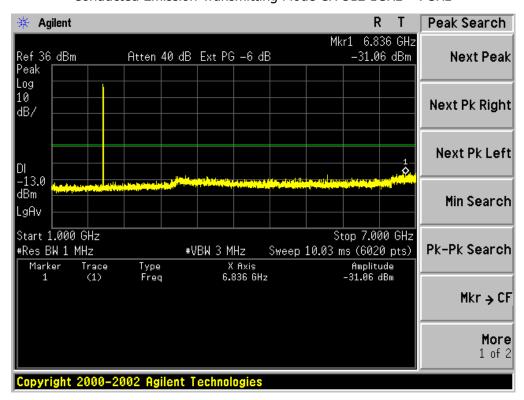


Conducted Emission Transmitting Mode CH 512 7GHz - 13.6GHz

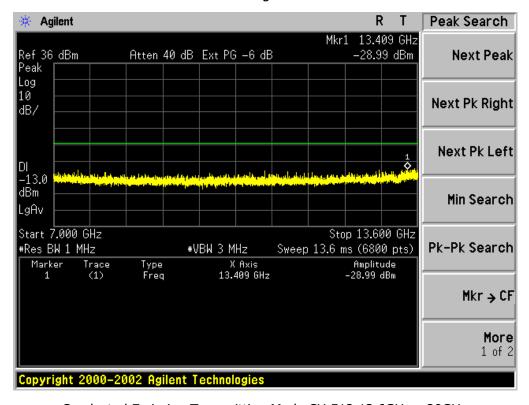


Conducted Emission Transmitting Mode CH 512 13.6GHz – 20GHz

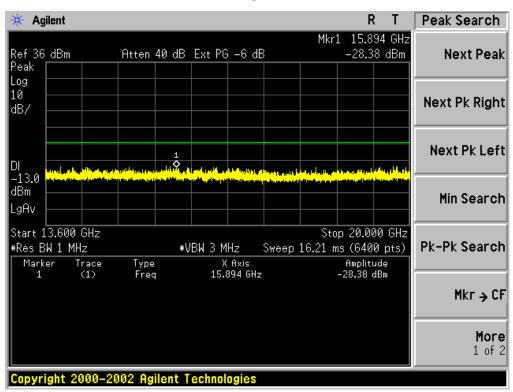


Conducted Emission Transmitting Mode CH 661 30MHz - 1GHz

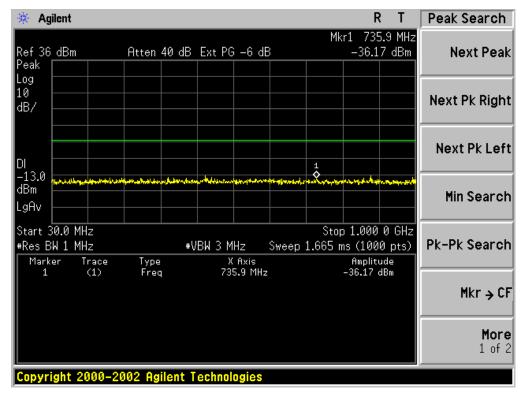


Conducted Emission Transmitting Mode CH 661 1GHz - 7GHz

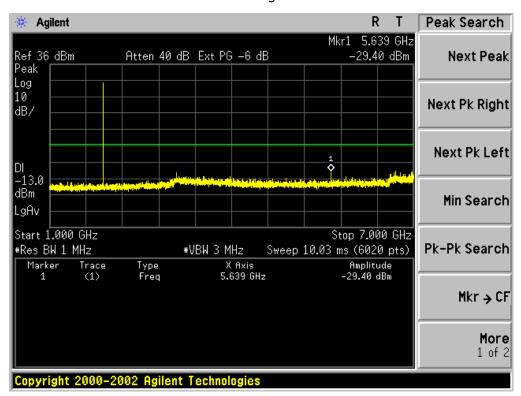


Conducted Emission Transmitting Mode CH 661 7GHz - 13.6GHz

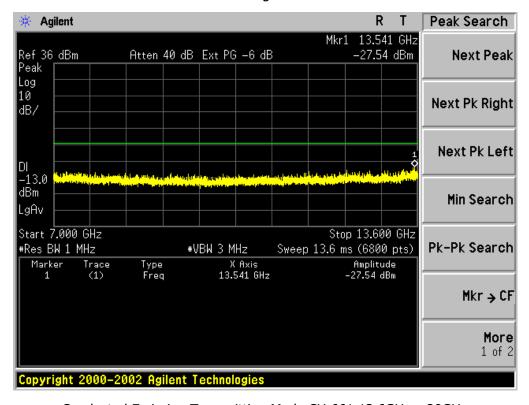


Conducted Emission Transmitting Mode CH 661 13.6GHz – 20GHz

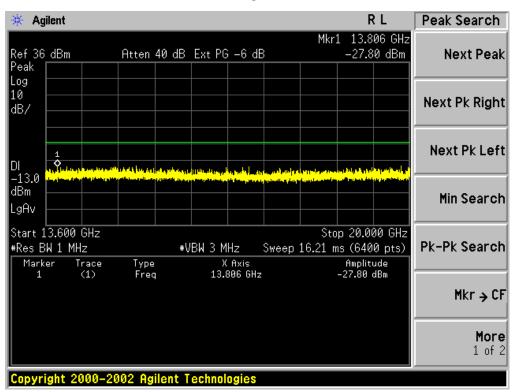


Conducted Emission Transmitting Mode CH 810 30MHz - 1GHz

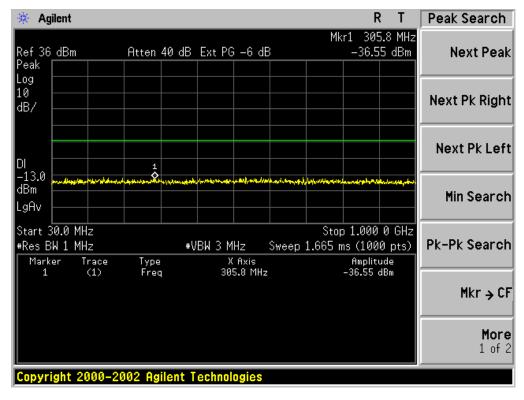


Conducted Emission Transmitting Mode CH 810 1GHz - 7GHz

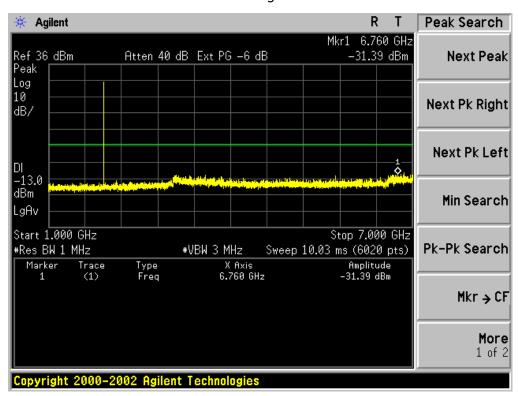

Conducted Emission Transmitting Mode CH 810 7GHz - 13.6GHz

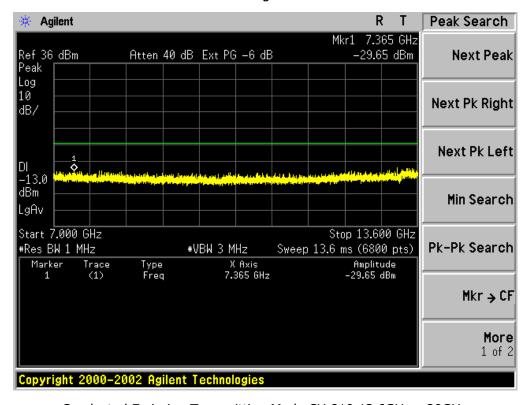


Conducted Emission Transmitting Mode CH 810 13.6GHz – 20GHz

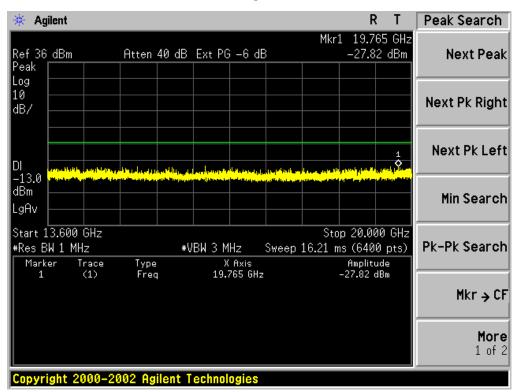


Page 57 of 98

CONDUCTED EMISSION IN PCS1900 (EDGE 8) BAND


Conducted Emission Transmitting Mode CH 512 30MHz - 1GHz

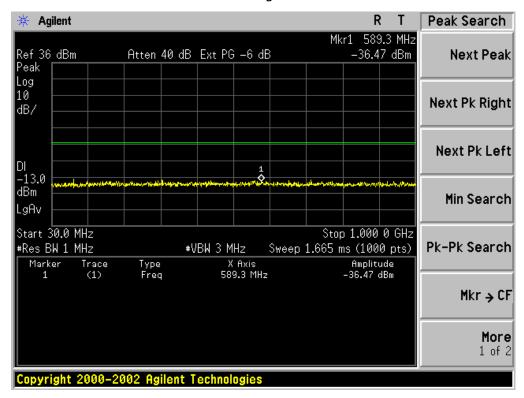


Conducted Emission Transmitting Mode CH 512 1GHz - 7GHz

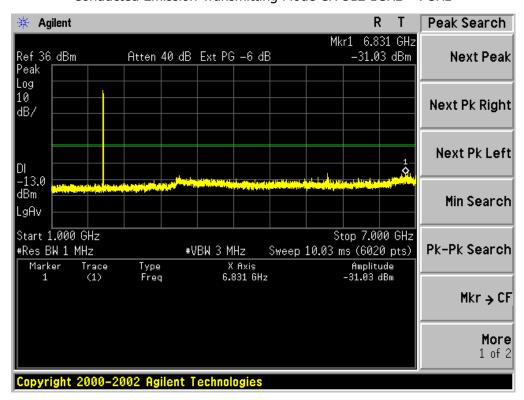


Conducted Emission Transmitting Mode CH 512 7GHz - 13.6GHz

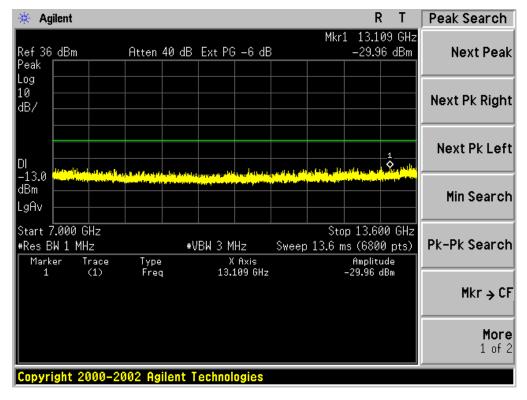


Conducted Emission Transmitting Mode CH 512 13.6GHz – 20GHz

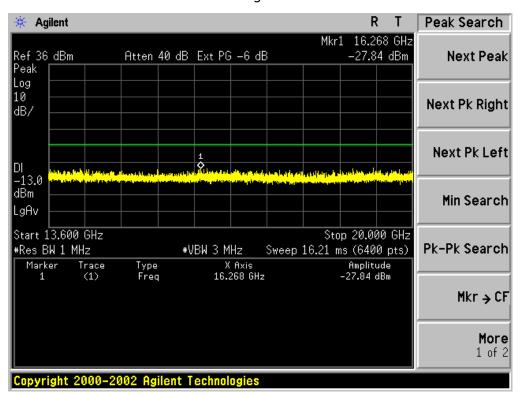


Conducted Emission Transmitting Mode CH 661 30MHz - 1GHz

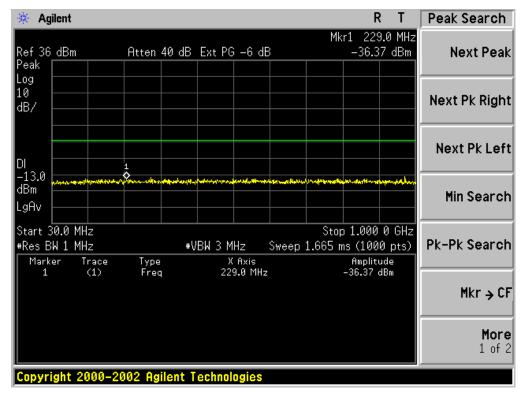


Conducted Emission Transmitting Mode CH 661 1GHz - 7GHz

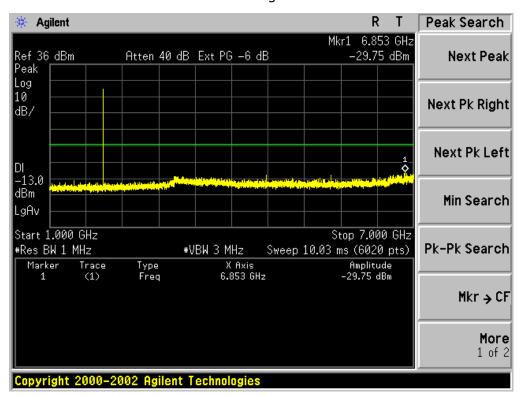


Conducted Emission Transmitting Mode CH 661 7GHz - 13.6GHz

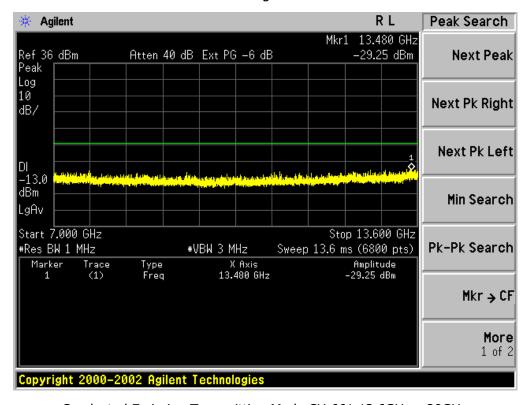


Conducted Emission Transmitting Mode CH 661 13.6GHz – 20GHz

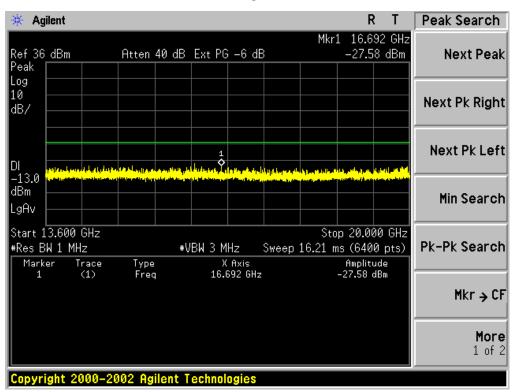


Conducted Emission Transmitting Mode CH 810 30MHz - 1GHz

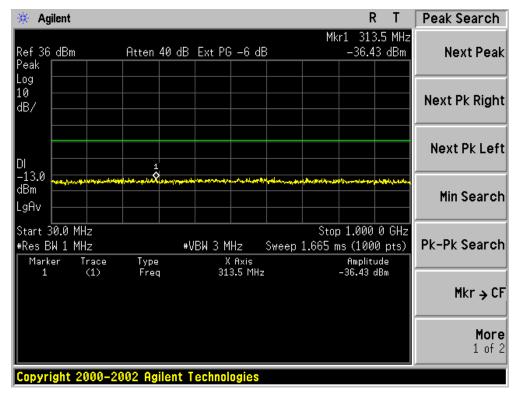


Conducted Emission Transmitting Mode CH 810 1GHz - 7GHz

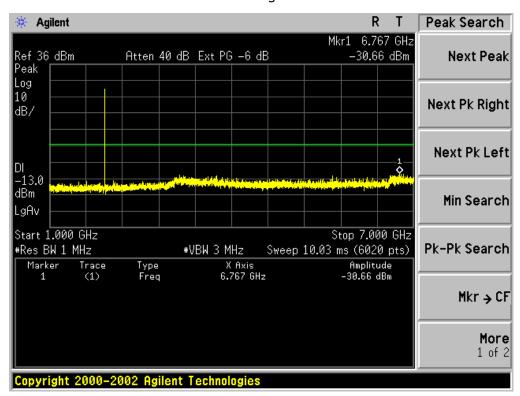

Conducted Emission Transmitting Mode CH 810 7GHz - 13.6GHz

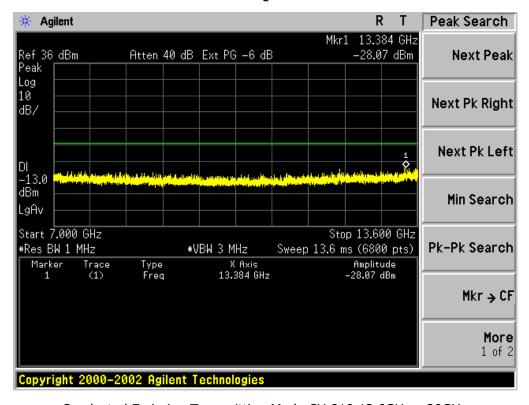


Conducted Emission Transmitting Mode CH 810 13.6GHz – 20GHz

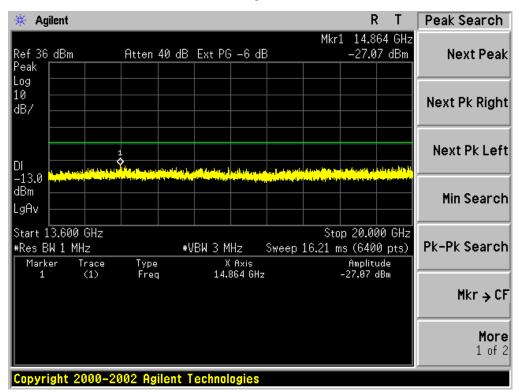


Page 63 of 98

CONDUCTED EMISSION IN UMTS band II


Conducted Emission Transmitting Mode CH 9662 30MHz - 1GHz

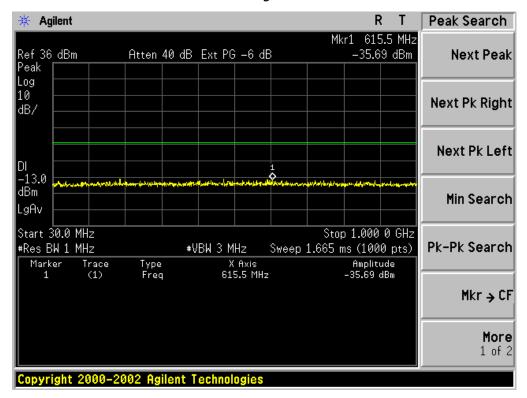


Conducted Emission Transmitting Mode CH 9662 1GHz - 7GHz

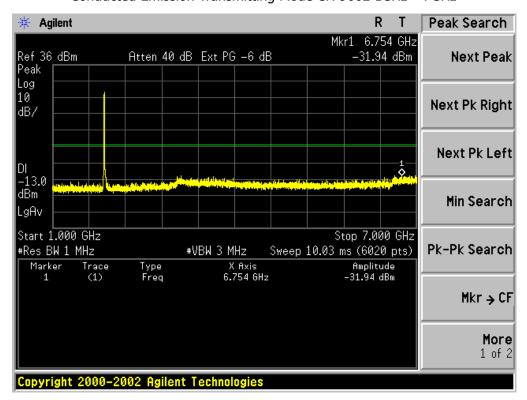


Conducted Emission Transmitting Mode CH 9662 7GHz - 13.6GHz

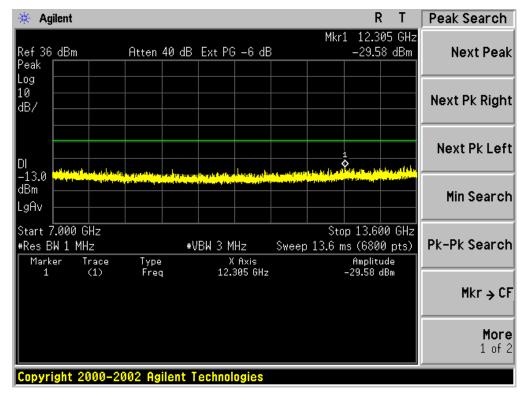


Conducted Emission Transmitting Mode CH 9662 13.6GHz - 20GHz

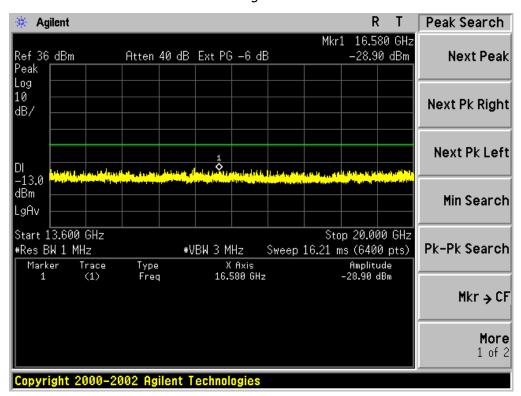

Conducted Emission Transmitting Mode CH 9800 30MHz - 1GHz

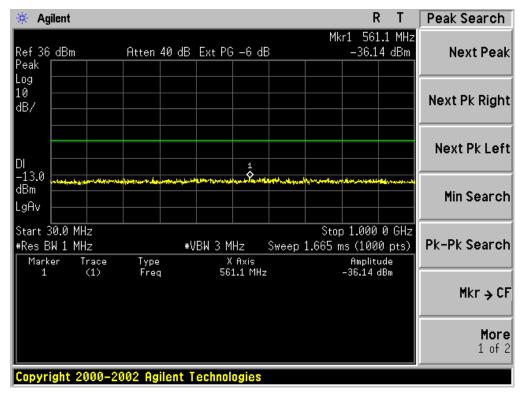


Conducted Emission Transmitting Mode CH 9800 1GHz - 7GHz

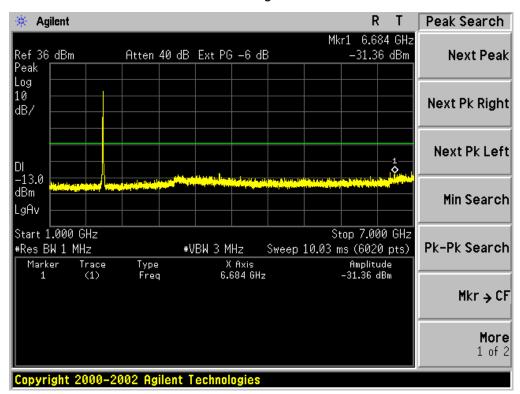


Page 66 of 98


Conducted Emission Transmitting Mode CH 9800 7GHz - 13.6GHz

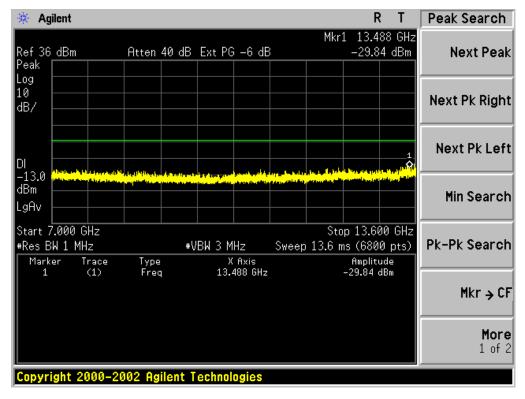


Conducted Emission Transmitting Mode CH 9800 13.6GHz - 20GHz

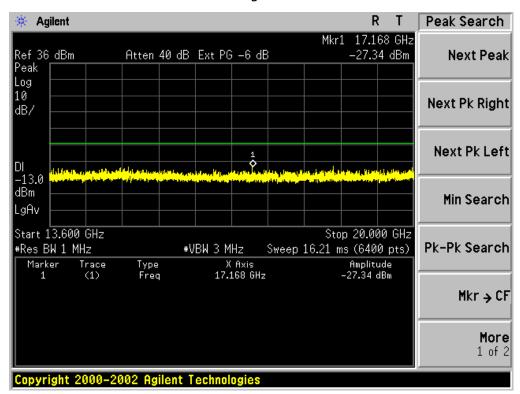


Conducted Emission Transmitting Mode CH 9938 30MHz - 1GHz

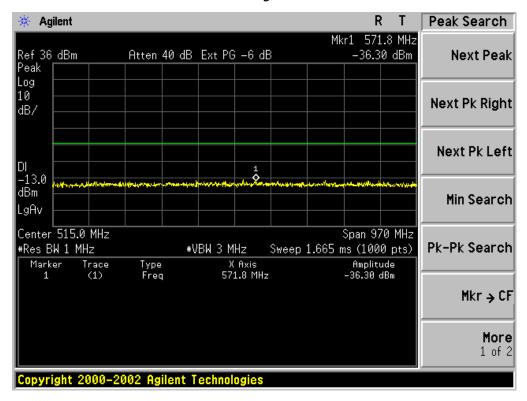


Conducted Emission Transmitting Mode CH 9938 1GHz - 7GHz

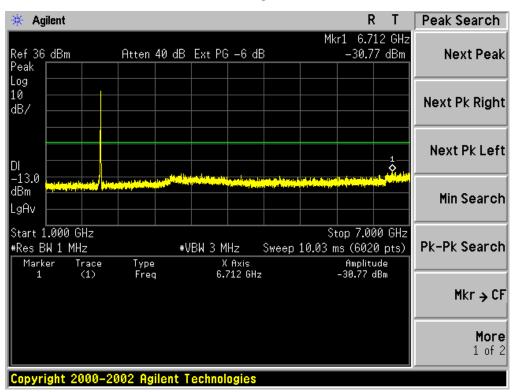

Conducted Emission Transmitting Mode CH 9938 7GHz - 13.6GHz

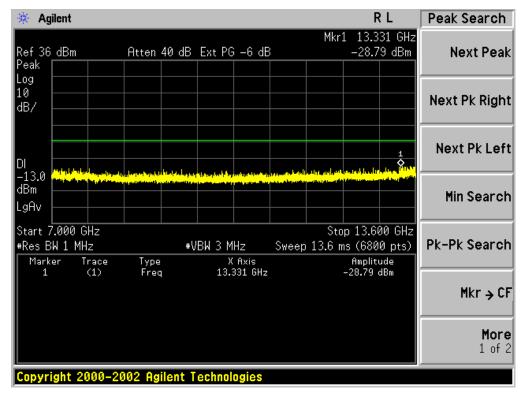


Conducted Emission Transmitting Mode CH 9938 13.6GHz - 20GHz

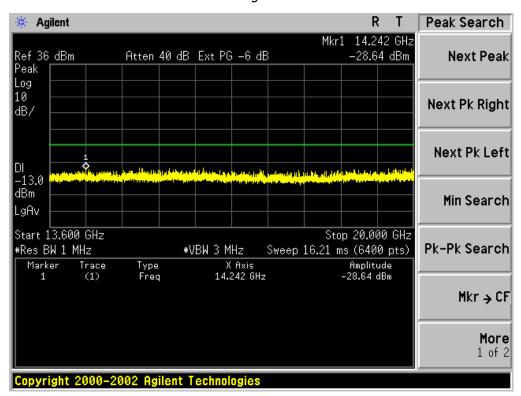


Page 69 of 98

CONDUCTED EMISSION IN UMTS band V


Conducted Emission Transmitting Mode CH 4357 30MHz - 1GHz

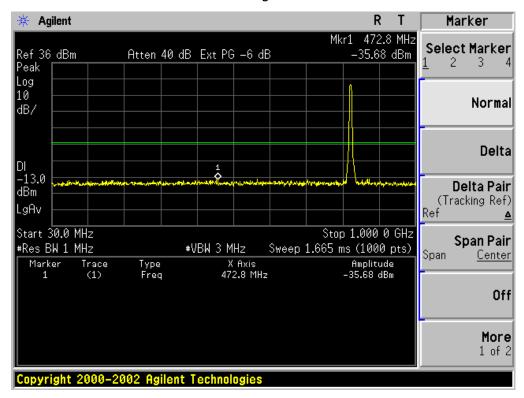


Conducted Emission Transmitting Mode CH 4357 1GHz - 9GHz

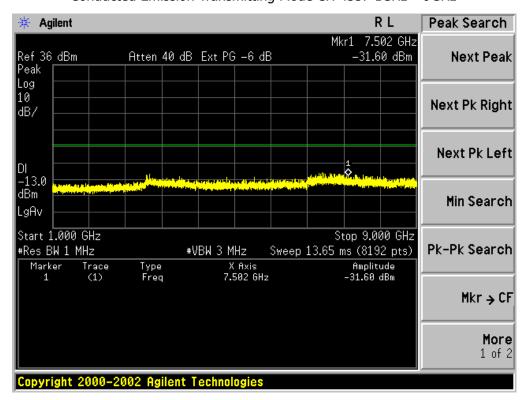


Conducted Emission Transmitting Mode CH 4408 30MHz - 1GHz

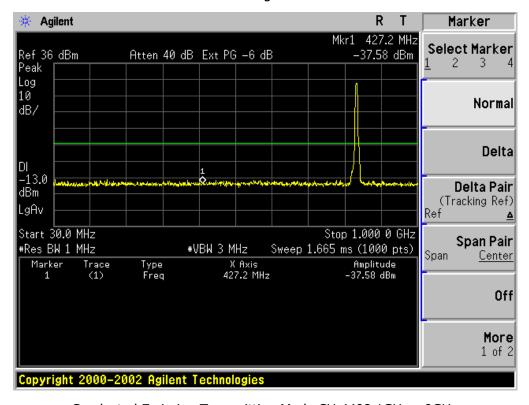


Conducted Emission Transmitting Mode CH 4408 1GHz - 9GHz

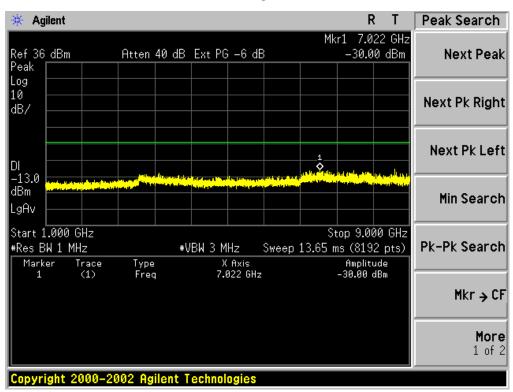

Conducted Emission Transmitting Mode CH 4458 30MHz – 1GHz

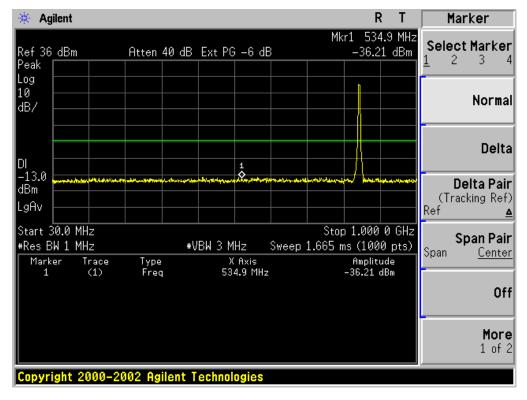

Conducted Emission Transmitting Mode CH 4458 1GHz - 9GHz

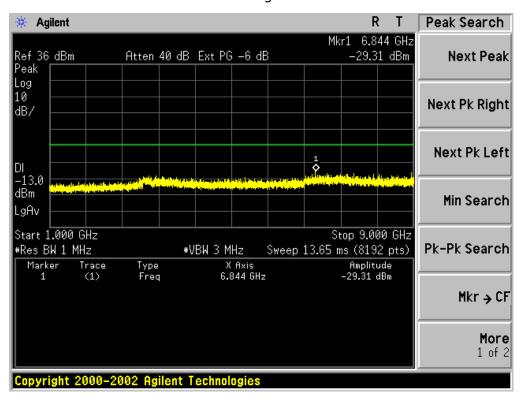


Report No.: AGC01321140703FE02 Page 72 of 98


APPENDIX B TEST PLOTS FOR OCCUPIED BANDWIDTH (99%) EMISSION BANDWIDTH (-26dBC)

Page 73 of 98

Occupied Bandwidth (99%) GSM 850 BAND CH 128

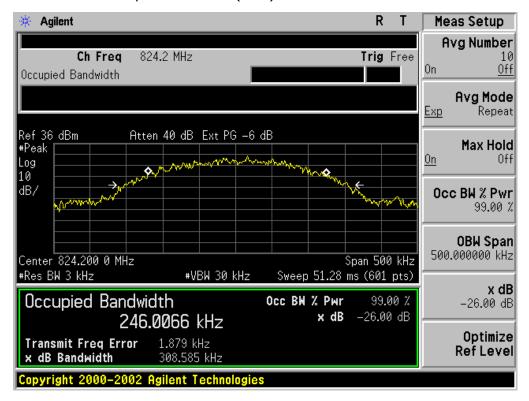


Occupied Bandwidth (99%) GSM 850 BAND CH 190

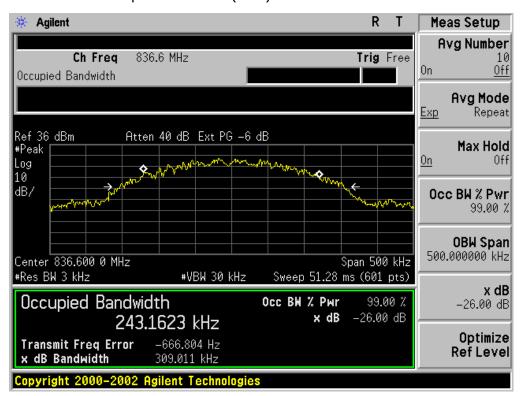


Page 74 of 98


Occupied Bandwidth (99%) GSM 850 BAND CH 251

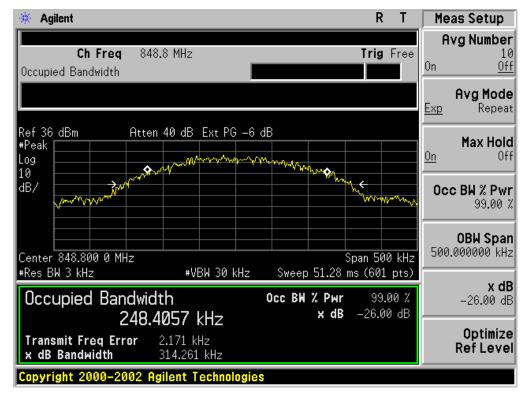


Occupied Bandwidth (99%) GSM 850(EDGE 8) BAND CH 128

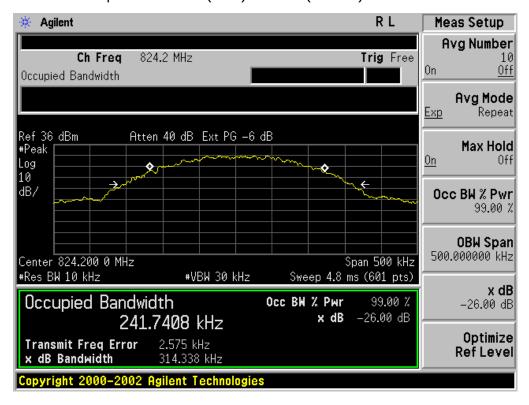


Occupied Bandwidth (99%) GSM 850 (EDGE 8) BAND CH 190

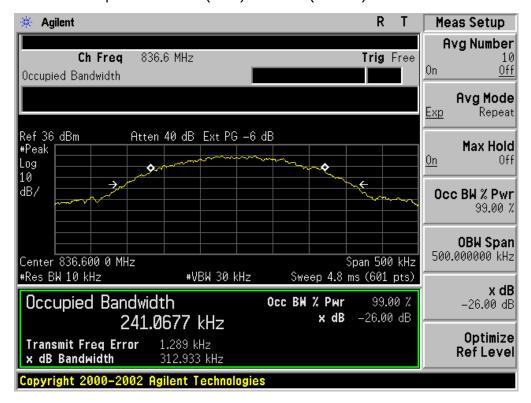


Occupied Bandwidth (99%) GSM 850 (EDGE 8) BAND CH 251

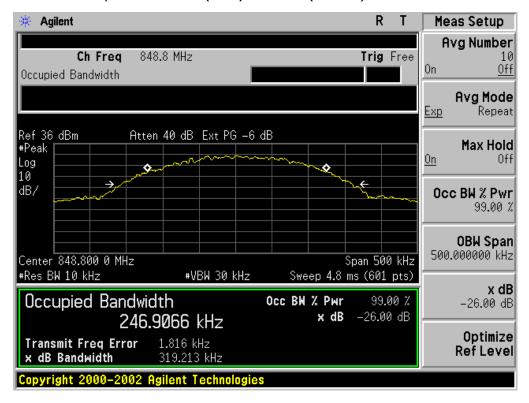

Occupied Bandwidth (99%) PCS 1900 BAND CH 512

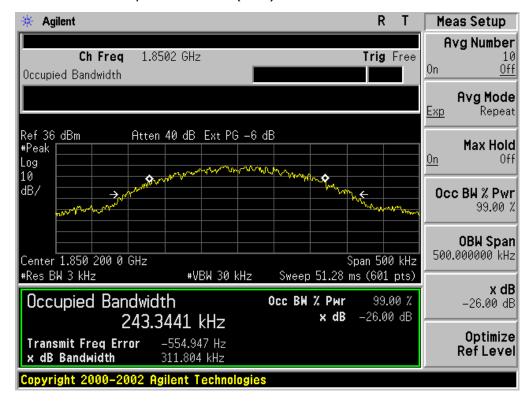


Occupied Bandwidth (99%) PCS 1900 BAND CH 661

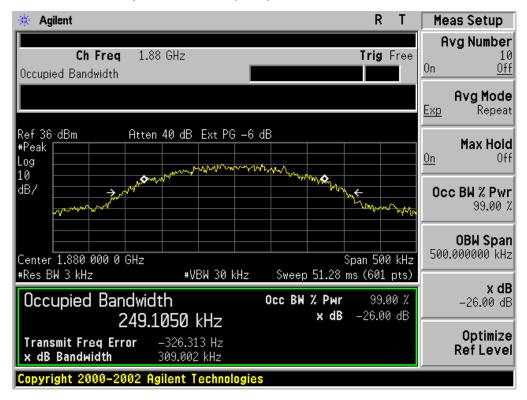


Report No.: AGC01321140703FE02 Page 77 of 98


Occupied Bandwidth (99%) PCS 1900 BAND CH 810

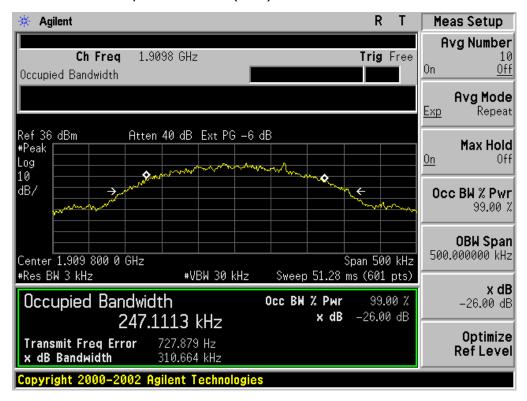


Occupied Bandwidth (99%) PCS 1900 (EDGE 8) BAND CH 512

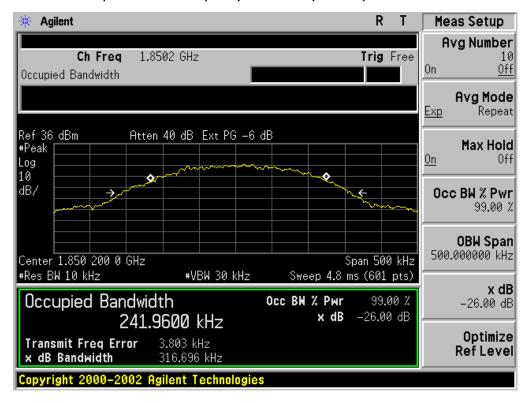

Occupied Bandwidth (99%) PCS 1900 (EDGE 8) BAND CH 661

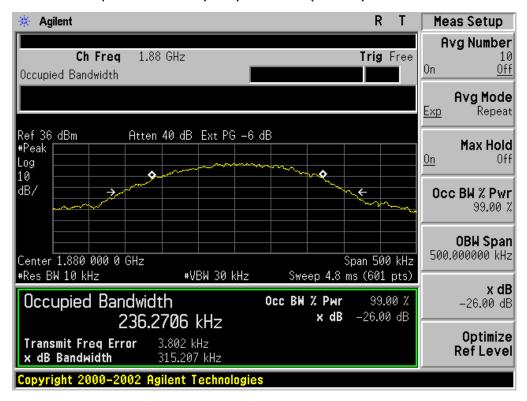


Occupied Bandwidth (99%) PCS 1900 (EDGE 8) BAND CH 810

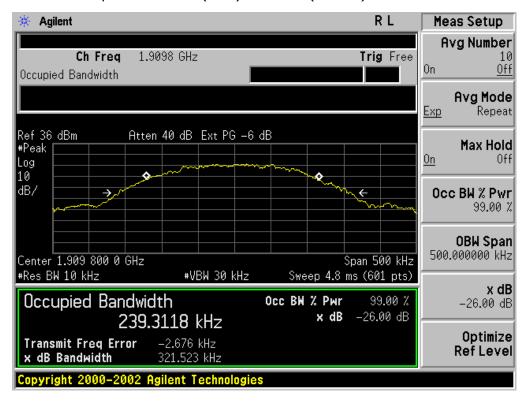


Report No.: AGC01321140703FE02 Page 79 of 98

Occupied Bandwidth (99%) UMTS band II CH 9662

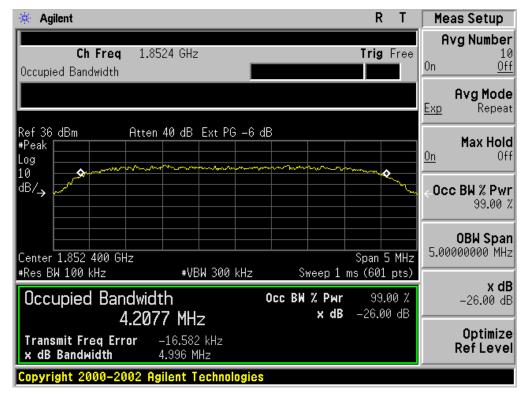


Occupied Bandwidth (99%) UMTS band II CH 9800

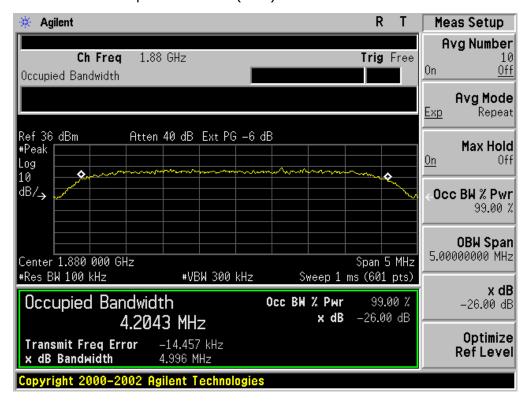


Report No.: AGC01321140703FE02 Page 80 of 98


Occupied Bandwidth (99%) UMTS band II CH 9938

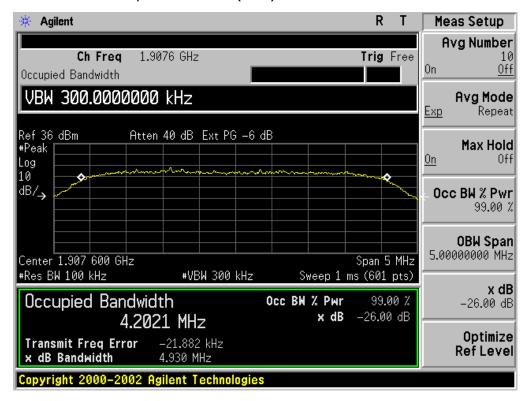


Occupied Bandwidth (99%) UMTS band V CH 4357

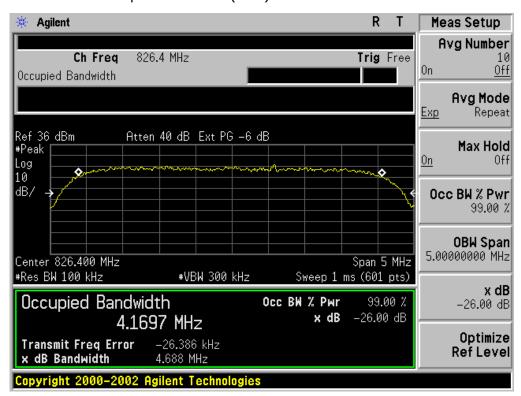

Occupied Bandwidth (99%) UMTS band V CH 4408

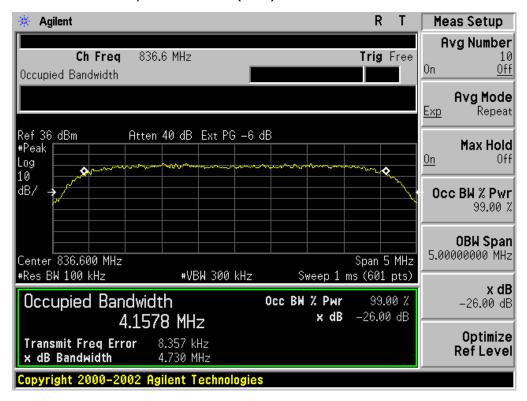

Occupied Bandwidth (99%) UMTS band V CH 4458

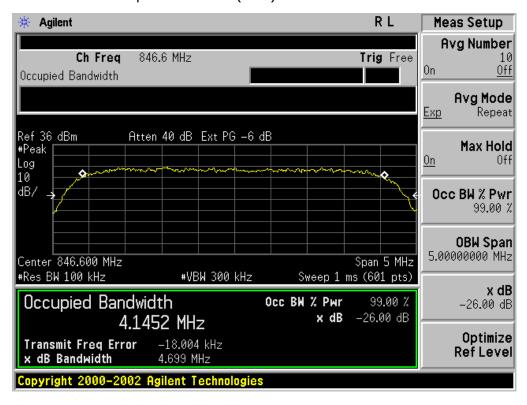


Page 82 of 98

APPENDIX C TEST PLOTS FOR BAND EDGES

Low Band Edge GSM 850 BAND CH 128




High Band Edge GSM 850 BAND CH 251

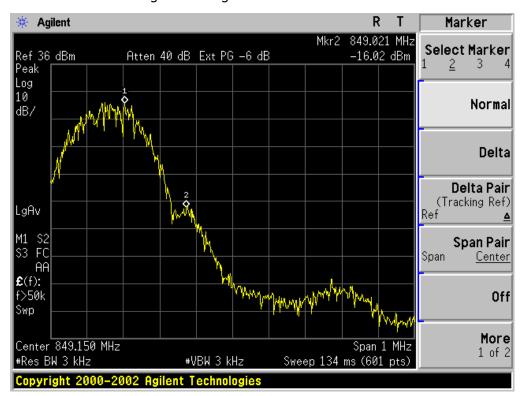


Low Band Edge GSM 850 (EDGE 8) BAND CH 128




High Band Edge GSM 850 (EDGE 8) BAND CH 251

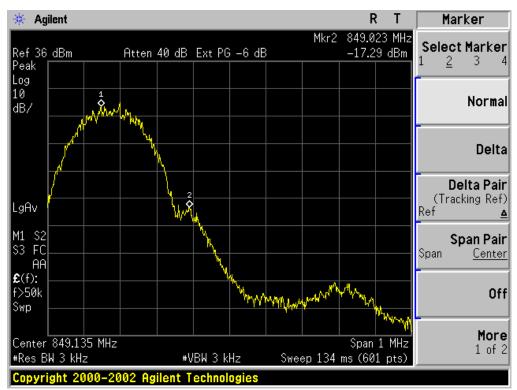


Low Band Edge PCS 1900 BAND CH 512

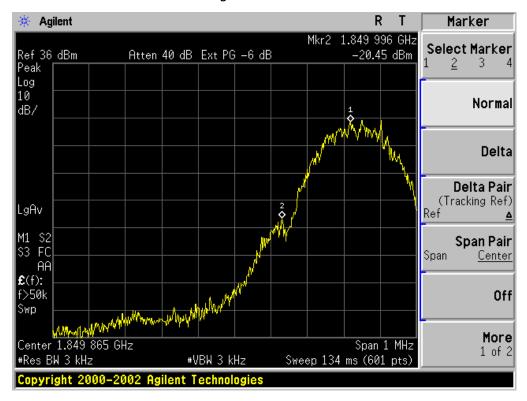


High Band Edge PCS 1900 BAND CH 810

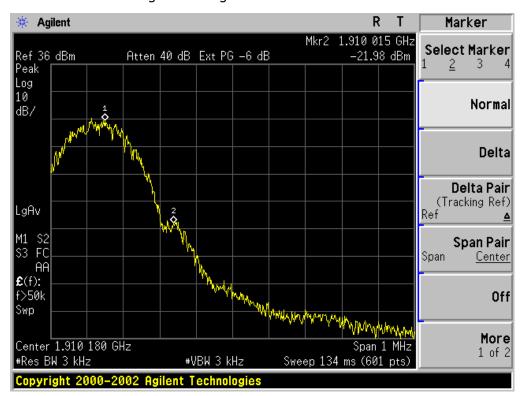


Low Band Edge PCS 1900 (EDGE 8) BAND CH 512

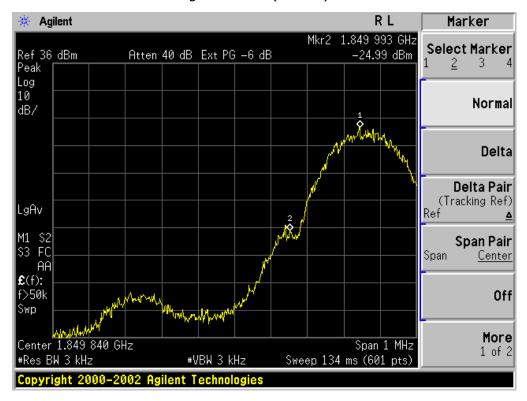


High Band Edge PCS 1900 (EDGE 8) BAND CH 810

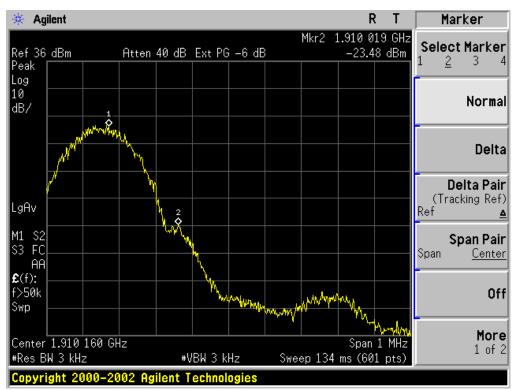


Low Band Edge UMTS BAND II CH 9662

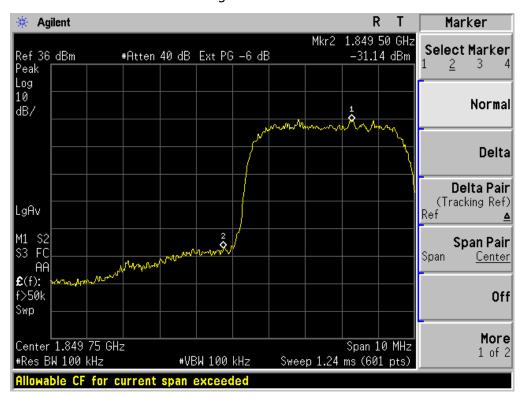


High Band Edge UMTS BAND II CH 9938

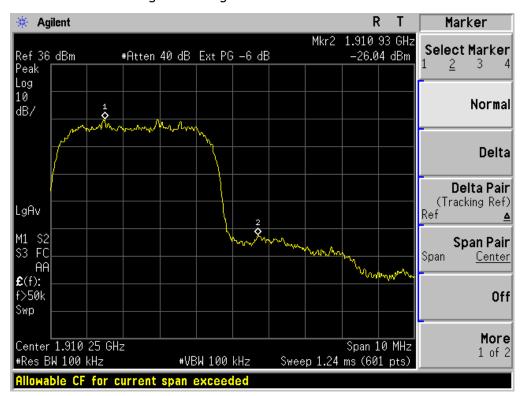

Low Band Edge UMTS BAND V CH 4357

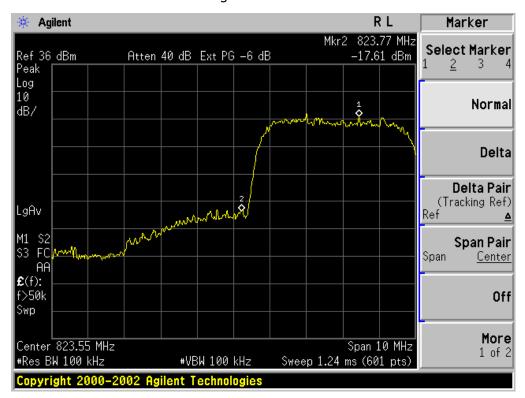

High Band Edge UMTS BAND V CH 4458

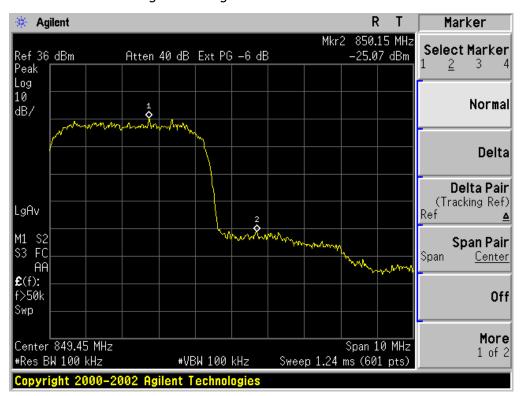

Page 89 of 98


APPENDIX D PHOTOGRAPHS OF TEST SETUP

Report No.: AGC01321140703FE02 Page 90 of 98

CONDUCTED EMISSION



RADIATED SPURIOUS EMISSION

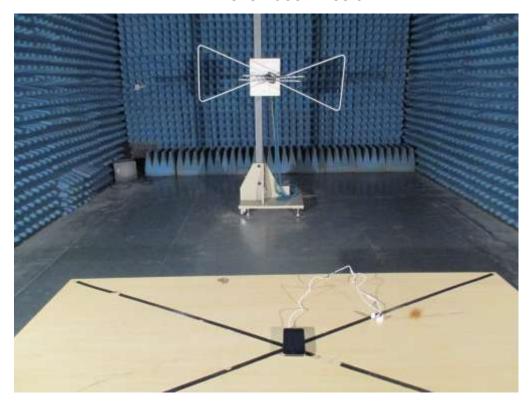

Report No.: AGC01321140703FE02 Page 91 of 98



Report No.: AGC01321140703FE02 Page 92 of 98

APPENDIX E PHOTOGRAPHS OF EUT

Report No.: AGC01321140703FE02 Page 93 of 98

All VIEW OF EUT



TOP VIEW OF EUT



Report No.: AGC01321140703FE02 Page 94 of 98

BOTTOM VIEW OF EUT



FRONT VIEW OF EUT



Page 95 of 98

BACK VIEW OF EUT



LEFT VIEW OF EUT



RIGHT VIEW OF EUT





Report No.: AGC01321140703FE02 Page 97 of 98


OPEN VIEW OF EUT-2




OPEN VIEW OF EUT-3



INTERNAL VIEW OF EUT-1

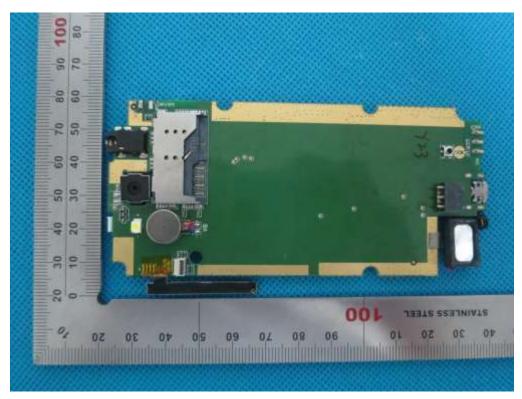

INTERNAL VIEW OF EUT-2

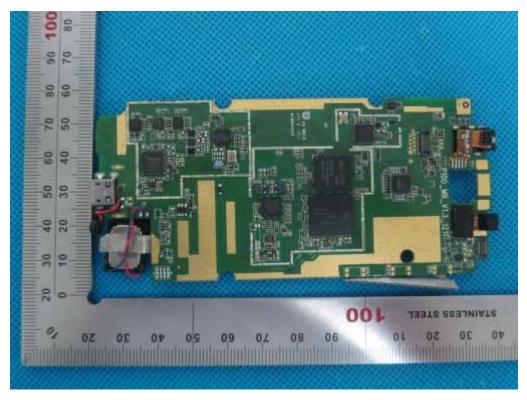

----END OF REPORT----