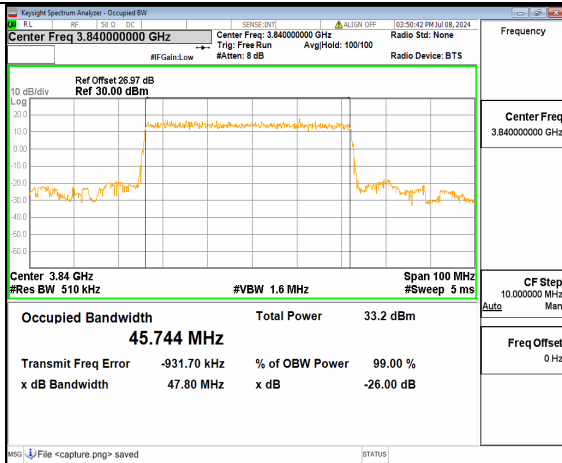
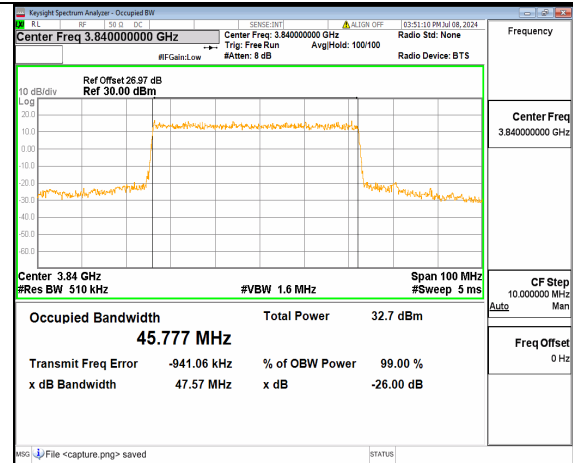
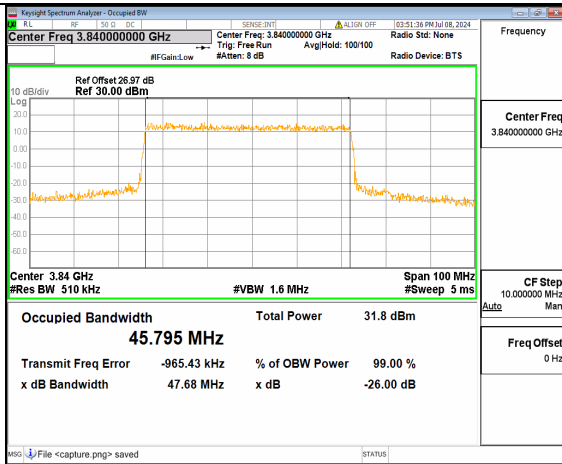
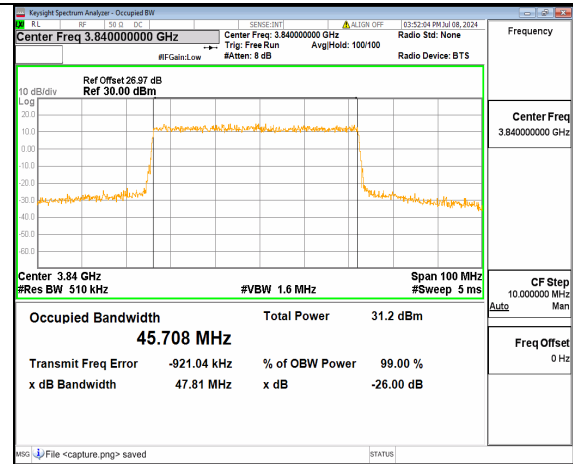
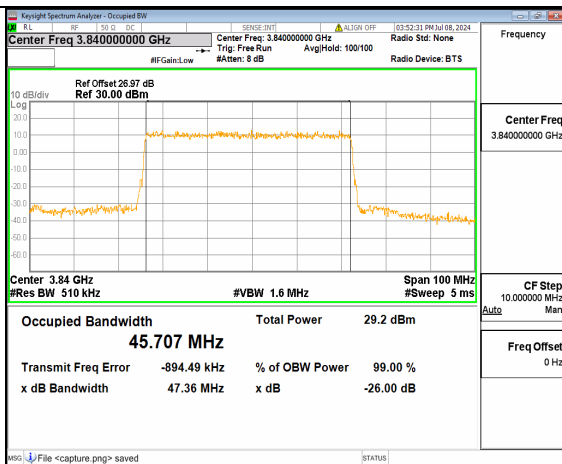
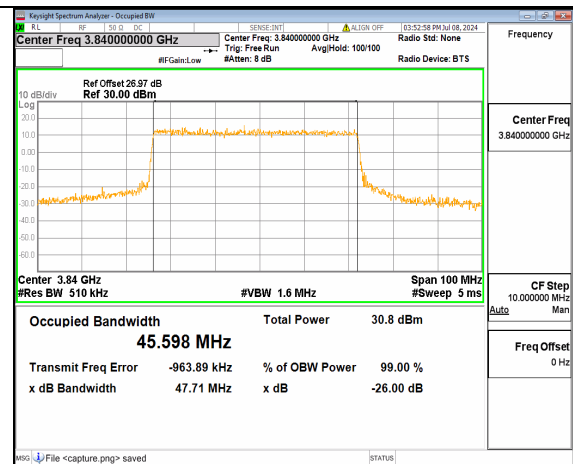
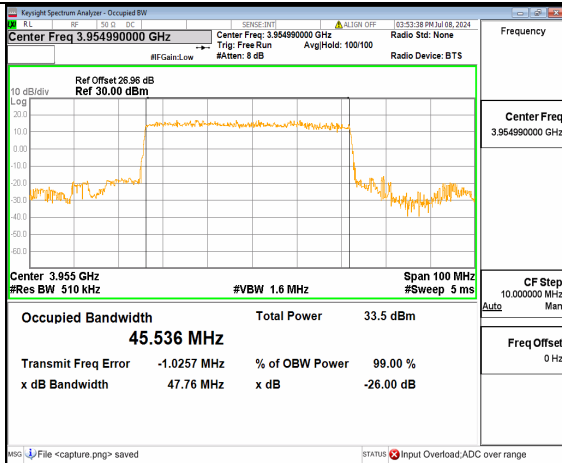
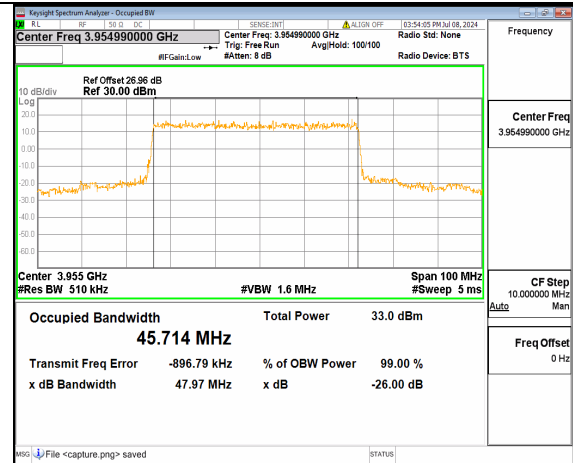
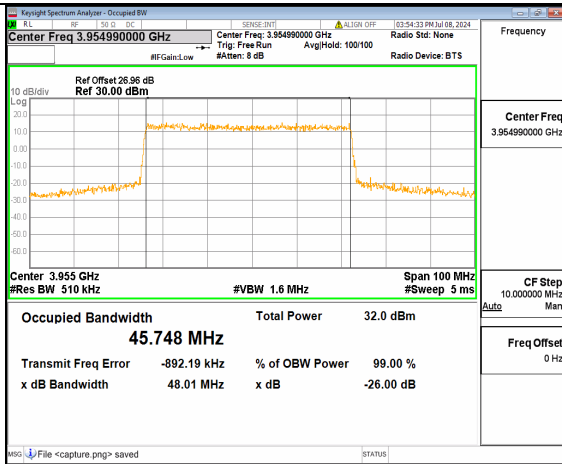
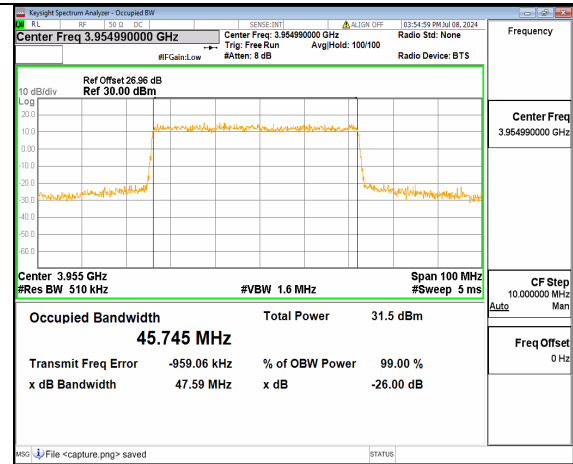
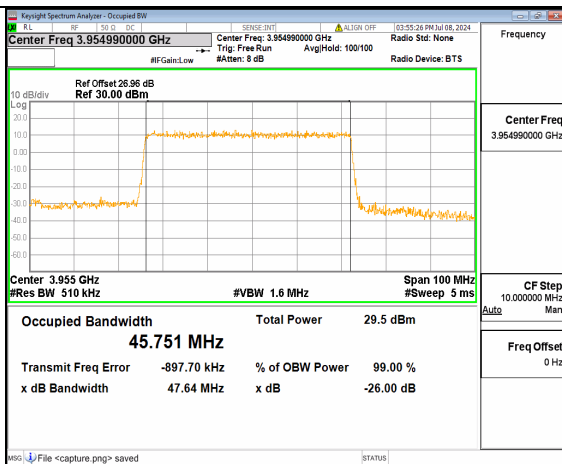
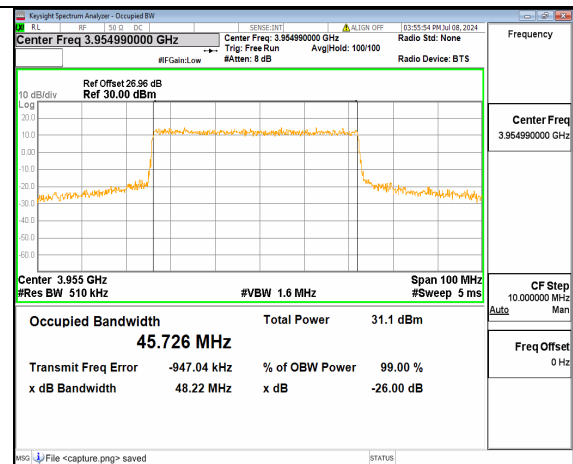
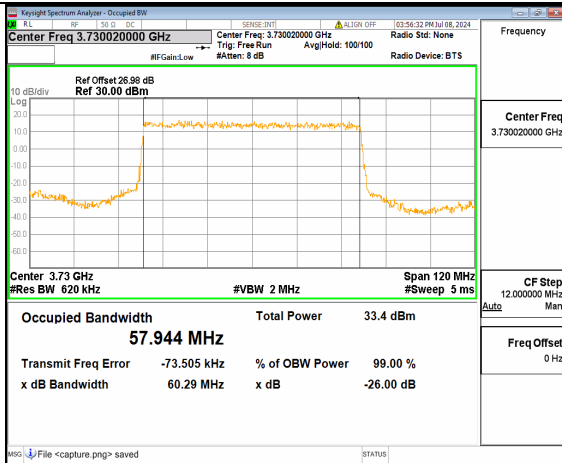
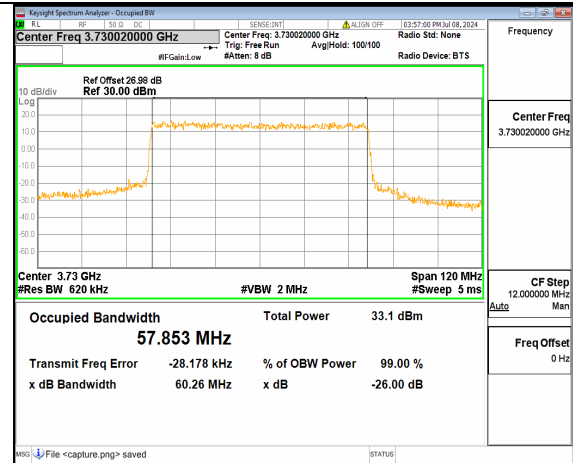
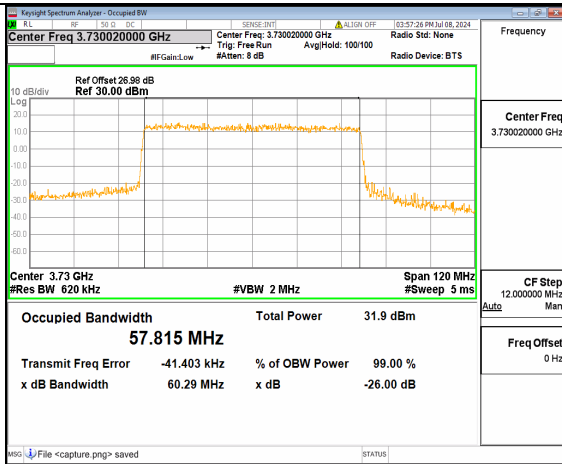
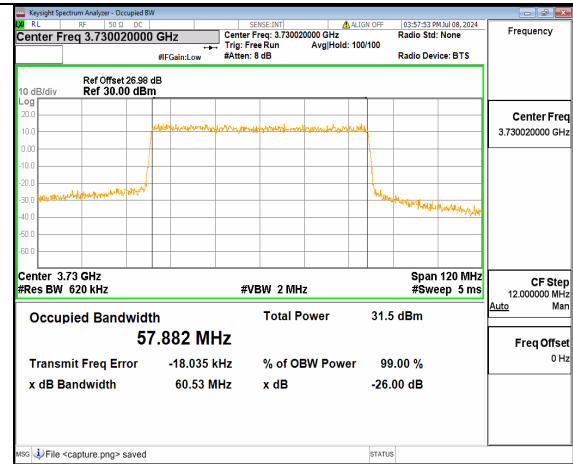
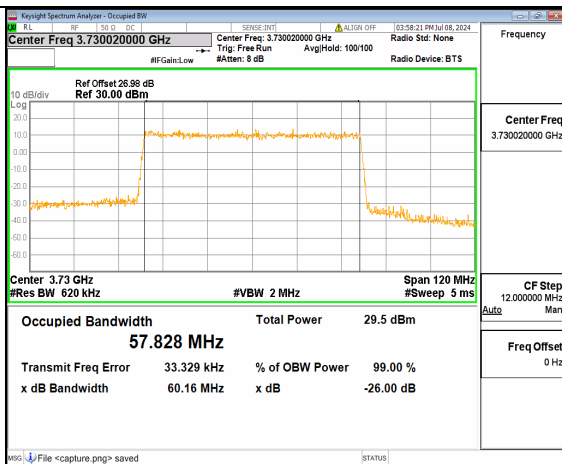
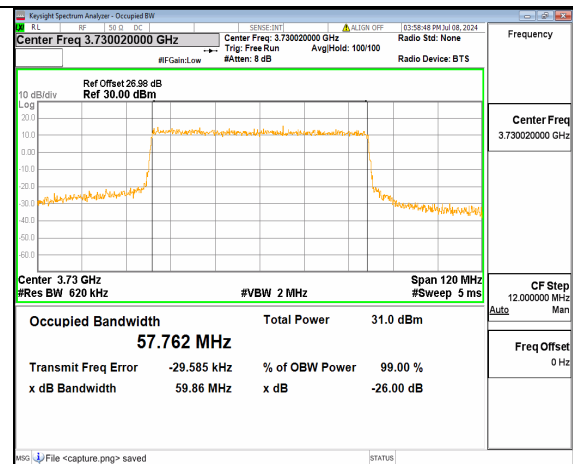
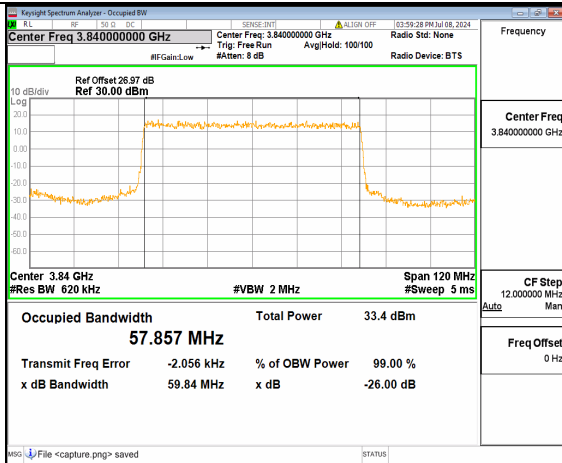
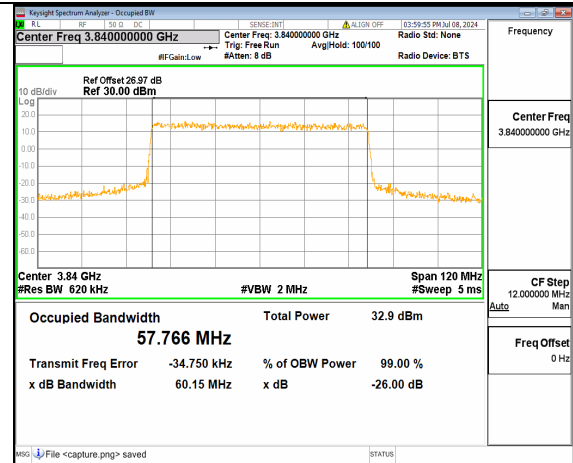
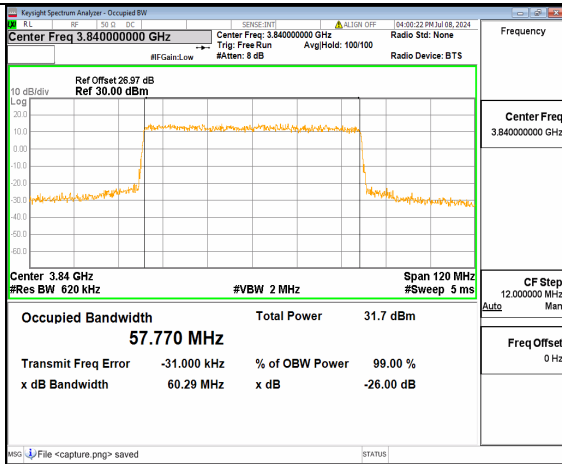
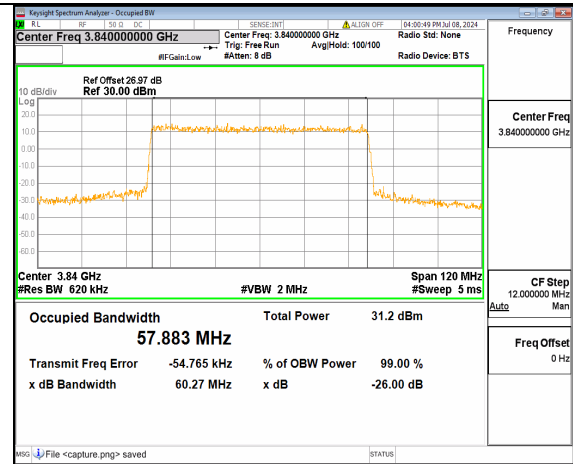
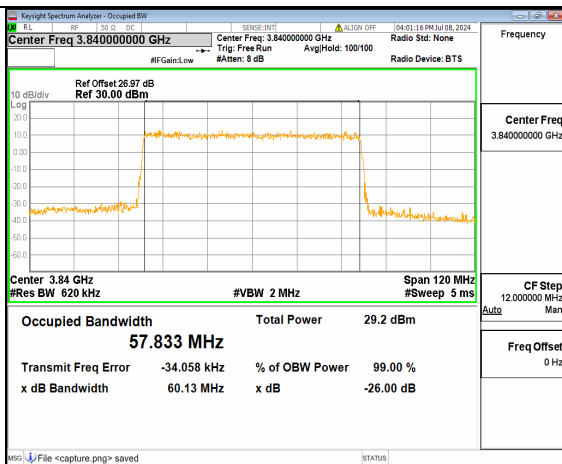
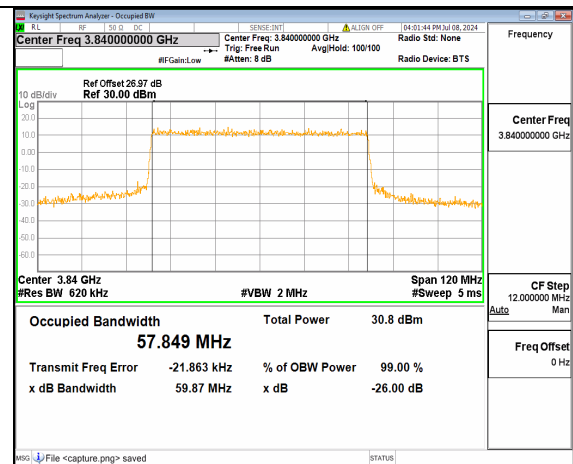
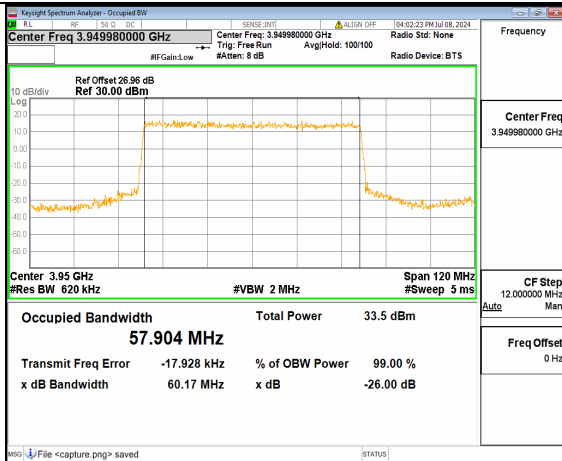
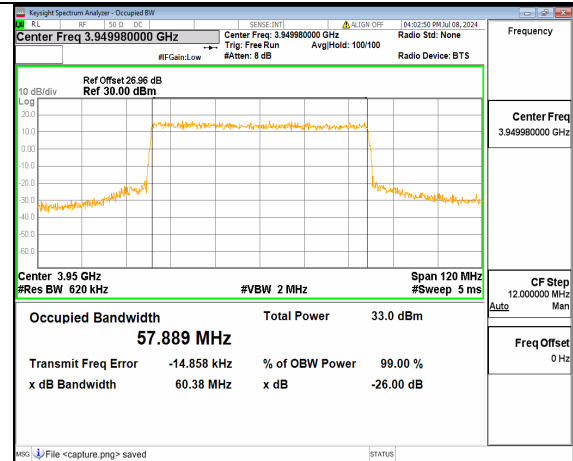
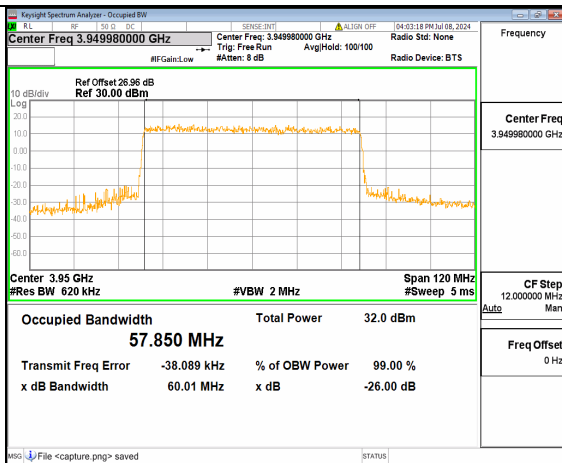
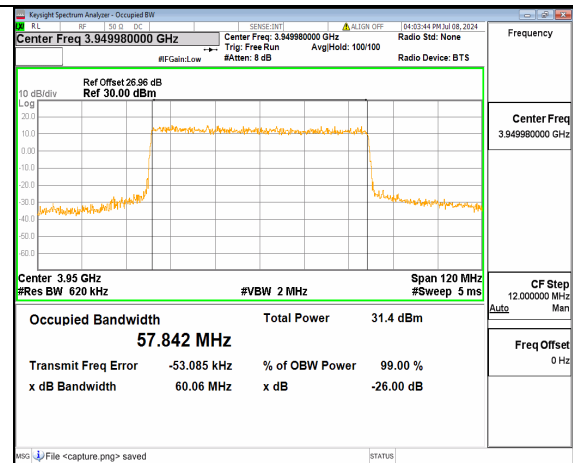
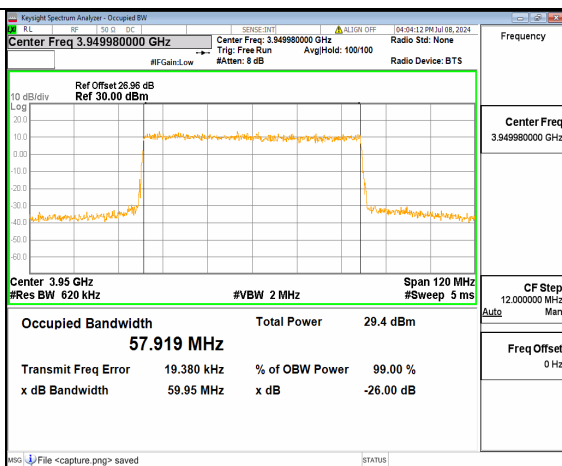
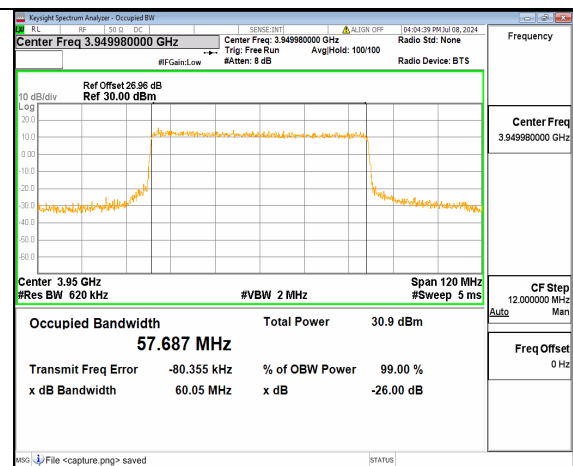








n77(3700-3980MHz) 50M DFT-s-OFDM BPSK
Outer_Full Midn77(3700-3980MHz) 50M DFT-s-OFDM QPSK
Outer_Full Midn77(3700-3980MHz) 50M DFT-s-OFDM
16QAM Outer_Full Midn77(3700-3980MHz) 50M DFT-s-OFDM
64QAM Outer_Full Midn77(3700-3980MHz) 50M DFT-s-OFDM
256QAM Outer_Full Midn77(3700-3980MHz) 50M CP-OFDM QPSK
Outer_Full Mid







n77(3700-3980MHz) 50M DFT-s-OFDM BPSK
Outer_Full Highn77(3700-3980MHz) 50M DFT-s-OFDM QPSK
Outer_Full Highn77(3700-3980MHz) 50M DFT-s-OFDM
16QAM Outer_Full Highn77(3700-3980MHz) 50M DFT-s-OFDM
64QAM Outer_Full Highn77(3700-3980MHz) 50M DFT-s-OFDM
256QAM Outer_Full Highn77(3700-3980MHz) 50M CP-OFDM QPSK
Outer_Full High







n77(3700-3980MHz) 60M DFT-s-OFDM BPSK
Outer_Full Lown77(3700-3980MHz) 60M DFT-s-OFDM QPSK
Outer_Full Lown77(3700-3980MHz) 60M DFT-s-OFDM
16QAM Outer_Full Lown77(3700-3980MHz) 60M DFT-s-OFDM
64QAM Outer_Full Lown77(3700-3980MHz) 60M DFT-s-OFDM
256QAM Outer_Full Lown77(3700-3980MHz) 60M CP-OFDM QPSK
Outer_Full Low







n77(3700-3980MHz) 60M DFT-s-OFDM BPSK
Outer_Full Midn77(3700-3980MHz) 60M DFT-s-OFDM QPSK
Outer_Full Midn77(3700-3980MHz) 60M DFT-s-OFDM
16QAM Outer_Full Midn77(3700-3980MHz) 60M DFT-s-OFDM
64QAM Outer_Full Midn77(3700-3980MHz) 60M DFT-s-OFDM
256QAM Outer_Full Midn77(3700-3980MHz) 60M CP-OFDM QPSK
Outer_Full Mid

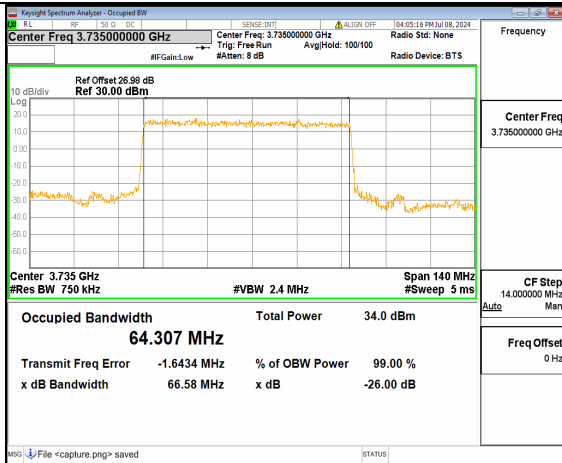
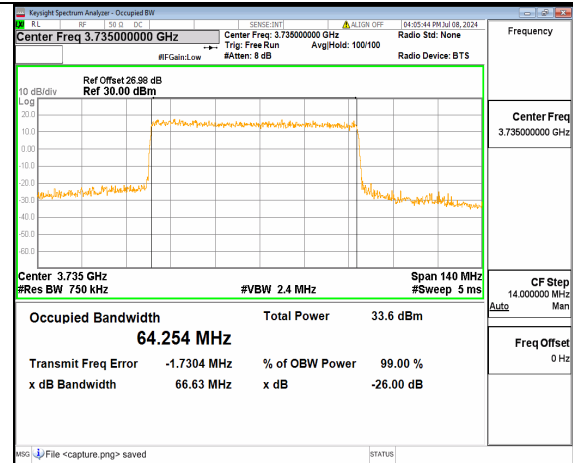
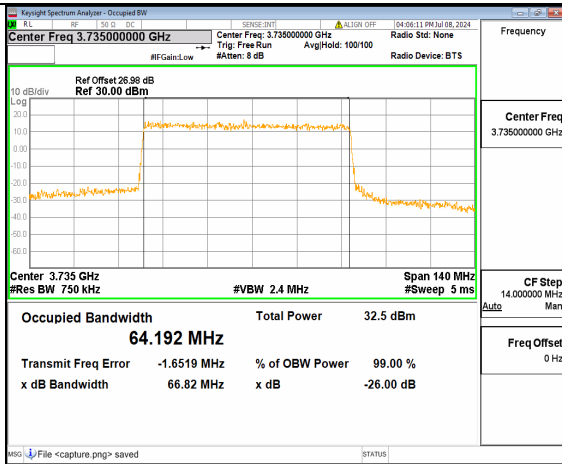
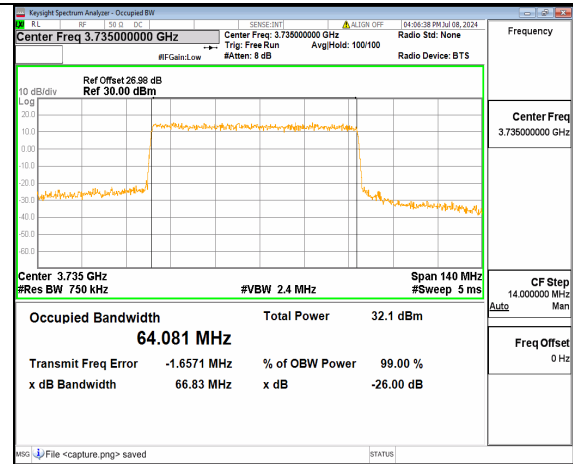
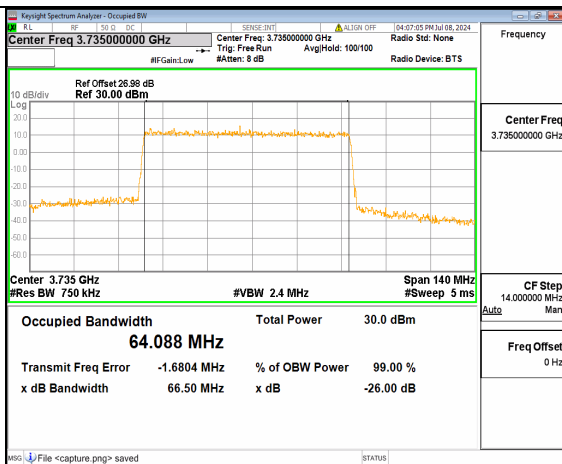
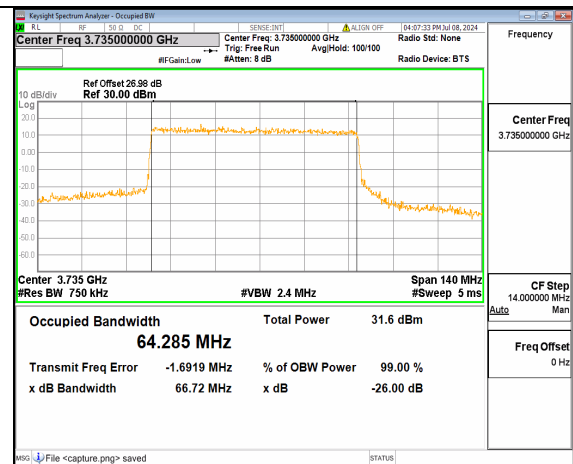
n77(3700-3980MHz) 60M DFT-s-OFDM BPSK
Outer_Full Highn77(3700-3980MHz) 60M DFT-s-OFDM QPSK
Outer_Full Highn77(3700-3980MHz) 60M DFT-s-OFDM
16QAM Outer_Full Highn77(3700-3980MHz) 60M DFT-s-OFDM
64QAM Outer_Full Highn77(3700-3980MHz) 60M DFT-s-OFDM
256QAM Outer_Full Highn77(3700-3980MHz) 60M CP-OFDM QPSK
Outer_Full High

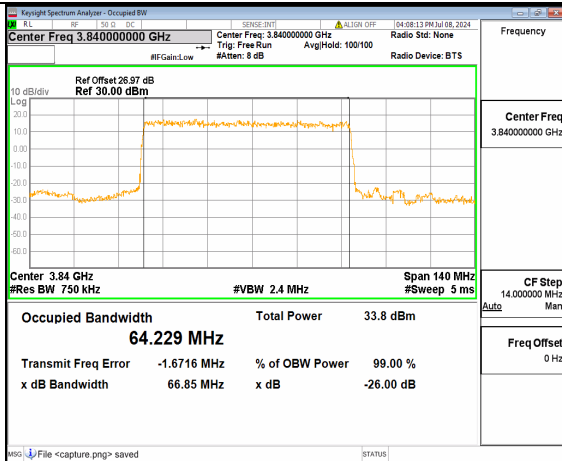
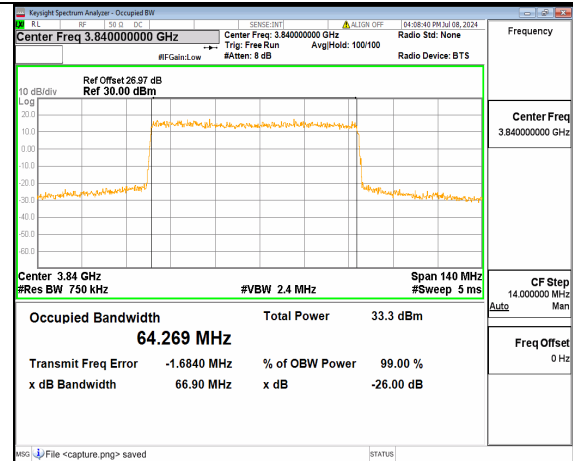
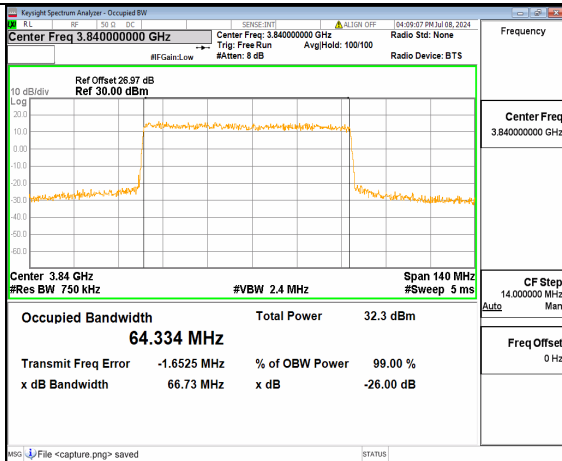
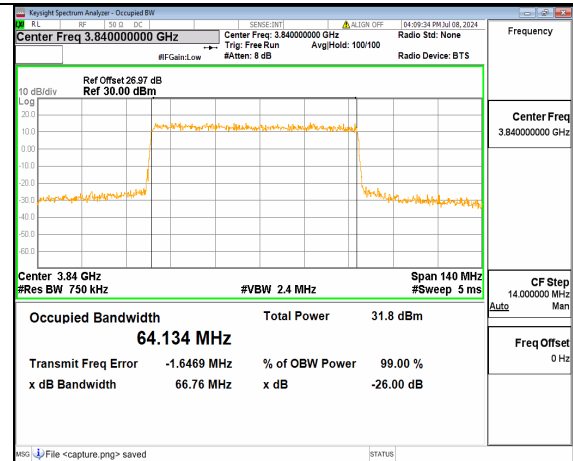
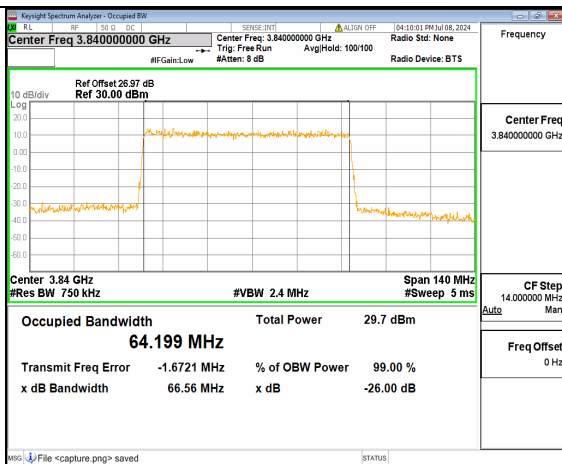
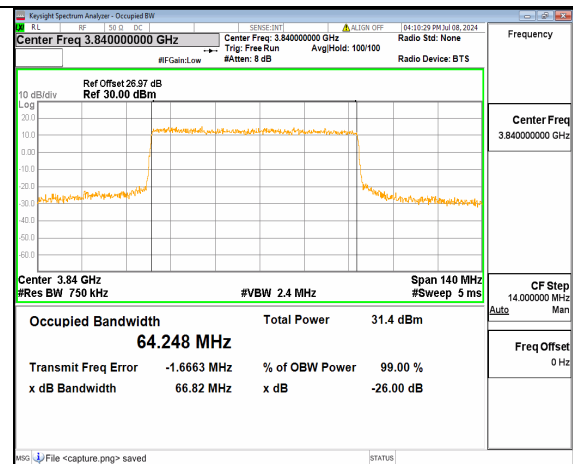
n77(3700-3980MHz) 70M DFT-s-OFDM BPSK
Outer_Full Lown77(3700-3980MHz) 70M DFT-s-OFDM QPSK
Outer_Full Lown77(3700-3980MHz) 70M DFT-s-OFDM
16QAM Outer_Full Lown77(3700-3980MHz) 70M DFT-s-OFDM
64QAM Outer_Full Lown77(3700-3980MHz) 70M DFT-s-OFDM
256QAM Outer_Full Lown77(3700-3980MHz) 70M CP-OFDM QPSK
Outer_Full Low

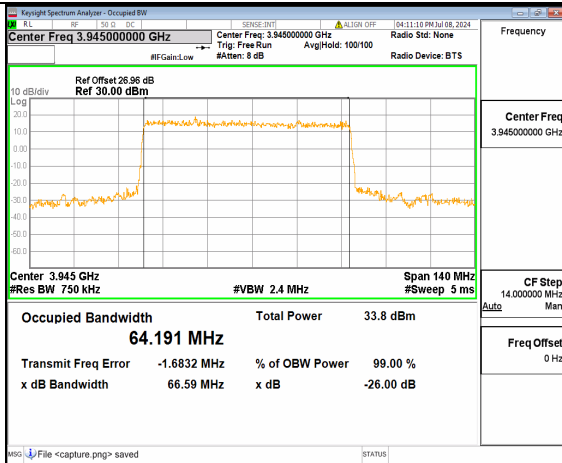
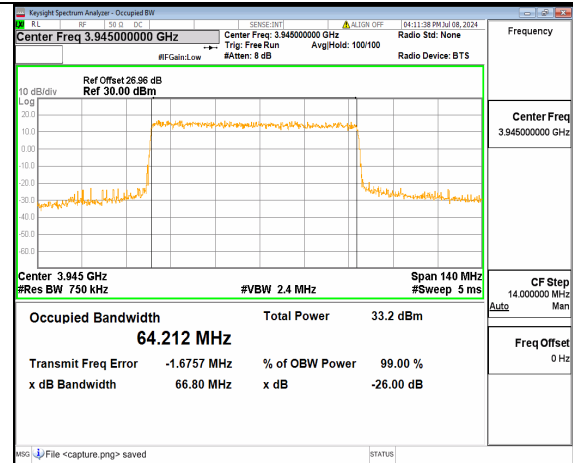
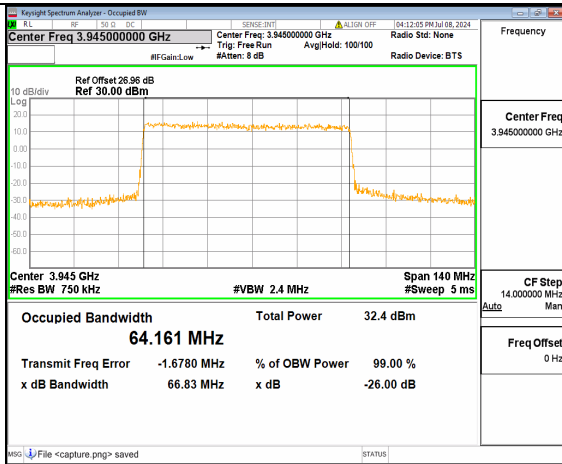
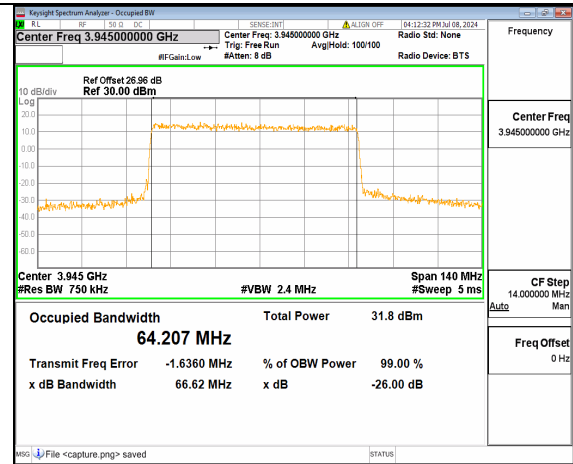
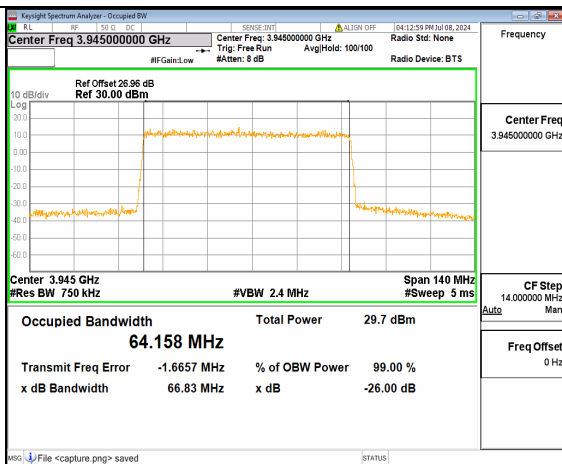
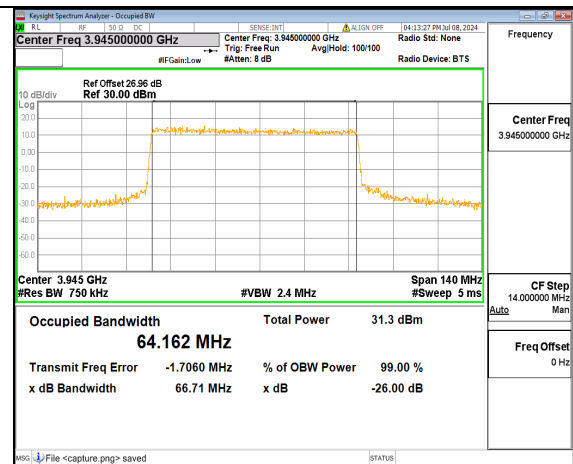
n77(3700-3980MHz) 70M DFT-s-OFDM BPSK
Outer_Full Midn77(3700-3980MHz) 70M DFT-s-OFDM QPSK
Outer_Full Midn77(3700-3980MHz) 70M DFT-s-OFDM
16QAM Outer_Full Midn77(3700-3980MHz) 70M DFT-s-OFDM
64QAM Outer_Full Midn77(3700-3980MHz) 70M DFT-s-OFDM
256QAM Outer_Full Midn77(3700-3980MHz) 70M CP-OFDM QPSK
Outer_Full Mid

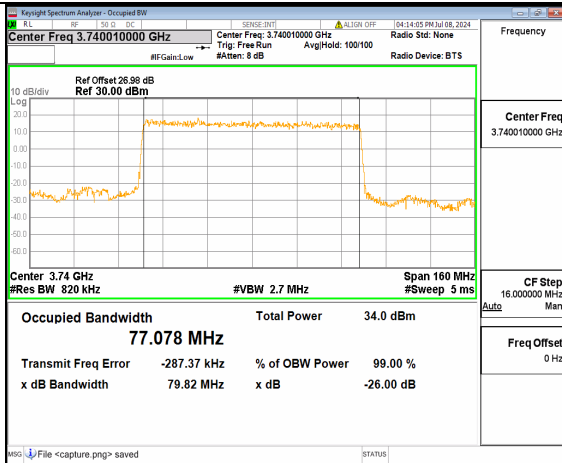
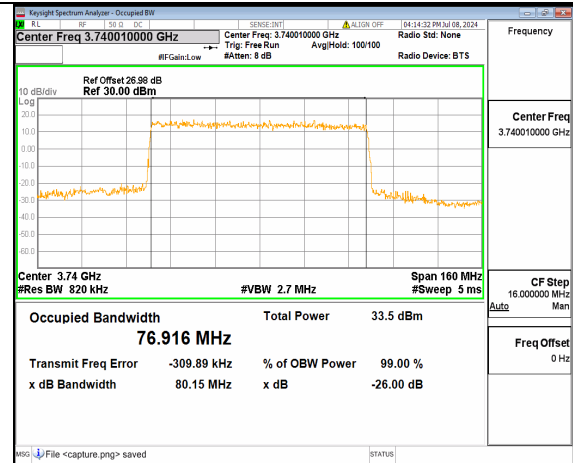
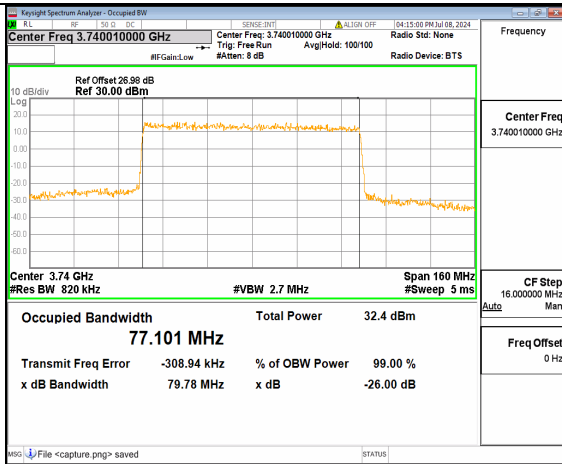
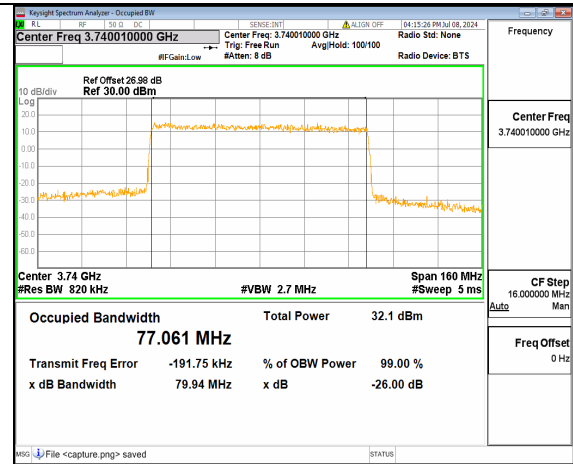
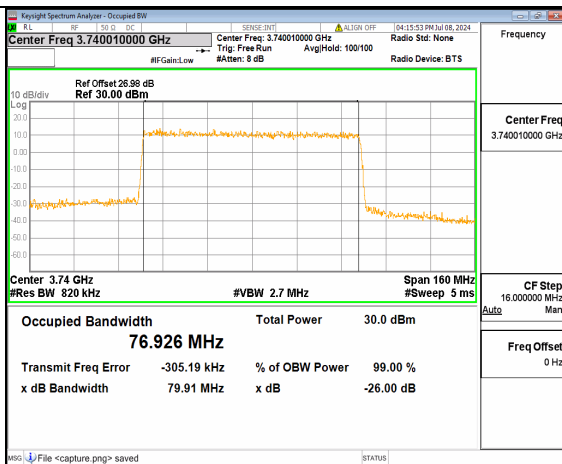
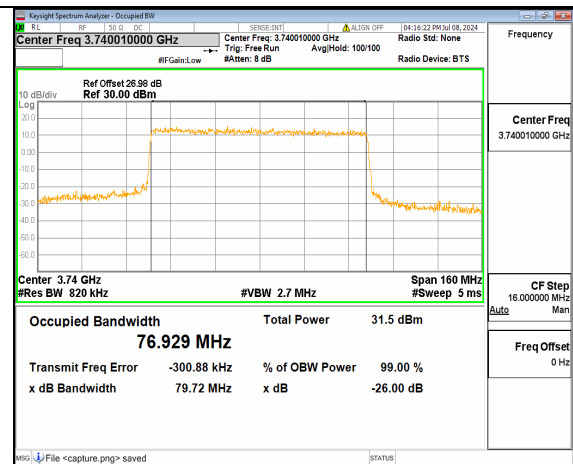
n77(3700-3980MHz) 70M DFT-s-OFDM BPSK
Outer_Full Highn77(3700-3980MHz) 70M DFT-s-OFDM QPSK
Outer_Full Highn77(3700-3980MHz) 70M DFT-s-OFDM
16QAM Outer_Full Highn77(3700-3980MHz) 70M DFT-s-OFDM
64QAM Outer_Full Highn77(3700-3980MHz) 70M DFT-s-OFDM
256QAM Outer_Full Highn77(3700-3980MHz) 70M CP-OFDM QPSK
Outer_Full High

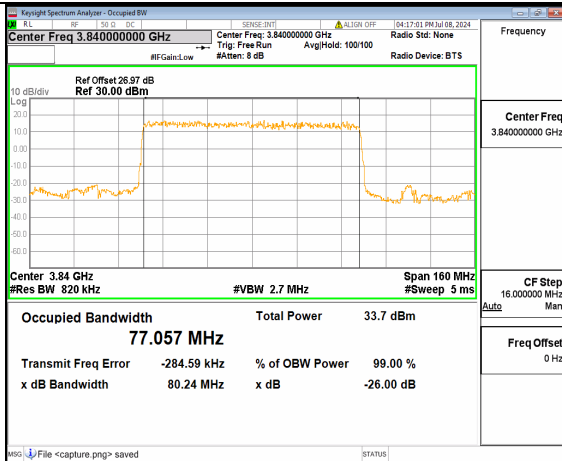
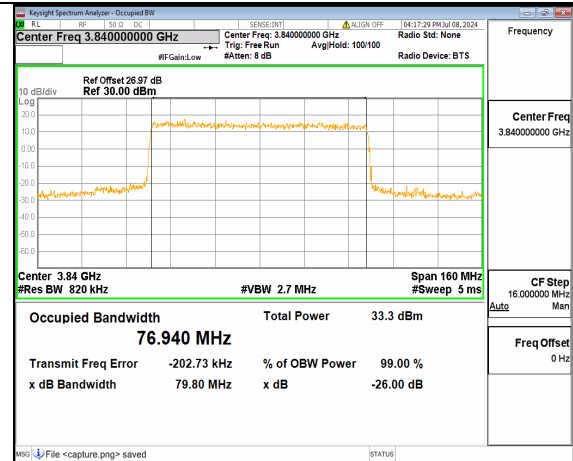
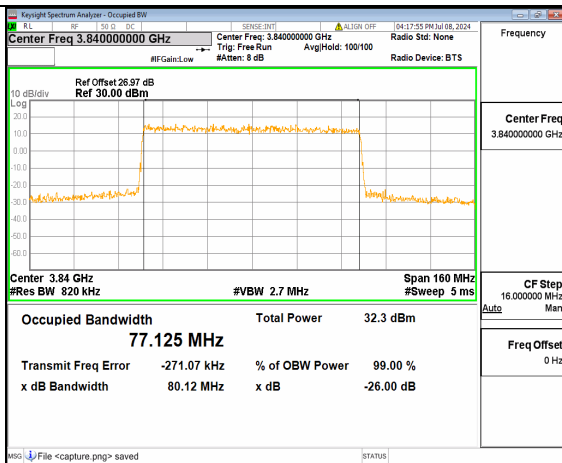
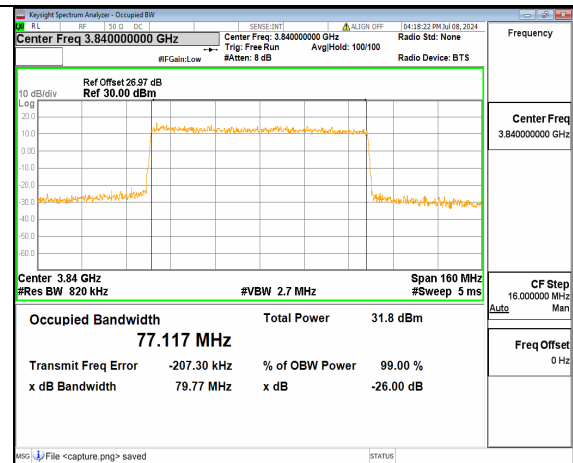
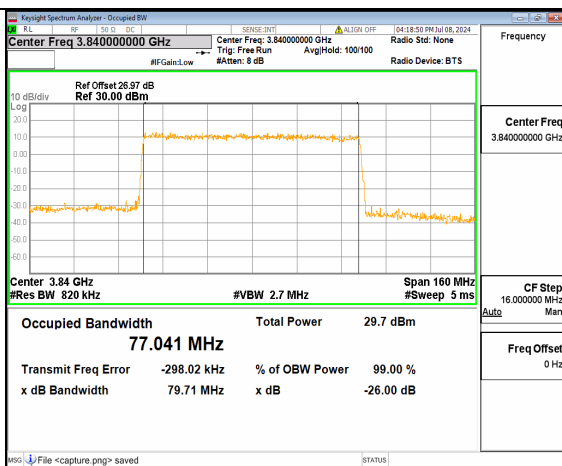
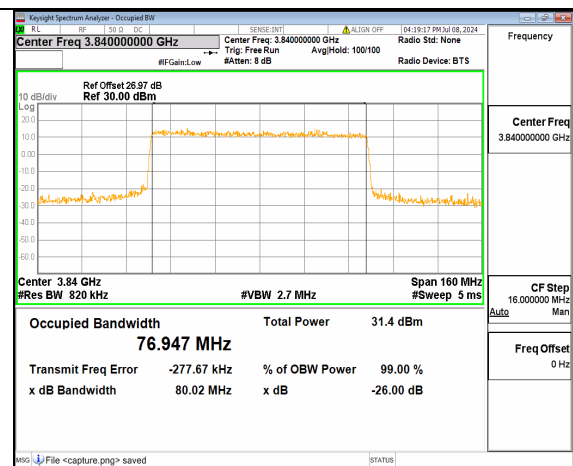
n77(3700-3980MHz) 80M DFT-s-OFDM BPSK
Outer_Full Lown77(3700-3980MHz) 80M DFT-s-OFDM QPSK
Outer_Full Lown77(3700-3980MHz) 80M DFT-s-OFDM
16QAM Outer_Full Lown77(3700-3980MHz) 80M DFT-s-OFDM
64QAM Outer_Full Lown77(3700-3980MHz) 80M DFT-s-OFDM
256QAM Outer_Full Lown77(3700-3980MHz) 80M CP-OFDM QPSK
Outer_Full Low

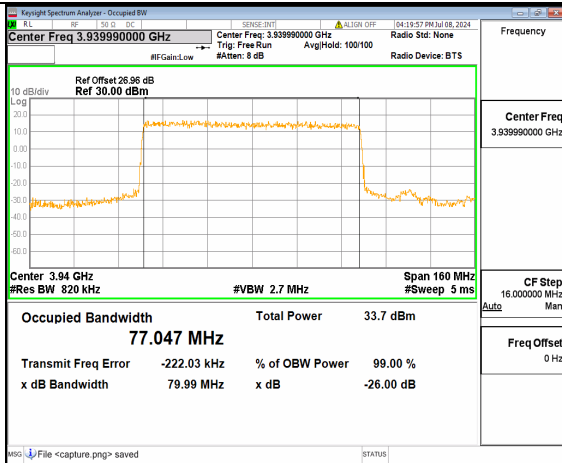
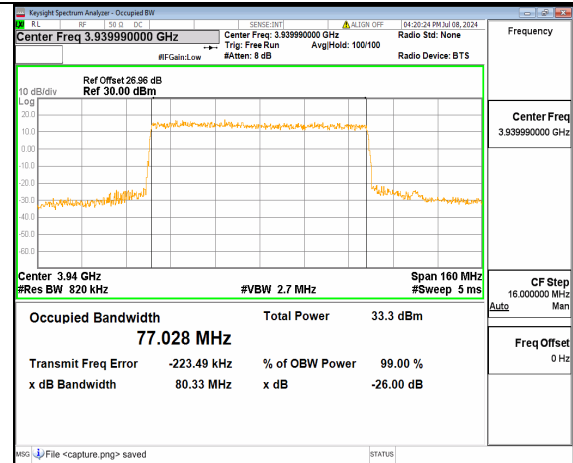
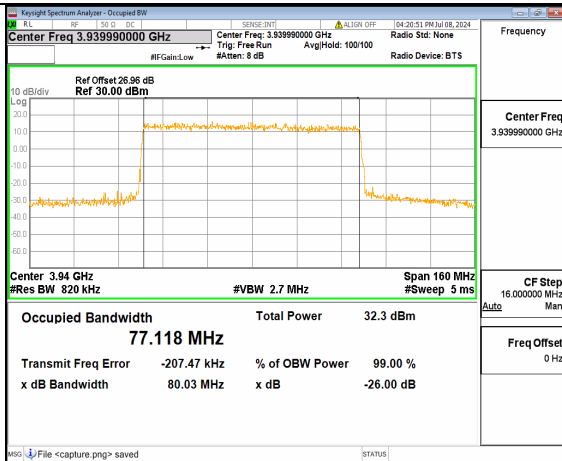
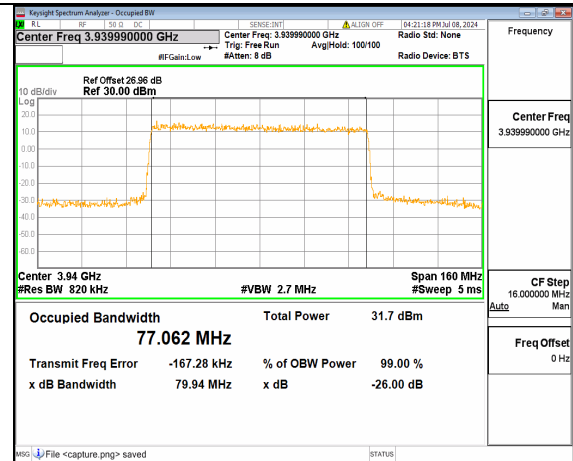
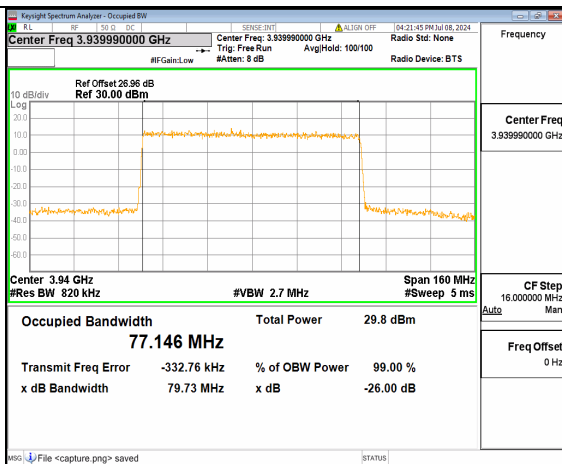
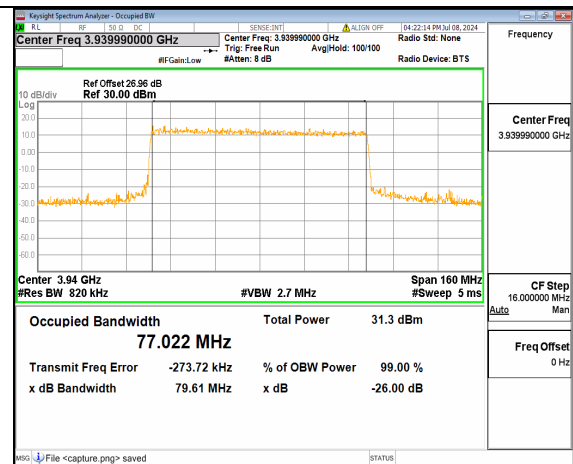
n77(3700-3980MHz) 80M DFT-s-OFDM BPSK
Outer_Full Midn77(3700-3980MHz) 80M DFT-s-OFDM QPSK
Outer_Full Midn77(3700-3980MHz) 80M DFT-s-OFDM
16QAM Outer_Full Midn77(3700-3980MHz) 80M DFT-s-OFDM
64QAM Outer_Full Midn77(3700-3980MHz) 80M DFT-s-OFDM
256QAM Outer_Full Midn77(3700-3980MHz) 80M CP-OFDM QPSK
Outer_Full Mid

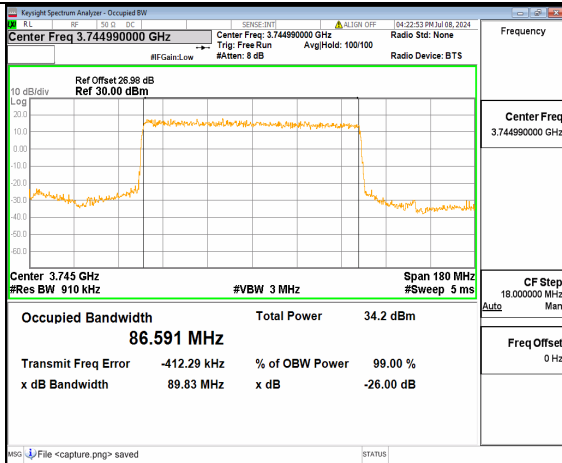
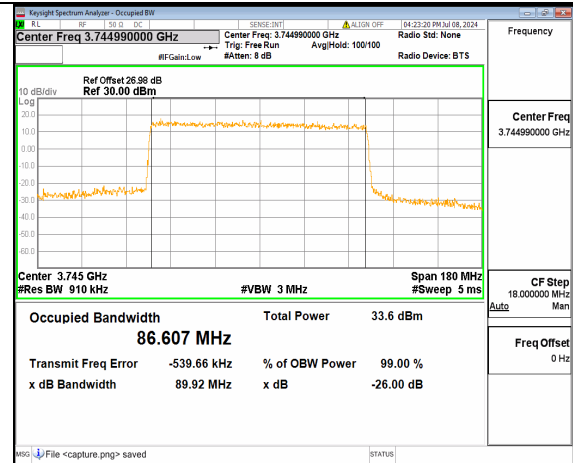
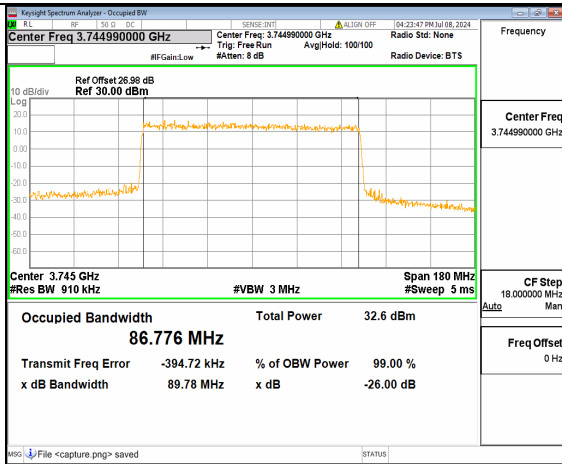
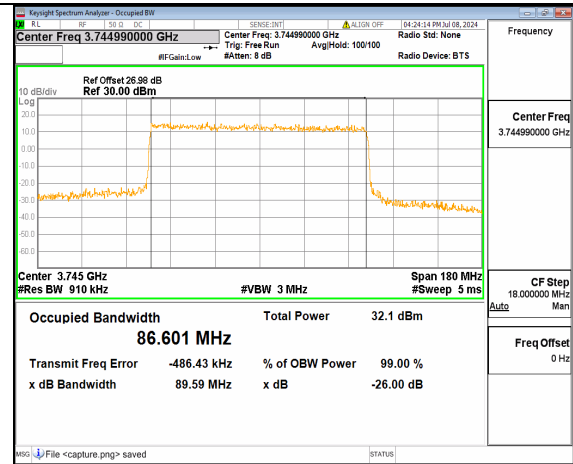
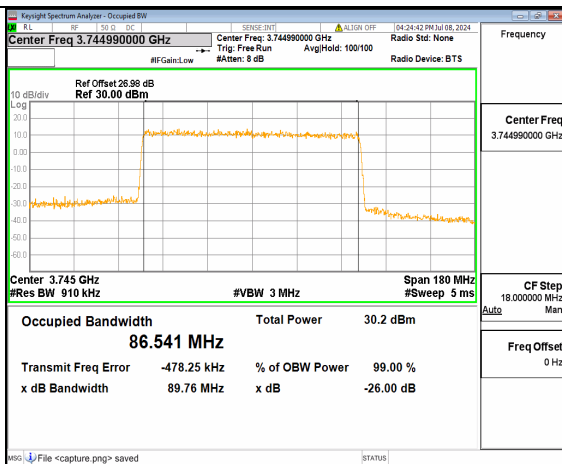
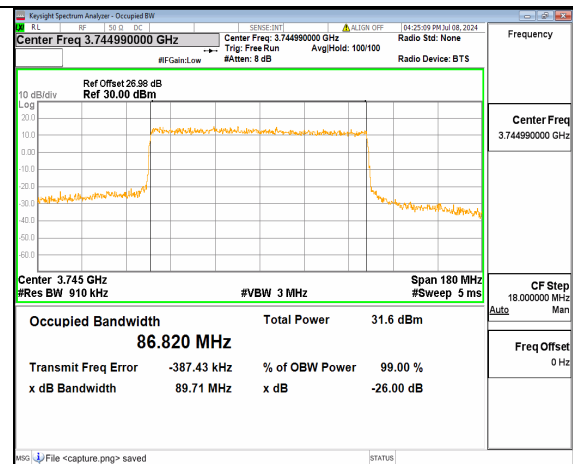
n77(3700-3980MHz) 80M DFT-s-OFDM BPSK
Outer_Full Highn77(3700-3980MHz) 80M DFT-s-OFDM QPSK
Outer_Full Highn77(3700-3980MHz) 80M DFT-s-OFDM
16QAM Outer_Full Highn77(3700-3980MHz) 80M DFT-s-OFDM
64QAM Outer_Full Highn77(3700-3980MHz) 80M DFT-s-OFDM
256QAM Outer_Full Highn77(3700-3980MHz) 80M CP-OFDM QPSK
Outer_Full High

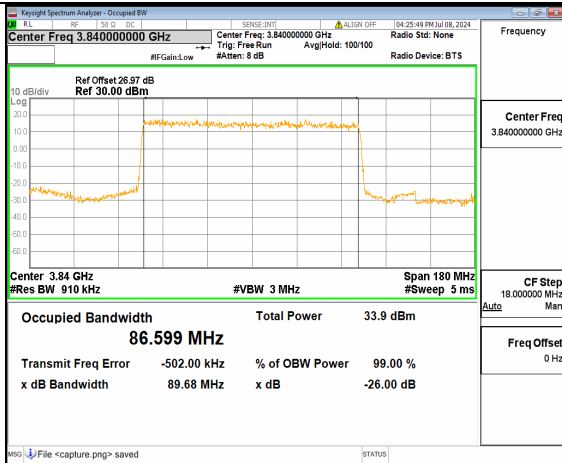
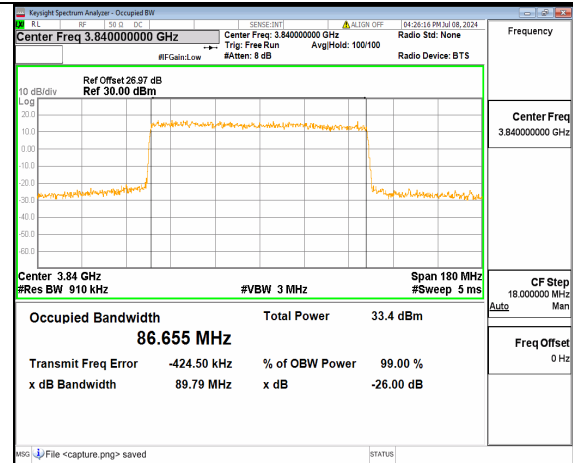
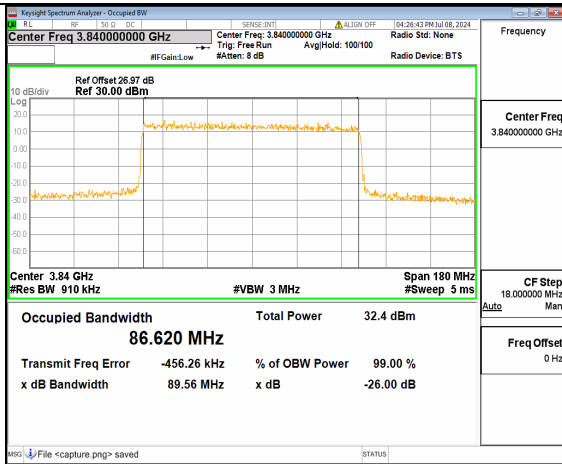
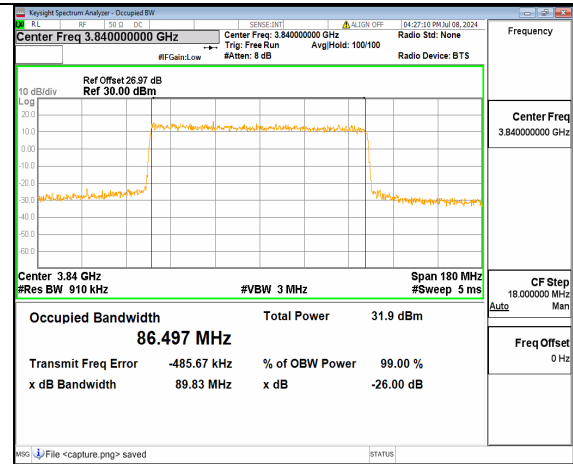
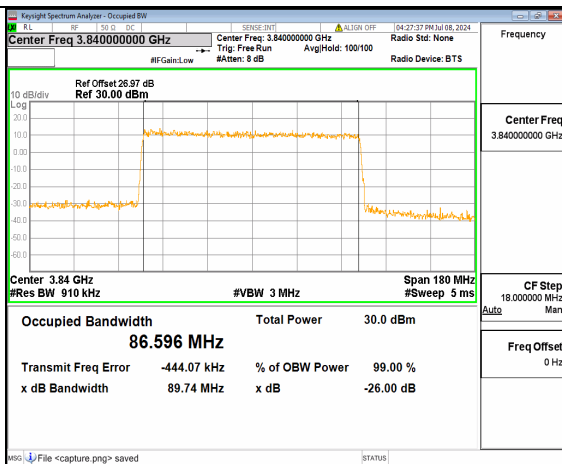
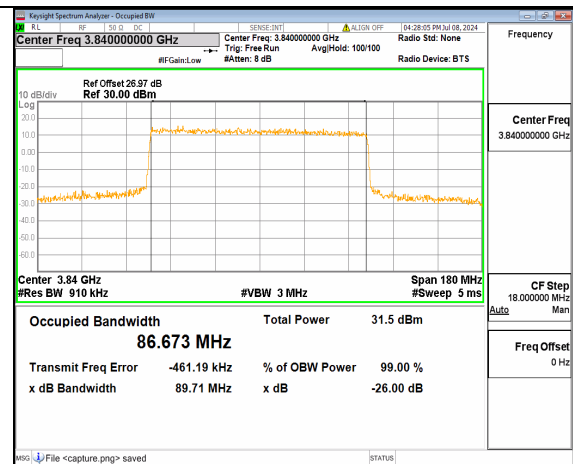
n77(3700-3980MHz) 90M DFT-s-OFDM BPSK
Outer_Full Lown77(3700-3980MHz) 90M DFT-s-OFDM QPSK
Outer_Full Lown77(3700-3980MHz) 90M DFT-s-OFDM
16QAM Outer_Full Lown77(3700-3980MHz) 90M DFT-s-OFDM
64QAM Outer_Full Lown77(3700-3980MHz) 90M DFT-s-OFDM
256QAM Outer_Full Lown77(3700-3980MHz) 90M CP-OFDM QPSK
Outer_Full Low

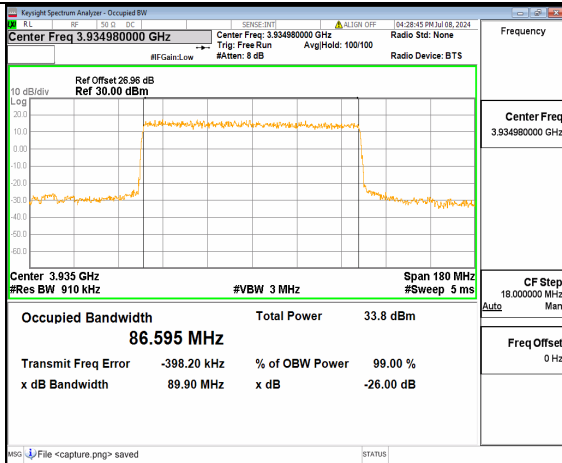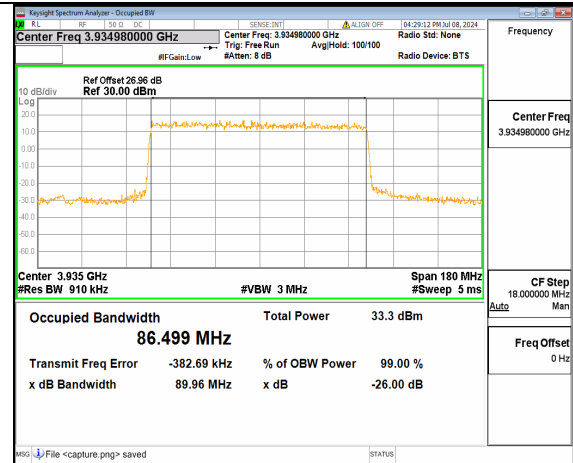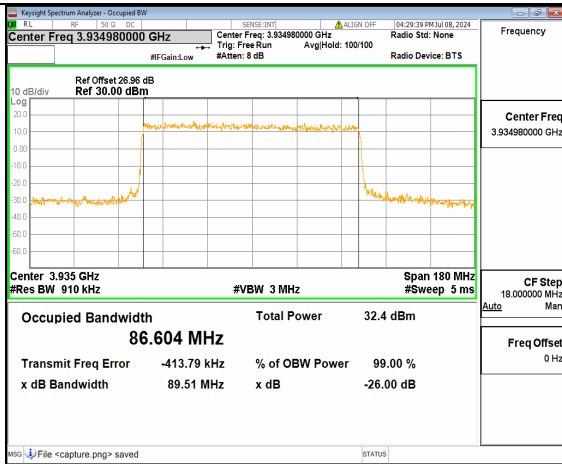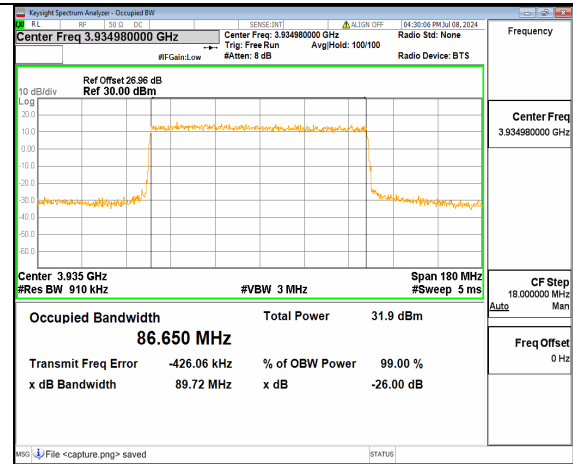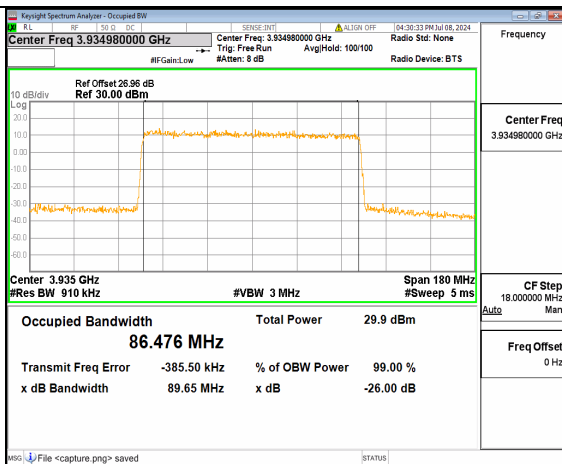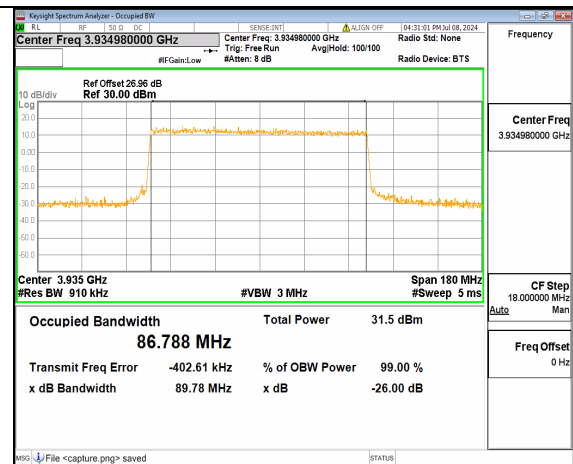n77(3700-3980MHz) 90M DFT-s-OFDM BPSK
Outer_Full Midn77(3700-3980MHz) 90M DFT-s-OFDM QPSK
Outer_Full Midn77(3700-3980MHz) 90M DFT-s-OFDM
16QAM Outer_Full Midn77(3700-3980MHz) 90M DFT-s-OFDM
64QAM Outer_Full Midn77(3700-3980MHz) 90M DFT-s-OFDM
256QAM Outer_Full Midn77(3700-3980MHz) 90M CP-OFDM QPSK
Outer_Full Mid

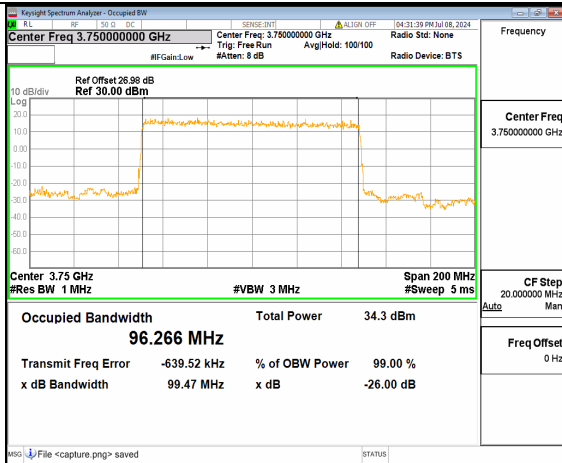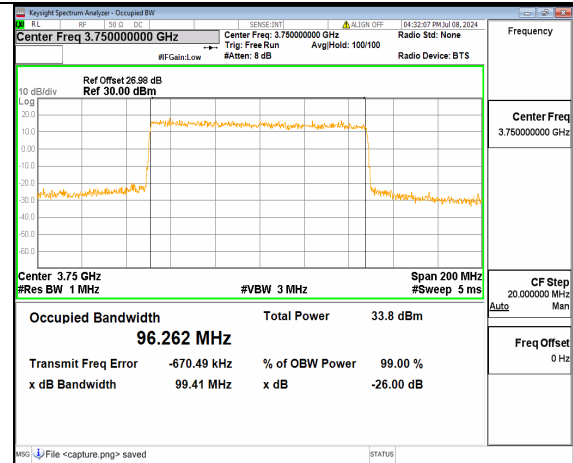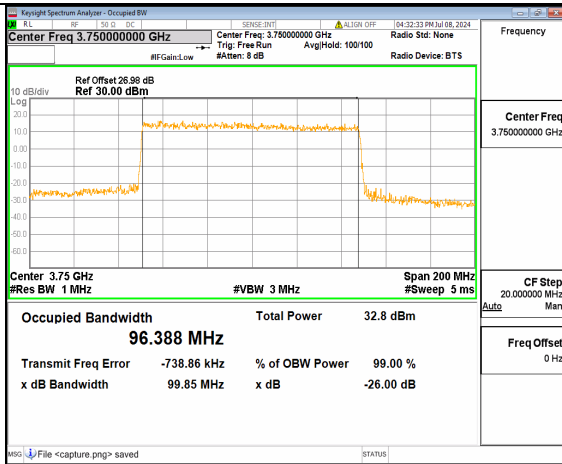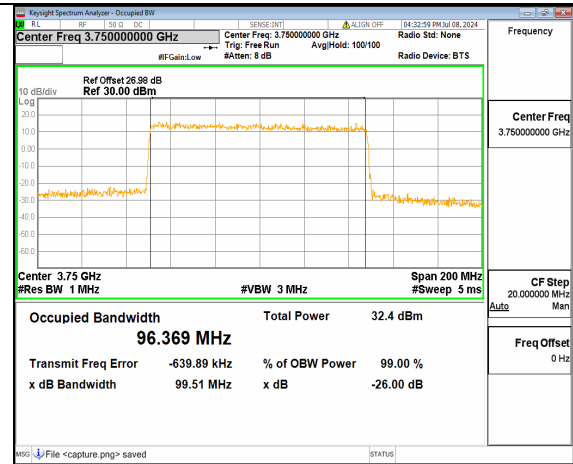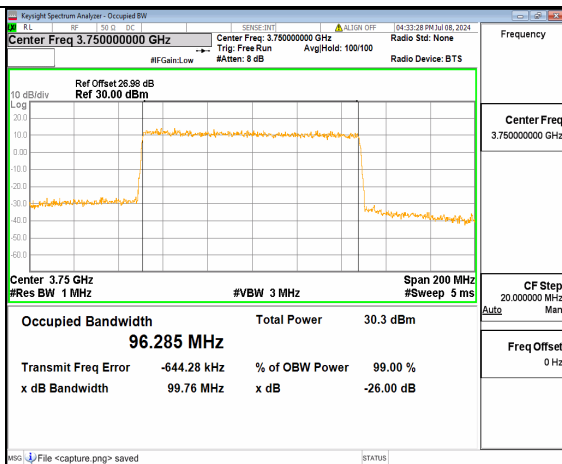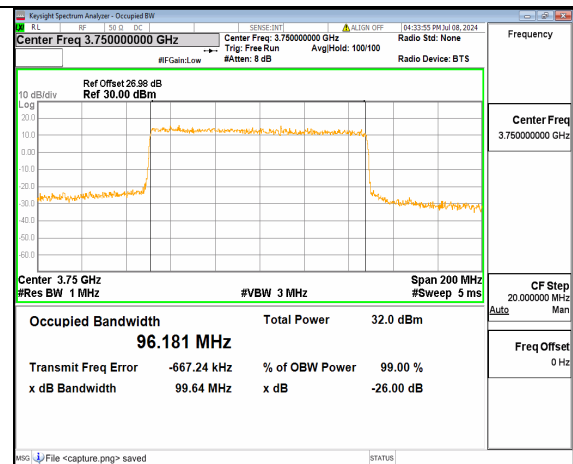
n77(3700-3980MHz) 90M DFT-s-OFDM BPSK
Outer_Full High

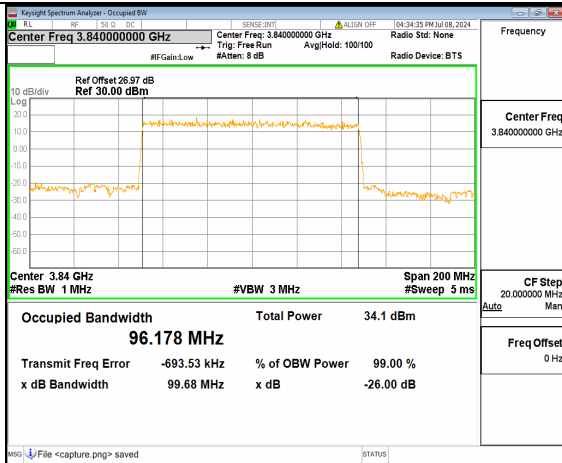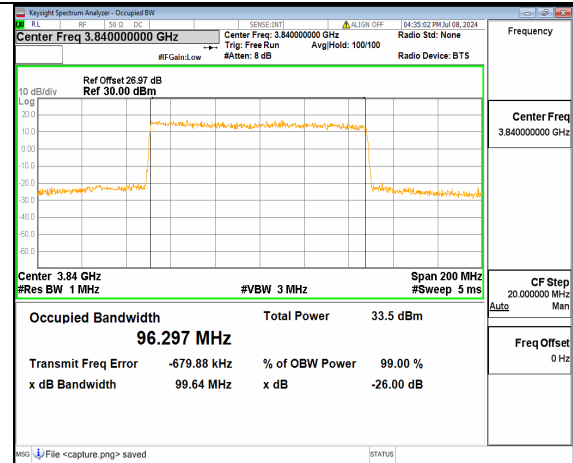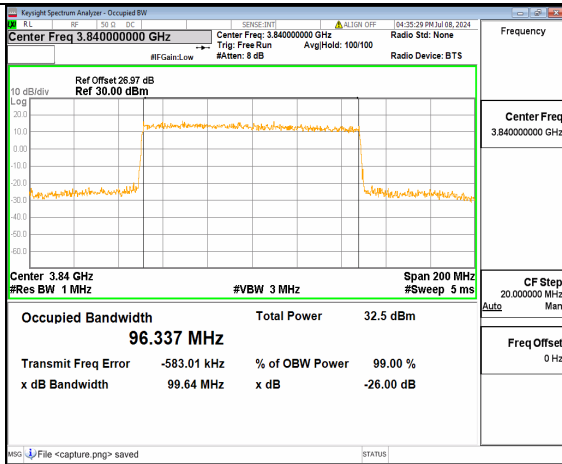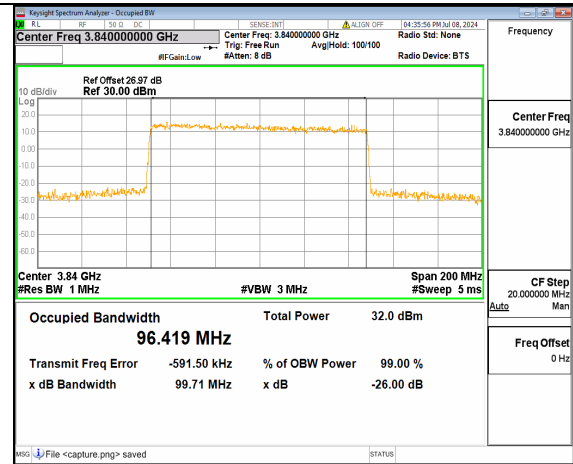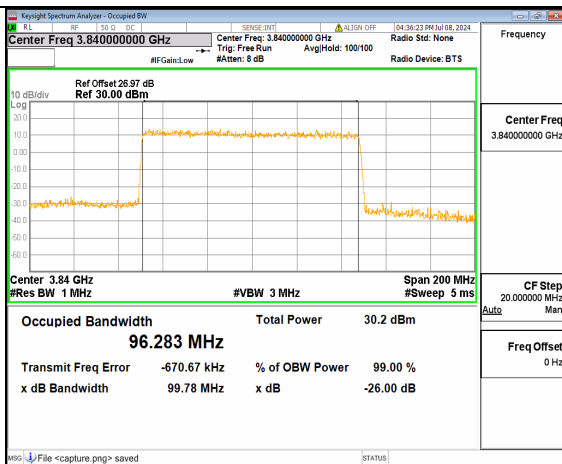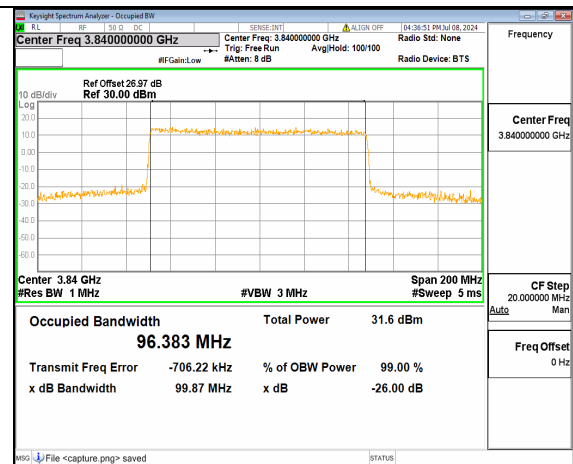n77(3700-3980MHz) 90M DFT-s-OFDM QPSK
Outer_Full High

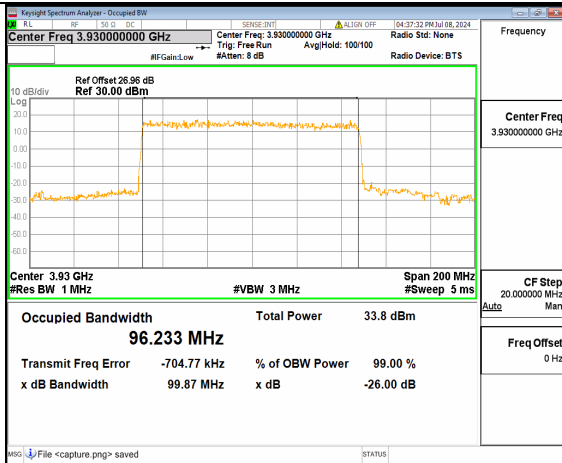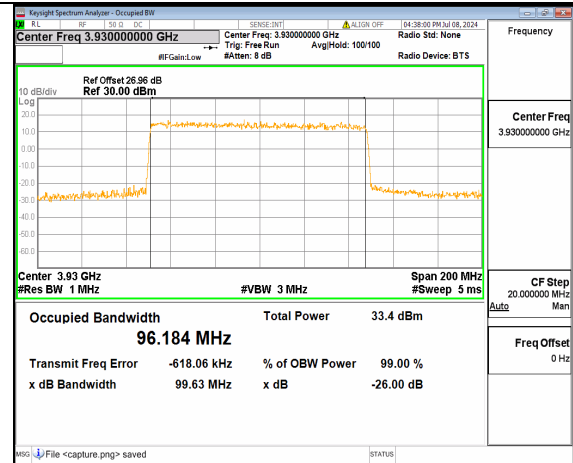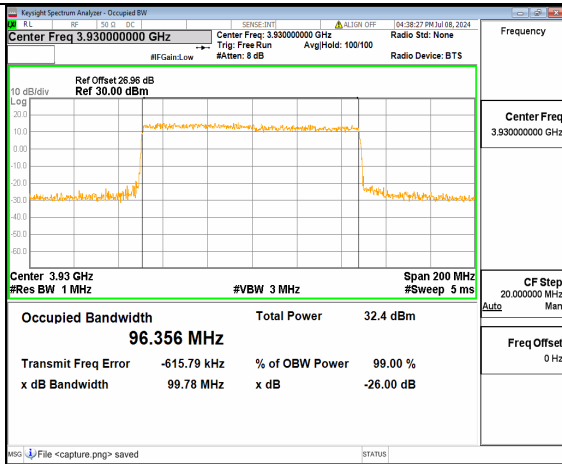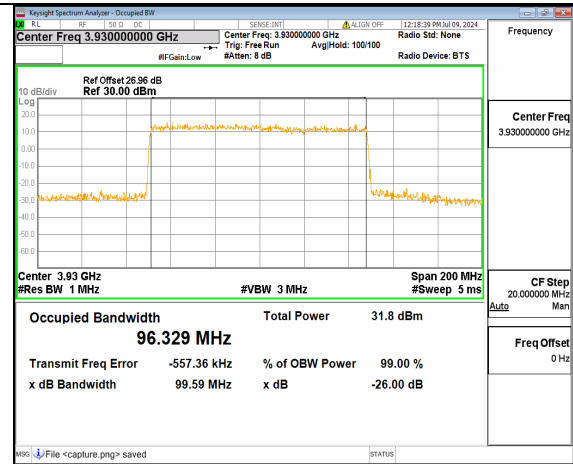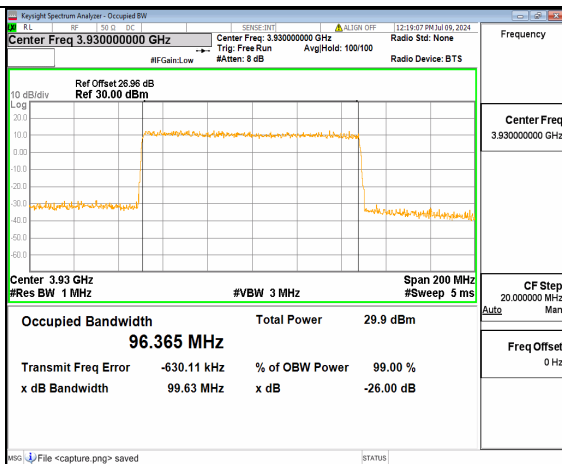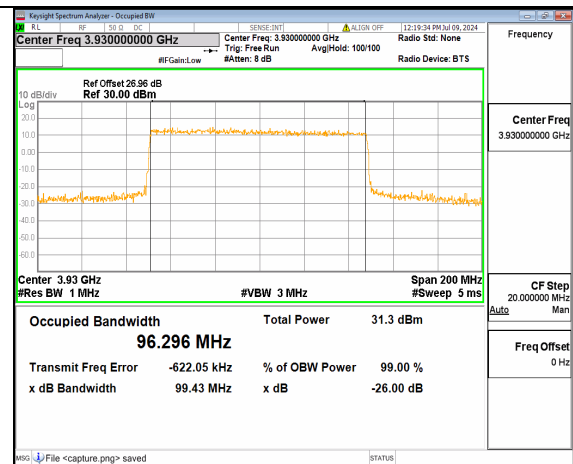n77(3700-3980MHz) 90M DFT-s-OFDM
16QAM Outer_Full High

n77(3700-3980MHz) 90M DFT-s-OFDM
64QAM Outer_Full High

n77(3700-3980MHz) 90M DFT-s-OFDM
256QAM Outer_Full High

n77(3700-3980MHz) 90M CP-OFDM QPSK
Outer_Full High

n77(3700-3980MHz) 100M DFT-s-OFDM
BPSK Outer_Full Lown77(3700-3980MHz) 100M DFT-s-OFDM
QPSK Outer_Full Lown77(3700-3980MHz) 100M DFT-s-OFDM
16QAM Outer_Full Lown77(3700-3980MHz) 100M DFT-s-OFDM
64QAM Outer_Full Lown77(3700-3980MHz) 100M DFT-s-OFDM
256QAM Outer_Full Lown77(3700-3980MHz) 100M CP-OFDM QPSK
Outer_Full Low

n77(3700-3980MHz) 100M DFT-s-OFDM
BPSK Outer_Full Midn77(3700-3980MHz) 100M DFT-s-OFDM
QPSK Outer_Full Midn77(3700-3980MHz) 100M DFT-s-OFDM
16QAM Outer_Full Midn77(3700-3980MHz) 100M DFT-s-OFDM
64QAM Outer_Full Midn77(3700-3980MHz) 100M DFT-s-OFDM
256QAM Outer_Full Midn77(3700-3980MHz) 100M CP-OFDM QPSK
Outer_Full Mid

n77(3700-3980MHz) 100M DFT-s-OFDM
BPSK Outer_Full Highn77(3700-3980MHz) 100M DFT-s-OFDM
QPSK Outer_Full Highn77(3700-3980MHz) 100M DFT-s-OFDM
16QAM Outer_Full Highn77(3700-3980MHz) 100M DFT-s-OFDM
64QAM Outer_Full Highn77(3700-3980MHz) 100M DFT-s-OFDM
256QAM Outer_Full Highn77(3700-3980MHz) 100M CP-OFDM QPSK
Outer_Full High

2.3. Frequency Stability

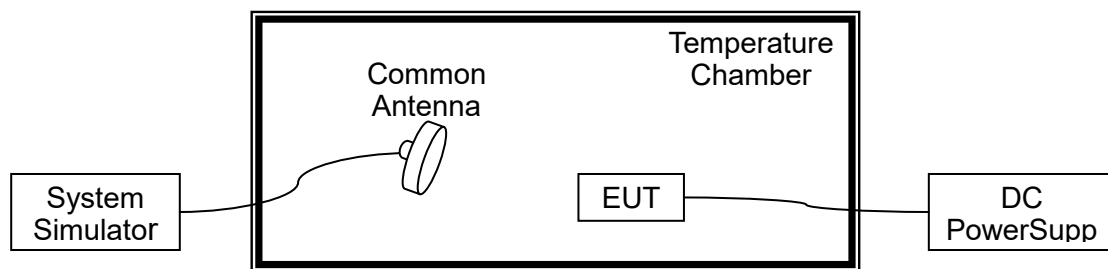
2.3.1. Requirement

According to FCC section 2.1055, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. According to FCC section 2.1055, the test conditions are:

- (a) The temperature is varied from -30°C to $+50^{\circ}\text{C}$ at intervals of not more than 10°C .
- (b) For hand carried battery powered equipment, the primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacture. The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

Note: The operating temperature of EUT is from 0°C to 40°C , which are specified by the applicant.

2.3.2. Test Description



The EUT which is powered by the DC Power Supply directly is located in the Temperature Chamber. The EUT is commanded by the System Simulator (SS) to operate at the maximum output power. A call is established between the EUT and the SS via a Common Antenna.

2.3.3. Test procedure

KDB 971168 D01v03 Section 9.0 and ANSI/TIA-603-E-2016.

2.3.4. Test Result

The nominal, highest and lowest extreme voltages are separately 3.80VDC, 4.30VDC and 3.60VDC, which are specified by the applicant; the normal temperature here used is 20°C .



n2, QPSK, Channel 376000, SCS 15kHz, Frequency 1880.0MHz Limit =Within Authorized Band					
Voltage (%)	Power (VDC)	Temp (°C)	Fre. Dev. (Hz)	Deviation (ppm)	Result
Normal	3.85	+20(Ref)	15	0.008	PASS
Normal		0	20	0.011	
Normal		+10	23	0.012	
Normal		+20	-21	-0.011	
Normal		+30	-10	-0.005	
Normal		+40	18	0.010	
High	4.40	+20	16	0.009	
BATT.ENDPOINT	3.60	+20	-9	-0.005	

n5, QPSK, Channel 167300, SCS 15kHz, Frequency 836.5 MHz Limit=±2.5ppm					
Voltage (%)	Power (VDC)	Temp (°C)	Fre. Dev. (Hz)	Deviation (ppm)	Result
Normal	3.85	+20(Ref)	17	0.020	PASS
Normal		0	15	0.018	
Normal		+10	-20	-0.024	
Normal		+20	-22	-0.026	
Normal		+30	2	0.002	
Normal		+40	15	0.018	
High	4.40	+20	-10	-0.012	
BATT.ENDPOINT	3.60	+20	18	0.022	

NR n48, QPSK, Channel 641666, SCS 30kHz, Frequency 3624.99MHz Limit =Within Authorized Band					
Voltage (%)	Power (VDC)	Temp (°C)	Fre. Dev. (Hz)	Deviation (ppm)	Result
Normal	3.85	+20(Ref)	20	0.006	PASS
Normal		0	-20	-0.006	
Normal		+10	4	0.001	
Normal		+20	19	0.005	
Normal		+30	-10	-0.003	
Normal		+40	19	0.005	
High	4.40	+20	15	0.004	
BATT.ENDPOINT	3.60	+20	11	0.003	



n66, QPSK, Channel 349000, SCS 15kHz, Frequency 1745MHz Limit=±2.5ppm					
Voltage (%)	Power (VDC)	Temp (°C)	Fre. Dev. (Hz)	Deviation (ppm)	Result
Normal	3.85	+20(Ref)	14	0.008	PASS
Normal		0	23	0.013	
Normal		+10	-3	-0.002	
Normal		+20	16	0.009	
Normal		+30	17	0.010	
Normal		+40	13	0.007	
High	4.40	+20	-20	-0.011	
BATT.ENDPOINT	3.60	+20	-1	-0.001	

n77(3450-3550MHz), QPSK, Channel 633334, SCS 30kHz, Frequency 3550MHz Limit =Within Authorized Band					
Voltage (%)	Power (VDC)	Temp (°C)	Fre. Dev. (Hz)	Deviation (ppm)	Result
Normal	3.85	+20(Ref)	-14	-0.004	PASS
Normal		0	4	0.001	
Normal		+10	20	0.005	
Normal		+20	20	0.005	
Normal		+30	-23	-0.006	
Normal		+40	-10	-0.003	
High	4.40	+20	13	0.003	
BATT.ENDPOINT	3.60	+20	-2	-0.001	

n77(3700-3980MHz), QPSK, Channel 656000, SCS 30kHz, Frequency 3840MHz Limit =Within Authorized Band					
Voltage (%)	Power (VDC)	Temp (°C)	Fre. Dev. (Hz)	Deviation (ppm)	Result
Normal	3.85	+20(Ref)	-2	-0.001	PASS
Normal		0	20	0.006	
Normal		+10	15	0.004	
Normal		+20	18	0.005	
Normal		+30	14	0.004	
Normal		+40	13	0.004	
High	4.40	+20	14	0.004	
BATT.ENDPOINT	3.60	+20	-3	-0.001	

2.4. Peak to Average Ratio

2.4.1. Requirement

According to FCC section 24.232(d) for n2, in measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

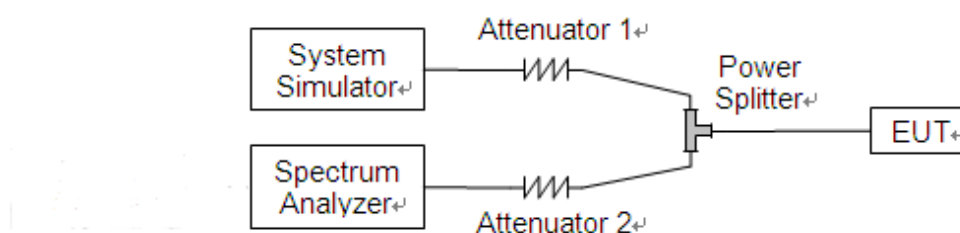
According to FCC section 27.50(d)(5) for n66, in measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

According to FCC section 96.41(g) for n48, the peak-to-average power ratio (PAPR) of any CBSD transmitter output power must not exceed 13 dB. PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities or another Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.

According to FCC section 27.50(j)(4) and 25.50(k)(4) for n77, in measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

2.4.2. Test Description

Test Set:



The EUT is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power. A call is established between the EUT and the SS.

2.4.3. Test procedure

KDB 971168 D01v03 Section 5.7 and ANSI/TIA-603-E-2016.

2.4.4. Test Result

Record the maximum PAPR level associated with a probability of 0.1%.

Band	SCS (kHz)	BW (MHz)	ARFCN	Modulation	RB	Result (dB)	Limit (dB)	Verdict
n2	15	5	370500	DFT-s-OFDM PI/2 BPSK	25/0	4.73	13	PASS
n2	15	5	370500	DFT-s-OFDM 256QAM	25/0	6.76	13	PASS
n2	15	5	370500	CP-OFDM QPSK	25/0	7.53	13	PASS
n2	15	5	370500	CP-OFDM 256QAM	25/0	8.67	13	PASS
n2	15	5	376000	DFT-s-OFDM PI/2 BPSK	25/0	4.49	13	PASS
n2	15	5	376000	DFT-s-OFDM 256QAM	25/0	6.61	13	PASS
n2	15	5	376000	CP-OFDM QPSK	25/0	7.23	13	PASS
n2	15	5	376000	CP-OFDM 256QAM	25/0	8.64	13	PASS
n2	15	5	381500	DFT-s-OFDM PI/2 BPSK	25/0	4.67	13	PASS
n2	15	5	381500	DFT-s-OFDM 256QAM	25/0	6.64	13	PASS
n2	15	5	381500	CP-OFDM QPSK	25/0	8.18	13	PASS
n2	15	5	381500	CP-OFDM 256QAM	25/0	8.65	13	PASS
n2	15	10	371000	DFT-s-OFDM PI/2 BPSK	50/0	4.28	13	PASS
n2	15	10	371000	DFT-s-OFDM 256QAM	50/0	6.9	13	PASS




n2	15	10	371000	CP-OFDM QPSK	52/0	7.64	13	PASS
n2	15	10	371000	CP-OFDM 256QAM	52/0	8.76	13	PASS
n2	15	10	376000	DFT-s-OFDM PI/2 BPSK	50/0	4.35	13	PASS
n2	15	10	376000	DFT-s-OFDM 256QAM	50/0	6.69	13	PASS
n2	15	10	376000	CP-OFDM QPSK	52/0	7.57	13	PASS
n2	15	10	376000	CP-OFDM 256QAM	52/0	8.78	13	PASS
n2	15	10	381000	DFT-s-OFDM PI/2 BPSK	50/0	4.78	13	PASS
n2	15	10	381000	DFT-s-OFDM 256QAM	50/0	6.95	13	PASS
n2	15	10	381000	CP-OFDM QPSK	52/0	7.62	13	PASS
n2	15	10	381000	CP-OFDM 256QAM	52/0	8.73	13	PASS
n2	15	15	371500	DFT-s-OFDM PI/2 BPSK	75/0	4.24	13	PASS
n2	15	15	371500	DFT-s-OFDM 256QAM	75/0	6.63	13	PASS
n2	15	15	371500	CP-OFDM QPSK	79/0	7.45	13	PASS
n2	15	15	371500	CP-OFDM 256QAM	79/0	8.4	13	PASS
n2	15	15	376000	DFT-s-OFDM PI/2 BPSK	75/0	4.24	13	PASS
n2	15	15	376000	DFT-s-OFDM 256QAM	75/0	6.53	13	PASS
n2	15	15	376000	CP-OFDM QPSK	79/0	7.53	13	PASS
n2	15	15	376000	CP-OFDM 256QAM	79/0	8.36	13	PASS
n2	15	15	380500	DFT-s-OFDM PI/2 BPSK	75/0	4.24	13	PASS
n2	15	15	380500	DFT-s-OFDM 256QAM	75/0	6.58	13	PASS




n2	15	15	380500	CP-OFDM QPSK	79/0	7.47	13	PASS
n2	15	15	380500	CP-OFDM 256QAM	79/0	8.31	13	PASS
n2	15	20	372000	DFT-s-OFDM PI/2 BPSK	100/0	4.17	13	PASS
n2	15	20	372000	DFT-s-OFDM 256QAM	100/0	6.83	13	PASS
n2	15	20	372000	CP-OFDM QPSK	106/0	7.47	13	PASS
n2	15	20	372000	CP-OFDM 256QAM	106/0	8.35	13	PASS
n2	15	20	376000	DFT-s-OFDM PI/2 BPSK	100/0	4.19	13	PASS
n2	15	20	376000	DFT-s-OFDM 256QAM	100/0	6.67	13	PASS
n2	15	20	376000	CP-OFDM QPSK	106/0	7.54	13	PASS
n2	15	20	376000	CP-OFDM 256QAM	106/0	8.39	13	PASS
n2	15	20	380000	DFT-s-OFDM PI/2 BPSK	100/0	3.81	13	PASS
n2	15	20	380000	DFT-s-OFDM 256QAM	100/0	6.55	13	PASS
n2	15	20	380000	CP-OFDM QPSK	106/0	7.56	13	PASS
n2	15	20	380000	CP-OFDM 256QAM	106/0	8.43	13	PASS
n2	15	25	372500	DFT-s-OFDM PI/2 BPSK	128/0	4.53	13	PASS
n2	15	25	372500	DFT-s-OFDM 256QAM	128/0	6.65	13	PASS
n2	15	25	372500	CP-OFDM QPSK	133/0	7.62	13	PASS
n2	15	25	372500	CP-OFDM 256QAM	133/0	8.7	13	PASS
n2	15	25	376000	DFT-s-OFDM PI/2 BPSK	128/0	4.46	13	PASS
n2	15	25	376000	DFT-s-OFDM 256QAM	128/0	6.54	13	PASS




n2	15	25	376000	CP-OFDM QPSK	133/0	7.52	13	PASS
n2	15	25	376000	CP-OFDM 256QAM	133/0	8.58	13	PASS
n2	15	25	379500	DFT-s-OFDM PI/2 BPSK	128/0	4.05	13	PASS
n2	15	25	379500	DFT-s-OFDM 256QAM	128/0	6.58	13	PASS
n2	15	25	379500	CP-OFDM QPSK	133/0	7.58	13	PASS
n2	15	25	379500	CP-OFDM 256QAM	133/0	8.72	13	PASS
n2	15	30	373000	DFT-s-OFDM PI/2 BPSK	160/0	4.5	13	PASS
n2	15	30	373000	DFT-s-OFDM 256QAM	160/0	6.71	13	PASS
n2	15	30	373000	CP-OFDM QPSK	160/0	7.65	13	PASS
n2	15	30	373000	CP-OFDM 256QAM	160/0	8.4	13	PASS
n2	15	30	376000	DFT-s-OFDM PI/2 BPSK	160/0	4.5	13	PASS
n2	15	30	376000	DFT-s-OFDM 256QAM	160/0	6.46	13	PASS
n2	15	30	376000	CP-OFDM QPSK	160/0	7.47	13	PASS
n2	15	30	376000	CP-OFDM 256QAM	160/0	8.44	13	PASS
n2	15	30	379000	DFT-s-OFDM PI/2 BPSK	160/0	4.03	13	PASS
n2	15	30	379000	DFT-s-OFDM 256QAM	160/0	6.64	13	PASS
n2	15	30	379000	CP-OFDM QPSK	160/0	7.68	13	PASS
n2	15	30	379000	CP-OFDM 256QAM	160/0	8.43	13	PASS

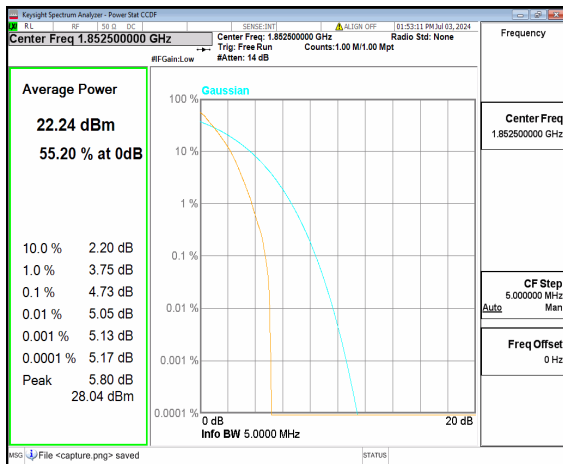


n2 5M DFT-s-OFDM BPSK Outer_Full Low

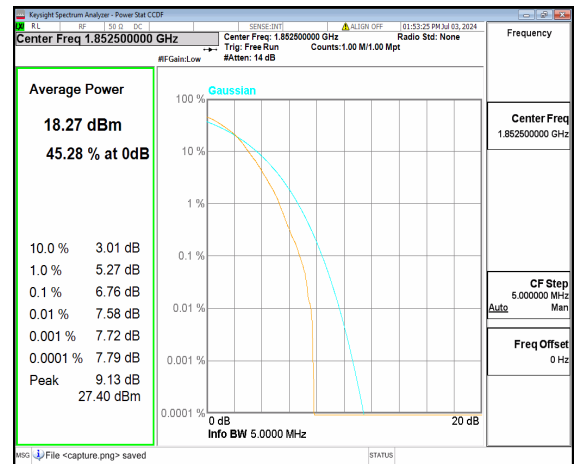


n2 5M DFT-s-OFDM 256QAM Outer_Full Low

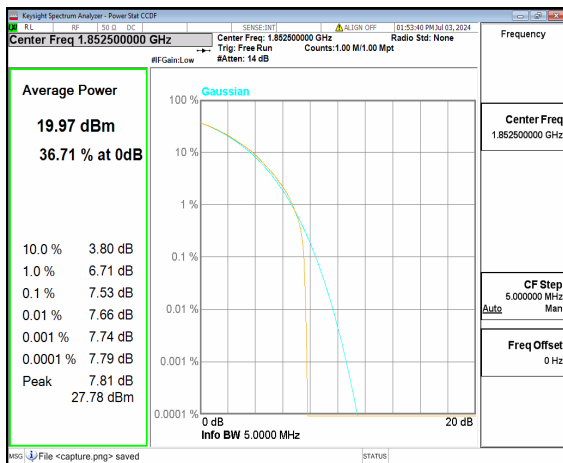


n2 5M CP-OFDM QPSK Outer_Full Low

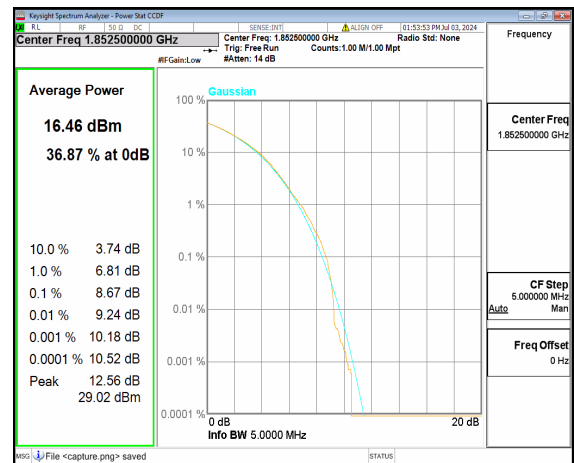


n2 5M CP-OFDM 256QAM Outer_Full Low

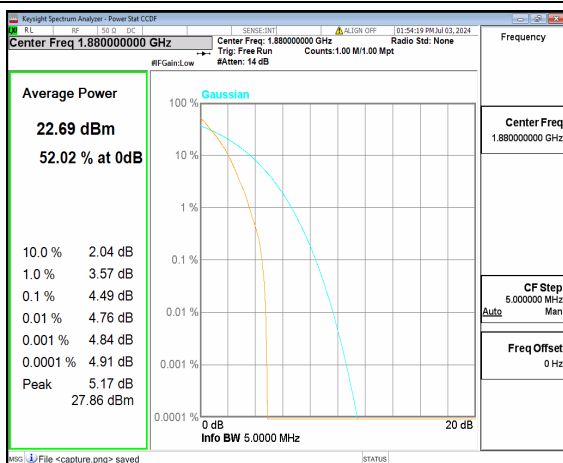


n2 5M DFT-s-OFDM BPSK Outer_Full Mid

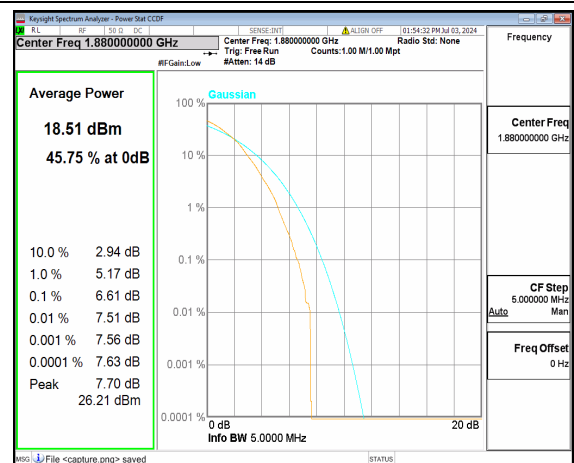


n2 5M DFT-s-OFDM 256QAM Outer_Full Mid

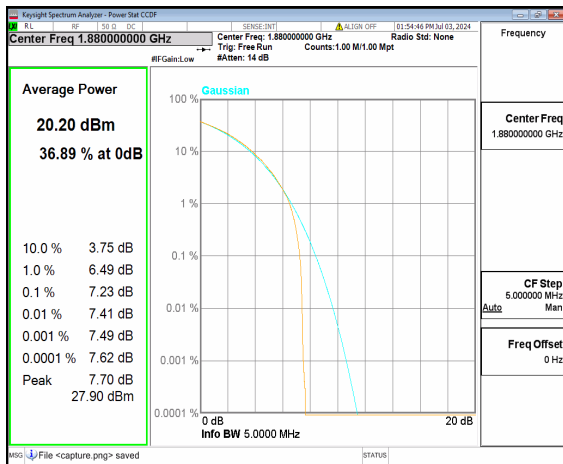


n2 5M CP-OFDM QPSK Outer_Full Mid

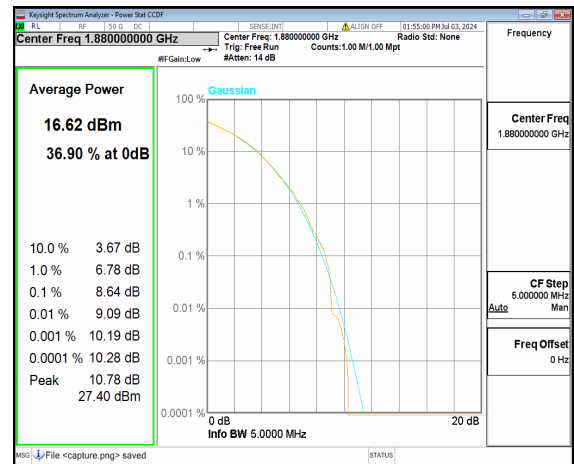


n2 5M CP-OFDM 256QAM Outer_Full Mid

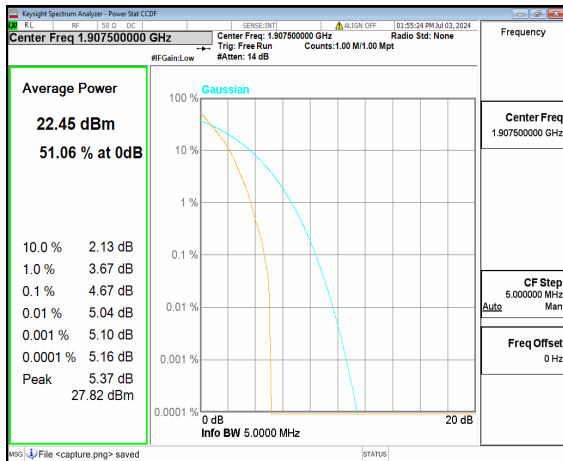


n2 5M DFT-s-OFDM BPSK Outer_Full High

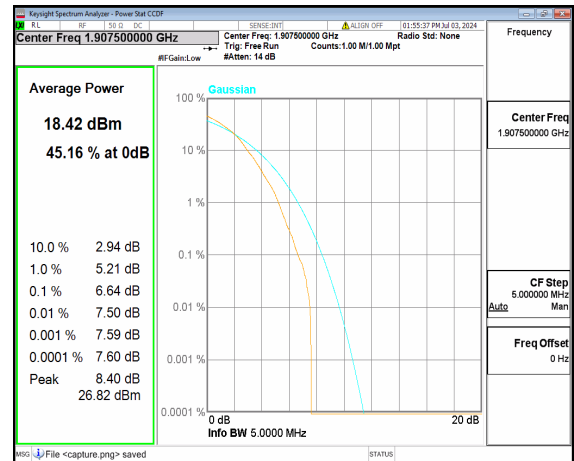


n2 5M DFT-s-OFDM 256QAM Outer_Full High

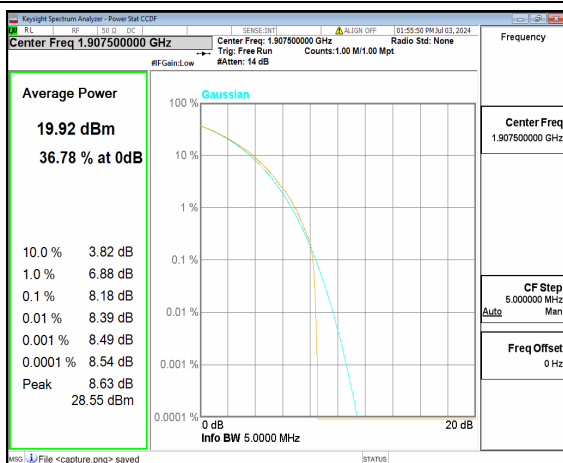


n2 5M CP-OFDM QPSK Outer_Full High

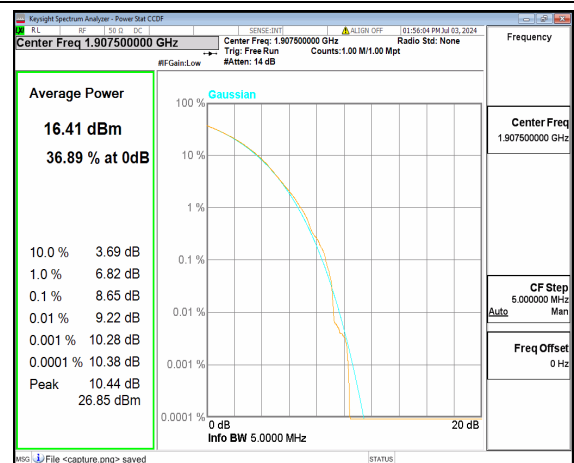


n2 5M CP-OFDM 256QAM Outer_Full High

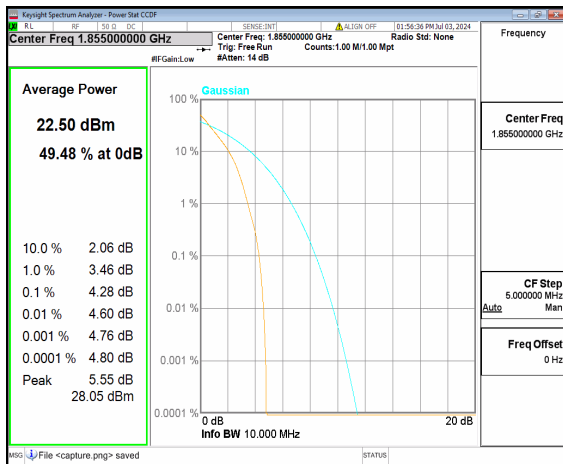


n2 10M DFT-s-OFDM BPSK Outer_Full Low

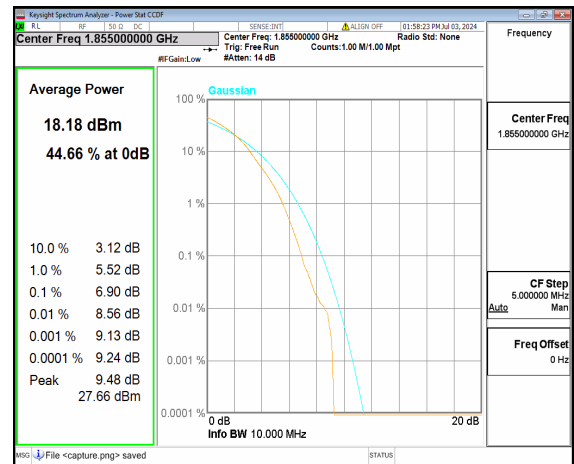


n2 10M DFT-s-OFDM 256QAM Outer_Full Low

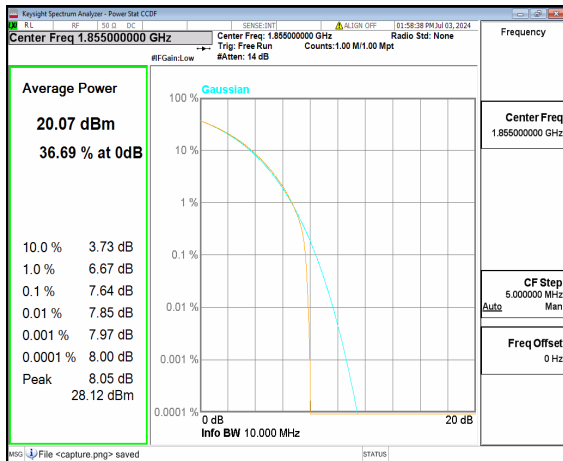


n2 10M CP-OFDM QPSK Outer_Full Low

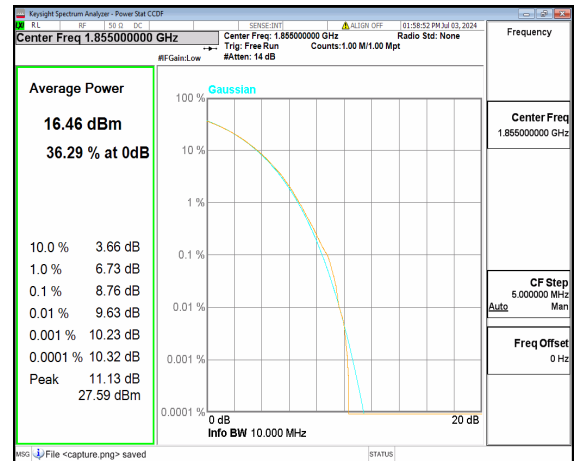


n2 10M CP-OFDM 256QAM Outer_Full Low

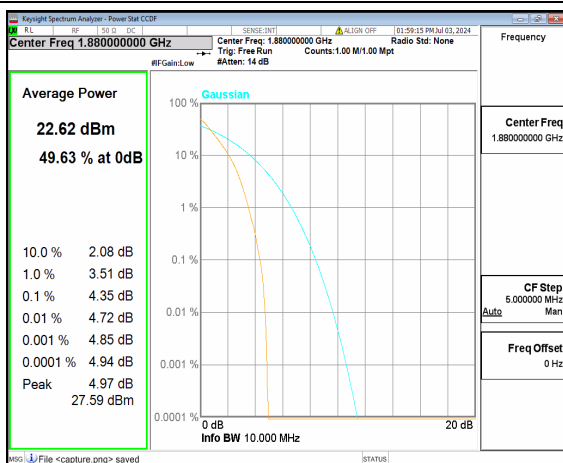


n2 10M DFT-s-OFDM BPSK Outer_Full Mid

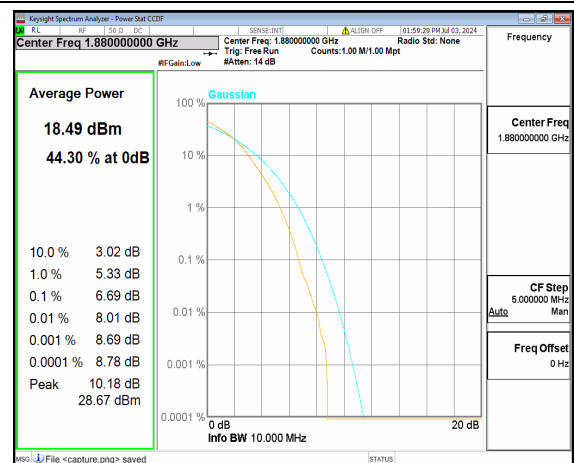


n2 10M DFT-s-OFDM 256QAM Outer_Full Mid

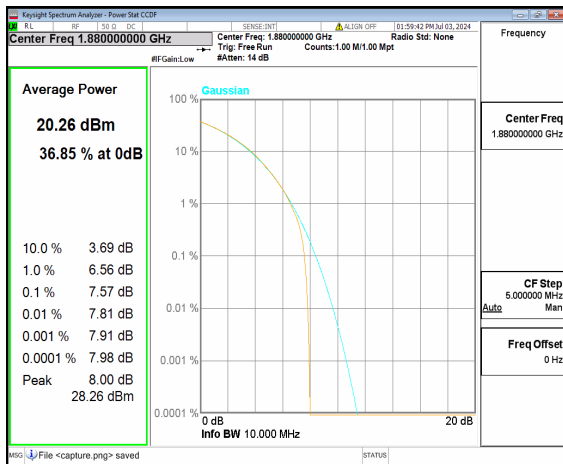


n2 10M CP-OFDM QPSK Outer_Full Mid

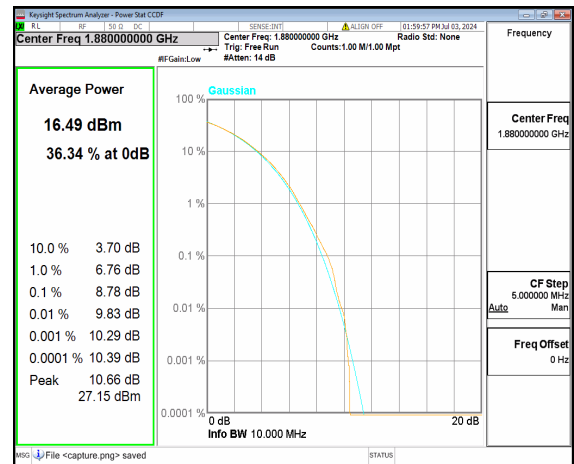


n2 10M CP-OFDM 256QAM Outer_Full Mid

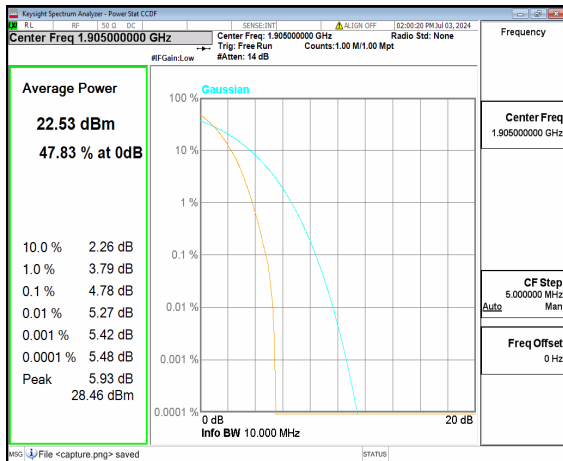


n2 10M DFT-s-OFDM BPSK Outer_Full High

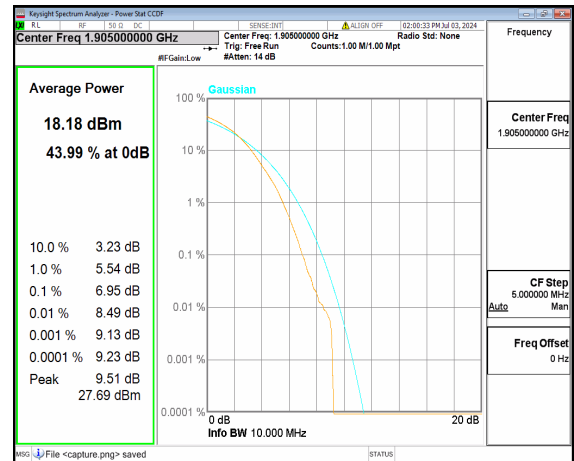

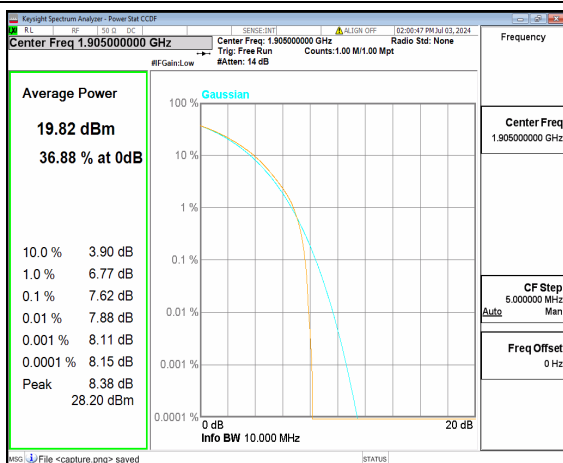
n2 10M DFT-s-OFDM 256QAM Outer_Full High




n2 10M CP-OFDM QPSK Outer_Full High

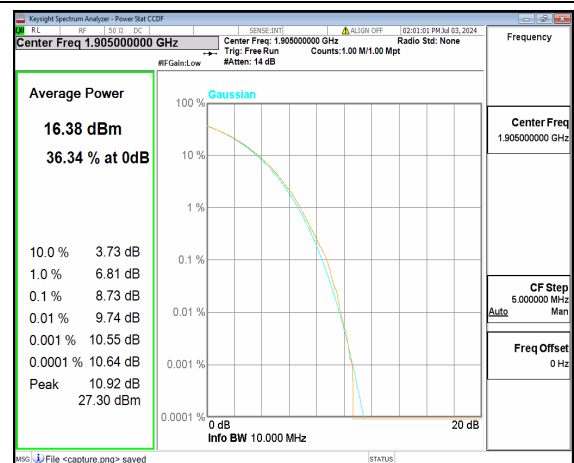


n2 10M CP-OFDM 256QAM Outer_Full High

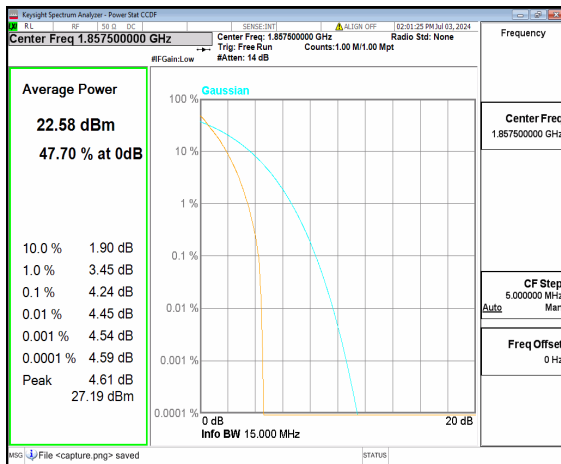


n2 15M DFT-s-OFDM BPSK Outer_Full Low

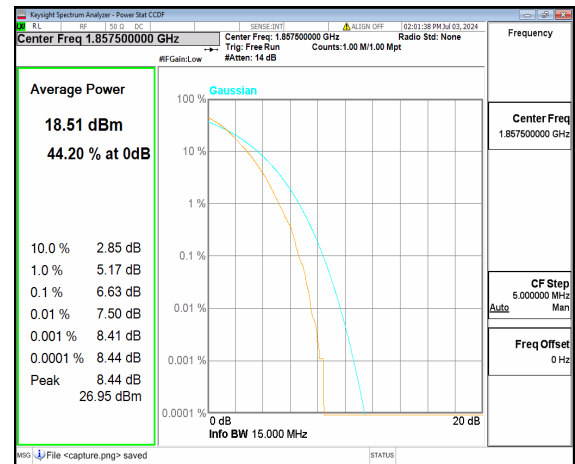


n2 15M DFT-s-OFDM 256QAM Outer_Full Low

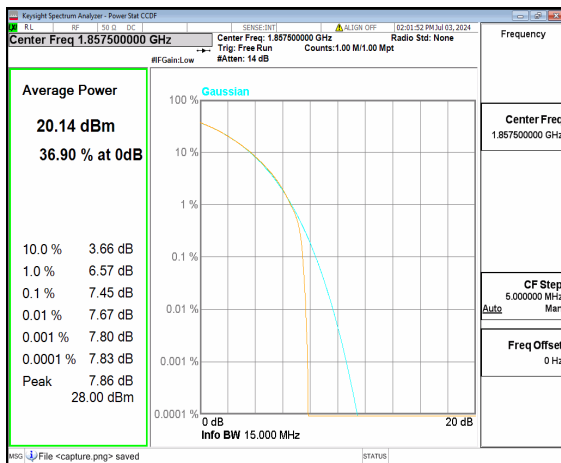


n2 15M CP-OFDM QPSK Outer_Full Low

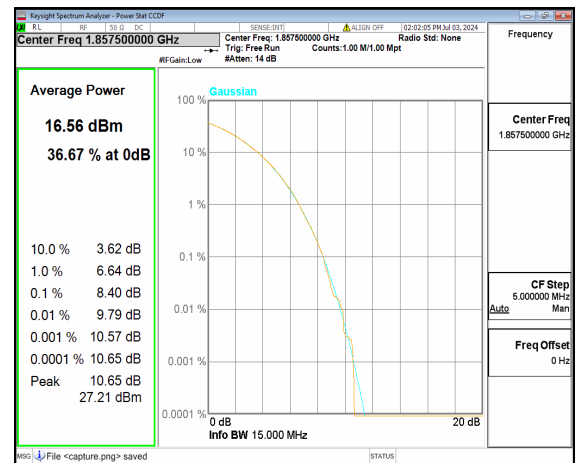

n2 15M CP-OFDM 256QAM Outer_Full Low

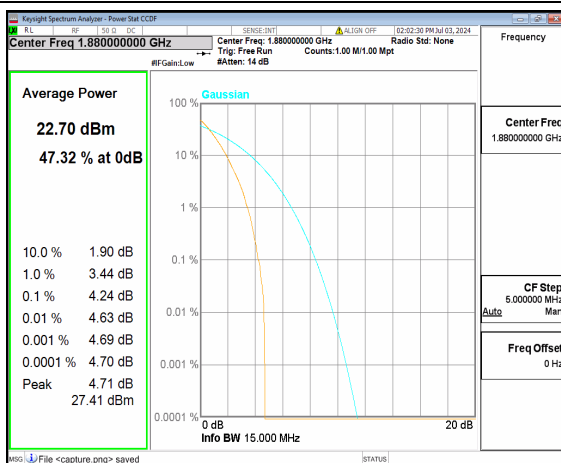

n2 15M DFT-s-OFDM BPSK Outer_Full Mid

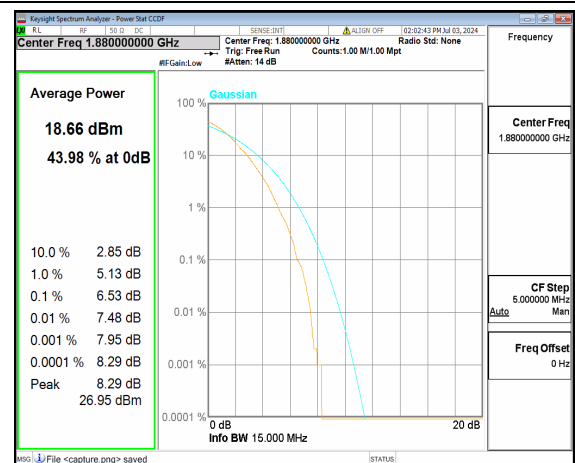

n2 15M DFT-s-OFDM 256QAM Outer_Full Mid