



TEST REPORT

APPLICANT : Reliance Communications LLC
PRODUCT NAME : Orbic Magic
MODEL NAME : R678EL
BRAND NAME : Orbic
FCC ID : 2ABGH-R678EL
STANDARD(S) : 47 CFR Part 15 Subpart E
RECEIPT DATE : 2020-10-21
TEST DATE : 2020-11-13 to 2021-01-12
ISSUE DATE : 2021-02-04

Edited by: Peng Mi
Peng Mi (Rapporteur)
Approved by: Peng Huarui
Peng Huarui (Supervisor)

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





DIRECTORY

- 1. Technical Information 3
 - 1.1. Applicant and Manufacturer Information 3
 - 1.2. Equipment Under Test (EUT) Description 3
 - 1.3. Modulation Type and Data Rate of EUT 5
 - 1.4. The Channel Number and Frequency 6
 - 1.5. Test Standards and Results 7
 - 1.6. Environmental Conditions 8
- 2. 47 CFR Part 15E Requirements 9
 - 2.1. Antenna Requirement 9
 - 2.2. Duty Cycle of the Test Signal 10
 - 2.3. Maximum Conducted Output Power 15
 - 2.4. Emission Bandwidth 21
 - 2.5. Peak Power Spectral Density 60
 - 2.6. Frequency Stability 101
 - 2.7. Conducted Emission 104
 - 2.8. Restricted Frequency Bands 108
 - 2.9. Radiated Emission 128
- Annex A Test Uncertainty 159
- Annex B Testing Laboratory Information 160

Change History		
Version	Date	Reason for change
1.0	2021-02-04	First edition



1. Technical Information

Note: Provide by applicant.

1.1. Applicant and Manufacturer Information

Applicant:	Reliance Communications LLC
Applicant Address:	91 Colin Drive, Unit 1, HOLBROOK, New York 11741, United States
Manufacturer:	ZJY RIGHT SOURCE INDIA PRIVATE LIMITED
Manufacturer Address:	MIDC industrial Area, Shiravane, Nerul, India

1.2. Equipment Under Test (EUT) Description

Product Name:	Orbic Magic	
Serial No.:	(N/A, marked #1 by test site)	
Hardware Version:	V2.1	
Software Version:	ORB678EL_V1.0.47_BTF	
Modulation Technology:	OFDM	
Modulation Mode:	802.11a, 802.11n (HT20), 802.11n (HT40) 802.11ac (VHT20), 802.11ac (VHT40), 802.11ac (VHT80),	
Operating Frequency Range:	5180MHz-5240MHz; 5260MHz-5320MHz; 5500MHz-5720MHz; 5745MHz-5825MHz	
Channel Number:	Refer to 1.3	
Antenna Type:	FPC Antenna	
Antenna Gain:	ANT 0: -0.14dBi; ANT 1: -0.14dBi	
Directional Gain:	2.87dBi _{Note 3}	
Accessory Information:	Battery	
	Brand Name:	Orbic
	Model No.:	BLE-5001
	Serial No.:	(N/A, marked #1 by test site)
	Capacity:	5000mAh
	Rated Voltage:	3.85V
	Charge Limit:	4.40V
Manufacturer:	HUIZHOU DXDRAGON INC	



Accessory Information:	AC Adapter	
	Brand Name:	Orbic
	Model No.:	BLJ-QC06HU
	Serial No.:	(N/A, marked #1 by test site)
	Rated Output:	5V=3A, 9V=2A, 12V=1.5A,
	Rated Input:	100-240V~50/60Hz, 0.5A
	Manufacturer:	Baolijin

Note 1: The EUT supports a MIMO function. Physically, the EUT provides two completed transmitters and two receivers for 802.11n and 802.11ac modulation mode.

Modulation Mode:	TX Function
802.11n	2TX
802.11ac	2TX

Note 2: According to KDB 662911 D01, the directional gain = $G_{ANT} + 10\log(N_{ANT})$ dBi, where G_{ANT} is the maximum antenna gain in dBi, N_{ANT} is the number of outputs.

Note 3: For conducted test item Conducted Output Power and Peak Power Spectral Density of each modulation mode, we recorded the test result of two antennas separately, for other conducted test items both of the two antennas were tested separately, we only recorded the worst test result (ANT0) in this report.

Note 4: All radiation test items for 802.11n and 802.11ac modulation mode operate at MIMO mode during the test. Other modulation mode operate at SISO mode, both of the two antennas were tested separately, we only recorded the worst test result(ANT0) in this report.

Note 5: WIFI hotspot does not support U-NII band.

Note 6: We use the dedicated software to control the EUT continuous transmission.

Note 7: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

1.3. Modulation Type and Data Rate of EUT

Modulation Technology	Modulation Type	Data Rate (Mbps) ^{Note1}
OFDM (802.11a)	BPSK	6/9
	QPSK	12/18
	16QAM	24/36
	64QAM	48/54
OFDM (802.11n)	BPSK	6.5
	QPSK	13/19.5
	16QAM	26/39
	64QAM	52/58.5/65
OFDM (802.11ac)	BPSK	6.5
	QPSK	13/19.5
	16QAM	26/39
	64QAM	52/58.5/65
	256QAM	78

Note1: The worst-case mode (black bold) in all data rates has been determined during the pre-scan, only the test data of the worst-case were recorded in this report.

1.4. The Channel Number and Frequency

Frequency Range: 5150MHz-5250MHz				
Bandwidth	Channel	Frequency (MHz)	Channel	Frequency (MHz)
20MHz	36	5180	40	5200
	44	5220	48	5240
40MHz	38	5190	46	5230
80MHz	42	5210		
Frequency Range: 5250MHz-5350MHz				
Bandwidth	Channel	Frequency (MHz)	Channel	Frequency (MHz)
20MHz	52	5260	56	5280
	60	5300	64	5320
40MHz	54	5270	62	5310
80MHz	58	5290		
Frequency Range: 5470MHz-5725MHz				
Bandwidth	Channel	Frequency (MHz)	Channel	Frequency (MHz)
20MHz	100	5500	105	5520
		5540	112	5560
		5580	120	5600
		5620	128	5640
		5660	136	5680
		5700	144	5720
40MHz	102	5510	110	5550
		5590	126	5630
		5670	142	5710
80MHz	106	5530	122	5610
	138	5690		
Frequency Range: 5725MHz-5825MHz				
Bandwidth	Channel	Frequency (MHz)	Channel	Frequency (MHz)
20MHz	149	5745	153	5765
	157	5785	161	5805
	165	5825		
40MHz	151	5775	159	5795
80MHz	155	5775		

Note 1: The black bold channels were selected for test.



1.5. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart E (U-NII band) for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15(5-1-14 Edition)	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result	Method determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	No deviation
2	ANSI C63.10	Duty Cycle of the Test Signal	Nov 18, 2020	Liu Bo	PASS	No deviation
3	15.407(a)	Maximum Conducted Output Power	Nov 18, 2020	Liu Bo	PASS	No deviation
4	15.407(a)(e)	Emission Bandwidth	Nov 18, 2020	Liu Bo	PASS	No deviation
5	15.407(a)	Peak Power Spectral Density	Nov 18, 2020	Liu Bo	PASS	No deviation
6	15.407(g)	Frequency Stability	Nov 18, 2020	Liu Bo	PASS	No deviation
7	15.207	Conducted Emission	Nov 14, 2020	Huang Zhiye	PASS	No deviation
8	15.407(b)	Restricted Frequency Bands	Nov 10, 2020 Jan 12, 2021	Gao Jianrou	PASS	No deviation
9	15.407(b)	Radiated Emission	Nov 13, 2020	Gao Jianrou	PASS	No deviation

Note 1: The DFS test report was documented in a separate report (Report No.: SZ20100013W05).

Note 2: The tests of Conducted Emission and Radiated Emission were performed according to the method of measurements prescribed in ANSI C63.102013.

Note 3: These RF tests were performed according to the method of measurements prescribed in KDB789033 D02 v01r03.



Note 4: The path loss during the RF test is calibrated to correct the results by the offset setting in the test equipments. The ref offset 11.5dB contains two parts that cable loss 1.5dB and Attenuator 10dB.

Note 5: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

Note 6: When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% risk level.

1.6. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15-35
Relative Humidity (%):	30-60
Atmospheric Pressure (kPa):	86-106



2.47 CFR Part 15E Requirements

2.1. Antenna Requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2. Test Result: Compliant

Inside of the EUT has a PIFA antenna coupled with the metal shrapnel. Please refer to the EUT internal photos.

2.2. Duty Cycle of the Test Signal


2.2.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration (T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than $\pm 2\%$; otherwise, the duty cycle is considered to be nonconstant.

2.2.2. Test Description

Test Setup:

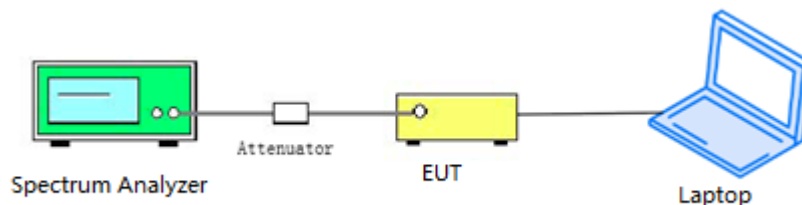

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

2.2.3. Test Procedure

KDB 789033 Section B was used in order to prove compliance.




2.2.4. Test Result


A. Test Verdict:

Test Mode	Duty Cycle (%) (D)	Duty Factor (10*log[1/D])
802.11a	98.06	0.09
802.11n (HT20)	97.71	0.10
802.11n (HT40)	95.96	0.18
802.11ac (VHT20)	98.35	0.07
802.11ac (VHT40)	96.30	0.16
802.11ac (VHT80)	92.07	0.36


B. Test Plot:

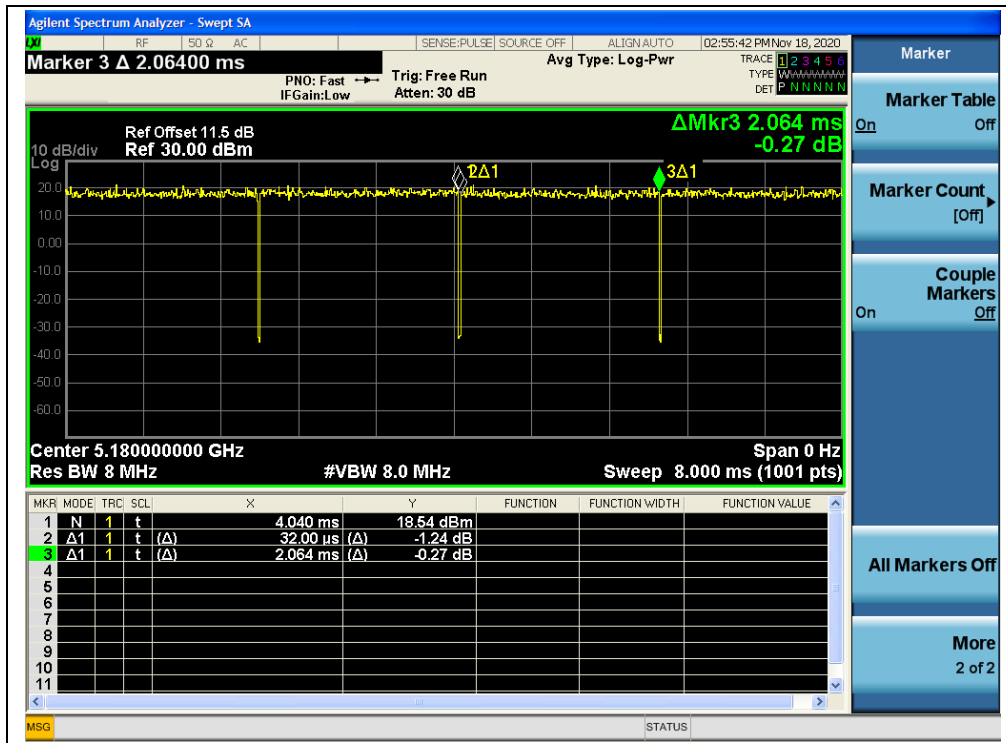


(Channel 36, 5180MHz, 802.11a)

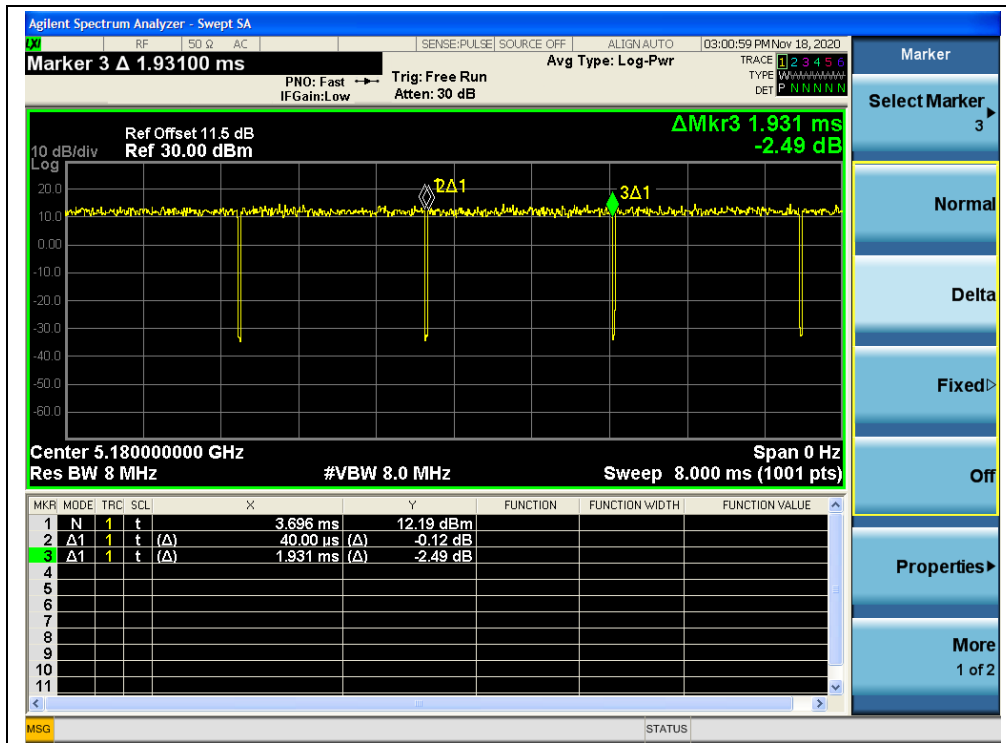


(Channel 36, 5180MHz, 802.11n (HT20))

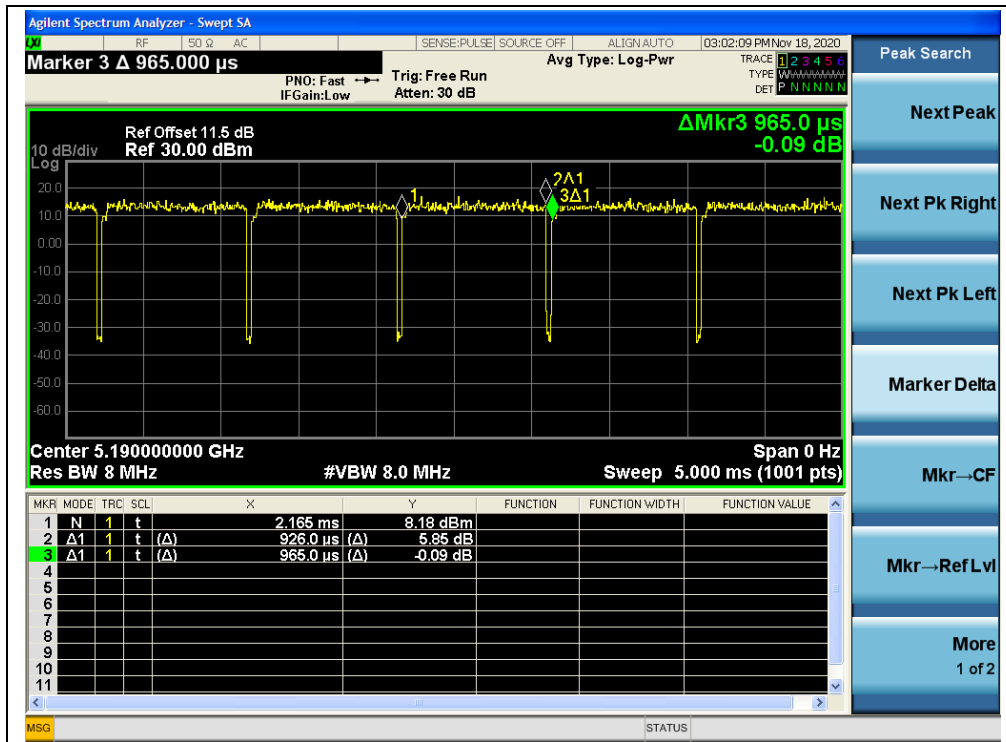


(Channel 38, 5190MHz, 802.11n (HT40))

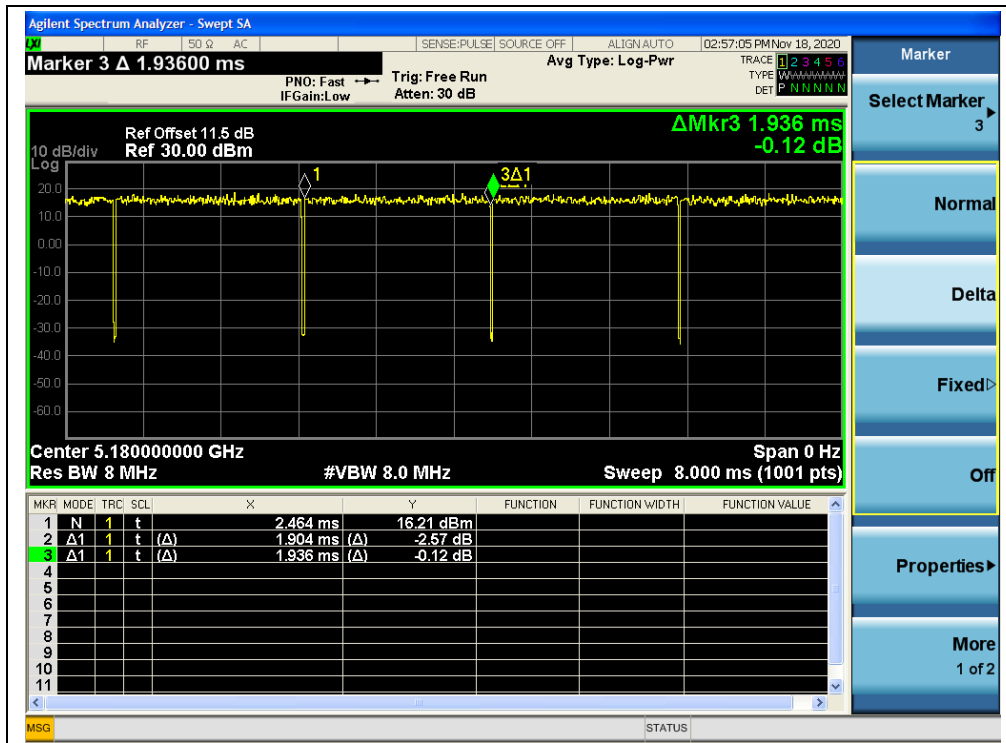

(Channel 36, 5180MHz, 802.11ac (VHT20))

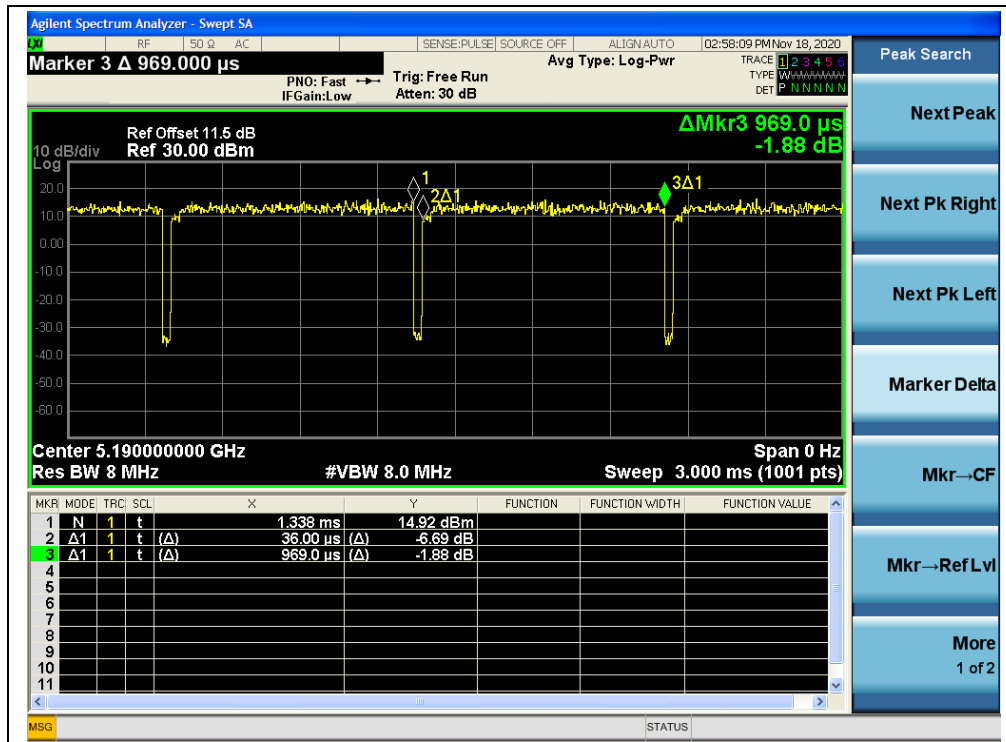

(Channel 38, 5190MHz, 802.11ac (VHT40))

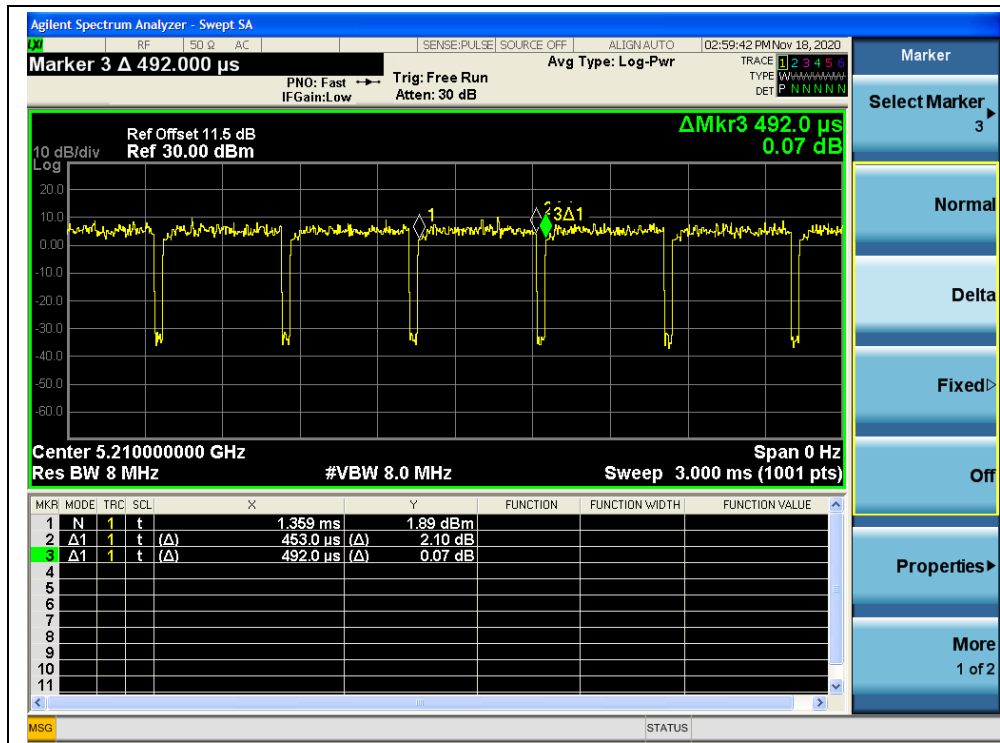

(Channel 42, 5210MHz, 802.11ac (VHT80))

2.3. Maximum Conducted Output Power

2.3.1. Requirement

(1) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11\text{dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


(4) According to KDB662911D01 Measure-and-sum technique, the conducted emission level (e.g., transmit power or power in specified bandwidth) is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in units that are directly proportional to power.

(5) According to KDB 662911 D01, the directional gain = $G_{\text{ANT}} + 10\log(N_{\text{ANT}})\text{dBi}$, where G_{ANT} is the antenna gain in dBi, N_{ANT} is the number of outputs.

2.3.2. Test Description


Section E) 3) of KDB 789033 defines a methodology using a USB Wideband Power Sensor.

Test Setup:

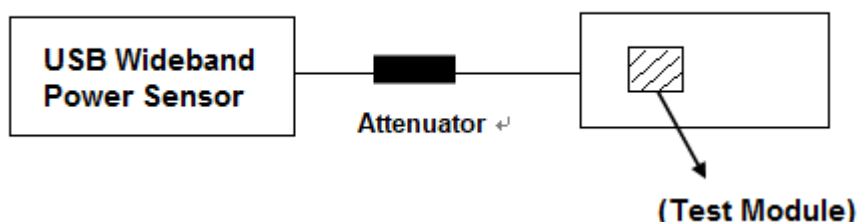

The EUT (Equipment under the test) which is coupled to the USB Wideband Power Sensor; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading, all test result in USB Wideband Power Sensor.

For ac (VHT80) mode power

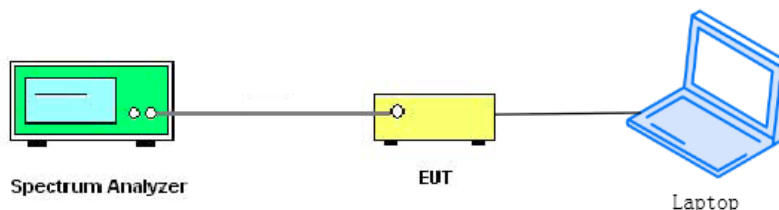

The EUT (Equipment under the test) is coupled to the Spectrum analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading, all test result in Spectrum analyzer.

2.3.3.Limits

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz.

Mode	Band	Channel (MHz)	26dB BW (MHz)	10+10log(26dB BW)	Limits (dBm)
a	UNII-2a	5260	22.35	24.49	24.00
		5300	22.53	24.53	24.00
		5320	22.65	24.55	24.00
	UNII-2c	5500	23.62	24.73	24.00
		5600	25.22	25.02	24.00
		5720	25.37	25.04	24.00
n20	UNII-2a	5260	24.23	24.84	24.00
		5300	23.60	24.73	24.00
		5320	23.92	24.79	24.00
	UNII-2c	5500	25.64	25.09	24.00
		5600	25.97	25.14	24.00
		5720	26.70	25.27	24.00
ac20	UNII-2a	5260	24.59	24.91	24.00
		5300	24.65	24.92	24.00
		5320	23.82	24.77	24.00
	UNII-2c	5500	26.35	25.21	24.00
		5600	25.49	25.06	24.00
		5720	27.19	25.34	24.00



2.3.4. Test Result

Maximum Average Conducted Output Power

802.11a Mode

Frequency (MHz)	Average Power							Limit		Verdict	
	Measured		Duty Factor	Duty factor Calculated							
	ANT0	ANT1		ANT0		ANT1					
	dBm	dBm		dBm	W	dBm	W				
5180	8.08	14.79	0.09	8.08	0.006	14.79	0.030	24	0.25	PASS	
5220	8.25	14.80		8.25	0.007	14.80	0.030				
5240	8.27	14.60		8.27	0.007	14.60	0.029				
5260	8.17	14.62		8.17	0.007	14.62	0.029				
5300	8.26	14.54		8.26	0.007	14.54	0.028				
5320	8.24	14.43		8.24	0.007	14.43	0.028				
5500	8.07	13.91		8.07	0.006	13.91	0.025				
5600	8.25	13.54		8.25	0.007	13.54	0.023				
5720	8.27	13.48		8.27	0.007	13.48	0.022				
5745	8.12	13.47		8.12	0.006	13.47	0.022			30	1
5785	8.26	13.43		8.26	0.007	13.43	0.022				
5825	8.28	13.33		8.28	0.007	13.33	0.022				



802.11n (HT20) Mode

Frequency (MHz)	Average Power				Limit		Verdict	
	Measured		Duty Factor	Total Power with Duty Factor		dBm		W
	ANT0	ANT1		dBm	W			
5180	7.07	13.85	0.10	14.77	0.030	24	0.25	PASS
5220	7.05	13.75		14.62	0.029			
5240	7.04	13.61		14.62	0.029			
5260	7.11	13.63		14.62	0.029			
5300	7.12	13.45		14.47	0.028			
5320	7.11	13.42		14.47	0.028			
5500	7.08	13.02		14.15	0.026			
5600	7.09	12.05		13.42	0.022			
5720	7.06	11.97		13.22	0.021			
5745	7.12	12.00		13.22	0.021			30
5785	7.10	12.02		13.42	0.022			
5825	7.13	11.97		13.22	0.021			

Note: Directional gain = $-0.14\text{dBi} + 10\log(2) = 2.87\text{dBi} < 6\text{dBi}$, so the power limit shall be 24dBm for 5.18-5.24 GHz and 30dBm for 5.745-5.825 GHz band.

802.11n (HT40) Mode

Frequency (MHz)	Average Power				Limit		Verdict	
	Measured		Duty Factor	Total Power with Duty Factor		dBm		W
	ANT0	ANT1		dBm	W			
5190	7.24	13.78	0.18	14.77	0.030	24	0.25	PASS
5230	7.26	13.66		14.77	0.030			
5270	7.21	13.45		14.62	0.029			
5310	7.18	13.54		14.62	0.029			
5510	7.19	12.97		14.15	0.026			
5630	7.17	12.57		13.80	0.024			
5710	7.21	12.44		13.80	0.024			
5755	7.20	12.26		13.62	0.023	30	1	
5795	7.23	12.11		13.42	0.022			

Note: Directional gain = $-0.14\text{dBi} + 10\log(2) = 2.87\text{dBi} < 6\text{dBi}$, so the power limit shall be 24dBm for 5.18-5.24 GHz and 30dBm for 5.745-5.825 GHz band.



802.11ac (VHT20) Mode

Frequency (MHz)	Average Power				Limit		Verdict	
	Measured		Duty Factor	Total Power with Duty Factor				
	ANT0	ANT1		dBm	W	dBm		W
5180	6.25	13.11	0.07	13.98	0.025	24	0.25	PASS
5220	6.24	13.00		13.98	0.025			
5240	6.23	13.01		13.98	0.025			
5260	6.28	13.09		13.98	0.025			
5300	6.27	12.84		13.80	0.024			
5320	6.25	12.63		13.62	0.023			
5500	6.15	12.08		13.22	0.021			
5600	6.17	11.54		12.79	0.019			
5720	6.18	11.44		12.55	0.018			
5745	6.10	11.17		12.30	0.017			30
5785	6.21	11.40		12.55	0.018			
5825	6.16	11.41		12.55	0.018			

Note: Directional gain = $-0.14\text{dBi} + 10\log(2) = 2.87\text{dBi} < 6\text{dBi}$, so the power limit shall be 24dBm for 5.18-5.24 GHz and 30dBm for 5.745-5.825 GHz band.

802.11ac (VHT40) Mode

Frequency (MHz)	Average Power				Limit		Verdict	
	Measured		Duty Factor	Total Power with Duty Factor				
	ANT0	ANT1		dBm	W	dBm		W
5190	6.74	13.21	0.16	14.31	0.027	24	0.25	PASS
5230	6.76	13.10		14.15	0.026			
5270	6.76	13.05		14.15	0.026			
5310	6.72	12.89		13.98	0.025			
5510	6.73	12.51		13.62	0.023			
5630	6.77	11.97		13.22	0.021			
5710	6.78	11.88		13.22	0.021			
5755	6.77	11.86		13.22	0.021	30	1	
5795	6.71	11.80		13.22	0.021			

Note: Directional gain = $-0.14\text{dBi} + 10\log(2) = 2.87\text{dBi} < 6\text{dBi}$, so the power limit shall be 24dBm for 5.18-5.24 GHz and 30dBm for 5.745-5.825 GHz band.



802.11ac (VHT80) Mode

Frequency (MHz)	Average Power				Limit		Verdict	
	Measured		Duty Factor	Total Power with Duty Factor				
	ANT0	ANT1		W	dBm	dBm		W
	dBm	dBm						
5210	6.39	12.82	0.36	14.15	0.026	24	0.25	PASS
5290	6.41	12.58		13.80	0.024			
5530	6.43	11.93		13.42	0.022			
5610	6.34	11.56		13.01	0.020			
5690	6.42	11.53		13.01	0.020			
5775	6.44	11.39		13.01	0.020	30	1	

Note: Directional gain = $-0.14\text{dBi} + 10\log(2) = 2.87\text{dBi} < 6\text{dBi}$, so the power limit shall be 24dBm for 5.18-5.24 GHz and 30dBm for 5.745-5.825 GHz band.


2.4. Emission Bandwidth

2.4.1. Requirement

For purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Determination of the emissions bandwidth is based on the use of measurement instrumentation employing a peak detector function with an instrument resolution bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement. Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

2.4.2. Test Description

Test Setup:

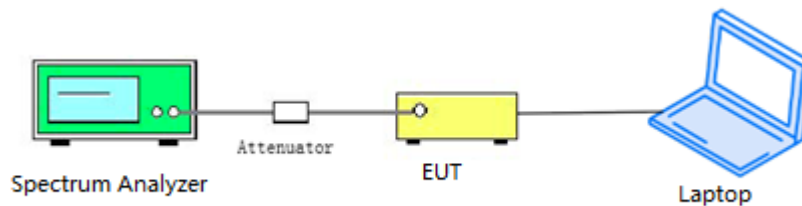

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50 Ohm; the path loss as the factor is calibrated to correct the reading.

2.4.3. Test Procedure

1. KDB 789033 Section C) 1) Emission Bandwidth was used in order to prove compliance
 - a) Set RBW = approximately 1% of the emission bandwidth.
 - b) Set VBW > RBW.
 - c) Detector = Peak.
 - d) Trace mode = max hold.
 - e) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
2. KDB 789033 Section C) 2) minimum emission bandwidth for the band 5.725-5.85GHz was used in order to prove compliance.
Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:



- a) Set RBW = 100 kHz.
- b) Set video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

2.4.4. Test Result


802.11a Mode

A. Test Verdict:


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
36	5180	23.09
44	5220	22.57
48	5240	22.43
52	5260	22.97
60	5300	22.58
64	5320	22.80
100	5500	22.26
120	5600	23.46
144	5720	23.25
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
144	5720	16.07
149	5745	15.62
157	5785	14.80
165	5825	15.69




B.Test Plot:

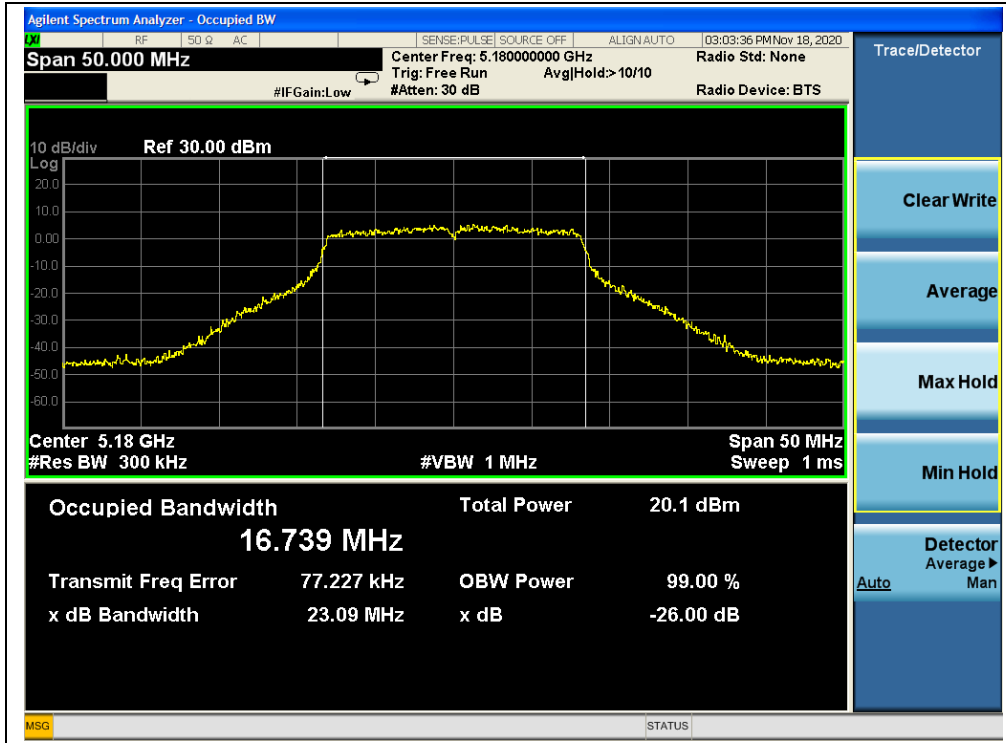


(Channel 36, 5180MHz, 802.11a)

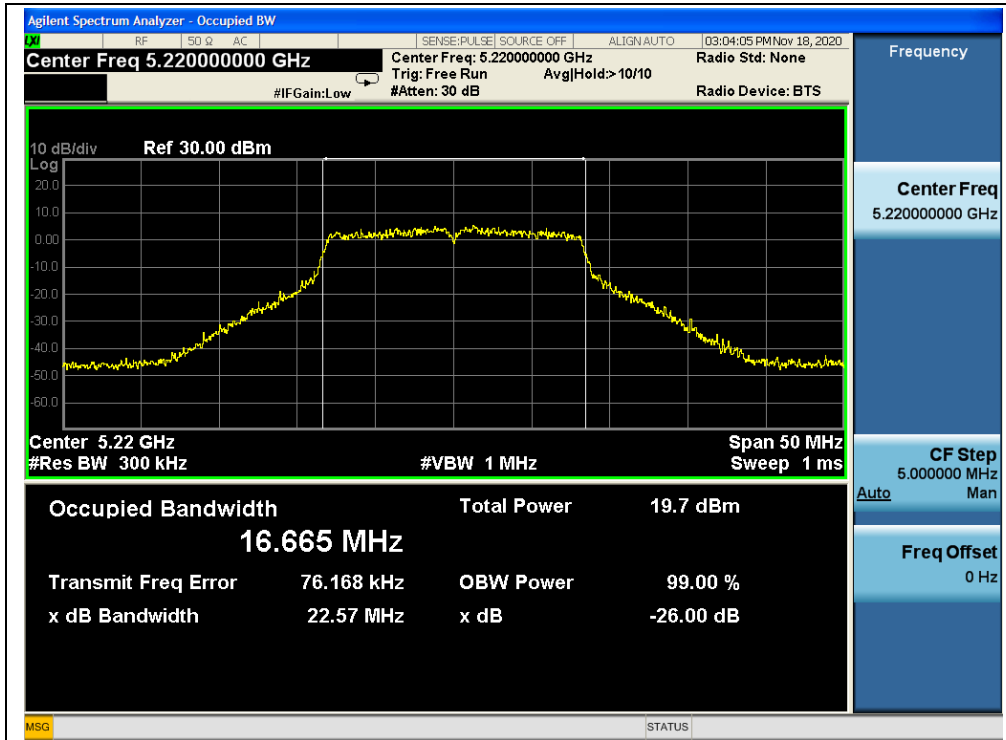


(Channel 44, 5220 MHz, 802.11a)

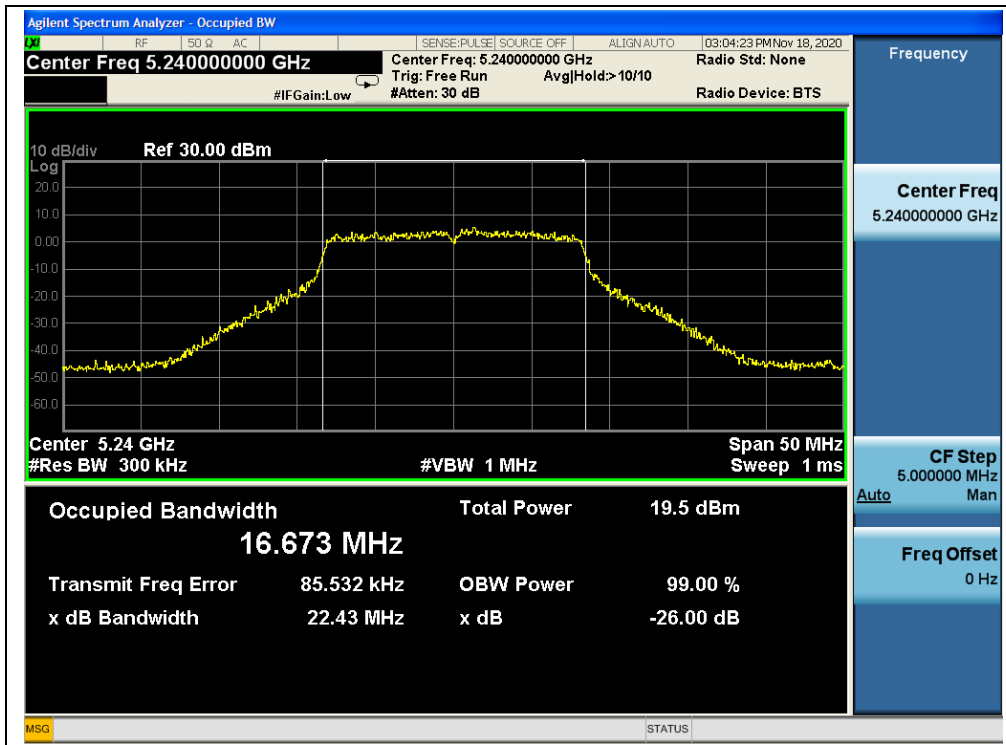


(Channel 48, 5240MHz, 802.11a)

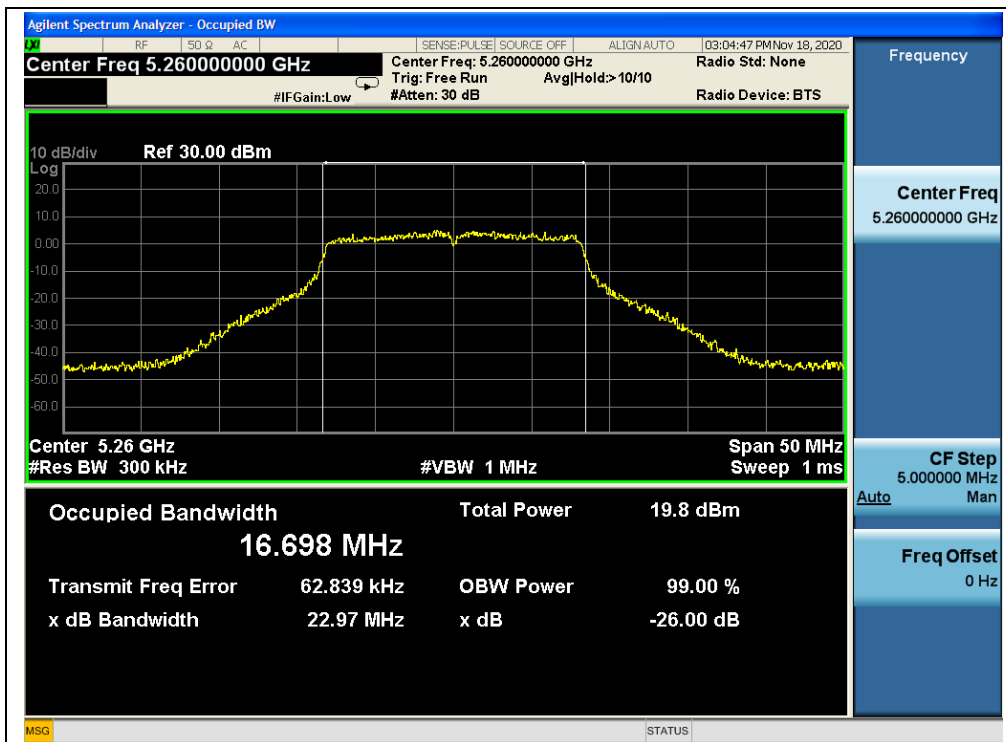


(Channel 52, 5260MHz, 802.11a)

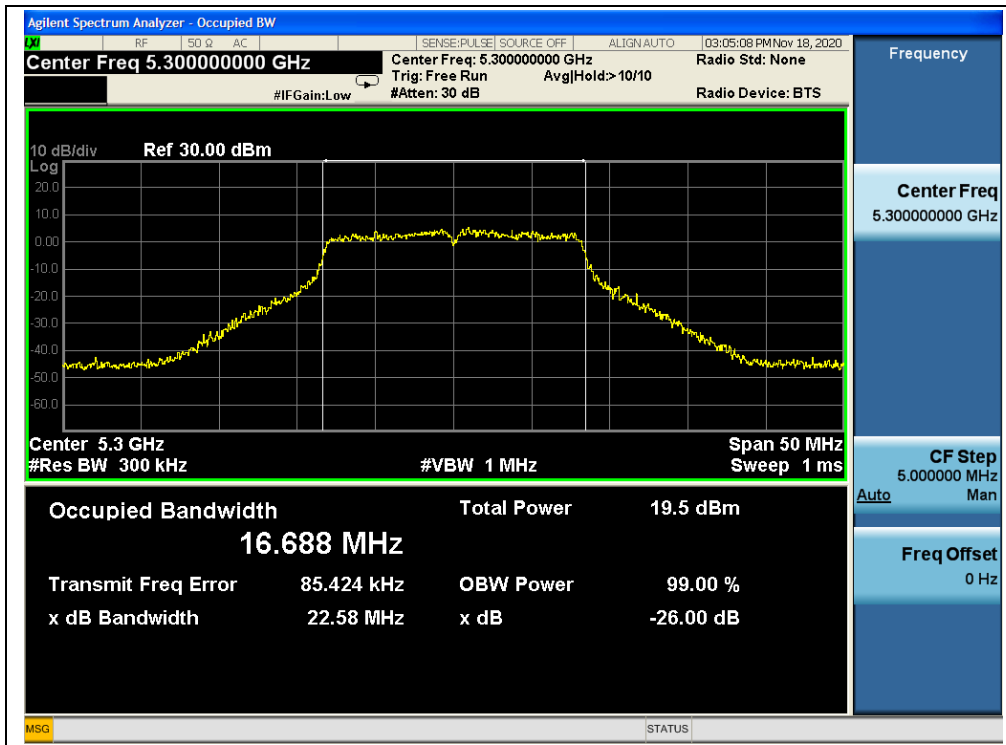


(Channel 60, 5300 MHz, 802.11a)

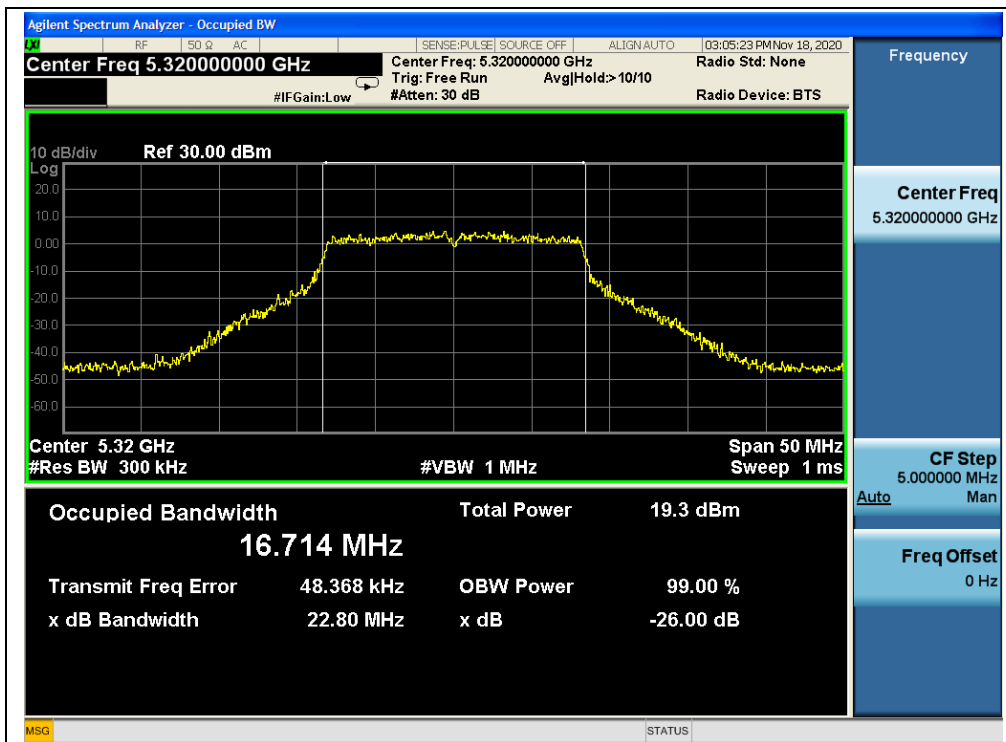


(Channel 64, 5320MHz, 802.11a)

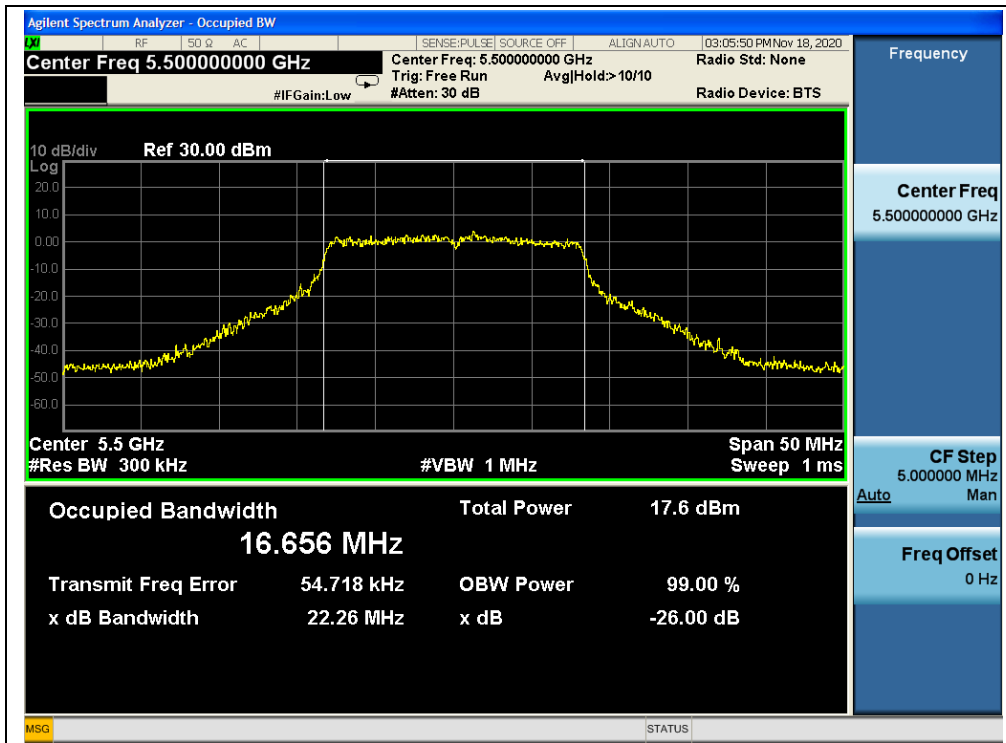


(Channel 100,5500MHz, 802.11a)

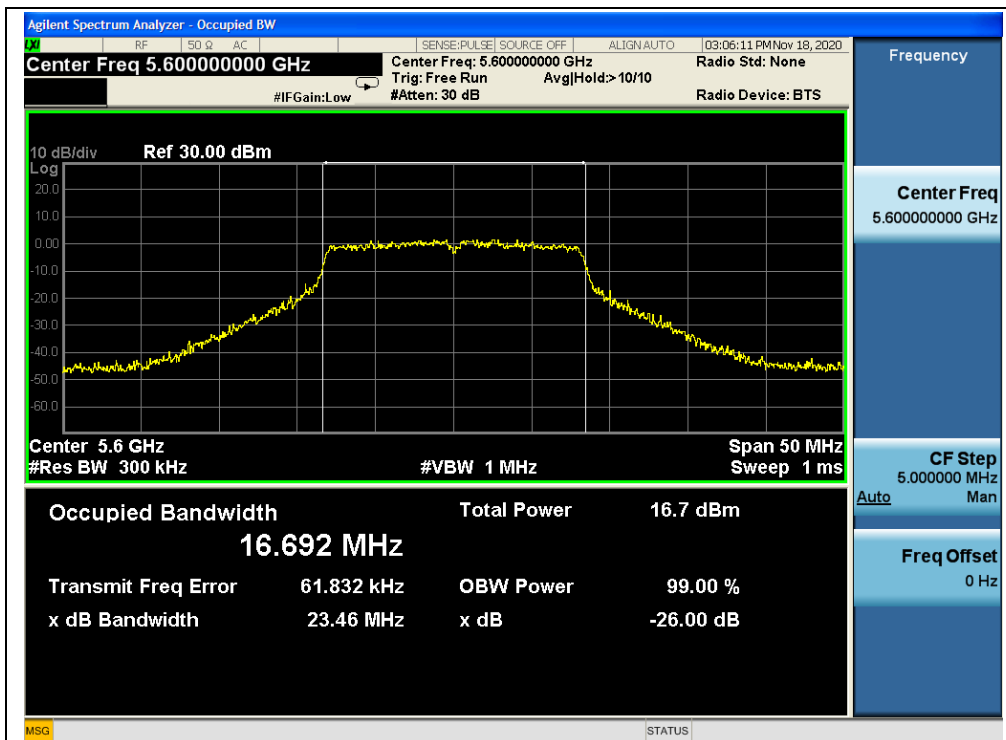


(Channel 120,5600 MHz, 802.11a)

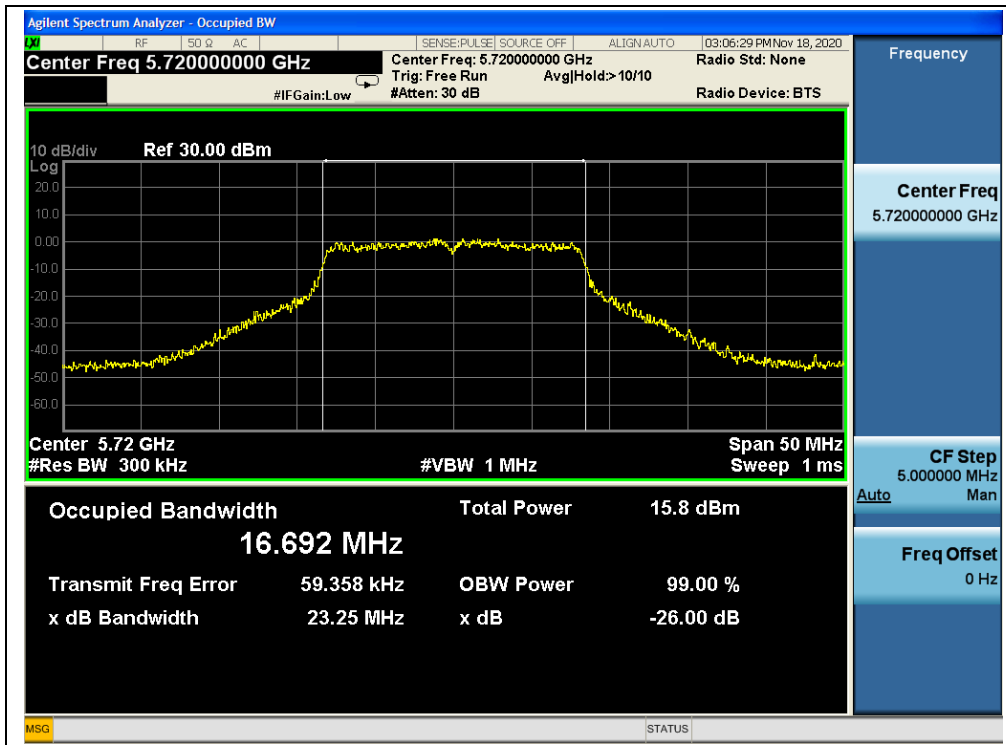


(Channel 144, 5720MHz, 802.11a)

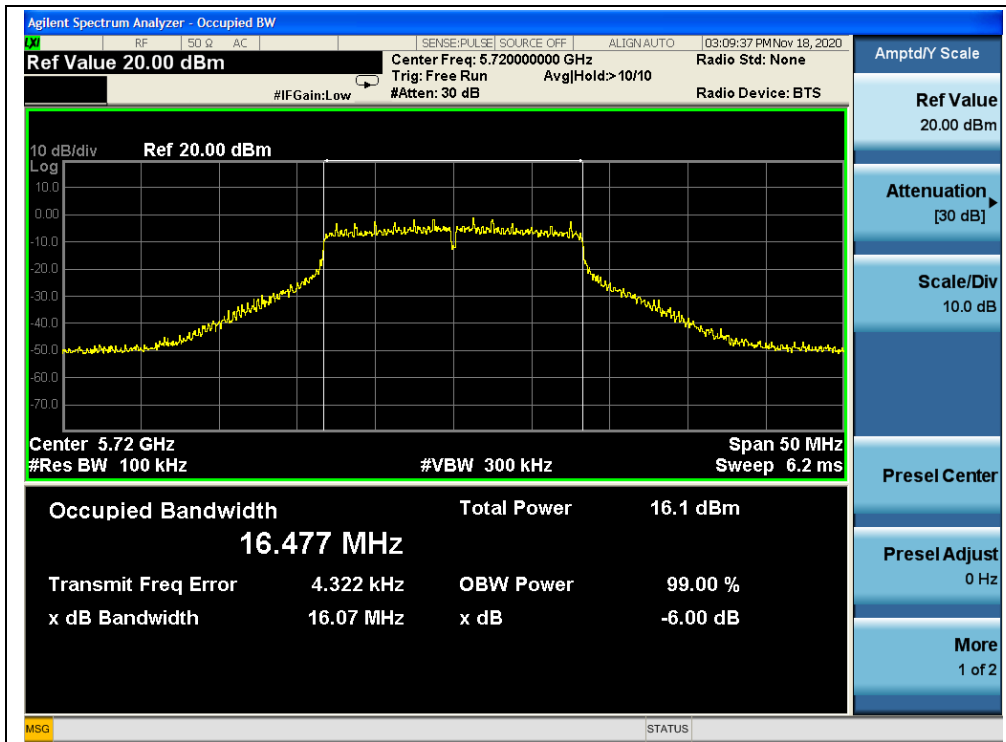


(Channel 144, 5720MHz, 802.11a)

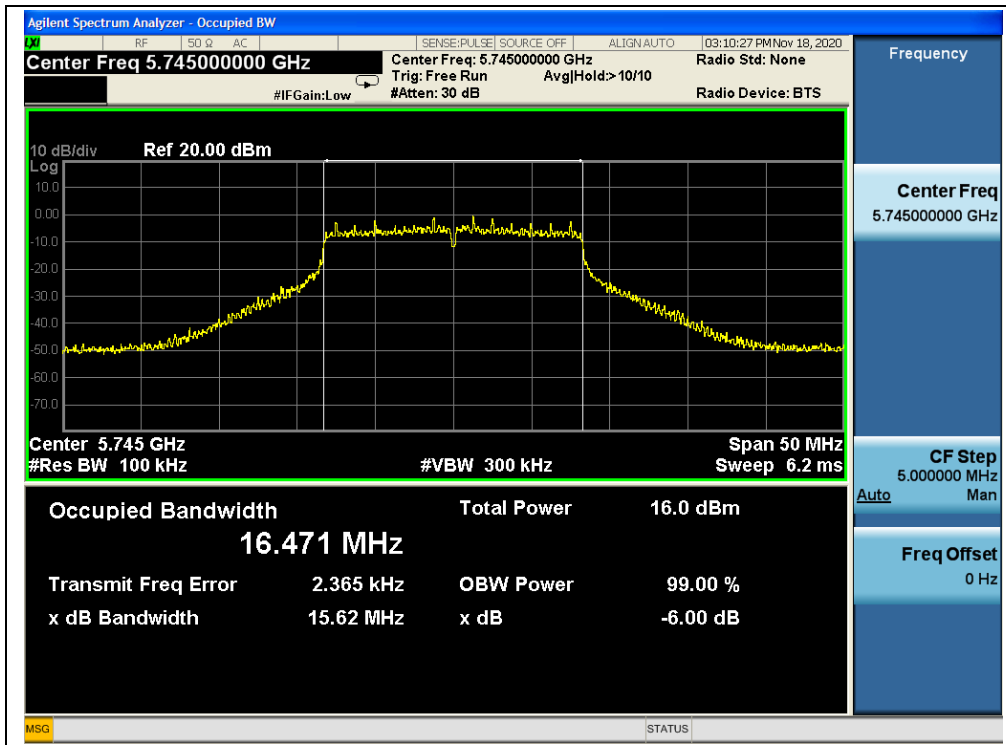

(Channel 149,5745MHz, 802.11a)

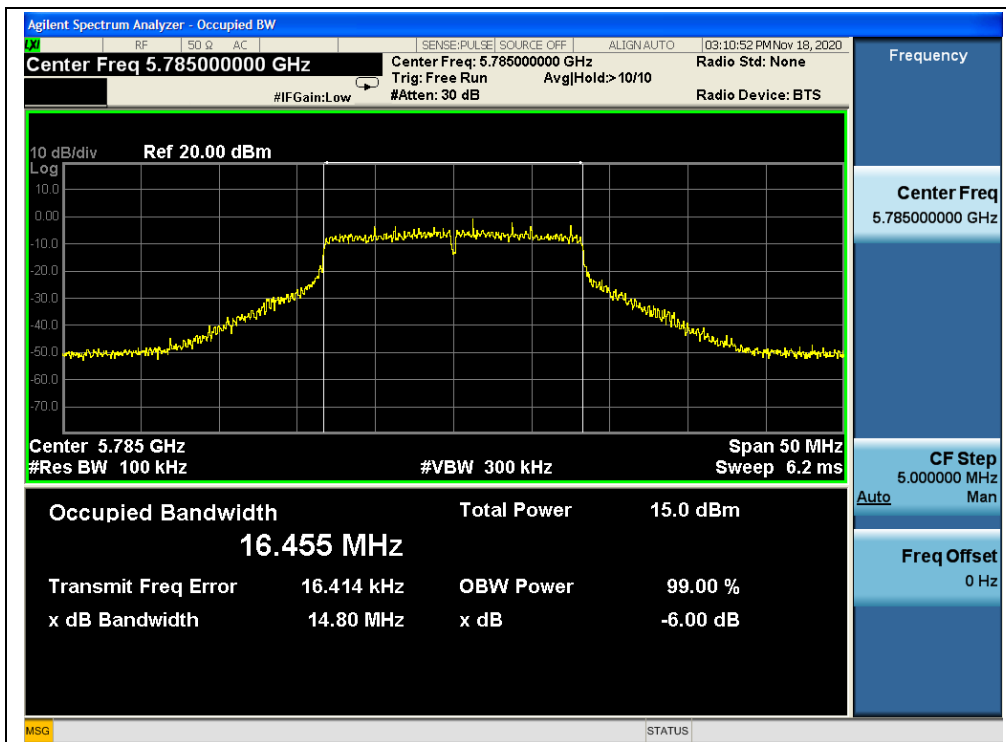

(Channel 157,5785MHz, 802.11a)

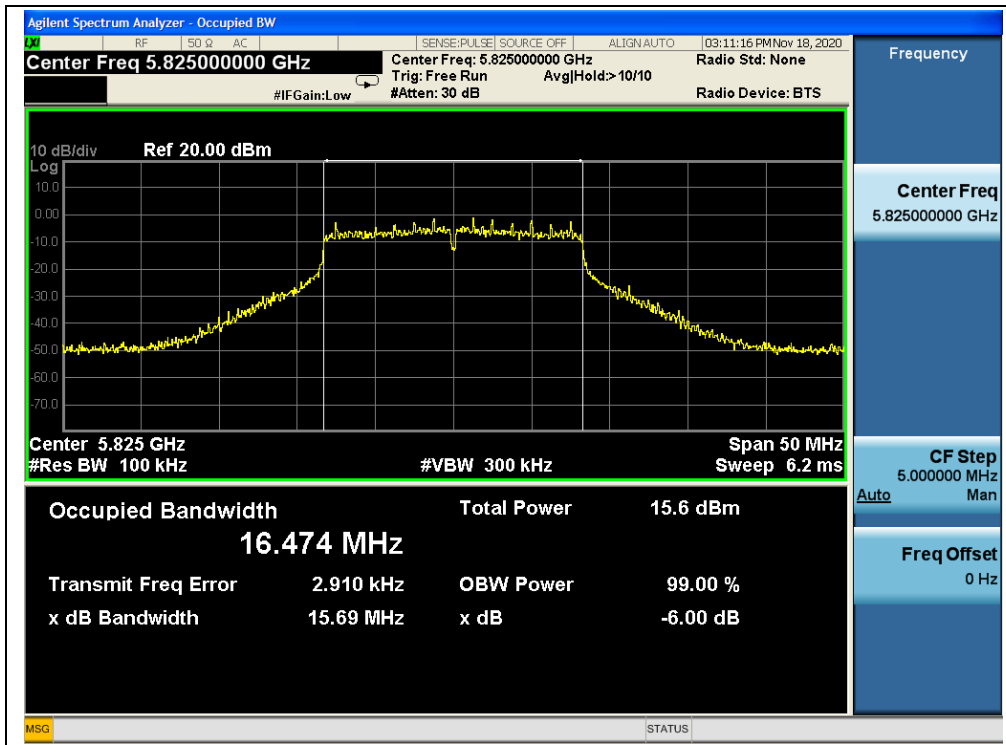

(Channel 165, 5825MHz, 802.11a)




802.11n (HT20) Mode


A. Test Verdict:

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
36	5180	22.84
44	5220	22.26
48	5240	23.15
52	5260	22.29
60	5300	22.30
64	5320	21.92
100	5500	22.93
120	5600	23.14
144	5720	22.65
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
144	5720	16.03
149	5745	16.27
157	5785	16.33
165	5825	15.15

B. Test Plot:

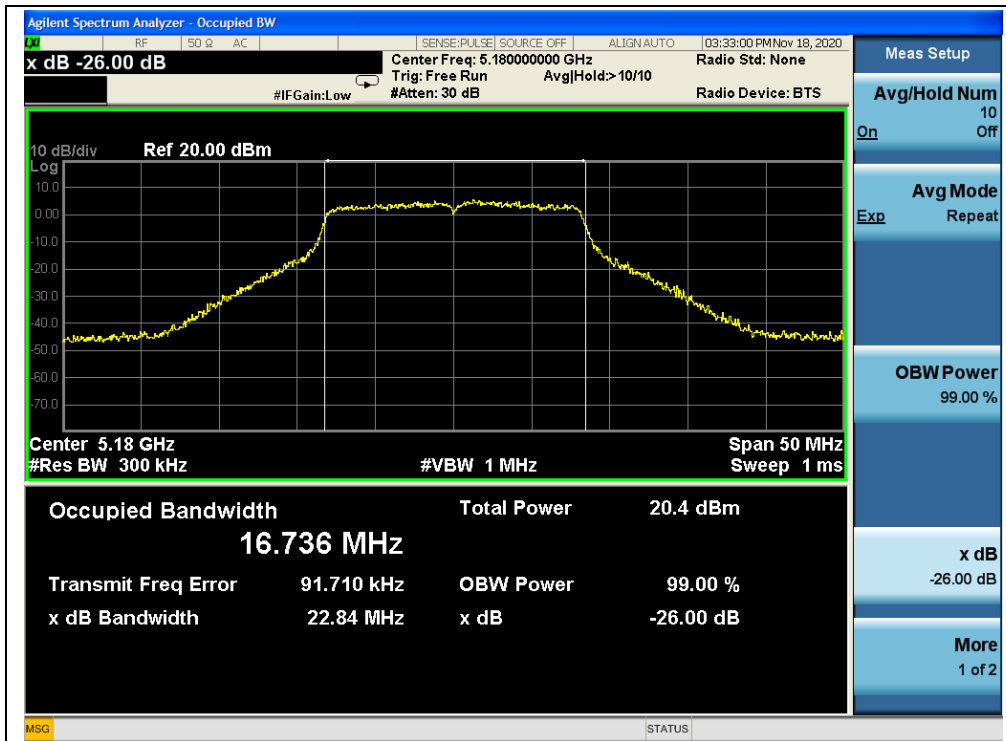


(Channel 36, 5180MHz, 802.11n (HT20))

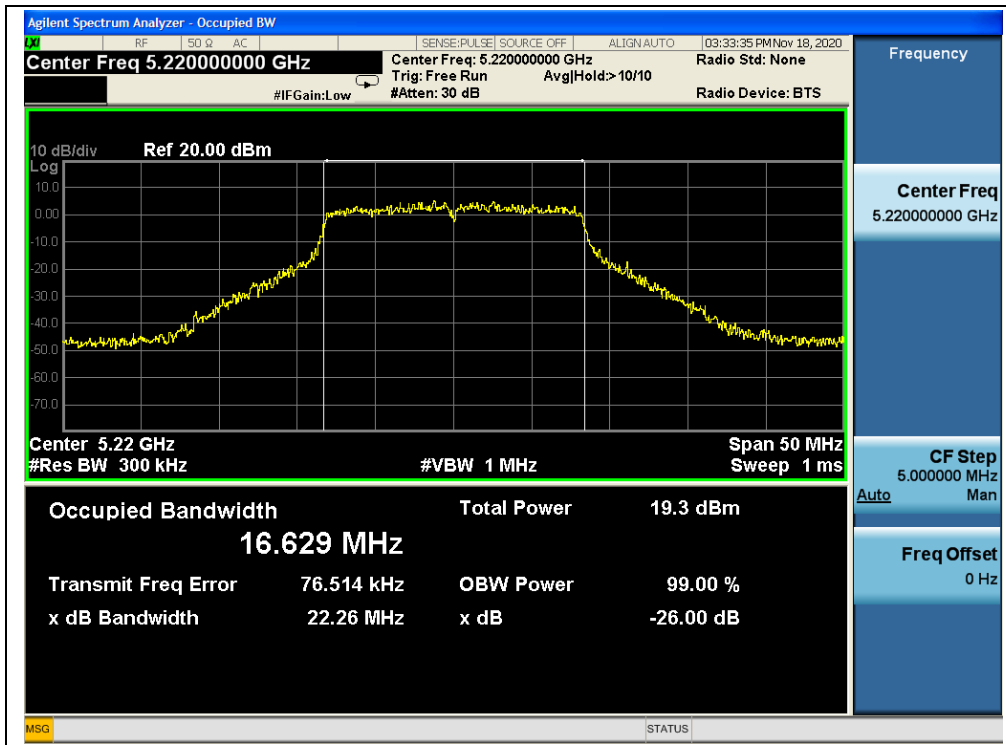

(Channel 44, 5220MHz, 802.11n (HT20))




(Channel 48, 5240MHz, 802.11n (HT20))

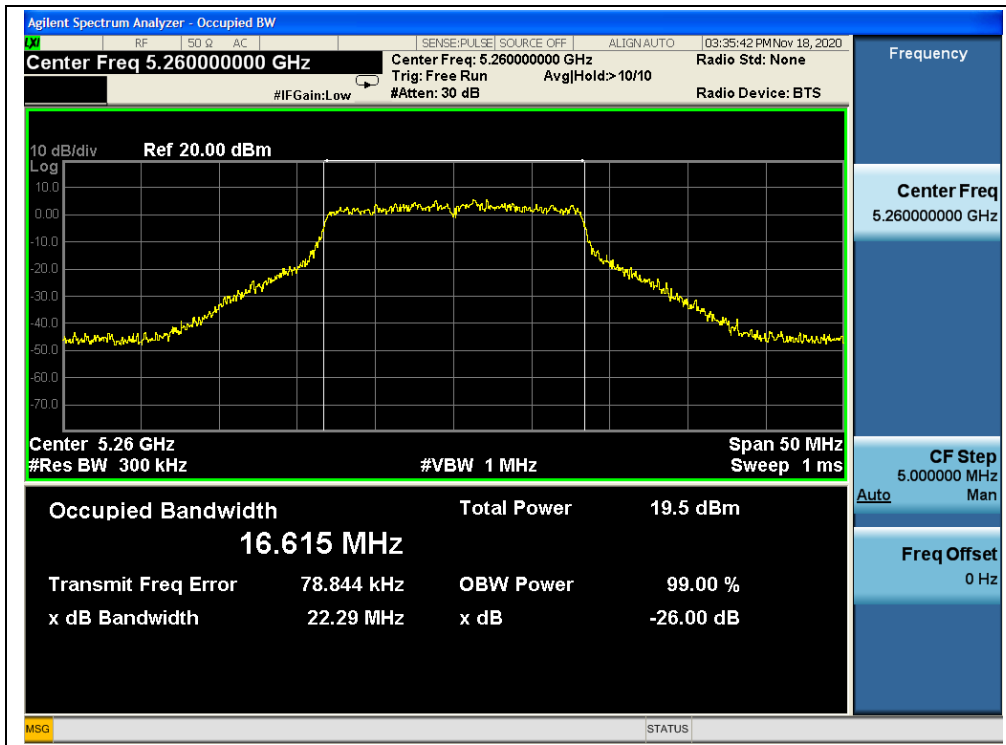

(Channel 52, 5260MHz, 802.11n (HT20))




(Channel 60, 5300MHz, 802.11n (HT20))

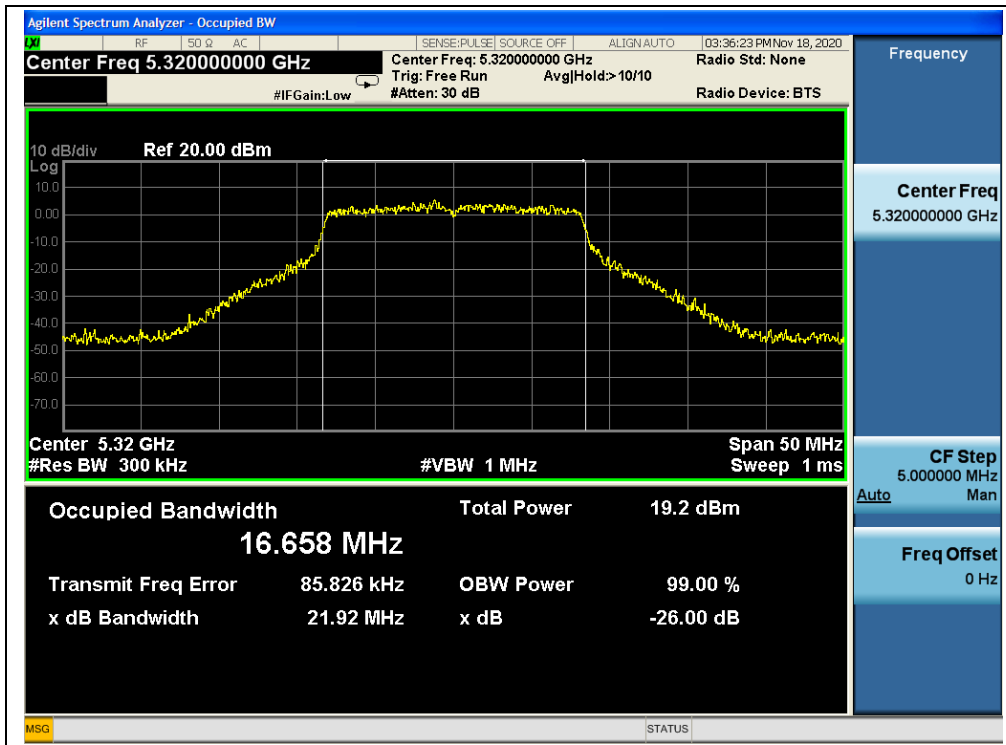

(Channel 64, 5320MHz, 802.11n (HT20))




(Channel 100, 5500MHz, 802.11n (HT20))

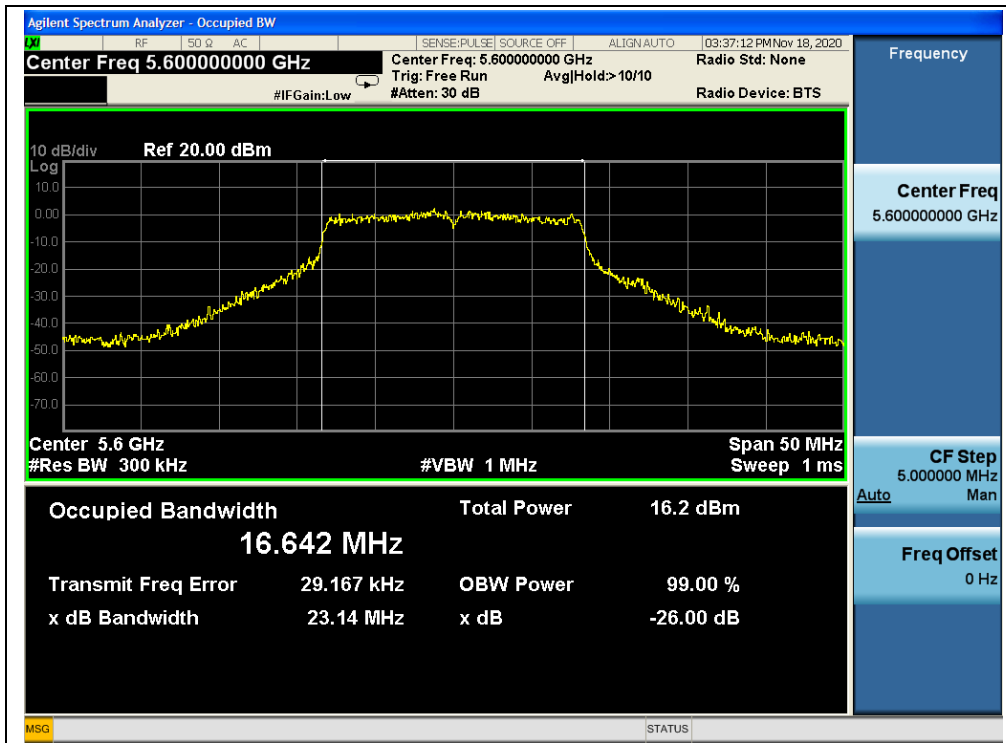

(Channel 120, 5600MHz, 802.11n (HT20))




(Channel 144, 5720MHz, 802.11n (HT20))

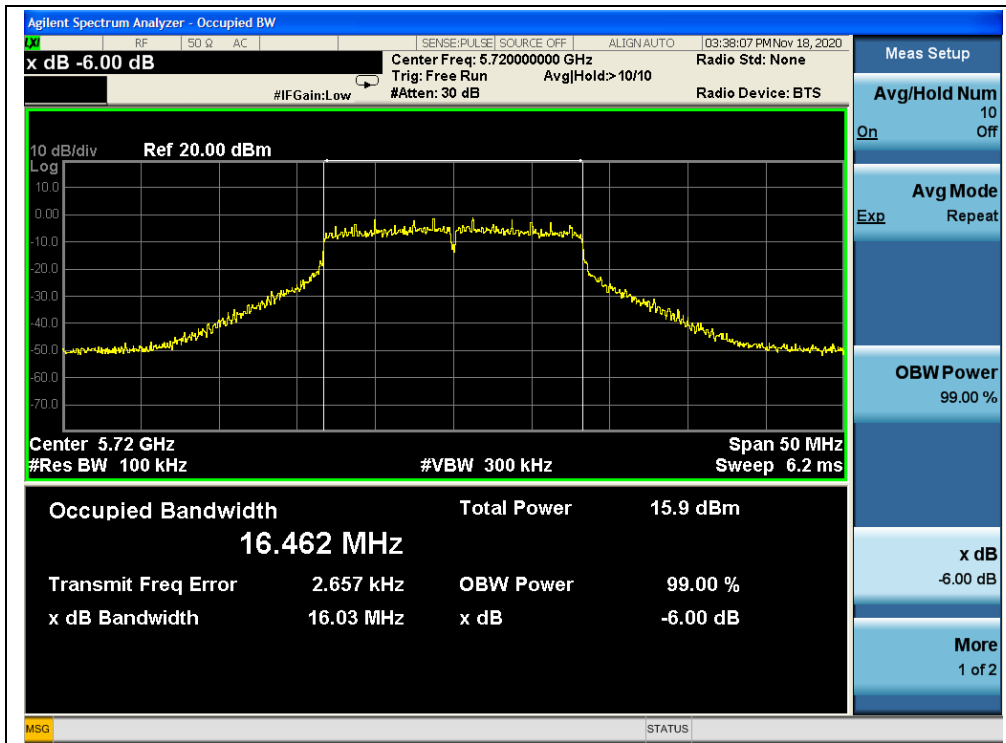


(Channel 144, 5720MHz, 802.11 n (HT20))



(Channel 149, 5745MHz, 802.11 n (HT20))

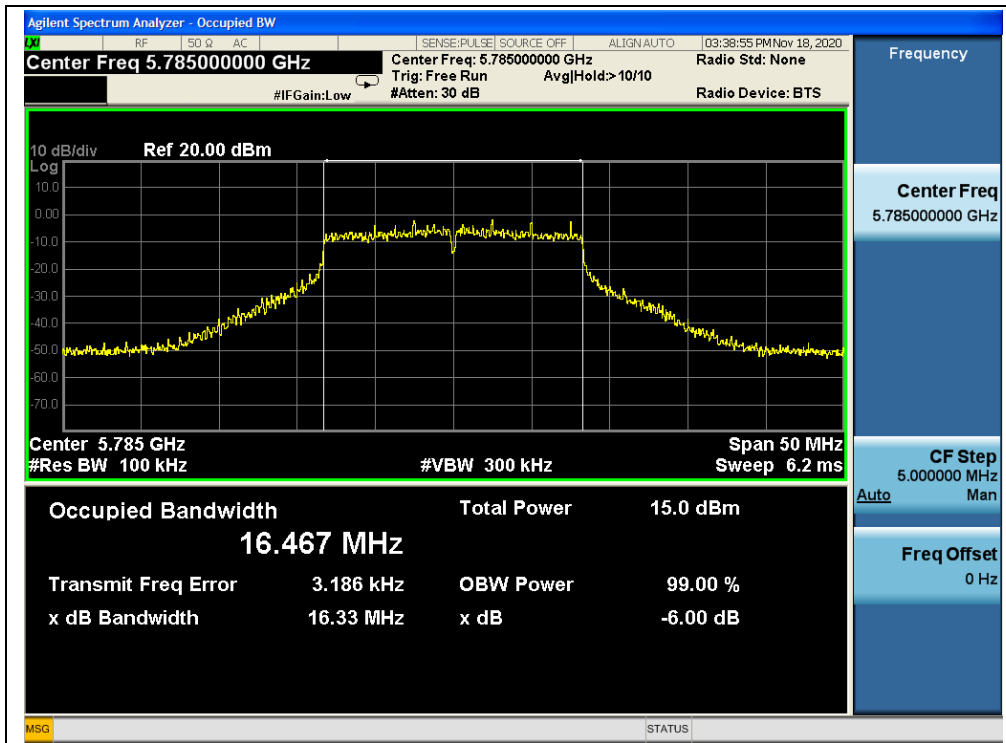

(Channel 157, 5785MHz, 802.11 n (HT20))

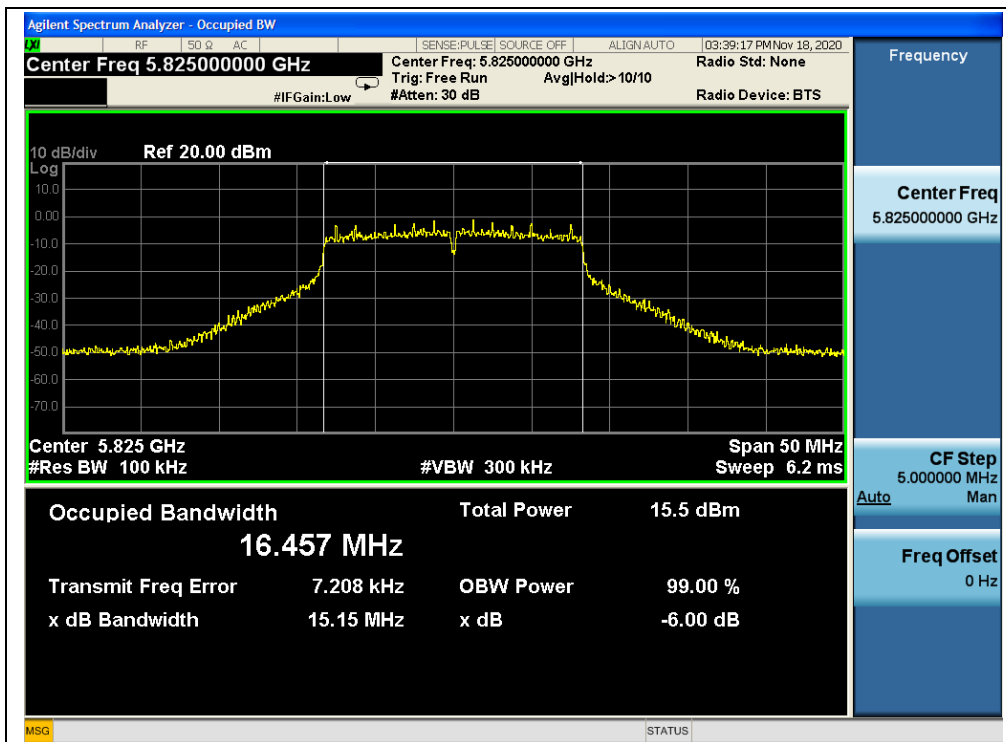

(Channel 165, 5825MHz, 802.11 n (HT20))




802.11n (HT40) Test mode


A. Test Verdict:

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
38	5190	41.56
46	5230	41.50
54	5270	40.96
62	5310	40.81
102	5510	41.91
126	5630	41.27
142	5710	41.50
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
142	5710	36.41
151	5755	36.39
159	5795	36.37


B. Test Plot:

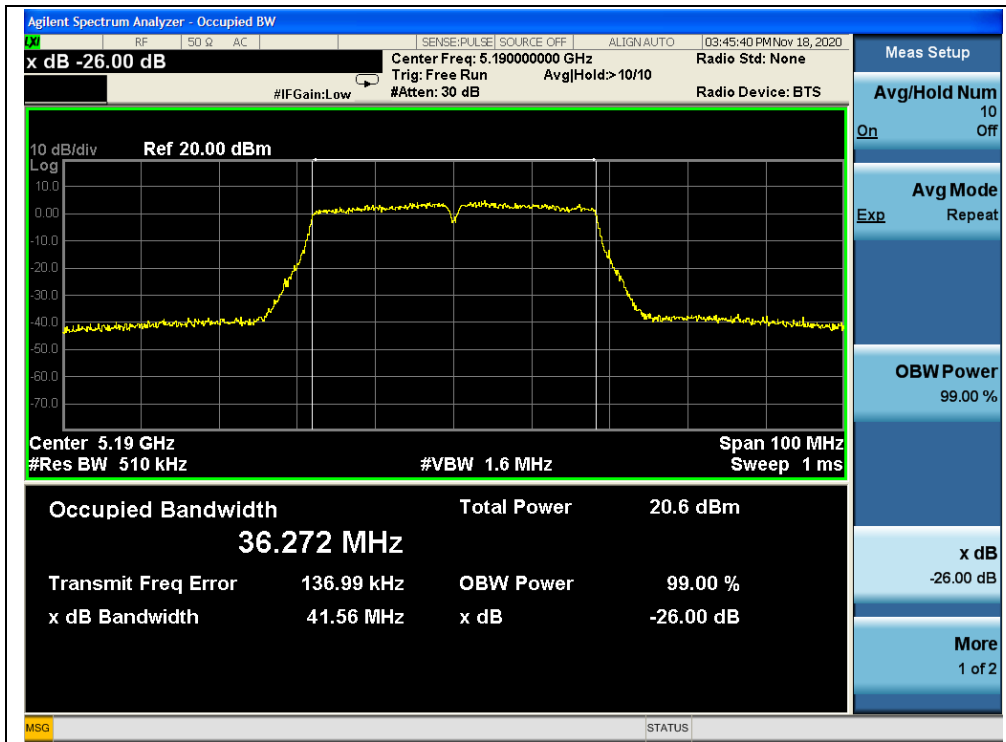


(Channel 38, 5190MHz, 802.11n (HT40))

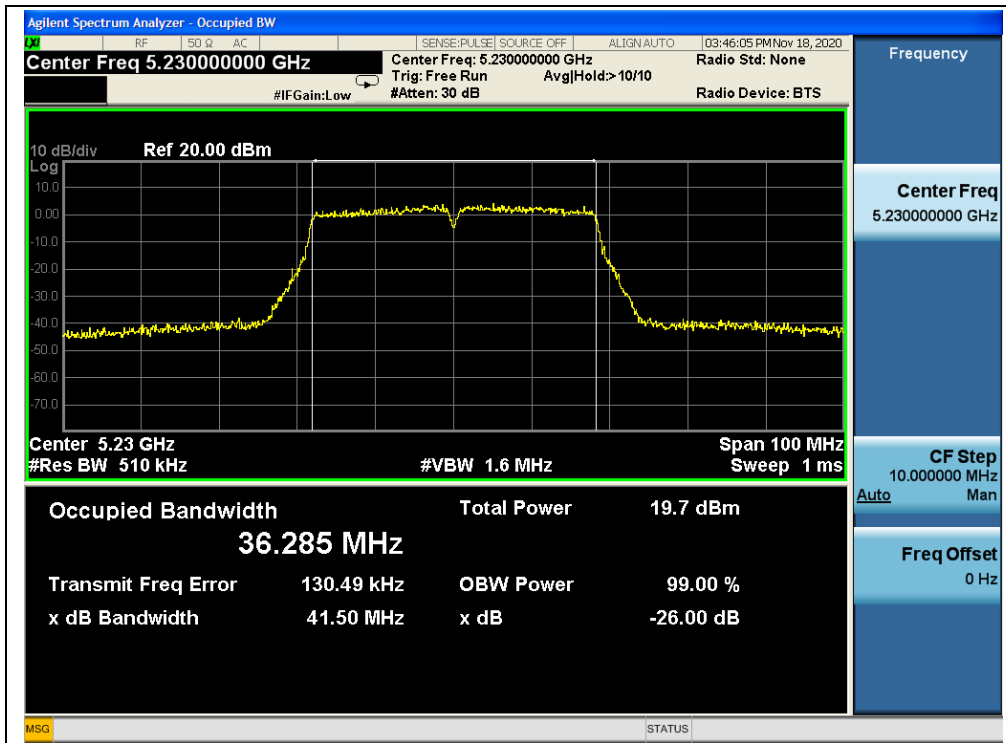


(Channel 46, 5230MHz, 802.11n (HT40))

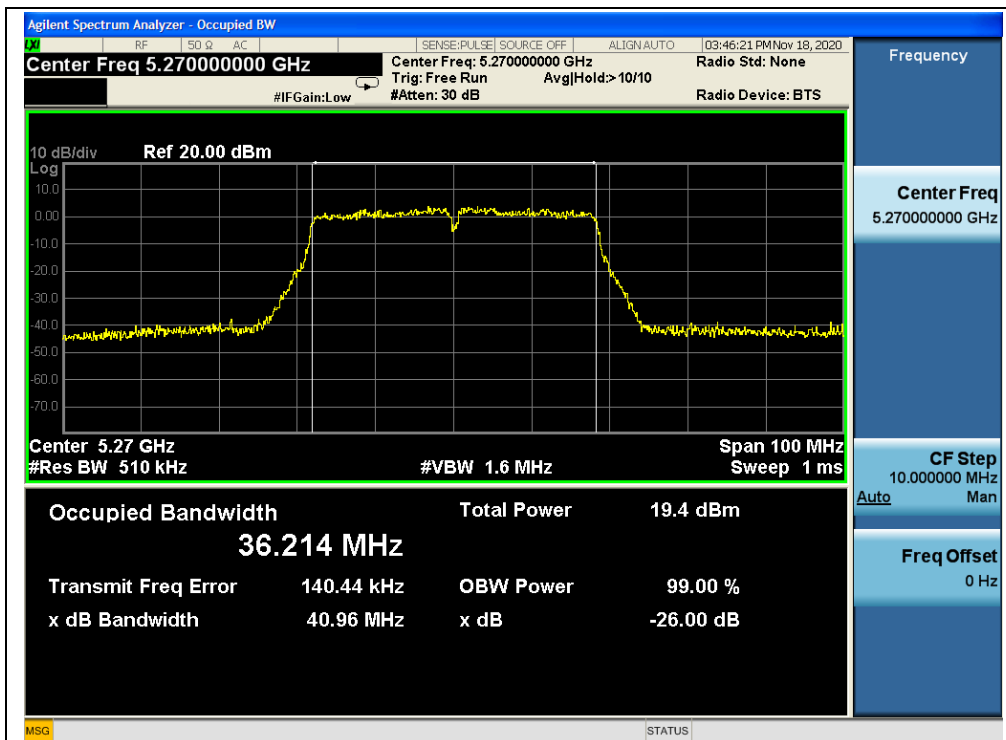


(Channel 54, 5270MHz, 802.11n (HT40))

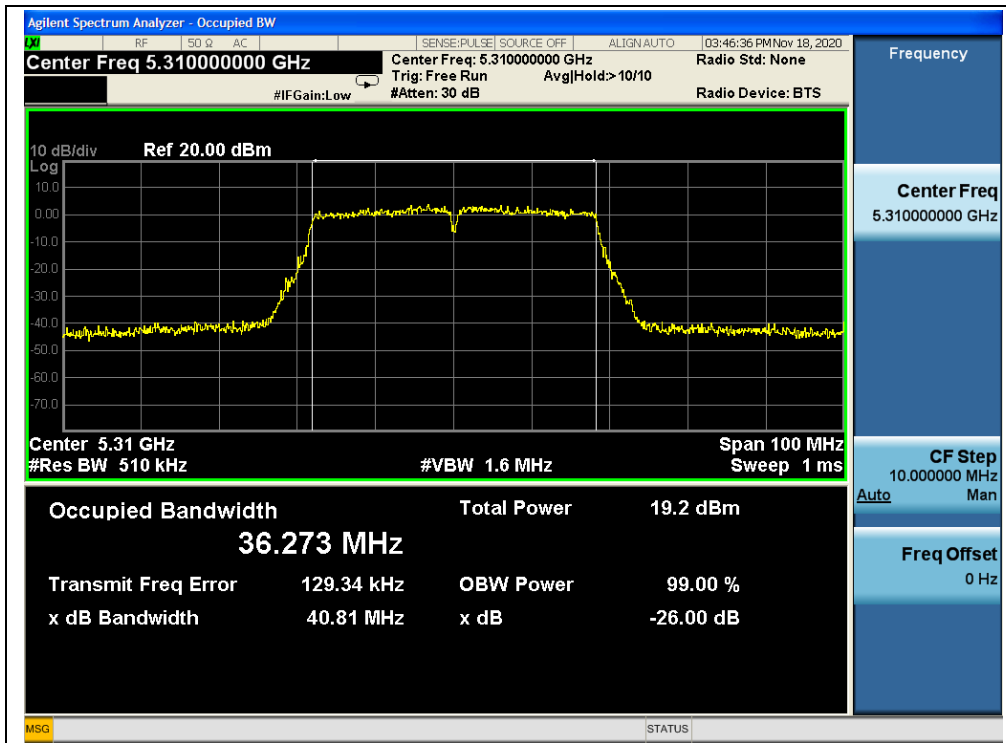


(Channel 62, 5310MHz, 802.11n (HT40))

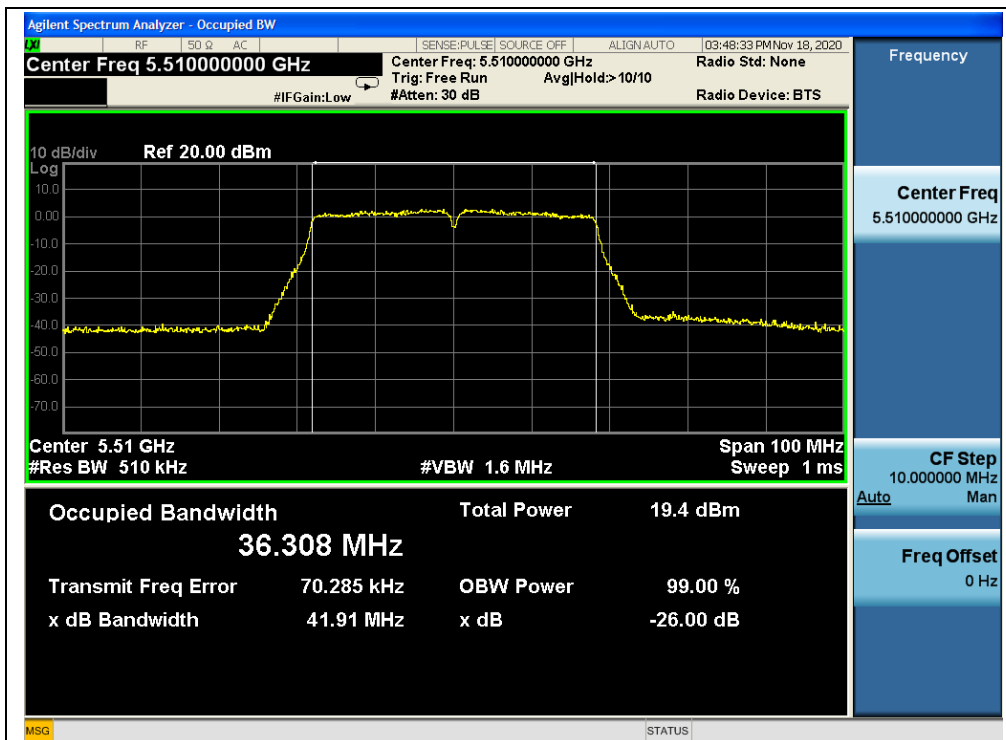


(Channel 102, 5510MHz, 802.11n (HT40))

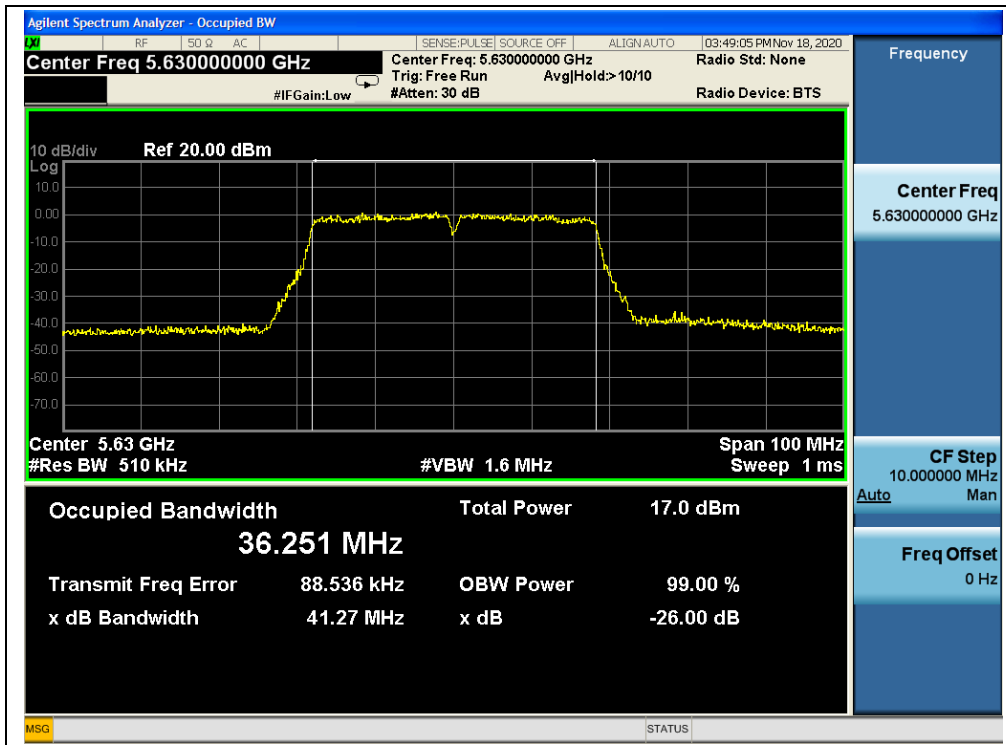


(Channel 126, 5630MHz, 802.11n (HT40))

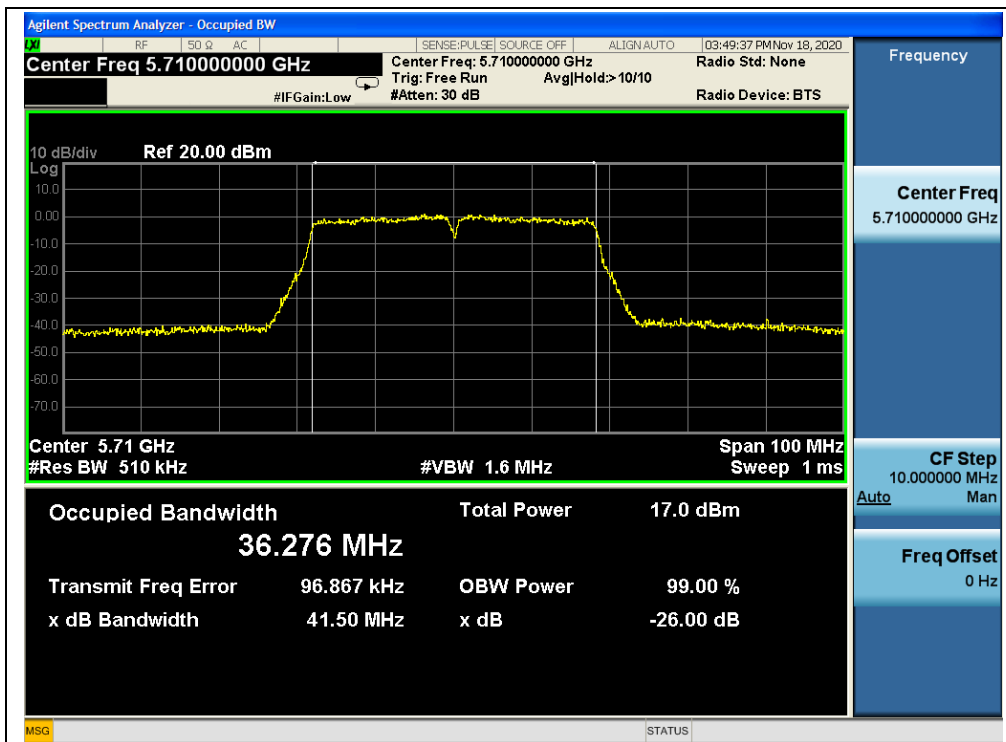


(Channel 142, 5710MHz, 802.11n (HT40))

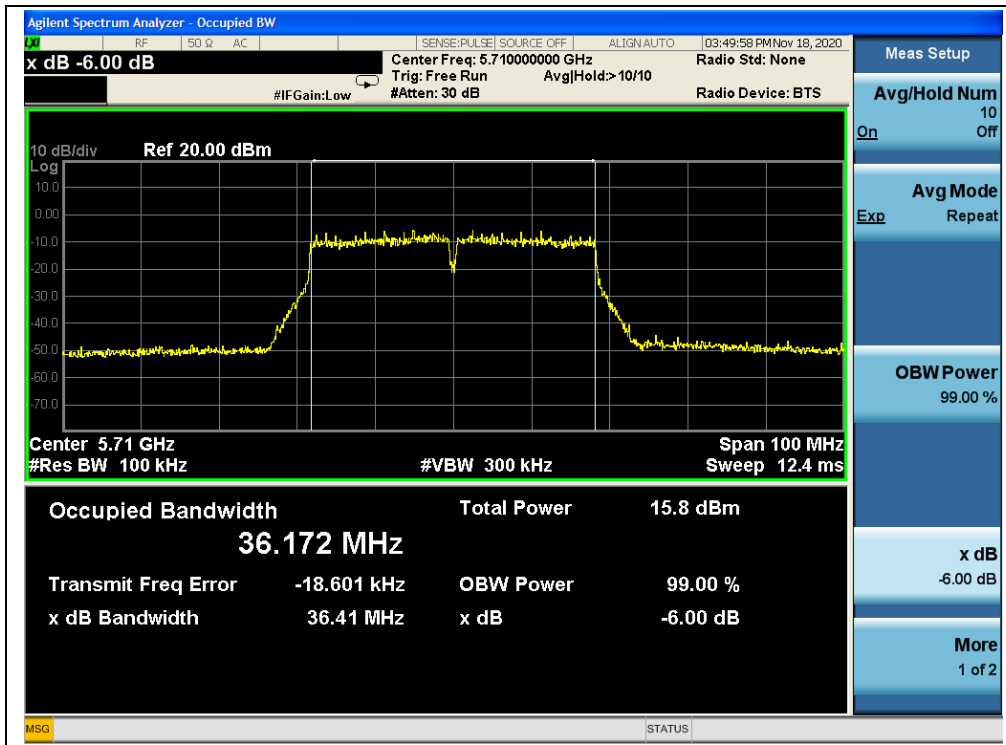

(Channel 142, 5710MHz, 802.11n (HT40))

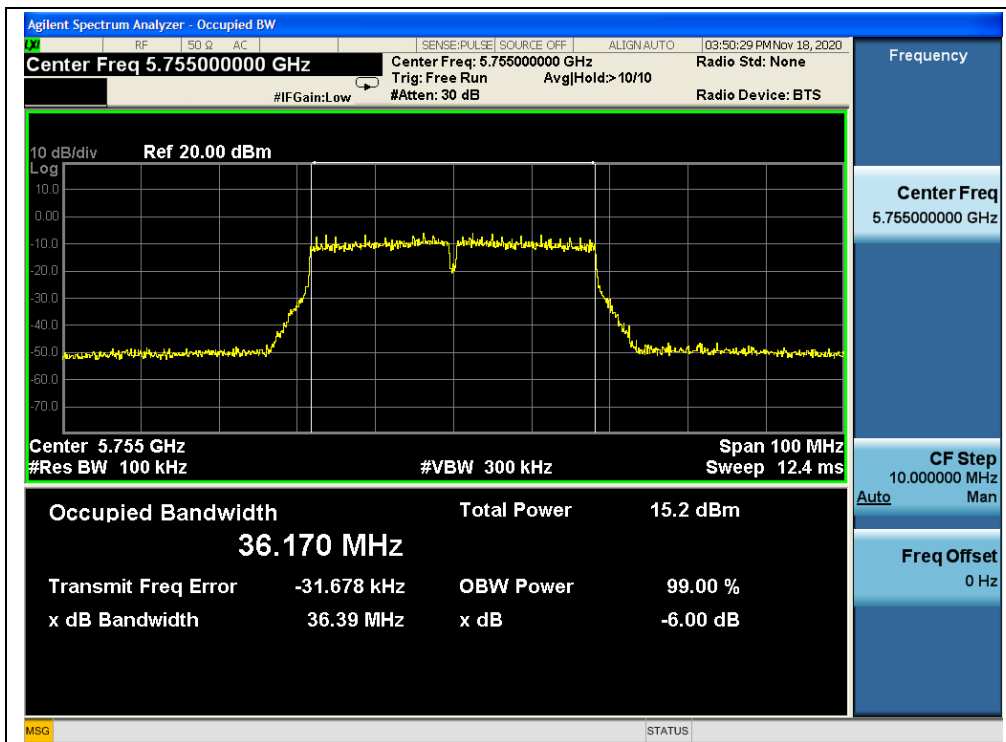

(Channel 151, 5755MHz, 802.11n (HT40))

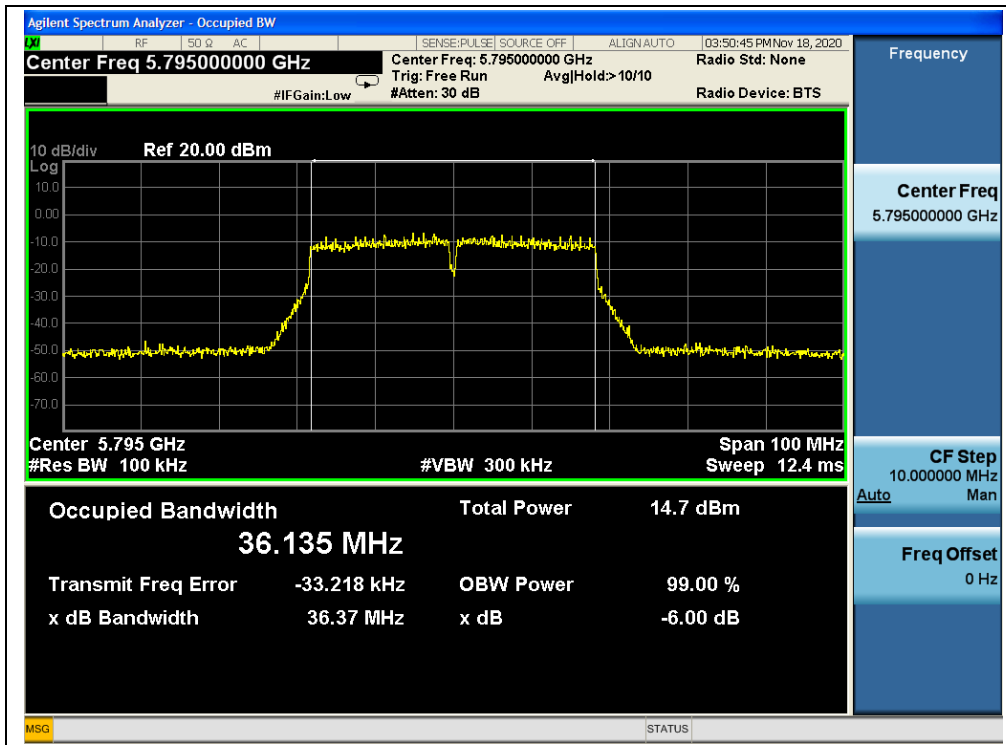

(Channel 159, 5795MHz, 802.11n (HT40))




802.11ac (VHT20) Mode


A. Test Verdict:

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
36	5180	23.80
44	5220	23.28
48	5240	24.24
52	5260	22.36
60	5300	22.81
64	5320	23.47
100	5500	25.02
120	5600	24.29
144	5720	23.70
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
144	5720	15.08
149	5745	15.13
157	5785	16.52
165	5825	17.26

B. Test Plot:

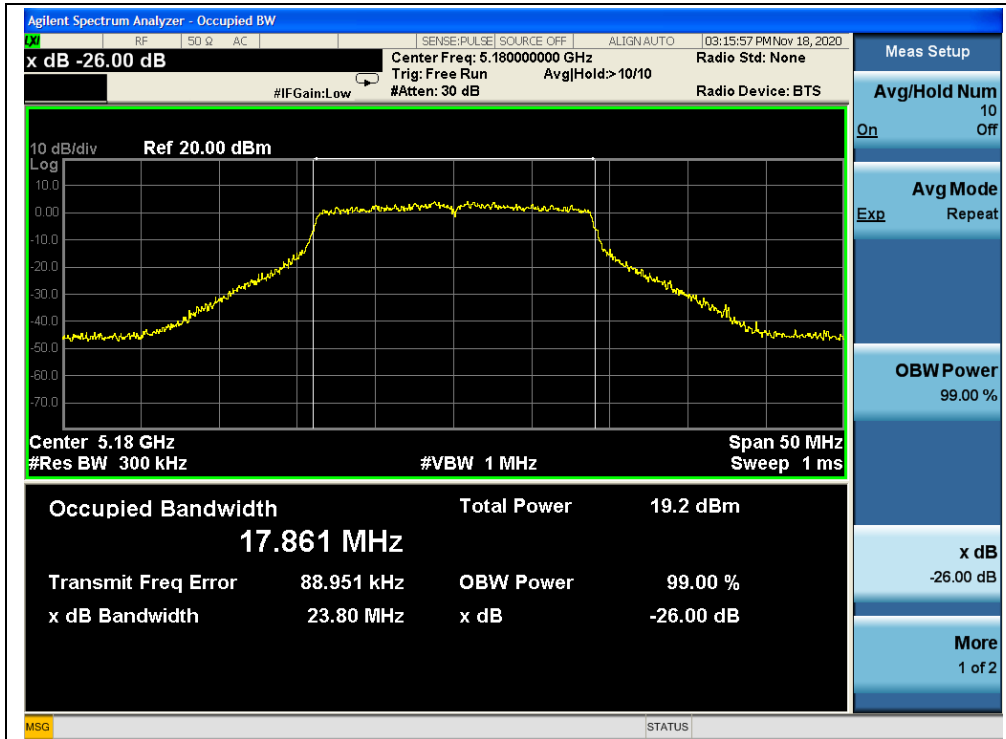


(Channel 36, 5180MHz, 802.11ac (VHT20))

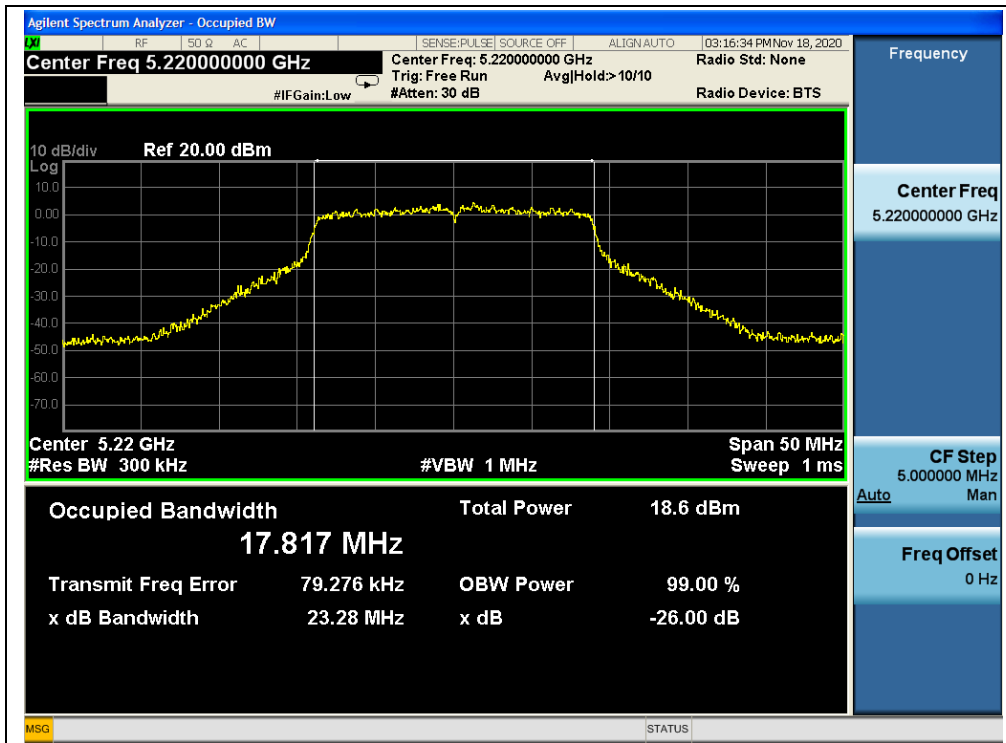


(Channel 44, 5220MHz, 802.11ac (VHT20))




(Channel 48, 5240MHz, 802.11ac (VHT20))

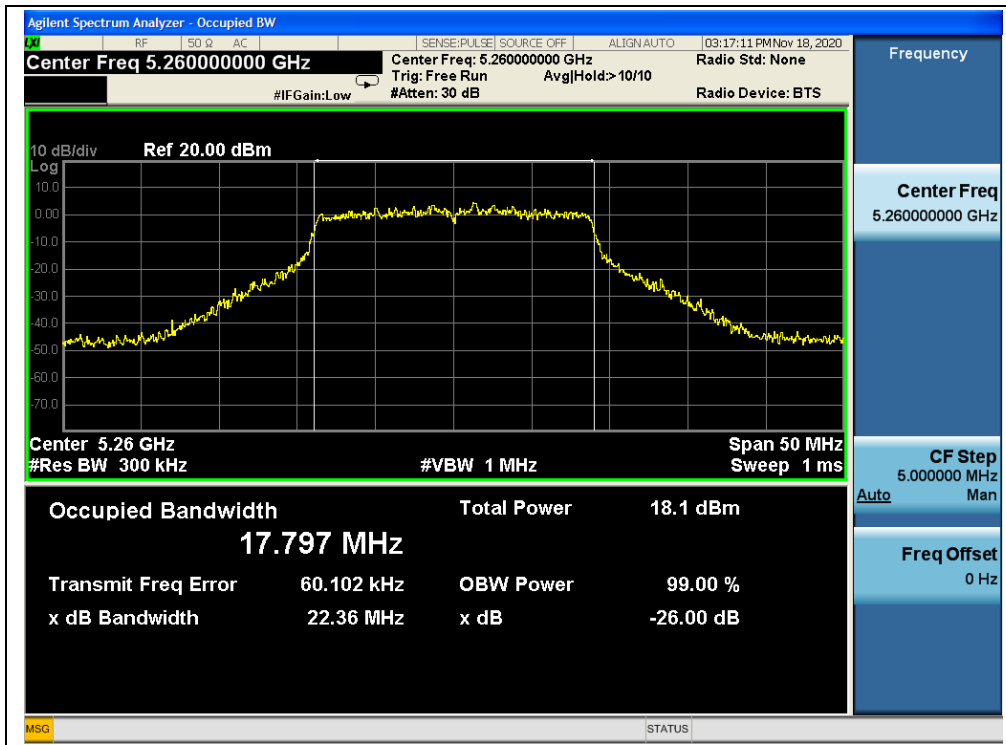


(Channel 52, 5260MHz, 802.11ac (VHT20))

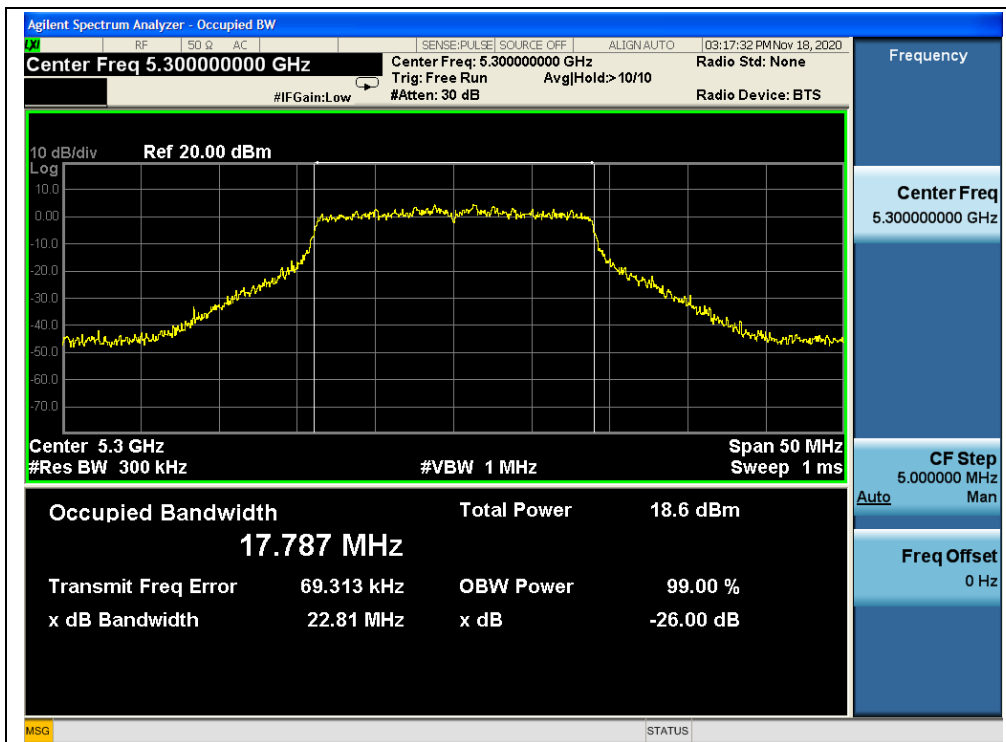


(Channel 60, 5300MHz, 802.11ac (VHT20))

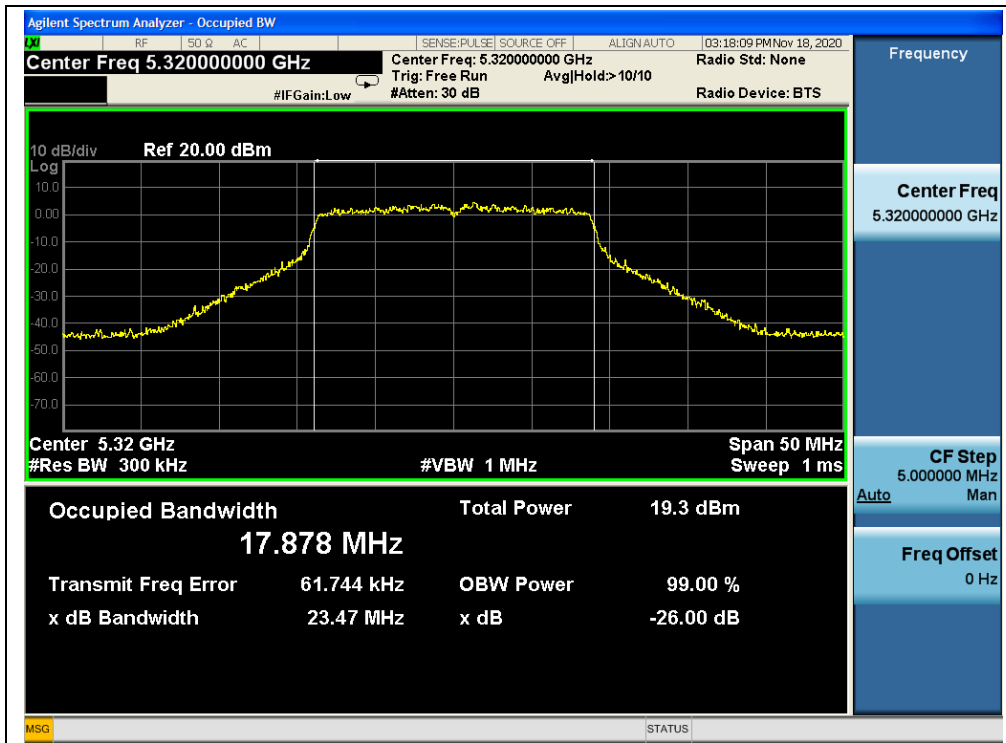

(Channel 64, 5320MHz, 802.11ac (VHT20))

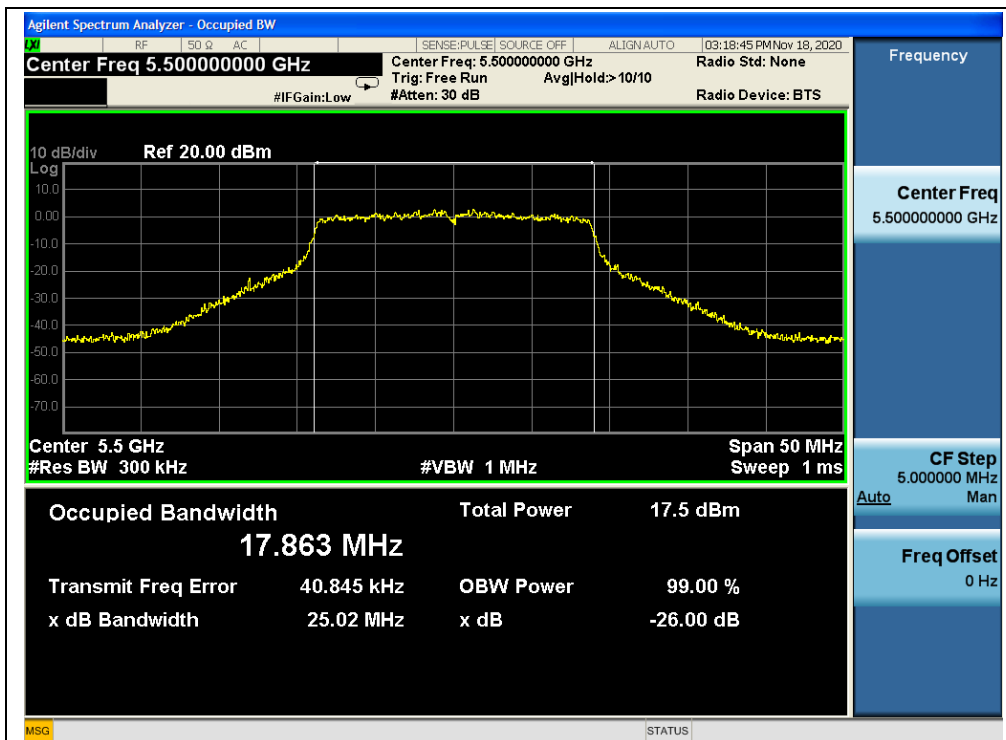


(Channel 100, 5500MHz, 802.11ac (VHT20))

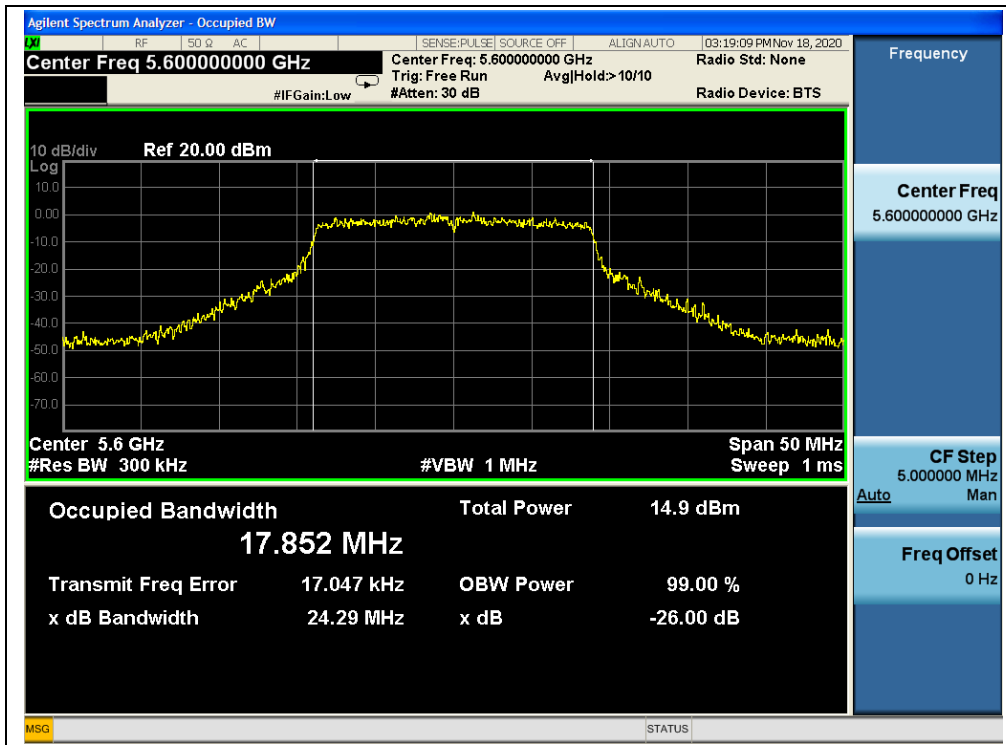


(Channel 120, 5600MHz, 802.11ac (VHT20))




(Channel 144, 5720MHz, 802.11ac (VHT20))

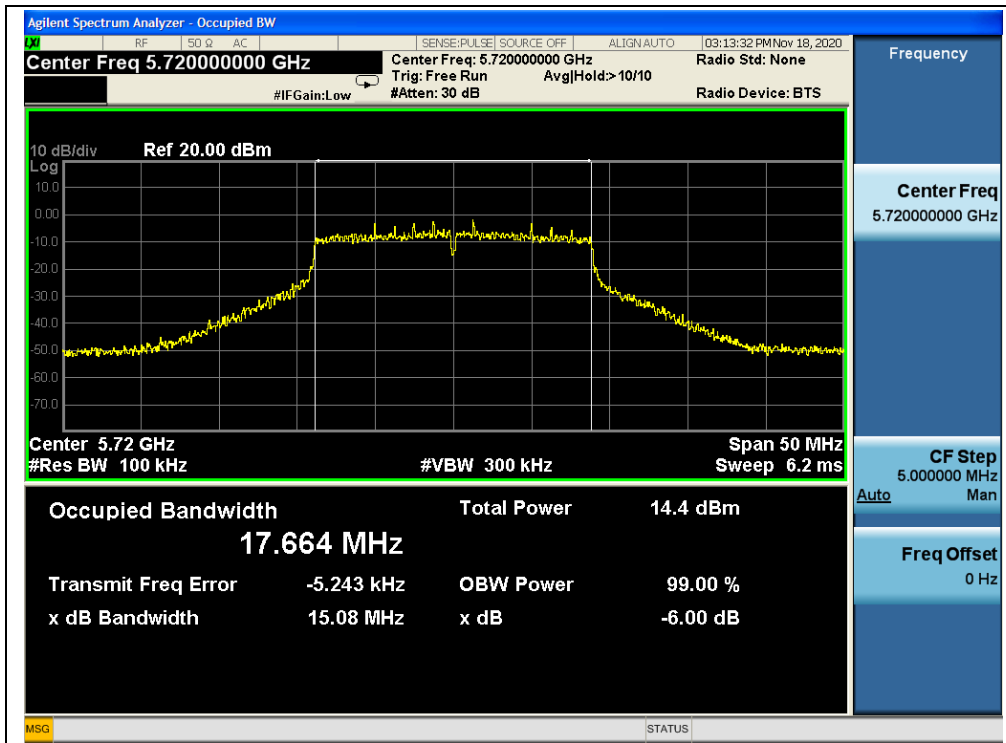


(Channel 144, 5720MHz, 802.11ac (VHT20))

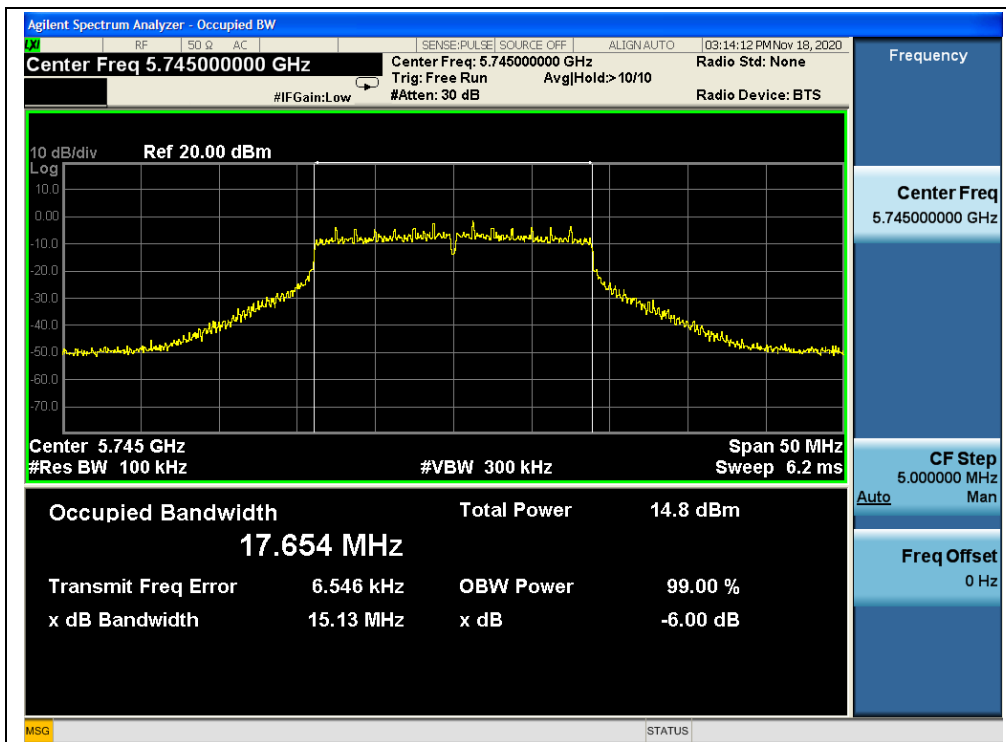

(Channel 149, 5745MHz, 802.11 ac (VHT20))

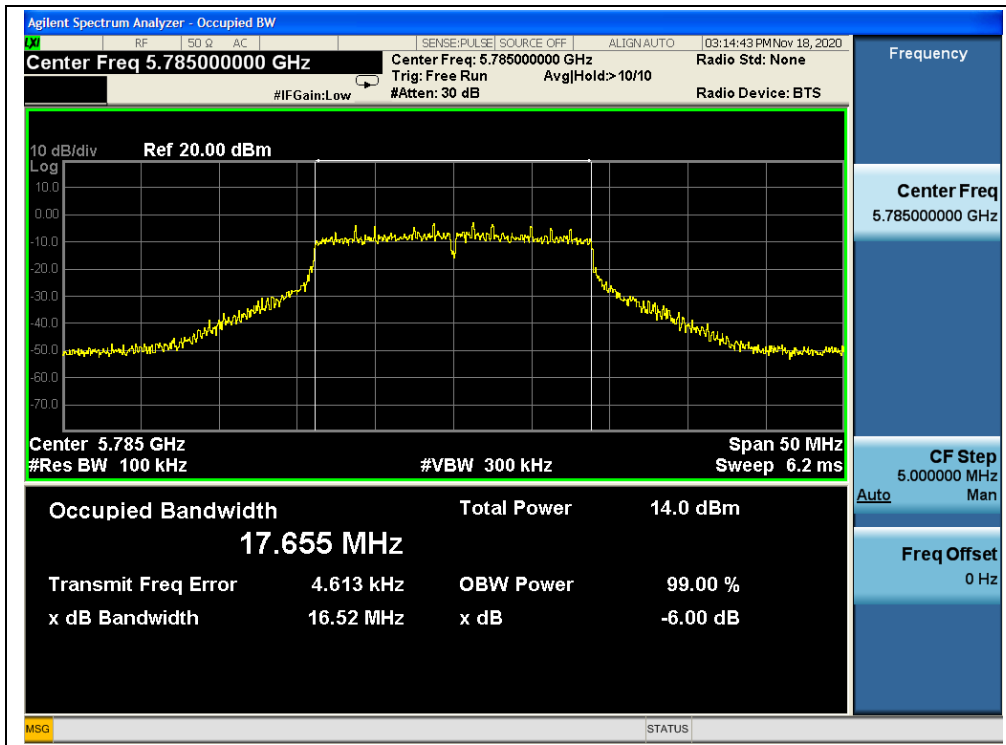

(Channel 157, 5785MHz, 802.11 ac (VHT20))

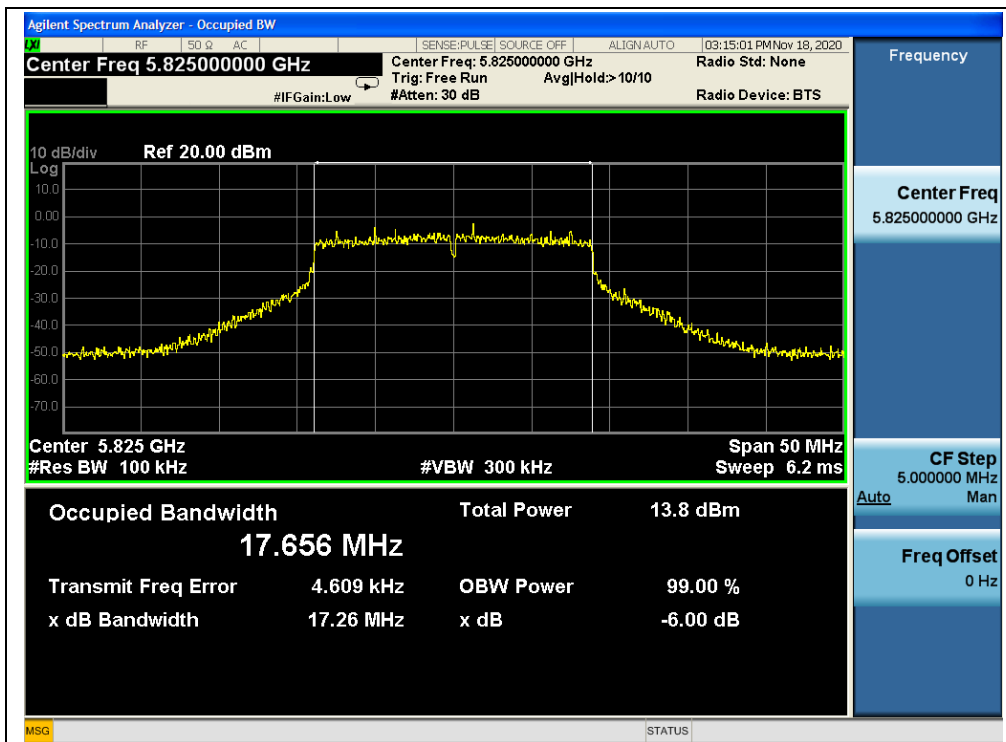

(Channel 165, 5825MHz, 802.11 ac (VHT20))




802.11ac (VHT40) Mode


A. Test Verdict:

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
38	5190	41.41
46	5230	41.46
54	5270	40.93
62	5310	40.83
102	5510	41.41
126	5630	41.46
142	5710	40.90
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
142	5710	36.35
151	5755	36.37
159	5795	36.11


B. Test Plot:

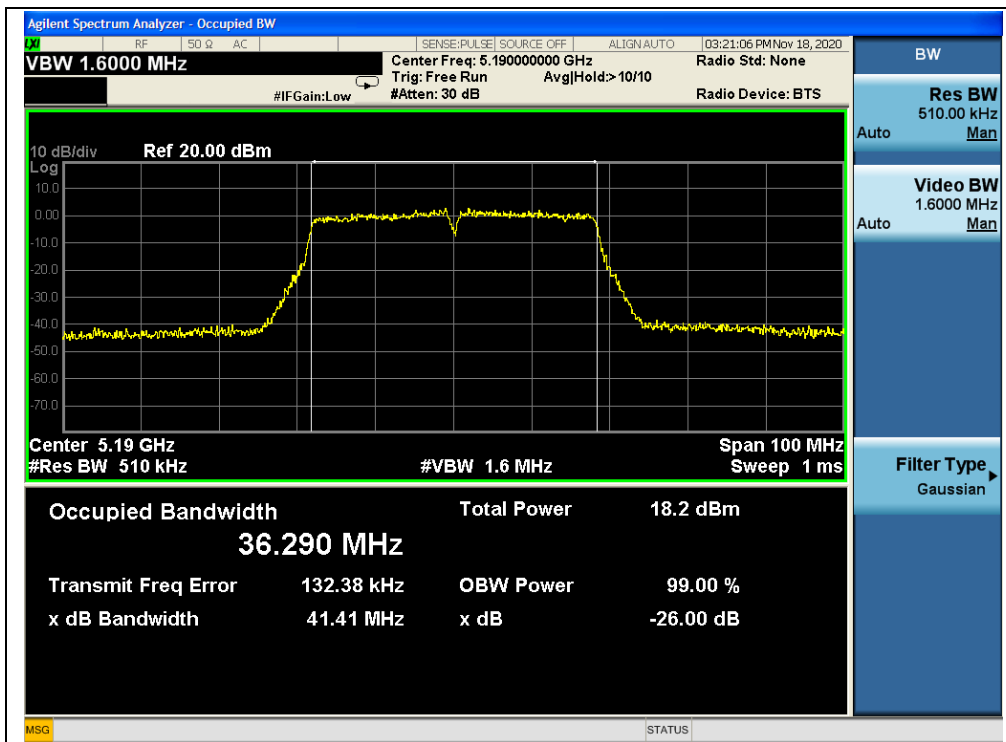


(Channel 38, 5190MHz, 802.11ac (VHT40))

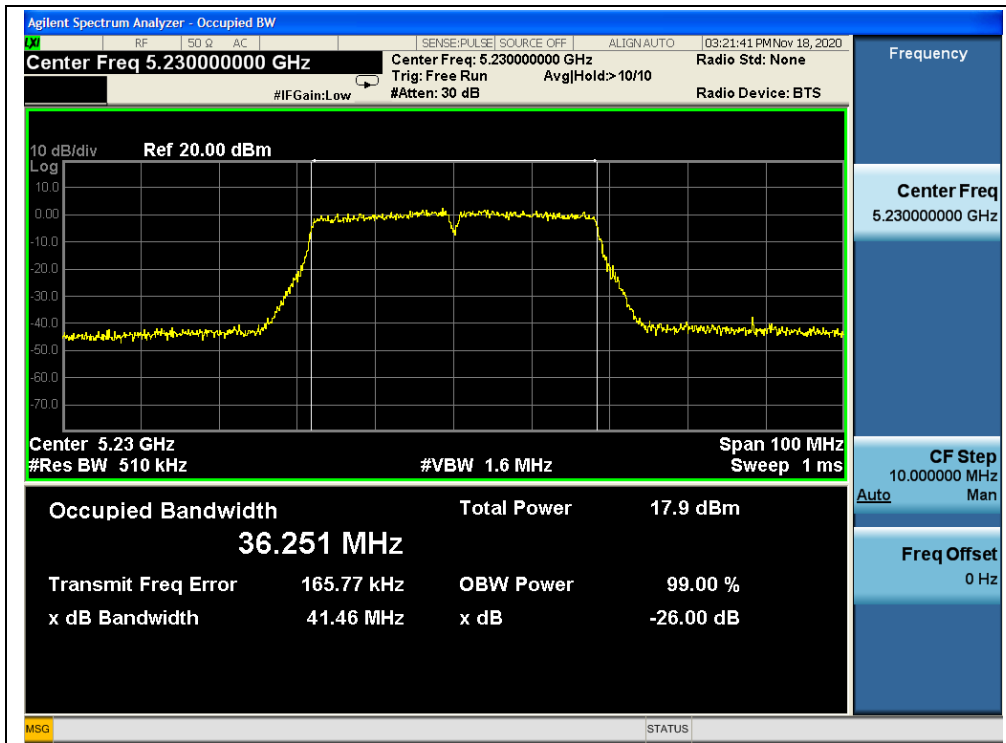


(Channel 46, 5230MHz, 802.11ac (VHT40))

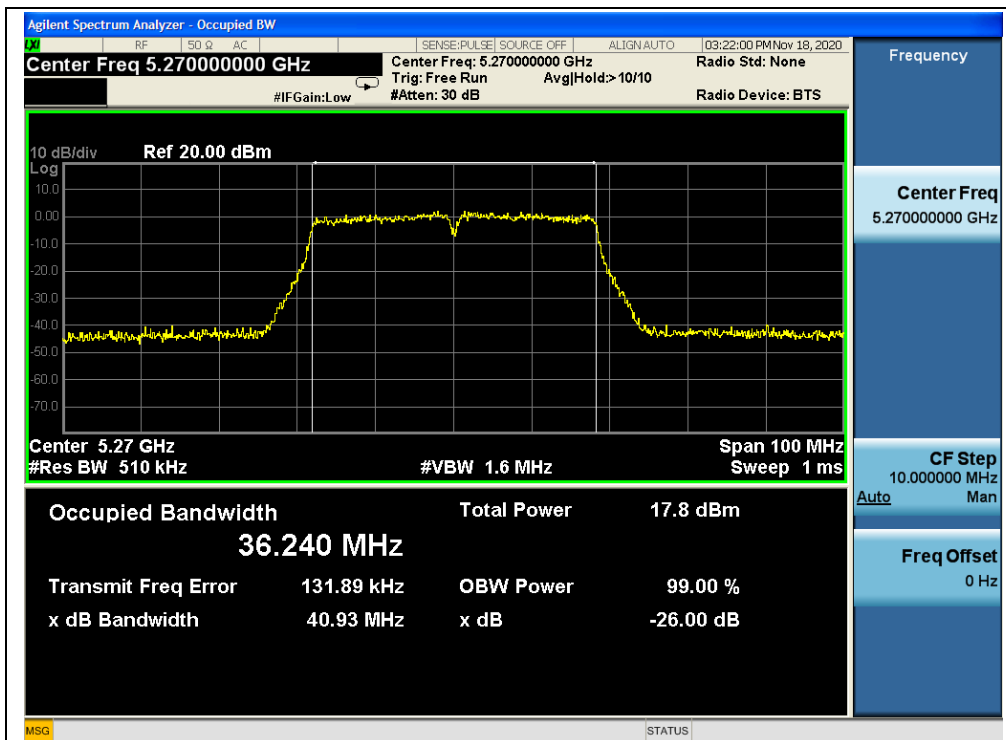


(Channel 54, 5270MHz, 802.11ac (VHT40))

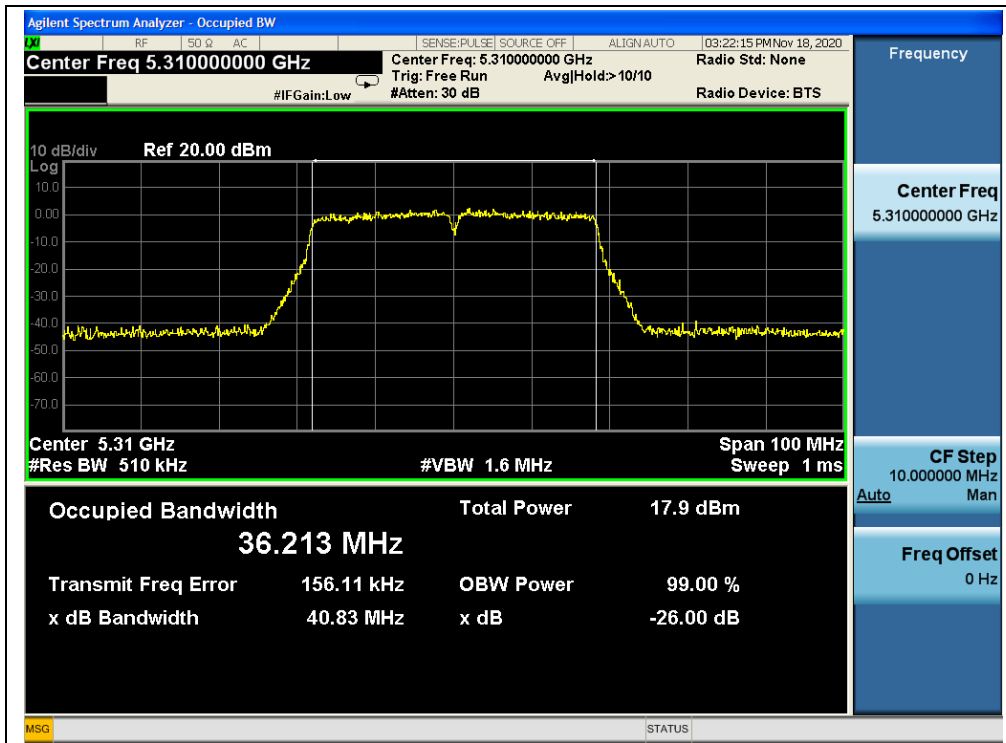


(Channel 62, 5310MHz, 802.11ac (VHT40))

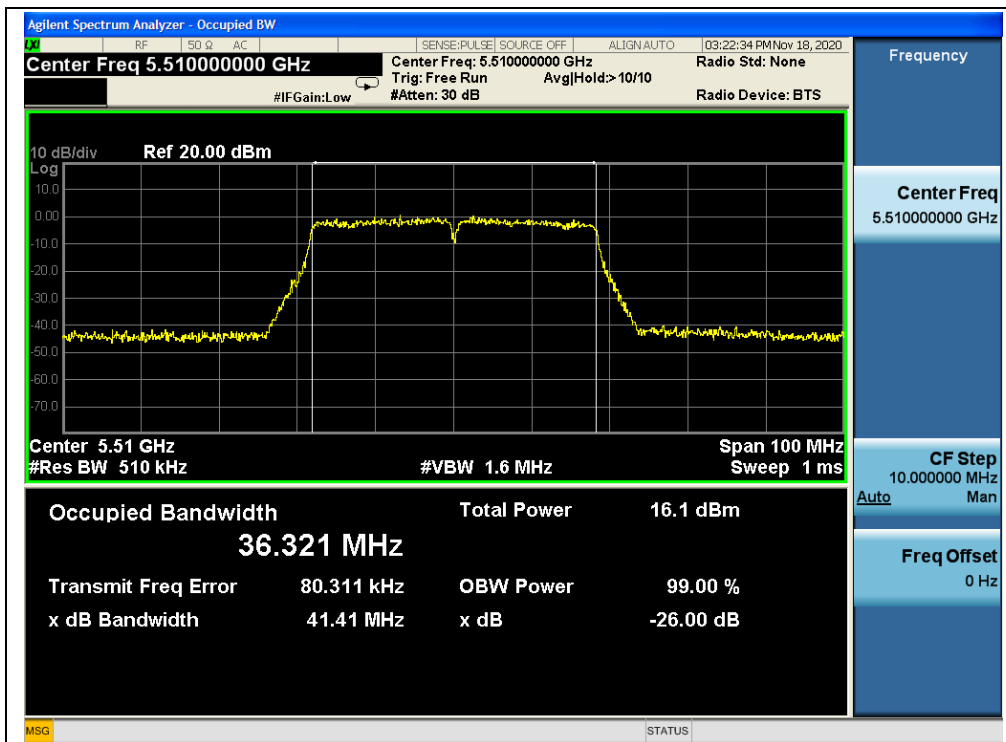


(Channel 102, 5510MHz, 802.11ac (VHT40))

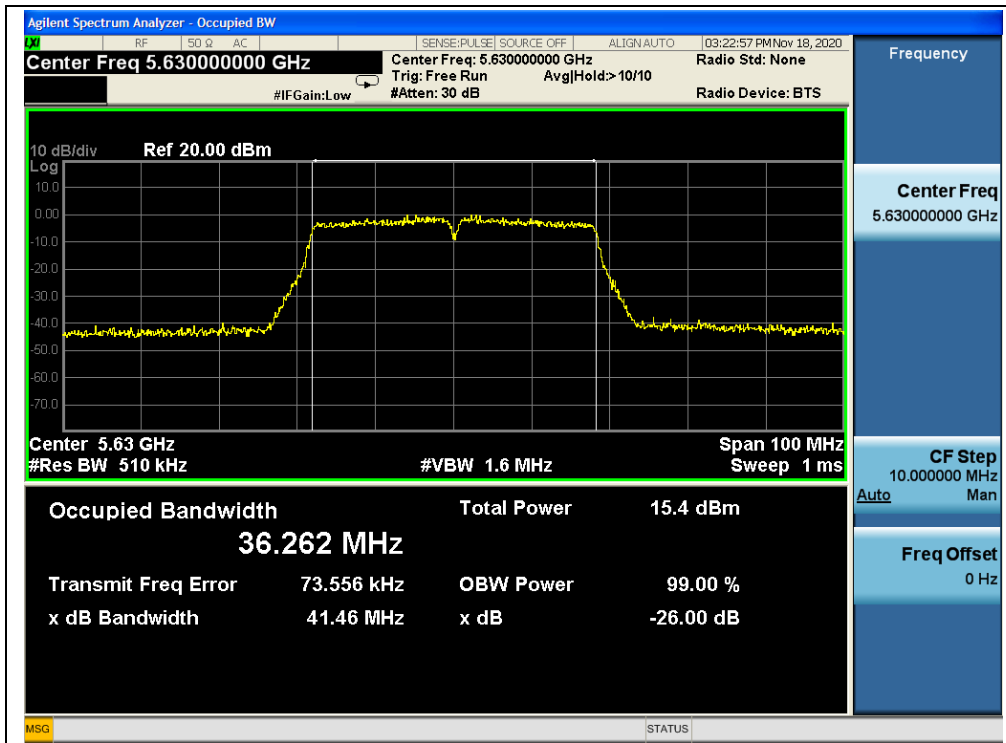


(Channel 126, 5630MHz, 802.11ac (VHT40))

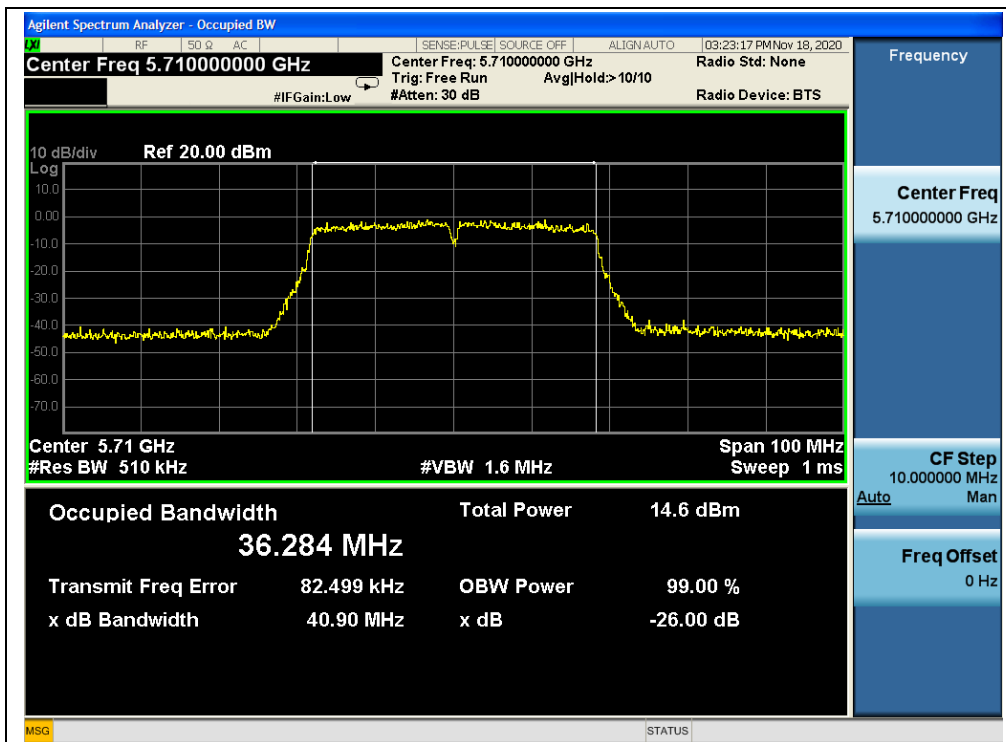


(Channel 142, 5710MHz, 802.11ac (VHT40))

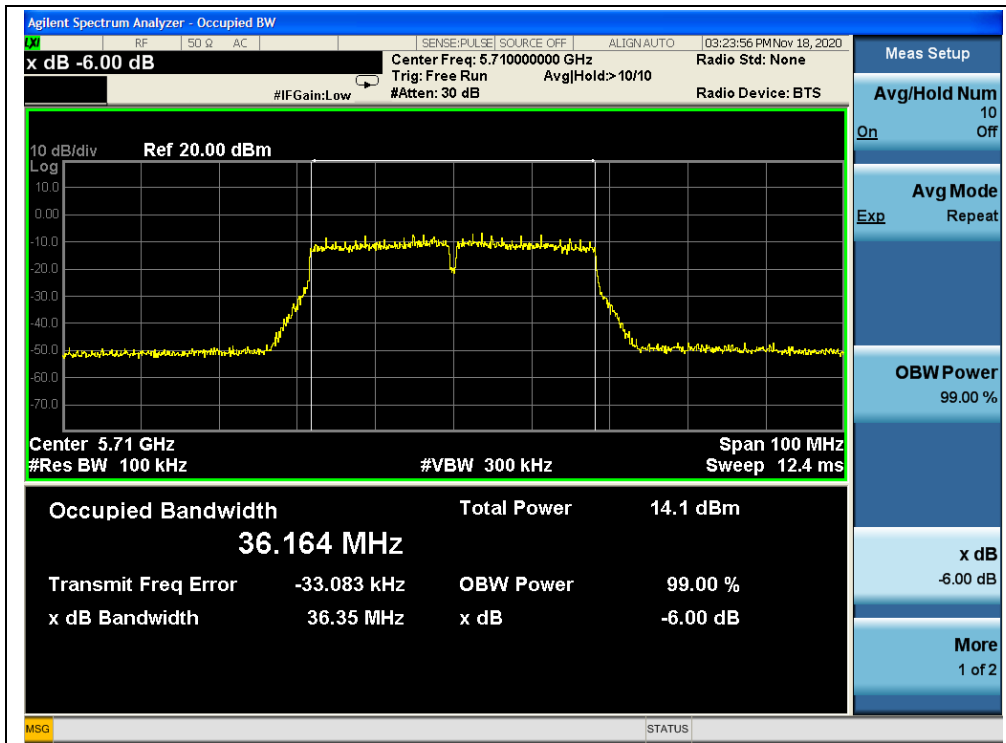

(Channel 142, 5710MHz, 802.11ac (VHT40))

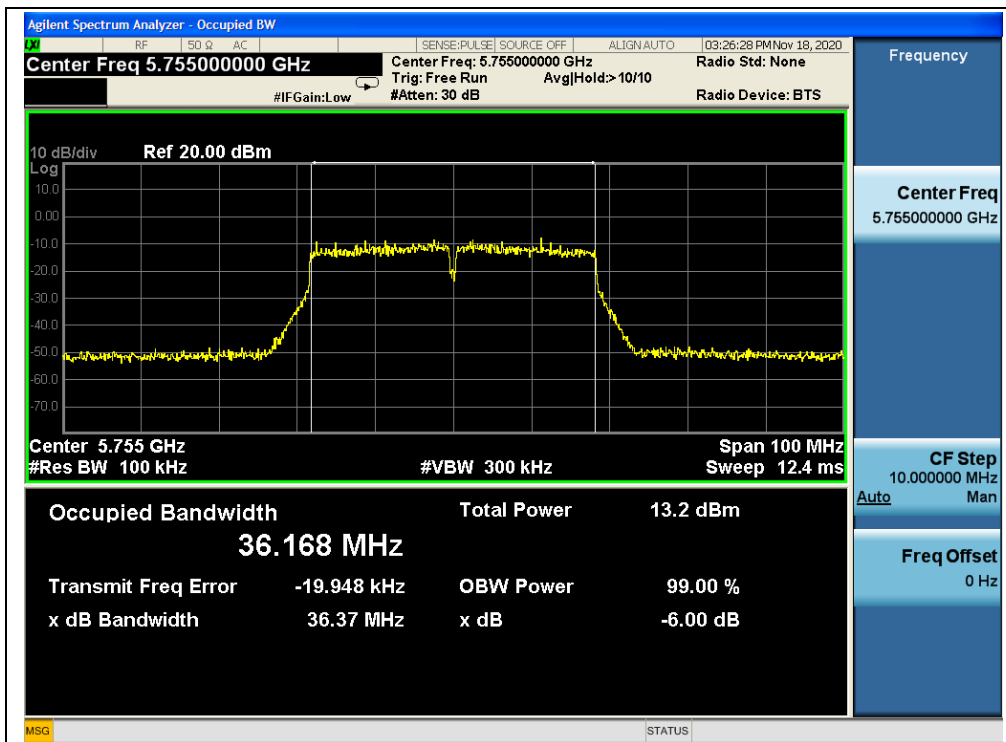

(Channel 151, 5755MHz, 802.11ac (VHT40))

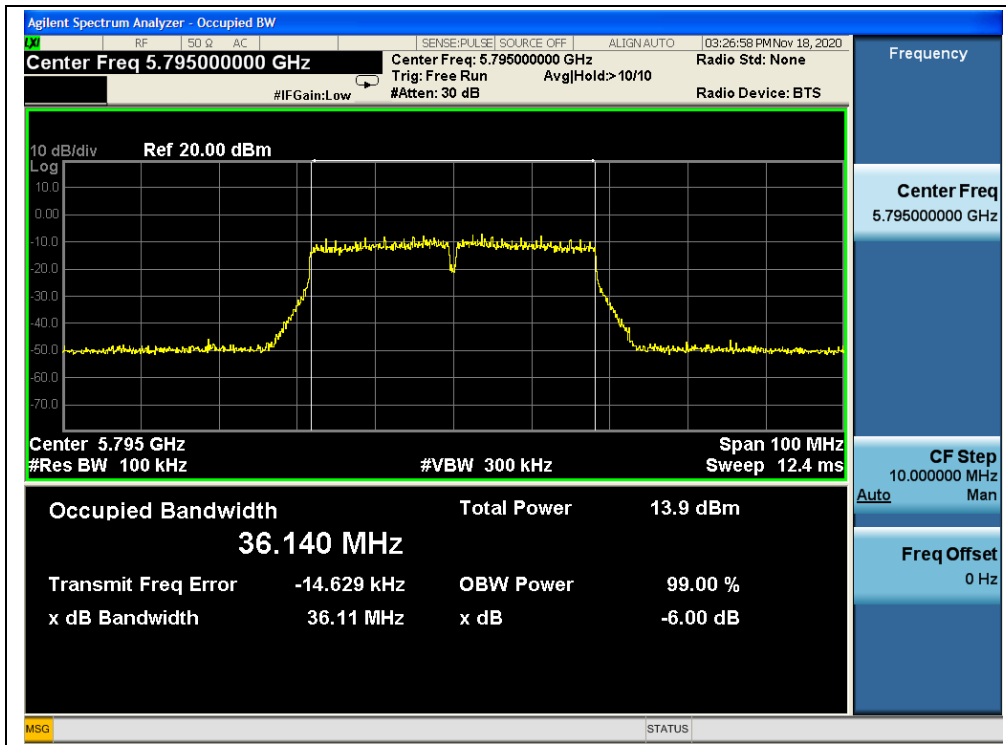

(Channel 159, 5795MHz, 802.11ac (VHT40))




802.11ac (VHT80) Mode


A. Test Verdict:

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
42	5210	83.42
58	5290	83.68
106	5530	83.59
122	5610	83.71
138	5690	82.20
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
138	5690	75.15
155	5775	75.16


B. Test Plot:

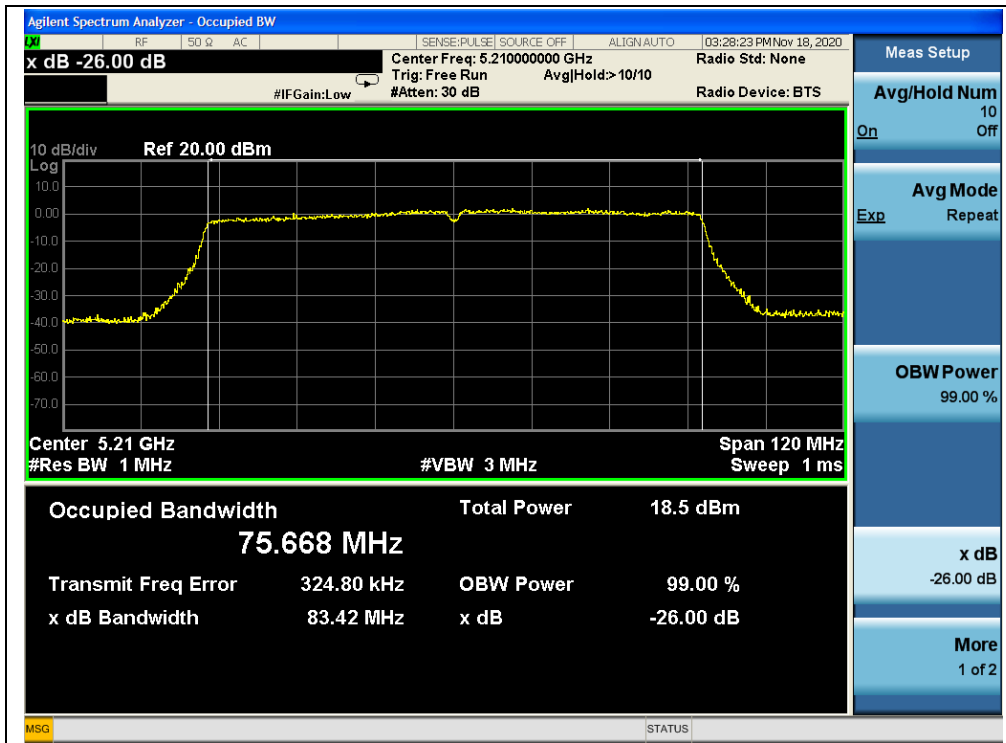


(Channel 42, 5210MHz, 802.11ac (VHT80))

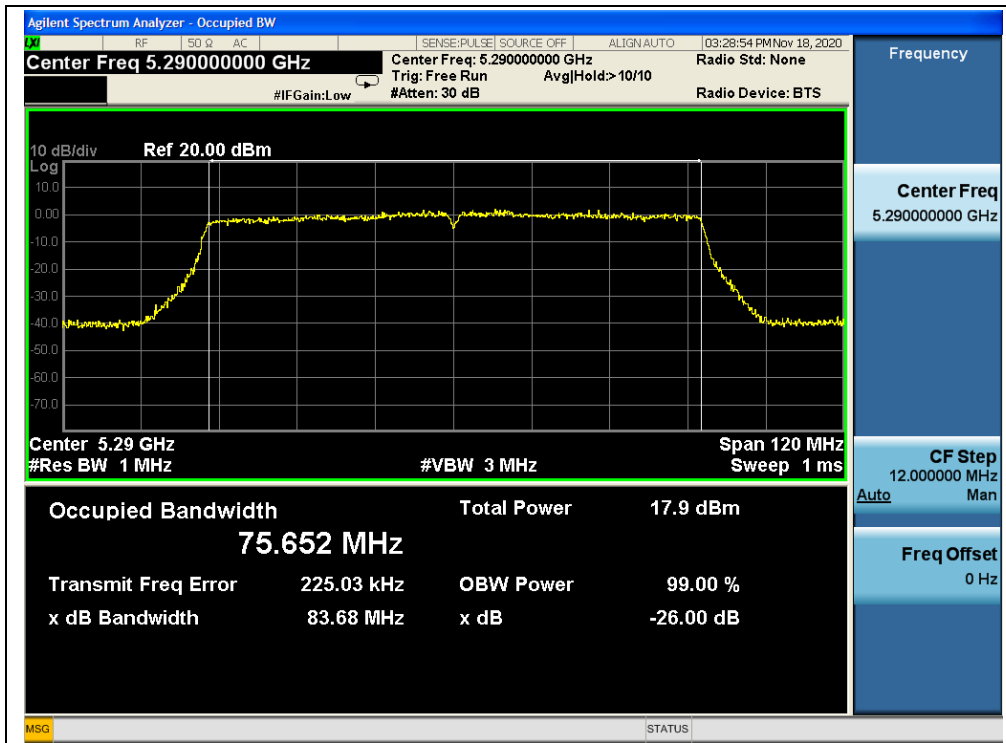


(Channel 58, 5290MHz, 802.11ac (VHT80))

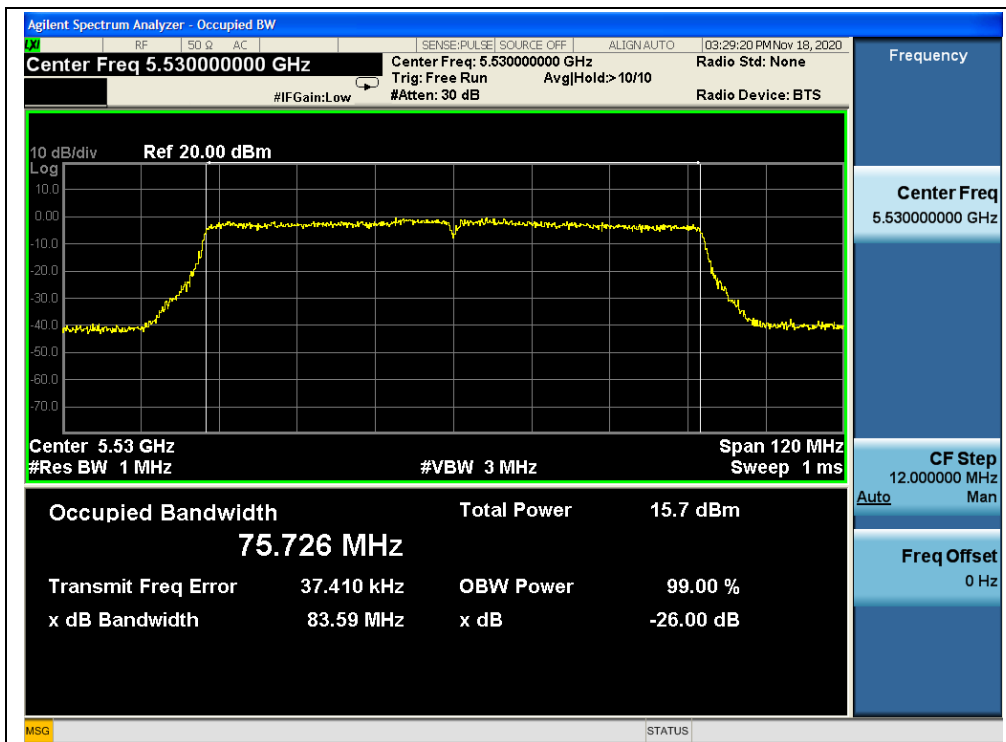


(Channel 106, 5530MHz, 802.11ac (VHT80))

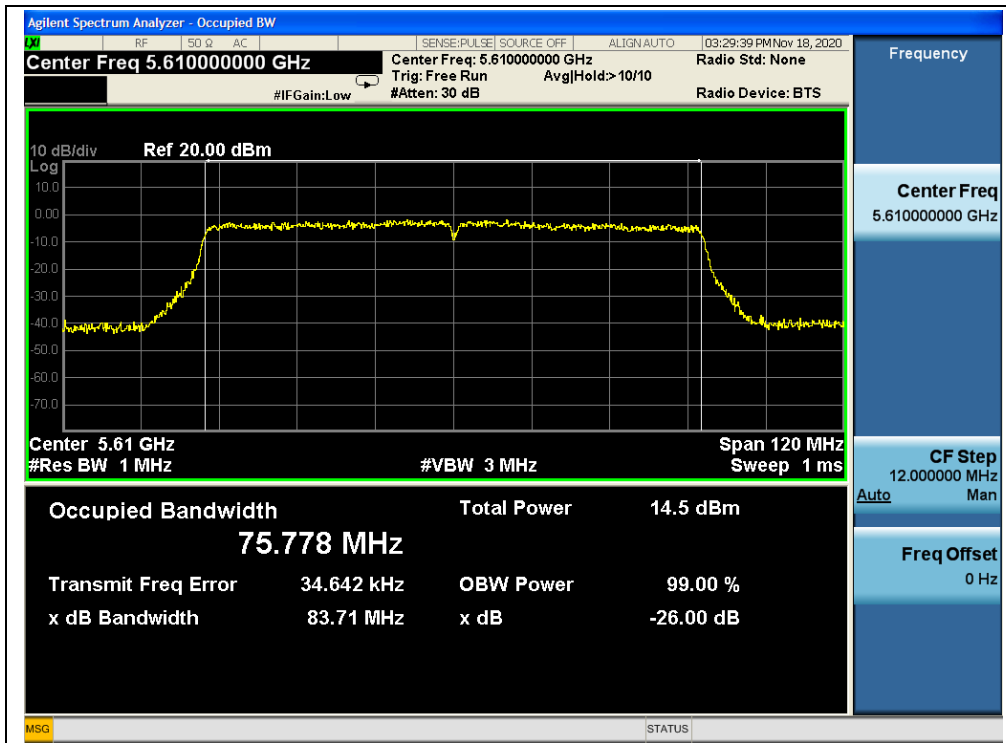


(Channel 122, 5610MHz, 802.11ac (VHT80))

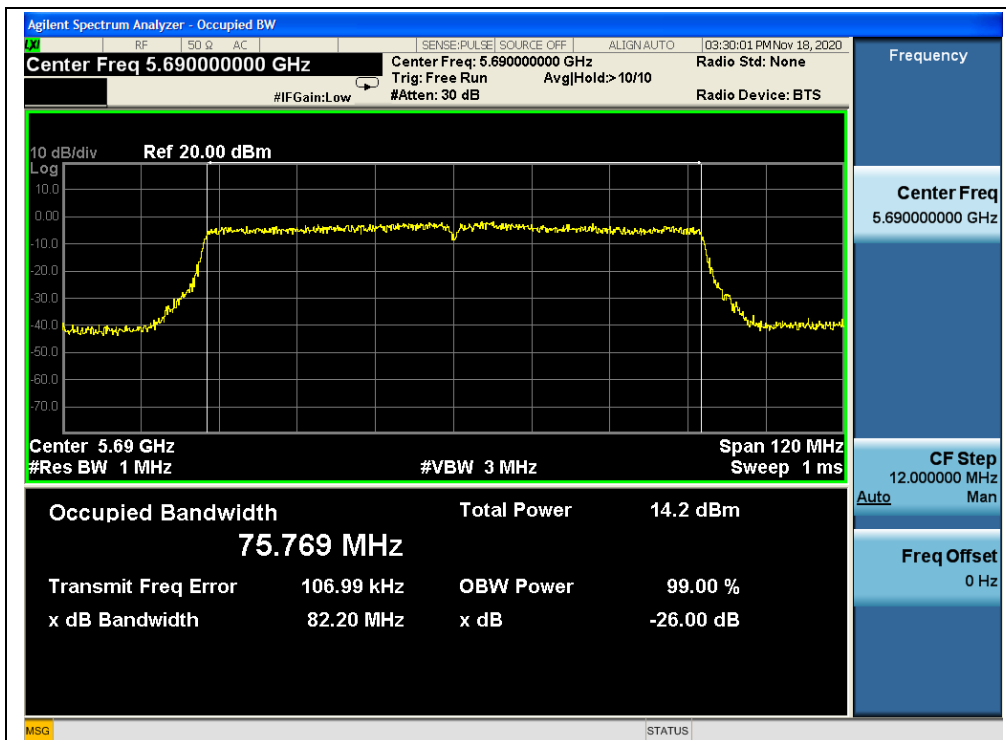

(Channel 138, 5690MHz, 802.11ac (VHT80))

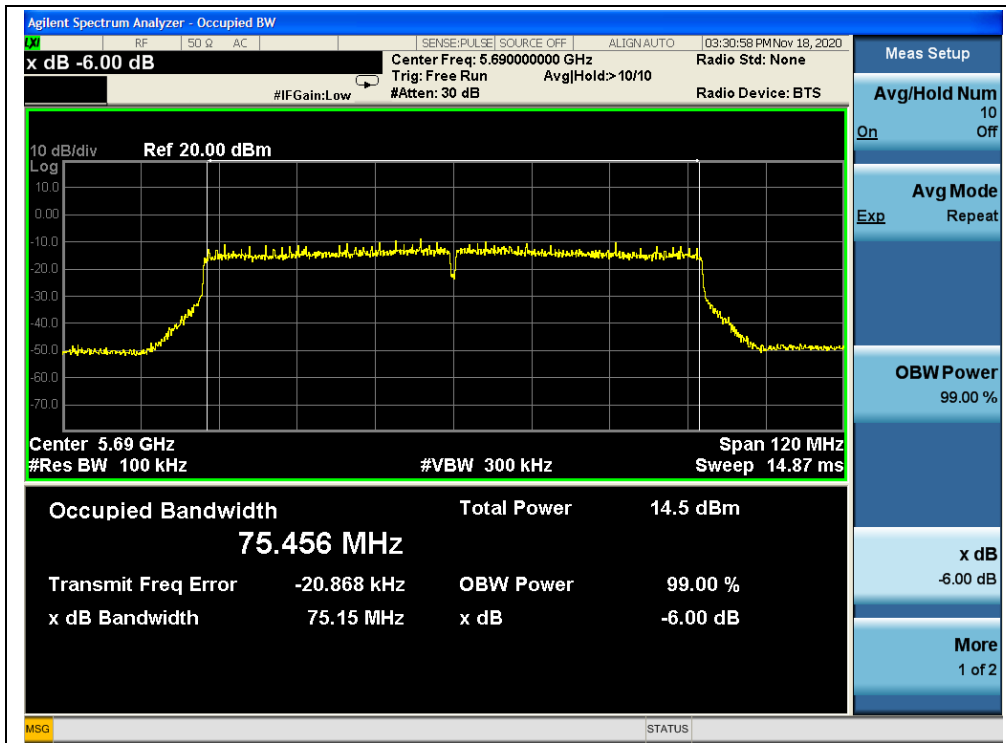

(Channel 138, 5690MHz, 802.11ac (VHT80))

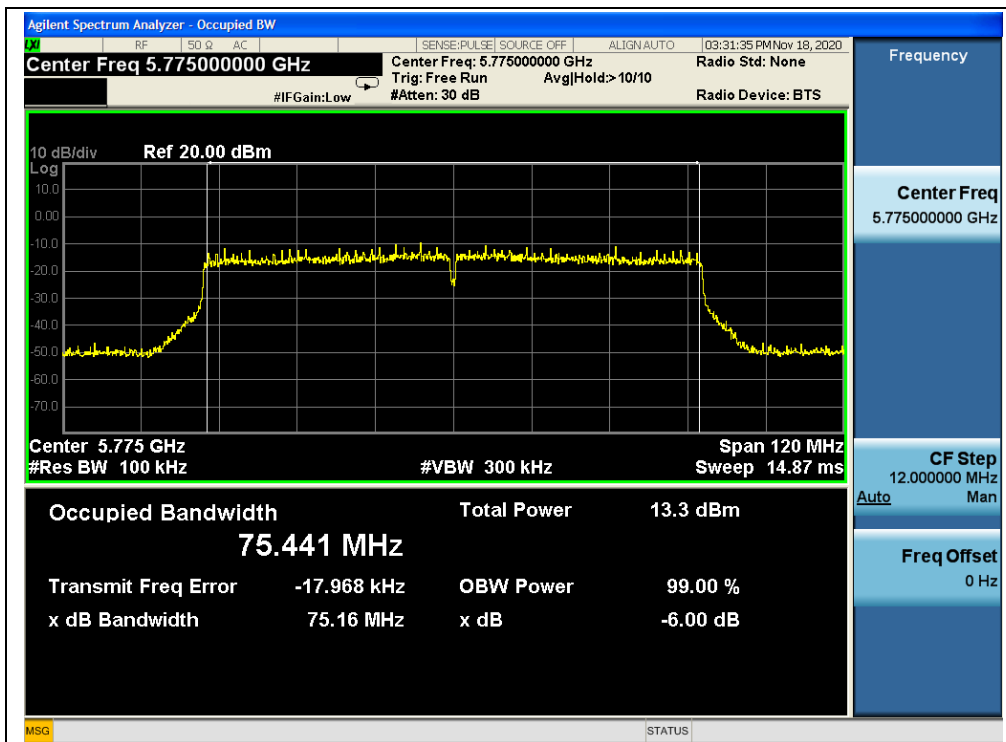

(Channel 155, 5775MHz, 802.11ac (VHT80))

2.5. Peak Power Spectral Density

2.5.1. Requirement

(1) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

(3) For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30dBm in any 500kHz band.


If transmitting antennas of directional gain greater than 6dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(4) According to KDB662911D01 Measure-and-sum technique, the conducted emission level (e.g., transmit power or power in specified bandwidth) is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in units that are directly proportional to power.

(5) According to KDB 662911 D01, the directional gain = $G_{ANT} + 10\log(N_{ANT})$ dBi, where G_{ANT} is the antenna gain in dBi, N_{ANT} is the number of outputs.

2.5.2. Test Description

Test Setup:

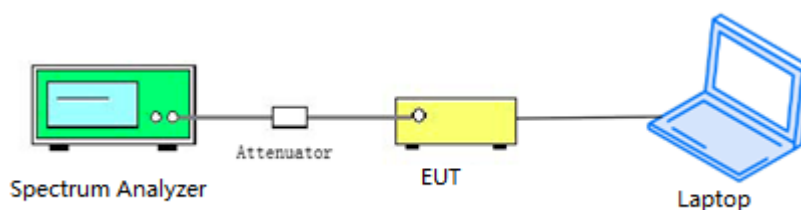

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

2.5.3. Test Procedure

KDB 789033 Section F) Maximum Power Spectral Density (PSD) Method SA-3 was used in order to prove compliance

- 1) Set span to encompass the entire 26-dB emission bandwidth
- 2) Set RBW = 1MHz. Set VBW \geq 3MHz
- 3) Number of points in sweep \geq 2 Span / RBW. Sweep time = auto
- 4) Detector = Average
- 5) Trace mode=Max hold
- 6) Record the max value

2.5.4. Test Result


802.11a Mode

A. Test Verdict:


Frequency (MHz)	Measured PPSD (dBm/MHz)		Duty Factor	Corrected PPSD (dBm/MHz)		Limit (dBm/MHz)	Verdict
	ANT0	ANT1		ANT0	ANT1		
5180	3.01	3.45	0.09	3.10	3.54	11	PASS
5220	3.09	3.68		3.18	3.77		
5240	3.01	3.64		3.10	3.73		
5260	2.98	3.51		3.07	3.60		
5300	3.30	3.58		3.39	3.67		
5320	3.37	3.54		3.46	3.63		
5500	2.80	1.98		2.89	2.07		
5600	3.01	0.77		3.10	0.86		
5720	3.69	0.38		3.78	0.47		
Frequency (MHz)	Measured PPSD (dBm/500KHz)		Duty Factor	Total PPSD (dBm/500KHz)		Limit (dBm/500KHz)	Verdict
	ANT0	ANT1		ANT0	ANT1		
5720	0.91	-2.35	0.09	1.00	-2.26	30	PASS
5745	0.99	-2.68		1.08	-2.59		
5785	1.15	-3.08		1.24	-2.99		
5825	1.18	-3.19		1.27	-3.10		




B.Test Plot:

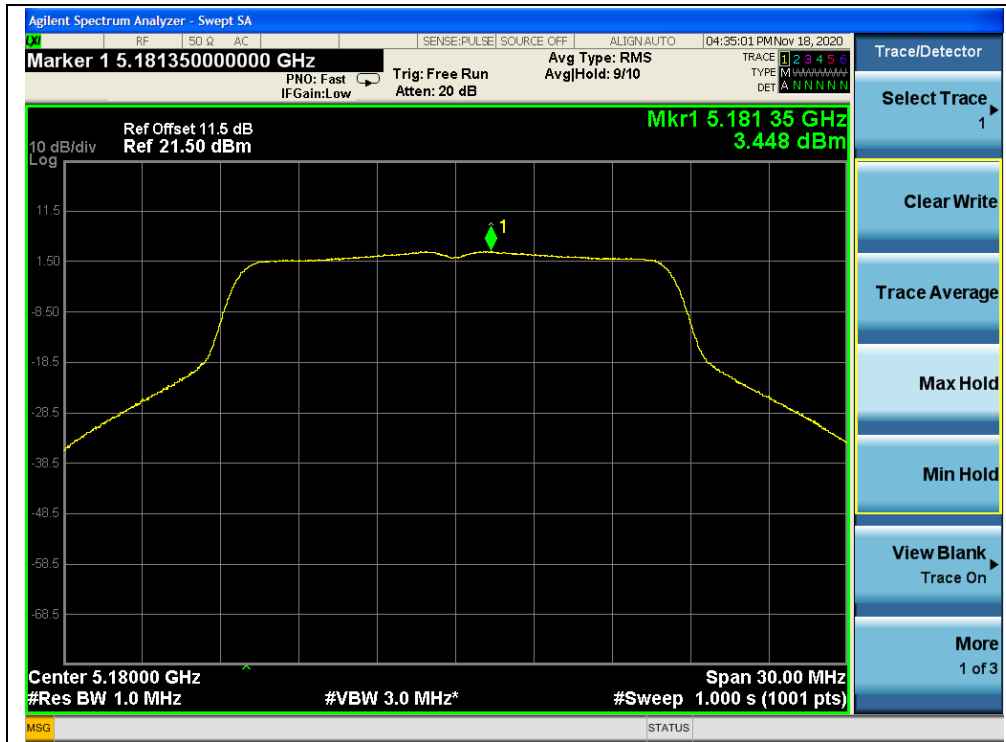


(Channel 36, 5180MHz, 802.11a, ANT1)

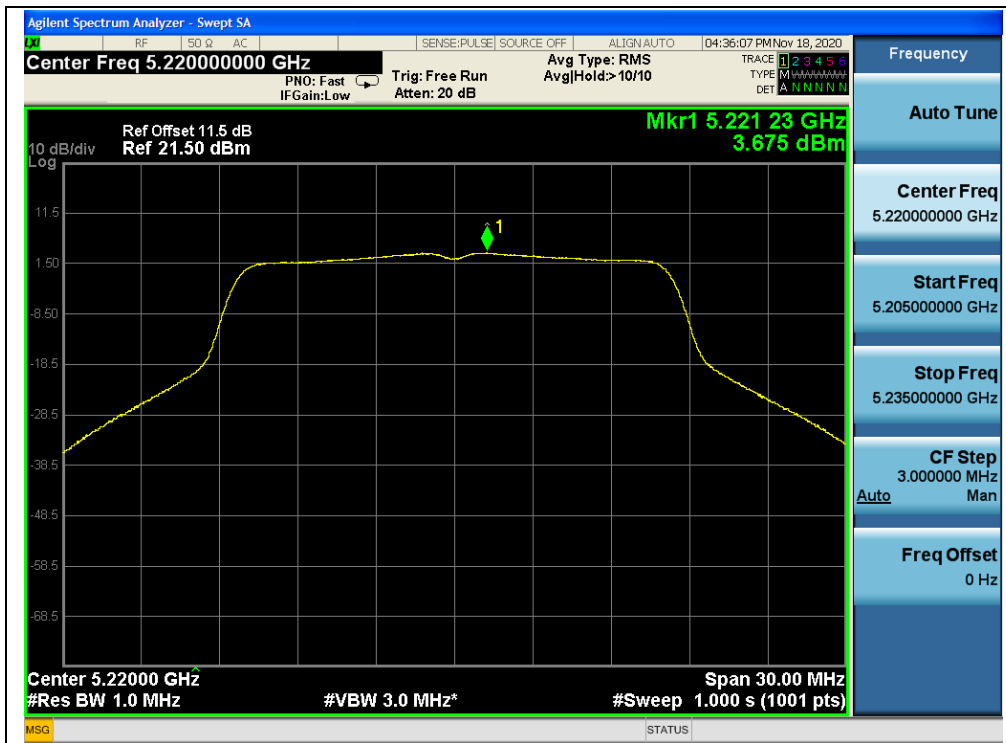


(Channel 44, 5220MHz, 802.11a, ANT1)

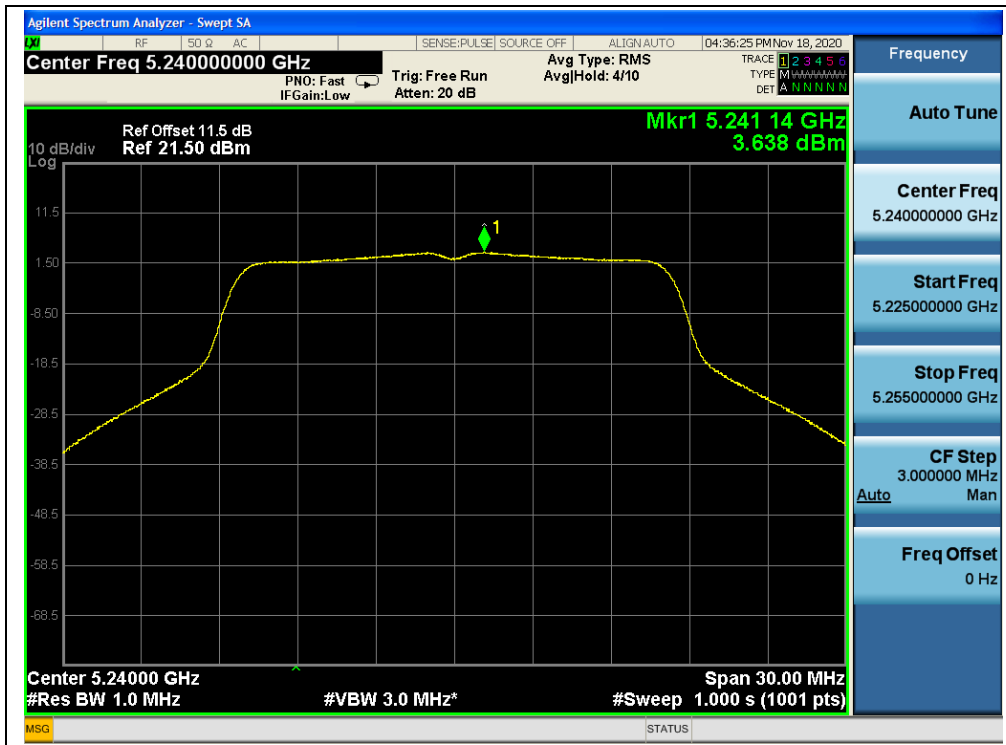


(Channel 48, 5240MHz, 802.11a, ANT1)

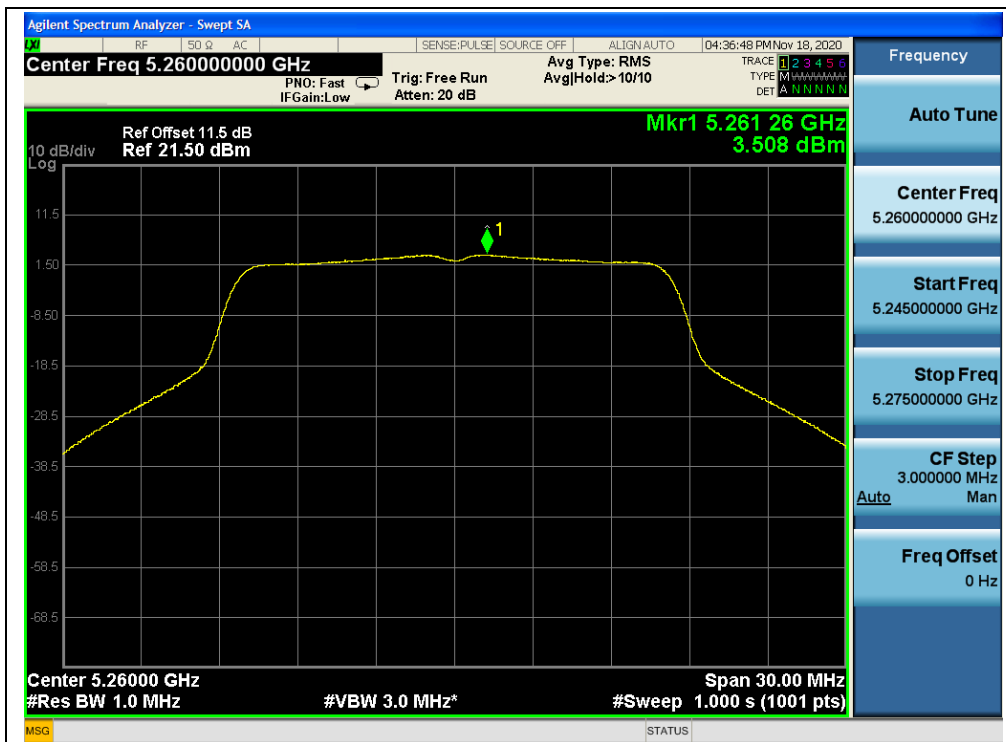


(Channel 52, 5260MHz, 802.11a, ANT1)

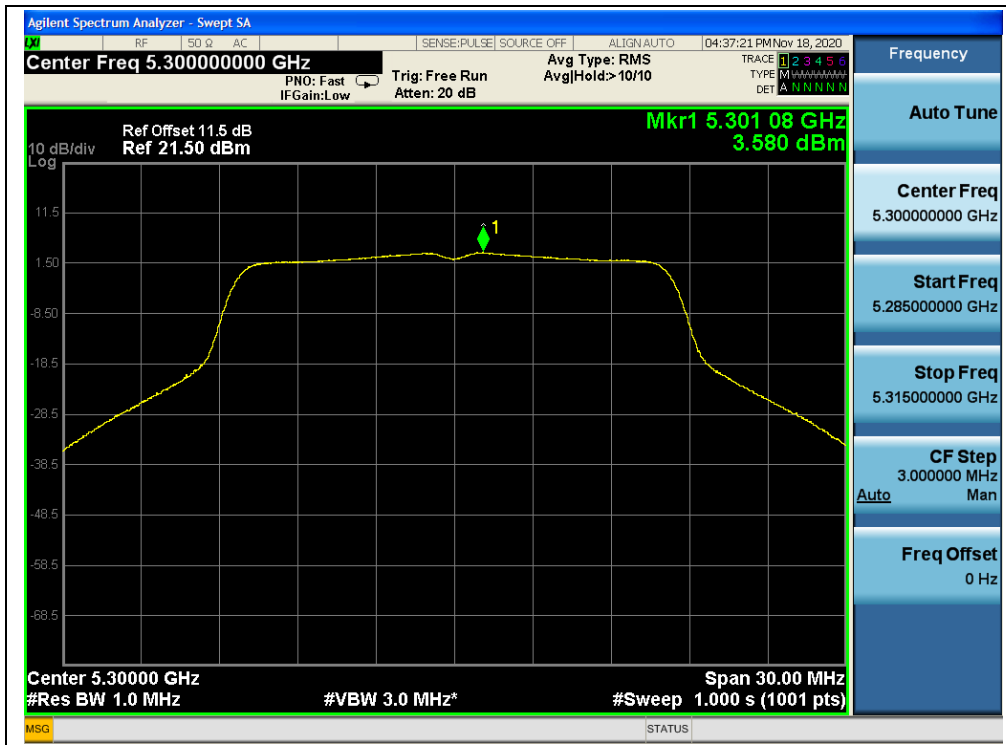

(Channel 60, 5300MHz, 802.11a, ANT1)

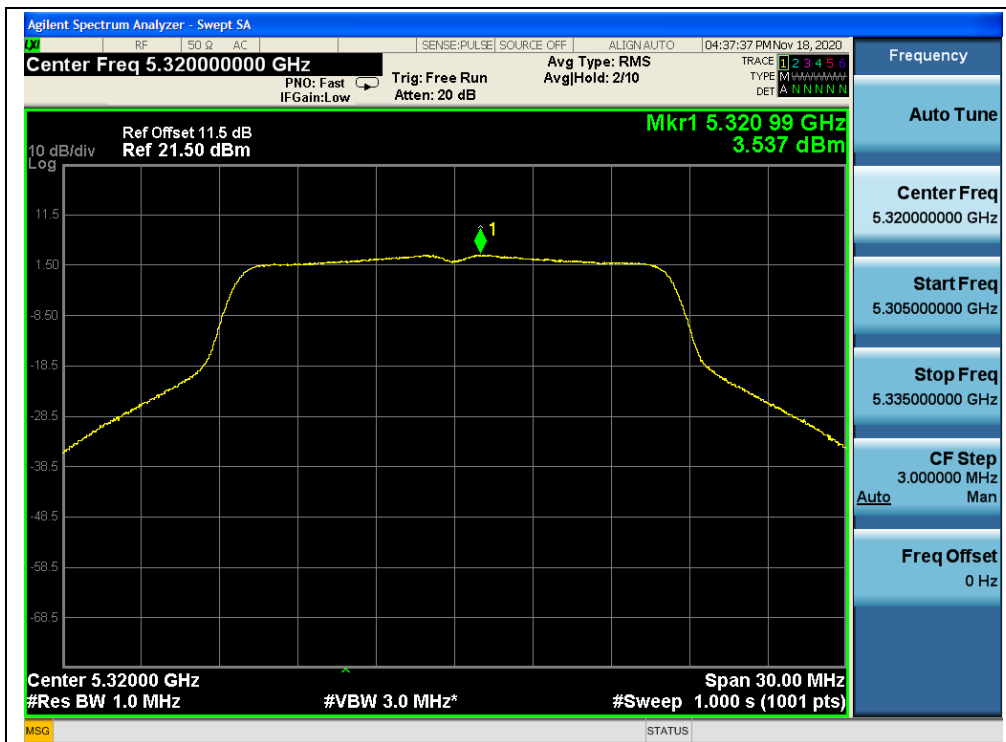


(Channel 64, 5320MHz, 802.11a, ANT1)

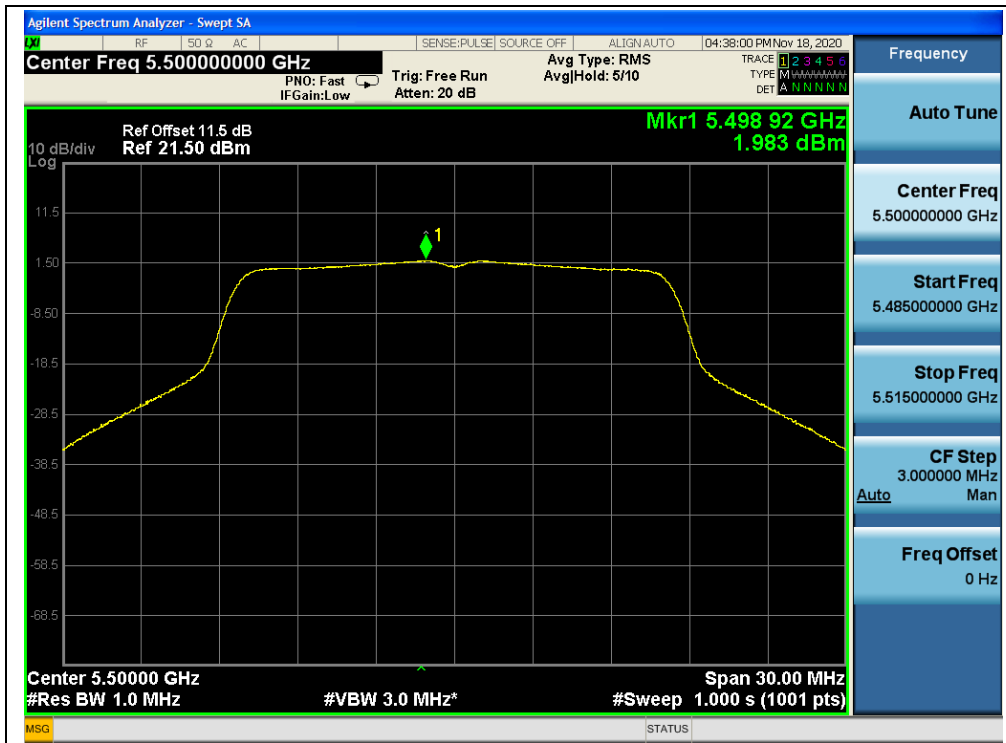


(Channel 100, 5500MHz, 802.11a, ANT1)



(Channel 120, 5600MHz, 802.11a, ANT1)

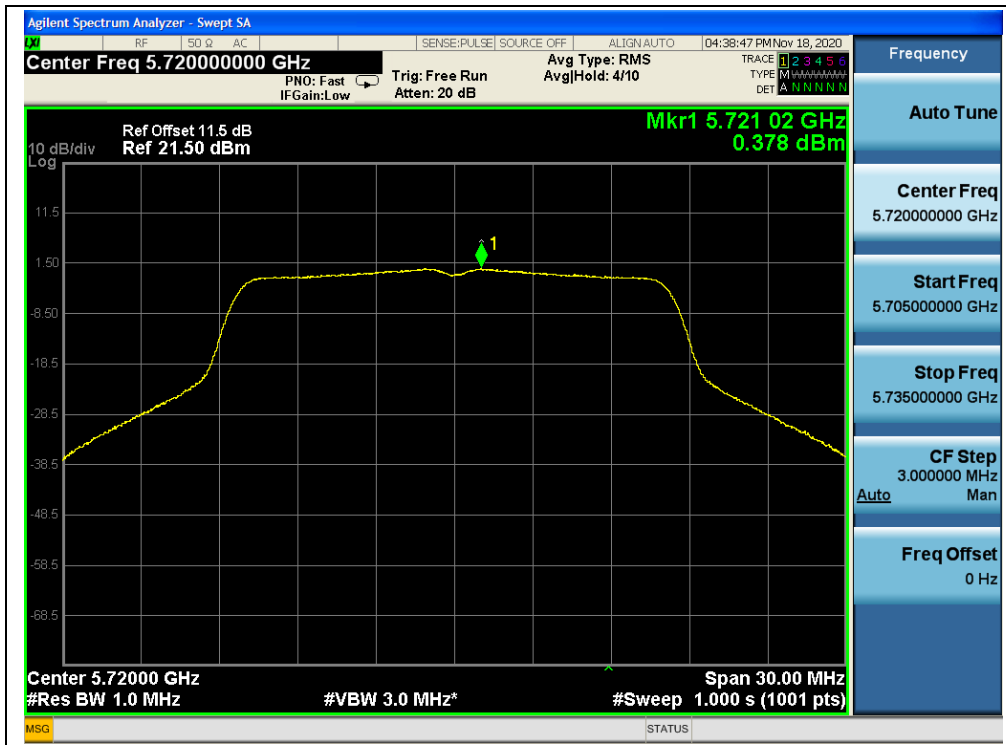


(Channel 144, 5720MHz, 802.11a, ANT1)

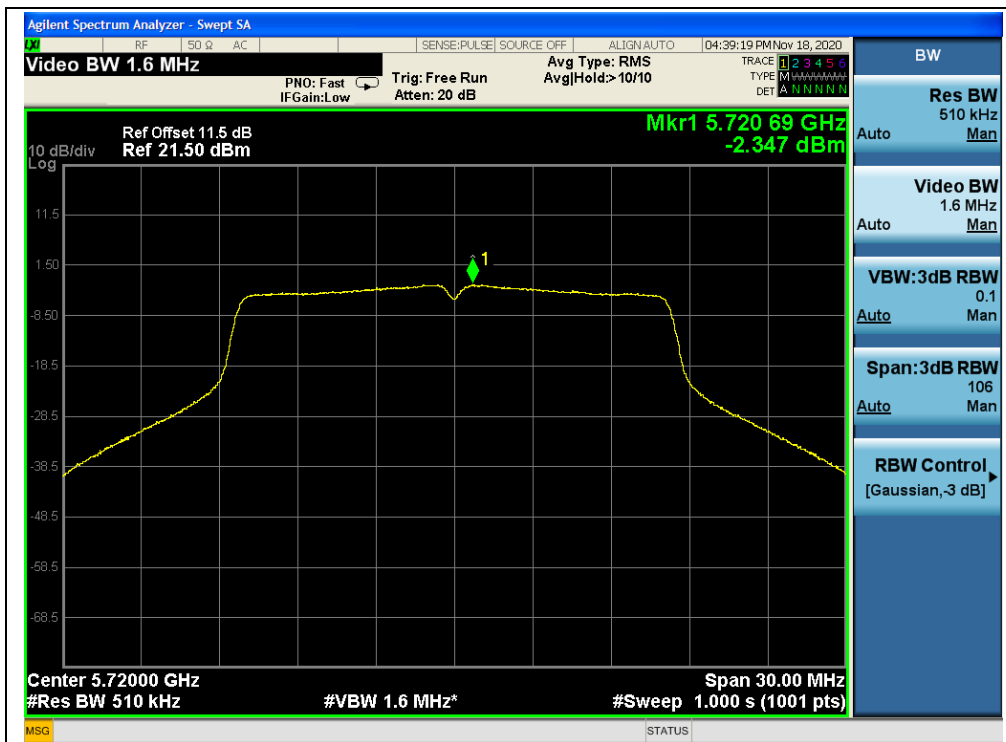

(Channel 144, 5720MHz, 802.11a, ANT1)



(Channel 149, 5745MHz, 802.11a, ANT1)

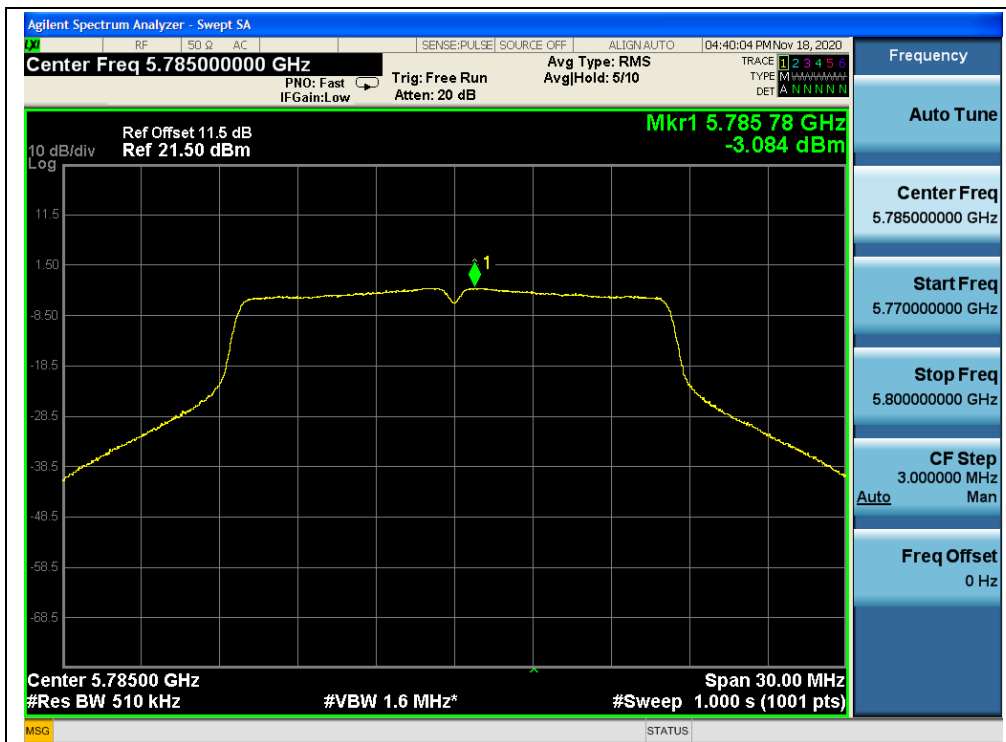

(Channel 157, 5785MHz, 802.11a, ANT1)



(Channel 165, 5825MHz, 802.11a, ANT1)




802.11n (HT20) Mode

A.Test Verdict:


Frequency (MHz)	Measured PPSD (dBm/MHz)		Duty Factor	Total PPSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
	ANT0	ANT1				
5180	1.89	2.11	0.10	5.11	11	PASS
5220	1.91	2.10		5.12		
5240	1.80	2.10		5.06		
5260	1.82	2.04		5.04		
5300	1.85	2.05		5.06		
5320	2.05	1.94		5.11		
5500	1.72	0.51		4.27		
5600	1.57	-0.82		3.65		
5720	2.32	-1.28		3.99		
Frequency (MHz)	Measured PPSD (dBm/500KHz)		Duty Factor	Total PPSD (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
	ANT0	ANT1				
5720	-0.50	-4.00	0.10	1.20	30	PASS
5745	-0.38	-4.33		1.19		
5785	-0.24	-4.60		1.22		
5825	-0.07	-4.76		1.30		
<p>Note: Directional gain = $-0.14\text{dBi} + 10\log(2) = 2.87\text{dBi} < 6\text{dBi}$, so the power limit shall be 11dBm for 5.18-5.24 GHz and 30dBm for 5.745-5.825 GHz band.</p>						




B.Test Plot:

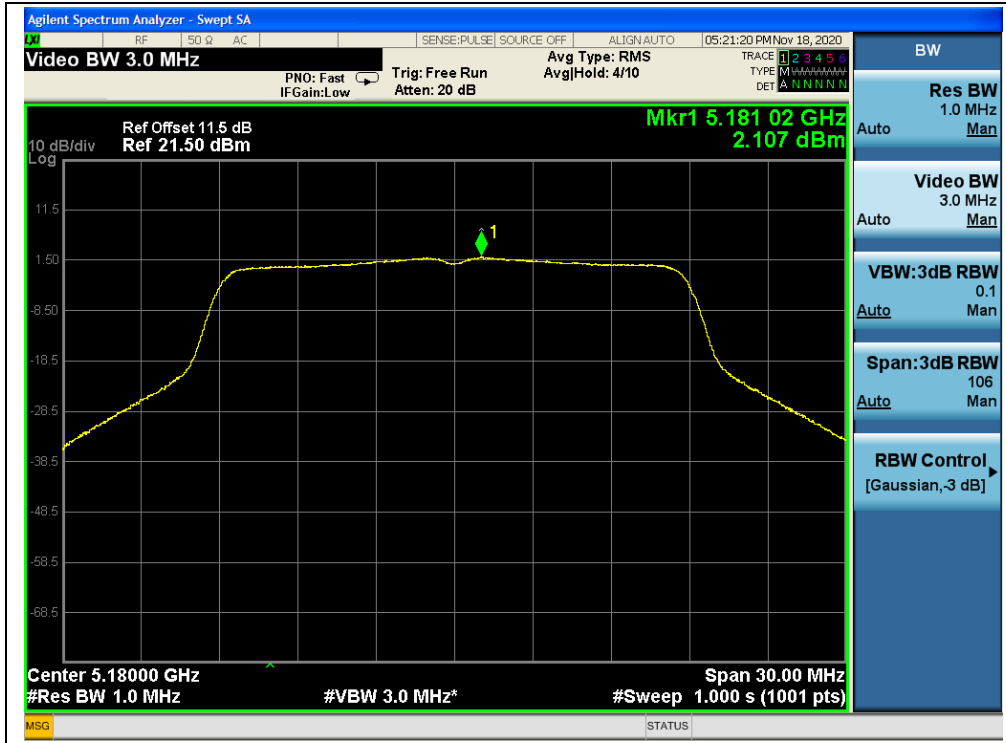


(Channel 36, 5180MHz, 802.11n (HT20), ANT1)

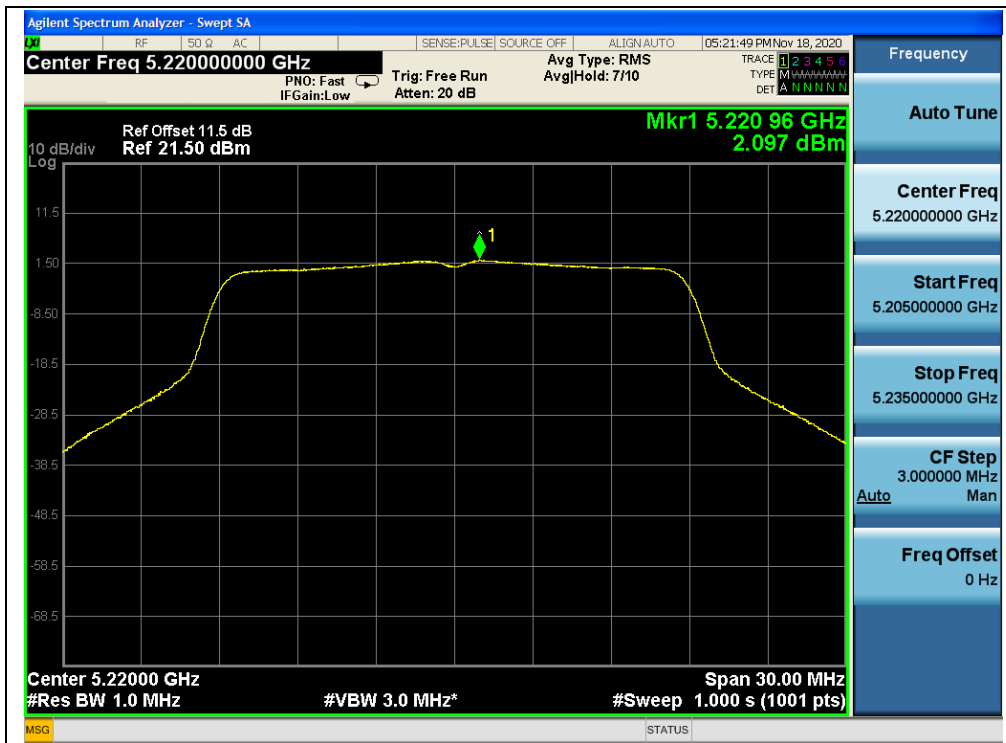


(Channel 44, 5220MHz, 802.11n (HT20), ANT1)

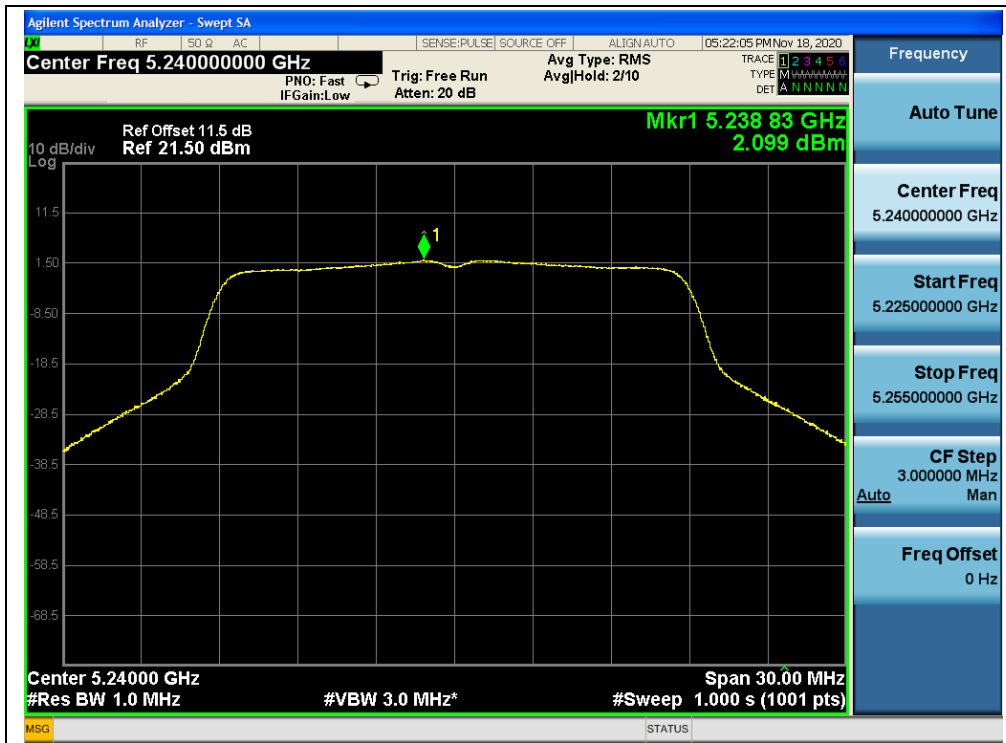


(Channel 48, 5240MHz, 802.11n (HT20), ANT1)

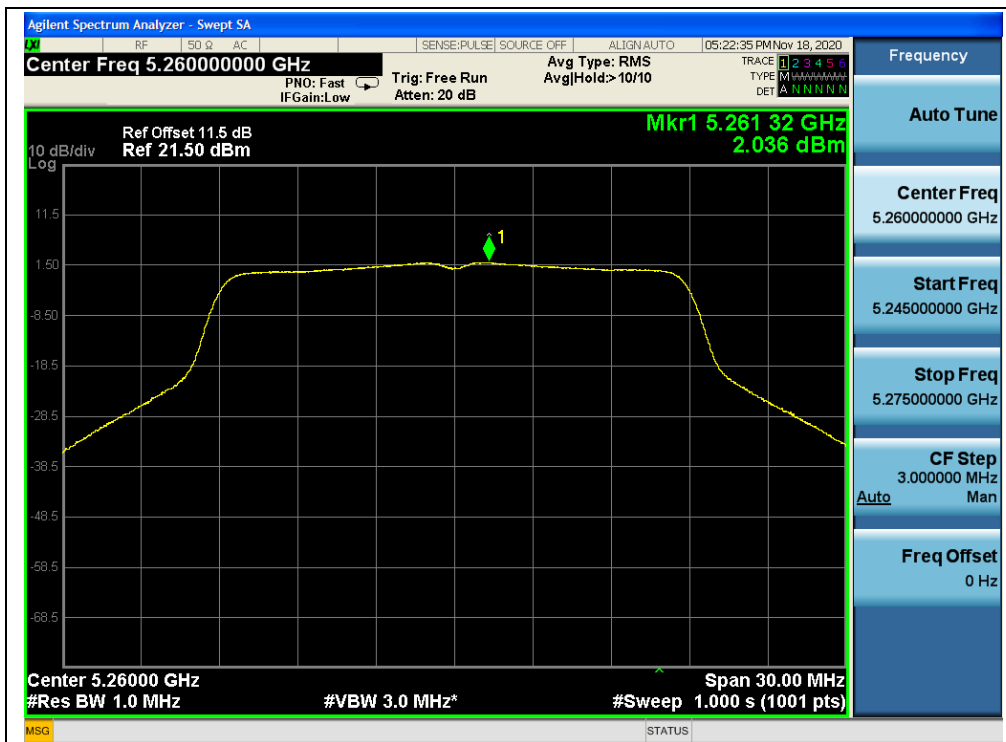


(Channel 52, 5260MHz, 802.11n (HT20), ANT1)

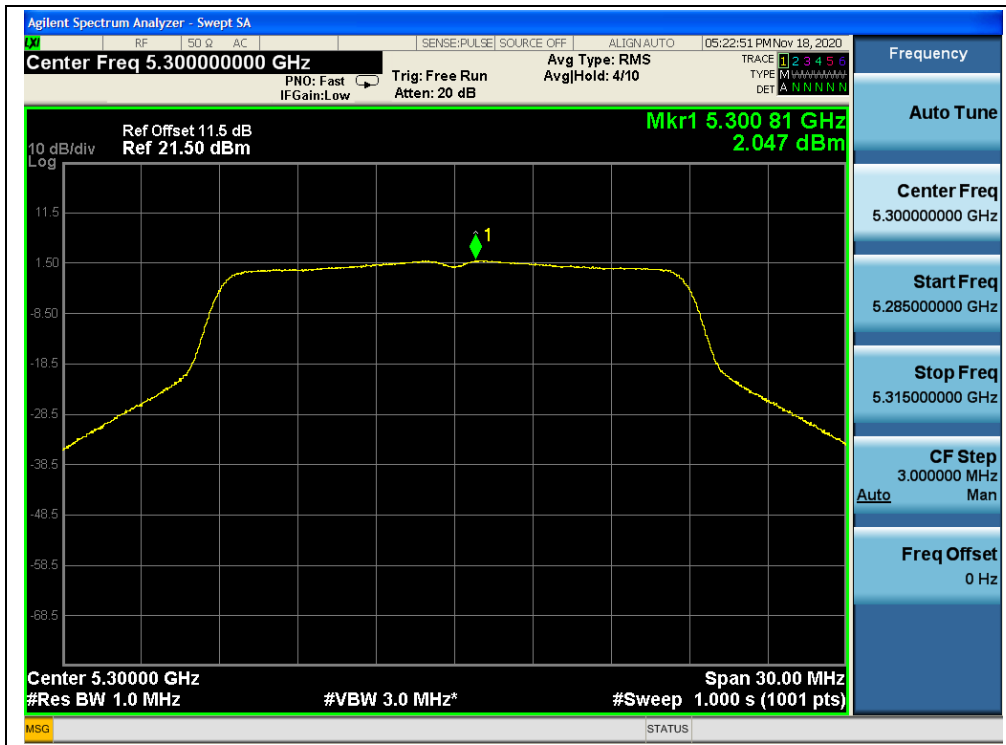

(Channel 60, 5300MHz, 802.11n (HT20), ANT1)

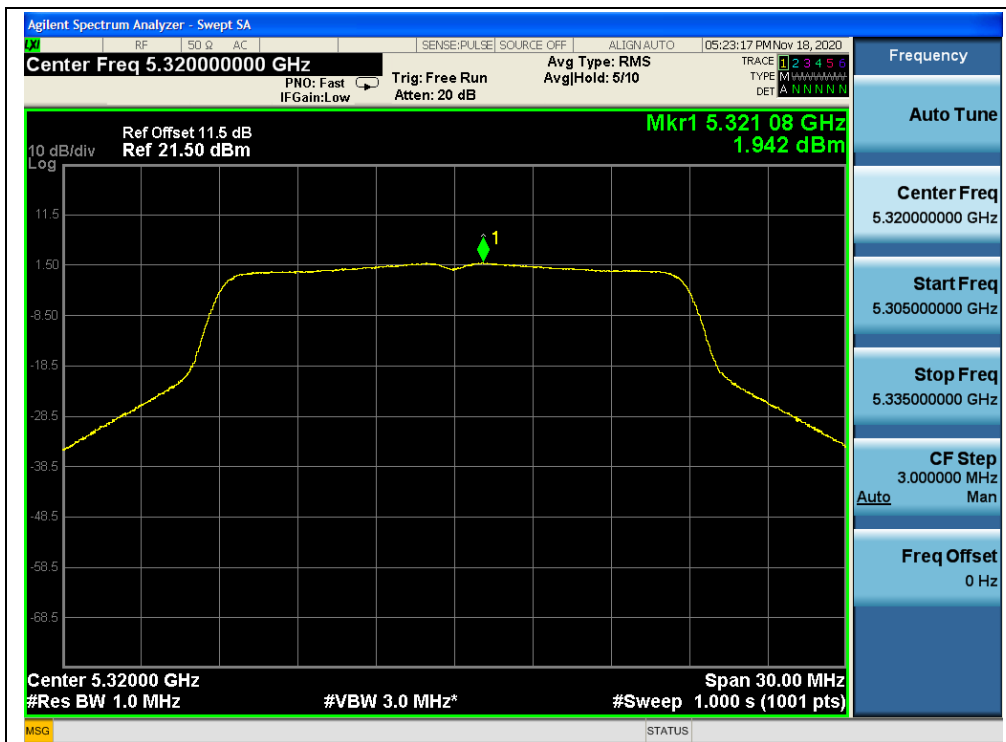


(Channel 64, 5320MHz, 802.11n (HT20), ANT1)

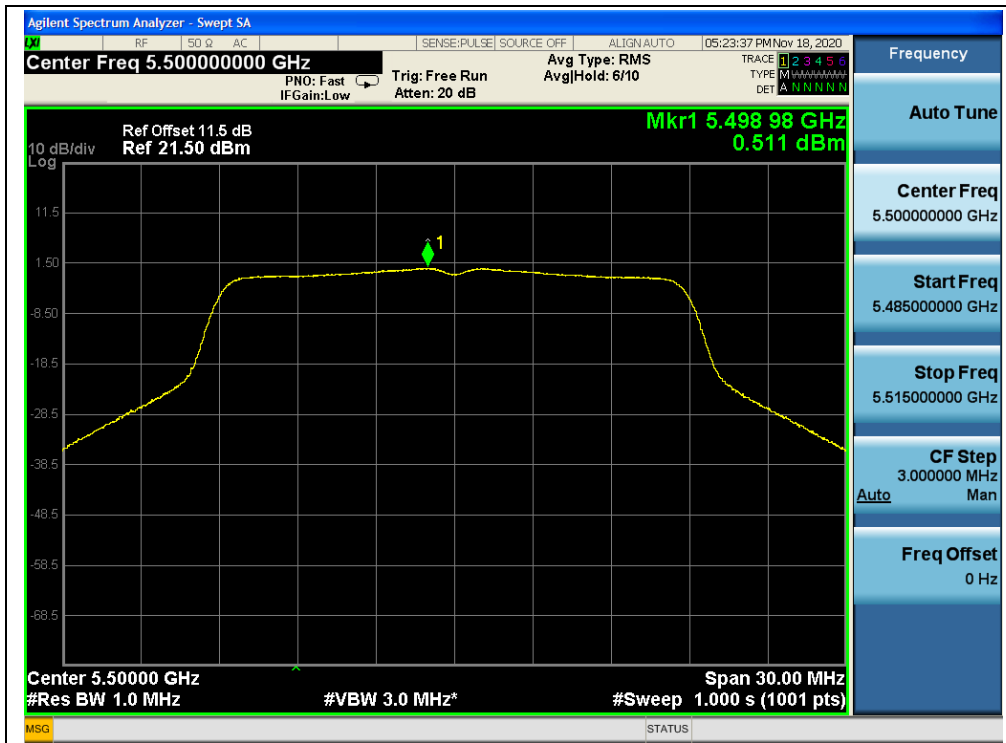


(Channel 100, 5500MHz, 802.11n (HT20), ANT1)




(Channel 120, 5600MHz, 802.11n (HT20), ANT1)

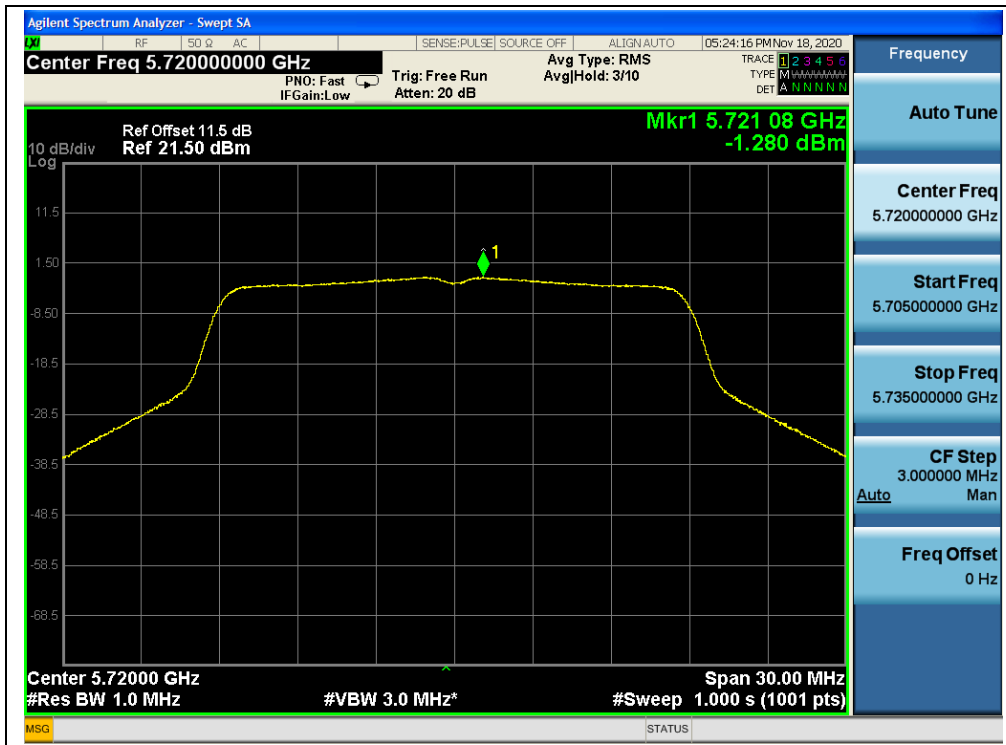


(Channel 144, 5720MHz, 802.11n (HT20), ANT1)

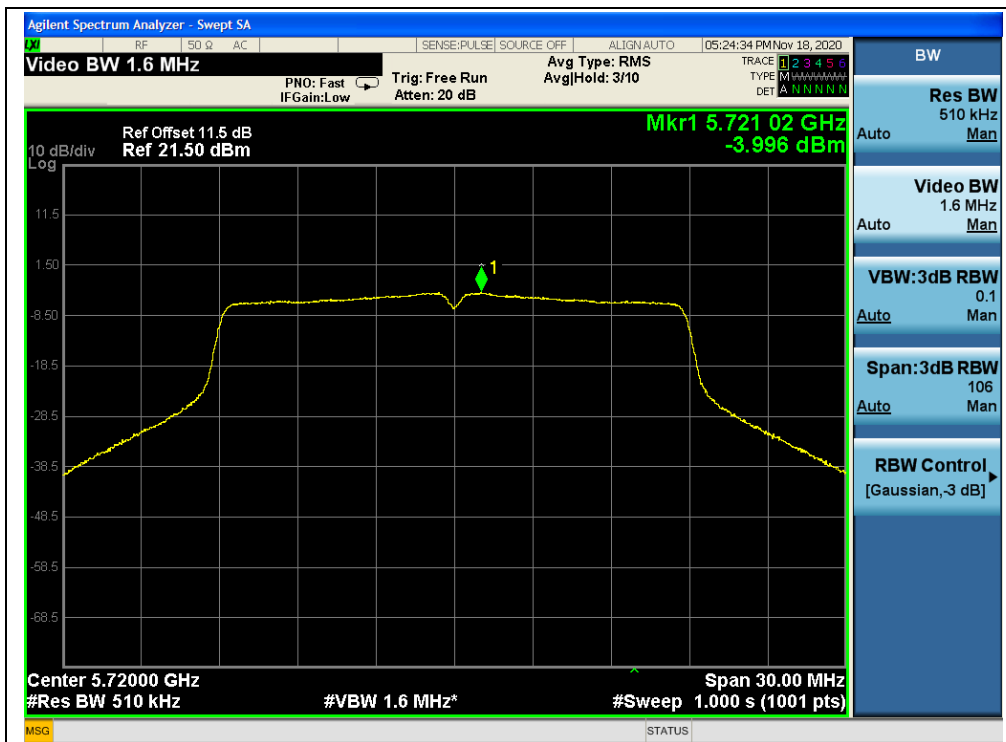

(Channel 144, 5720MHz, 802.11n (HT20), ANT1)

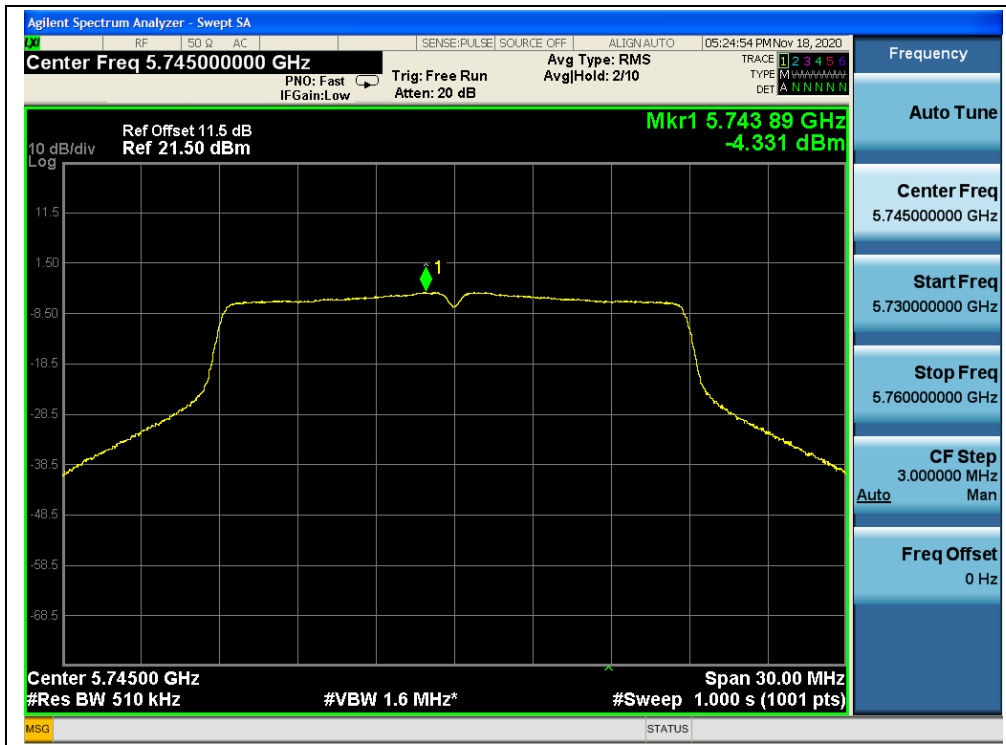

(Channel 149, 5745MHz, 802.11n (HT20), ANT1)

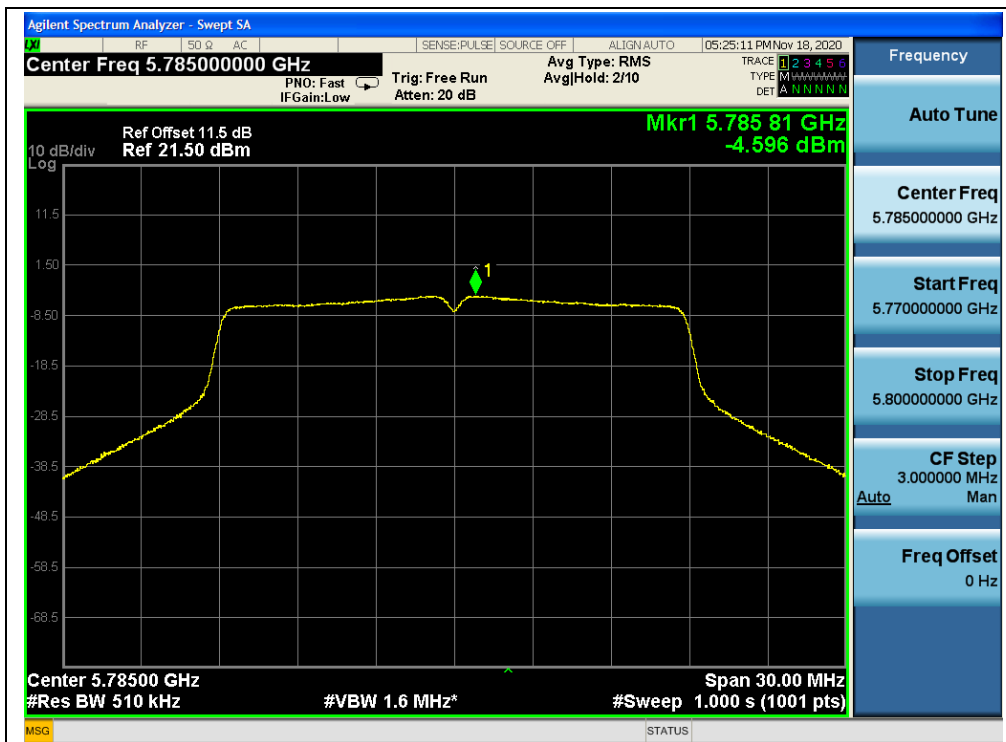

(Channel 157, 5785MHz, 802.11n (HT20), ANT1)



(Channel 165, 5825MHz, 802.11n (HT20), ANT1)




802.11n (HT40) Mode

A.Test Verdict:


Frequency (MHz)	Measured PPSD (dBm/MHz)		Duty Factor	Total PPSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
	ANT0	ANT1				
5190	-0.78	-0.60	0.18	2.50	11	PASS
5230	-0.87	-0.67		2.42		
5270	-0.98	-0.73		2.34		
5310	-0.79	-0.71		2.44		
5510	-1.17	-2.43		1.44		
5630	-1.06	-3.67		1.02		
5710	-0.52	-3.84		1.32		
Frequency (MHz)	Measured PPSD (dBm/500KHz)		Duty Factor	Total PPSD (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
	ANT0	ANT1				
5710	-3.40	-6.73	0.18	-1.56	30	PASS
5755	-3.30	-7.03		-1.59		
5795	-3.08	-7.36		-1.52		
<p>Note: Directional gain = $-0.14\text{dBi} + 10\log(2) = 2.87\text{dBi} < 6\text{dBi}$, so the power limit shall be 11dBm for 5.18-5.24 GHz and 30dBm for 5.745-5.825 GHz band.</p>						




B.Test Plot:

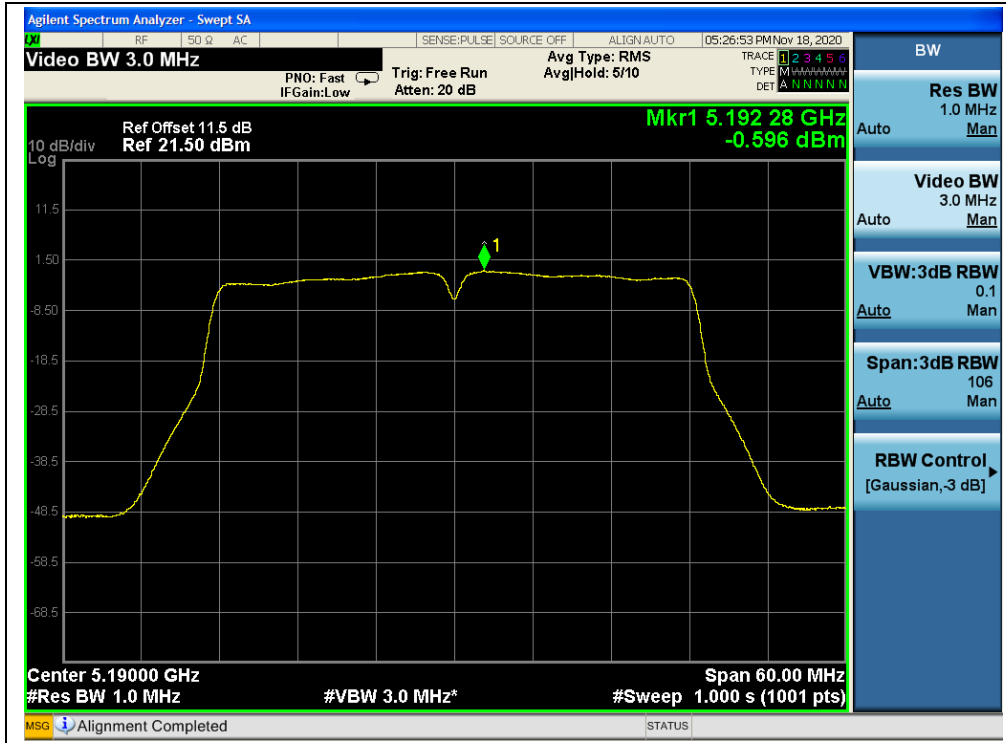


(Channel 38, 5190MHz, 802.11n (HT40), ANT1)

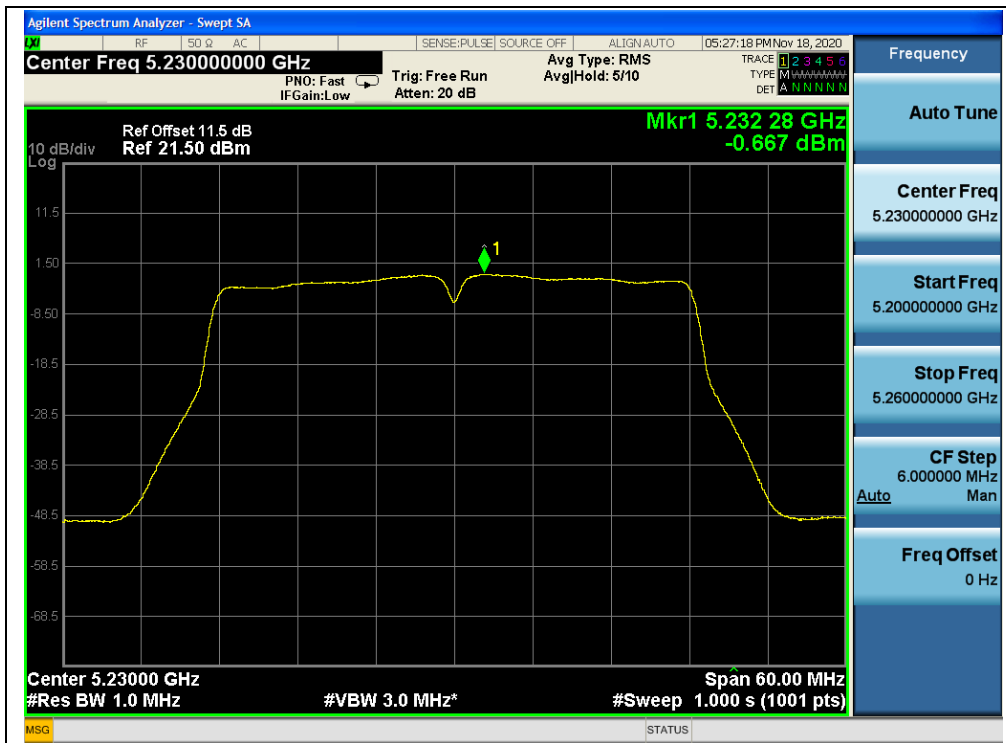

(Channel 46, 5230MHz, 802.11n (HT40), ANT1)

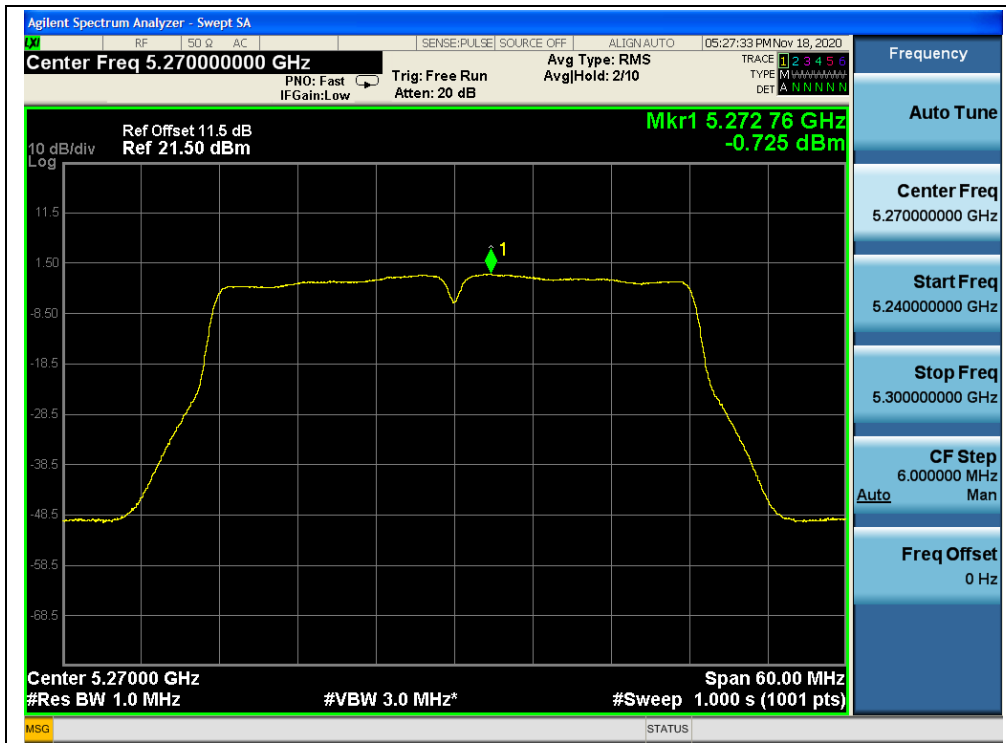


(Channel 54, 5270MHz, 802.11n (HT40), ANT1)

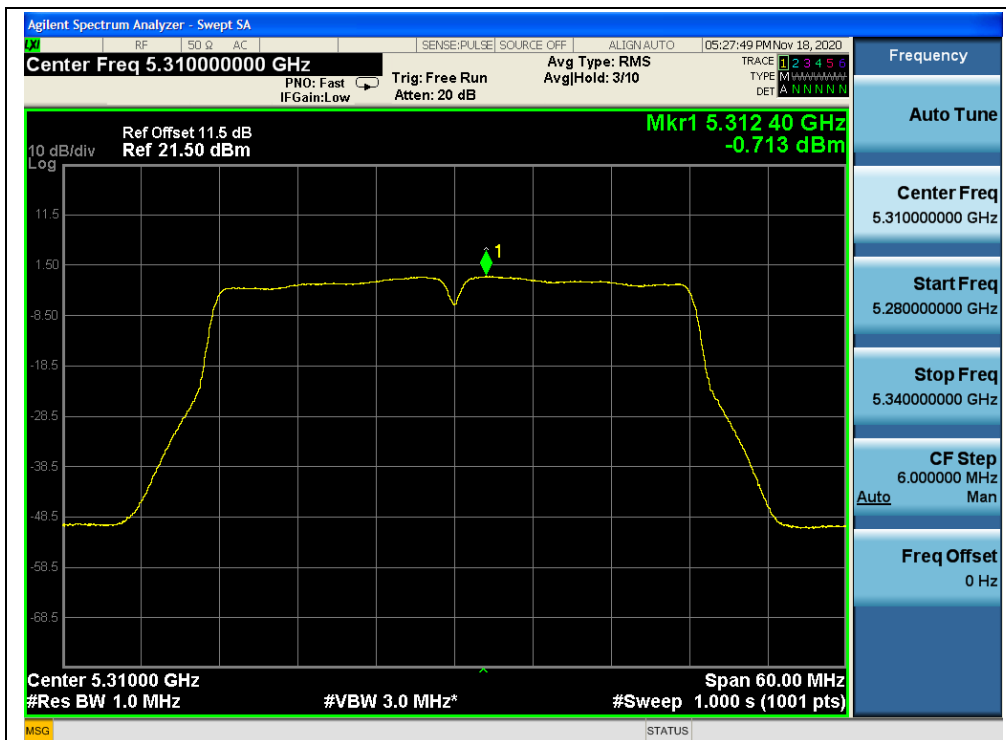


(Channel 62, 5310MHz, 802.11n (HT40), ANT1)



(Channel 102, 5510MHz, 802.11n (HT40), ANT1)

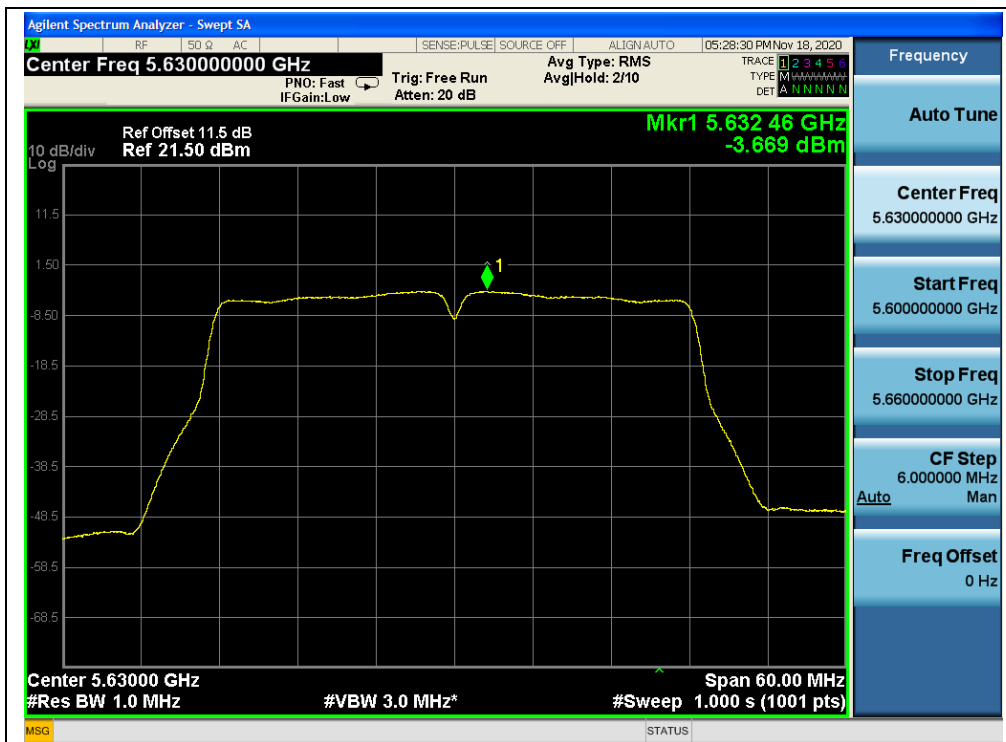


(Channel 126, 5630 MHz, 802.11n (HT40), ANT1)

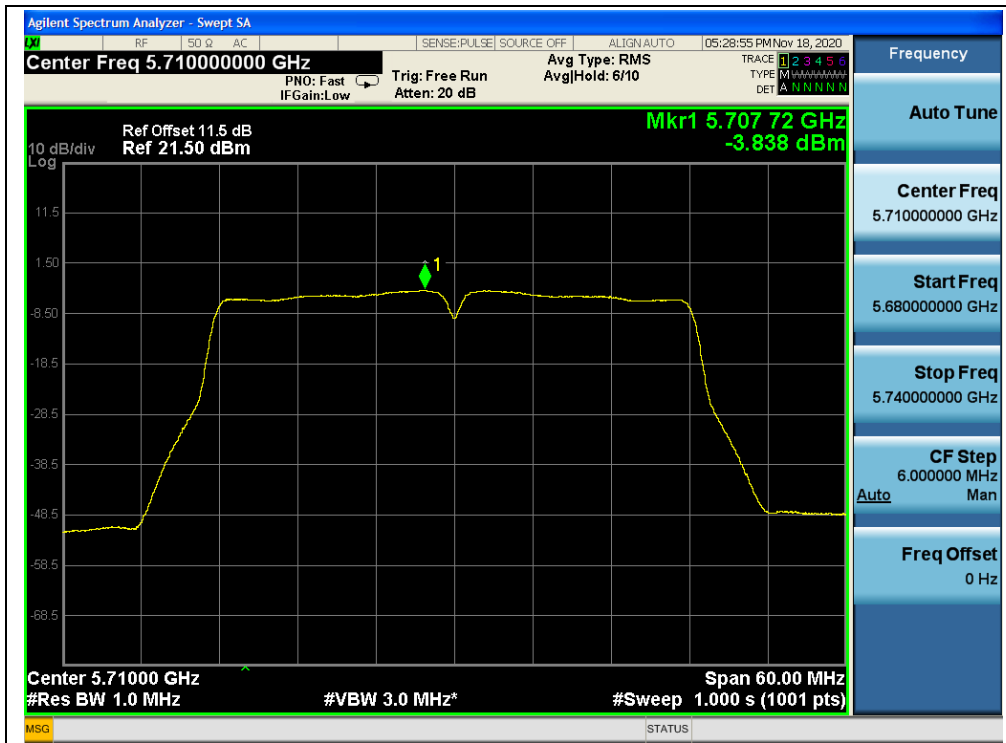


(Channel 142, 5710MHz, 802.11n (HT40), ANT1)



(Channel 142, 5710MHz, 802.11n (HT40), ANT1)

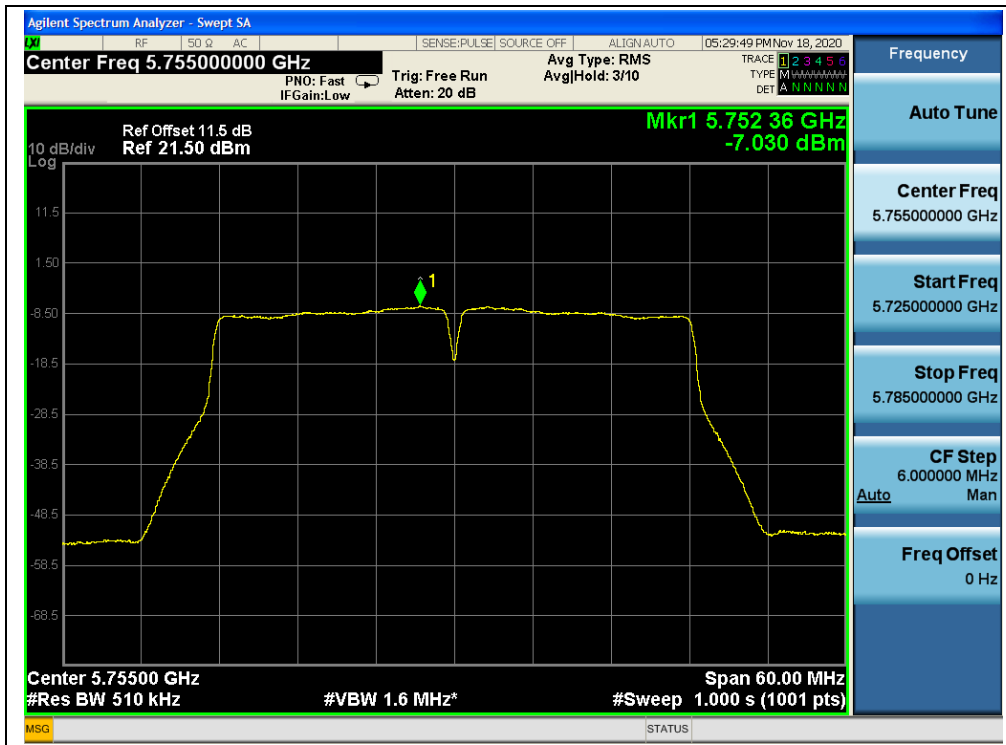

(Channel 151, 5755MHz, 802.11n (HT40), ANT1)

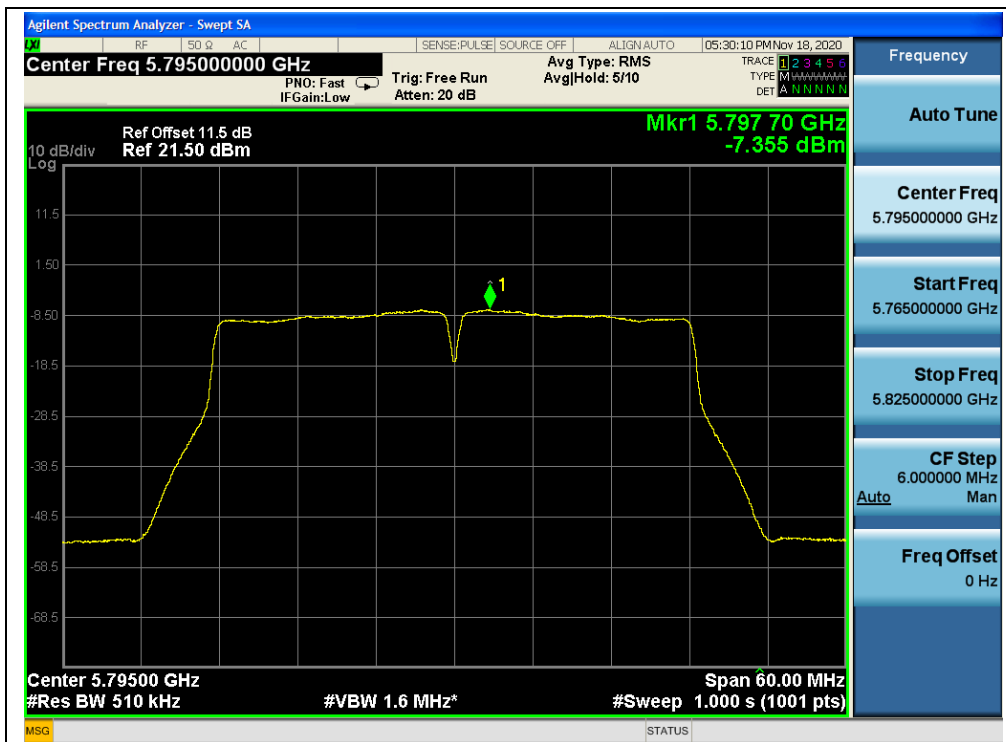

(Channel 159, 5795MHz, 802.11n (HT40), ANT1)




802.11ac (VHT20) Mode

A.Test Verdict:


Frequency (MHz)	Measured PPSD (dBm/MHz)		Duty Factor	Total PPSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
	ANT0	ANT1				
5180	0.86	1.57	0.07	4.31	11	PASS
5220	1.18	1.66		4.51		
5240	1.16	1.61		4.47		
5260	1.24	1.73		4.57		
5300	1.42	1.66		4.62		
5320	1.73	1.48		4.69		
5500	1.15	0.00		3.69		
5600	1.40	-1.21		3.37		
5720	1.77	-1.53		3.51		
Frequency (MHz)	Measured PPSD (dBm/500KHz)		Duty Factor	Total PPSD (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
	ANT0	ANT1				
5720	-0.89	-4.36	0.07	0.79	30	PASS
5745	-0.86	-4.65		0.73		
5785	-0.67	-4.96		0.77		
5825	-0.68	-5.20		0.70		
<p>Note: Directional gain = $-0.14\text{dBi} + 10\log(2) = 2.87\text{dBi} < 6\text{dBi}$, so the power limit shall be 11dBm for 5.18-5.24 GHz and 30dBm for 5.745-5.825 GHz band.</p>						




B.Test Plot:

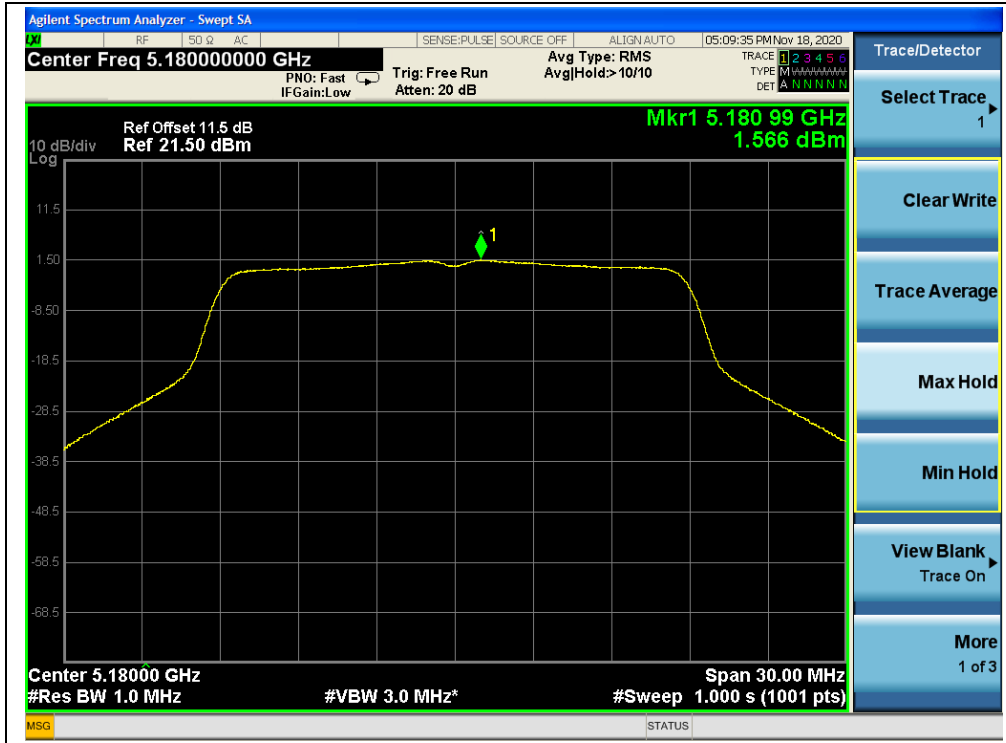


(Channel 36, 5180MHz, 802.11ac (VHT20), ANT1)

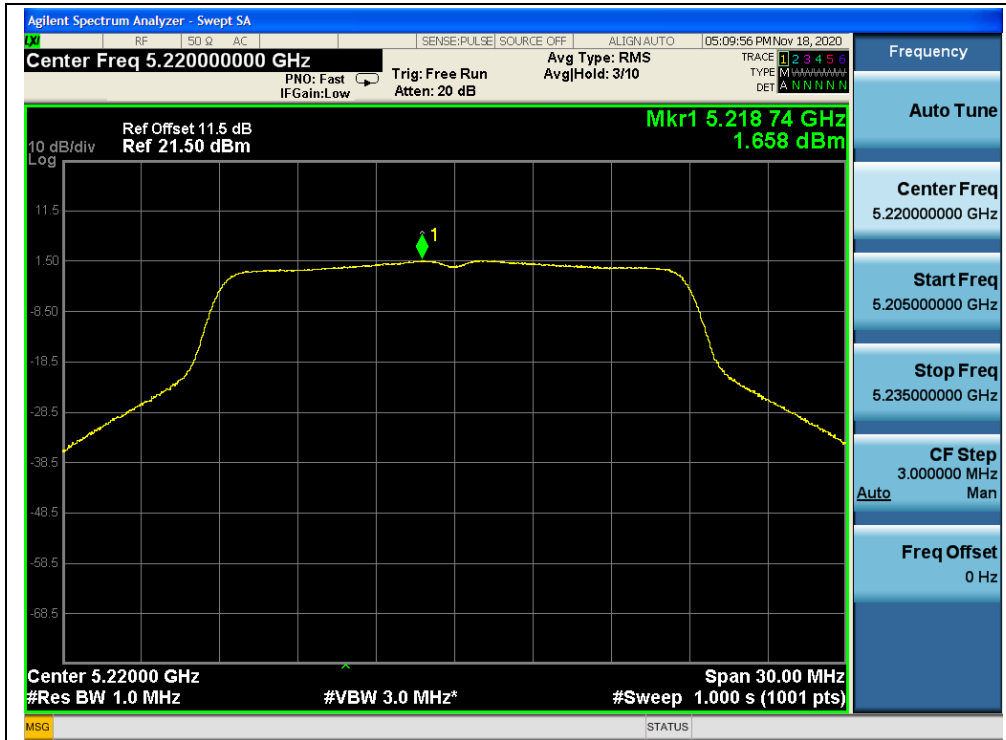

(Channel 44, 5220MHz, 802.11ac (VHT20), ANT1)

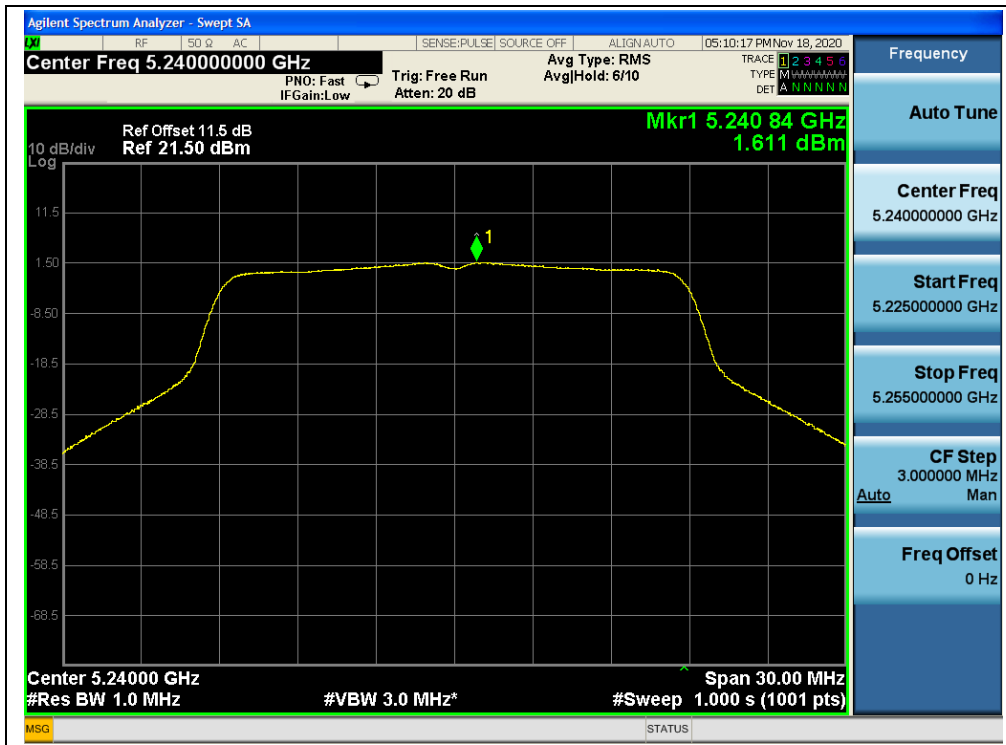

(Channel 48, 5240MHz, 802.11ac (VHT20), ANT1)

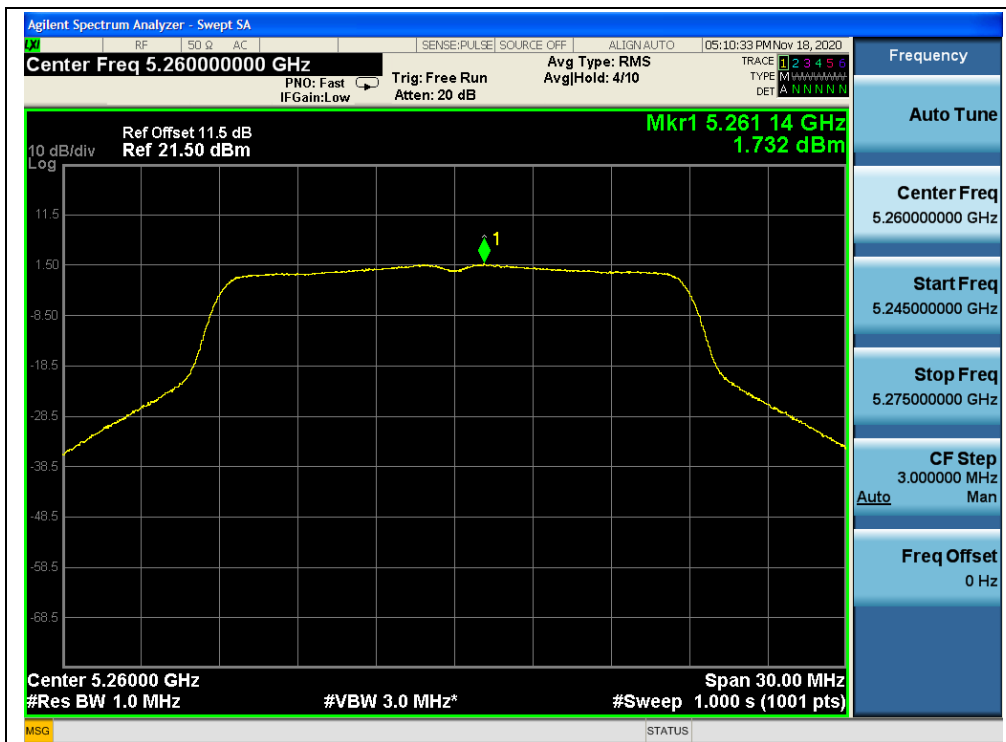

(Channel 52, 5260MHz, 802.11ac (VHT20), ANT1)