ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ LTE Band 66

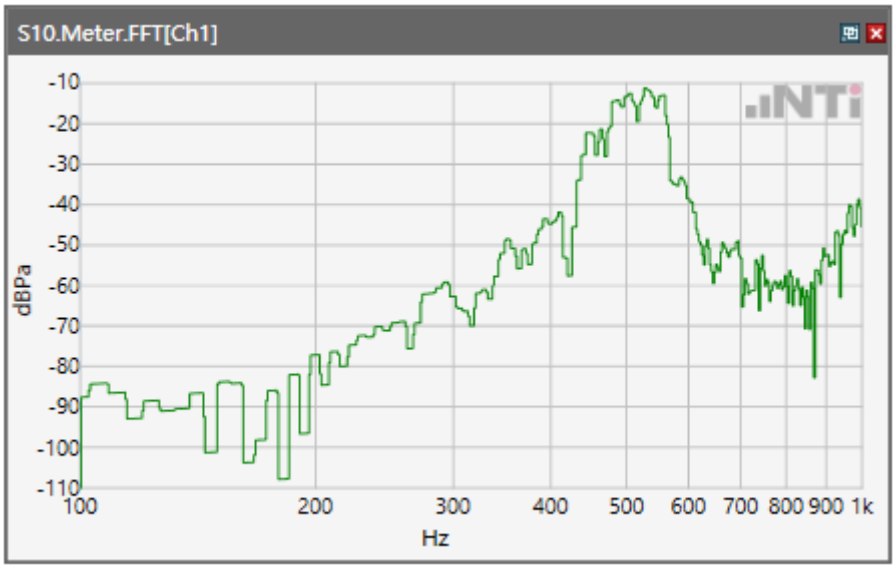

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ WLAN 2.4GHz

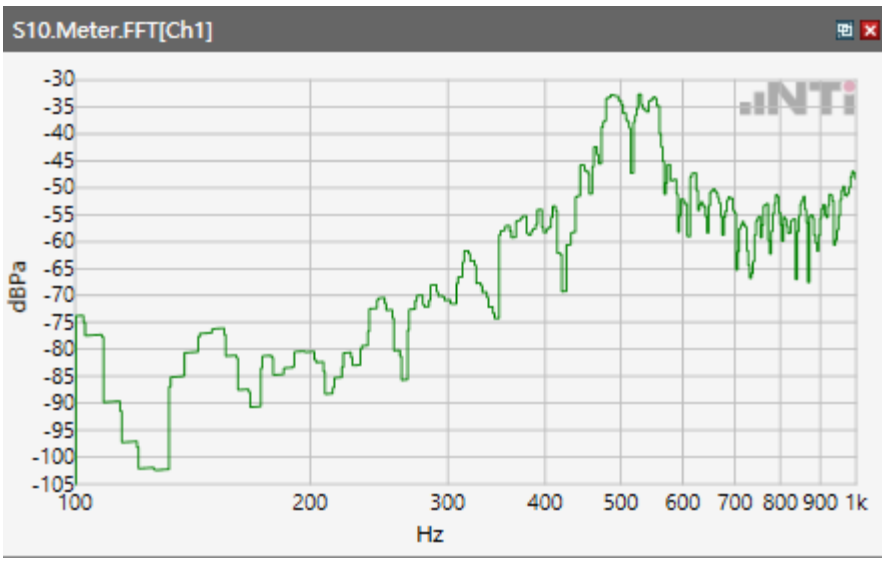

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\WLAN 5.2GHz

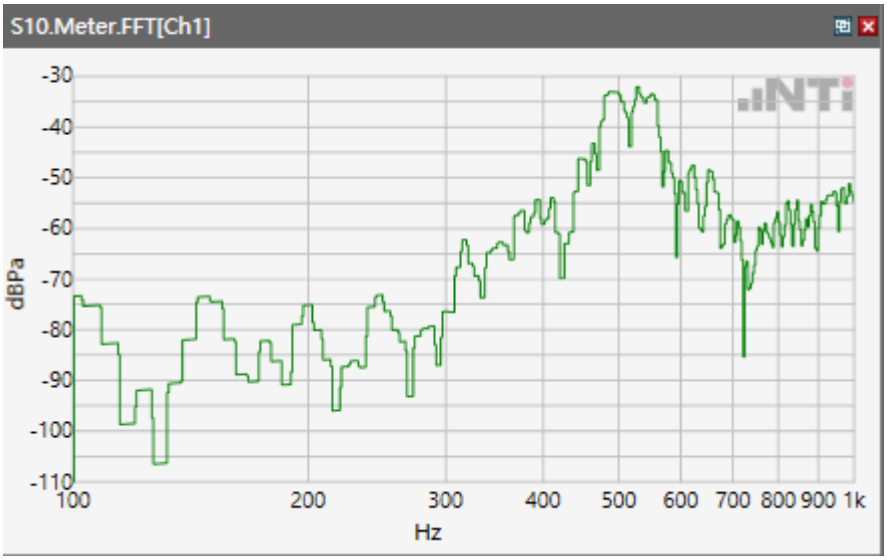

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\WLAN 5.3GHz

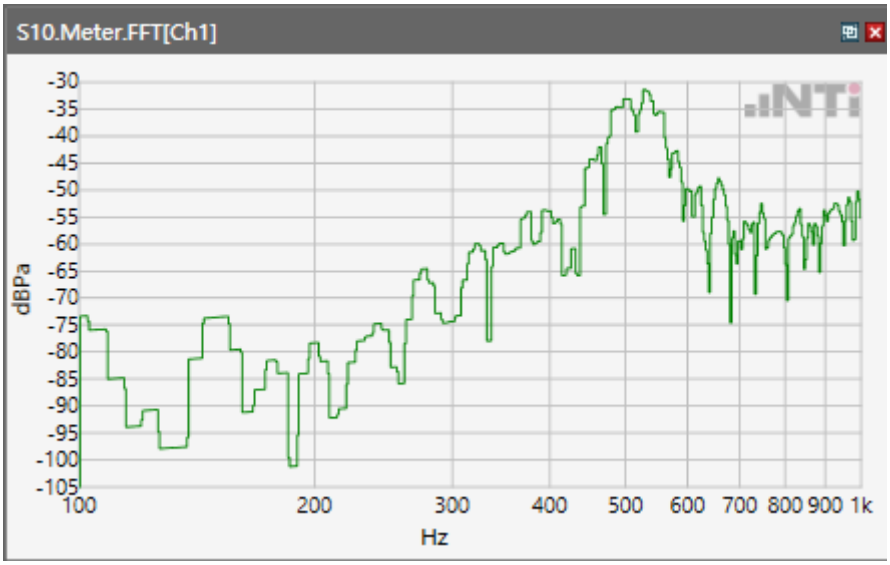

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ WLAN 5.5GHz

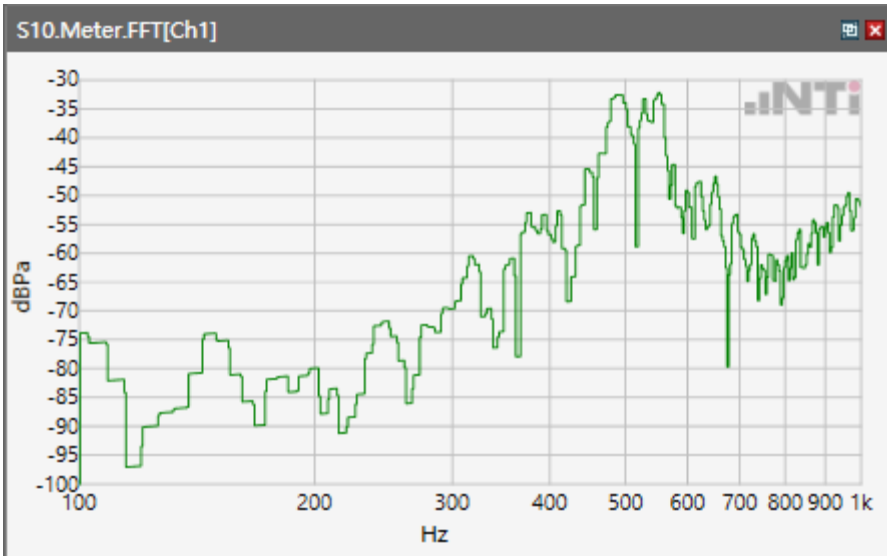

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ WLAN 5.8GHz

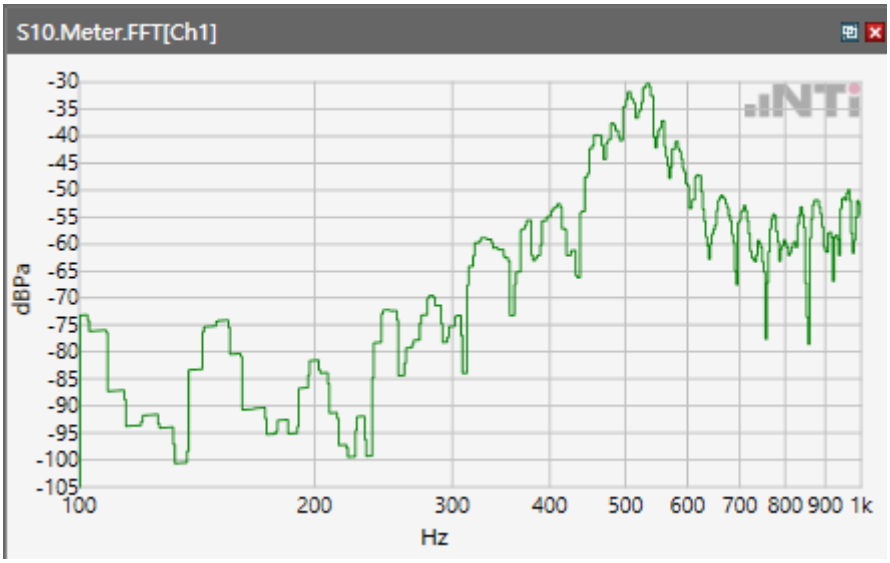

Receive path - distortion and noise 630Hz WB&NB

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\GSM 850

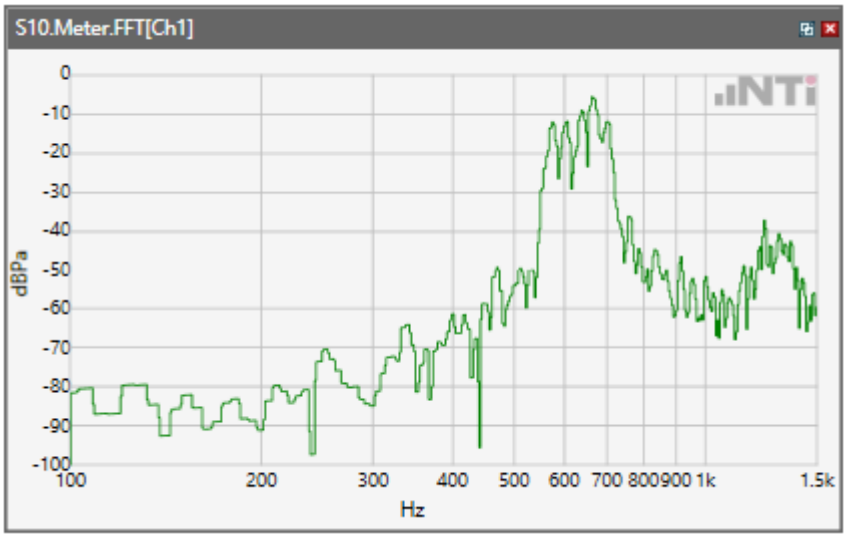

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ GSM 1900

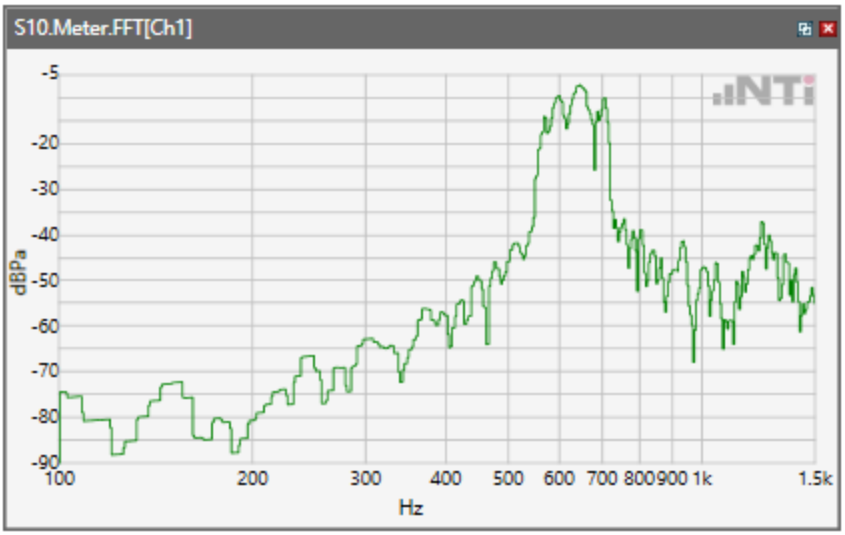

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\WCDMA Band II

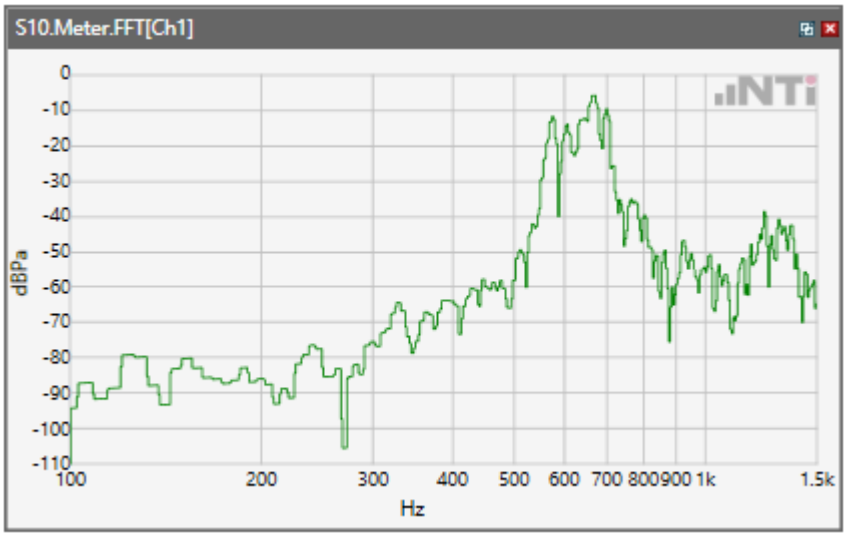

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ WCDMA Band IV

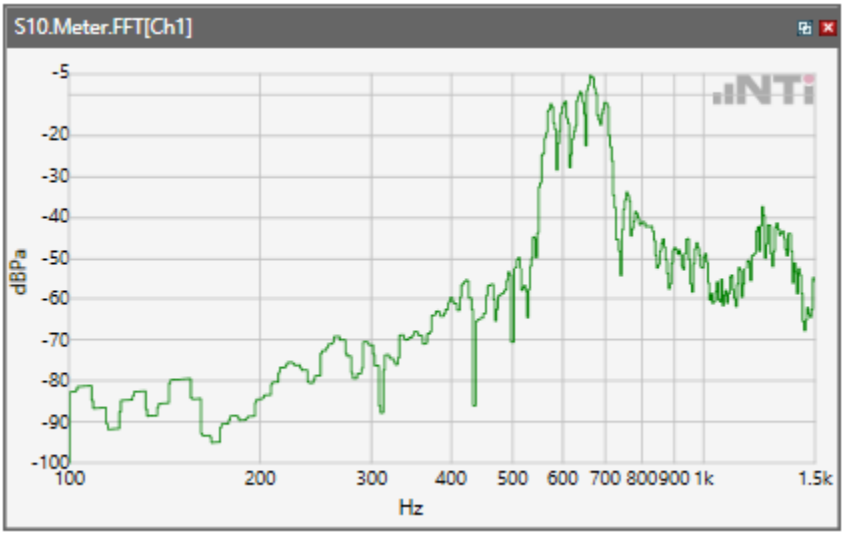

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ WCDMA Band V

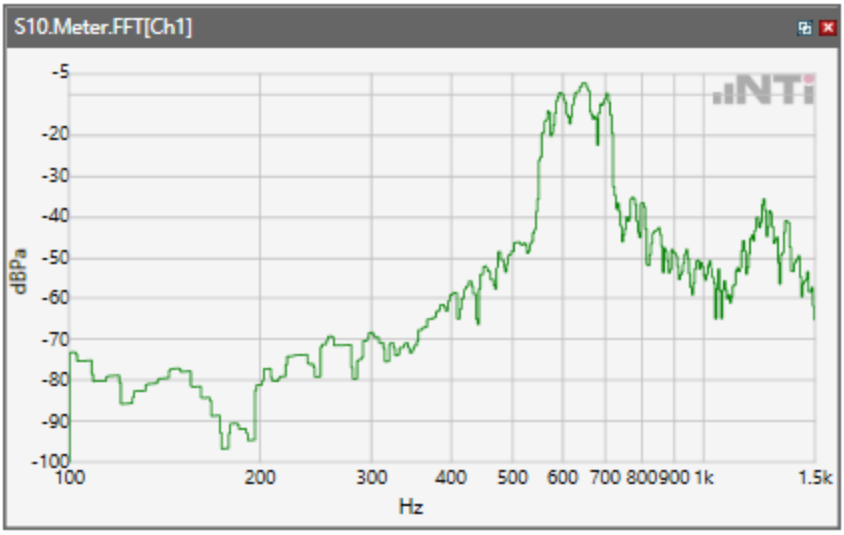

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\LTE Band 2

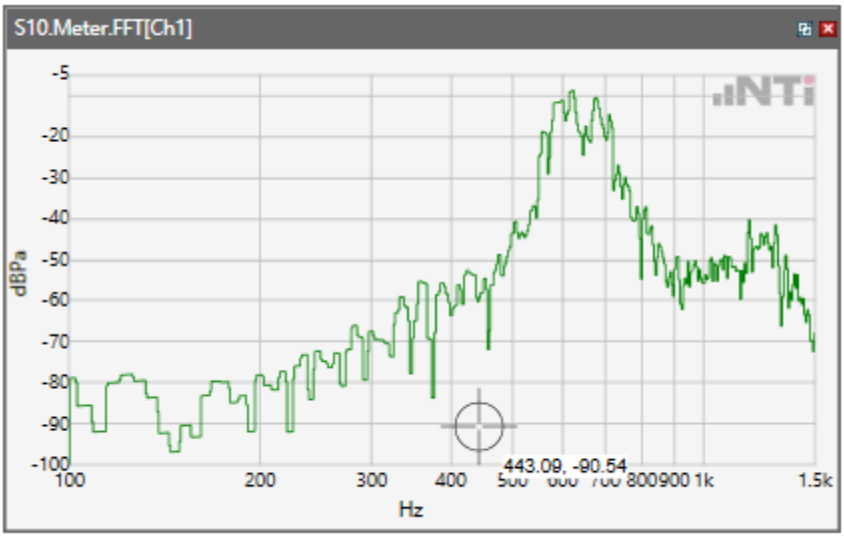

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ LTE Band 4

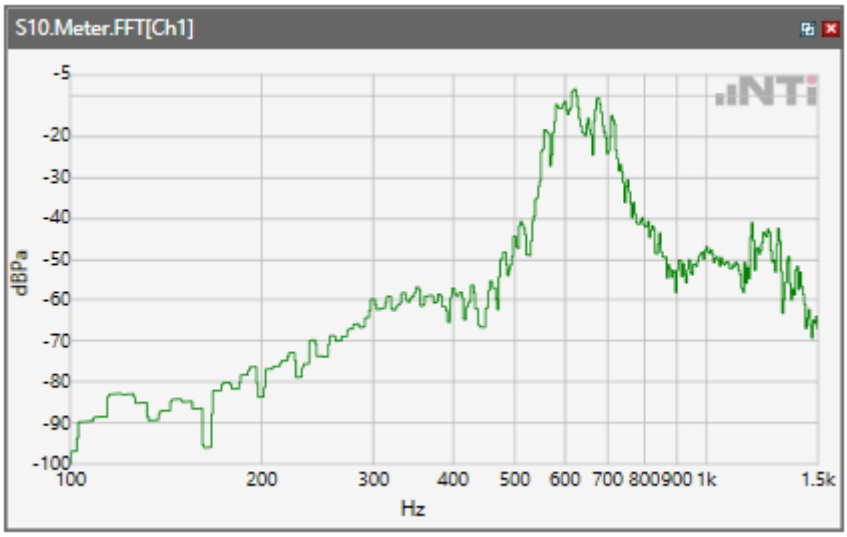

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ LTE Band 5

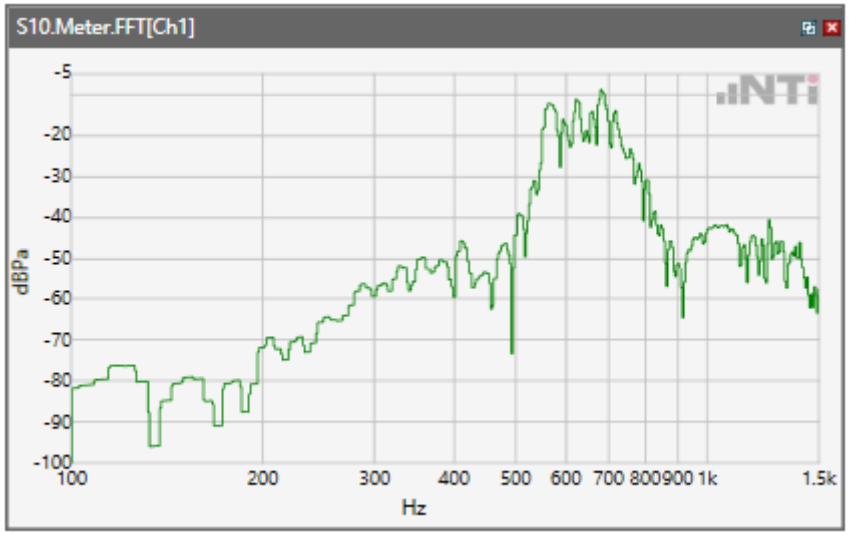

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ LTE Band 12

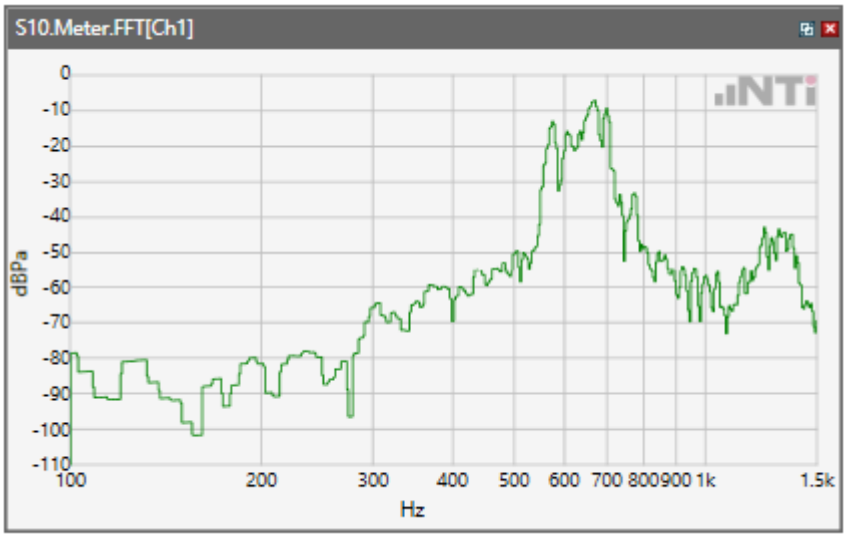

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ LTE Band 17

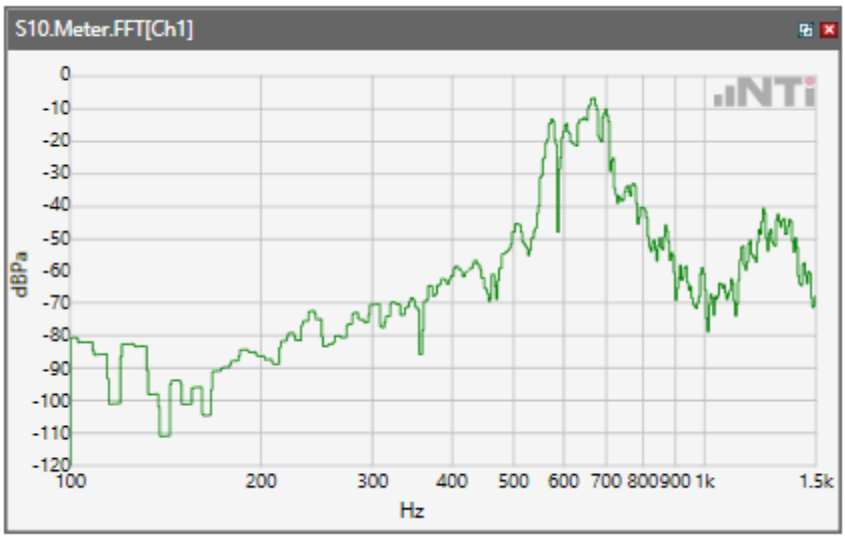

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ LTE Band 66

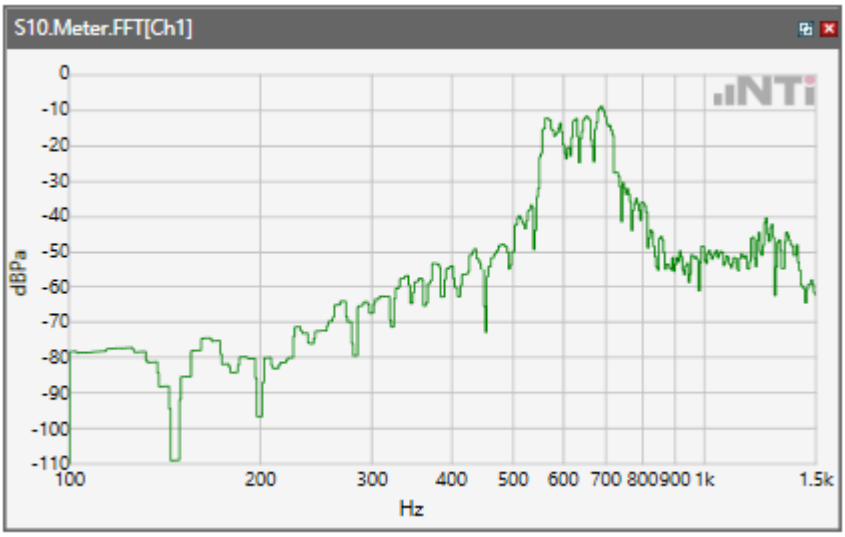

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ WLAN 2.4GHz

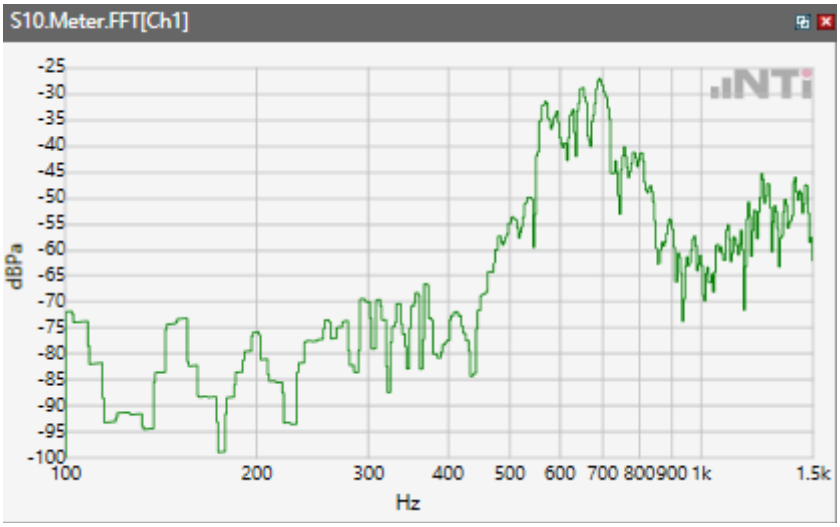

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\WLAN 5.2GHz

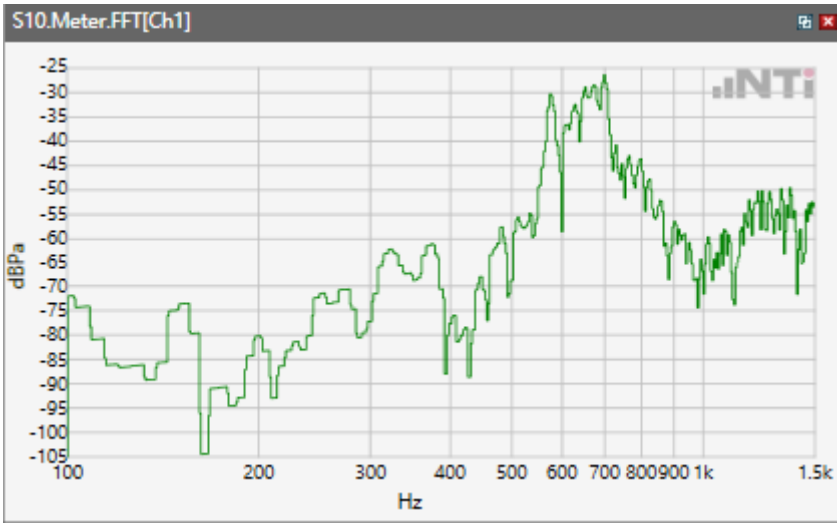

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\WLAN 5.3GHz

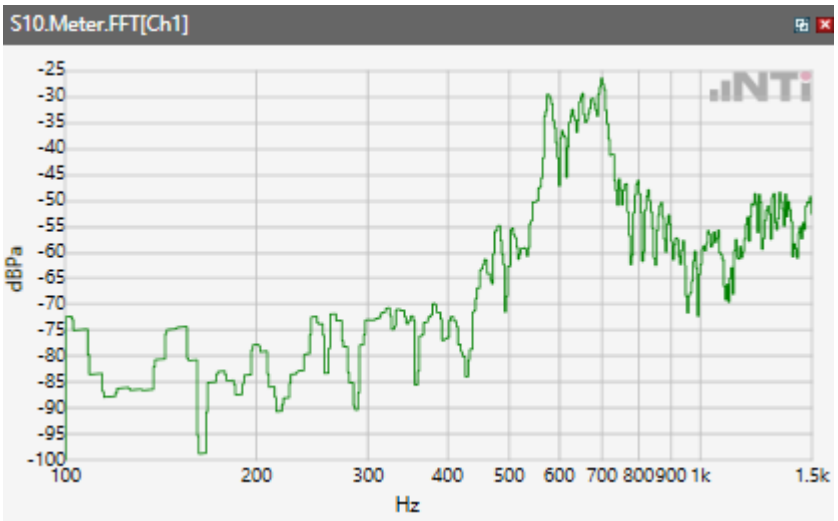

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ WLAN 5.5GHz

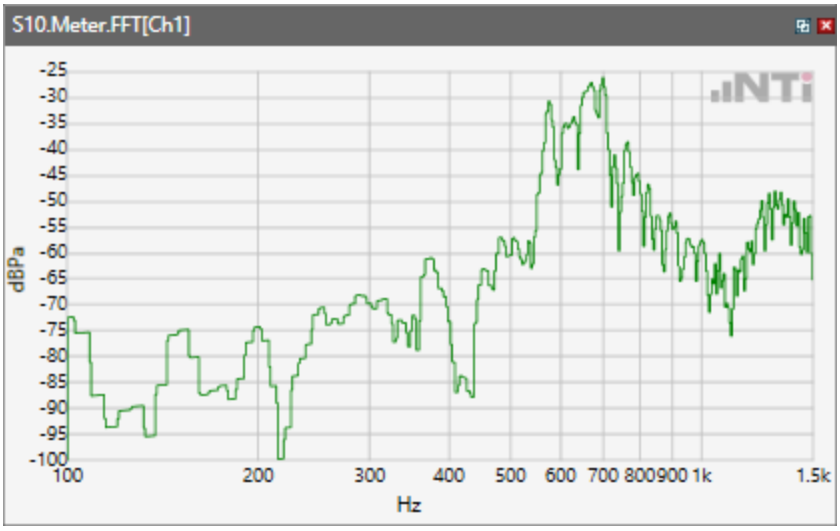

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ WLAN 5.8GHz

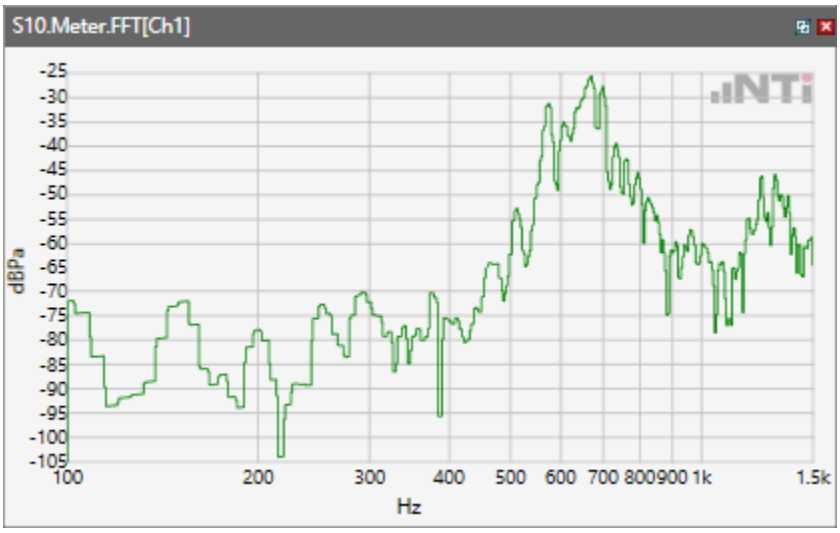

Receive path - distortion and noise 800Hz WB&NB

A ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\GSM 850

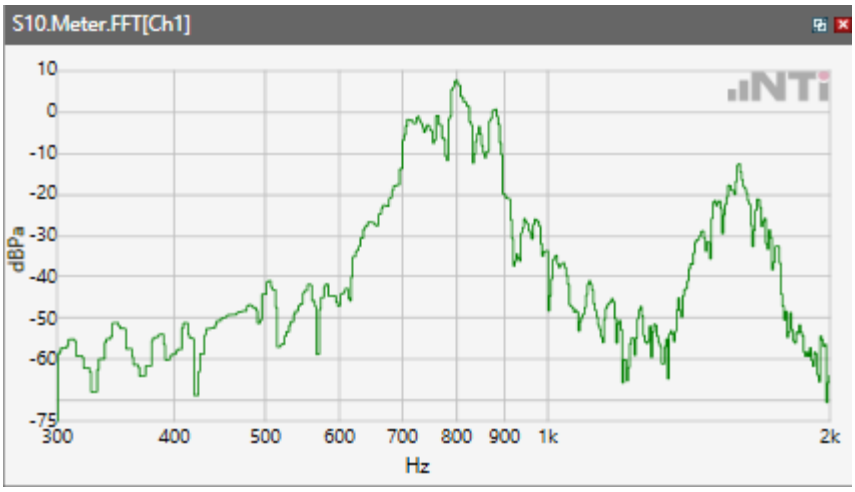

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ GSM 1900

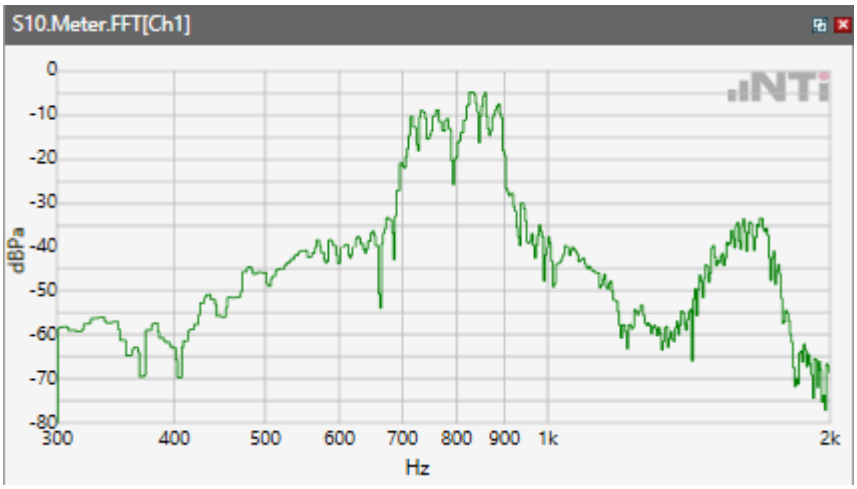

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\WCDMA Band II

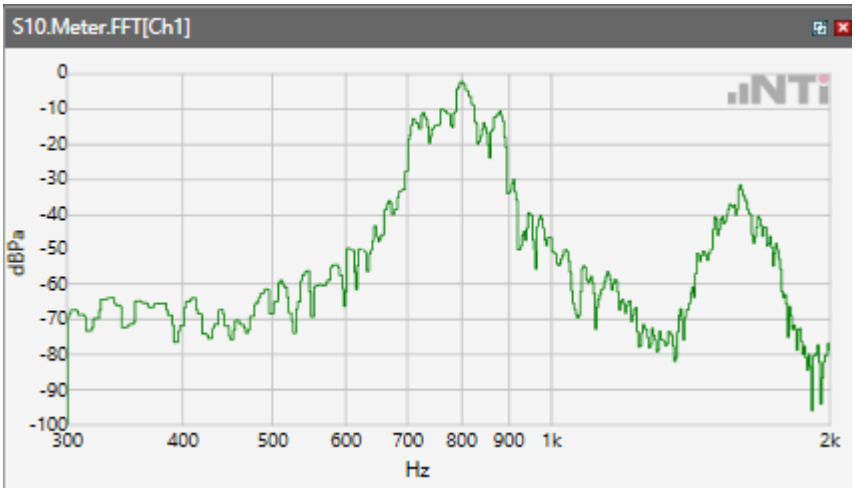

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ WCDMA Band IV

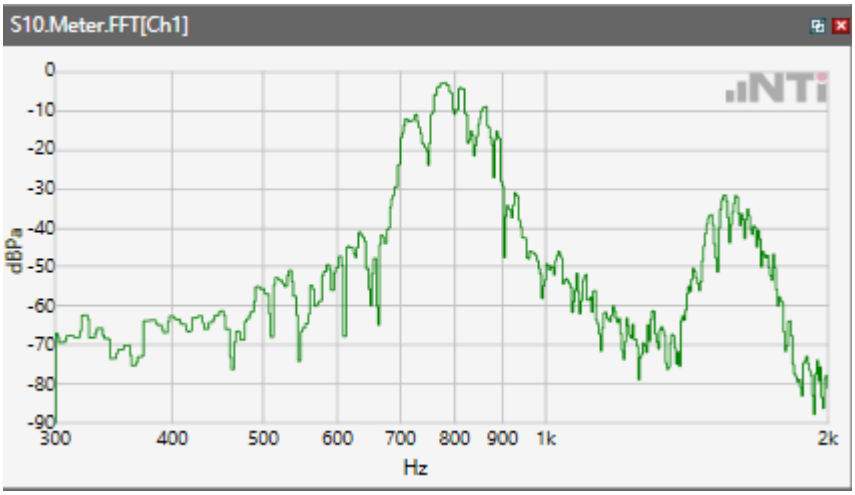

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ WCDMA Band V

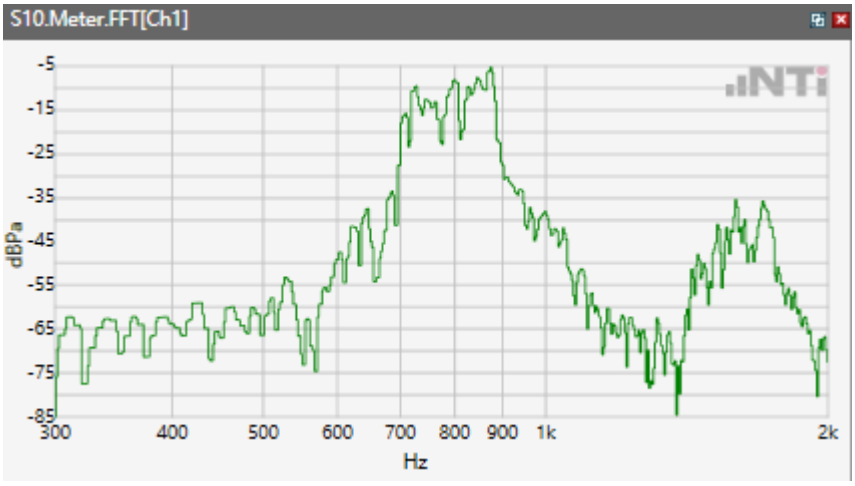

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\LTE Band 2

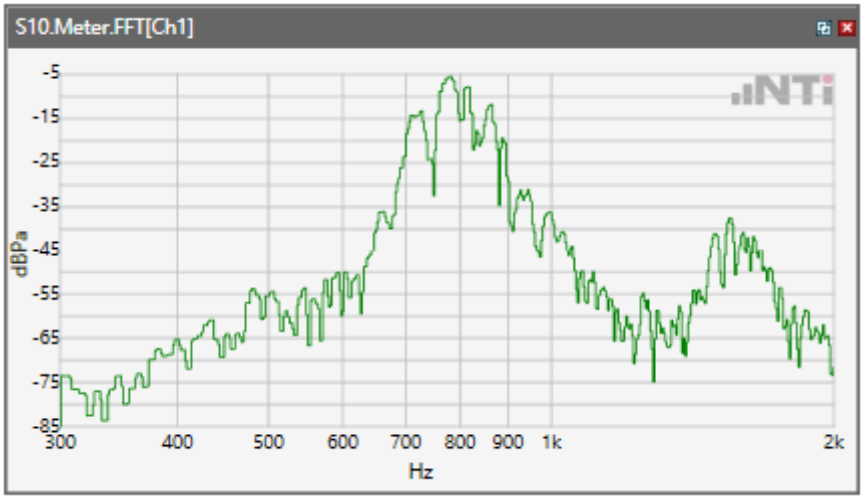

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ LTE Band 4

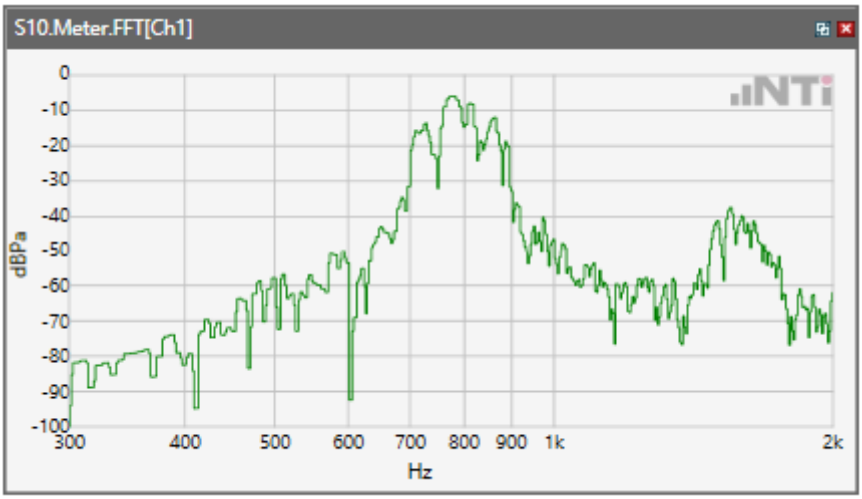

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ LTE Band 5

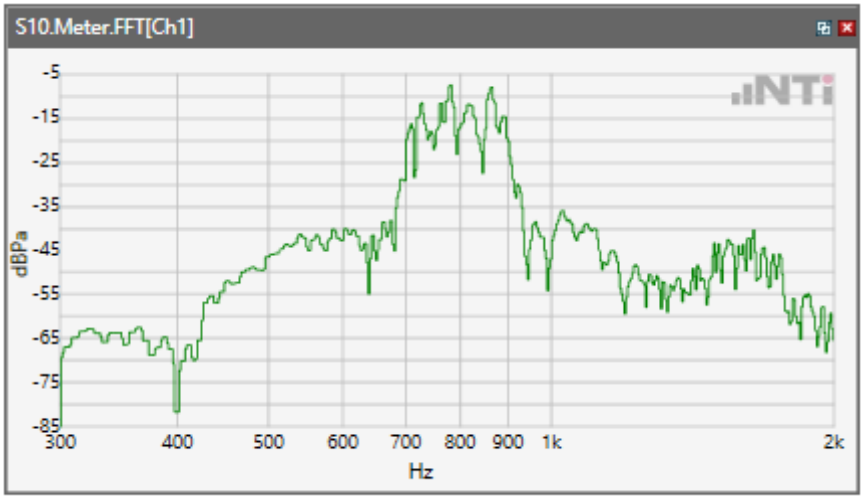

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ LTE Band 12

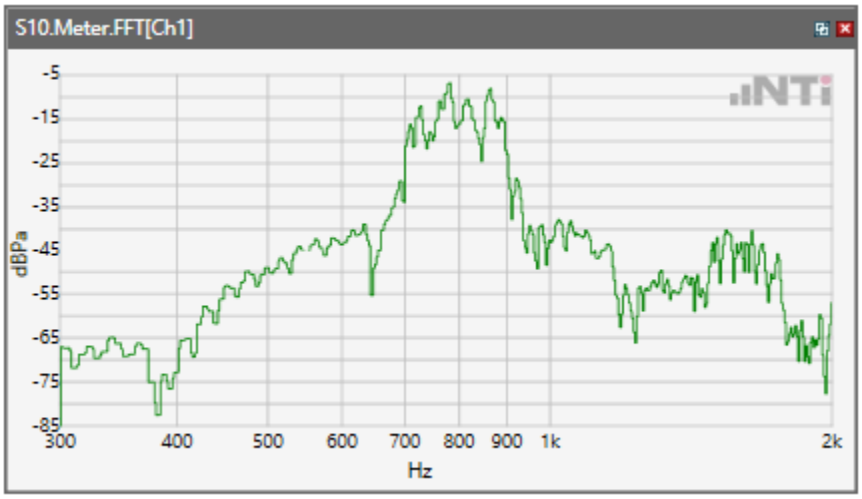

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ LTE Band 17

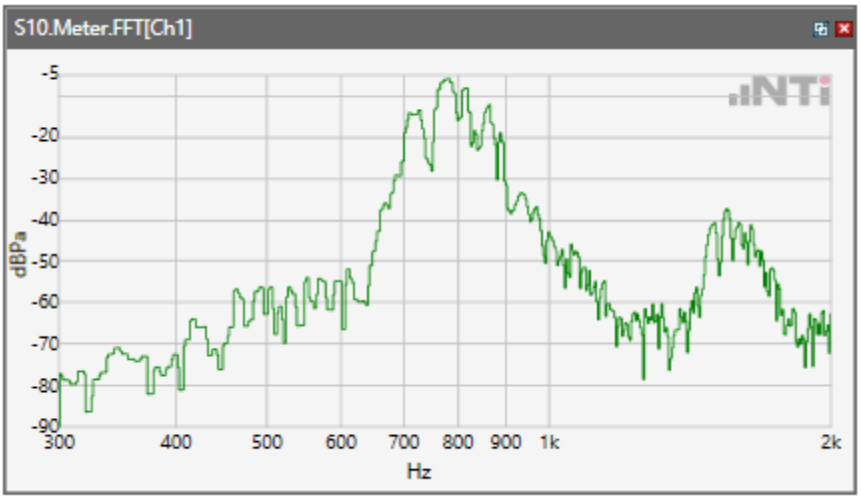

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ LTE Band 66

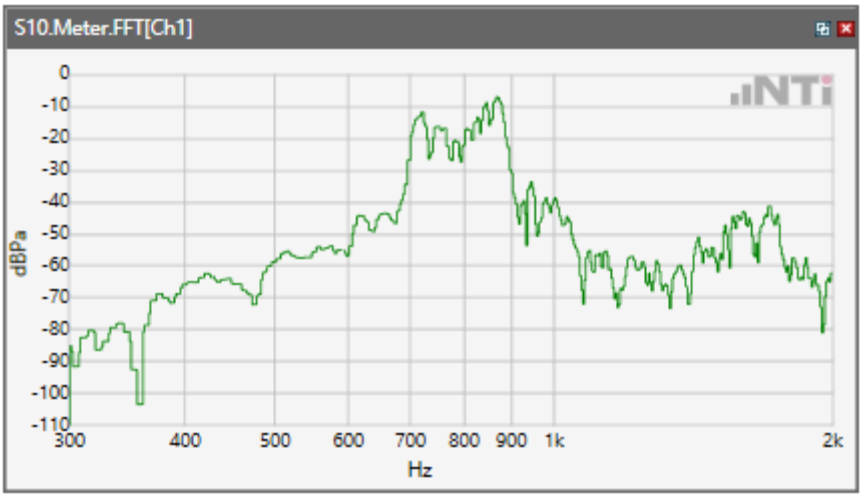

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ WLAN 2.4GHz

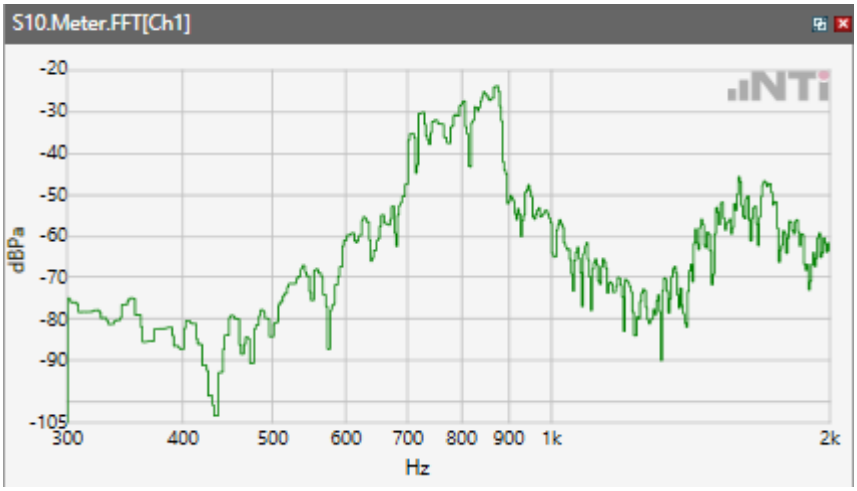

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\WLAN 5.2GHz

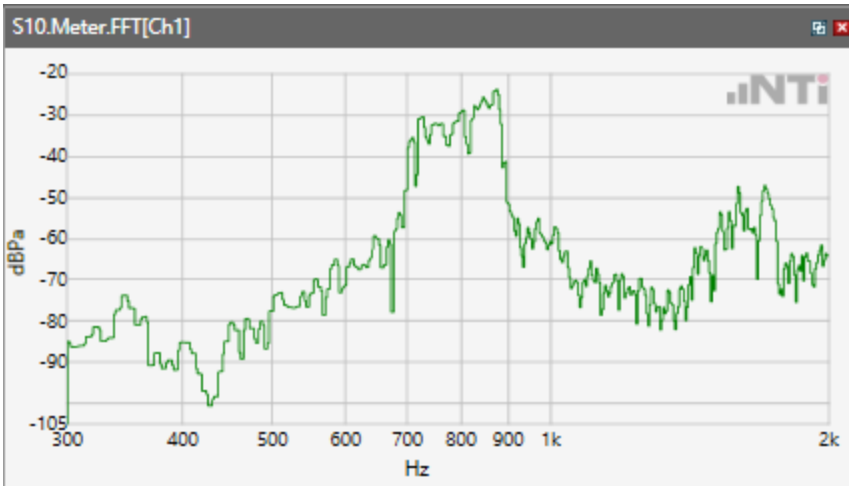

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\WLAN 5.3GHz

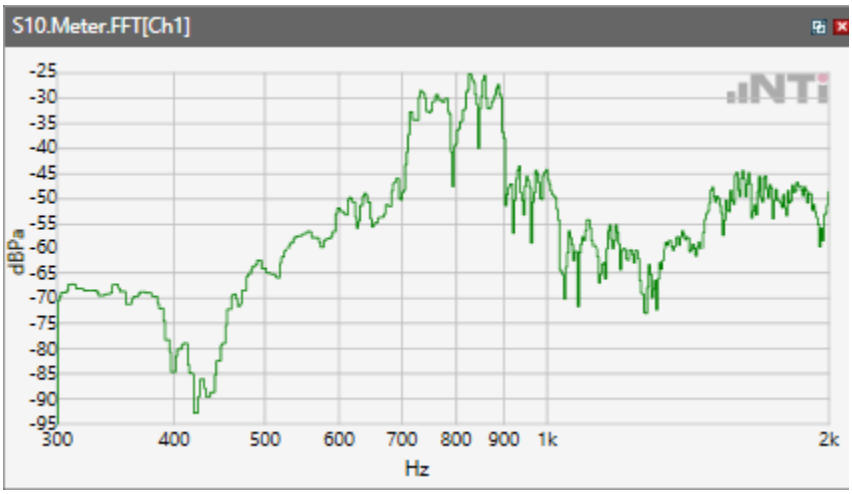

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ WLAN 5.5GHz

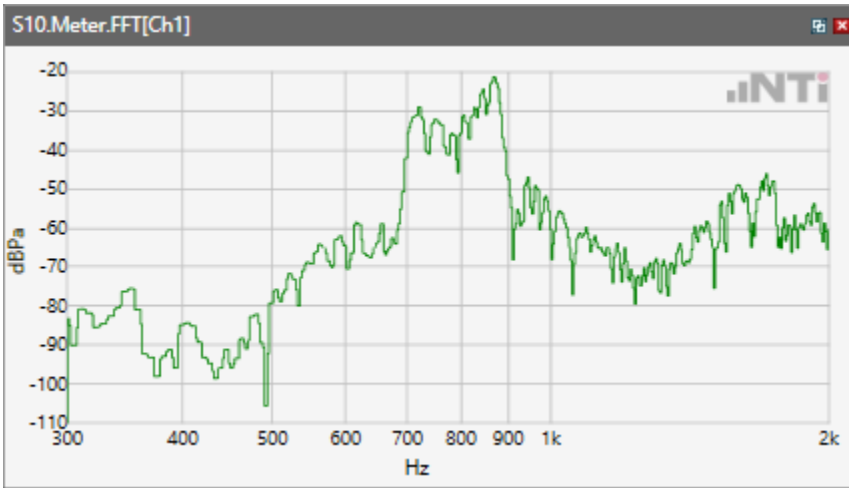

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ WLAN 5.8GHz

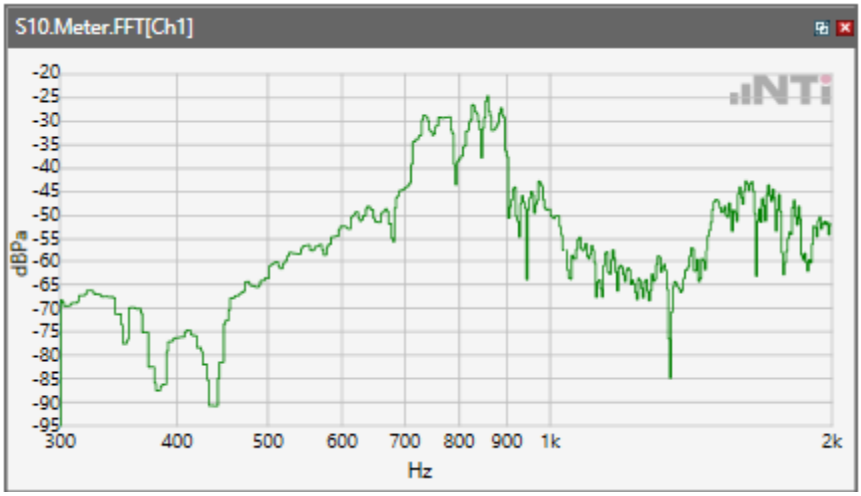

Receive path - distortion and noise 1000Hz WB&NB

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\GSM 850

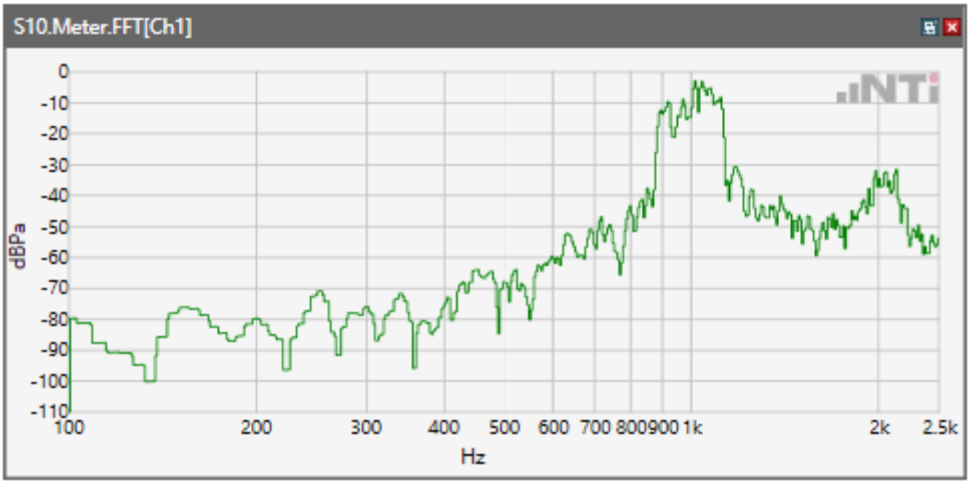

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ GSM 1900

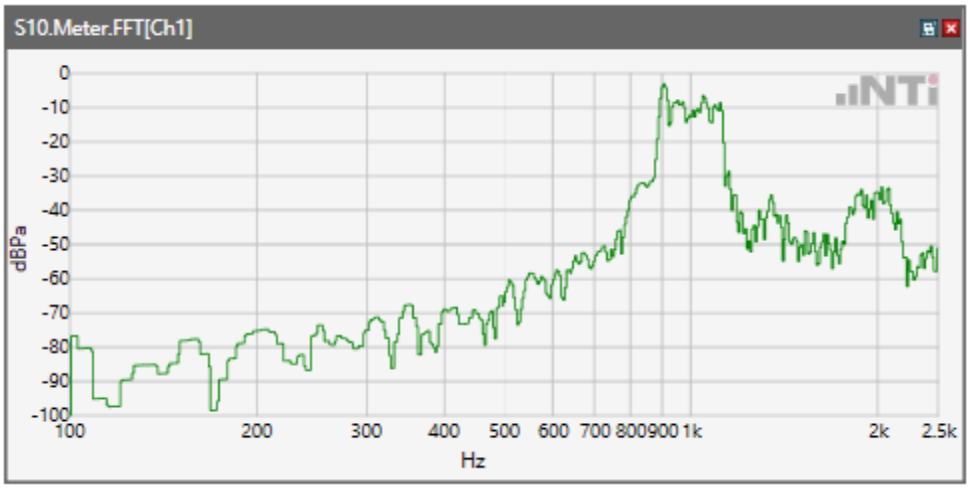

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\WCDMA Band II

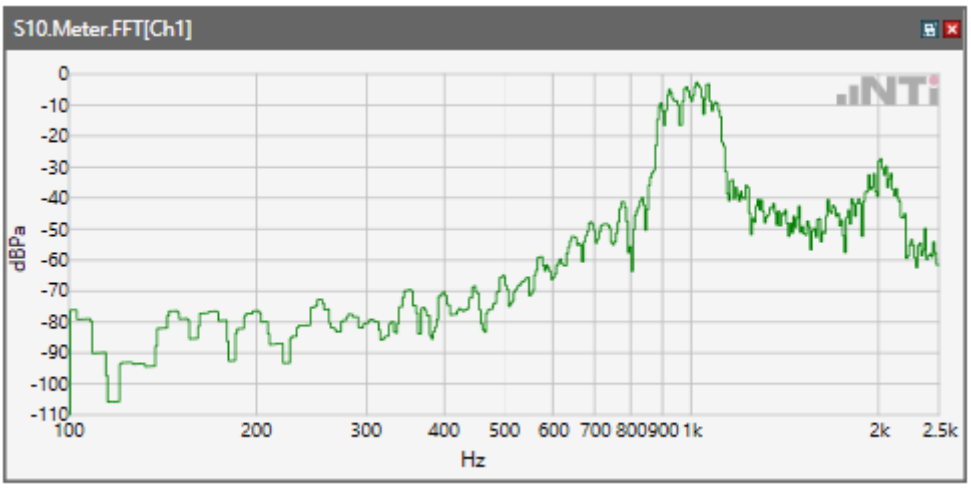

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ WCDMA Band IV

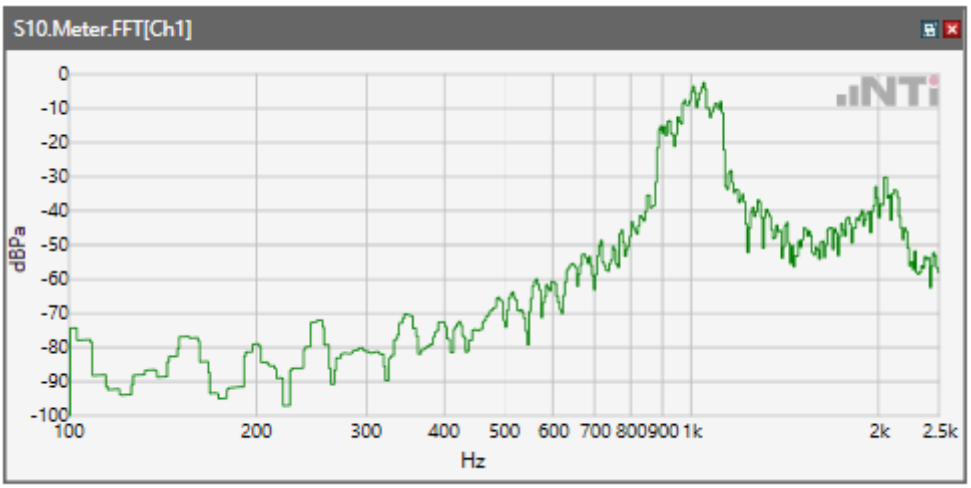

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ WCDMA Band V

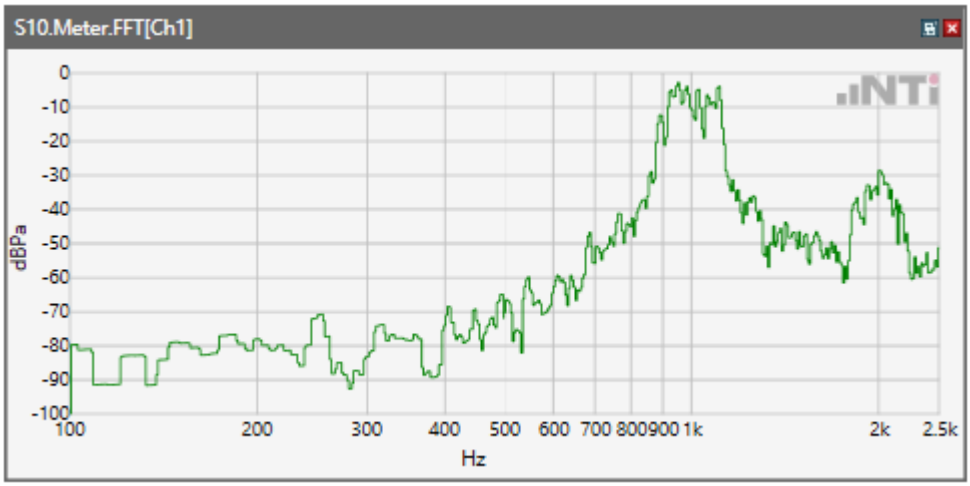

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\LTE Band 2

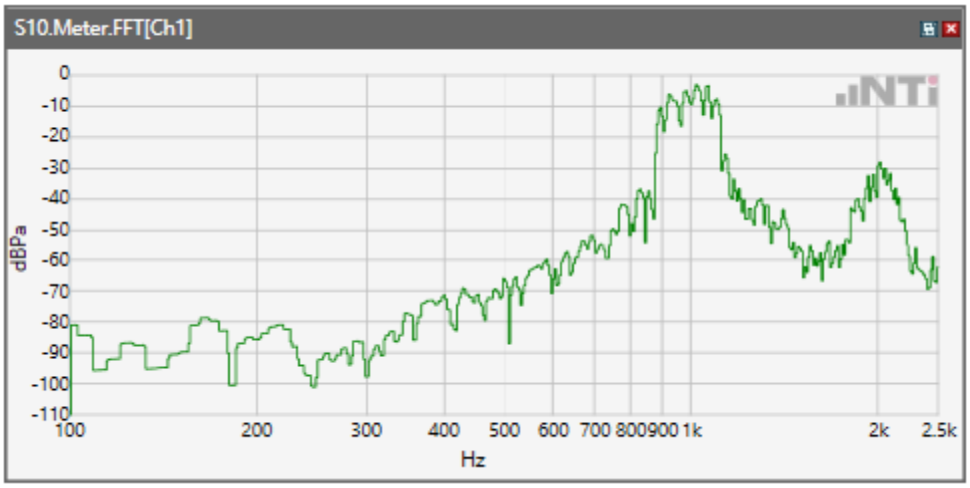

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ LTE Band 4

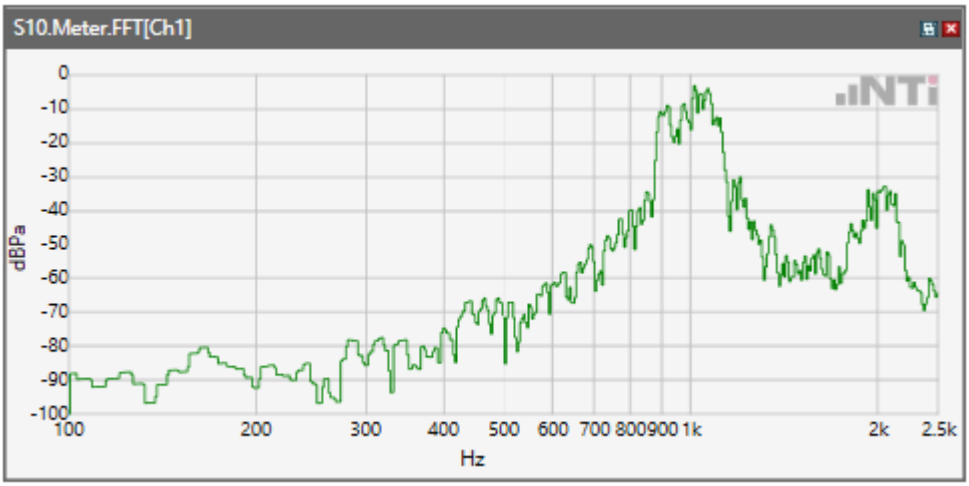

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ LTE Band 5

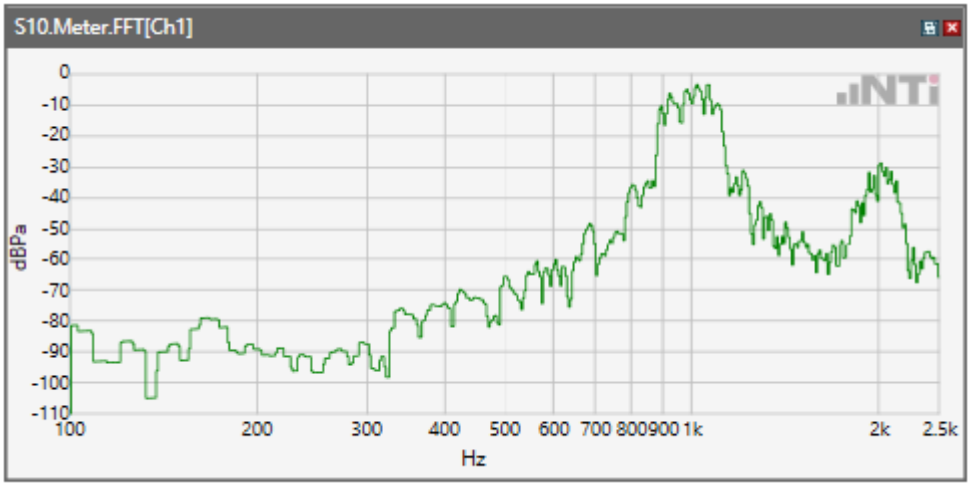

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ LTE Band 12

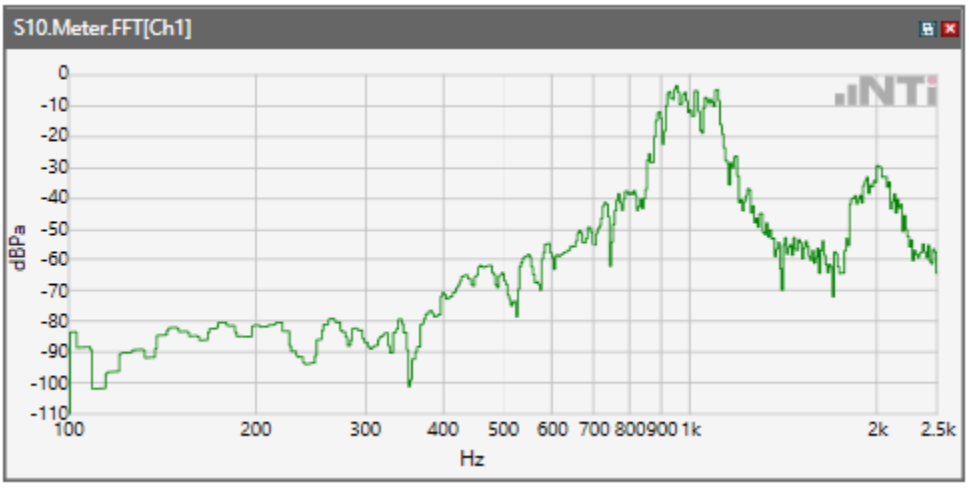

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ LTE Band 17

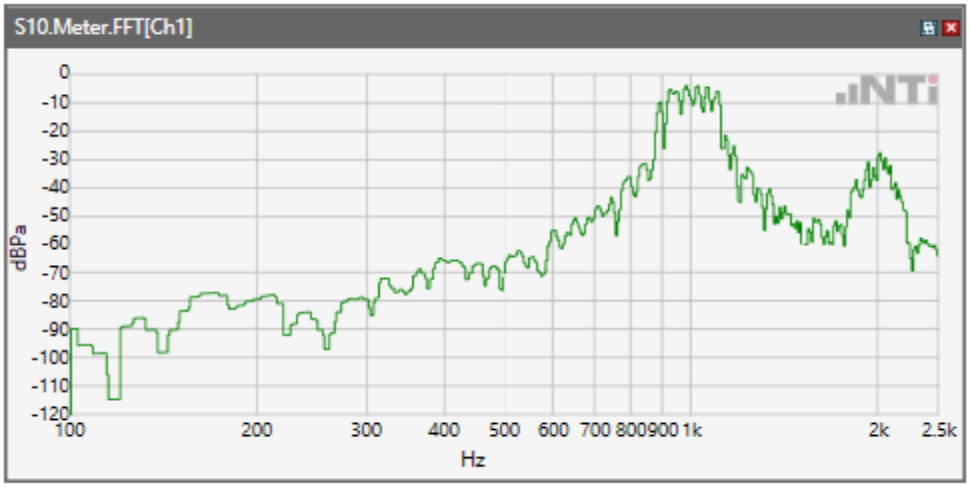

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ LTE Band 66

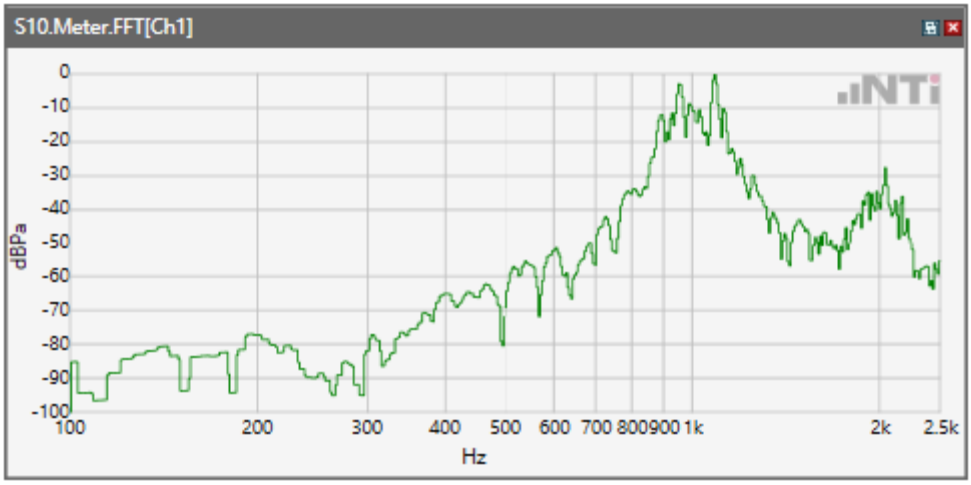

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ WLAN 2.4GHz

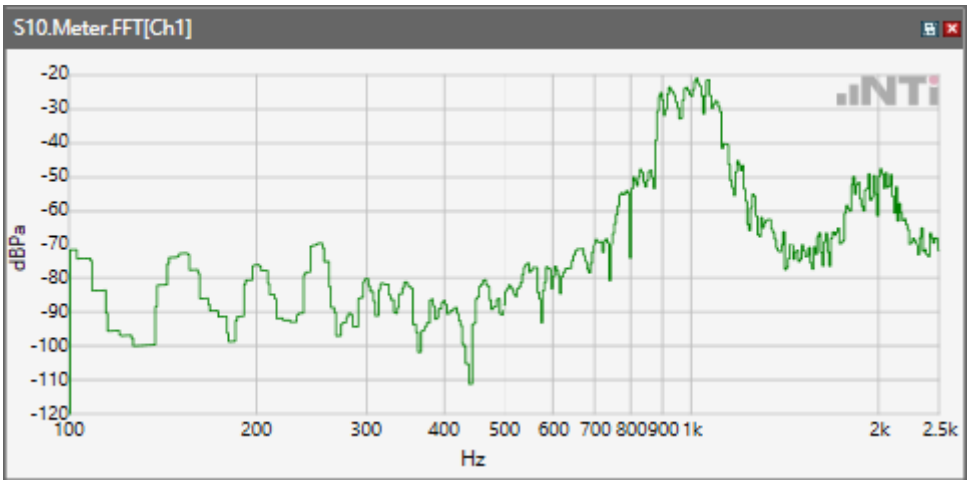

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\WLAN 5.2GHz

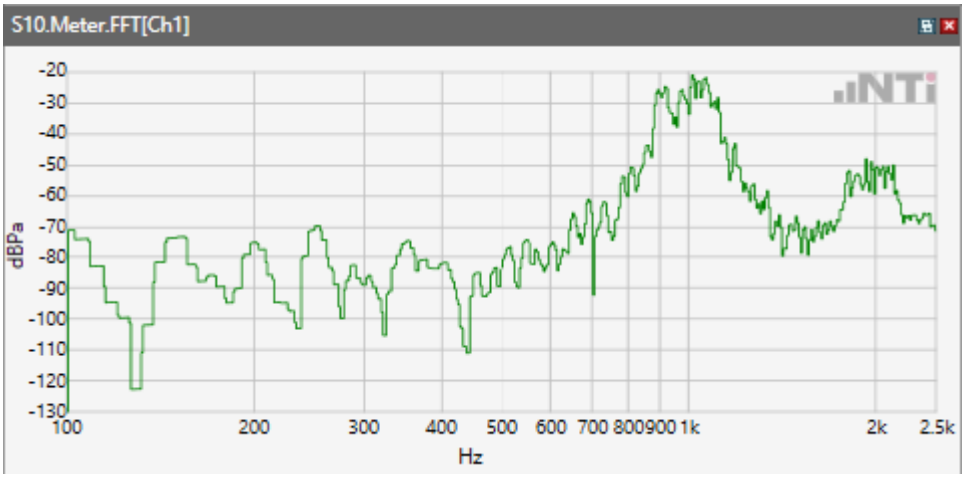

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\WLAN 5.3GHz

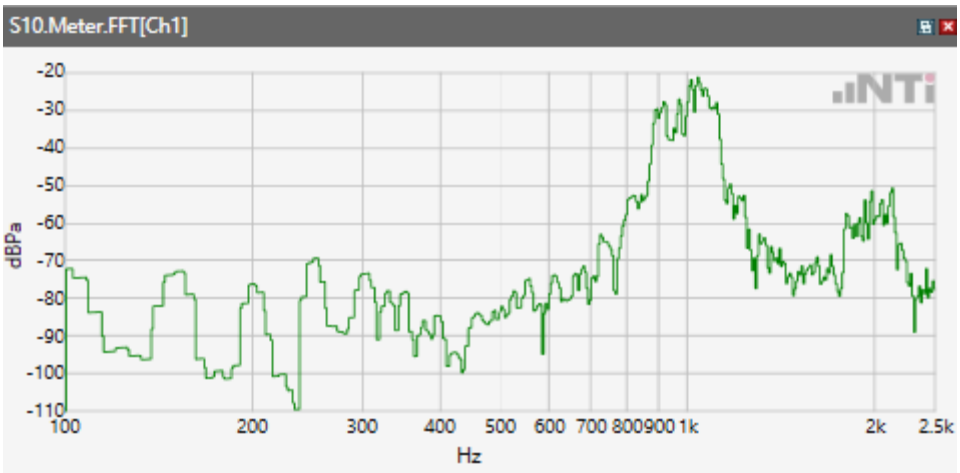

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ WLAN 5.5GHz

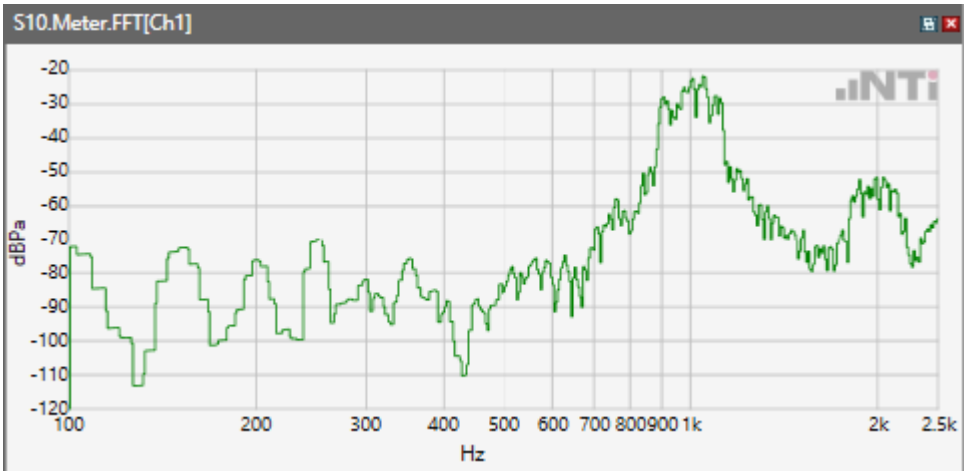

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ WLAN 5.8GHz

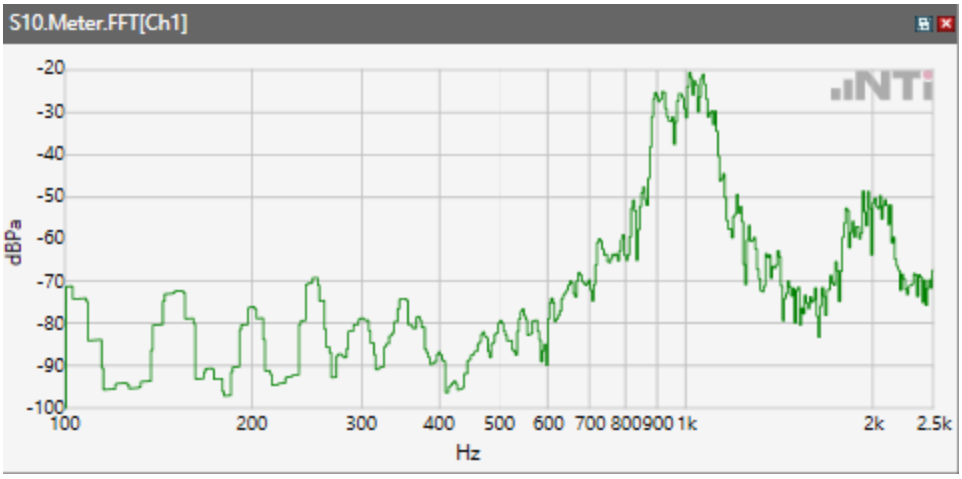

Receive path - distortion and noise 1250Hz WB&NB

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\GSM 850

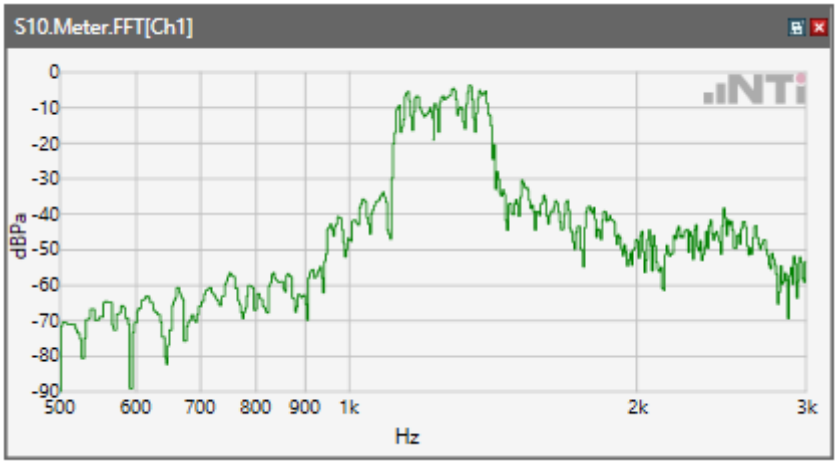

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ GSM 1900

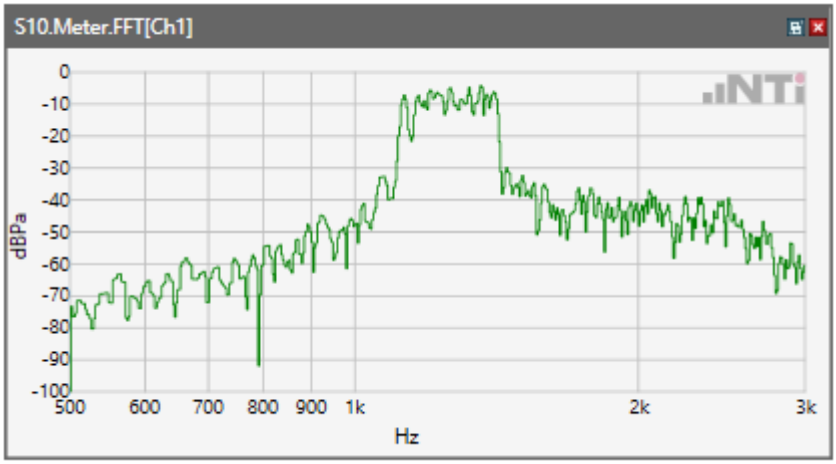

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\WCDMA Band II

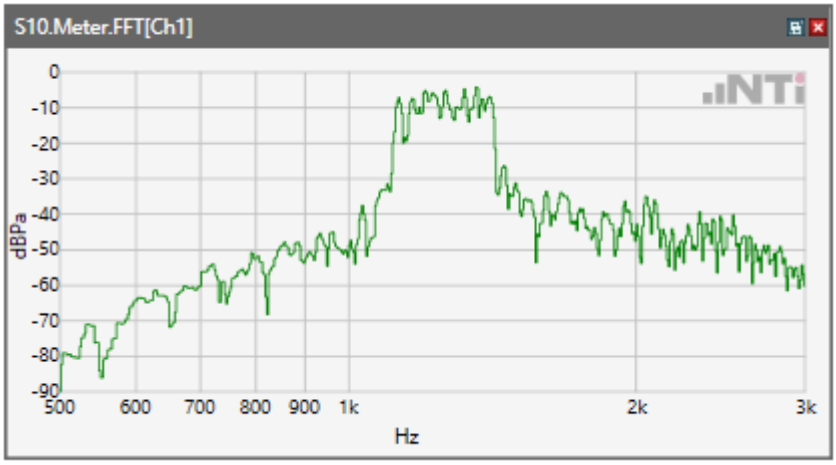

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ WCDMA Band IV

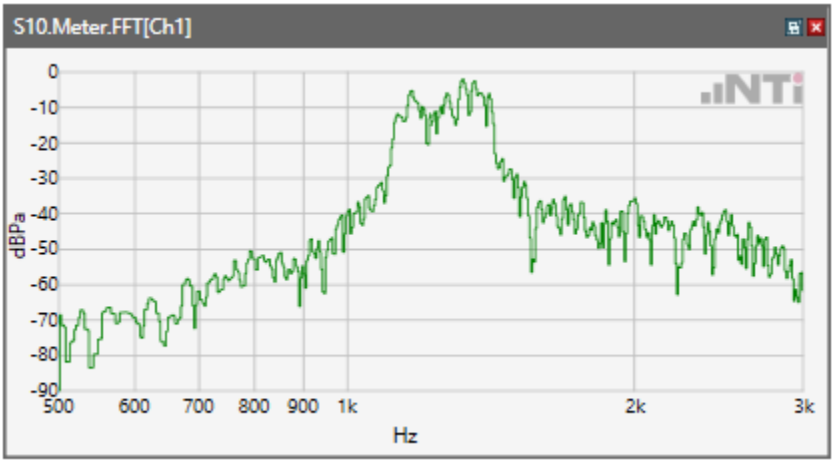

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ WCDMA Band V

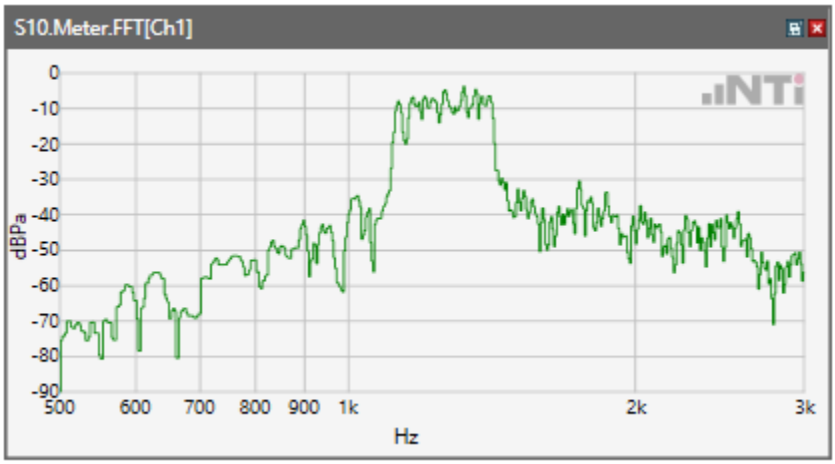

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\LTE Band 2

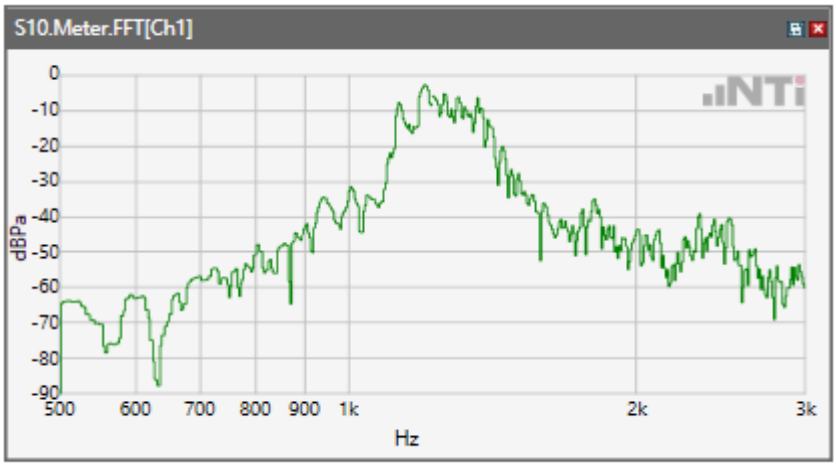

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ LTE Band 4

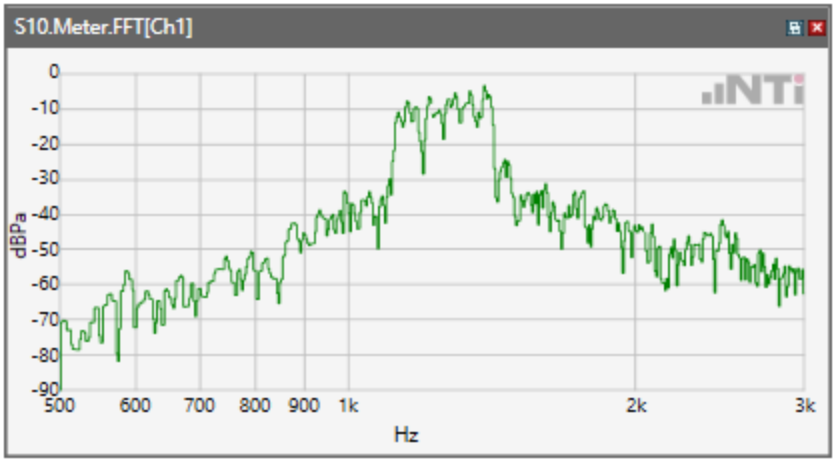

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ LTE Band 5

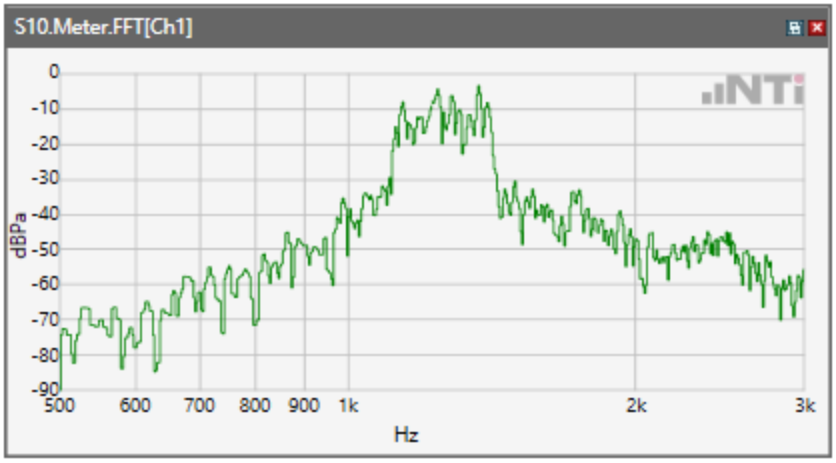

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ LTE Band 12

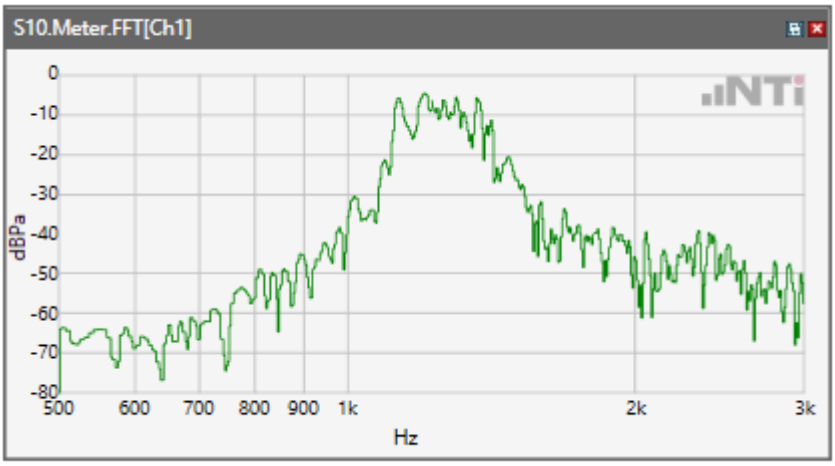

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ LTE Band 17

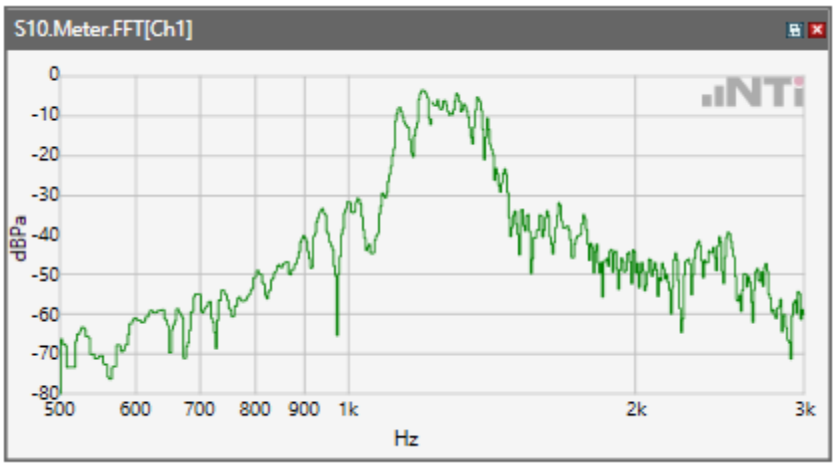

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ LTE Band 66

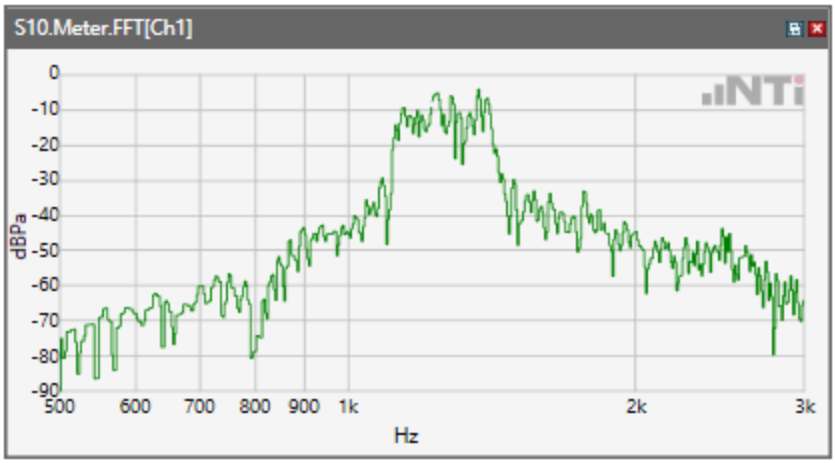

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ WLAN 2.4GHz

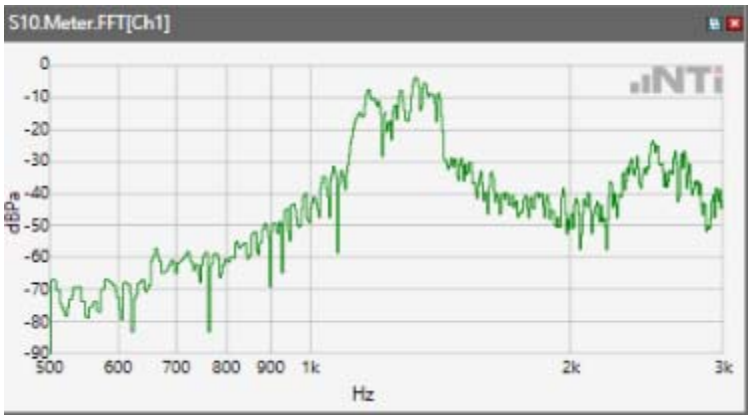

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\WLAN 5.2GHz

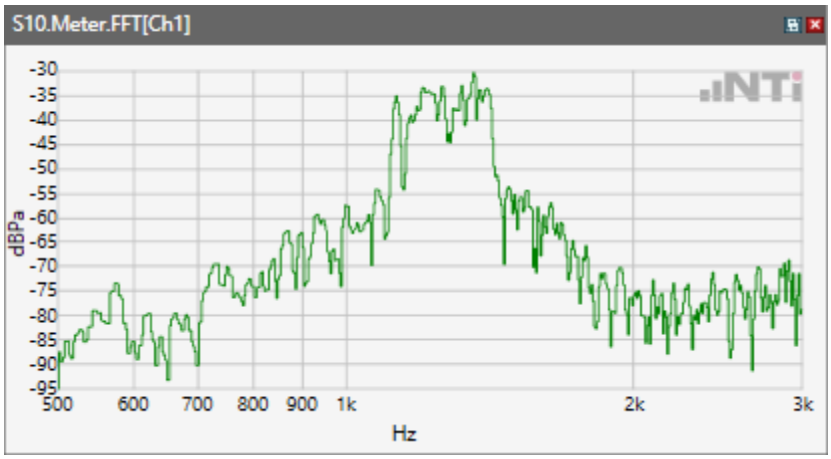

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\WLAN 5.3GHz

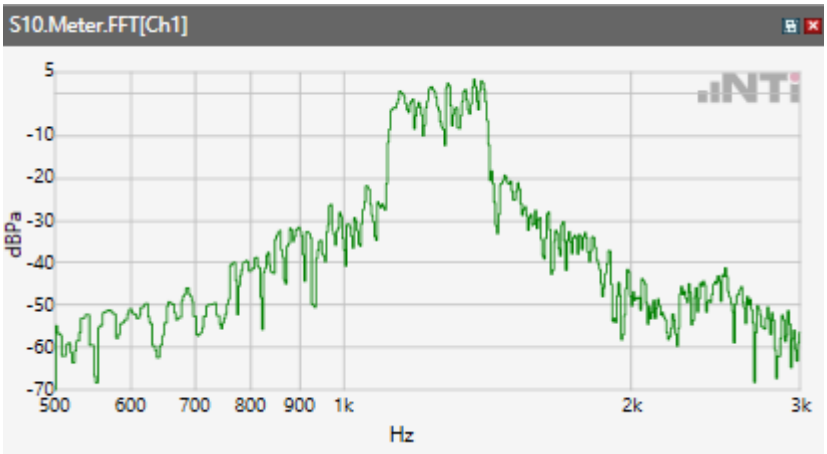

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ WLAN 5.5GHz

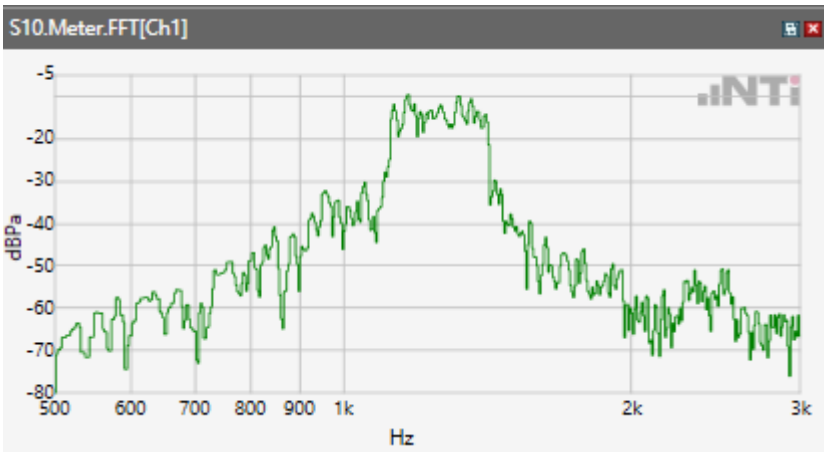

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ WLAN 5.8GHz

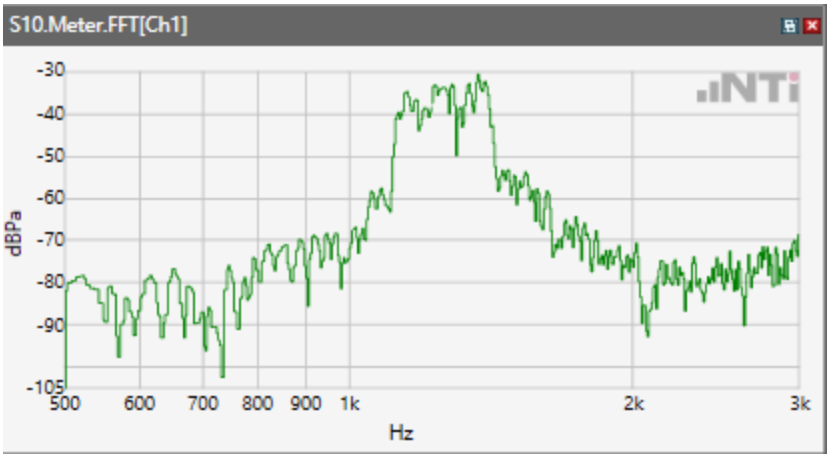

Receive path - distortion and noise 1600Hz WB&NB

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\GSM 850

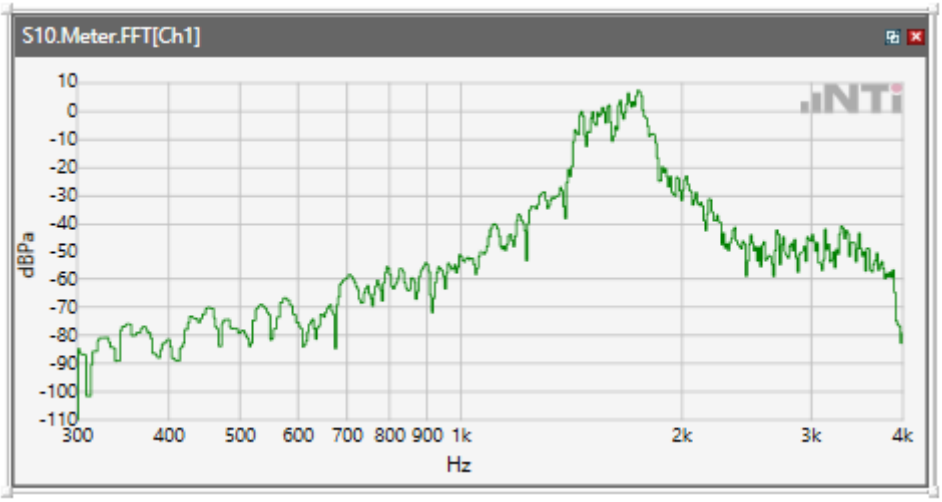

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ GSM 1900

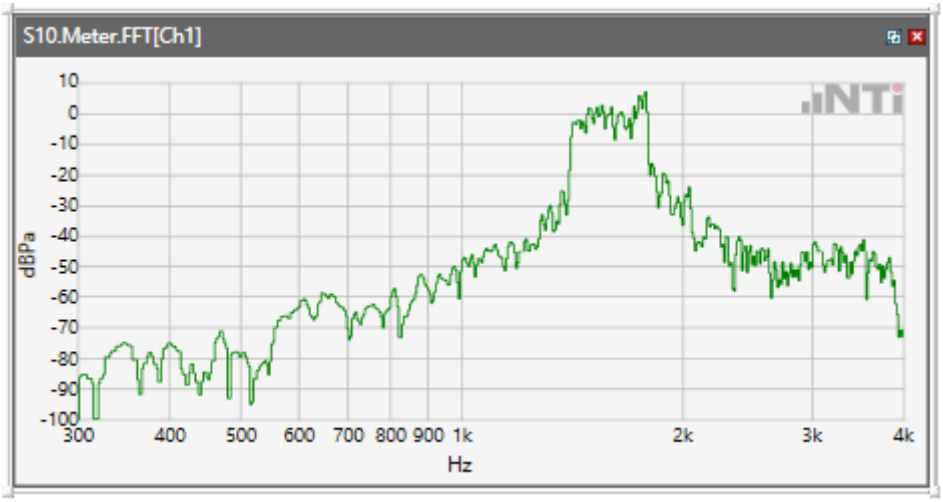

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\WCDMA Band II

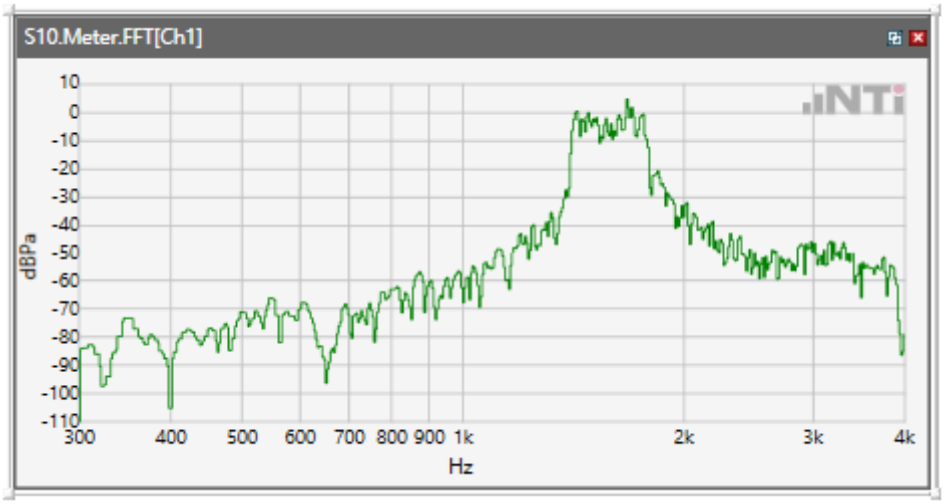

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ WCDMA Band IV

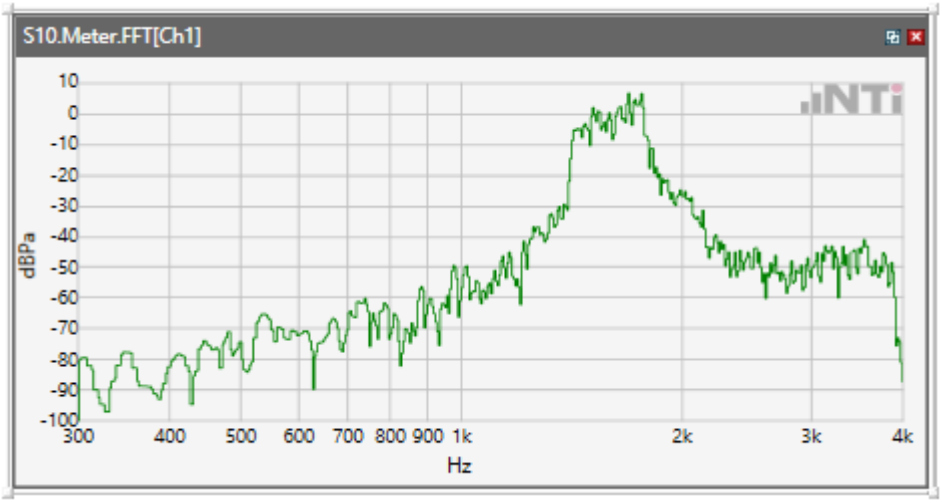

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ WCDMA Band V

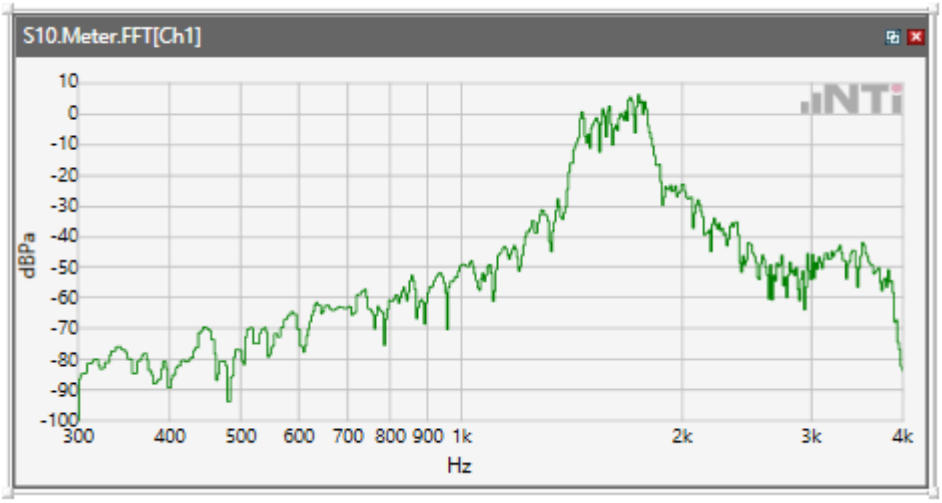

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\LTE Band 2

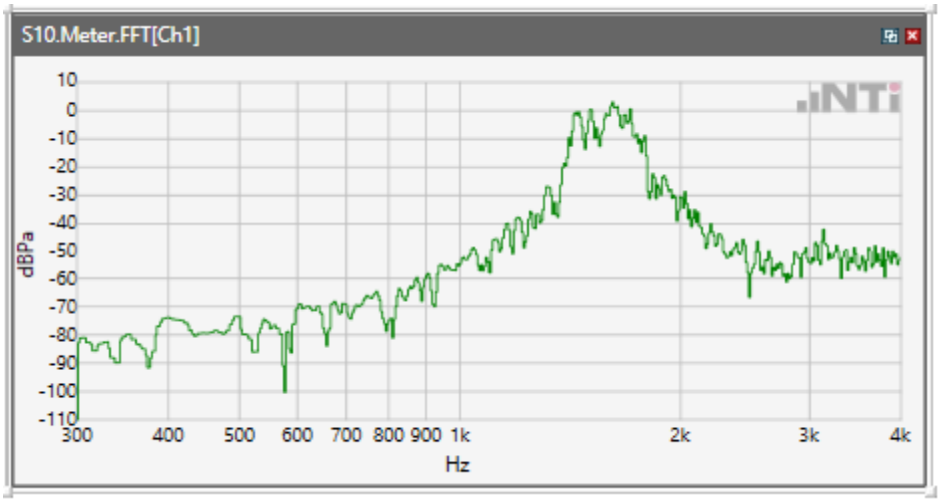

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ LTE Band 4

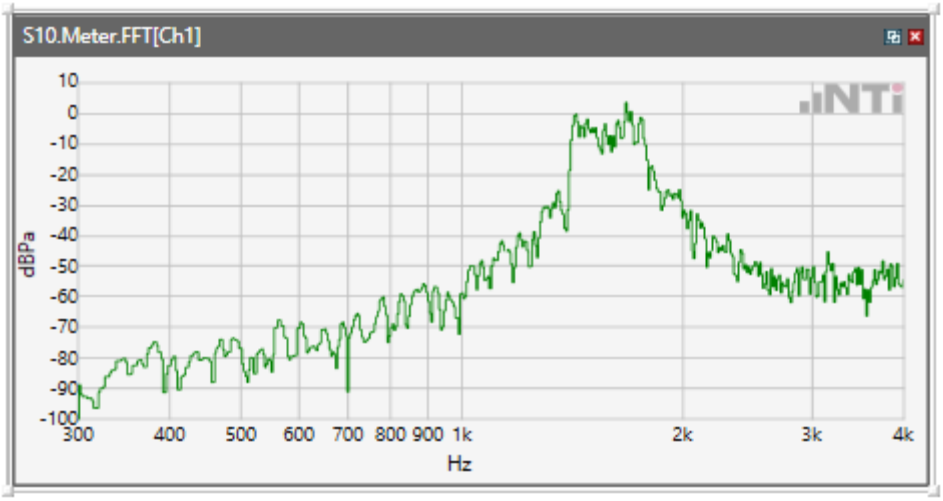

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ LTE Band 5

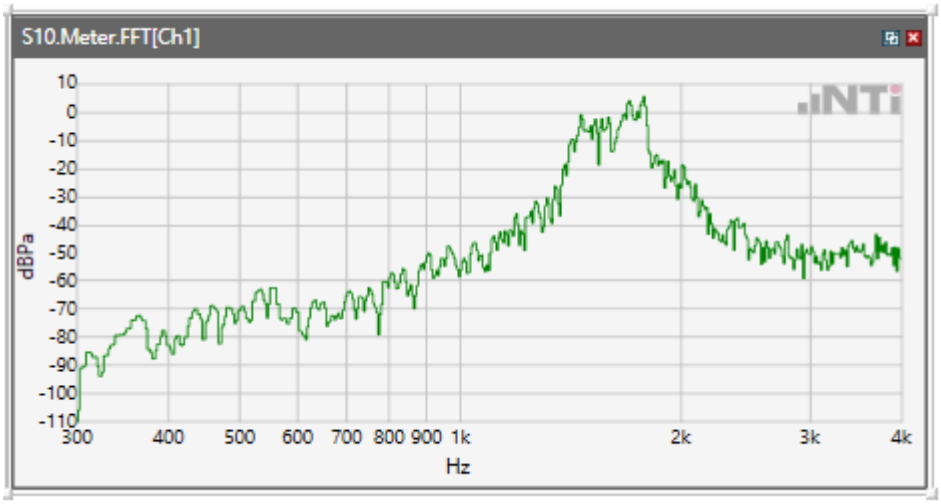

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ LTE Band 12

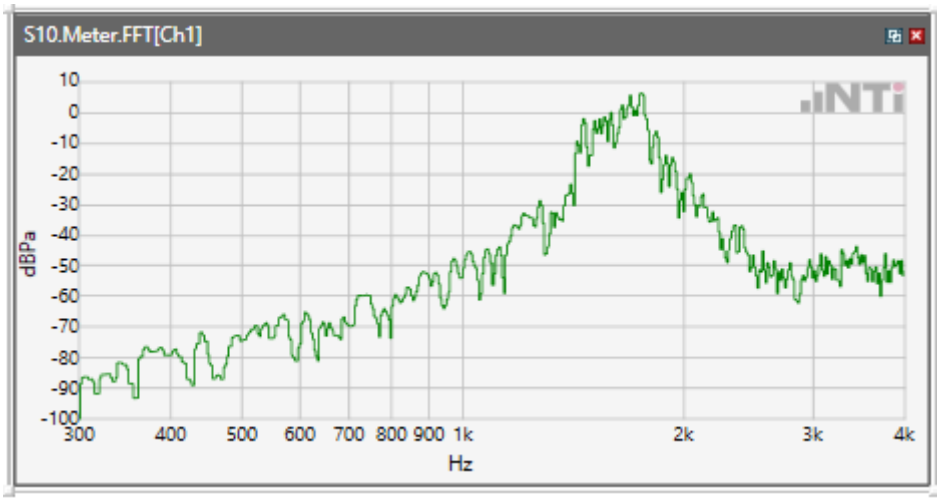

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ LTE Band 17

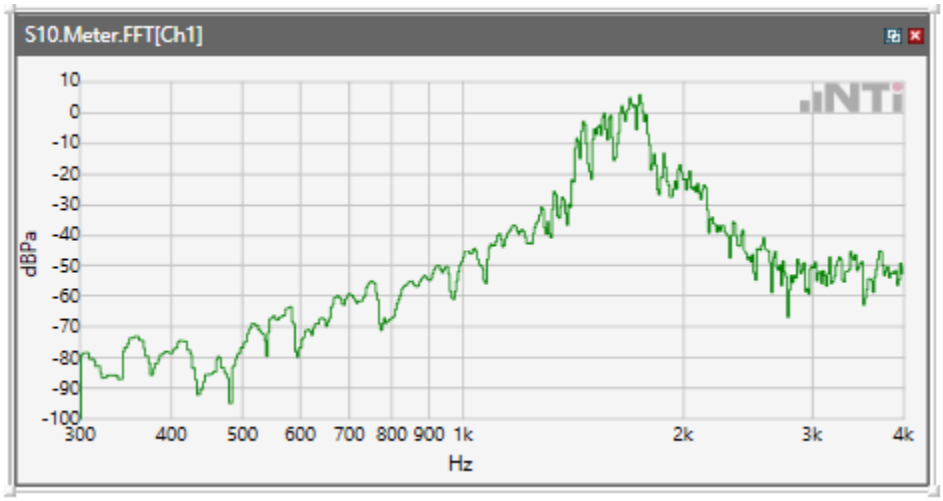

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ LTE Band 66

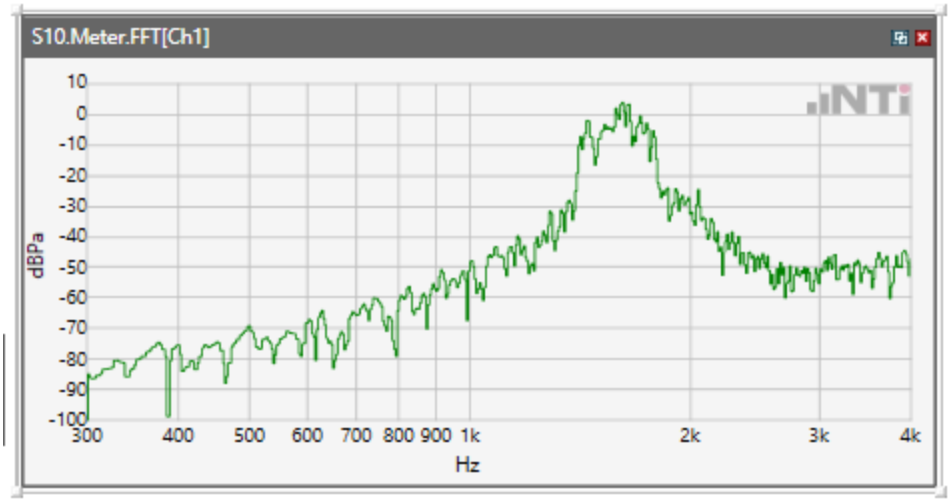

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ WLAN 2.4GHz

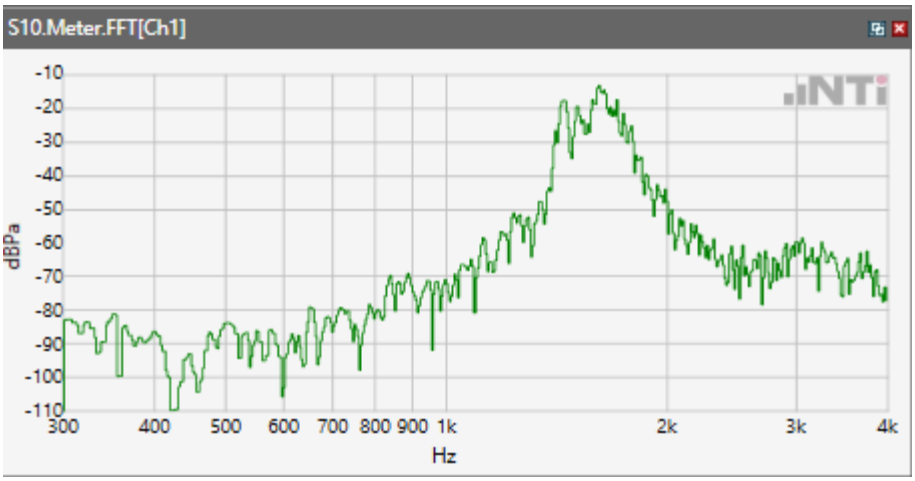

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\WLAN 5.2GHz

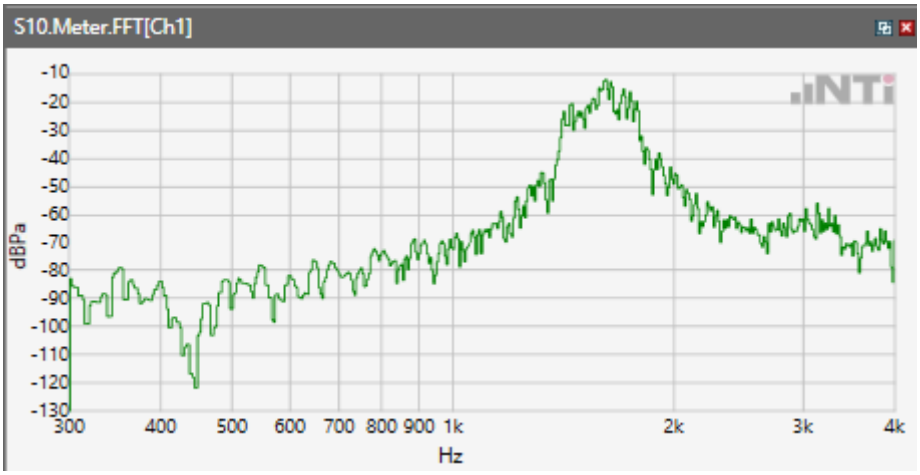

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\WLAN 5.3GHz

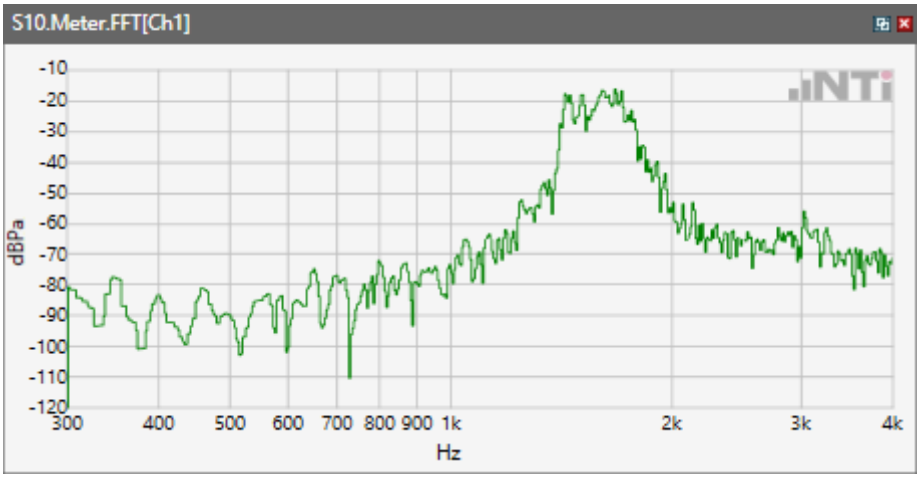

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ WLAN 5.5GHz

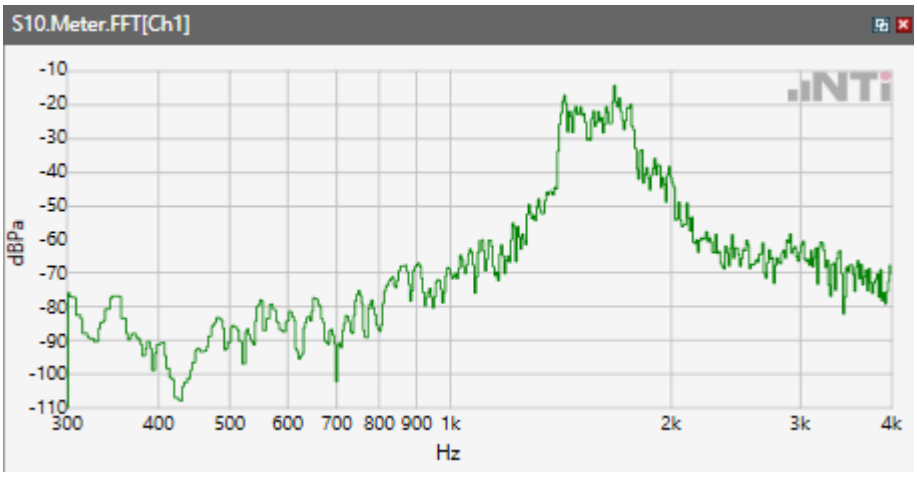

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ WLAN 5.8GHz

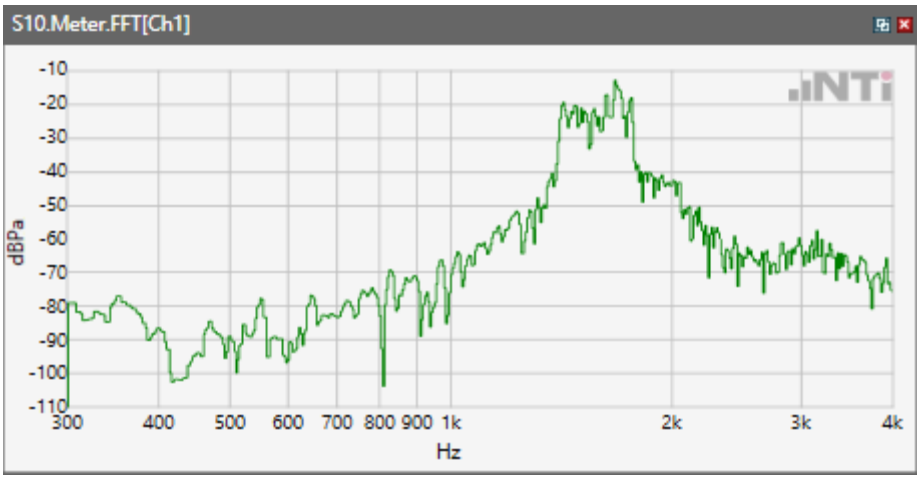

Receive path - distortion and noise 2000Hz WB&NB

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\GSM 850

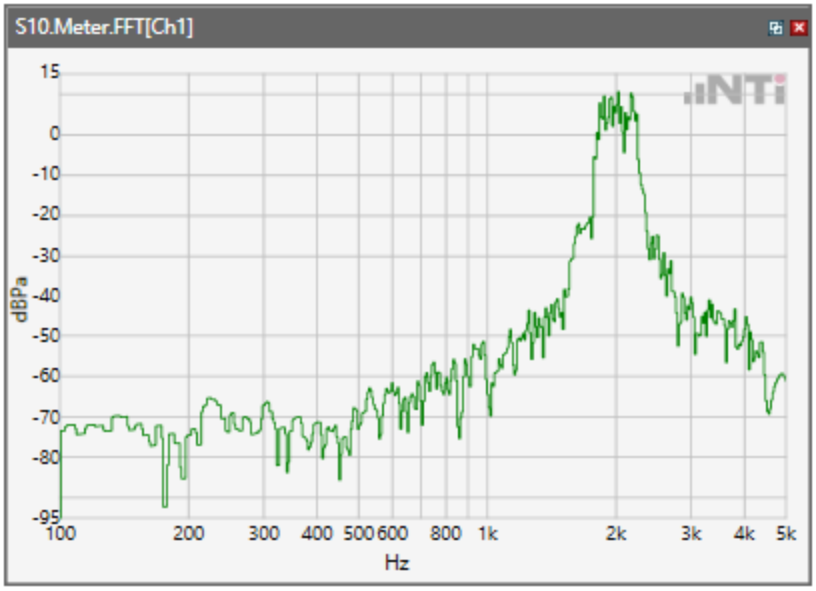

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ GSM 1900

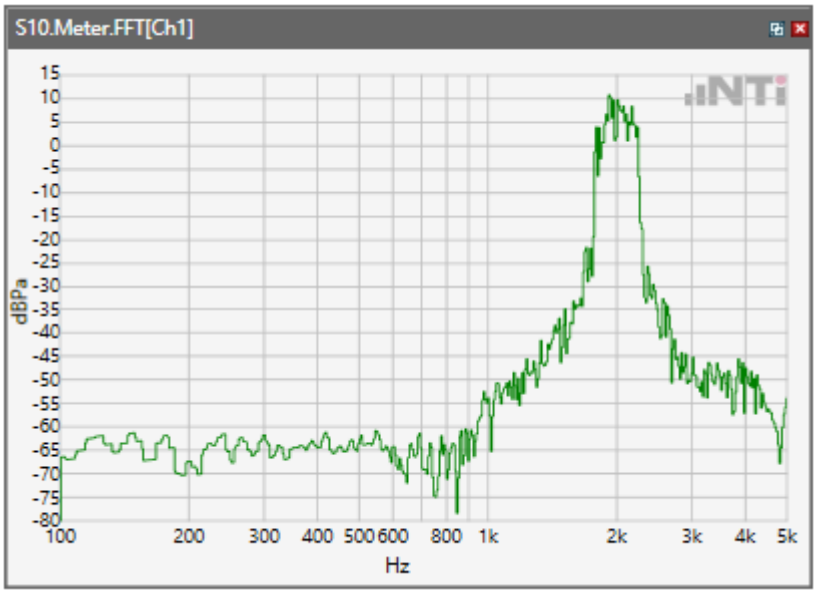

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\WCDMA Band II

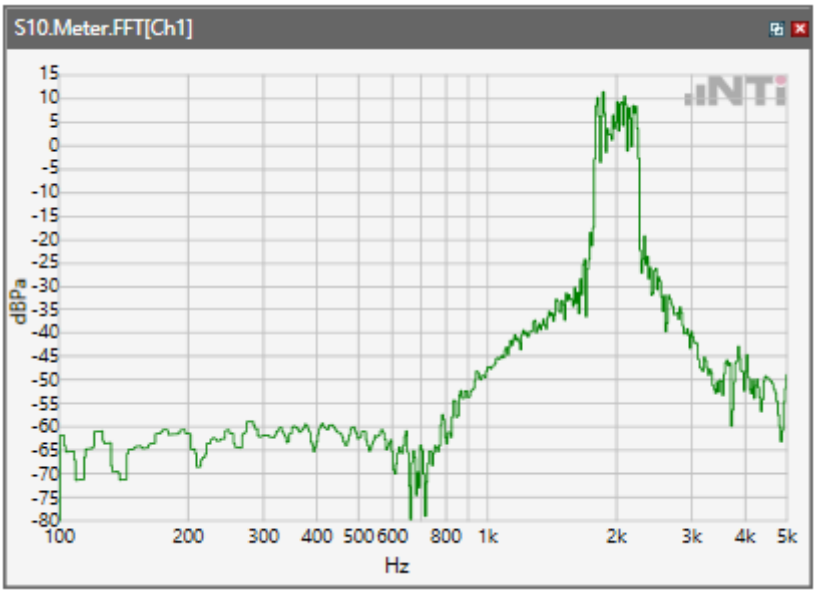

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ WCDMA Band IV

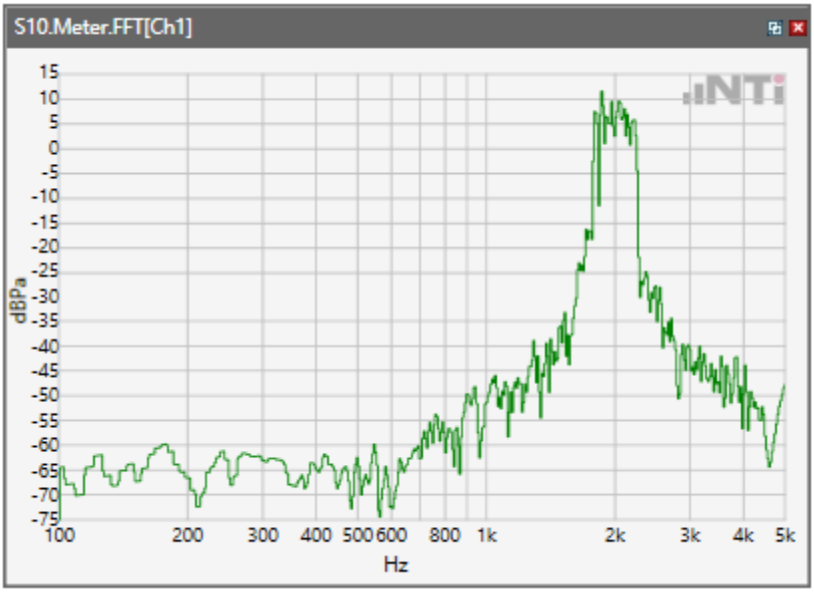

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ WCDMA Band V

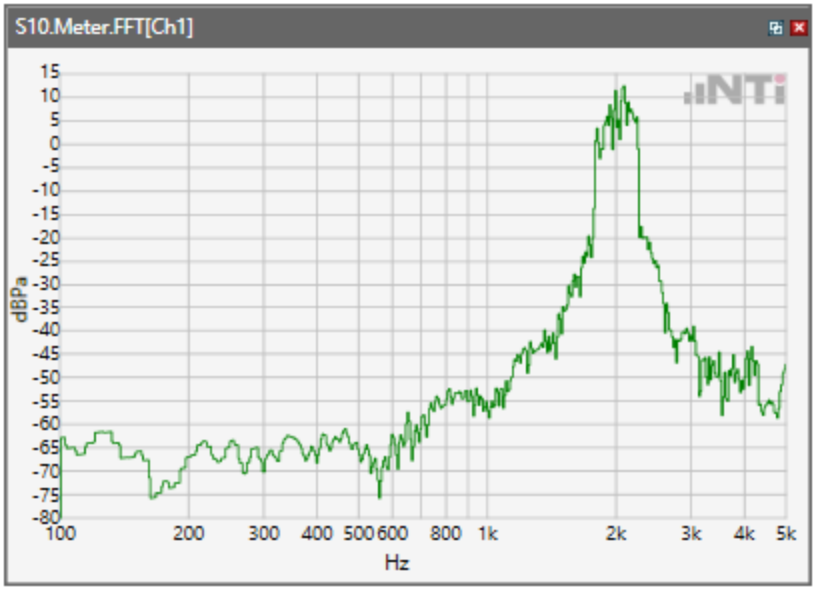

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\LTE Band 2

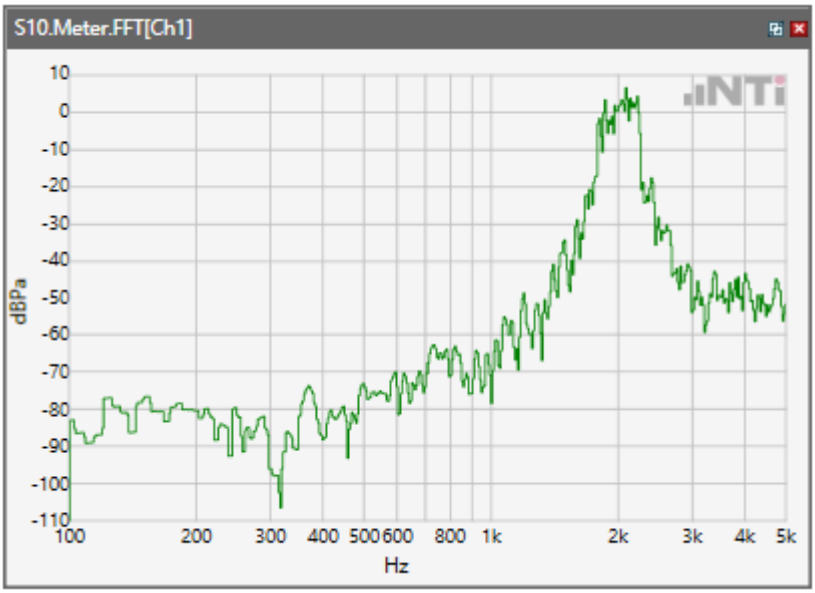

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ LTE Band 4

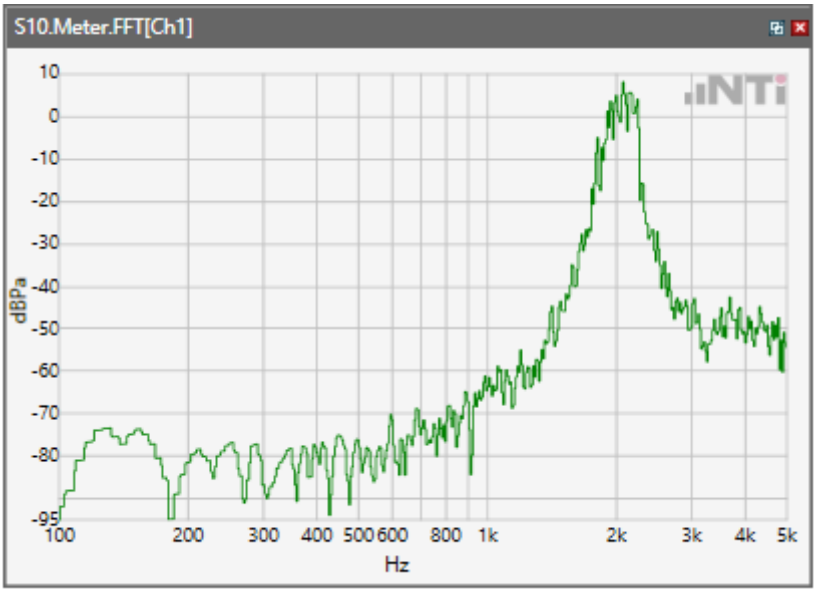

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ LTE Band 5

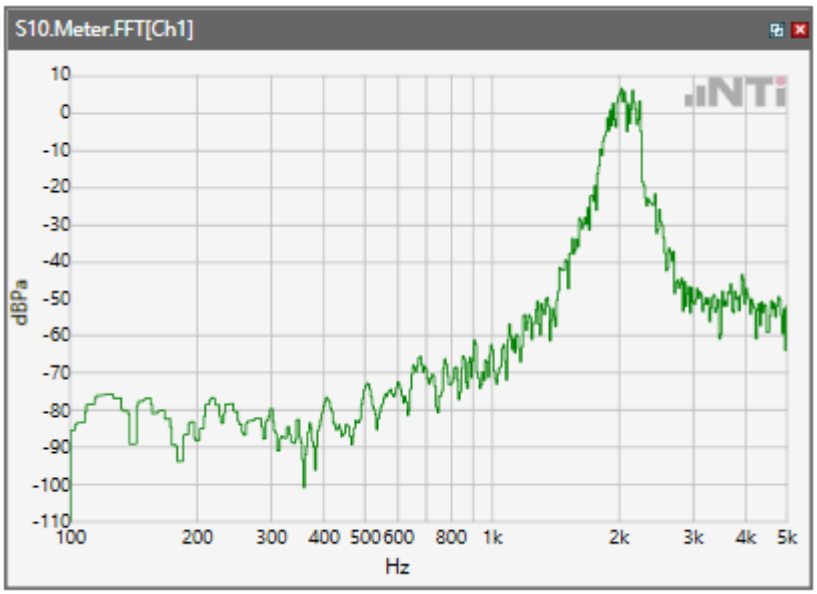

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ LTE Band 12

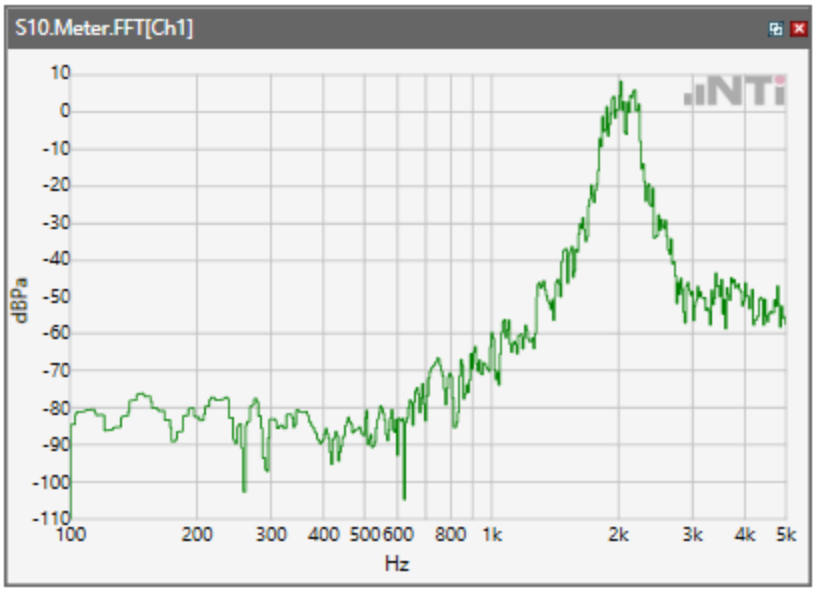

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ LTE Band 17

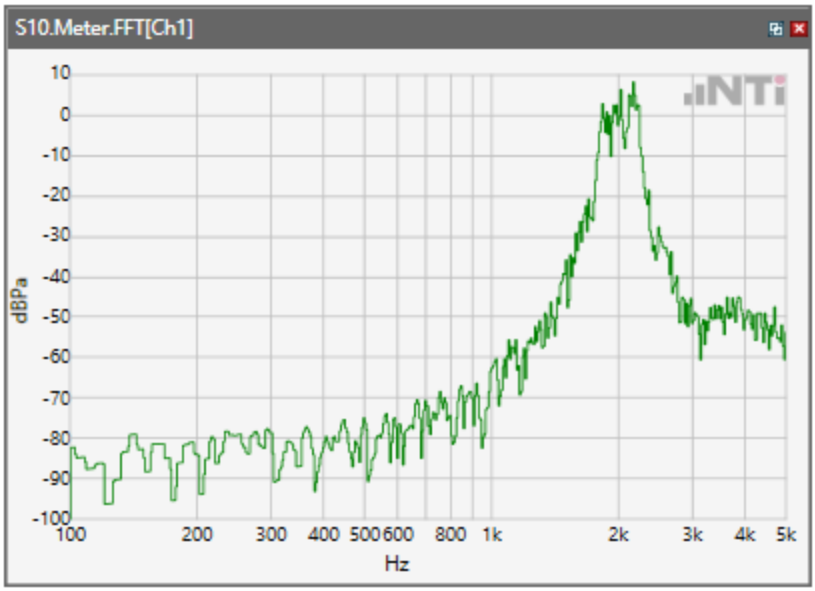

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ LTE Band 66

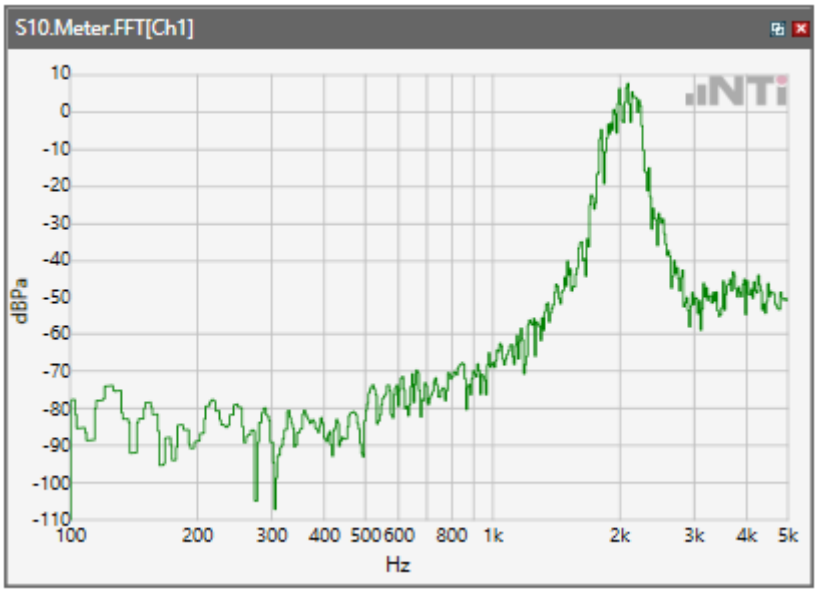

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ WLAN 2.4GHz

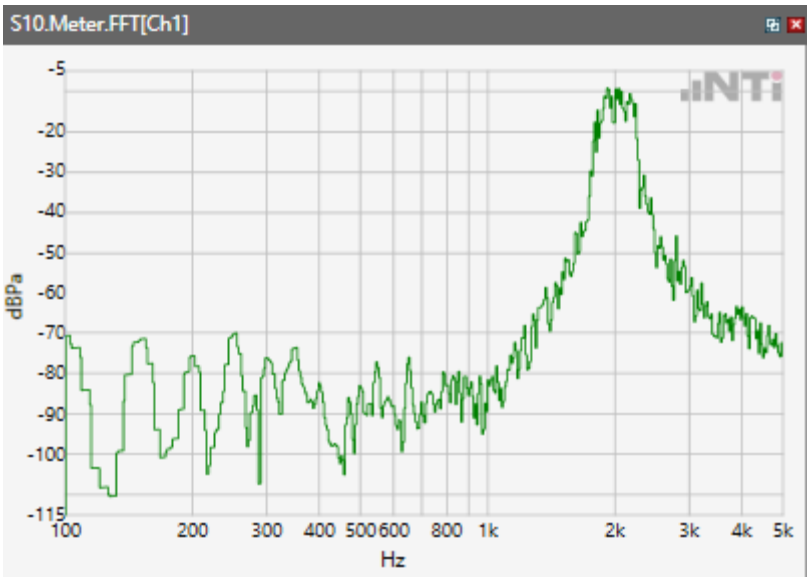

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\WLAN 5.2GHz

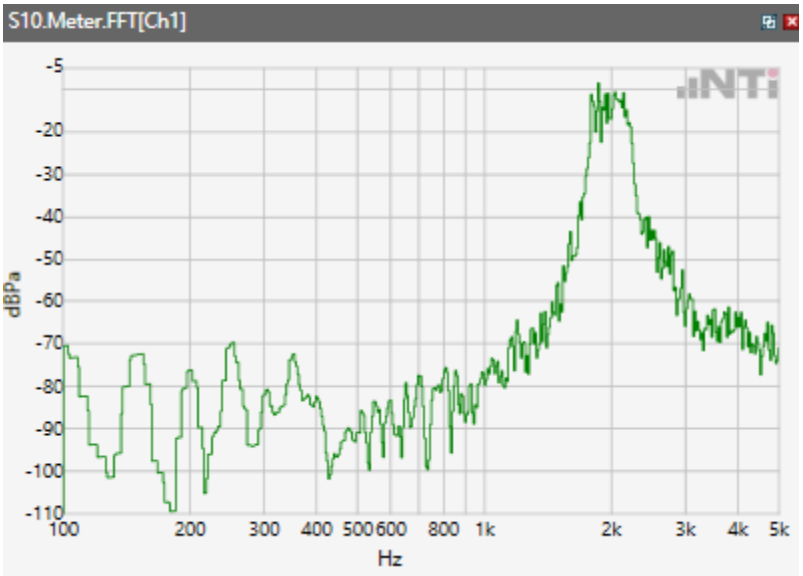

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\WLAN 5.3GHz

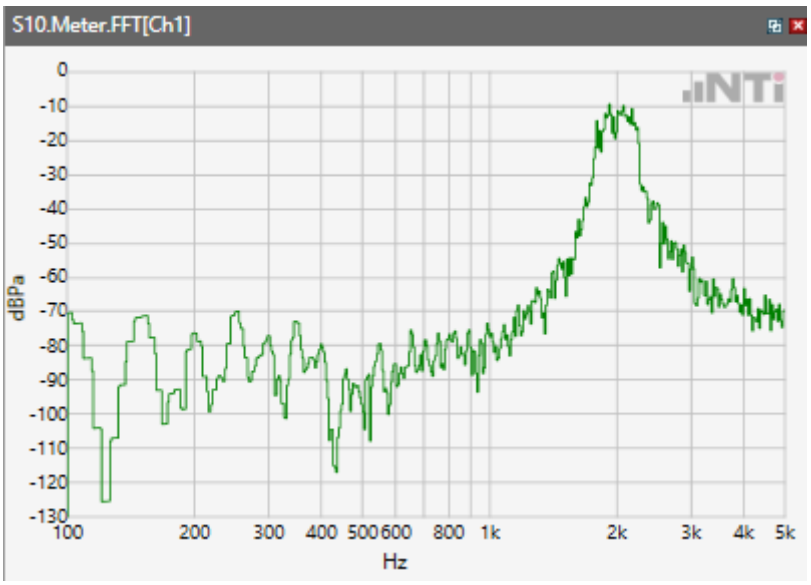

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ WLAN 5.5GHz

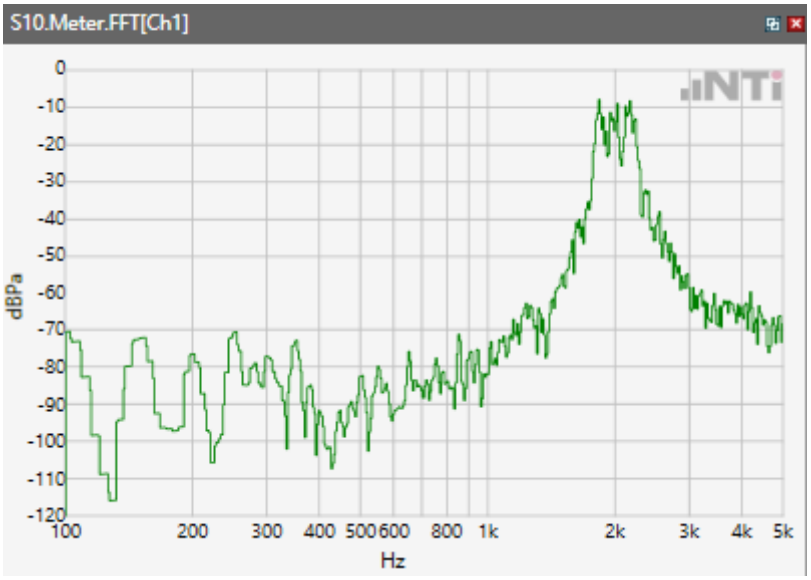

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ WLAN 5.8GHz

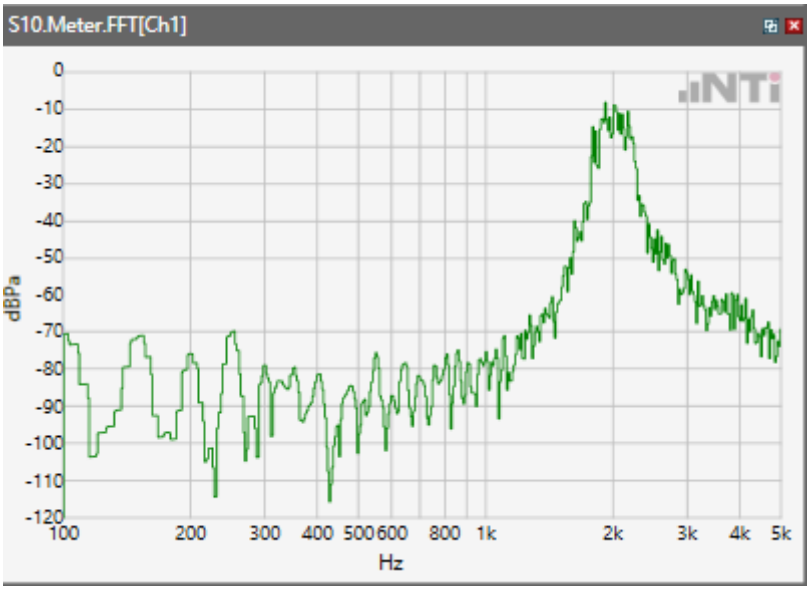

Receive path - distortion and noise 2500Hz WB&NB

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\GSM 850

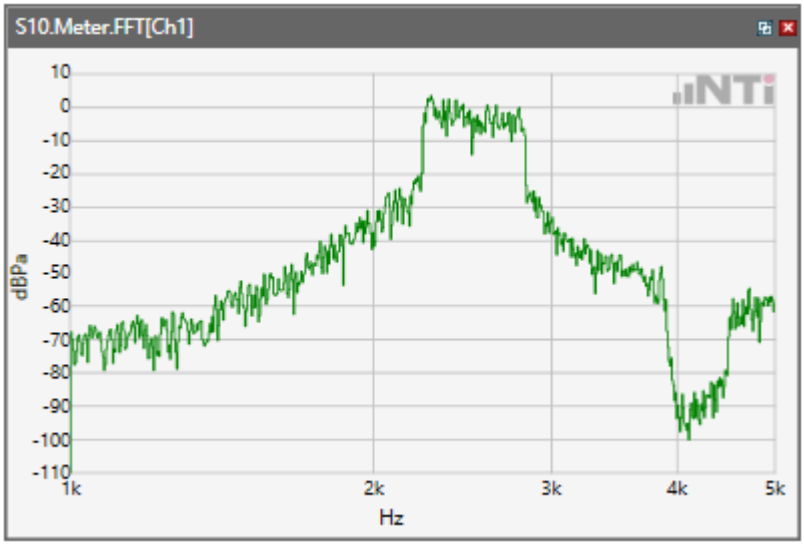

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ GSM 1900

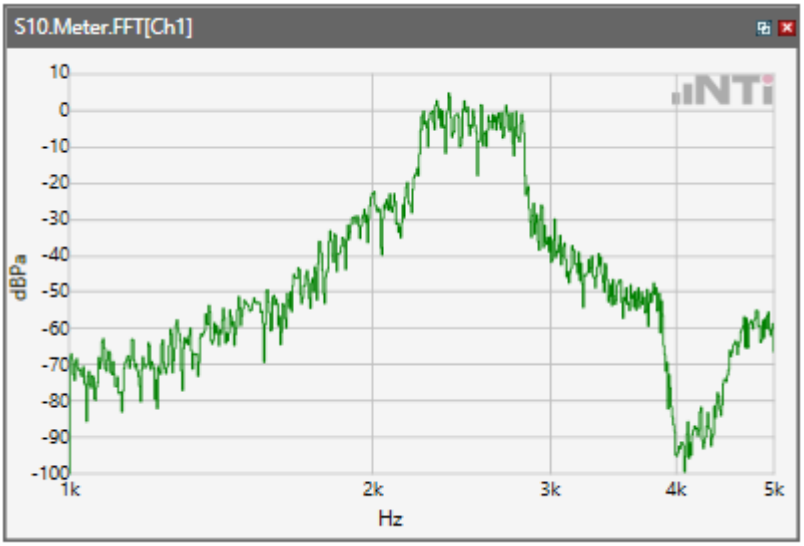

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\WCDMA Band II

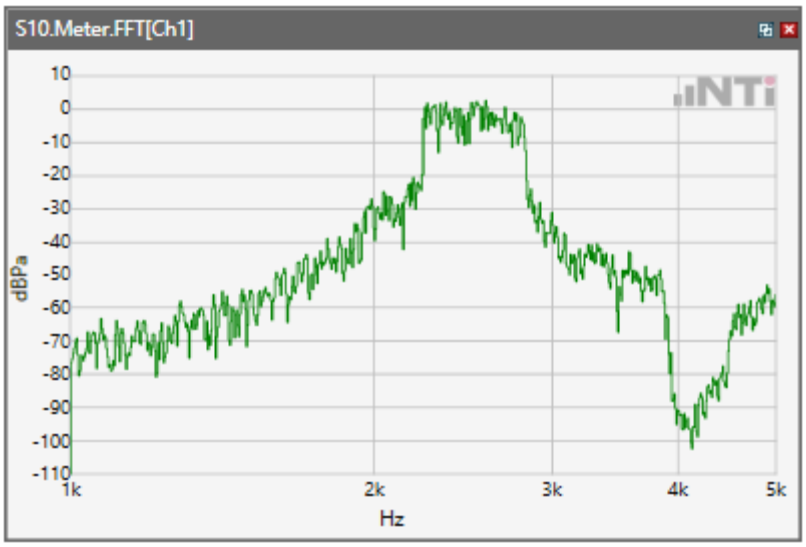

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ WCDMA Band IV

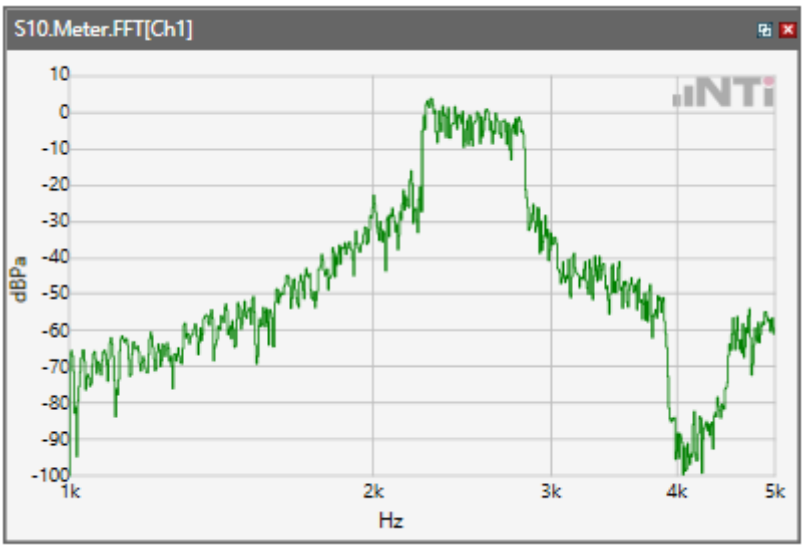

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ WCDMA Band V

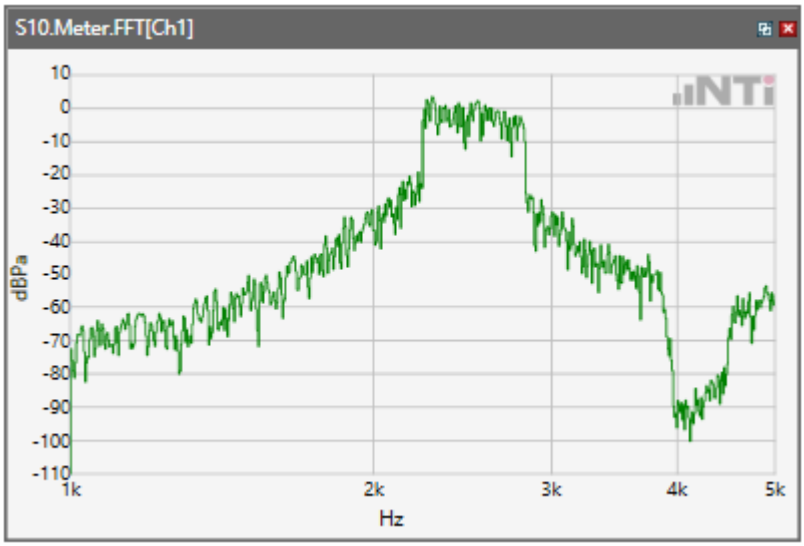

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\LTE Band 2

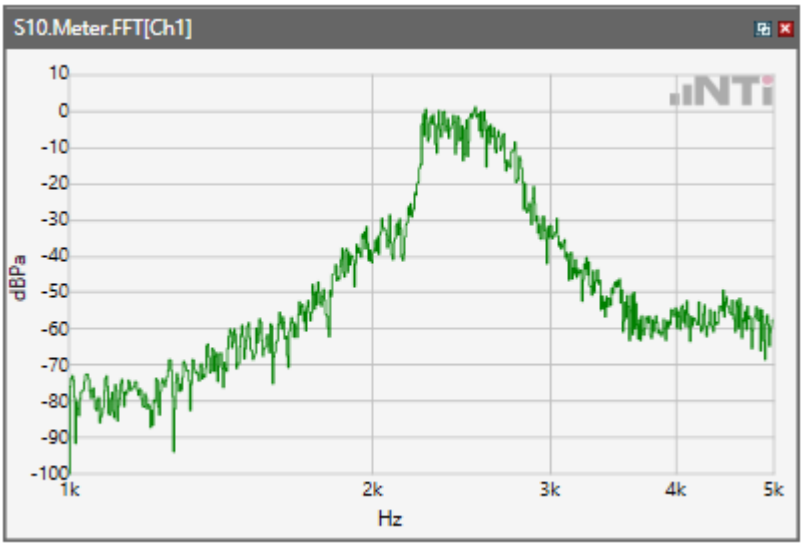

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ LTE Band 4

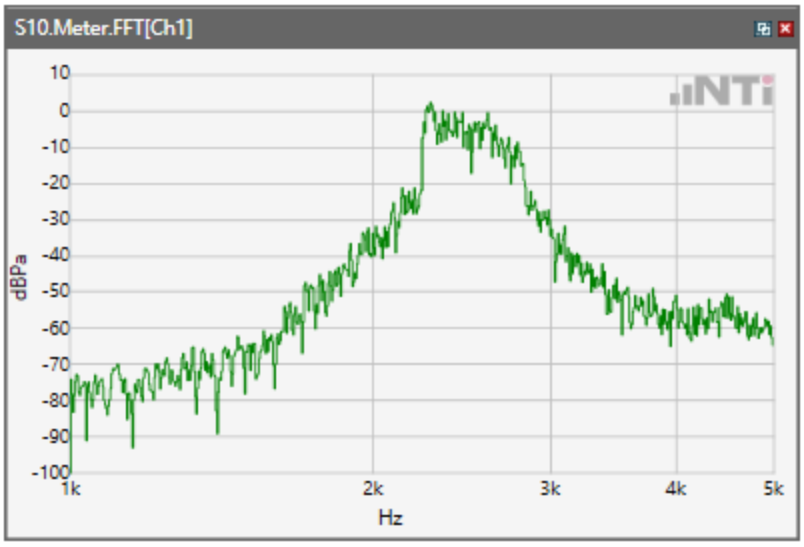

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ LTE Band 5

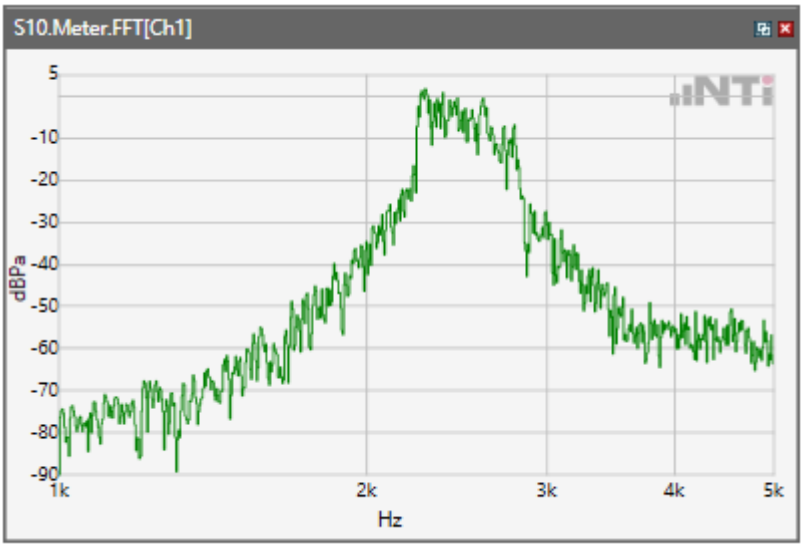

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ LTE Band 12

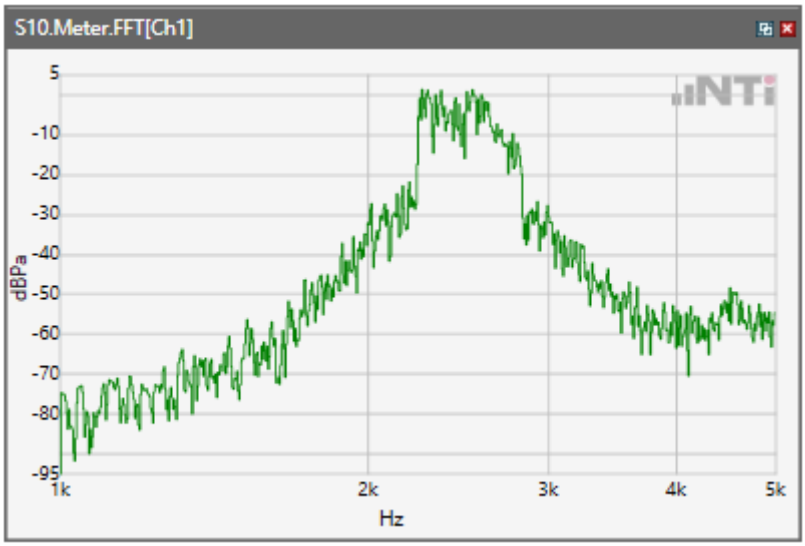

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ LTE Band 17

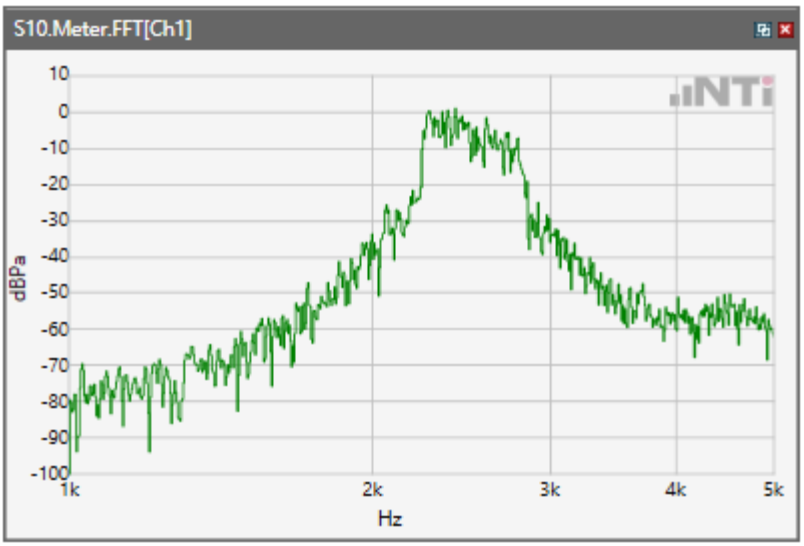

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ LTE Band 66

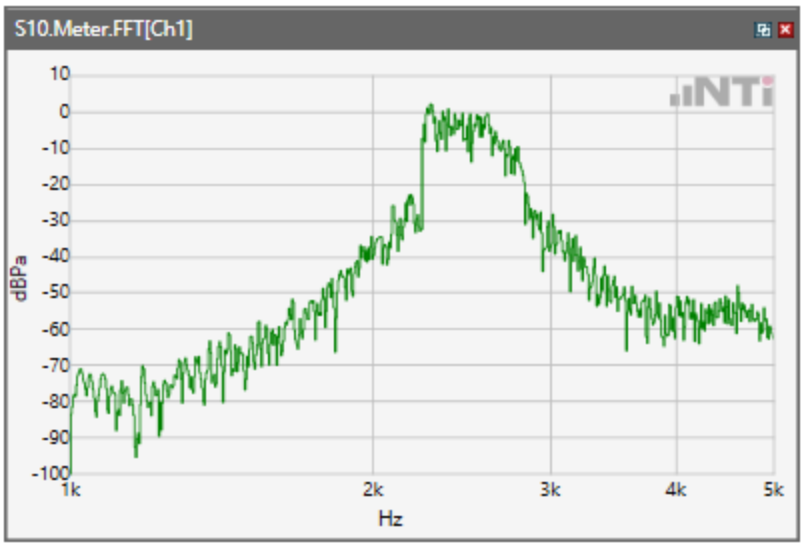

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ WLAN 2.4GHz

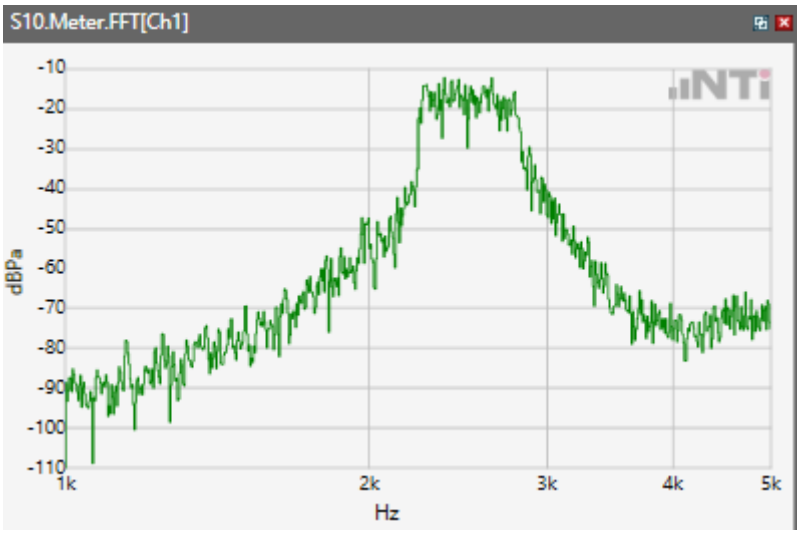

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\WLAN 5.2GHz

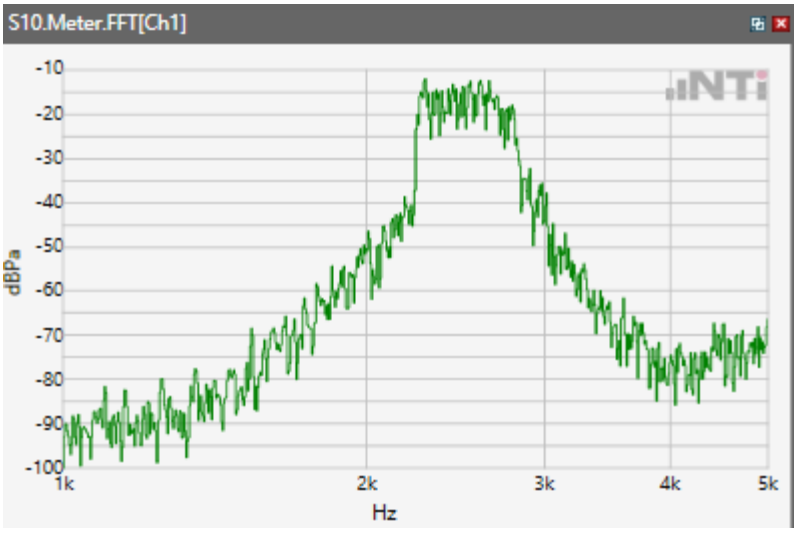

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\WLAN 5.3GHz

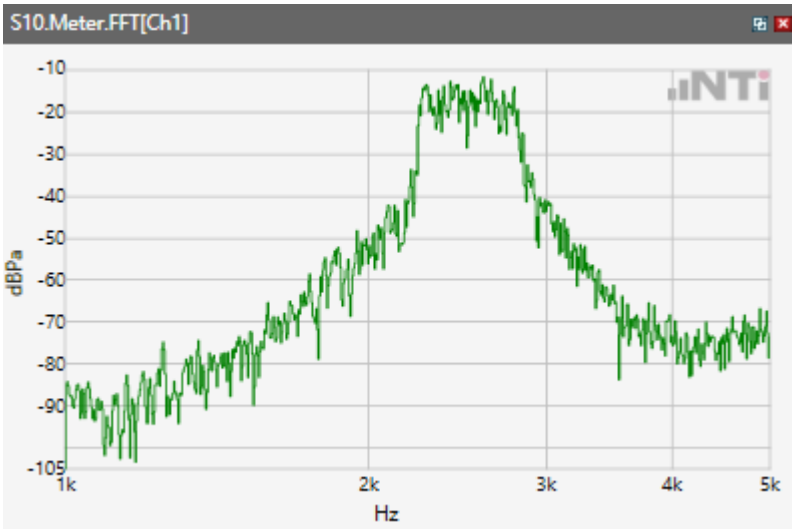

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ WLAN 5.5GHz

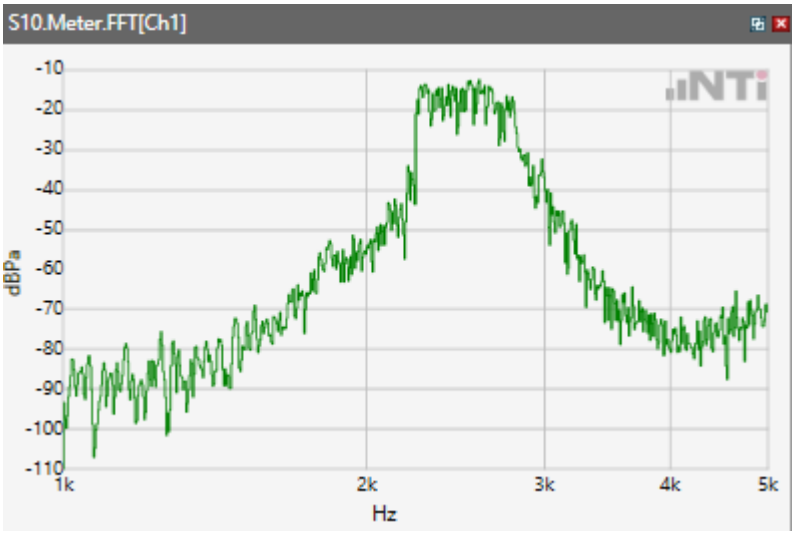

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ WLAN 5.8GHz

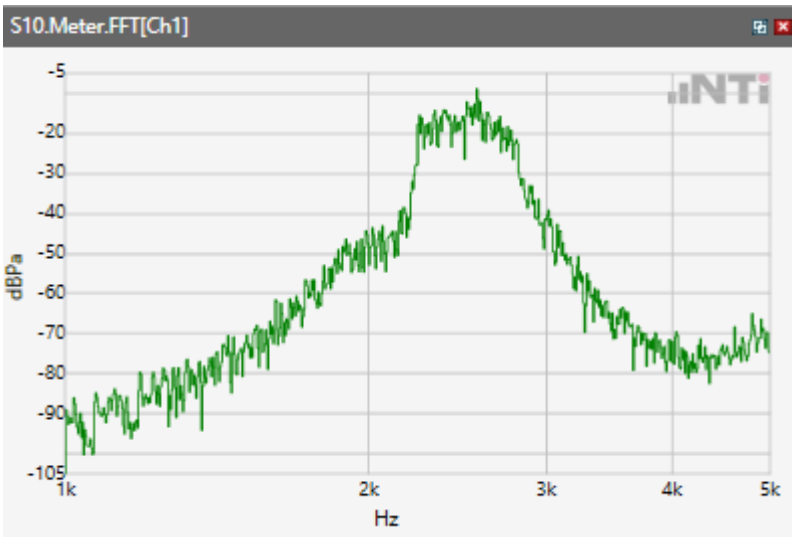

Receive path - distortion and noise 3150Hz WB&NB

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\GSM 850

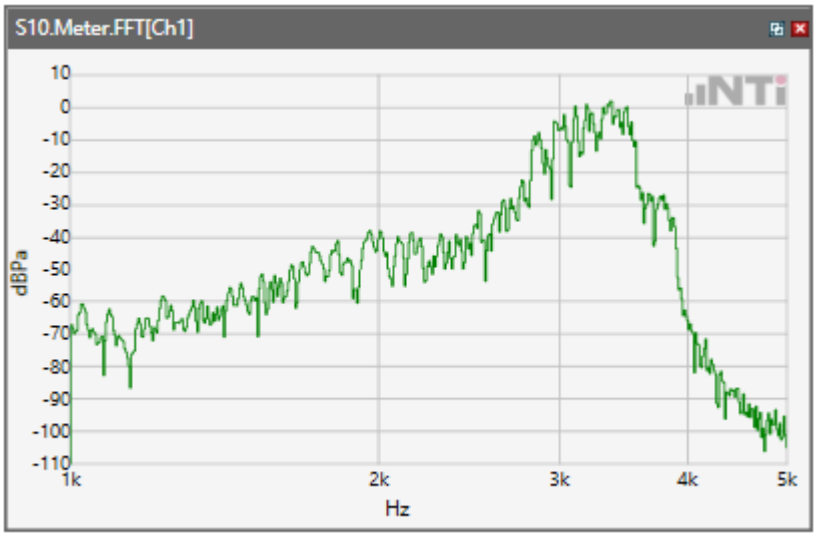

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ GSM 1900

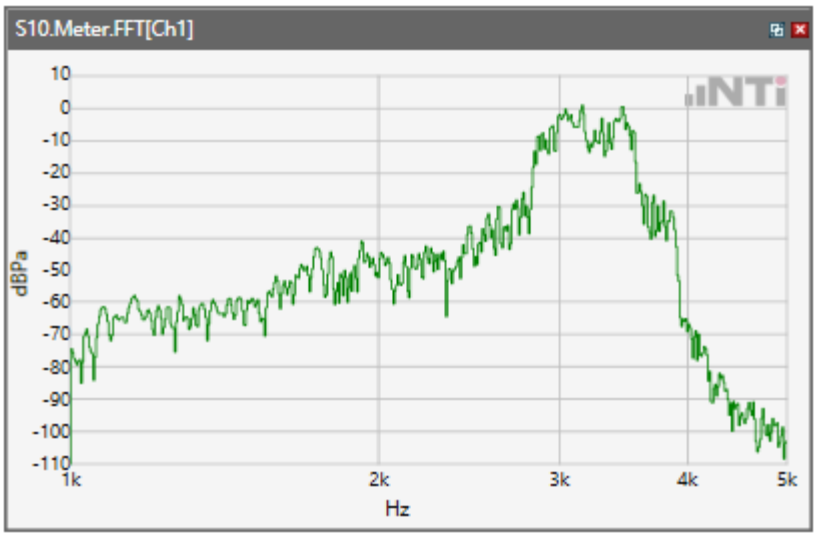

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\WCDMA Band II

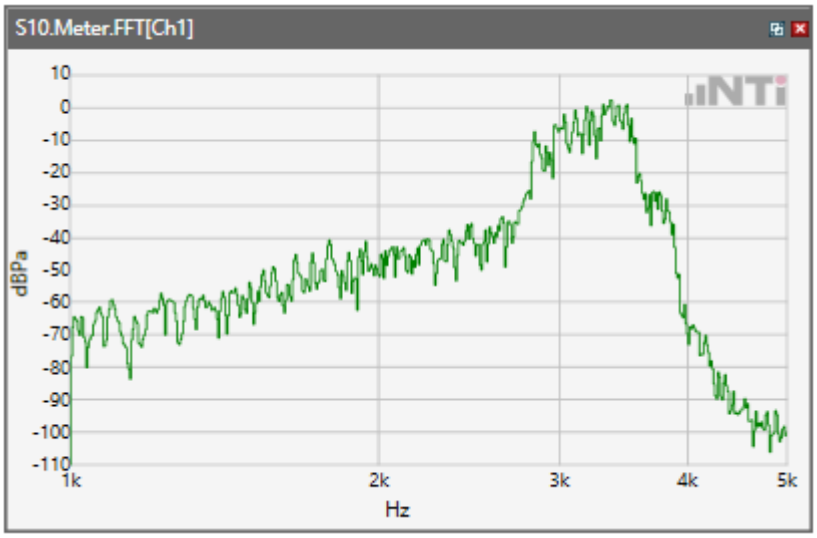

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ WCDMA Band IV

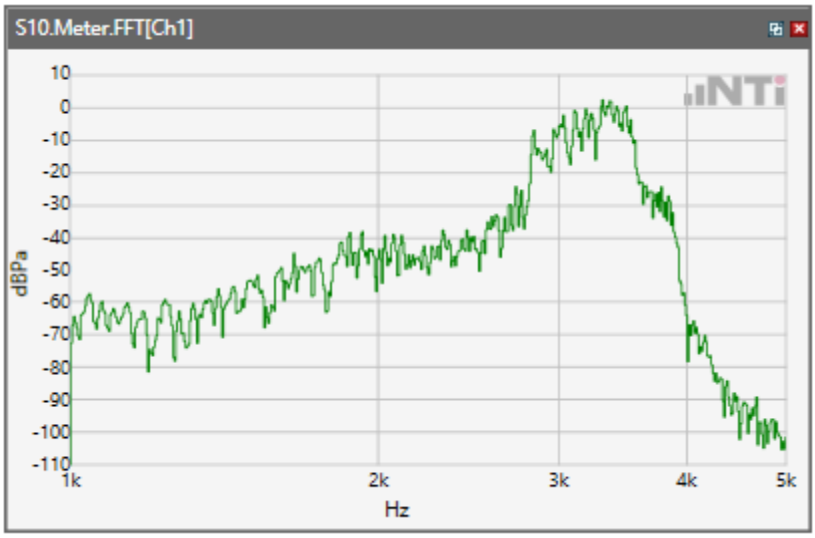

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ WCDMA Band V

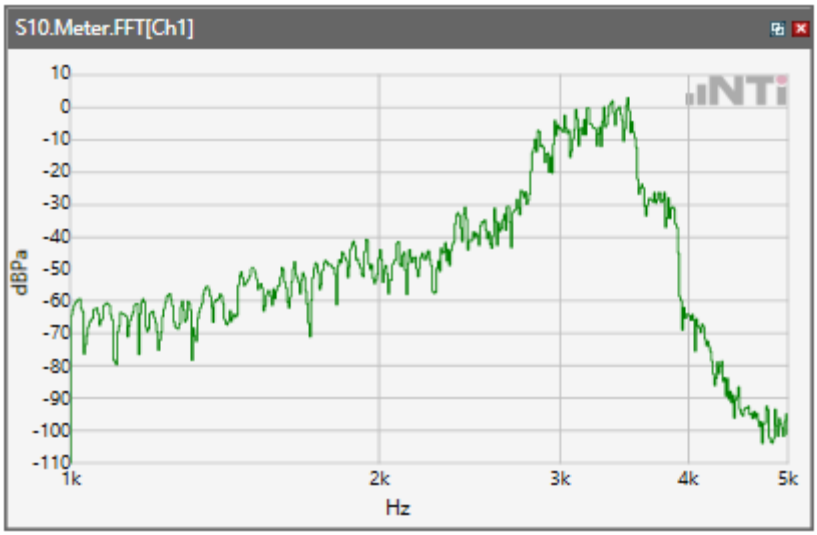

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\LTE Band 2

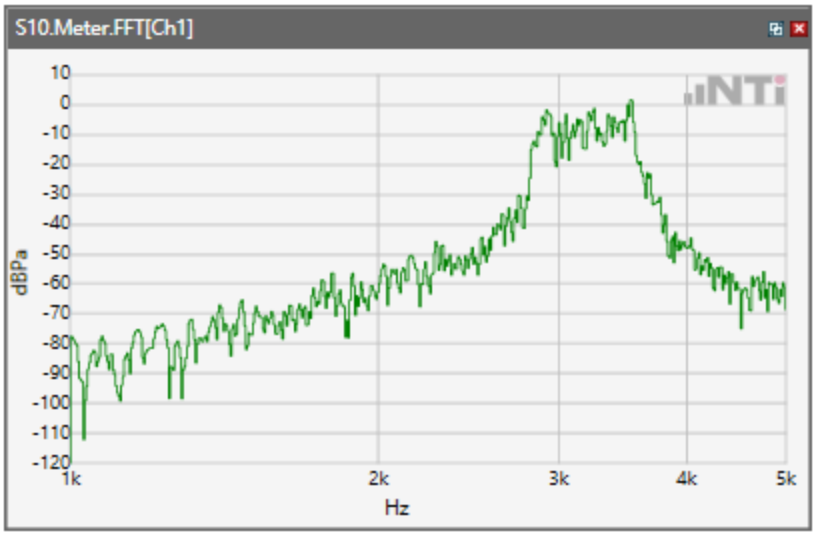

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ LTE Band 4

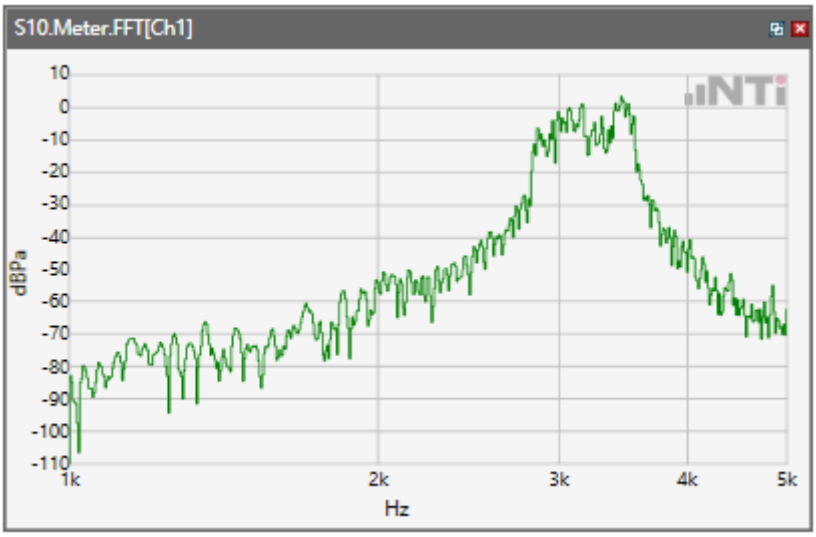

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ LTE Band 5

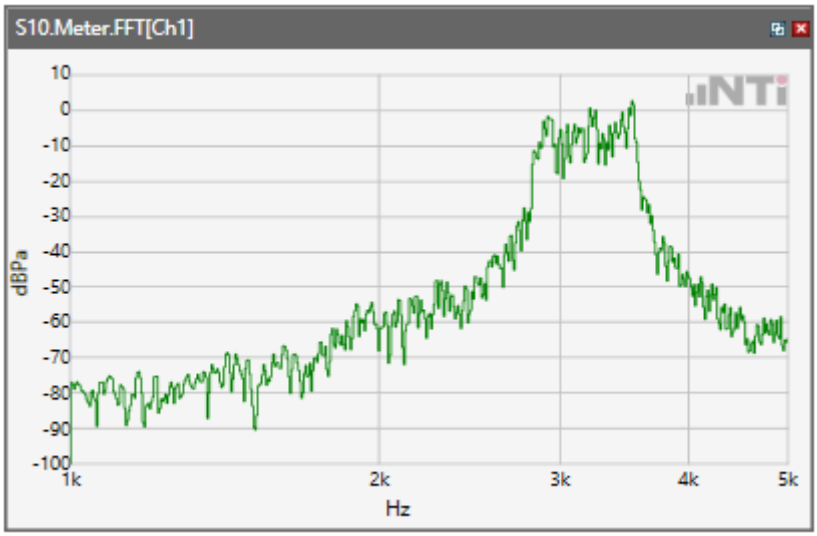

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ LTE Band 12

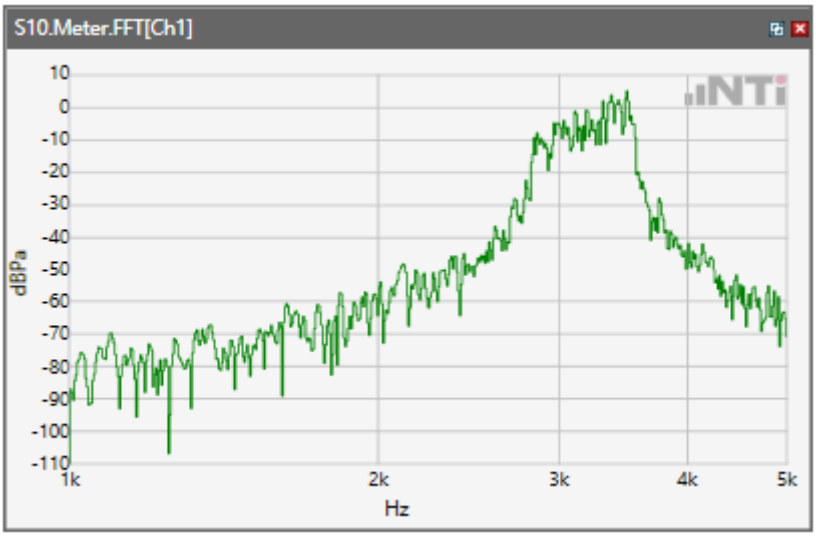

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ LTE Band 17

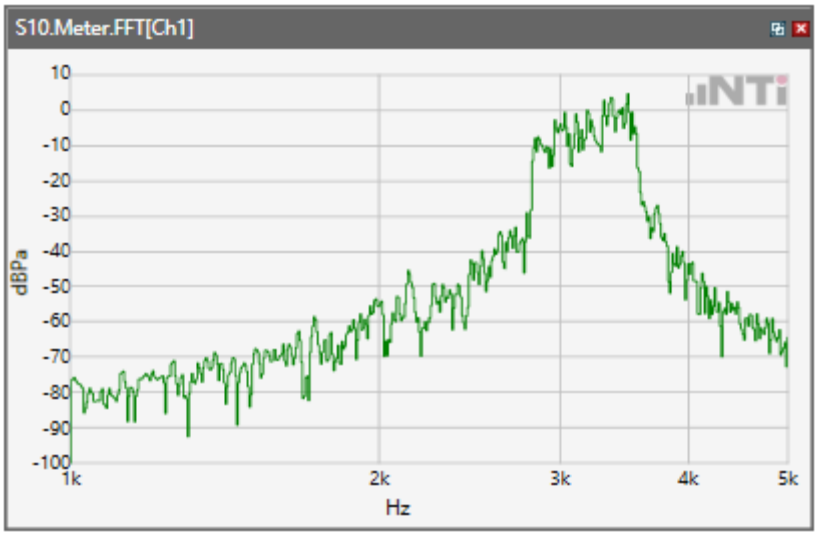

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ LTE Band 66

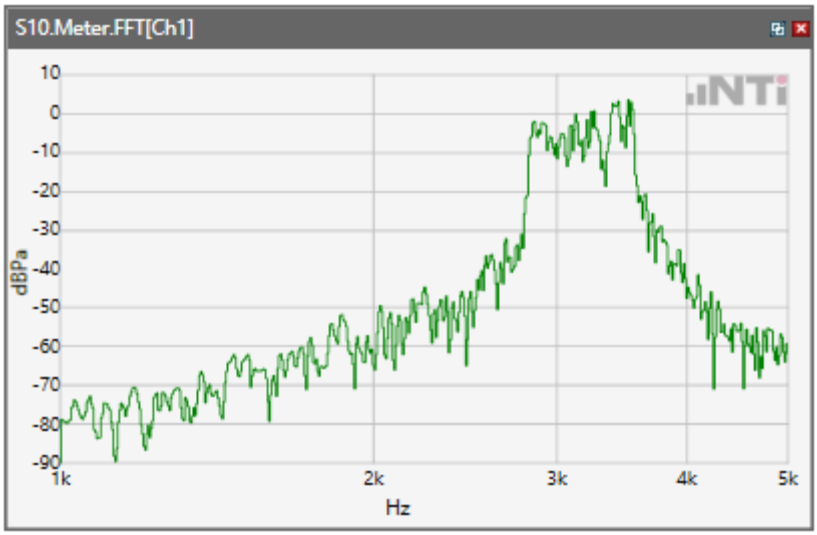

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ WLAN 2.4GHz

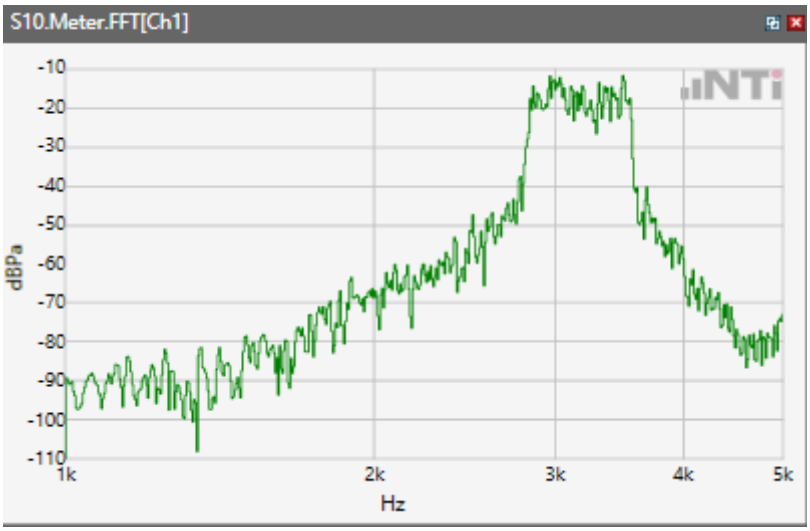

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\WLAN 5.2GHz

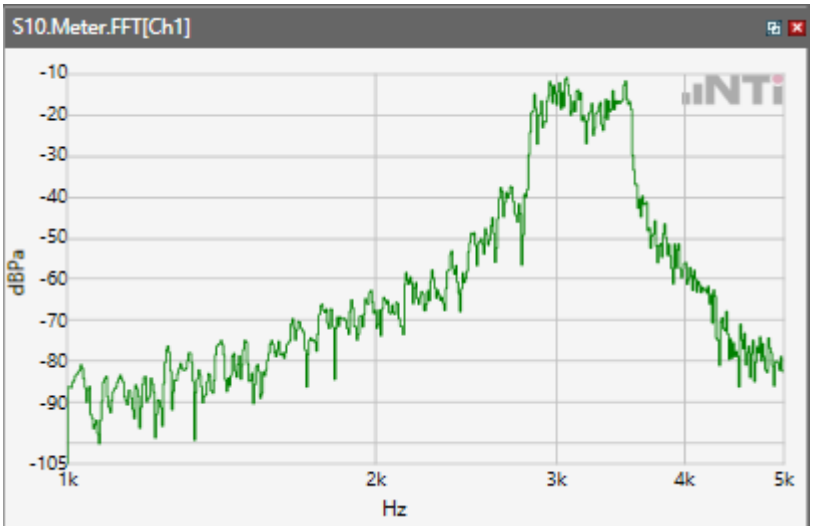

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\WLAN 5.3GHz

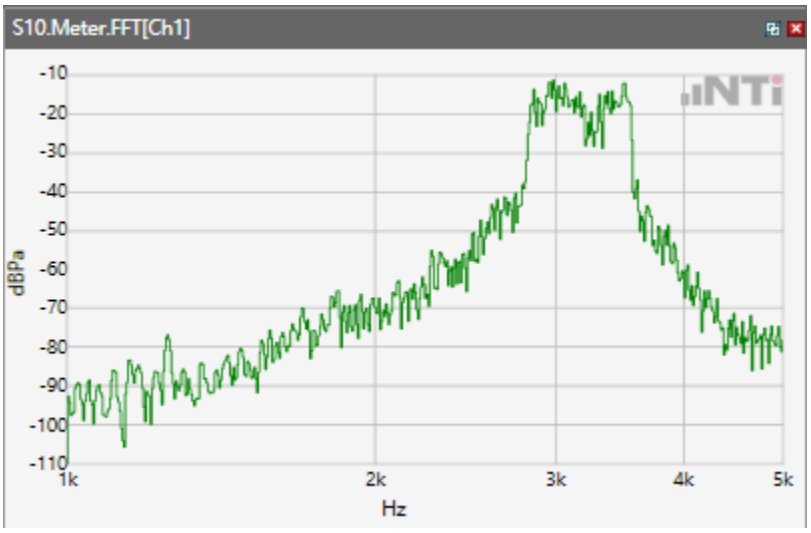

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ WLAN 5.5GHz

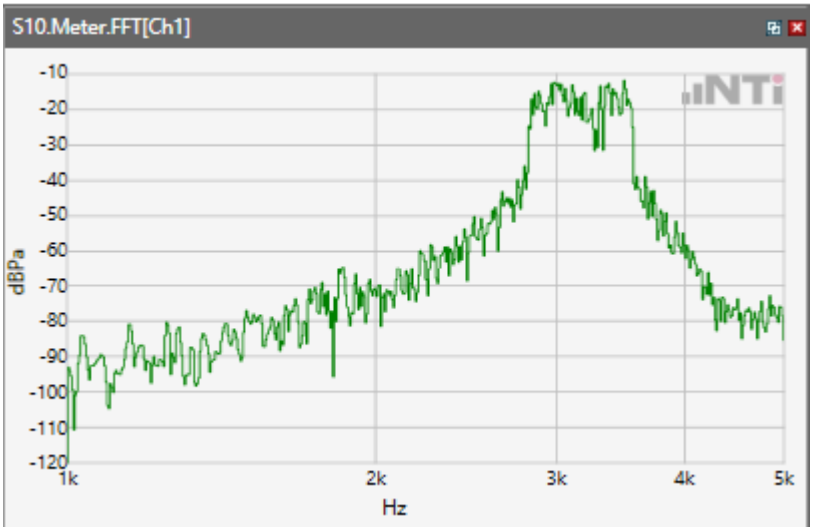

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ WLAN 5.8GHz

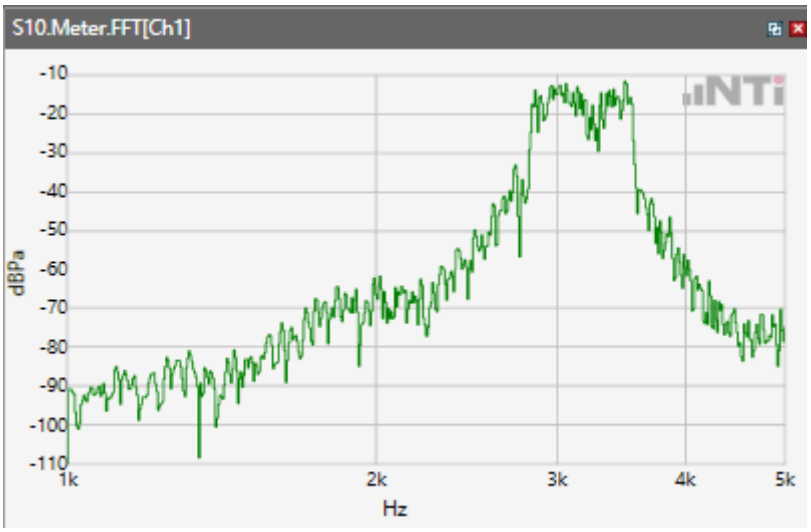

Receive path - distortion and noise 4000Hz WB only

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\GSM 850

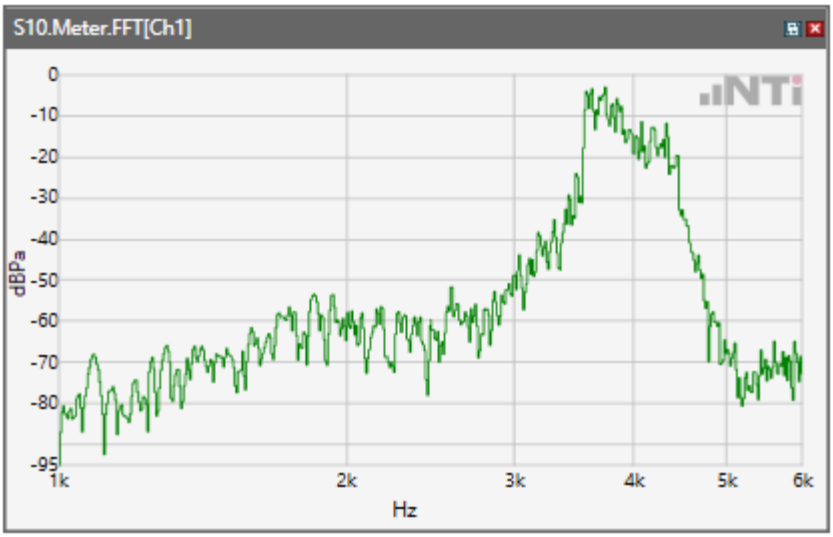

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ GSM 1900

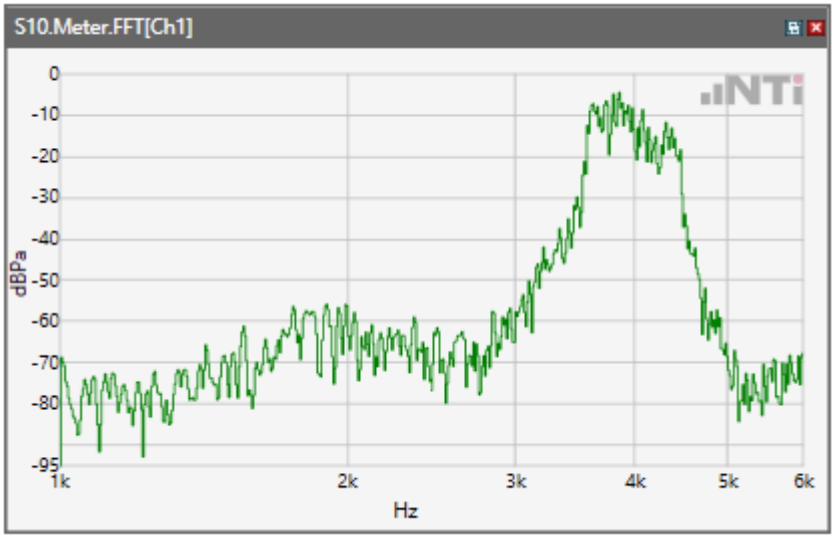

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\WCDMA Band II

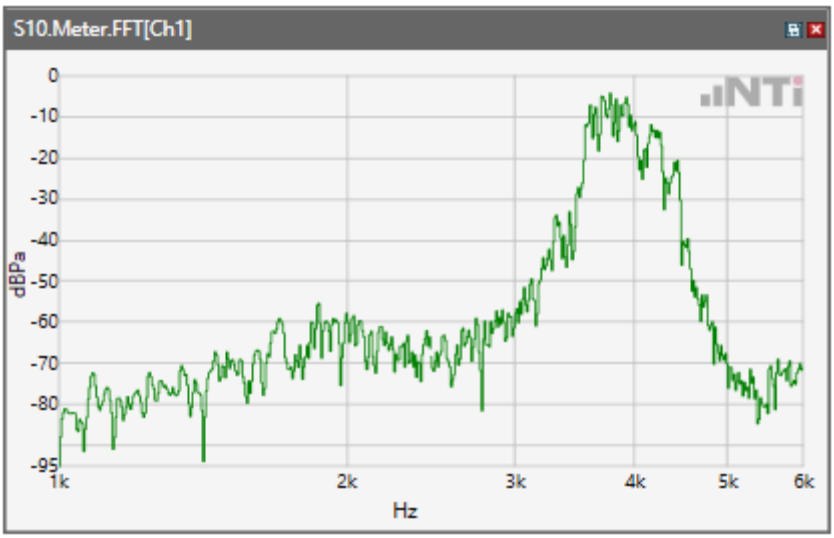

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ WCDMA Band IV

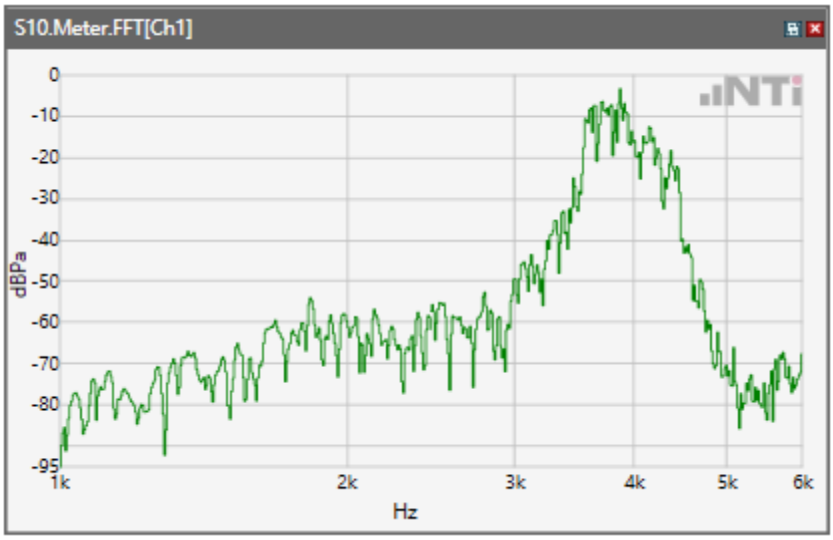

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ WCDMA Band V

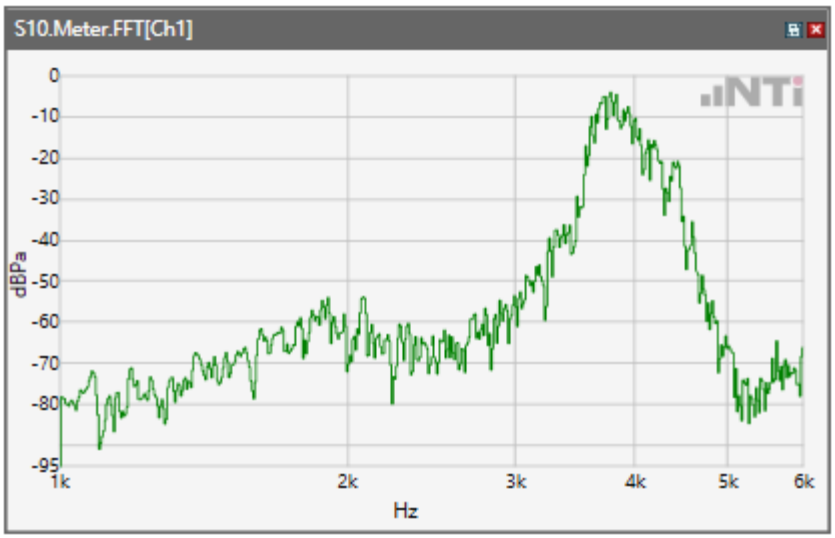

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\LTE Band 2

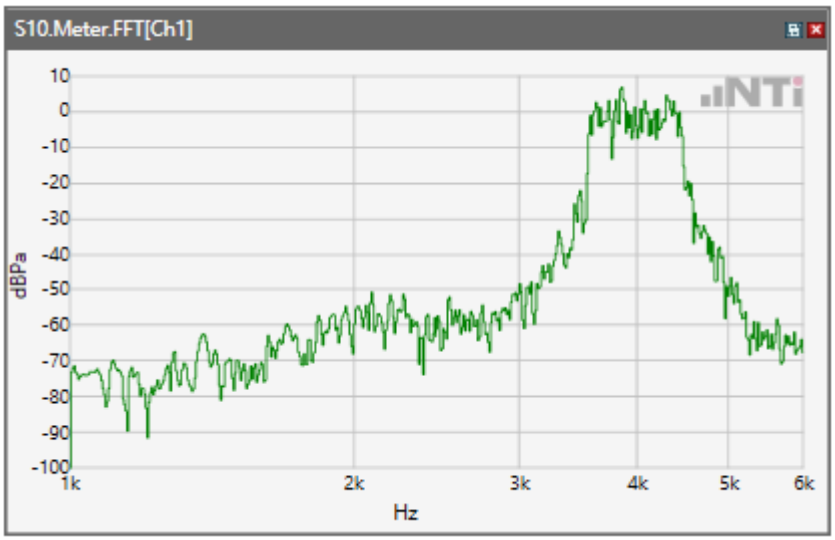

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ LTE Band 4

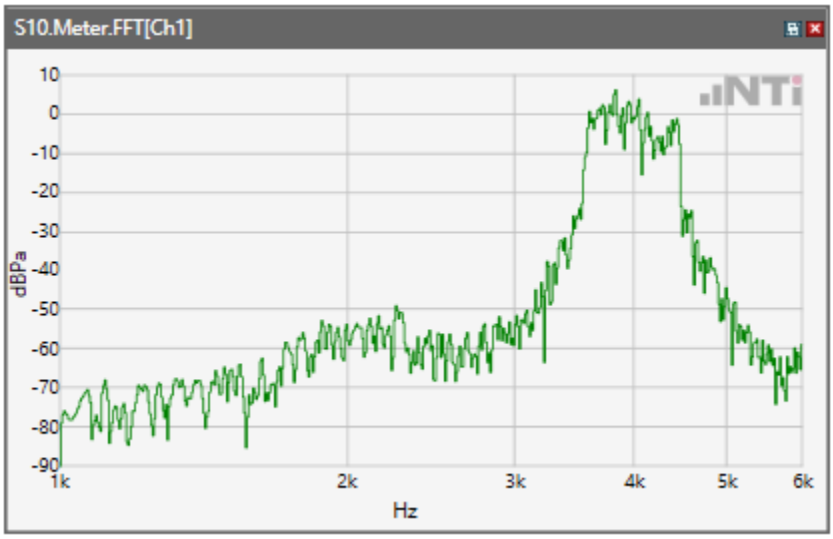

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ LTE Band 5

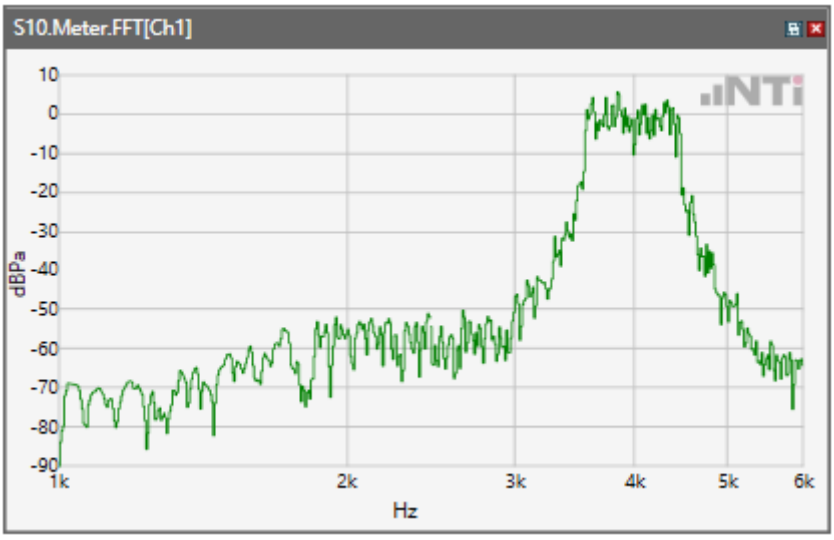

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ LTE Band 12

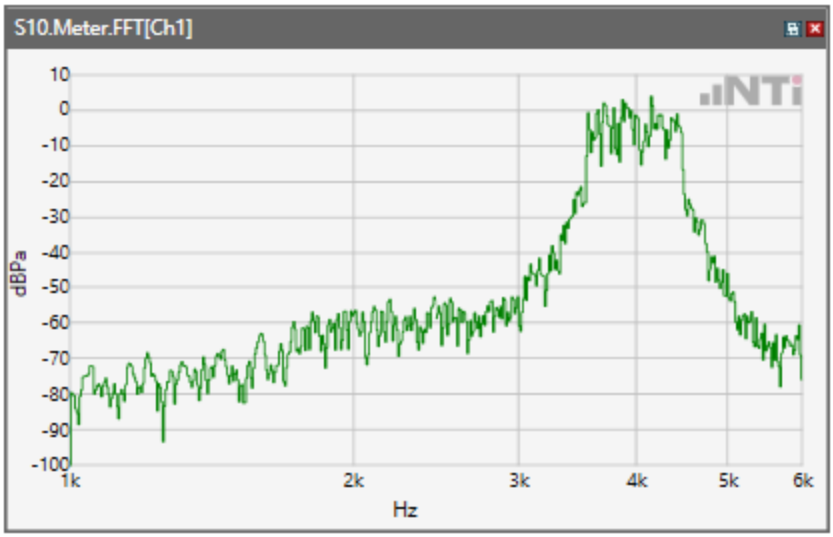

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ LTE Band 17

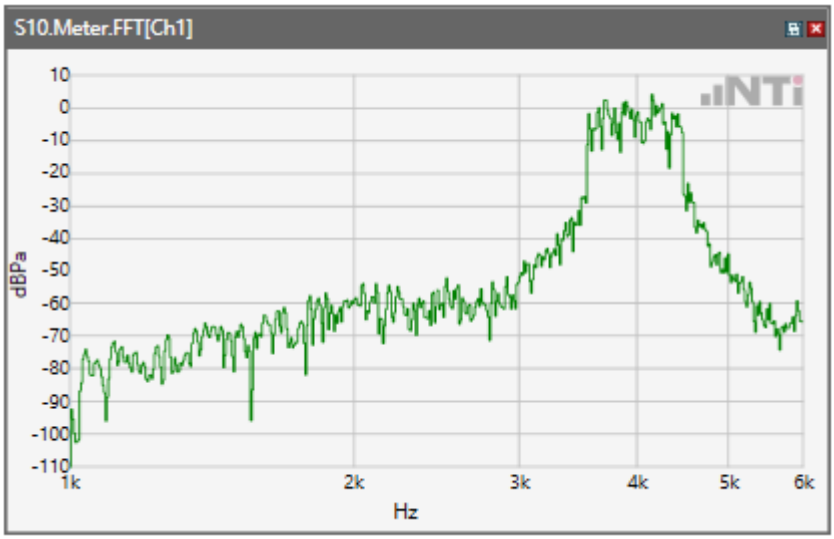

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ LTE Band 66

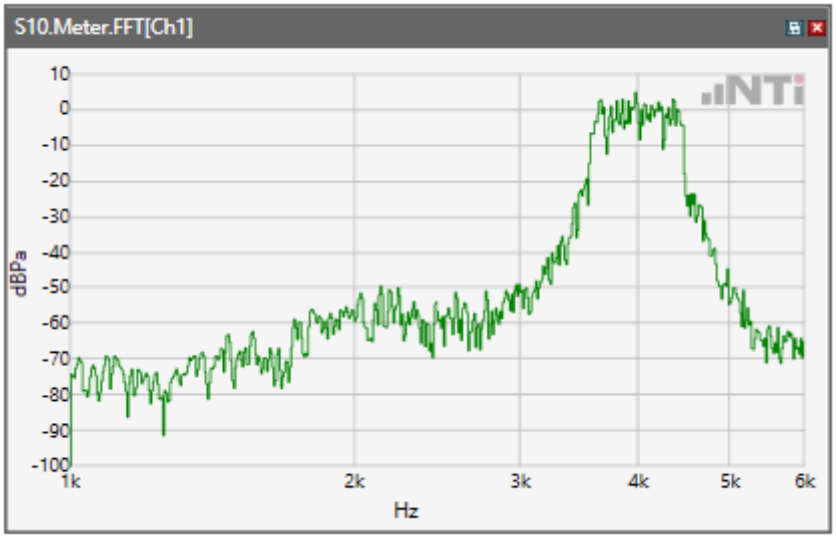

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ WLAN 2.4GHz

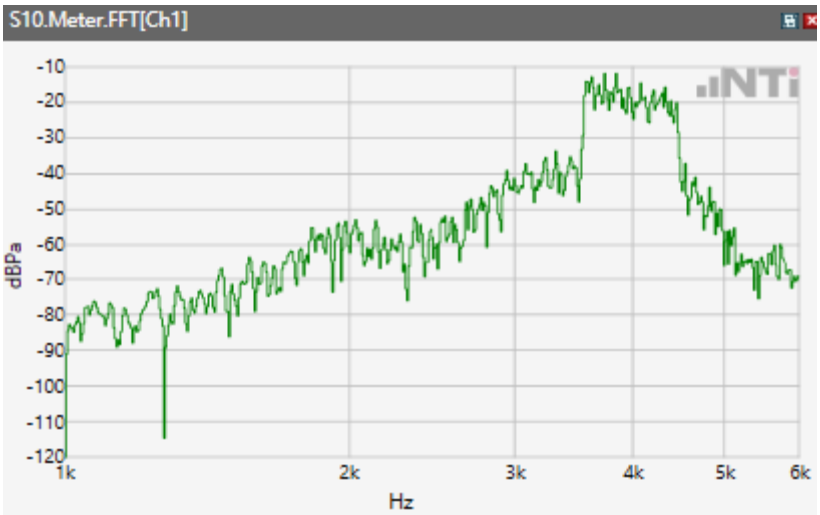

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\WLAN 5.2GHz

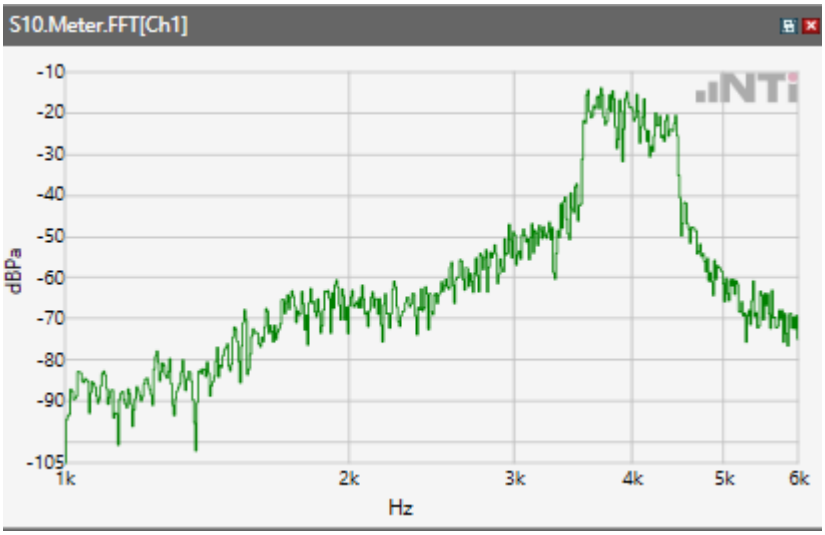

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\WLAN 5.3GHz

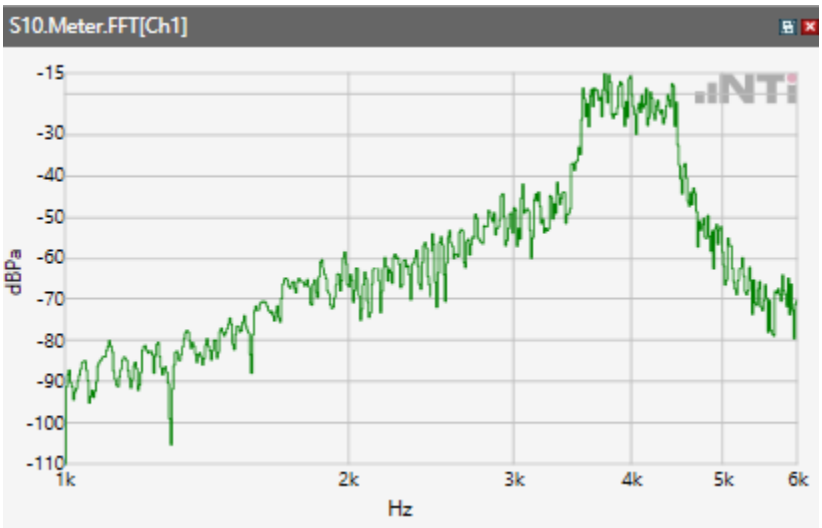

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ WLAN 5.5GHz

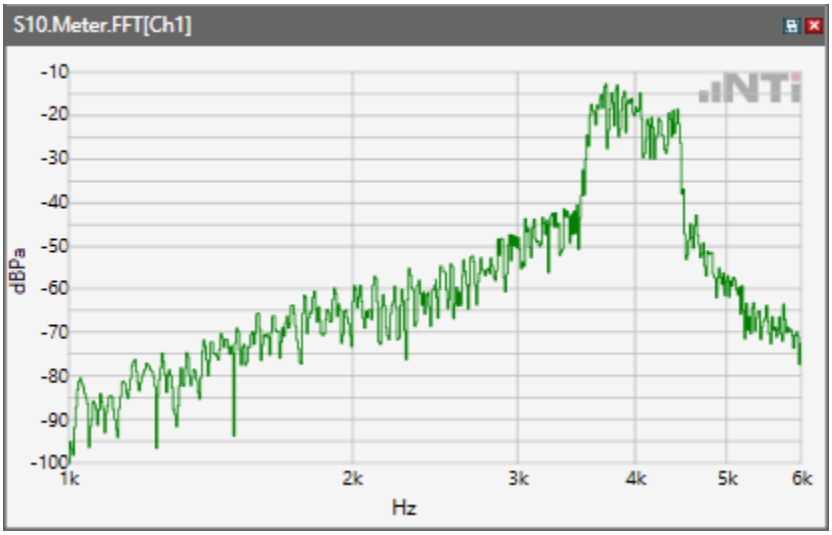

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ WLAN 5.8GHz

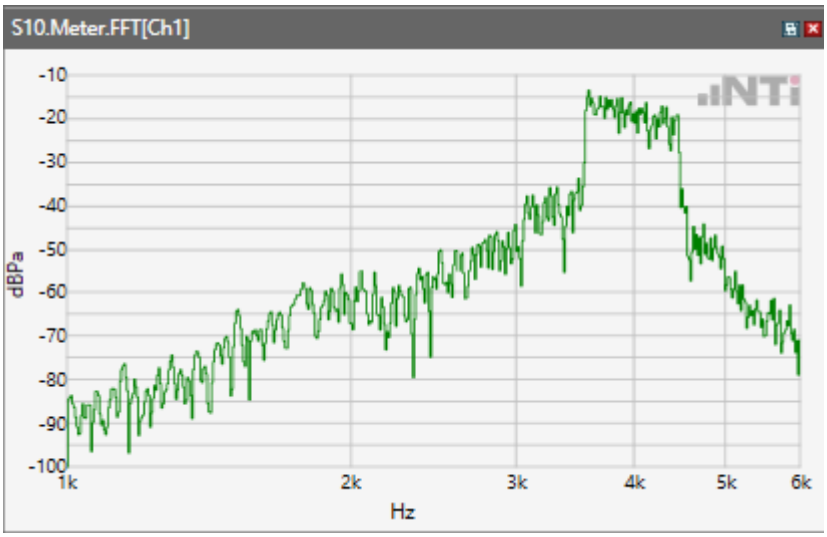

Receive path - distortion and noise 5000Hz WB only

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\GSM 850

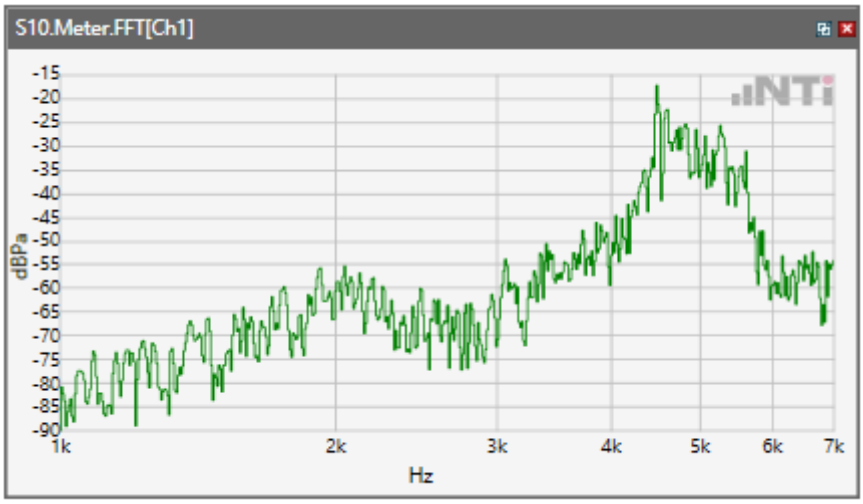

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ GSM 1900

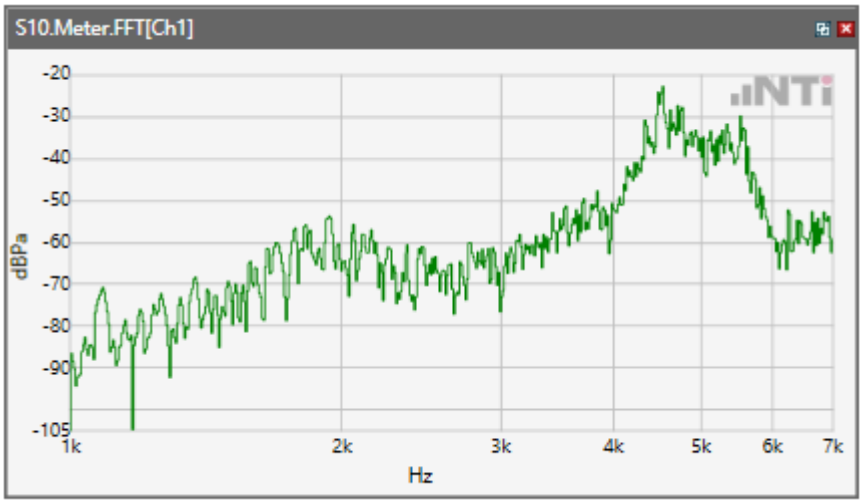

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\WCDMA Band II

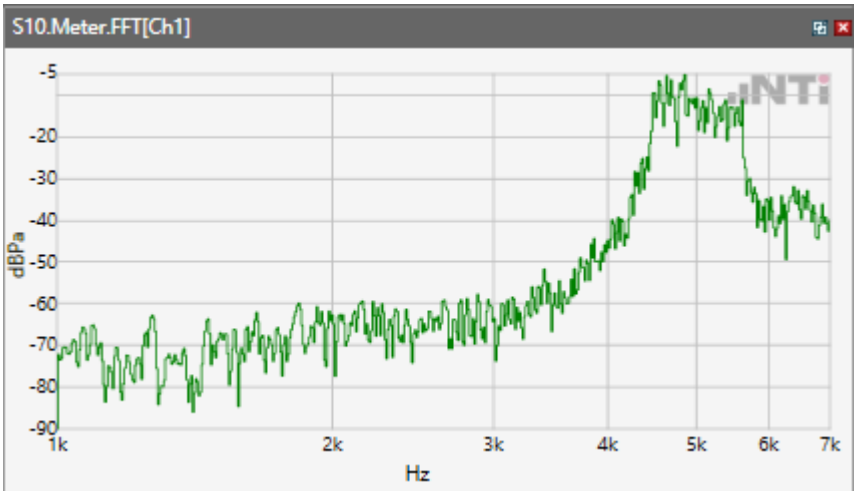

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ WCDMA Band IV

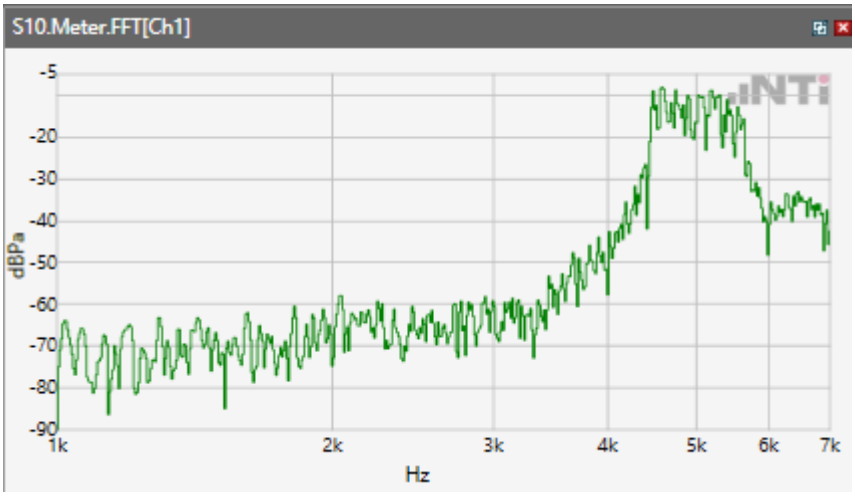

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ WCDMA Band V

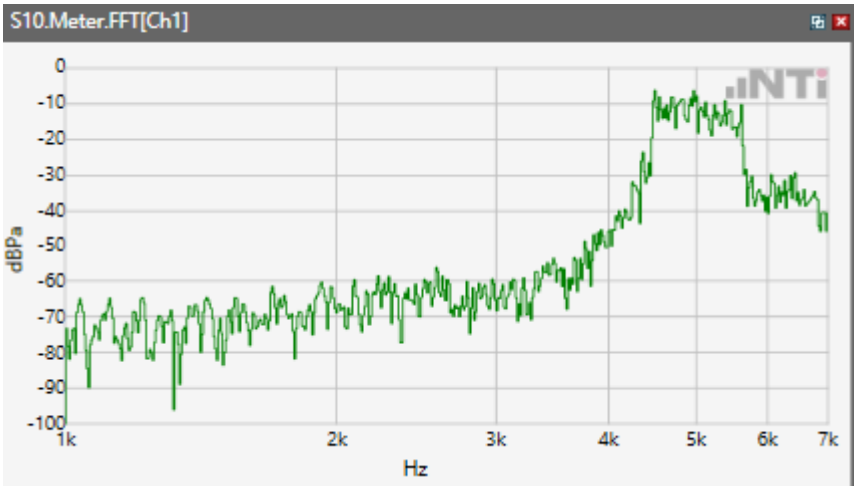

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\LTE Band 2

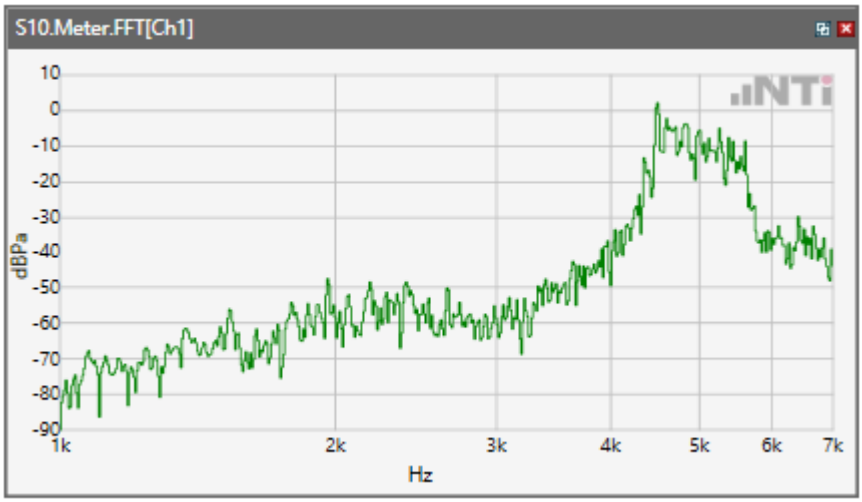

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ LTE Band 4

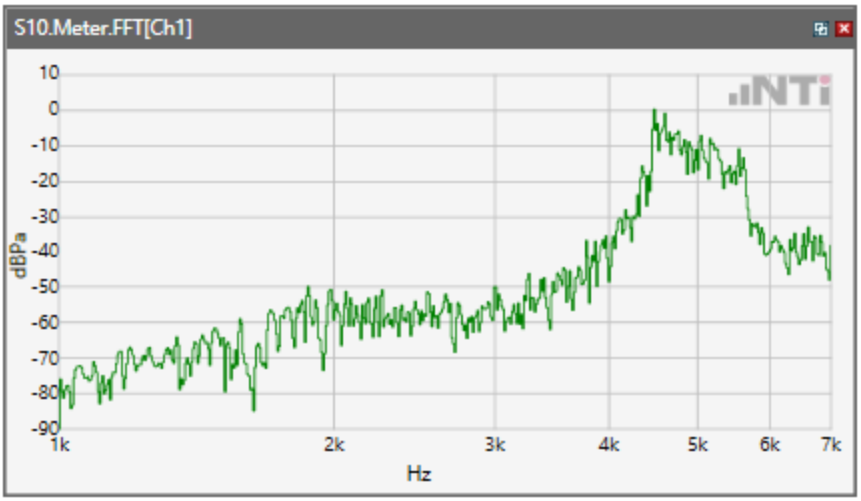

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ LTE Band 5

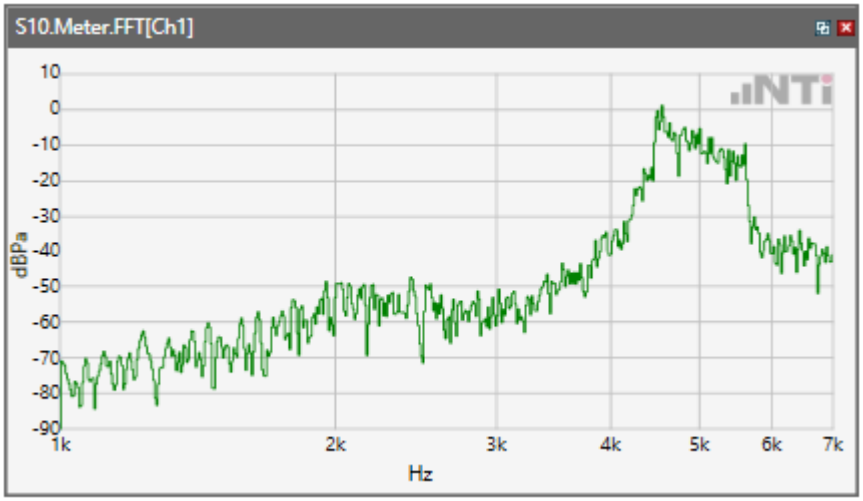

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ LTE Band 12

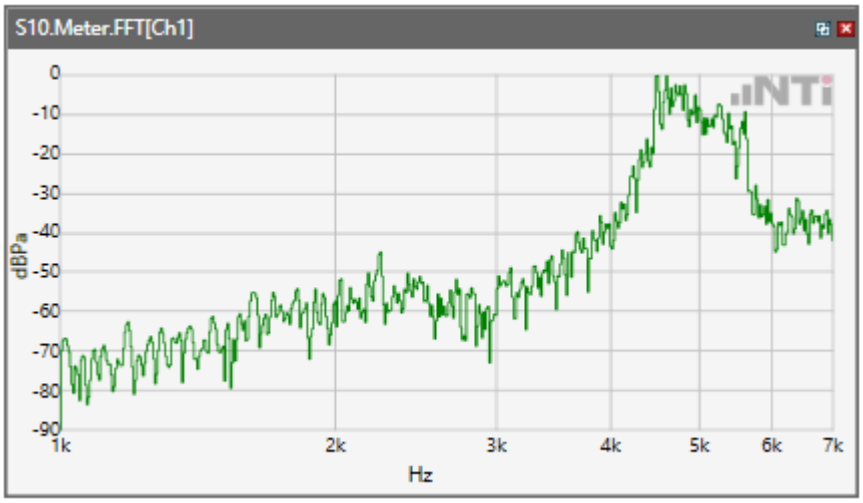

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ LTE Band 17

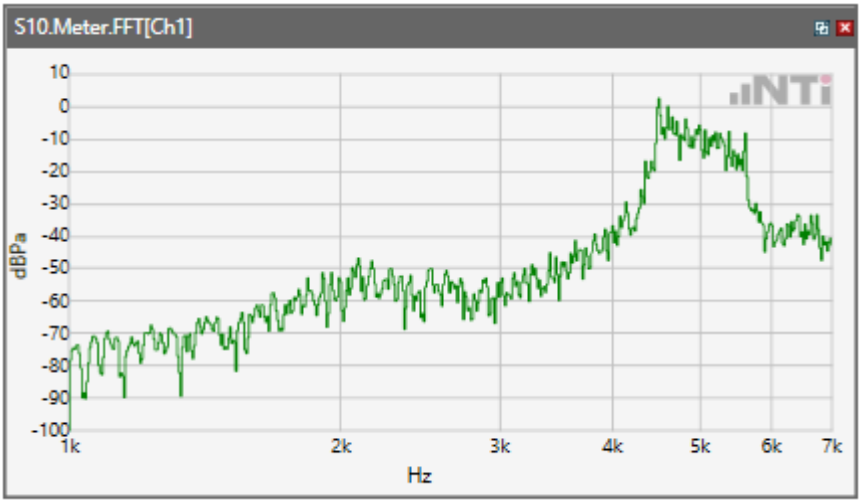

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ LTE Band 66

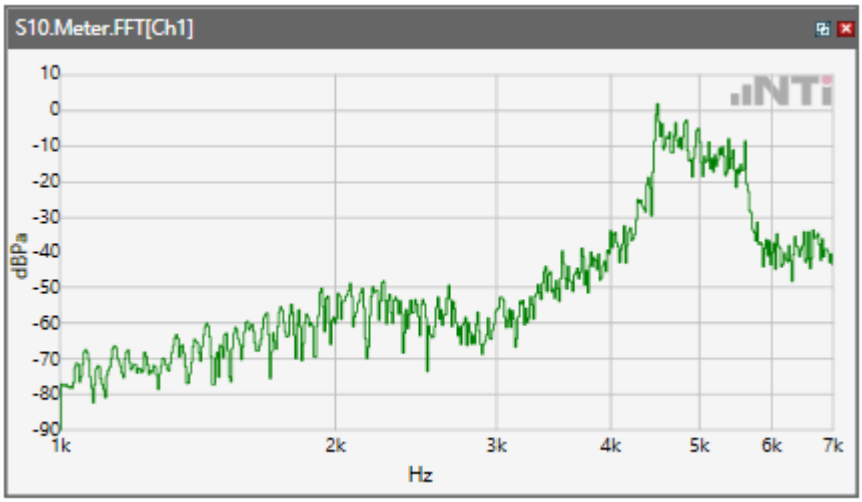

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ WLAN 2.4GHz

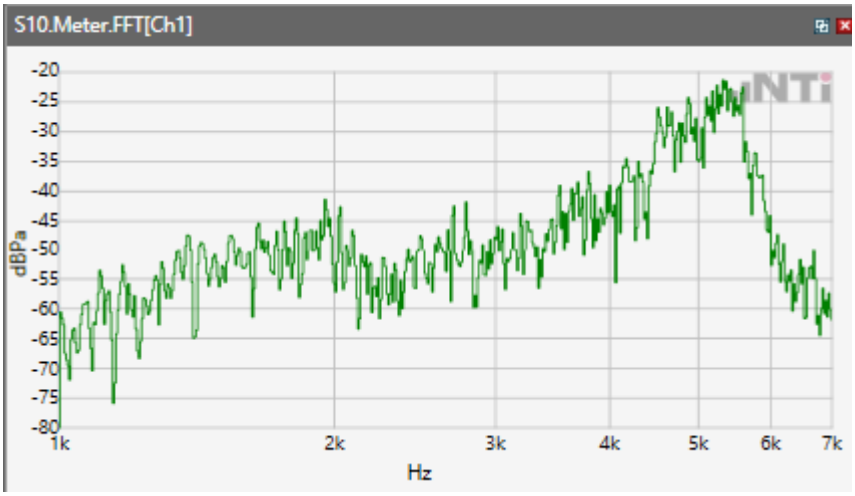

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\WLAN 5.2GHz

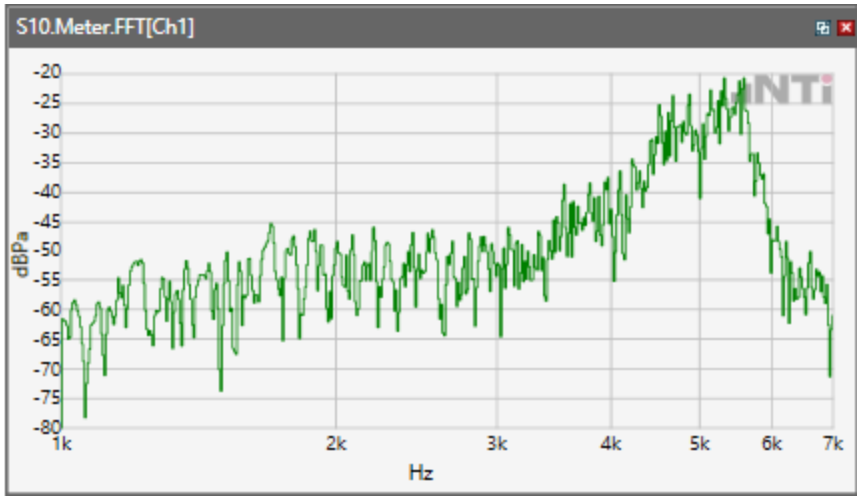

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\WLAN 5.3GHz

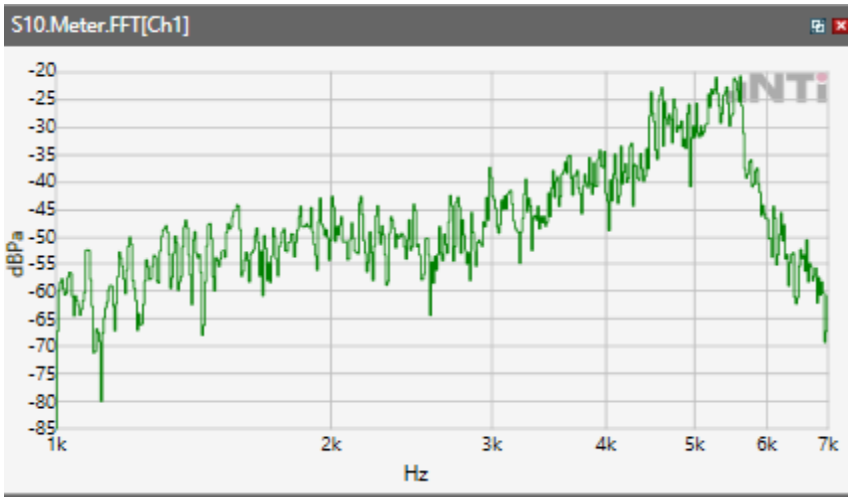

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ WLAN 5.5GHz

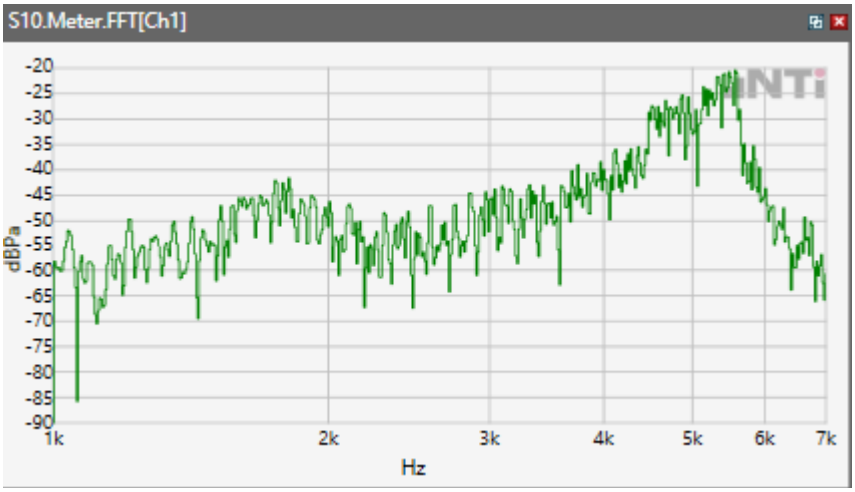

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps\ 5.2 Receive path – distortion and noise\ WLAN 5.8GHz

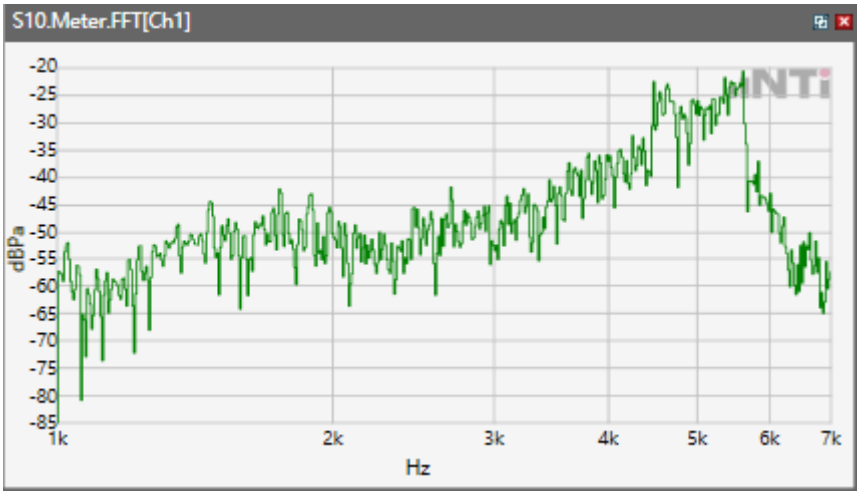

5.2 Receive path – distortion and noise

The distortion and noise test results data are referred to Annex C.

5.3 Receive Acoustic Frequency response Performance

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps \GSM 850

Absolute minimal distance

OK

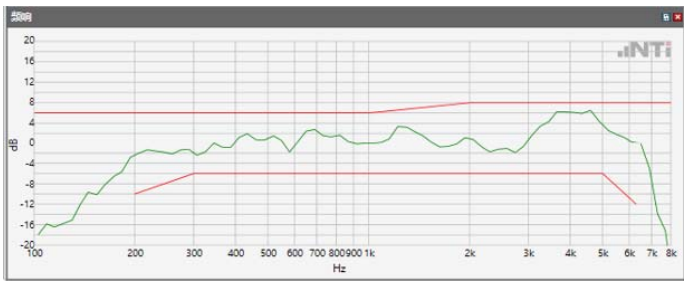

OK

Limits

	lower
Run 1	Fit into tolerance

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps \ GSM 1900

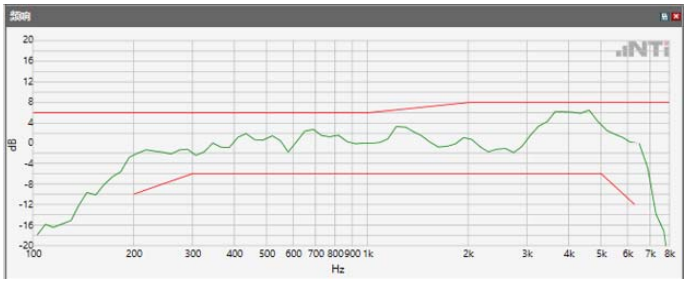

Absolute minimal distance

OK

OK

Limits

	lower
Run 1	Fit into tolerance

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps \WCDMA Band II

Absolute minimal distance

OK

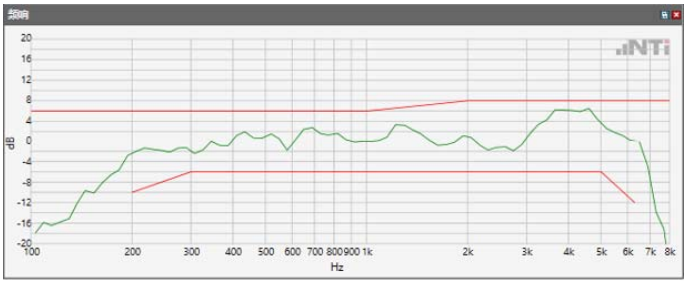

OK

Limits

	lower
Run 1	Fit into tolerance

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps \ WCDMA Band IV

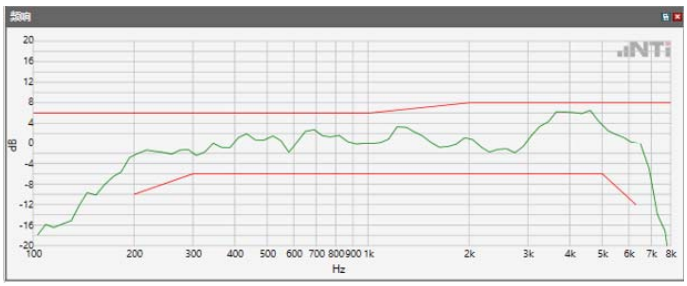

Absolute minimal distance

OK

OK

Limits

	lower
Run 1	Fit into tolerance

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps \ WCDMA Band V

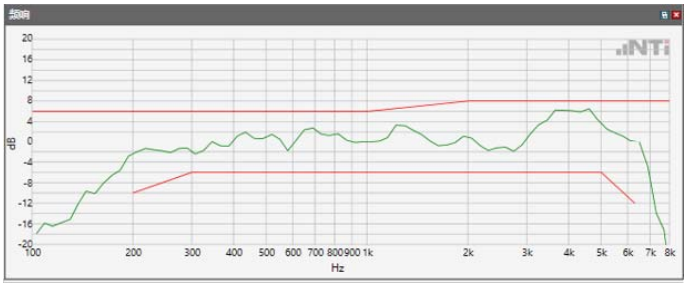

Absolute minimal distance

OK

OK

Limits

	lower
Run 1	Fit into tolerance

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps \LTE Band 2

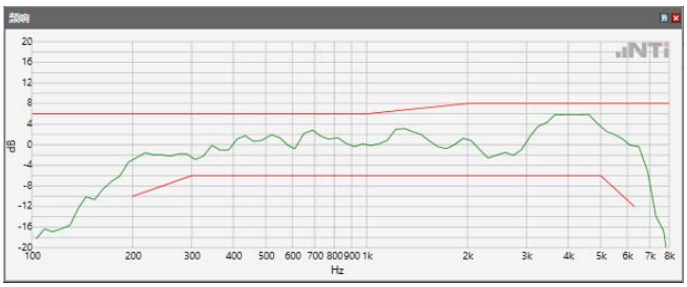

Absolute minimal distance

OK

OK

Limits

	lower
Run 1	Fit into tolerance

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps \ LTE Band 4

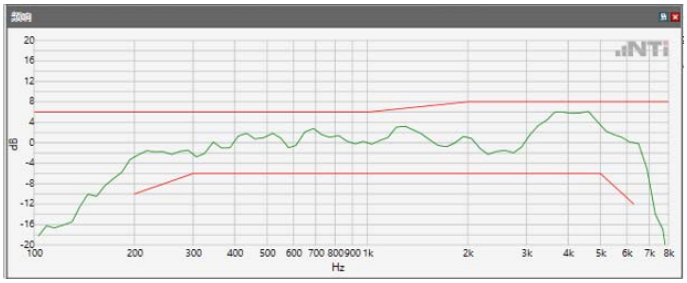

Absolute minimal distance

OK

OK

Limits

	lower
Run 1	Fit into tolerance

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps \ LTE Band 5

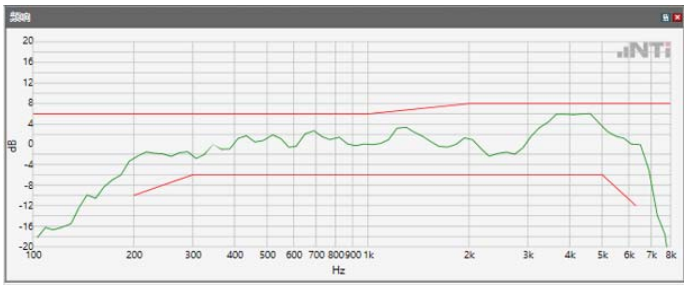

Absolute minimal distance

OK

OK

Limits

	lower
Run 1	Fit into tolerance

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps \ LTE Band 12

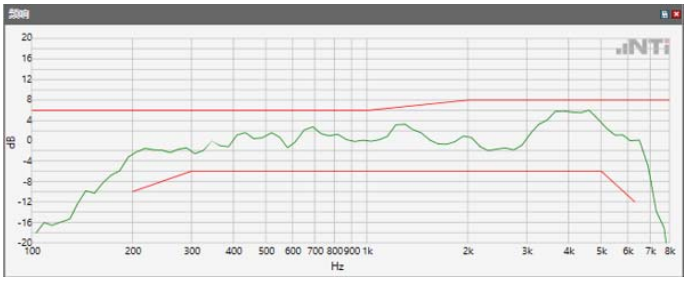

Absolute minimal distance

OK

OK

Limits

	lower
Run 1	Fit into tolerance

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps \ LTE Band 17

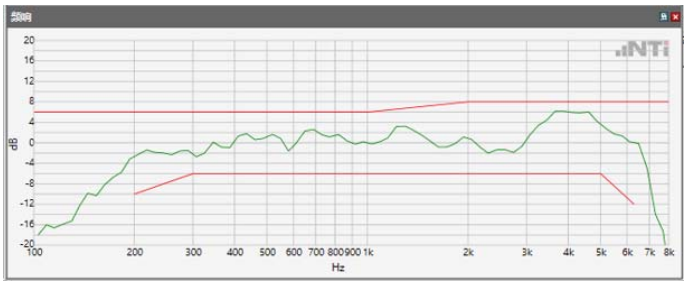

Absolute minimal distance

OK

OK

Limits

	lower
Run 1	Fit into tolerance

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps \ LTE Band 66

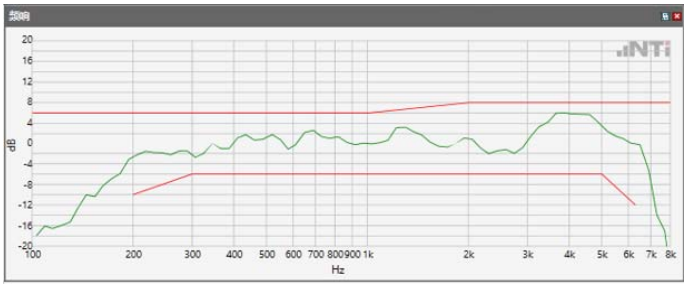

Absolute minimal distance

OK

OK

Limits

	lower
Run 1	Fit into tolerance

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps \ WLAN 2.4GHz

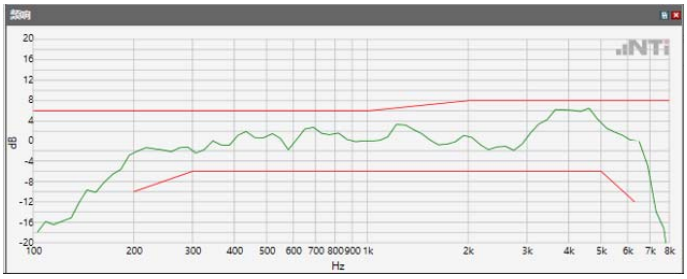

Absolute minimal distance

OK

OK

Limits

	lower
Run 1	Fit into tolerance

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps \WLAN 5.2GHz

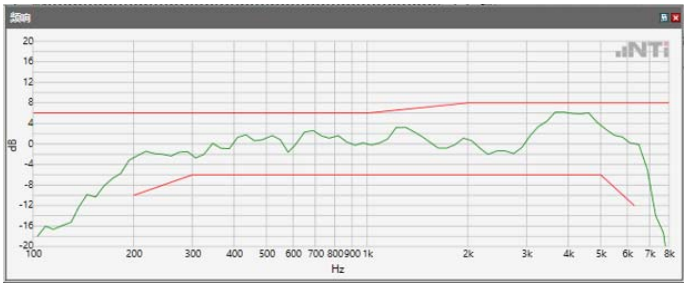

Absolute minimal distance

OK

OK

Limits

	lower
Run 1	Fit into tolerance

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps \WLAN 5.3GHz

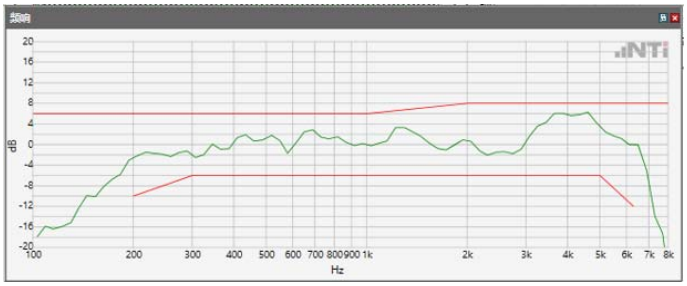

Absolute minimal distance

OK

OK

Limits

	lower
Run 1	Fit into tolerance

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps \WLAN 5.5GHz

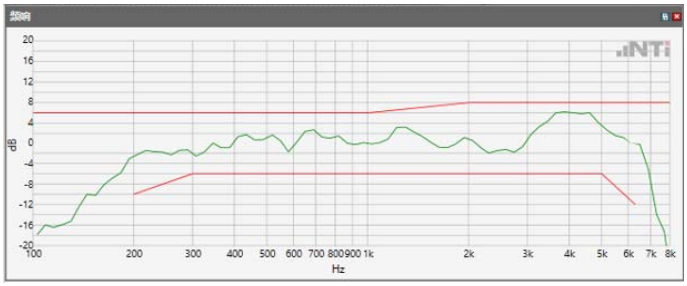

Absolute minimal distance

OK

OK

Limits

	lower
Run 1	Fit into tolerance

ANSI/TIA 5050-2018 \ 2N HAC ON \ WB 23.85kbps \WLAN 5.8GHz

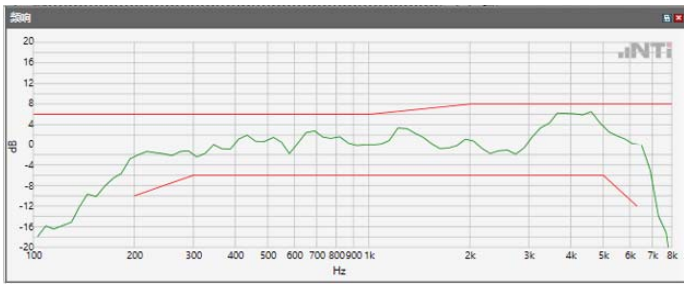

Absolute minimal distance

OK

OK

Limits

	lower
Run 1	Fit into tolerance

5.1 Receive Volume Control Performance 2N---EVS NB

ANSI/TIA 5050-2018 \ 2N HAC ON \ EVS NB 24.4 kbps\LTE Band 2

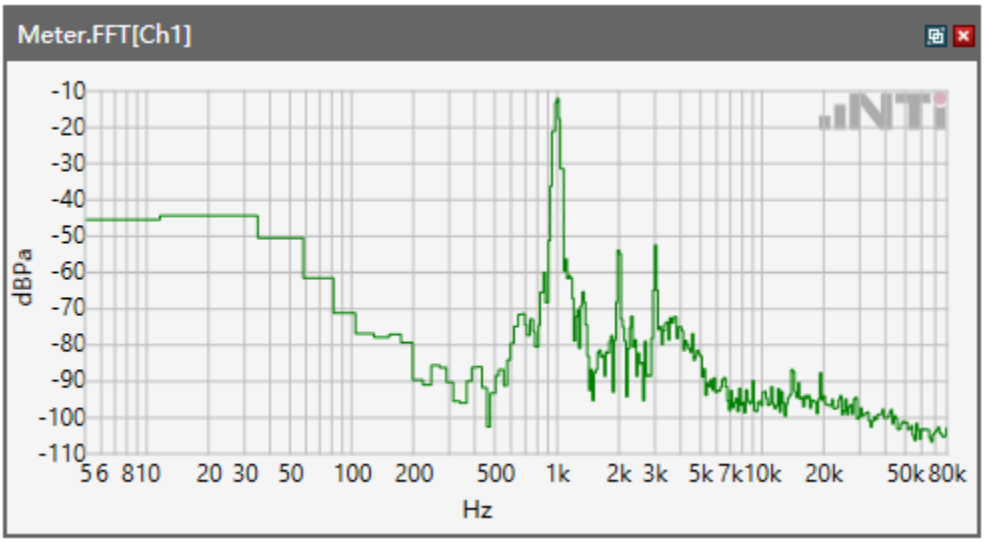

Speech Level RCV: 80.37 dB[SPL]
Calculated Value: 10.37 dB OK

ANSI/TIA 5050-2018 \ 2N HAC ON \ EVS NB 24.4 kbps\ LTE Band 4

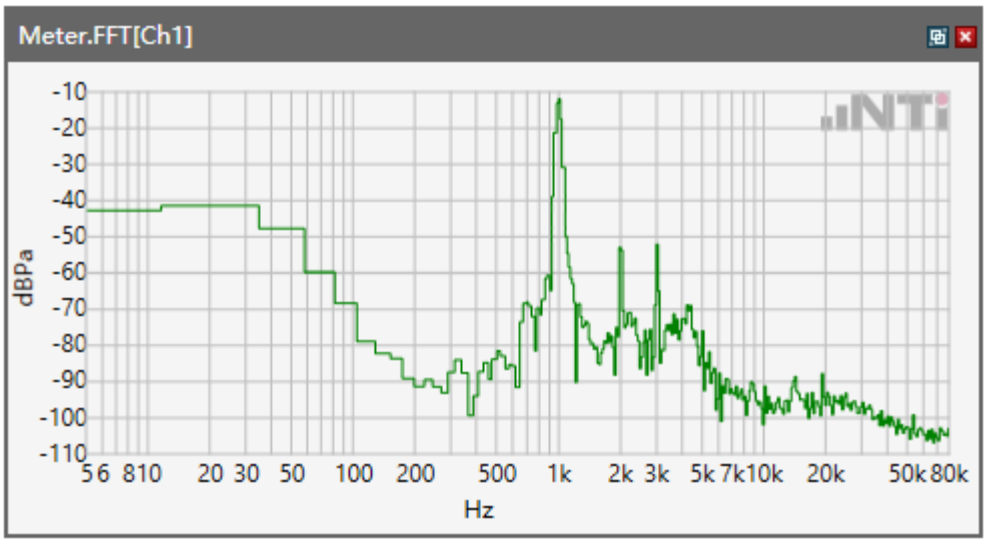

Speech Level RCV: 80.14 dB[SPL]
Calculated Value: 10.14 dB OK

ANSI/TIA 5050-2018 \ 2N HAC ON \ EVS NB 24.4 kbps\LTE Band 5

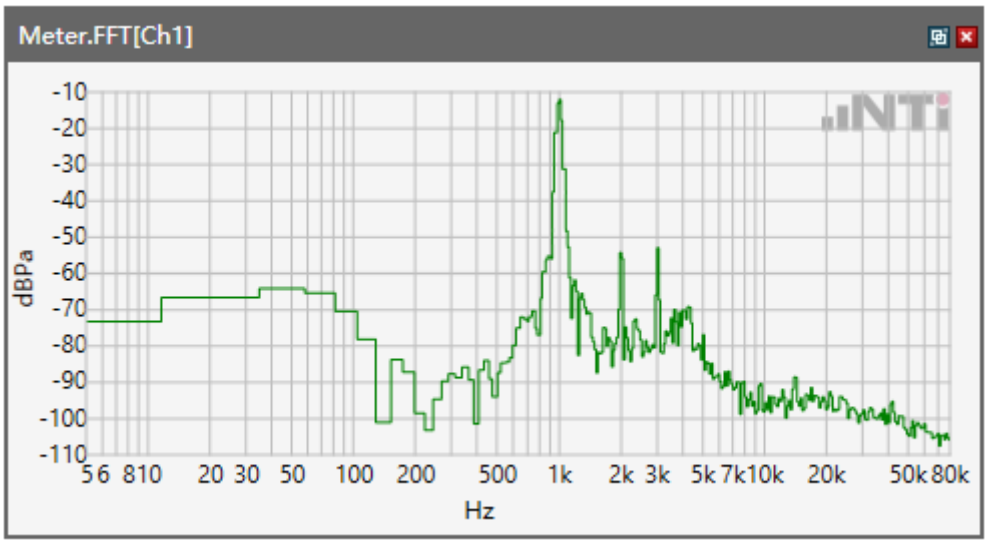

Speech Level RCV: 79.56 dB[SPL]

Calculated Value: 9.56 dB OK

ANSI/TIA 5050-2018 \ 2N HAC ON \ EVS NB 24.4 kbps\LTE Band 12

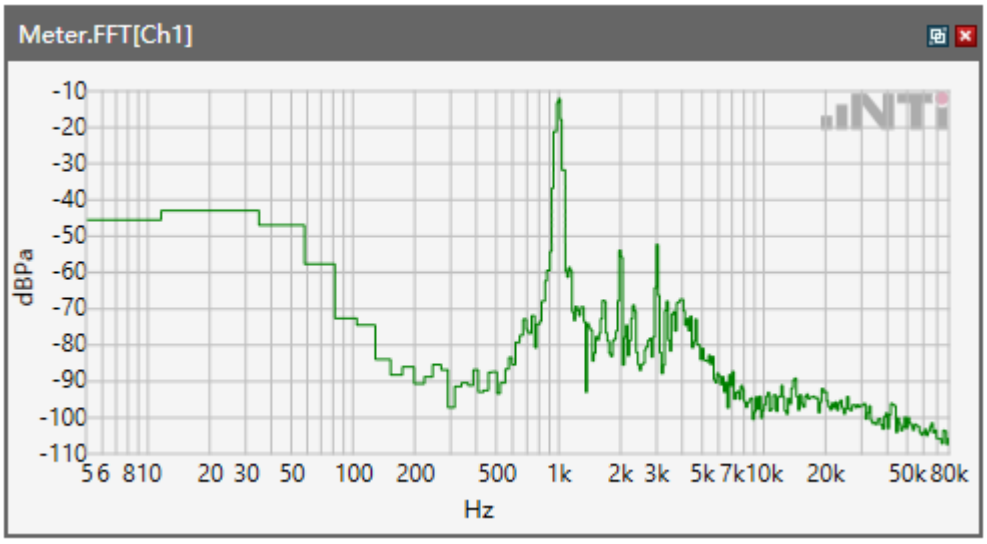

Speech Level RCV: 79.39 dB[SPL]

Calculated Value: 9.39 dB OK

ANSI/TIA 5050-2018 \ 2N HAC ON \ EVS NB 24.4 kbps\ LTE Band 17

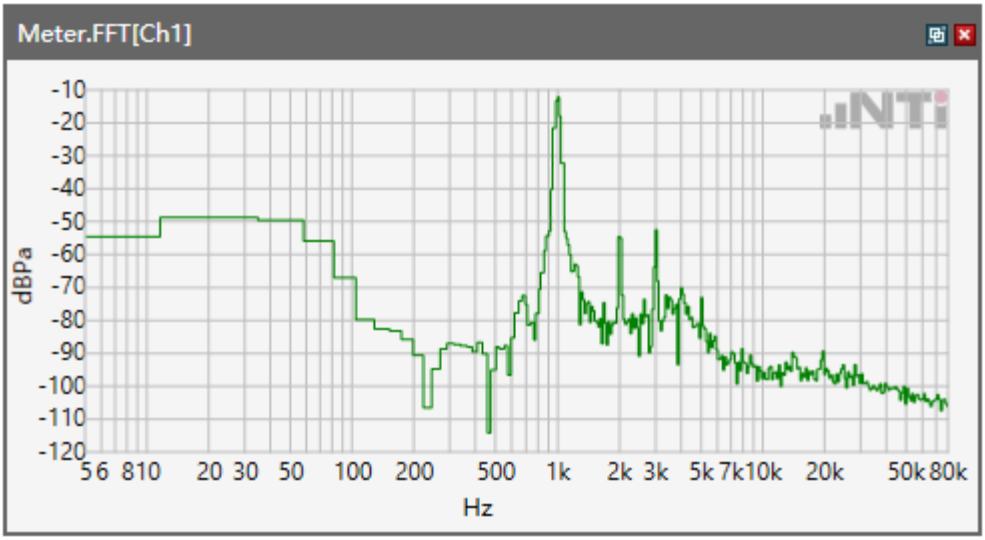

Speech Level RCV: 80.05 dB[SPL]

Calculated Value: 10.05 dB OK

ANSI/TIA 5050-2018 \ 2N HAC ON \ EVS NB 24.4 kbps\LTE Band 66

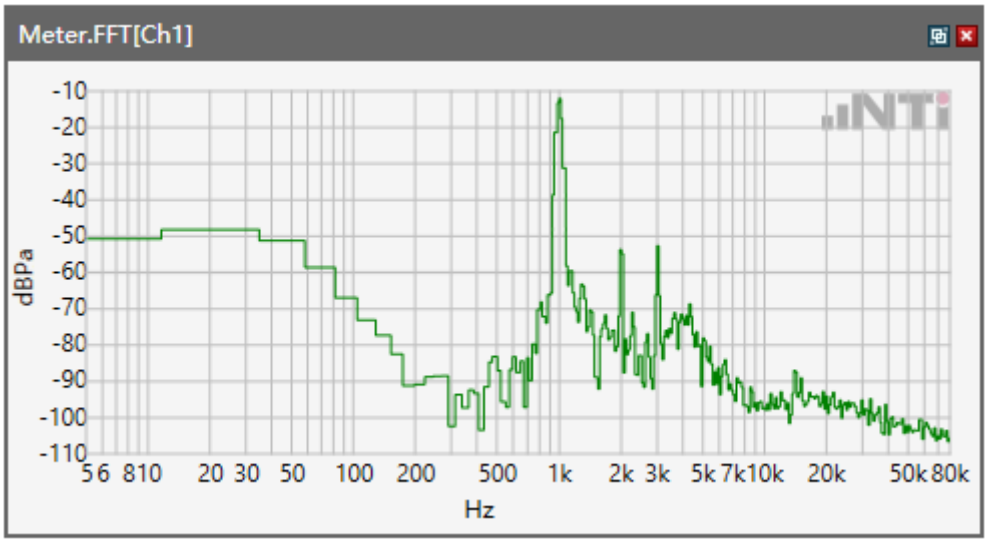

Speech Level RCV: 79.54 dB[SPL]

Calculated Value: 9.54 dB OK

ANSI/TIA 5050-2018 \ 2N HAC ON \ EVS NB 24.4 kbps\ WLAN 2.4GHz

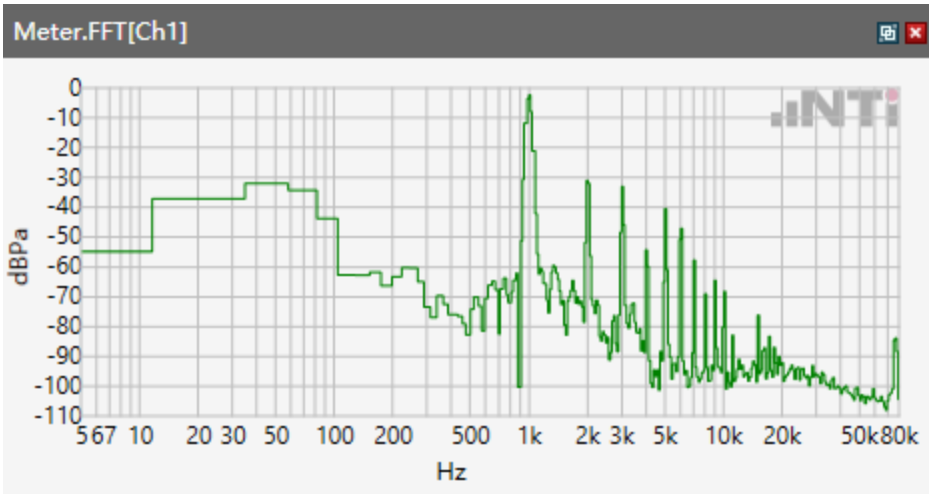

Speech Level RCV: 86.49 dB[SPL]

Calculated Value: 16.49 dB OK

ANSI/TIA 5050-2018 \ 2N HAC ON \ EVS NB 24.4 kbps\WLAN 5.2GHz

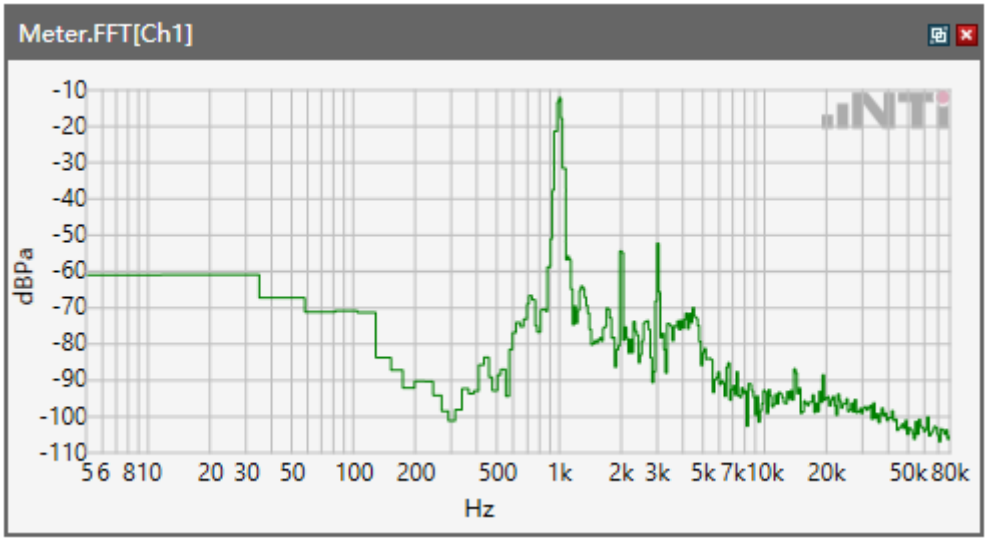

Speech Level RCV: 85.9 dB[SPL]

Calculated Value: 15.9 dB OK

ANSI/TIA 5050-2018 \ 2N HAC ON \ EVS NB 24.4 kbps\WLAN 5.3GHz

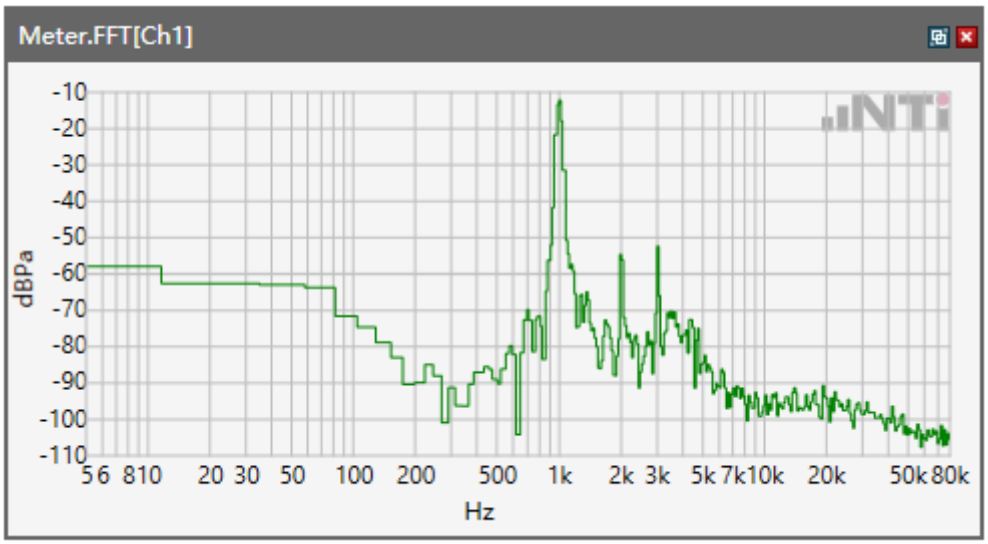

Speech Level RCV: 86.06 dB[SPL]

Calculated Value: 16.06 dB OK

ANSI/TIA 5050-2018 \ 2N HAC ON \ EVS NB 24.4 kbps\WLAN 5.5GHz

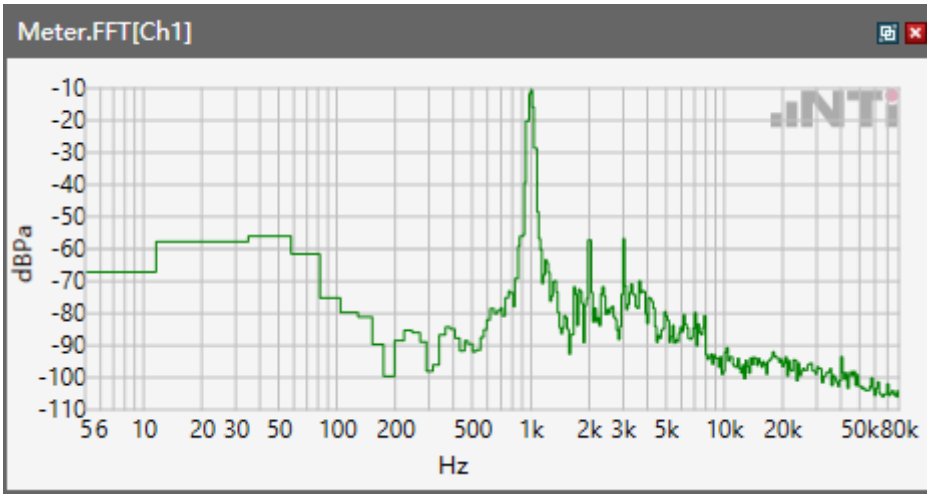

Speech Level RCV: 85.74 dB[SPL]

Calculated Value: 15.74 dB OK

ANSI/TIA 5050-2018 \ 2N HAC ON \ EVS NB 24.4 kbps\WLAN 5.8 GHz

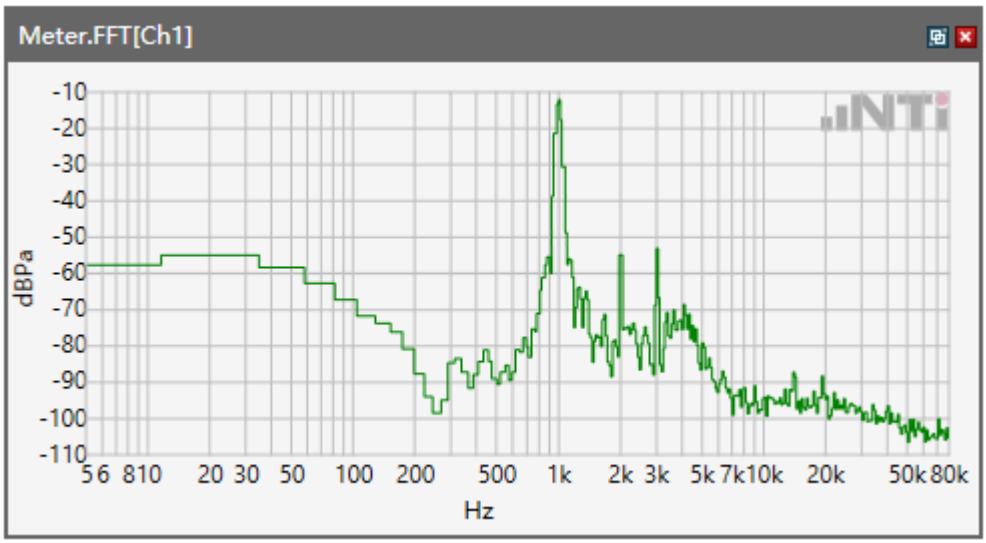

Speech Level RCV: 85.82 dB[SPL]

Calculated Value: 15.82 dB OK

5.1 Receive Volume Control Performance 2N---EVS WB

ANSI/TIA 5050-2018 \ 2N HAC ON \ EVS WB 24.4 kbps\LTE Band 2

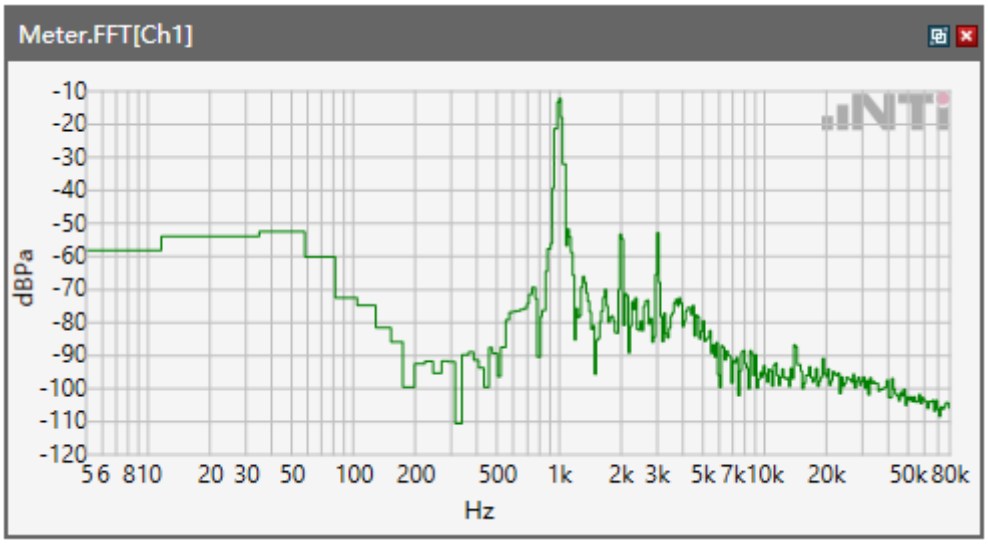

Speech Level RCV: 82.64 dB[SPL]

Calculated Value: 12.64 dB OK

ANSI/TIA 5050-2018 \ 2N HAC ON \ EVS WB 24.4 kbps\ LTE Band 4

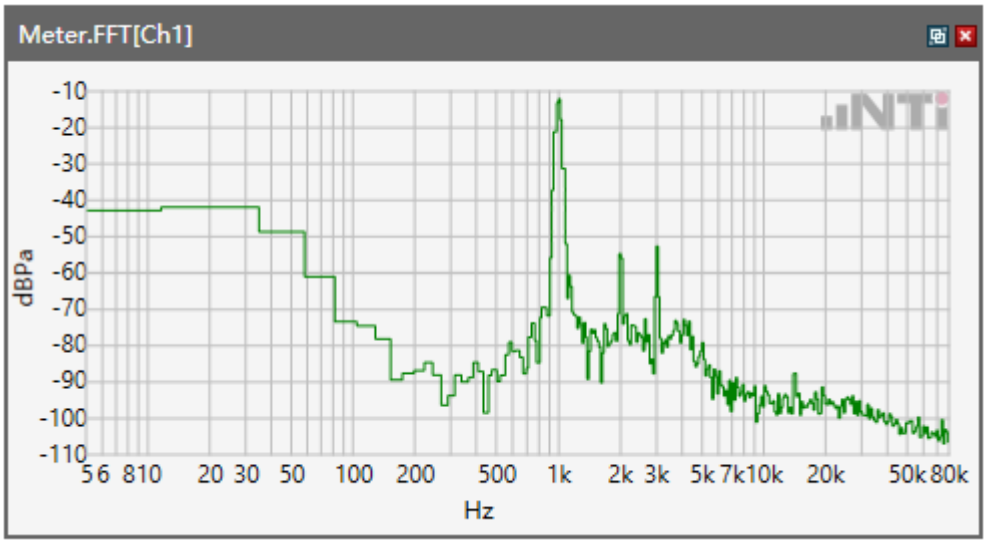

Speech Level RCV: 82.61 dB[SPL]

Calculated Value: 12.61 dB OK

ANSI/TIA 5050-2018 \ 2N HAC ON \ EVS WB 24.4 kbps\LTE Band 5

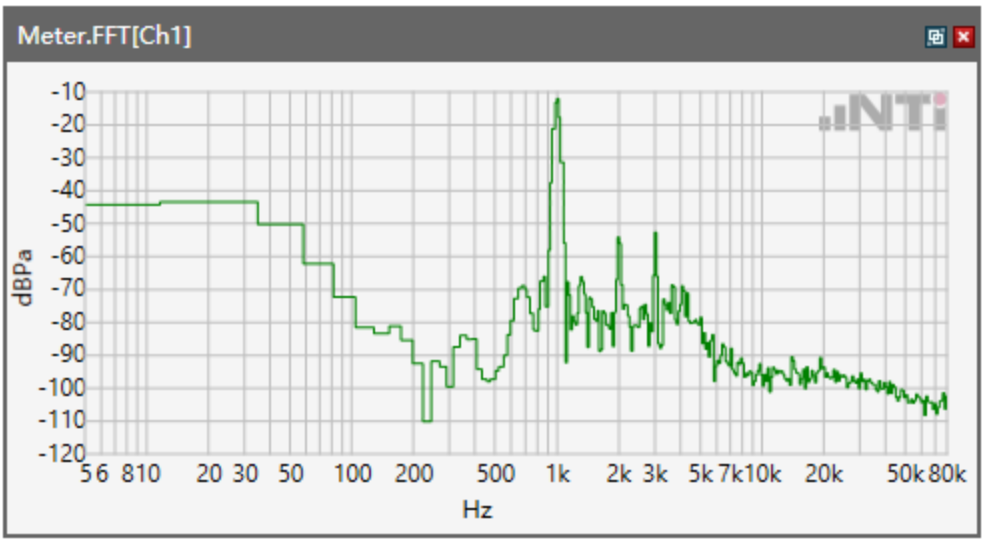

Speech Level RCV: 82.56 dB[SPL]

Calculated Value: 12.56 dB OK

ANSI/TIA 5050-2018 \ 2N HAC ON \ EVS WB 24.4 kbps\LTE Band 12

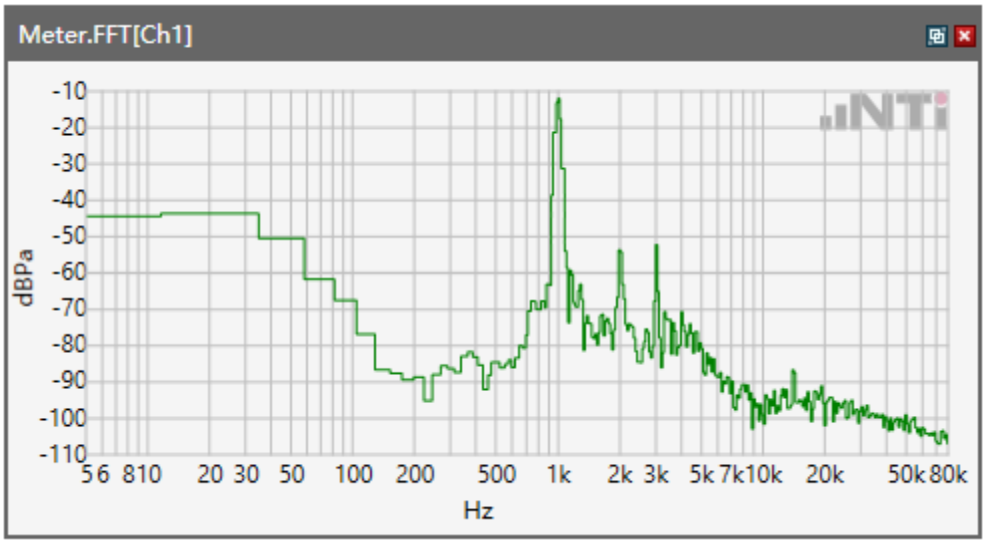

Speech Level RCV: 82.57 dB[SPL]

Calculated Value: 12.57 dB OK

ANSI/TIA 5050-2018 \ 2N HAC ON \ EVS WB 24.4 kbps\ LTE Band 17

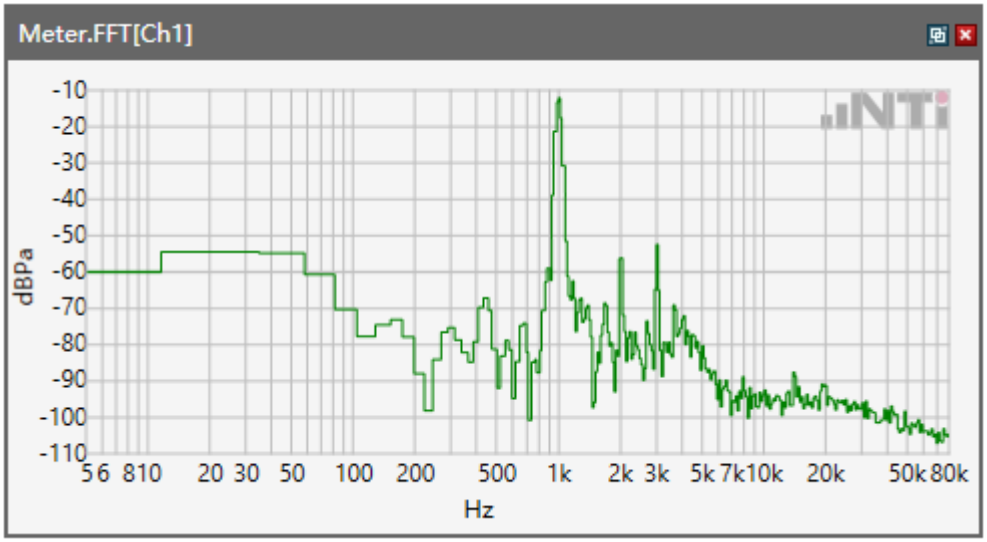

Speech Level RCV: 82.73 dB[SPL]

Calculated Value: 12.73 dB OK

ANSI/TIA 5050-2018 \ 2N HAC ON \ EVS WB 24.4 kbps\LTE Band 66

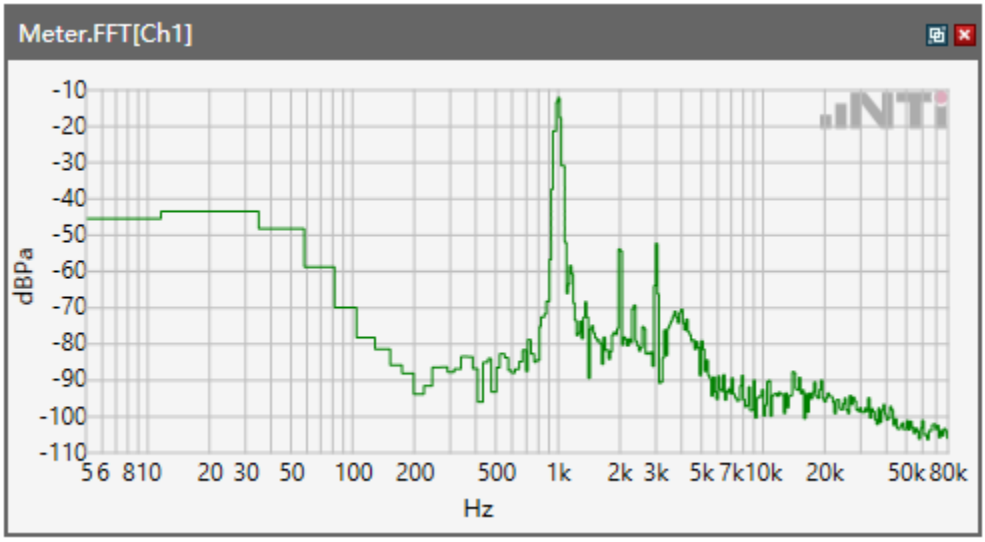

Speech Level RCV: 82.63 dB[SPL]

Calculated Value: 12.63 dB OK

ANSI/TIA 5050-2018 \ 2N HAC ON \ EVS WB 24.4 kbps\ WLAN 2.4GHz

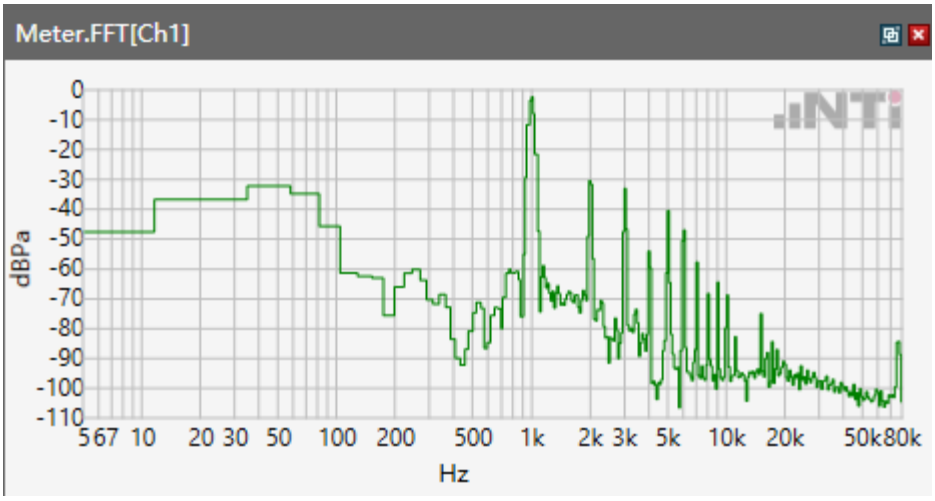

Speech Level RCV: 85.27 dB[SPL]

Calculated Value: 15.27 dB OK

ANSI/TIA 5050-2018 \ 2N HAC ON \ EVS WB 24.4 kbps WLAN 5.2GHz

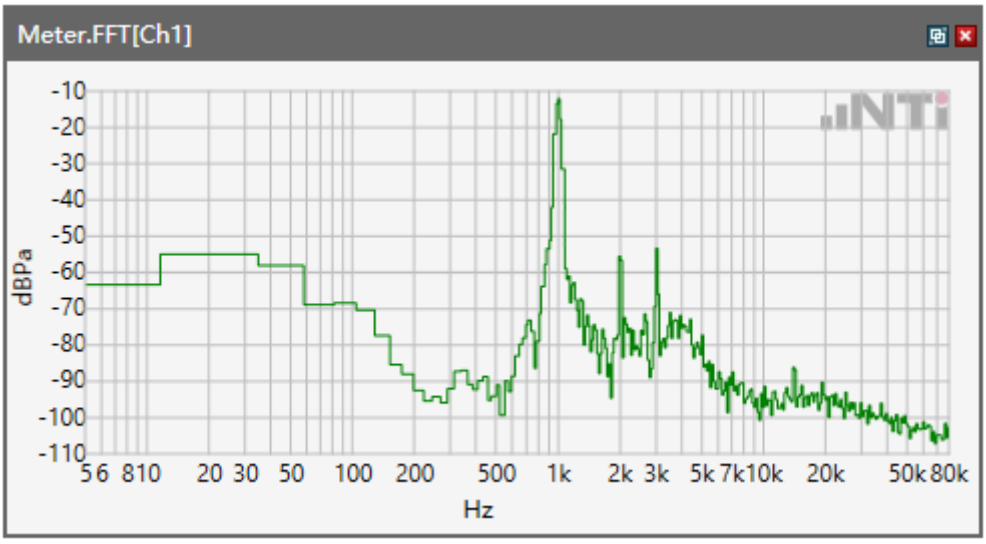

Speech Level RCV: 84.62 dB[SPL]

Calculated Value: 14.62 dB OK

ANSI/TIA 5050-2018 \ 2N HAC ON \ EVS WB 24.4 kbps \WLAN 5.3GHz

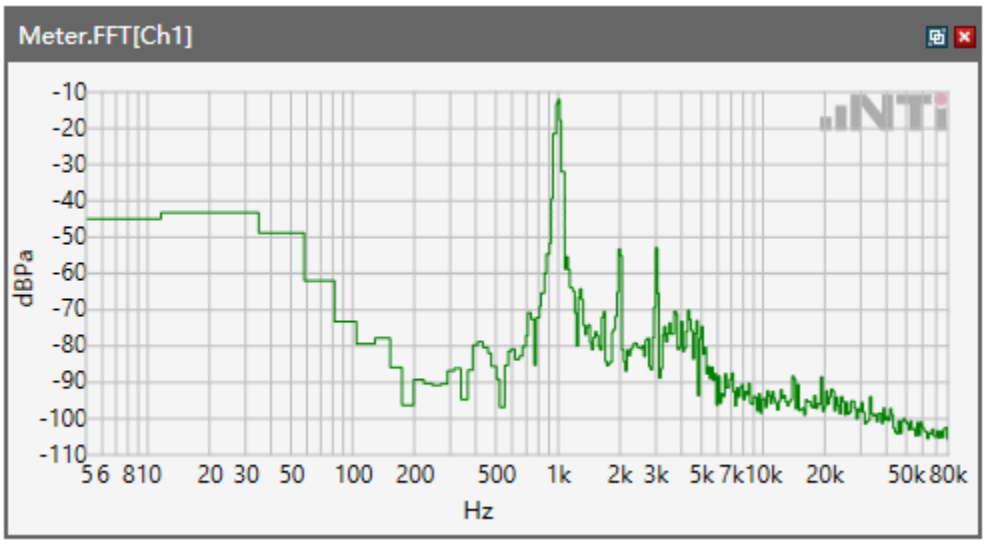

Speech Level RCV: 84.57 dB[SPL]
Calculated Value: 14.57 dB OK

ANSI/TIA 5050-2018 \ 2N HAC ON \ EVS WB 24.4 kbps \WLAN 5.5GHz

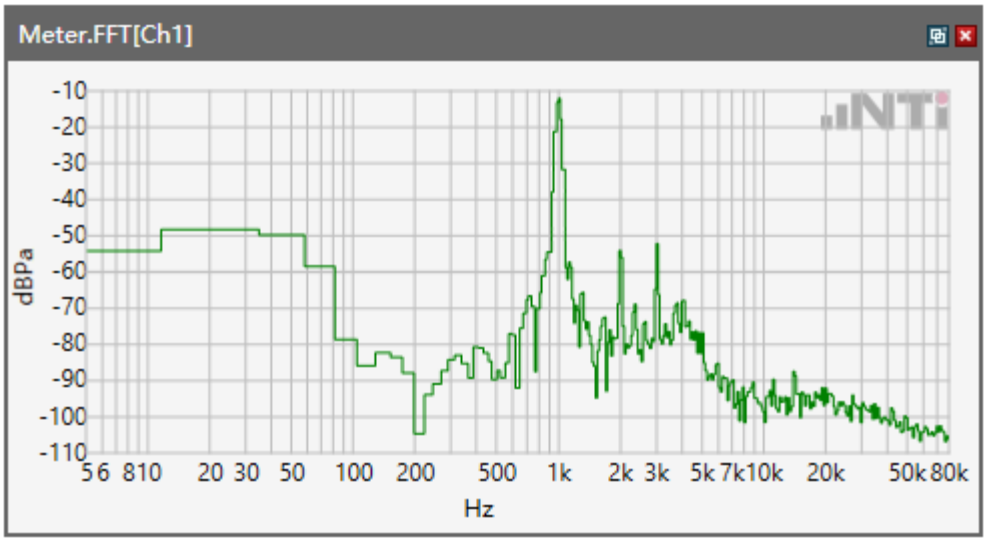

Speech Level RCV: 84.46 dB[SPL]
Calculated Value: 14.46 dB OK

ANSI/TIA 5050-2018 \ 2N HAC ON \ EVS WB 24.4 kbps \WLAN 5.8 GHz

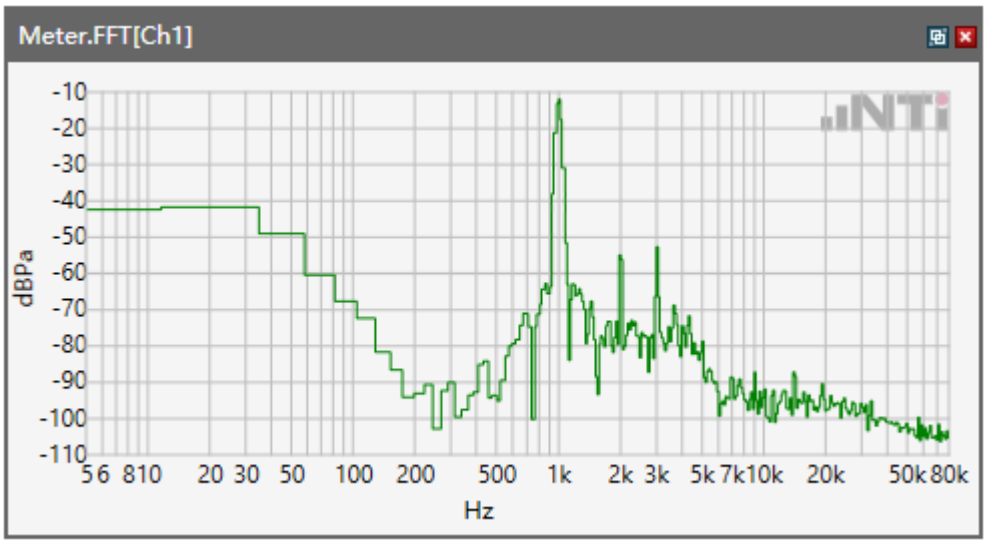

Speech Level RCV: 84.53 dB[SPL]

Calculated Value: 14.53 dB OK

5.1 Receive Volume Control Performance 2N---EVS FWB

ANSI/TIA 5050-2018 \ 2N HAC ON \ EVS FWB 24.4 kbps\ WLAN 2.4GHz

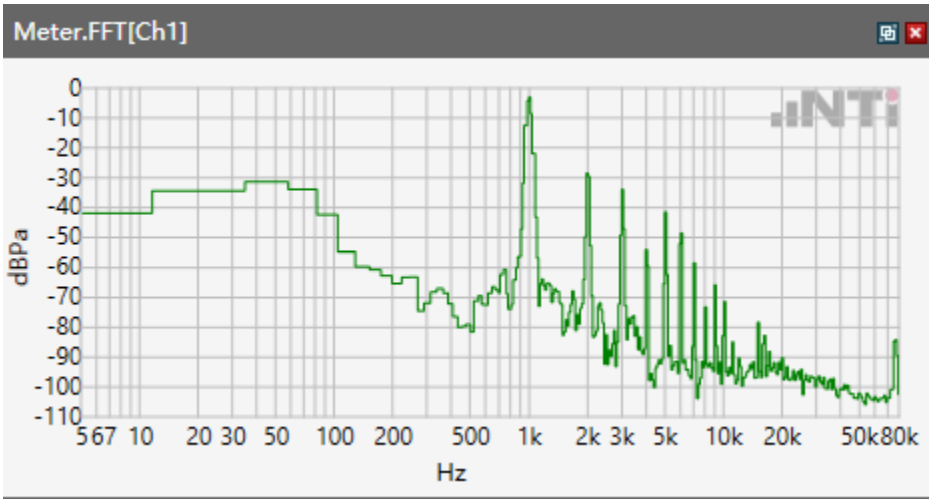

Speech Level RCV: 84.82 dB[SPL]

Calculated Value: 14.82 dB OK

ANSI/TIA 5050-2018 \ 2N HAC ON \ EVS FWB 24.4 kbps WLAN 5.2GHz

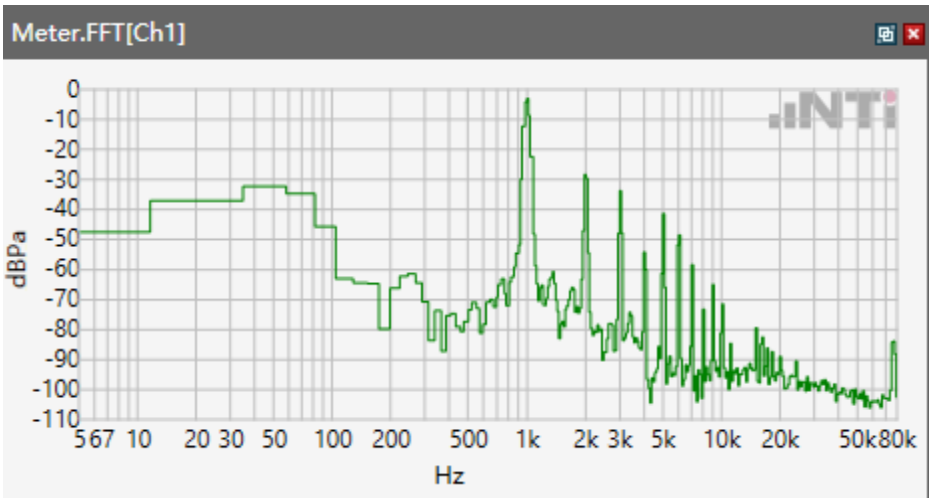

Speech Level RCV: 84.29 dB[SPL]

Calculated Value: 14.29 dB OK

ANSI/TIA 5050-2018 \ 2N HAC ON \ EVS FWB 24.4 kbps \WLAN 5.3GHz

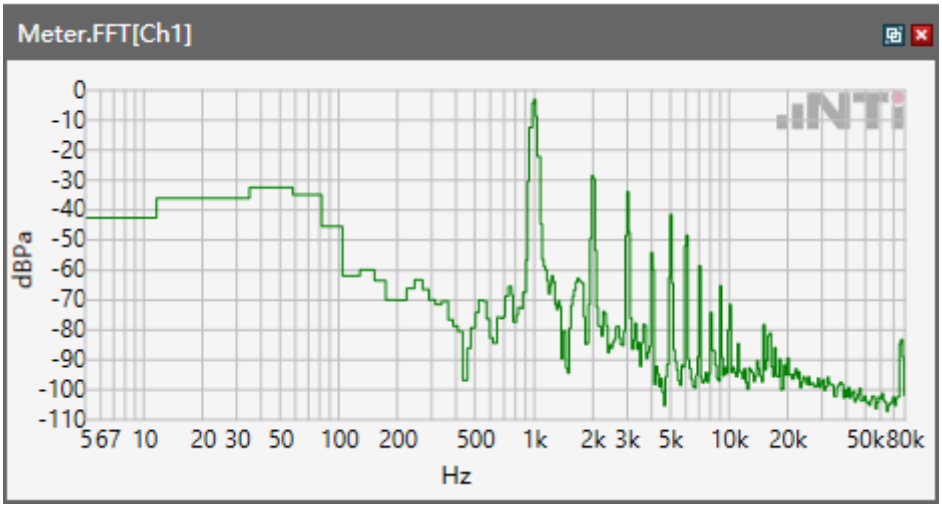

Speech Level RCV: 84.34 dB[SPL]

Calculated Value: 14.34 dB OK

ANSI/TIA 5050-2018 \ 2N HAC ON \ EVS FWB 24.4 kbps \WLAN 5.5GHz

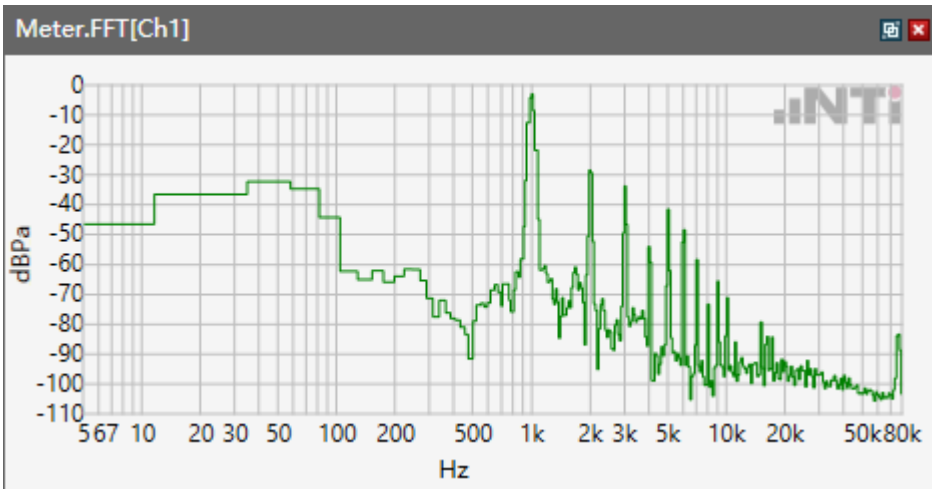

Speech Level RCV: 84.31 dB[SPL]

Calculated Value: 14.31 dB OK

ANSI/TIA 5050-2018 \ 2N HAC ON \ EVS FWB 24.4 kbps \WLAN 5.8 GHz

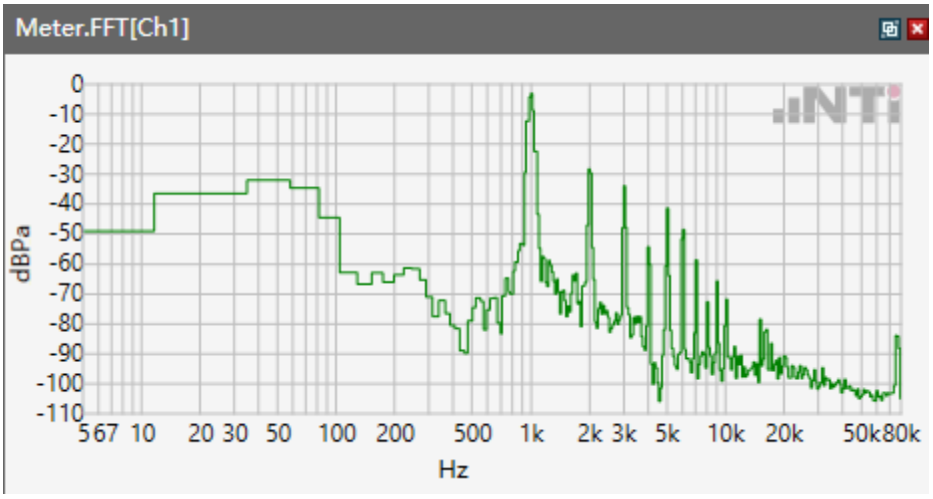

Speech Level RCV: 84.32 dB[SPL]

Calculated Value: 14.32 dB OK