

# CERTIFICATION TEST REPORT

## FCC CFR47 Part 15 Subpart C

Test Report File No.	13-IST-0861	<input checked="" type="checkbox"/> Basic	<input type="checkbox"/> Alternate
Date of Receipt	November 20, 2013	Begin of test date	November 26, 2013
Date of Issue	December 18, 2013	End of test date	December 10, 2013
Kind of Product	iLOG		
Model(s)	iLOG-MEMS-Acc		
FCC ID	2ABHGILOG-MEMS-ACC		
Applicant	Smart Control & Sensing		
Address	C-425, Migun Techno World II, Yongsan-dong, Yuseong-gu, Daejeon, 305-500 Republic of Korea		
Manufacturer	Smart Control & Sensing		
Address	C-425, Migun Techno World II, Yongsan-dong Yuseong-gu Daejeon, 305-500 Republic of Korea		

### Test Result

Positive

Negative

Tested By



B.O. KO.

Reviewed By



S.J. CHO

### Comment(s)

- Investigations requested : Measurement to the relevant clauses of FCC rules and regulations Part 15 Subpart C.
- The test report is consists of 38 pages.
- The test result only responds to the tested sample.
- It is not allowed to copy this report even partly without the allowance of IST Co., Ltd.
- This equipment as for has been shown to be capable of continued compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4

I assume full responsibility for accuracy and completeness of these data.



## TABLE OF CONTENTS

<b>Table of contents</b>	2
<b>Information of test laboratory, Product information</b>	3
<b>Measurement Uncertainty, Summary</b>	4
<b>Descriptions of Test</b>	5~6
	10~11
- Conducted Emission	7~9
- Radiated Emission	12~18
- Radiated Emission, 9KHz to 30MHz(Magnetic Field Test)	13
- Peak power output	19~21
- Conducted Spurious Emission & Band edge	22~26
- Frequency Separation &	27~33
- Occupied Bandwidth/20dB Bandwidth	
- Number of hopping frequency	34~35
- Time of occupancy(Dwell time)	36~37
- Antenna requirements	38

Note:

## INFORMATIONS OF TEST LABORATORY

EMC LABORATORY of IST Co., Ltd.  
 400-19, Singal-dong, Giheung-gu, Yongin-si,  
 Gyeonggi-Do, 446-599, Korea  
 TEL: +82 31 326 6700 FAX: +82 31 326 6797

VCCI Registration No. : 1739  
 FCC Registration No. : 400603  
 KCC Registration No. : KR0018  
 KOLAS Registration No. : KT118



## PRODUCT INFORMATION

### Wireless Acceleration Sensor

Battery	Lithium ion battery (3.7 V, 300 mA) Charge voltage (Min 4.2 V / 5 V /Max 7.5 V) Duration 2 Hours
Size	64 X 50 X 18 mm
Weight	65 g
Operating Temperature range	0 ~ 40 °C
Sampling rate	50 ~ 800 Hz
Internal flash	2 MB
Sensor	Range : $\pm 1.7$ g Resolution: 1 mg at 60 Hz Sensitivity: 960 / 1000 / 1040 mV/g RMS Noise: 1 mg
RF	Bluetooth (CSR)

### Test Mode :

Mode 1: Transmit (DH5)

Mode 2: Transmit (3DH5)

1. DH5 is for GFSK modulation, and 3DH5 is for 8DPSK
2. Regards to the frequency band operation; the highest that was included the lowest, middle and highest frequency of channel were selected to perform the test, and then shown on this report.

- Please refer to user's manual.

## Measurement Uncertainty

Conducted Emissions	$U = 2.98$ [dB] (Confidence level approximately 95 %, $k = 2$ )
Radiated Emissions (Antenna - Horizontal)	$U = 3.83$ [dB] (Confidence level approximately 95 %, $k = 2$ )
Radiated Emissions (Antenna - Vertical)	$U = 4.50$ [dB] (Confidence level approximately 95 %, $k = 2$ )

## SUMMARY

### Bluetooth Mode(2402MHz ~2480MHz)

Applied Standard : FCC CRF Part 15 Subpart C

Description of Test	FCC Rule Parts	Results
AC Conducted Emission	<b>15.207</b>	Compliant
Carrier Frequency Separation	<b>15.247(a)(1)</b>	Compliant
20 dB Bandwidth	<b>15.247(a)(1)(ii) or (iii)</b>	Compliant
Time of Occupancy	<b>15.247(a)(1)(ii) or (iii)</b>	Compliant
Number of Hopping Frequencies	<b>15.247(a)(1)(ii) or (iii)</b>	Compliant
Conducted Maximum Peak Output Power	<b>15.247(b)(1)</b>	Compliant
Spurious RF Conducted Emission	<b>15.247(d)</b>	Compliant
Spurious Radiated Emission	<b>15.247(d), 15.209</b>	Compliant
Receiver Spurious Emission		Compliant
Out-of- Band Emission	<b>15.247(d)</b>	Compliant
Occupied Bandwidth		Compliant


## Descriptions of Test

### Conducted Emissions:


The measurement were performed over the frequency range of 0.15 MHz to 30 MHz using a  $50 \Omega/50 \mu\text{H}$  LISN as the input transducer to a Spectrum Analyzer or a Field Intensity Meter. The measurements were made with the detector set for "Peak" amplitude within a bandwidth of 10 kHz or for "quasi-peak" & "Average" within a bandwidth of 9 KHz.

#### - Procedure of Test

The line-conducted facility is located inside a shielded room No.1. A 1 m X 1.5 m wooden table 80 cm height is placed 40 cm away from the vertical wall and 1.5 m away from the other wall of the shielded room. The R/S ESCI and Hyup-Rip KNW-407 LISN are bonded to bottom of the shielded room. The EUT is located on the wooden table with distance more than 80 cm from the LISN and powered from the EMCO LISN. The peripheral equipment is powered from the other LISN. Power to the LISNs are filtered by a noise cut power line filters. All electrical cables are shielded by braided tinned steel tubing with inner  $\phi$  1.2 cm. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply lines will be connected to the EMCO LISN. All interconnecting cables more than 1m were shortened by non-inductive bundling to a 1m length. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating conditions. The RF output of the LISN was connected to the R/S receiver to determine the frequency producing the maximum emission from the EUT. The frequency producing the maximum level was reexamined using Quasi-Peak mode by manual measurement, after scanned by automatic Peak mode for frequency range from 0.15 to 30 MHz. The bandwidth of the receiver was set to 10 kHz. The EUT, peripheral equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission.

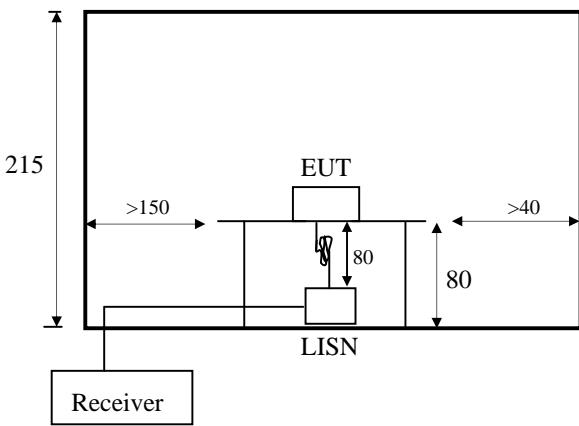

< Side View >

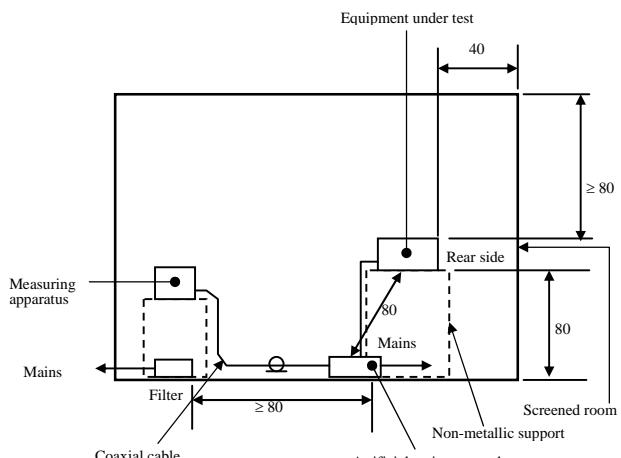

< Concept Drawing >

## Limits

According to §15.207(a) except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network(LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.


Frequency Range (MHz)	Limits	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

\* Decreases with the logarithm of the frequency.

## Test specification.

According to FCC CFR Title 47 Part 15 Subpart C Section 15.207

## Test Set-Up

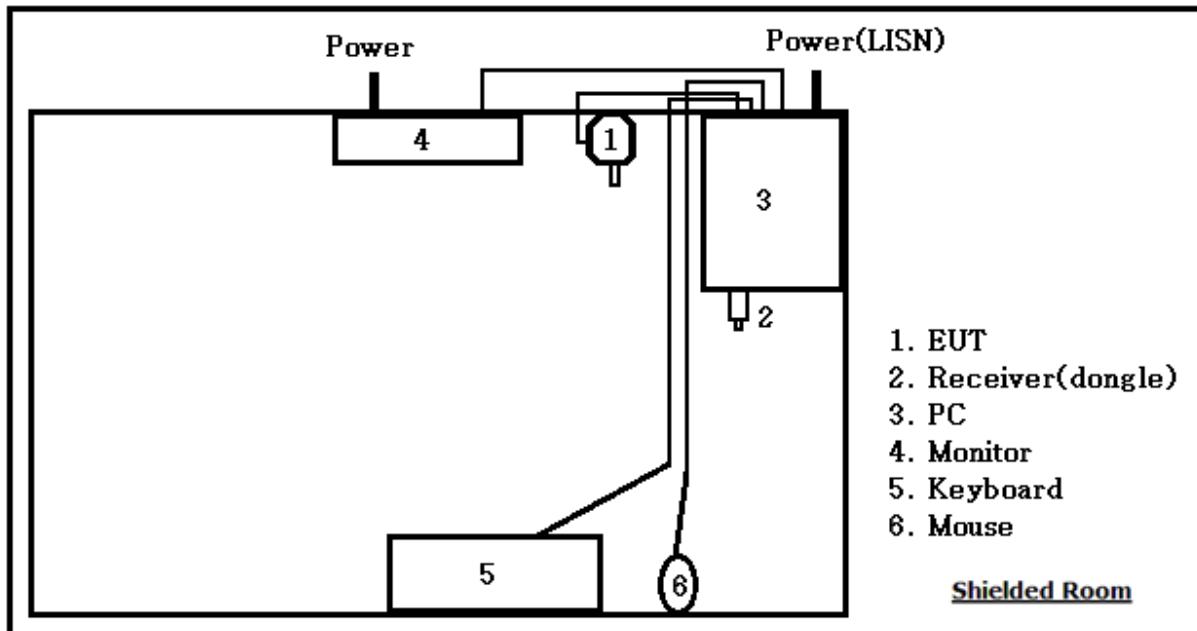

## Conducted Emissions

**[Applicable]**

◆ Test Equipment Used

Model Name	Description	Manufacturer	Due for Cal	Serial No.
ESCI	Test Receiver	Rohde & Schwarz	Jul. 16, 2014	100373
ESH2-Z5	LISN	Rohde & Schwarz	Oct. 08, 2014	842966/014
ESH3-Z2	Pulse Limiter	Rohde & Schwarz	May. 10, 2014	357.8810.52

Note : 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to RRA, KRISS, KTL and HCT.

2. The calibration interval of horn ant. and loop ant. is 24 months

◆ Configuration of the equipment under test :

Equipment	Type	Brand	Serial No.
EUT	iLOG-MEMS-Acc	Smart Control & Sensing	0000005
PC	DB400T2A	Samsung Electronics	J9QL98CCCA0002P
Monitor	1708FP1	Dell Inc.	7735431695P0C
Receiver(dongle)	Parani-UD100	Sena Technologies, Inc.	S7APARANIUD100
Keyboard	SKG-3300UB	Samsung Electronics	TAKCB00378
Mouse	M-UV96	HP	E-C011-030-5046

Connecting Interface Cables :

- Mouse cable (Unshielded) : 1.8 m
- Keyboard cable (Unshielded) : 1.8 m
- DC Power cable(EUT) (Unshielded) : 1 m
- VGA cable(Monitor) (Unshielded) : 1.8 m
- AC Power cable(Monitor) (Unshielded) : 1.5 m
- AC Power cable(PC) (Unshielded) : 1.5 m

◆ Test Conditions


Temperature	(20.8 ± 0.2) °C
Humidity	(52.3 ± 0.3) % R.H.
Atmosphere	(1011) mbar

◆ Test Date December. 03, 2013

◆ Test Area Conducted Room #1

## Conducted Emissions

Live Line

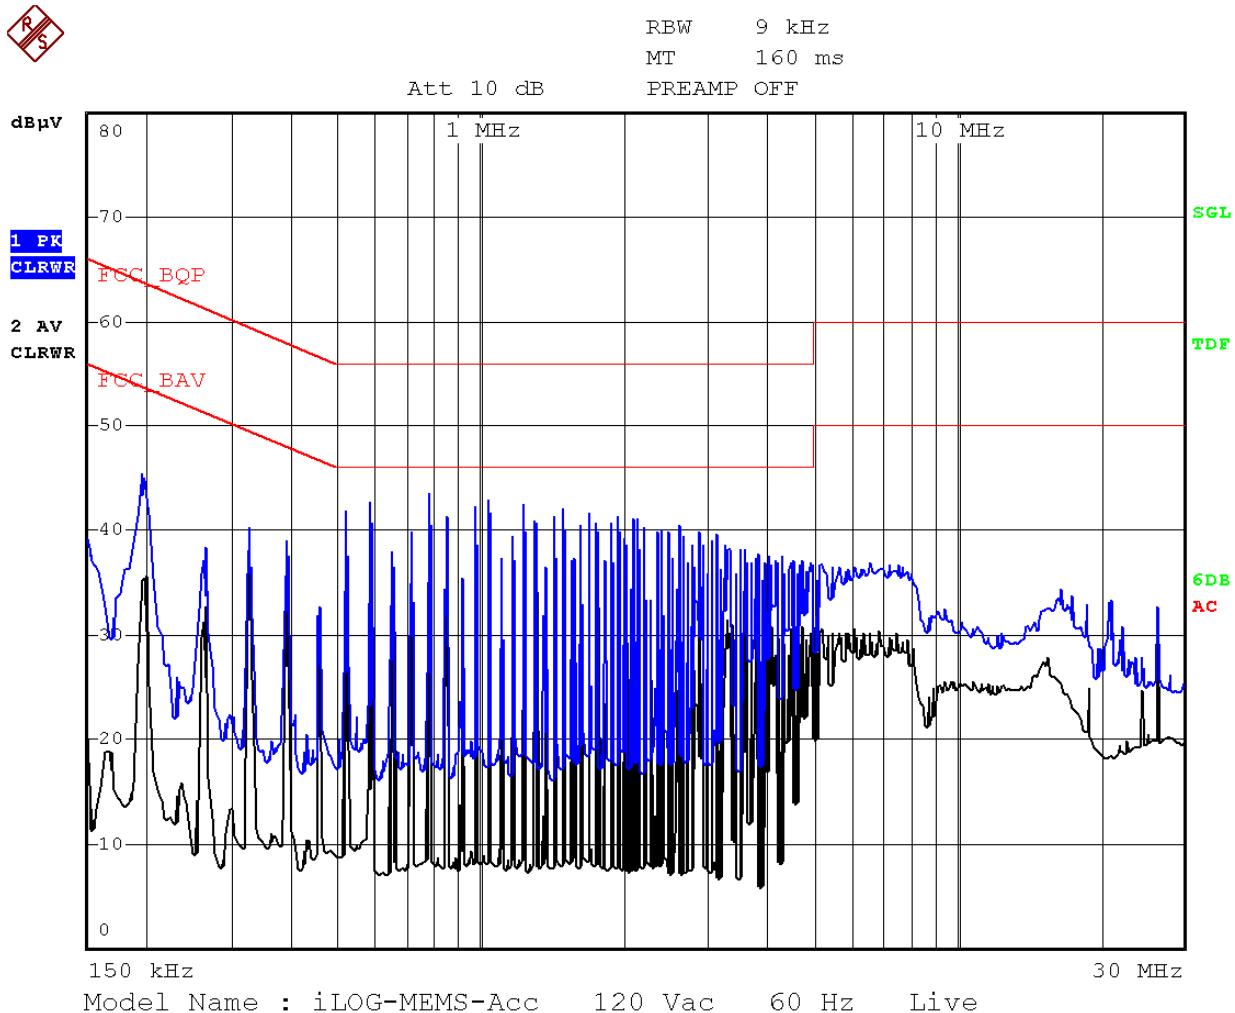


Freq. [MHz]	Measurement [dB $\mu$ V]		Limit [dB $\mu$ V]		Insertion Loss [dB]	Cable Loss [dB]	Result [dB $\mu$ V]		Margin [dB]	
	Q-peak	Average	Q-peak	Average			Q-peak	Average	Q-peak	Average
0.194	44.82	36.24	63.86	53.86	0.12	0.02	44.96	36.38	18.90	17.48
0.326	40.05	37.06	59.55	49.55	0.13	0.03	40.21	37.22	19.34	12.33
0.522	40.51	37.24	56.00	46.00	0.14	0.03	40.68	37.41	15.32	8.59
0.586	42.18	38.53	56.00	46.00	0.14	0.04	42.36	38.71	13.64	7.29
0.782	43.15	39.82	56.00	46.00	0.15	0.06	43.36	40.03	12.64	5.97
1.238	41.95	37.67	56.00	46.00	0.16	0.06	42.17	37.89	13.83	8.11

Note :

## Conducted Emissions

Neutral Line

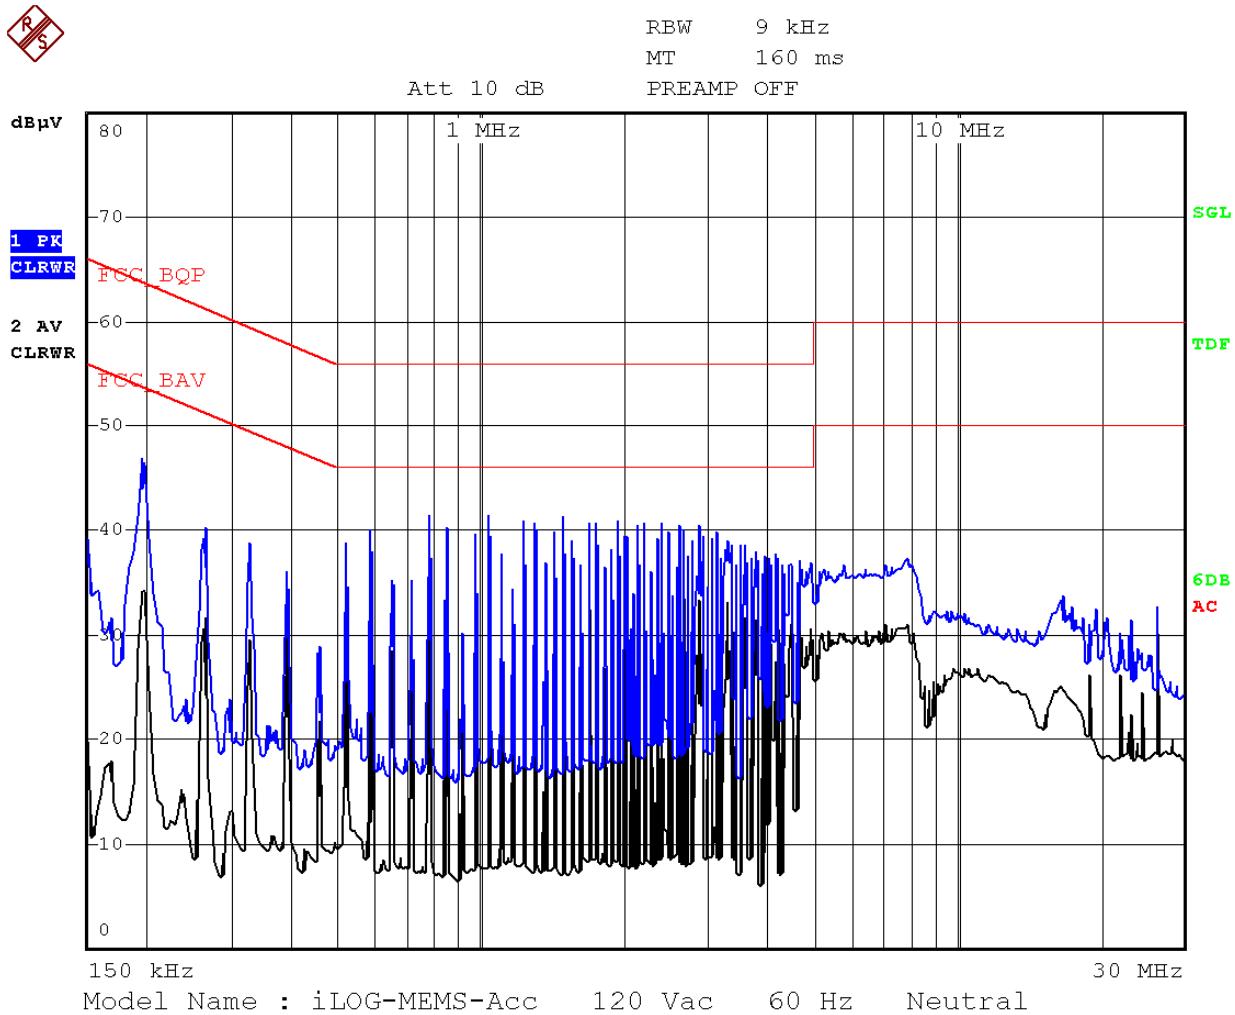

Freq. [MHz]	Measurement [dB $\mu$ V]		Limit [dB $\mu$ V]		Insertion Loss [dB]	Cable Loss [dB]	Result [dB $\mu$ V]		Margin [dB]	
	Q-peak	Average	Q-peak	Average			Q-peak	Average	Q-peak	Average
0.194	45.91	35.24	63.86	53.86	0.12	0.02	46.05	35.38	17.81	18.48
0.262	38.23	31.36	61.37	51.37	0.12	0.03	38.38	31.51	22.99	19.86
0.586	39.42	34.12	56.00	46.00	0.14	0.04	39.60	34.30	16.40	11.70
0.782	40.31	34.53	56.00	46.00	0.15	0.06	40.52	34.74	15.48	11.26
1.042	40.84	35.15	56.00	46.00	0.16	0.05	41.05	35.36	14.95	10.64
1.498	40.12	34.43	56.00	46.00	0.17	0.06	40.35	34.66	15.65	11.34

Note :


## Descriptions of Test

### Radiated Emissions:


The measurement was performed over the frequency range of 30MHz to 1GHz using antenna as the input transducer to a Spectrum analyzer or a Field Intensity Meter. The measurement was made with the detector set for "quasi-peak" within a bandwidth of 120kHz. Procedure of Test

Preliminary measurements were made at 3 meter using bi-log antennas, and spectrum analyzer to determine the frequency producing the max. emission in anechoic chamber. Appropriate precaution was taken to ensure that all emission from the EUT were maximized and investigated. The system configuration, mode of operation, turn-table azimuth and height with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30MHz to 1000MHz using bi-log antenna. Above 1GHz, linearly polarized double ridge horn antennas were used. Final measurements were made at open site with 3-meters test distance using bi-log antenna or horn antenna. The OATS have been verified in regular for its normalized site attenuation. The test equipment was placed on a wooden table. Sufficient time for the EUT, peripheral equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined by manual. The detector function was set to CISPR quasi-peak mode and the bandwidth of the receiver was set to 120kHz or 1MHz depending on the frequency of type of signal. The EUT, peripheral equipment and interconnecting cables were re-configured to the set-up producing the max. emission for the frequency and were placed on top of a 0.8-meter high nonmetallic 1 x 1.5 meter table. The EUT, peripheral equipment, and interconnecting cables were re-arranged and manipulated to maximize each emission. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the maximum emission. Each emission was maximized by: varying the mode of operation to the EUT and/or peripheral equipment and changing the polarity of the antenna, whichever determined the worst-case emission. (The bandwidth below 1GHz setting on the field strength meter is 120KHz and above 1GHz is 1MHz.)


#### Under 1GHz Test Setup:

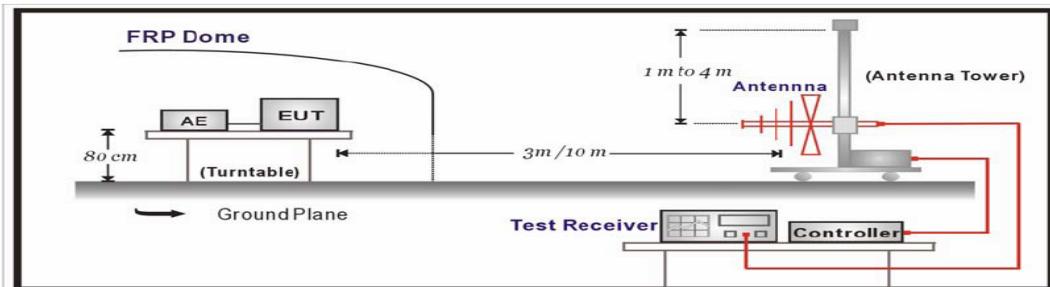

#### Above 1GHz Test Setup:

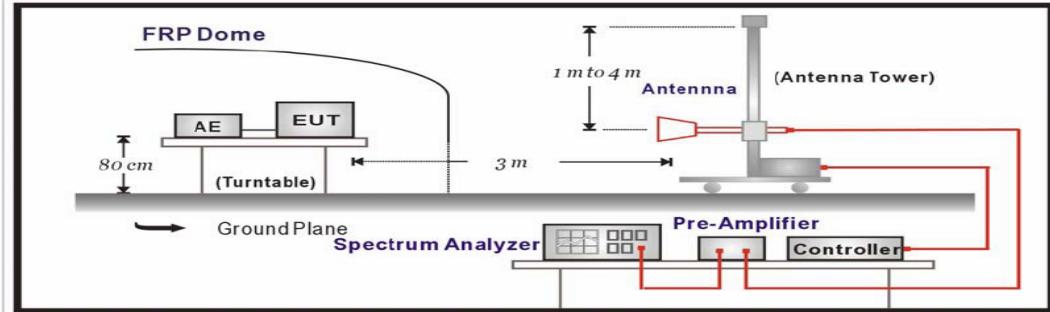

**Below 30 MHz**

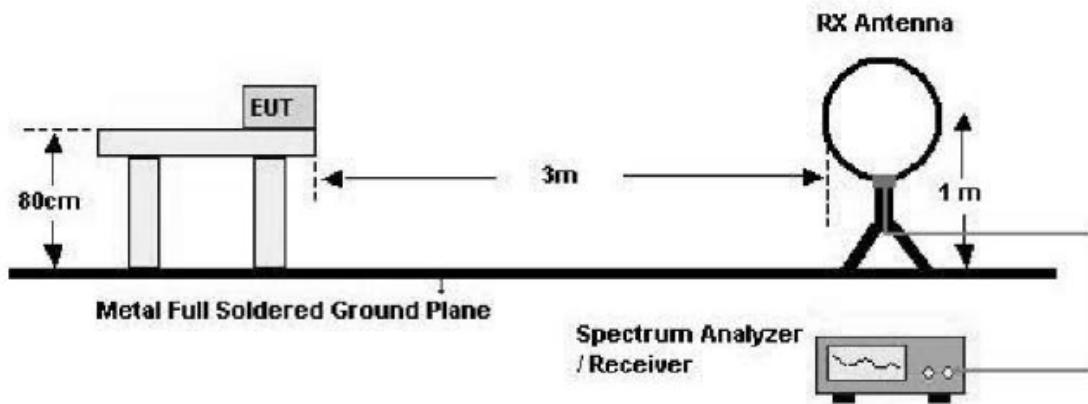

**Limits**

Emissions radiated outside of the specified frequency bands, except for harmonics, Shall be attenuated by at least 20dB below the level of the fundamental or to the General radiated emission limits in paragraph 15.209, whichever is the lesser attenuation:

FCC Part 15 Subpart C Section 15.209 Limits		
Frequency (MHz)	$\mu\text{V}/\text{meter}$	$\text{dB}\mu\text{V}/\text{meter (3m)}$
0.009-0.490	2400/F(KHz) at 300 m	20log 2400/F(KHz)+80
0.490-1.705	24000/F(KHz) at 30m	20log 24000/F(KHz)+40
1.705-30	30 at 30 m	49.5
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

**Remarks :**

1. RF Voltage ( $\text{dB}\mu\text{V}$ ) =  $20\log \text{RF Voltage} (\mu\text{V})$
2.  $\text{dB}\mu\text{V}/\text{m} = \text{ERP} (\text{dBm}) + 106.92 \text{ dB} + 20\log(10\text{m}/3\text{m}) + 2.15\text{dB}$  (conversion Factor for E.I.R.P)
3. In the Above Table, the tighter limit applies at the band edges.
4. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

Test specification.

According to FCC CFR Title 47 Part 15 Subpart C Section 15.209.

## Radiated Spurious Emission

**[Applicable]**

◆ Test Equipment Used

Name	Type	Manufacturer	Due for Cal	Serial Number
ESCS30	EMI Receiver	Rohde & Schwarz	May 10, 2014	100171
SPECTRUM ANALYZER	R3273	ADVANTEST	Oct. 07, 2014	95090431
Loop Antenna	HFH2-Z2	Rohde & Schwarz	Oct. 26, 2014	8620771017
Log-bicon Antenna	VULB9161SE	Schwarz beck	Mar. 28, 2014	3047
HORN-Antenna	3115	EMCO	Oct. 25, 2015	9012-3602
PRE AMPLIFIER	8449B OPT H02	Rohde & Schwarz	Oct. 08, 2014	3008A0530

Note : 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to RRA, KRISS, KTL and HCT.  
 2. The calibration interval of horn ant. and loop ant. is 24 months

### Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. For the limit is employed average value, therefore the peak value can be transferred to average value by subtracting the duty factor. The basic equation with a sample calculation is as follows:

$$\text{Peak} = \text{Reading} + \text{Corrected Factor}$$

Where Corr. Factor = Antenna Factor + Cable Factor - Amplifier Gain (if any)

### **Radiated Emissions Test, 9 kHz to 30 MHz (Magnetic Field Test)**

1. The preliminary radiated measurements were performed to determine the frequency producing the maximum emissions at a distance of 3 meters according to Section 15.31(f)(2).
2. The EUT was placed on the top of the 0.8-meter height, 1 x 1.5 meter non-metallic table.
3. Emissions from the EUT are maximized by adjusting the orientation of the Loop antenna and rotating the EUT on the turntable. Manipulating the system cables also maximizes EUT emissions if applicable.
4. To obtain the final measurement data, each frequency found during preliminary measurements was re-examined and investigated. The test-receiver system was set up to average, peak, and quasi-peak detector with specified bandwidth.
5. The result was 20dB lower than the limit line 15.31(o) was not reported.

### **Radiated Emission Result**

Frequency	Reading	P	Ant. Factor	Cable Loss	Limit	Total	Margin
MHz	dBuV	(H, V)	dB	dB	dBuV	dBuV	dB

Note : The result was 20dB lower than the limit line 15.31(o) was not reported.

Radiated Emission Result  
Under 1GHz

[Applicable]

DH5

Frequency MHz	Reading dBuV	P (H, V)	Ant. Factor dB	Cable Loss dB	Limit dBuV	Total dBuV	Margin dB
*42.613	16.90	V	12.04	1.11	40.00	30.05	-9.95
78.507	17.20	V	8.33	1.48	40.00	27.01	-12.99
87.232	16.70	H	7.89	1.55	40.00	26.14	-13.86
127.005	17.10	V	12.01	1.88	43.50	30.99	-12.51
186.172	15.60	H	10.98	2.29	43.50	28.87	-14.63
236.618	17.60	V	10.92	2.62	46.00	31.14	-14.86

3DH5

Frequency MHz	Reading dBuV	P (H, V)	Ant. Factor dB	Cable Loss dB	Limit dBuV	Total dBuV	Margin dB
*40.672	16.40	V	11.96	1.08	40.00	29.44	-10.56
62.015	15.70	V	11.27	1.35	40.00	28.32	-11.68
87.234	16.00	H	7.89	1.55	40.00	25.44	-14.56
100.813	16.30	V	9.30	1.71	43.50	27.31	-16.19
114.395	13.80	H	11.00	1.80	43.50	26.60	-16.90
143.497	11.80	H	12.71	1.99	43.50	26.50	-17.00
248.256	17.90	V	11.27	2.68	46.00	31.85	-14.15

Note :

1. Remark "\*" means that the data is the worst emission level.
2. All reading levels are Quasi-peak value.
3. Measurement level = reading level + correct factor

### Above 1Ghz

EUT :	iLOG-MEMS-Acc	PROBE :	Above 1 GHz
MODE :	DH5	NOTE :	Low Ch

#### Test Data

Frequency GHz	Reading dBuV		P	Limit		Margin		
	dBuV			Peak	AV	Peak	AV	
	Peak	AV		Peak	AV	Peak	AV	
1.214	36.79	25.21	V	74.00	54.00	37.21	28.79	
2.982	42.21	27.62	V	74.00	54.00	31.79	26.38	
6.821	43.09	25.75	V	74.00	54.00	30.91	28.25	
2.893	45.24	30.01	H	74.00	54.00	28.76	23.99	
3.254	41.30	29.98	H	74.00	54.00	32.70	24.02	
4.725	54.27	40.27	H	74.00	54.00	19.73	13.73	

#### Restricted Band Edge Test Data

Frequency GHz	Reading dBuV		P	Limit		Margin		
	dBuV			Peak	AV	Peak	AV	
	Peak	AV		Peak	AV	Peak	AV	
2.385	45.35	30.27	V	74.00	54.00	28.65	23.73	
2.386	46.74	34.63	H	74.00	54.00	27.26	19.37	

EUT :	iLOG-MEMS-Acc	PROBE :	Above 1 GHz
MODE :	DH5	NOTE :	Middle Ch

#### Test Data

Frequency GHz	Reading dBuV		P	Limit		Margin		
	dBuV			Peak	AV	Peak	AV	
	Peak	AV		Peak	AV	Peak	AV	
1.216	40.64	34.58	V	74.00	54.00	33.36	19.42	
3.121	42.85	31.24	V	74.00	54.00	31.15	22.76	
5.021	41.19	28.56	V	74.00	54.00	32.81	25.44	
7.068	48.24	35.69	V	74.00	54.00	25.76	18.31	
1.214	40.03	34.32	H	74.00	54.00	33.97	19.68	
5.025	42.34	32.37	H	74.00	54.00	31.66	21.63	
5.223	43.72	29.58	H	74.00	54.00	33.36	19.42	

EUT :	iLOG-MEMS-Acc	PROBE :	Above 1 GHz
MODE :	DH5	NOTE :	High Ch

Test Data

Frequency GHz	Reading dBuV		P	Limit dBuV		Margin dB	
	Peak	AV		Peak	AV	Peak	AV
	1.222	41.26	35.21	V	74.00	54.00	32.74
4.834	60.99	46.32	V	74.00	54.00	13.01	7.68
9.036	50.02	38.73	V	74.00	54.00	23.98	15.27
1.225	41.84	34.65	H	74.00	54.00	32.16	19.35
4.901	52.64	40.22	H	74.00	54.00	21.36	13.78
5.182	48.72	35.54	H	74.00	54.00	25.28	18.46

Restricted Band Edge Test Data

Frequency GHz	Reading dBuV		P	Limit dBuV		Margin dB	
	Peak	AV		Peak	AV	Peak	AV
	2.484	47.64	34.46	V	74.00	54.00	26.36
2.484	52.43	37.35	H	74.00	54.00	21.57	16.65

Note : Reading(dBuV) : Measurement Level + Ant Factor + Cable Loss - Amp Gain

EUT :	iLOG-MEMS-Acc	PROBE :	Above 1 GHz
MODE :	3DH5	NOTE :	Low Ch

Test Data

Frequency GHz	Reading dBuV		P	Limit		Margin		
	dBuV			Peak		AV		
	Peak	AV		Peak	AV	Peak	AV	
1.224	40.64	30.61	V	74.00	54.00	33.36	23.39	
1.578	47.44	29.93	V	74.00	54.00	26.56	24.07	
4.838	58.42	42.52	V	74.00	54.00	15.58	11.48	
1.577	48.34	28.15	H	74.00	54.00	25.66	25.85	
2.643	40.26	29.89	H	74.00	54.00	33.74	24.11	
4.835	54.13	41.25	H	74.00	54.00	19.87	12.75	
5.824	45.47	33.27	H	74.00	54.00	28.53	20.73	

Restricted Band Edge Test Data

Frequency GHz	Reading dBuV		P	Limit		Margin		
	dBuV			Peak		AV		
	Peak	AV		Peak	AV	Peak	AV	
2.386	49.82	30.15	V	74.00	54.00	24.18	23.85	
2.384	50.81	29.72	H	74.00	54.00	23.19	24.28	

EUT :	iLOG-MEMS-Acc	PROBE :	Above 1 GHz
MODE :	3DH5	NOTE :	Middle Ch

Test Data

Frequency GHz	Reading dBuV		P	Limit		Margin		
	dBuV			Peak		AV		
	Peak	AV		Peak	AV	Peak	AV	
1.523	50.36	34.25	V	74.00	54.00	23.64	19.75	
4.759	59.57	39.42	V	74.00	54.00	14.43	14.58	
5.236	41.54	34.95	V	74.00	54.00	32.46	19.05	
6.988	50.22	33.47	H	74.00	54.00	23.78	20.53	
1.535	48.32	32.27	H	74.00	54.00	25.68	21.73	
4.762	57.48	40.73	H	74.00	54.00	16.52	13.27	
5.115	44.52	35.92	H	74.00	54.00	29.48	18.08	
8.423	50.46	34.29	H	74.00	54.00	23.54	19.71	

EUT :	iLOG-MEMS-Acc	PROBE :	Above 1 GHz
MODE :	3DH5	NOTE :	High Ch

Test Data

Frequency GHz	Reading dBuV		P	Limit dBuV		Margin dB	
	Peak	AV		Peak	AV	Peak	AV
	1.232	45.62	35.71	V	74.00	54.00	28.38
1.665	49.05	35.43	V	74.00	54.00	24.95	18.57
4.615	52.32	40.25	V	74.00	54.00	21.68	13.75
8.209	50.37	36.97	H	74.00	54.00	23.63	17.03
1.224	44.74	35.85	H	74.00	54.00	29.26	18.15
1.663	52.25	36.49	H	74.00	54.00	21.75	17.51
5.597	44.42	33.14	H	74.00	54.00	29.58	20.86

Restricted Band Edge Test Data

Frequency GHz	Reading dBuV		P	Limit dBuV		Margin dB	
	Peak	AV		Peak	AV	Peak	AV
	2.485	47.68	38.45	H	74.00	54.00	26.32
2.485	52.34	43.67	V	74.00	54.00	21.66	10.33

Note : Reading(dBuv) : Measurement Level + Ant Factor + Cable Loss - Amp Gain

### Peak Power Output

#### ◆ Test Equipment

The following test equipment are used during the test:

Item	Equipment	Manufacturer	Model no/Serial No.	Last Cal.
1	Spectrum Analyzer	ADVANTEST	R3273 / 95090431	Oct. 07, 2013
2	RF ROOM			


*Note : All equipment upon which need to calibrated are with calibration period of 1 year.*

#### ◆ Limits

The maximum peak output power of the intentional radiator shall not exceed the following :

1. According to § 15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz : 1Watt.
2. According to § 15.247(b)(4), the conducted output power limit specified in paragraph(b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph(c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs(b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

#### ◆ Test Setup

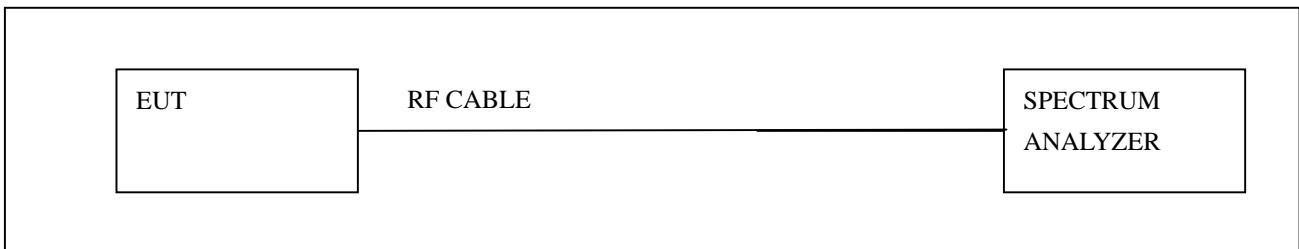

#### ◆ Test Procedure

The transmitter output is connected to the Spectrum analyzer. The Spectrum analyzer is set to the peak power detection.


### Peak Power Test result

Product	iLOG-MEMS-Acc			
Test Item	Peak Output Power			
Test Mode	Tx / Channel 0, 39, 78			
Test Site	RF Room			
Measurement Method	Conducted			


DH5

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
0	2402	3.73	1Watt=30dBm	Pass
39	2441	2.73	1Watt=30dBm	Pass
78	2480	2.60	1Watt=30dBm	Pass


Channel 0

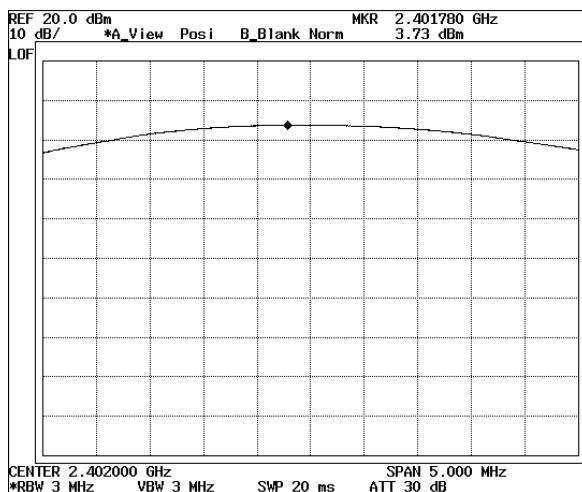

Channel 39

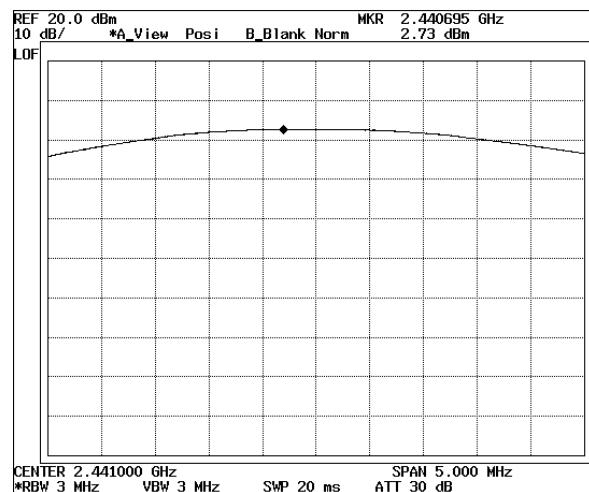

Channel 78

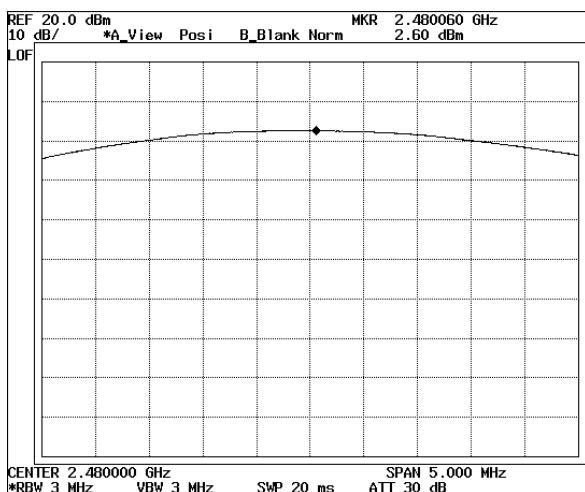



### Peak Power Test result

Product	iLOG-MEMS-Acc
Test Item	Peak Output Power
Test Mode	Tx / Channel 0, 39, 78
Test Site	RF Room
Measurement Method	Conducted


3DH5

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
0	2402	3.58	1Watt=30dBm	Pass
39	2441	2.43	1Watt=30dBm	Pass
78	2480	1.93	1Watt=30dBm	Pass

Channel 0

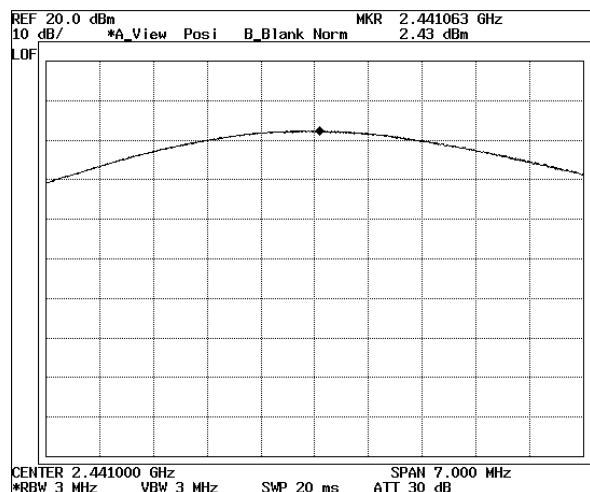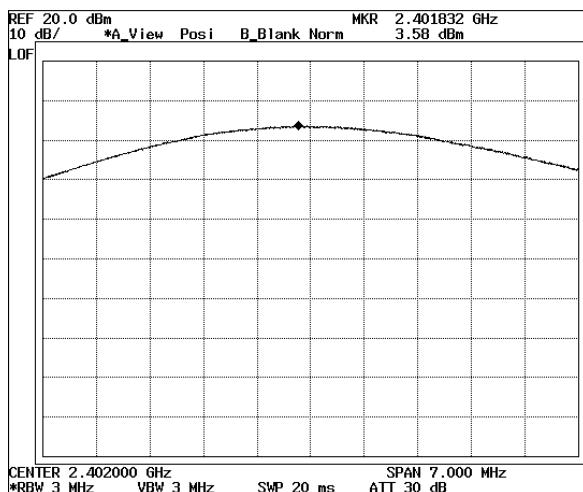

Channel 78

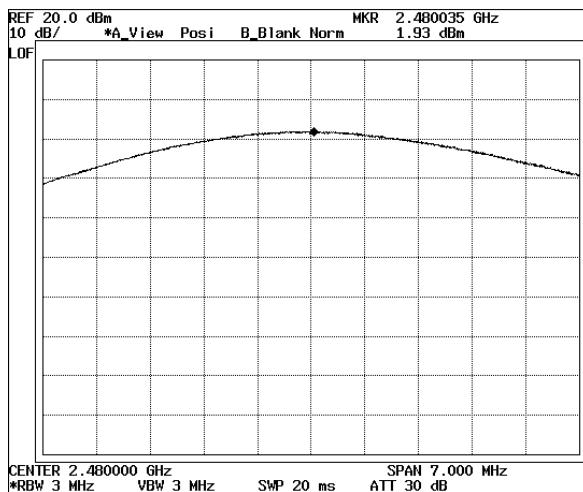

Note : Measurement level = reading level + correct factor

## Conducted Spurious Emissions &

### Band Edge

#### ◆ TEST Equipment

The following test equipment are used during the test:


Item	Equipment	Manufacturer	Model no/Serial No.	Last Cal.
1	Spectrum Analyzer	ADVANTEST	R3273 / 95090431	Oct. 07, 2013
2	RF ROOM			

*Note : All equipment upon which need to calibrated are with calibration period of 1 year.*

#### ◆ Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio Frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within The band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in section 15.209(a) is not required. In addition, radiated emission which fall in the restricted bands, as defined in section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a)(see Section 15.205(c)).

#### ◆ Test Setup

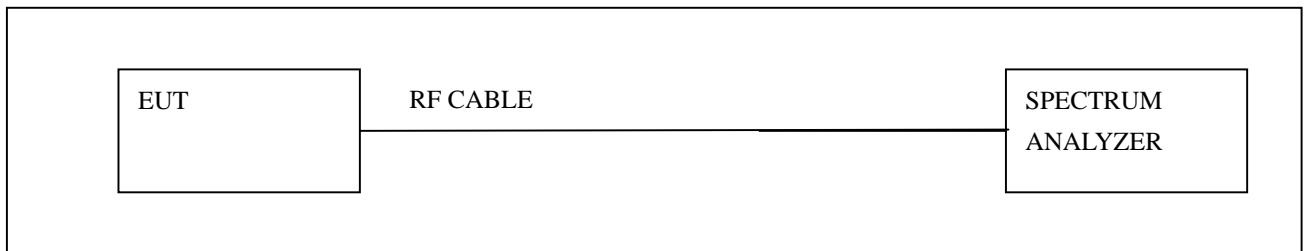

#### ◆ Test Procedure

The transmitter output is connected to the Spectrum analyzer.


According to FCC CFR Title 47 Part 15 Subpart C Section 15.247

### Conducted Spurious Emission Test result


Product	iLOG-MEMS-Acc
Test Item	Conducted Spurious Emission
Test Mode	Tx / Channel 0, 39, 78, Hopping
Test Site	RF Room
Measurement Method	Conducted

DH5


Channel 0 (2402 MHz)

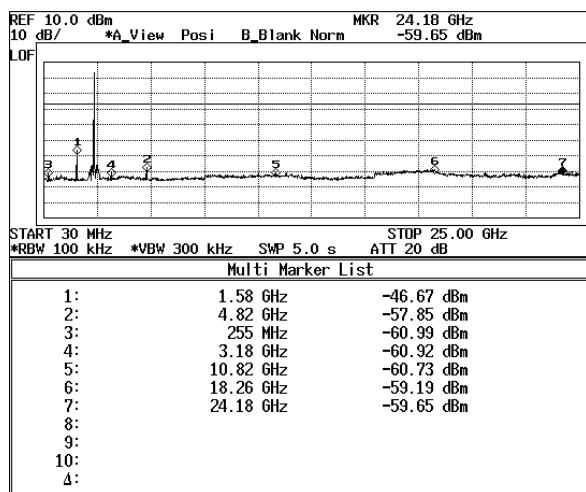


Channel 39 (2441 MHz)

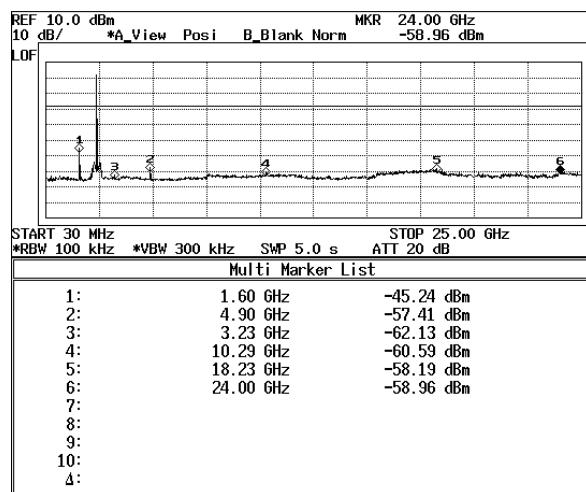

Channel 78 (2480 MHz)

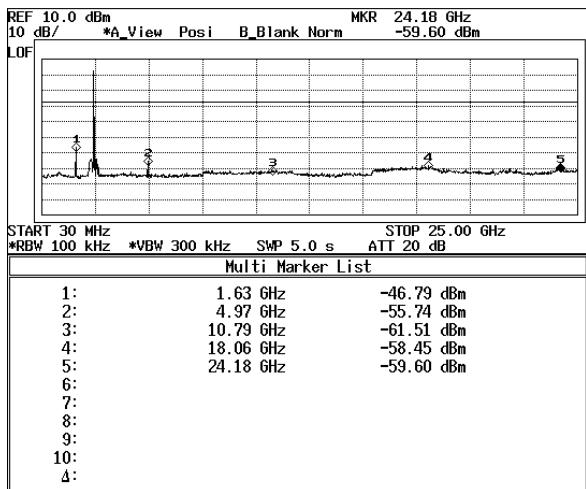

Hopping mode

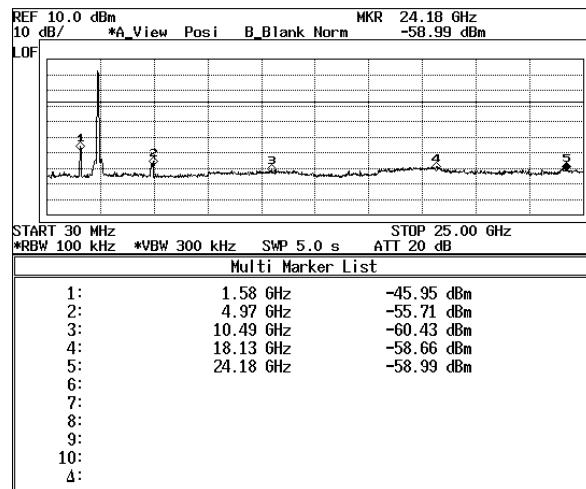


### Conducted Spurious Emission Test result


Product	iLOG-MEMS-Acc
Test Item	Conducted Spurious Emission
Test Mode	Tx / Channel 0, 39, 78, Hopping
Test Site	RF Room
Measurement Method	Conducted

3DH5


Channel 0 (2402 MHz)

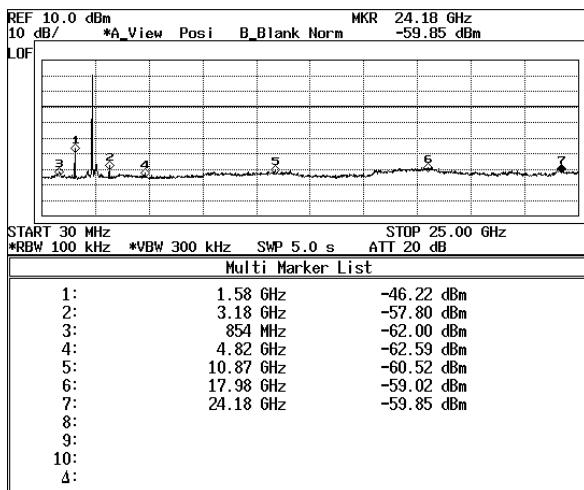


Channel 39 (2441 MHz)

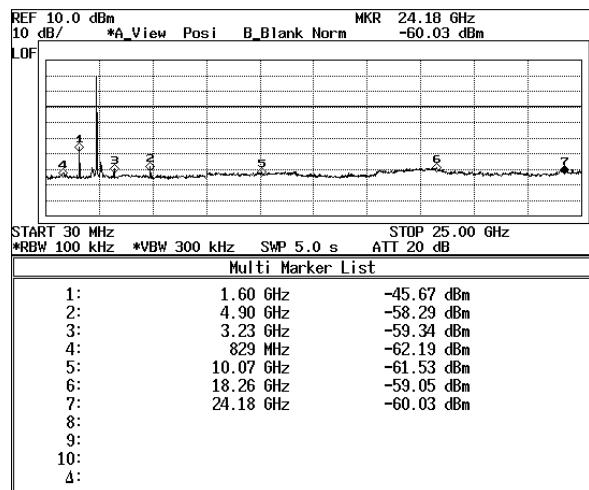

Channel 78 (2480 MHz)

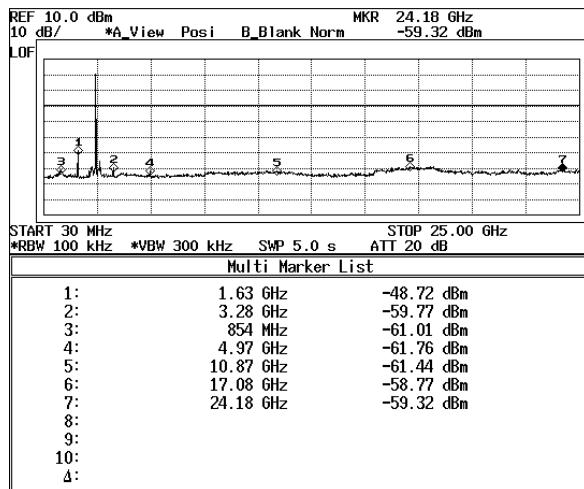

Hopping mode

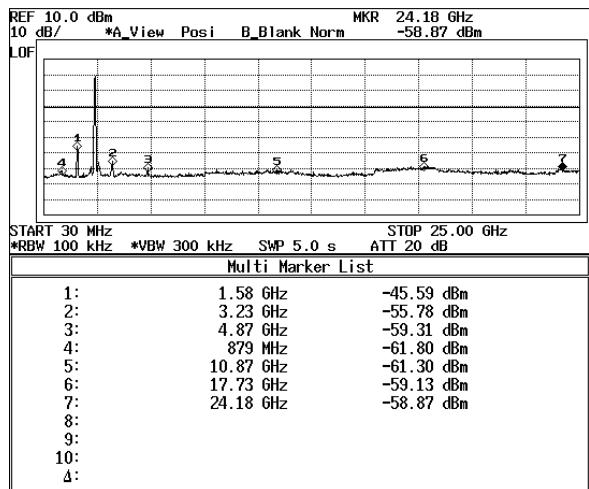



### Band Edge Test result

Product	iLOG-MEMS-Acc
Test Item	Band Edge
Test Mode	Tx / Channel 0, 39, 78, Hopping
Test Site	RF Room
Measurement Method	Conducted

DH5



Channel : 0 CH(2402 MHz)

Hopping mode

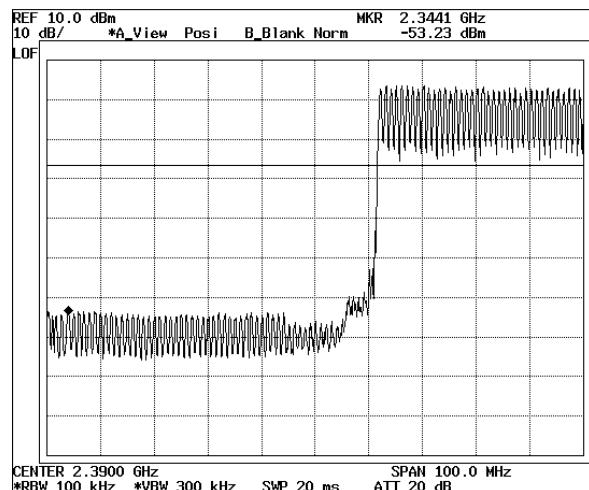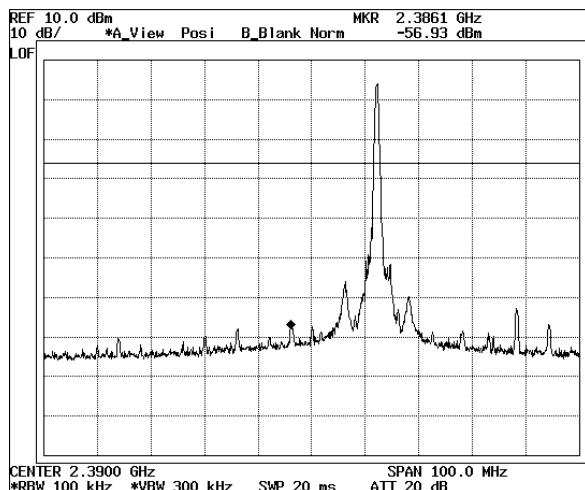

Channel : 78 CH(2480 MHz)

Hopping mode

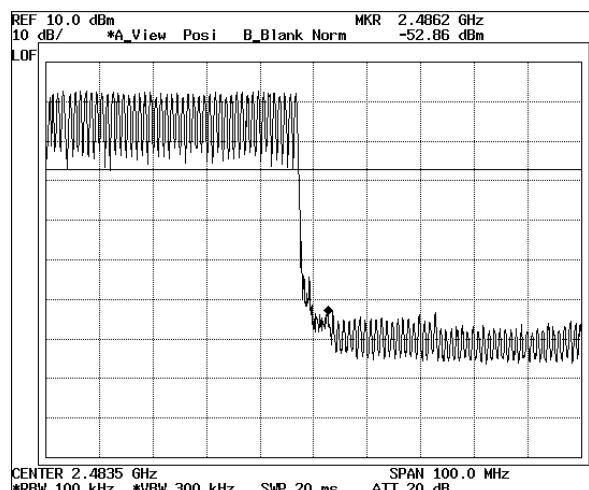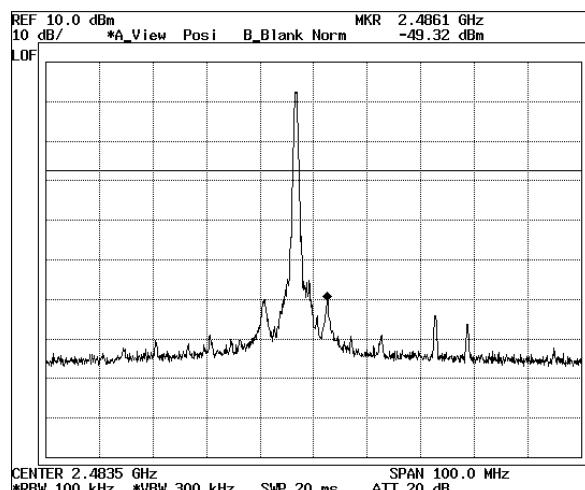



### Band Edge Test result

Product	iLOG-MEMS-Acc
Test Item	Band Edge
Test Mode	Tx / Channel 0, 39, 78, Hopping
Test Site	RF Room
Measurement Method	Conducted

3DH5



Channel : 0 CH(2402 MHz)

Hopping mode

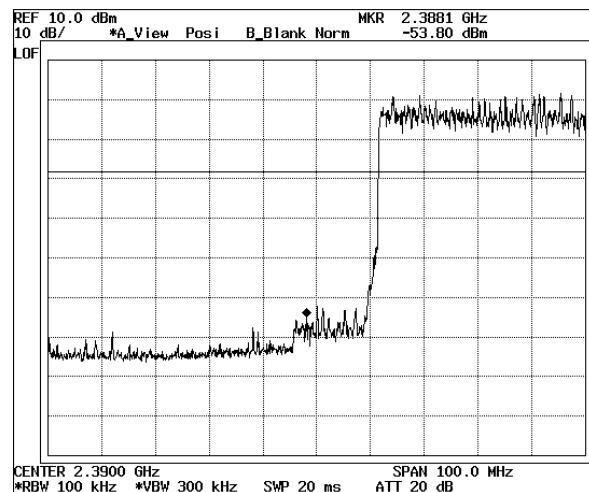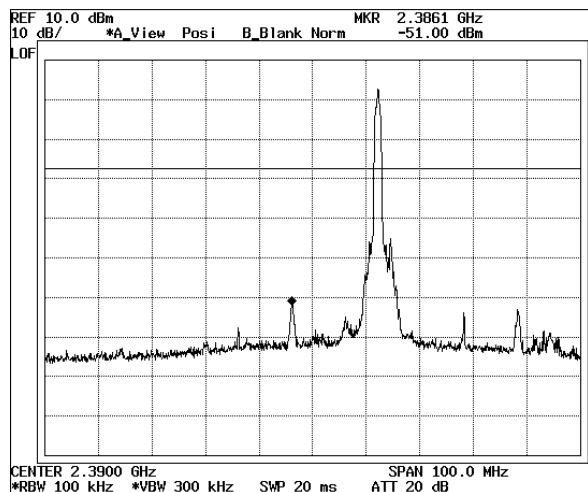

Channel : 78 CH(2480 MHz)

Hopping mode

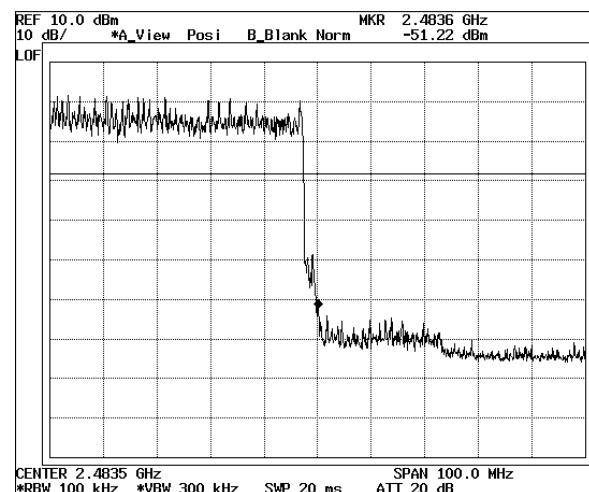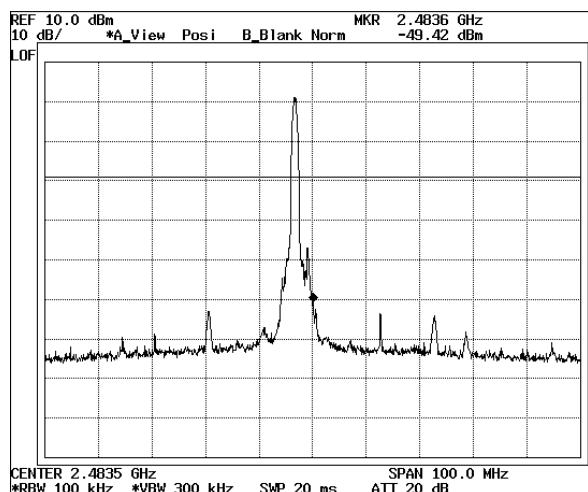

## Frequency Separation &

### 20dB Bandwidth/Occupied Bandwidth


#### ◆ Test Equipment

The following test equipment are used during the test:

Item	Equipment	Manufacturer	Model no/Serial No.	Last Cal.
1	Spectrum Analyzer	ADVANTEST	R3273 / 95090431	Oct.07, 2013
2	RF ROOM			

*Note : All equipment upon which need to calibrated are with calibration period of 1 year.*

#### ◆ Test Setup

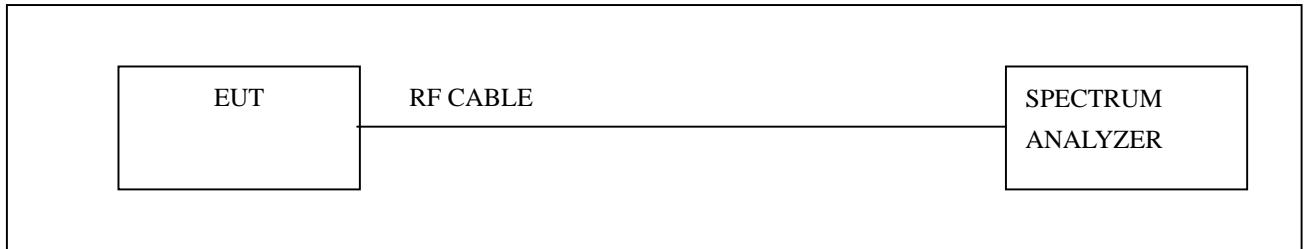

#### ◆ Limits

According to 15.247(a)(1), Frequency hopping systems operation in the 2400-2483.5 MHz band may have hopping carrier frequencies that are separated by 25 KHz or two-third of 20 dB band width of hopping channel, is greater.

#### ◆ Test Procedure

The transmitter output is connected to the Spectrum analyzer.

According to FCC CFR Title 47 Part 15 Subpart C Section 15.247

### 20dB BandWidth Test result


Product	iLOG-MEMS-Acc
Test Item	20dB BandWidth
Test Mode	Tx / Channel 0, 39, 78
Test Site	RF Room
Measurement Method	Conducted

#### 20dB Bandwidth


DH5

Channel	20dB Band width (KHz)	Result
Low CH	895	
Middle CH	898	
High CH	898	Pass


Low Channel

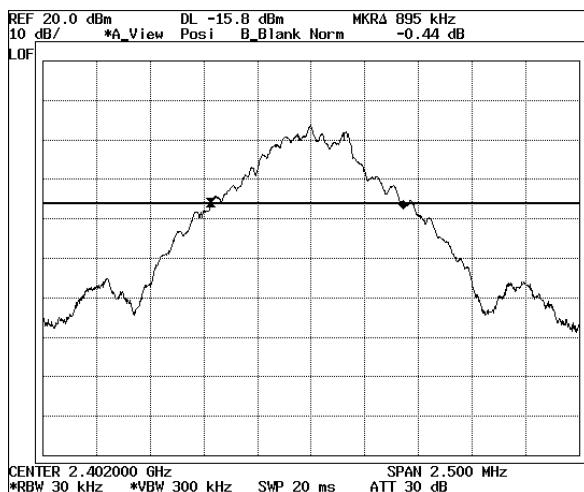

Mid Channel

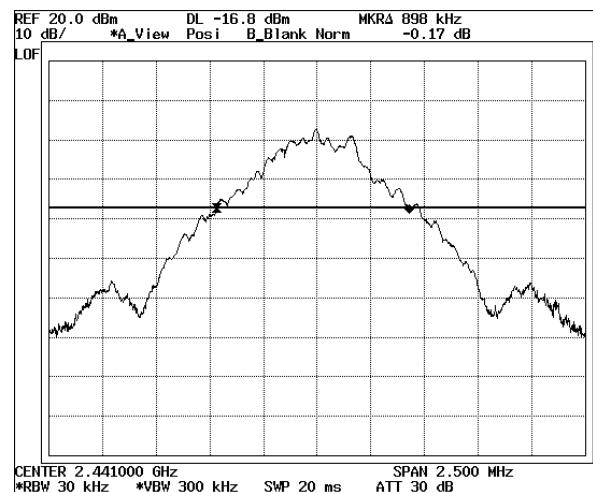

High Channel

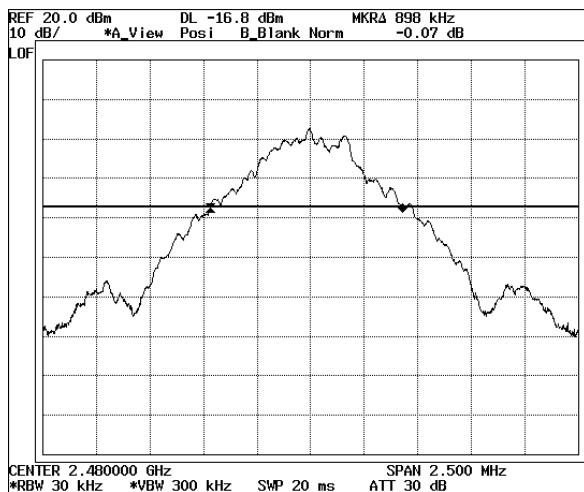

### 20dB BandWidth Test result


Product	iLOG-MEMS-Acc
Test Item	20dB BandWidth
Test Mode	Tx / Channel 0, 39, 78
Test Site	RF Room
Measurement Method	Conducted

#### 20dB Bandwidth


3DH5

Channel	20dB Band width (KHz)	Result
Low CH	1270	Pass
Middle CH	1265	
High CH	1260	


Low Channel

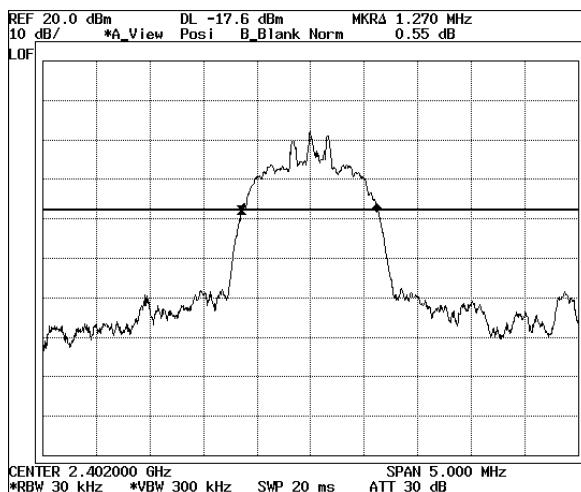

Mid Channel

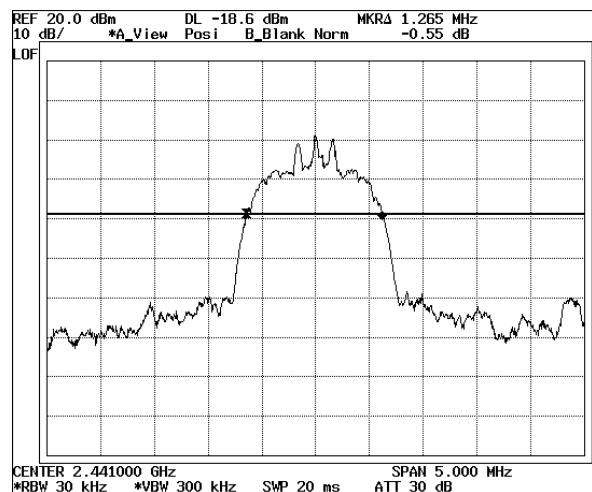

High Channel

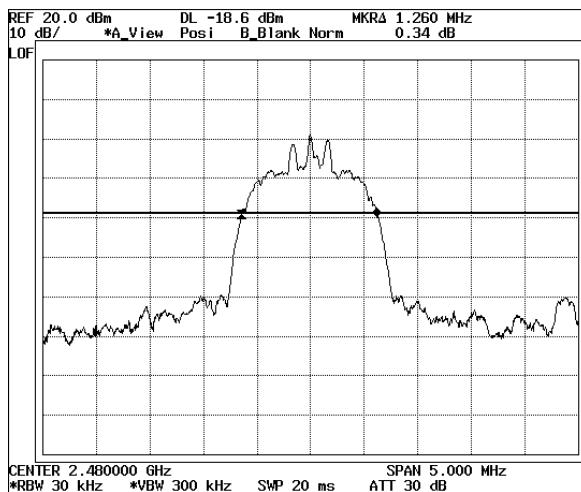

### Channel Separation Test result


Product	iLOG-MEMS-Acc
Test Item	Channel Separation
Test Mode	Tx / Channel 0, 39, 78
Test Site	RF Room
Measurement Method	Conducted

#### Channel Separation


DH5

Channel	Channel Separation (KHz)	20dB bandwidth (KHz)	Limit (KHz)	Result
Low CH	1000	895	>25 or >2/3 of the 20dB BW	Pass
Middle CH	1000	898		
High CH	1000	898		


Low Channel

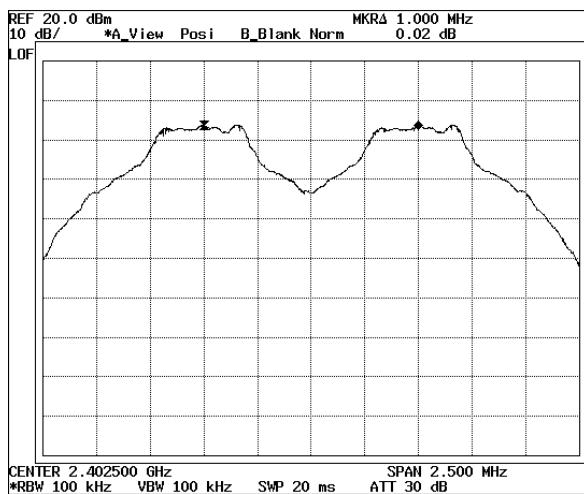

Mid Channel

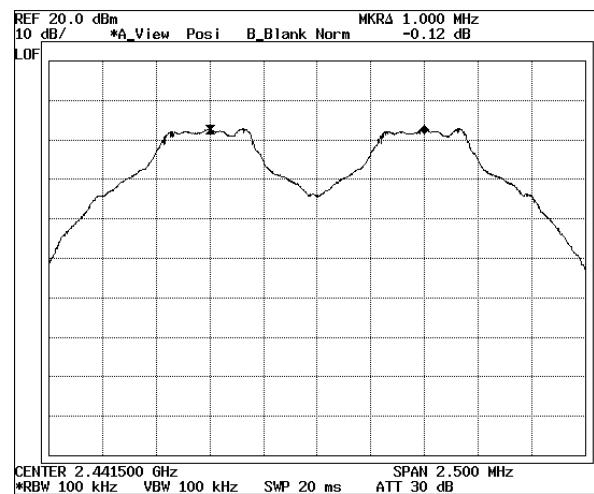

High Channel

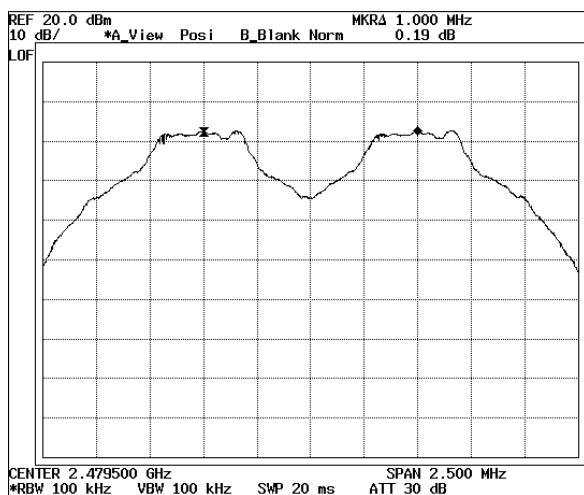

### Channel Separation Test result


Product	iLOG-MEMS-Acc
Test Item	Channel Separation
Test Mode	Tx / Channel 0, 39, 78
Test Site	RF Room
Measurement Method	Conducted

#### Channel Separation


3DH5

Channel	Channel Separation (KHz)	20dB bandwidth (KHz)	Limit (KHz)	Result
Low CH	1008	1270	>25 or >2/3 of the 20dB BW	Pass
Middle CH	1008	1265		
High CH	1008	1260		


Low Channel

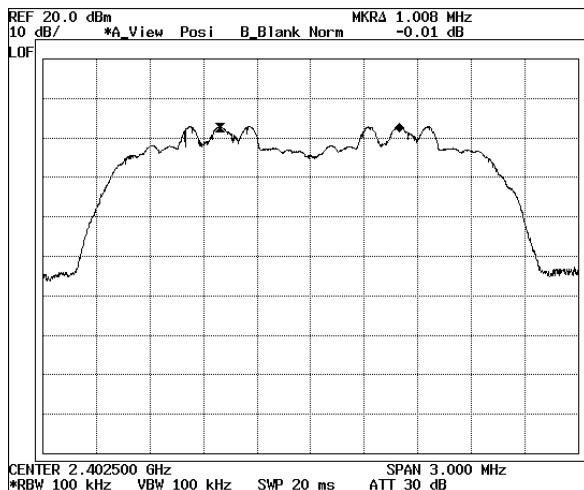

Mid Channel

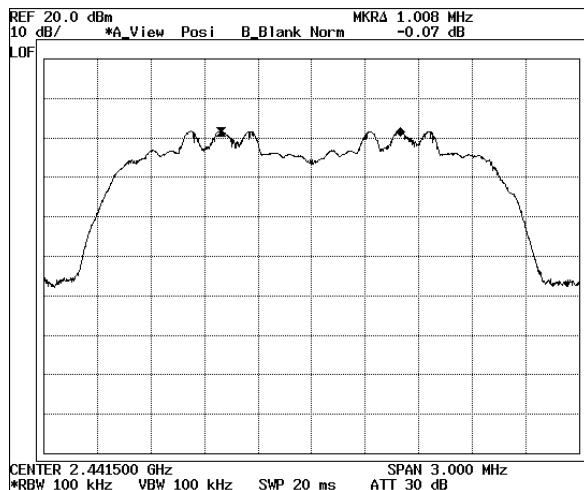

High Channel

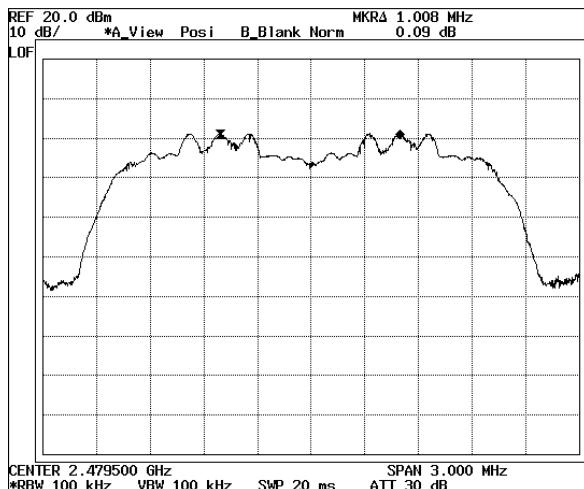

### Occupied Bandwidth Test result

Product	iLOG-MEMS-Acc
Test Item	Occupied Bandwidth
Test Mode	Tx / Channel 0, 39, 78
Test Site	RF Room
Measurement Method	Conducted



#### Occupied Bandwidth(99%)

DH5


Channel	99% BW(KHz)	Result
Low CH	891	Pass
Middle CH	891	
High CH	891	

Low Channel

Mid Channel

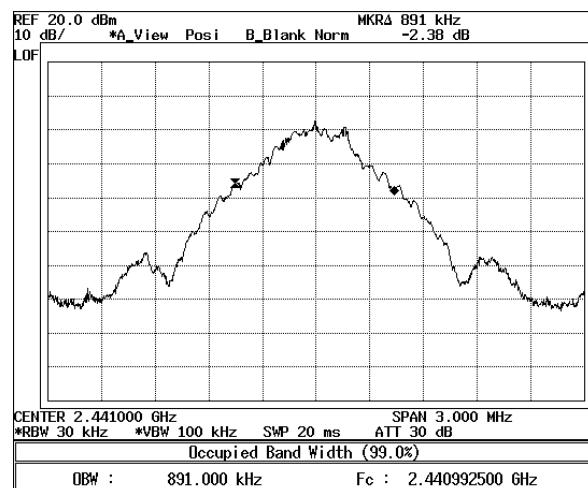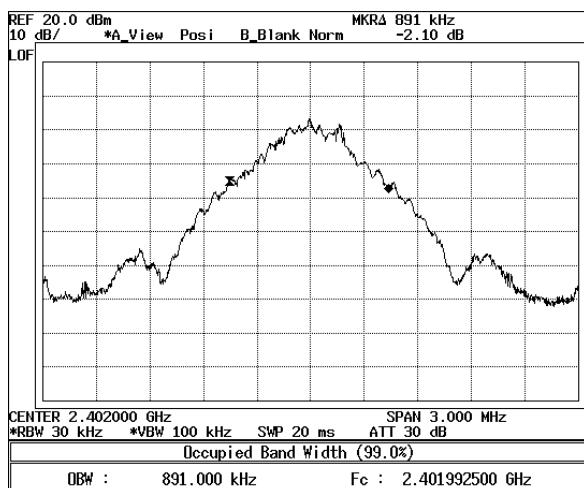

High Channel

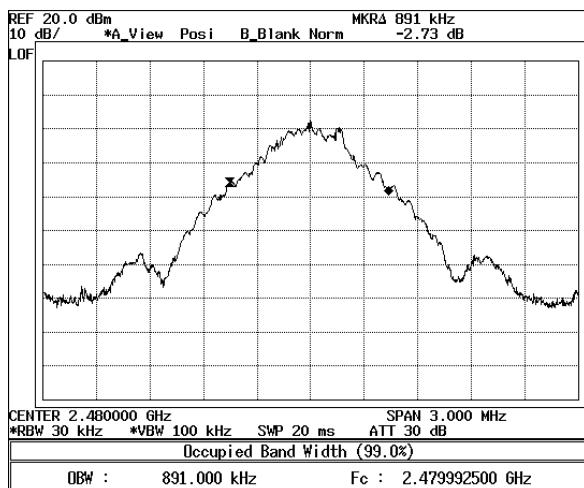

### Occupied Bandwidth Test result

Product	iLOG-MEMS-Acc
Test Item	Occupied Bandwidth
Test Mode	Tx / Channel 0, 39, 78
Test Site	RF Room
Measurement Method	Conducted



#### Occupied Bandwidth(99%)

3DH5


Channel	99% BW(KHz)	Result
Low CH	1170	Pass
Middle CH	1170	
High CH	1170	

Low Channel

Mid Channel

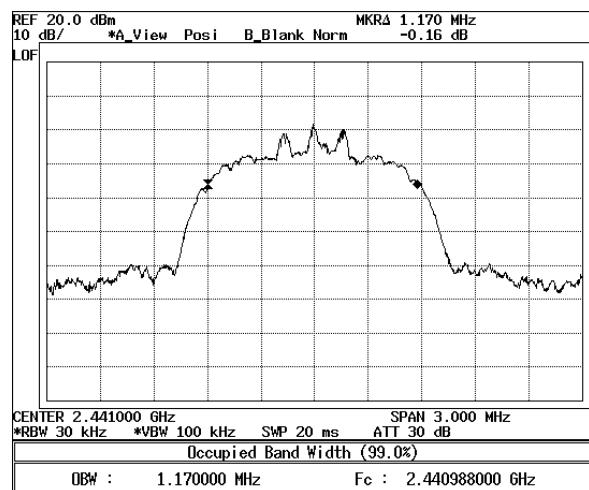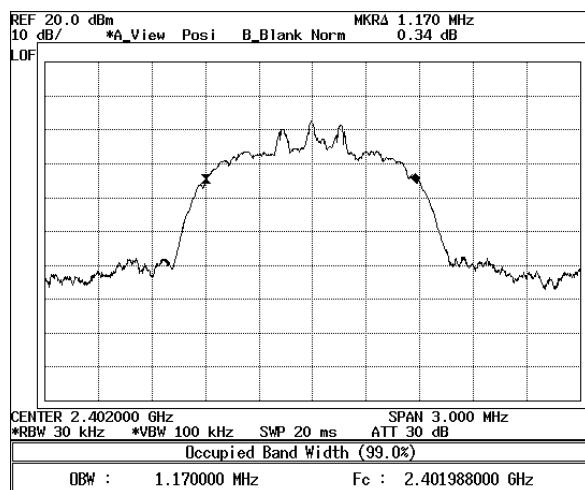

High Channel

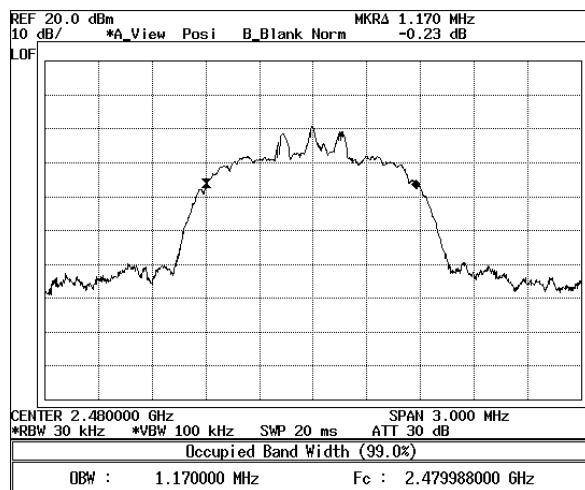

### Number of Hopping Frequency


#### ◆ Test Equipment

The following test equipment are used during the test:

Item	Equipment	Manufacturer	Model no/Serial No.	Last Cal.
1	Spectrum Analyzer	ADVANTEST	R3273 / 95090431	Oct.07, 2013
2	RF ROOM			

*Note : All equipment upon which need to calibrated are with calibration period of 1 year.*

#### ◆ Test Setup

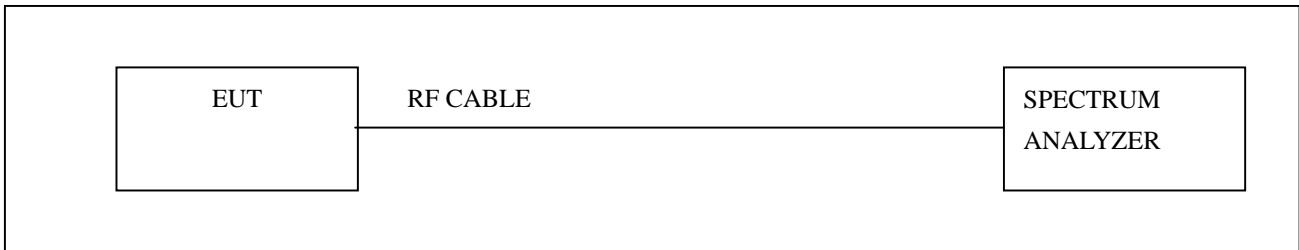

#### ◆ Limits

According to 15.247(a)(1)(ii), Frequency hopping systems operation in the 2400-2483.5 MHz bands shall use at least 15 hopping frequencies.

#### ◆ Test Procedure

The transmitter output is connected to the Spectrum analyzer.



According to FCC CFR Title 47 Part 15 Subpart C Section 15.247

### Number of Hopping Frequency Test result



Product	iLOG-MEMS-Acc	
Test Item	Number of Hopping Frequency	
Test Mode	Transmit	
Test Site	RF Room	
Measurement Method	Conducted	

Channel (No. of channel)	Limit (No. of channel)	Result
79	>15	Pass

DH5

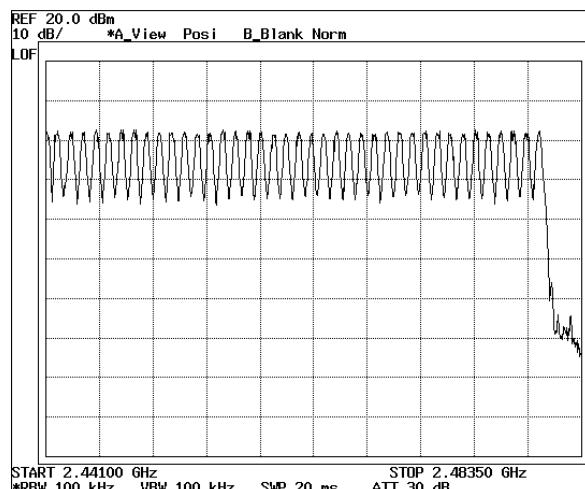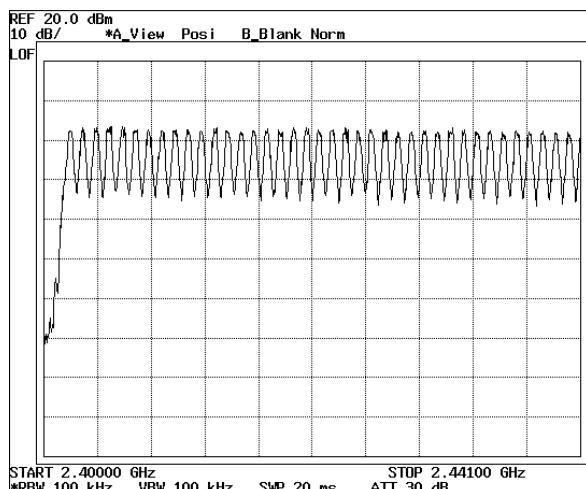

3DH5

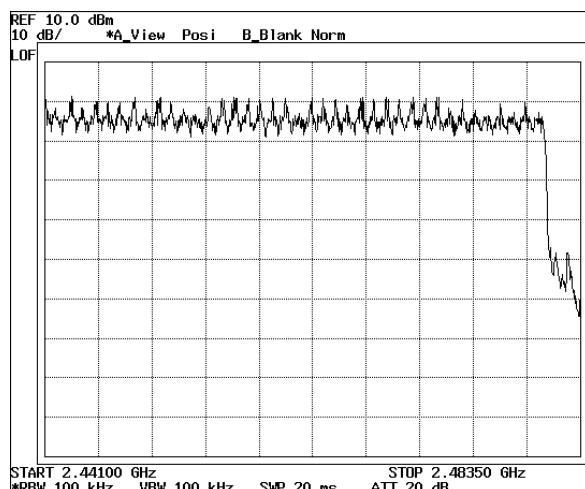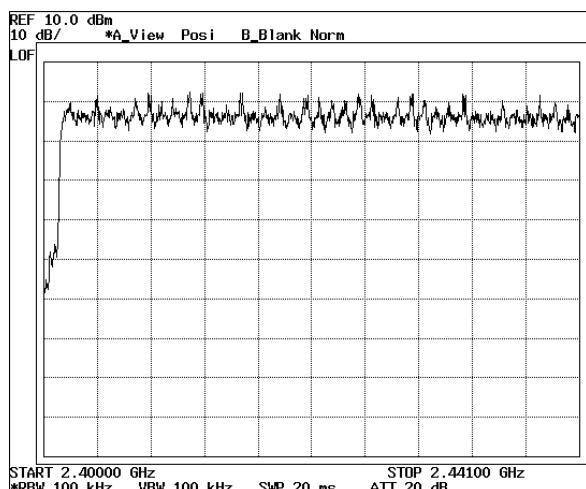

### Time of Occupancy(Dwell Time)


#### ◆ Test Equipment

The following test equipment are used during the test:

Item	Equipment	Manufacturer	Model no/Serial No.	Last Cal.
1	Spectrum Analyzer	ADVANTEST	R3273 / 95090431	Oct. 07, 2013
2	RF ROOM			

*Note : All equipment upon which need to calibrated are with calibration period of 1 year.*

#### ◆ Test Setup

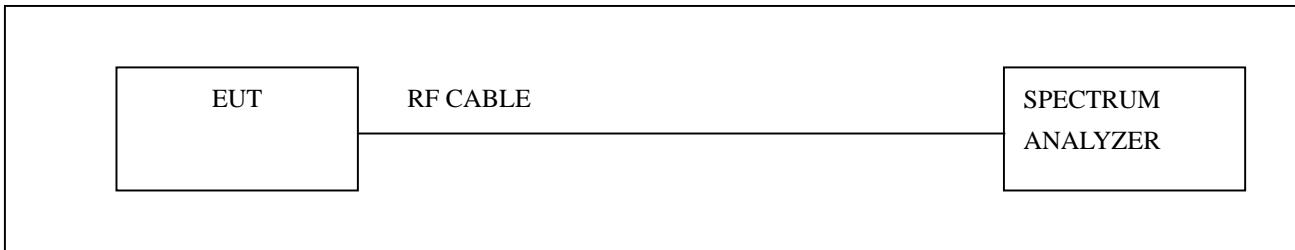

#### ◆ Limits

According to 15.247(a)(1)(iii), Frequency hopping systems operating in the 2400-2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4s within a period 0.4s multiplied by the number of hopping channels employed.

#### ◆ Test Procedure

The transmitter output is connected to the Spectrum analyzer.



According to FCC CFR Title 47 Part 15 Subpart C Section 15.247

### Dwell time Test result



Test Item	Dwell Time
Test Mode	Transmit
Test Site	RF Room
Measurement Method	Conducted

Mode	Number of transmission in a 31.6	Length of transmission time(ms)	Result (ms)	Limit (ms)	Result
DH5	34(times/5s) *3.16 = 107.44times	3.027	325.22	400	Pass
3DH5	34(times/5s) *3.16 = 107.44times				Pass

DH5

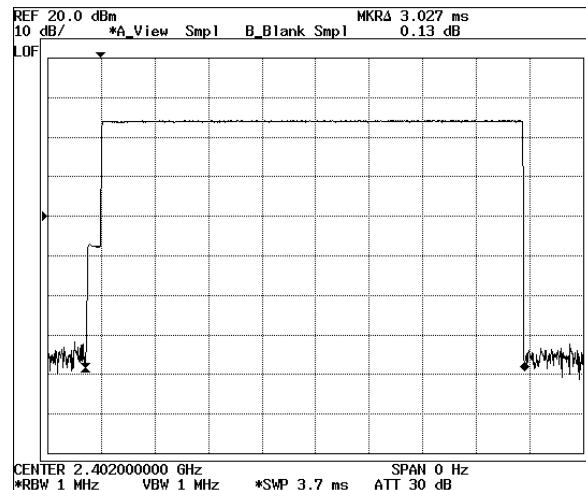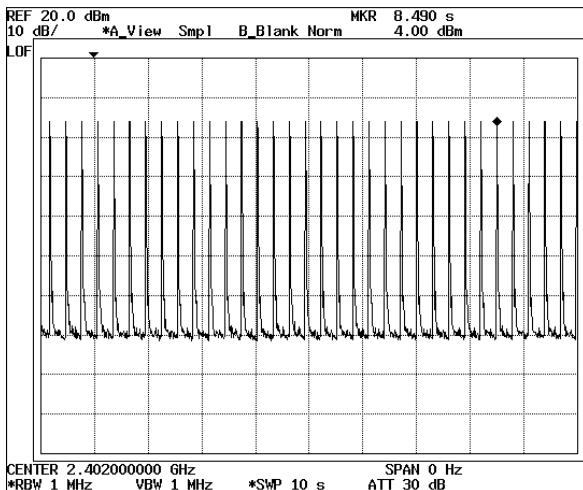

3DH5

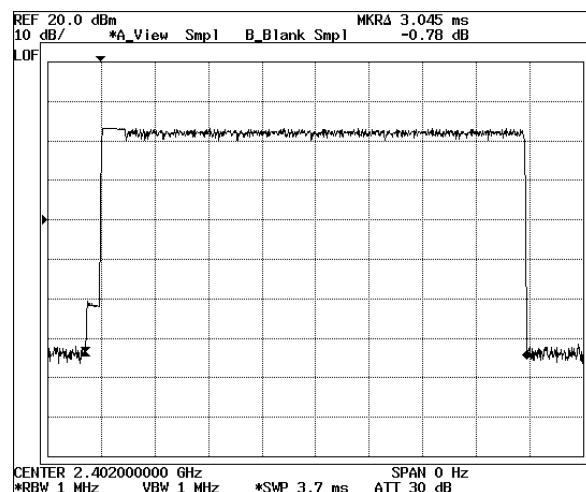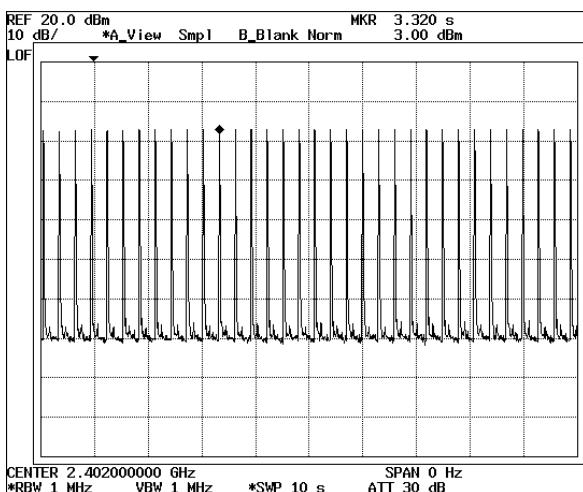

Note : High, Low and mid channels have same length of transmission time.

### Antenna requirements

#### **According to FCC 47 CFR 15.203**

“an intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached or an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section”

\* the antenna of this EUT is a unique(Reverse Polarity SMA Male Plug)

\* the EUT complies with the requirement of 15.203

