

Report No.: FR3D0631

FCC Test Report

Equipment : CEIVASHARE In-Home Display

Brand Name : CEIVA

Model No. : SHR558

Marketing Name : CEIVASHARE

FCC ID : 2ABKI-SHR558

Standard : 47 CFR FCC Part 15.247

Operating Band : 2400 MHz – 2483.5 MHz

FCC Classification : DTS

Applicant : CEIVA Logic, Inc

214 E Magnolia Blvd, Burbank,

CA 91502, USA

Manufacturer : Quanta Computer Inc.

No. 188, Wenhwa 2nd Rd.

Kueishan Hsiang Tao Yuan Shien

R.O.C. Taiwan

The product sample received on Jan. 16, 2014 and completely tested on Jan. 21, 2014. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2009 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:

Wayne Hsu / Assistant Manager

Testing Laboratory
1190

SPORTON INTERNATIONAL INC. Page No. : 1 of 51
TEL: 886-3-327-3456 Report Version : Rev. 01



FCC Test Report

Table of Contents

I	GENERAL DESCRIPTION	5
1.1	Information	5
1.2	Accessories And Support Equipment	7
1.3	Testing Applied Standards	7
1.4	Testing Location Information	8
1.5	Measurement Uncertainty	8
2	TEST CONFIGURATION OF EUT	9
2.1	The Worst Case Modulation Configuration	9
2.2	The Worst Case Power Setting Parameter	9
2.3	The Worst Case Measurement Configuration	10
2.4	Test Setup Diagram	11
3	TRANSMITTER TEST RESULT	13
3.1	AC Power-line Conducted Emissions	13
3.2	6dB Bandwidth	16
3.3	RF Output Power	18
3.4	Power Spectral Density	22
3.5	Transmitter Bandedge Emissions	24
3.6	Transmitter Unwanted Emissions	27
1	TEST EQUIPMENT AND CALIBRATION DATA	50

APPENDIX A. TEST PHOTOS

APPENDIX B. PHOTOGRAPHS OF EUT

Report No.: FR3D0631

Summary of Test Result

Report No.: FR3D0631

		Conform	ance Test Specifications		
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
1.1.2	15.203	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied
3.1	Emissions 44.69 (Ma		[dBuV]: 0.182486MHz 44.69 (Margin 9.68dB) - AV 51.48 (Margin 12.89dB) - QP	FCC 15.207	Complied
3.2 15.247(a) 6dB Bandwidth 6dB Bandwidth Unit [MHz] 20M: 9.58 / 40M: 17.70		≥500kHz	Complied		
3.3	15.247(b)	RF Output Power (Maximum Peak Conducted Output Power)	Power [dBm]: 20.43	Power [dBm]:30	Complied
3.4	15.247(d)	Power Spectral Density	PSD [dBm/100kHz]: -8.47	PSD [dBm/3kHz]:8	Complied
3.5	15.247(c)	Transmitter Radiated Bandedge Emissions	Non-Restricted Bands: 2399.82MHz: 32.43dB Restricted Bands [dBuV/m at 3m]: 2388.62MHz 66.03 (Margin 7.97dB) - PK 52.94 (Margin 1.06dB) - AV	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied
3.6	15.247(c)	Transmitter Radiated Unwanted Emissions	[dBuV/m at 3m]: 540.22MHz 43.96 (Margin 2.04dB) - AV	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied

SPORTON INTERNATIONAL INC. Page No. : 3 of 51
TEL: 886-3-327-3456 Report Version : Rev. 01



Revision History

Report No.: FR3D0631

Report No.	Version	Description	Issued Date
FR3D0631	Rev. 01	Change Photographs of EUT	Feb. 19, 2014

SPORTON INTERNATIONAL INC. Page No. : 4 of 51
TEL: 886-3-327-3456 Report Version : Rev. 01



1 General Description

1.1 Information

The equipment is CEIVASHARE In-Home Display. There are two types of this product. One is device equipped with ERT (Electronics report tooling) and the other is not. ERT functions only as receivers. Two types are tested in this report. For more detailed features description, please refer to the manufacturer's specifications or user's manual.

Report No.: FR3D0631

1.1.1 RF General Information

	RF General Information								
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	RF Output Power (dBm)	Co-location			
2400-2483.5	b	2412-2462	1-11 [11]	1	20.43	Yes			
2400-2483.5	g	2412-2462	1-11 [11]	1	18.23	Yes			
2400-2483.5	n (HT20)	2412-2462	1-11 [11]	1	17.54	Yes			

- Note 1: RF output power specifies that Maximum Peak Conducted Output Power.
- Note 2: 802.11b uses a combination of DSSS-DBPSK, DQPSK, CCK modulation.
- Note 3: 802.11g/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- Note 4: Co-location, Co-location is generally defined as simultaneously transmitting (co-transmitting) antennas within 20 cm of each other. (i.e., EUT has simultaneously co-transmitting that operating 2.4GHz and 5GHz.)

1.1.2 Antenna Information

	Antenna Category							
\boxtimes	Integral antenna (antenna permanently attached)							
	☐ Temporary RF connector provided							
		No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.						

	Antenna General Information						
No.	No. Ant. Cat. Ant. Type Gain (dBi)						
1	Internal	Printed	5.01				

SPORTON INTERNATIONAL INC. Page No. : 5 of 51

TEL: 886-3-327-3456 Report Version : Rev. 01



FCC Test Report

1.1.3 Type of EUT

		Identify EUT
EU	T Serial Number	N/A
Pre	sentation of Equipment	□ Production ; □ Pre-Production ; □ Prototype
		Type of EUT
\boxtimes	Stand-alone	
	Combined (EUT where the	ne radio part is fully integrated within another device)
	Combined Equipment - B	rand Name / Model No.:
	Plug-in radio (EUT intend	ded for a variety of host systems)
	Host System - Brand Nan	ne / Model No.:
	Other:	
1.1.	.4 Test Signal Duty	Cycle
		Operated Mode for Worst Duty Cycle
		·

Report No.: FR3D0631

	Operated Mode for Worst Duty Cycle						
	Operated normally mode for worst duty cycle						
\boxtimes	Operated test mode for worst duty cycle						
	Test Signal Duty Cycle (x) Power Duty Factor [dB] – (10 log 1/x)						
	100% - IEEE 802.11b	0					
\boxtimes	100% - IEEE 802.11g	0					
\boxtimes	100% - IEEE 802.11n (HT20)	0					

1.1.5 EUT Operational Condition

Supply Voltage		☐ DC	
Type of DC Source	☐ Internal DC supply		Li-on Battery

SPORTON INTERNATIONAL INC. Page No. : 6 of 51
TEL: 886-3-327-3456 Report Version : Rev. 01



FCC Test Report

1.2 Accessories And Support Equipment

Accessories Information							
	Brand Name	Asian Power Devices INC.	Model Name	WA-13B05FU			
AC Adapter	Power Rating	I/P: 100-240V ~ 0.5A 50/60Hz ; O/P: 5V === 2.5A					
	Power cord	1.5 meter, non-shielded cal	ble, w/o ferrite cor	е			
IR Remote controller	Brand Name	JTP	Model Name	7051C@01-0212			

Report No.: FR3D0631

Reminder: Regarding to more detail and other information, please refer to user manual.

	Support Equipment - RF Conducted						
No.	No. Equipment Brand Name Model Name						
1	Notebook	DELL	E5520				

1.3 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR FCC Part 15
- ANSI C63.10-2009
- FCC KDB 558074 v03r01
- FCC KDB 662911 v02

SPORTON INTERNATIONAL INC. Page No. : 7 of 51
TEL: 886-3-327-3456 Report Version : Rev. 01



1.4 Testing Location Information

	Testing Location							
	HWA YA	ADD	:	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.				
		TEL	:	886-3-327-3456 FAX : 886-3-327-0973				
Test Condition				Test Site No.	Test Engineer	Test Environment		
AC Conduction		CO04-HY	Zeus	22.2°C / 51%				
RF Conducted		TH06-HY	Cain	20.9°C / 62%				
F	Radiated Emission			03CH02-HY	Daniel	22.2°C / 51%		

Report No.: FR3D0631

1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

N	leasurement Uncertainty	
Test Item		Uncertainty
AC power-line conducted emissions		±2.26 dB
Emission bandwidth, 6dB bandwidth		±1.42 %
RF output power, conducted		±0.63 dB
Power density, conducted		±0.81 dB
Unwanted emissions, conducted	9 – 150 kHz	±0.38 dB
	0.15 – 30 MHz	±0.42 dB
	30 – 1000 MHz	±0.51 dB
	1 – 18 GHz	±0.67 dB
	18 – 40 GHz	±0.83 dB
	40 – 200 GHz	N/A
All emissions, radiated	9 – 150 kHz	±2.49 dB
	0.15 – 30 MHz	±2.28 dB
	30 – 1000 MHz	±2.56 dB
	1 – 18 GHz	±3.59 dB
	18 – 40 GHz	±3.82 dB
	40 – 200 GHz	N/A
Temperature		±0.8 °C
Humidity		±3 %
DC and low frequency voltages		±3 %
Time		±1.42 %
Duty Cycle		±1.42 %

SPORTON INTERNATIONAL INC. Page No. : 8 of 51
TEL: 886-3-327-3456 Report Version : Rev. 01



2 Test Configuration of EUT

2.1 The Worst Case Modulation Configuration

Worst Modulation Used for Conformance Testing					
Modulation Mode	Transmit Chains (N _{TX})	Data Rate / MCS	Worst Data Rate / MCS		
11b,1-11Mbps	1	1-11 Mbps	1 Mbps		
11g,6-54Mbps	1	6-54 Mbps	6 Mbps		
HT20,M0-7	1	MCS 0-7	MCS 0		

Report No.: FR3D0631

2.2 The Worst Case Power Setting Parameter

The Worst Case Power Setting Parameter (2400-2483.5MHz band)							
Test Software		PuTTY					
				Test Frequ	ency (MHz)		
Modulation Mode	N _{TX}	NCB: 20MHz			NCB: 40MHz		
		2412	2437	2462	2422	2437	2452
11b	1	44	44	40	-	-	-
11g	1	47	47	46	-	-	-
HT-20	1	45	45	44	-	-	-

SPORTON INTERNATIONAL INC. Page No. : 9 of 51
TEL: 886-3-327-3456 Report Version : Rev. 01



2.3 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests			
Tests Item AC power-line conducted emissions			
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz		
Operating Mode	Operating Mode Description		
1	EUT with ERT via AC Power & Radio link		
2	EUT without ERT via AC Power & Radio link		
Operating mode 1 was the worst case and it was record in this test report.			

Report No.: FR3D0631


The Worst Case Mode for Following Conformance Tests			
Tests Item	RF Output Power, Power Spectral Density, 6 dB Bandwidth		
Test Condition	Conducted measurement at transmit chains		
Modulation Mode	11b, 11g, HT20		

Th	e Worst Case Mode for Fo	ollowing Conformance Te	sts	
Tests Item	Transmitter Radiated Unwanted Emissions Transmitter Radiated Bandedge Emissions			
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.			
	EUT will be placed in	fixed position. mobile position and operati	na multiple positions FLIT	
User Position	shall be performed tw		ng manipie positions. Lo i	
		eld or body-worn battery-po sitions. EUT shall be perforn		
Operating Mode < 1GHz				
Operating Mode < 1912				
	Operating mode 2 was the worst case and it was record in this test report.			
Operating Mode > 1GHz				
Modulation Mode	11b, 11g, HT20			
	X Plane	Y Plane	Z Plane	
Orthogonal Planes of EUT				

SPORTON INTERNATIONAL INC. Page No. : 10 of 51
TEL: 886-3-327-3456 Report Version : Rev. 01



2.4 Test Setup Diagram

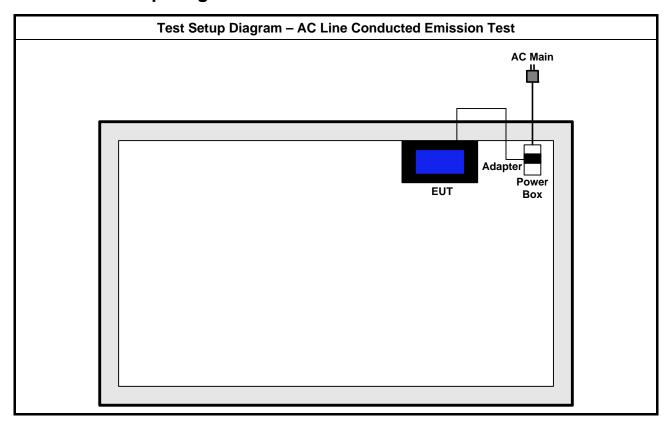

Report No.: FR3D0631

SPORTON INTERNATIONAL INC. Page No. : 11 of 51
TEL: 886-3-327-3456 Report Version : Rev. 01

Test Setup Diagram - Radiated Test (Below 1GHz) AC Main Adapter Power Box **Test Setup Diagram - Radiated Test (Above 1GHz)** AC Main Adapter Power Box

TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : 12 of 51

Report Version

: Rev. 01

Report No.: FR3D0631



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

ıasi-Peak	Average
	, o g c
66 - 56 *	56 - 46 *
56	46
60	50
	56

Report No.: FR3D0631


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

	Test Method
\boxtimes	Refer as ANSI C63.10-2009, clause 6.2 for AC power-line conducted emissions.


3.1.4 Test Setup

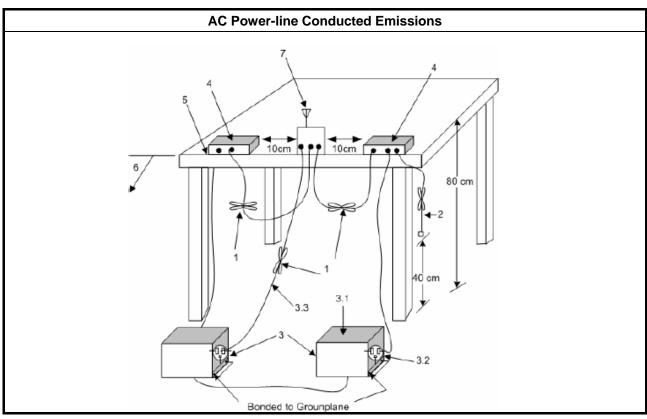

SPORTON INTERNATIONAL INC. Page No. : 13 of 51
TEL: 886-3-327-3456 Report Version : Rev. 01

FCC Test Report No.: FR3D0631

3.1.5 Test Result of AC Power-line Conducted Emissions

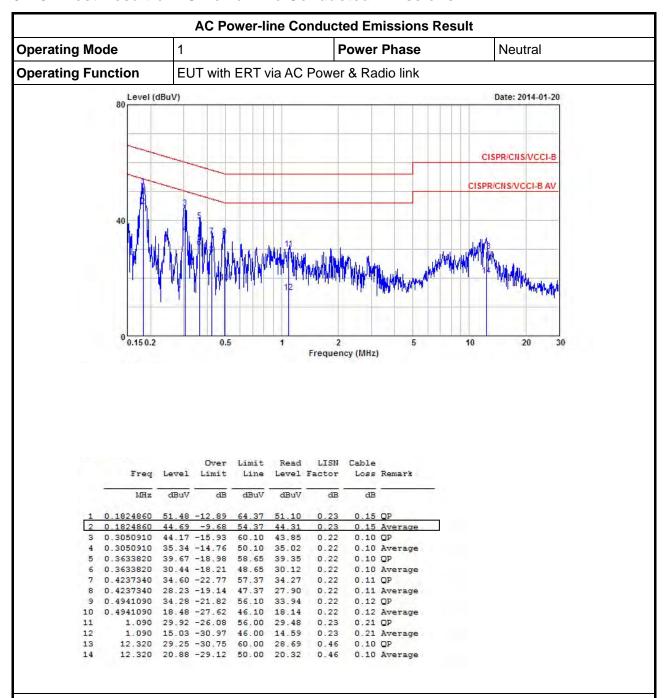


Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

SPORTON INTERNATIONAL INC. Page No. : 14 of 51 TEL: 886-3-327-3456 Report Version : Rev. 01

FCC Test Report Report No.: FR3D0631

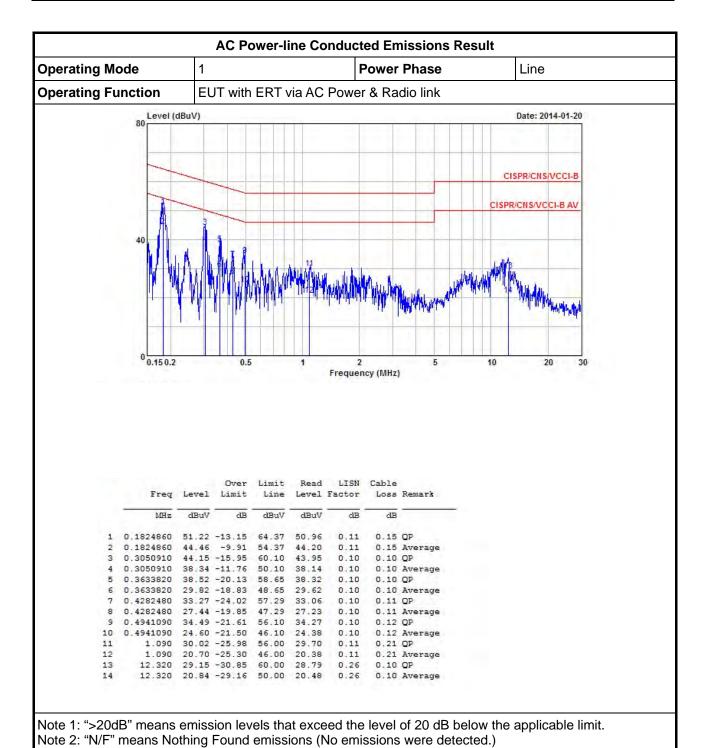

SPORTON INTERNATIONAL INC. Page No. : 15 of 51
TEL: 886-3-327-3456 Report Version : Rev. 01

FCC Test Report

3.2 6dB Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit				
Systems using digital modulation techniques:				
6 dB bandwidth ≥ 500 kHz.				

Report No.: FR3D0631


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

			Test Method
\boxtimes	For	the e	mission bandwidth shall be measured using one of the options below:
	\boxtimes	Ref	er as FCC KDB 558074, clause 8.1 Option 1 for 6 dB bandwidth measurement.
		Ref	er as FCC KDB 558074, clause 8.2 Option 2 for 6 dB bandwidth measurement.
		Ref	er as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
\boxtimes	For	cond	ucted measurement.
	\boxtimes	The	EUT supports single transmit chain and measurements performed on this transmit chain.
		The	EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
		The	EUT supports multiple transmit chains using options given below:
			Option 1: Multiple transmit chains measurements need to be performed on one of the active transmit chains (antenna outputs). All measurement had be performed on transmit chains 1.
			Option 2: Multiple transmit chains measurements need to be performed on each transmit chains individually (antenna outputs). All measurement had be performed on all transmit chains.

3.2.4 Test Setup

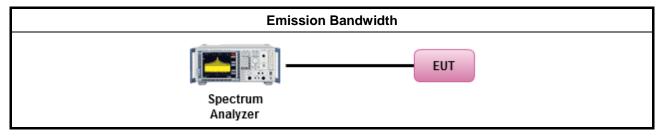


SPORTON INTERNATIONAL INC. Page No. : 16 of 51
TEL: 886-3-327-3456 Report Version : Rev. 01



3.2.5 Test Result of Emission Bandwidth

Condit	ion		Emission Bandwidth (MHz)		
		Freq.	99% Bandwidth	6dB Bandwidth	
odulation Mode	N _{TX}	(MHz)	Chain- Port 1	Chain- Port 1	
11b	1	2412	14.93	10.06	
11b	1	2437	14.93	10.06	
11b	1	2462	14.99	9.58	
11g	1	2412	16.41	16.53	
11g	1	2437	16.49	16.53	
11g	1	2462	16.44	16.53	
HT20	1	2412	17.73	17.80	
HT20	1	2437	17.69	17.79	
HT20	1	2462	17.66	17.70	
Limi	t		N/A	≥500 kHz	
Result			Com	plied	

Report No.: FR3D0631

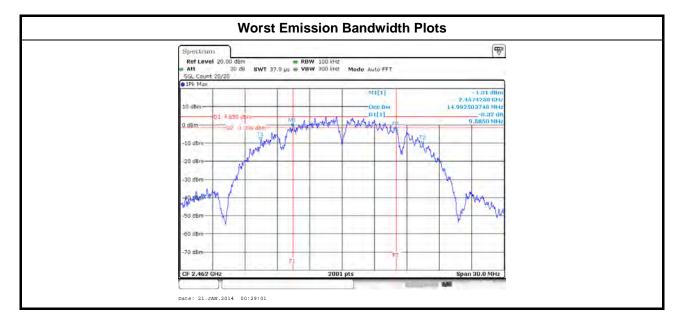

SPORTON INTERNATIONAL INC. Page No. : 17 of 51
TEL: 886-3-327-3456 Report Version : Rev. 01



3.3 RF Output Power

3.3.1 RF Output Power Limit

	RF Output Power Limit				
Max	Maximum Peak Conducted Output Power or Maximum Conducted Output Power Limit				
\boxtimes	240	0-2483.5 MHz Band:			
	\boxtimes	If $G_{TX} \le 6$ dBi, then $P_{Out} \le 30$ dBm (1 W)			
	\boxtimes	Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm			
		Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm			
		Smart antenna system (SAS):			
		☐ Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm			
		Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm			
		\square Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dB dBm			
e.i.r	.p. P	ower Limit:			
\boxtimes	240	0-2483.5 MHz Band			
	\boxtimes	Point-to-multipoint systems (P2M): P _{eirp} ≤ 36 dBm (4 W)			
		Point-to-point systems (P2P): $P_{eirp} \le MAX(36, [P_{Out} + G_{TX}]) dBm$			
		Smart antenna system (SAS)			
		☐ Single beam: $P_{eirp} \le MAX(36, P_{Out} + G_{TX}) dBm$			
		☐ Overlap beam: $P_{eirp} \le MAX(36, P_{Out} + G_{TX}) dBm$			
		☐ Aggregate power on all beams: $P_{eirp} \le MAX(36, [P_{Out} + G_{TX} + 8]) dBm$			
G_{TX}	= the	aximum peak conducted output power or maximum conducted output power in dBm, e maximum transmitting antenna directional gain in dBi. i.r.p. Power in dBm.			

Report No.: FR3D0631

3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.


SPORTON INTERNATIONAL INC. Page No. : 18 of 51
TEL: 886-3-327-3456 Report Version : Rev. 01

3.3.3 Test Procedures

		Test Method
\boxtimes	Max	imum Peak Conducted Output Power
		Refer as FCC KDB 558074, clause 9.1.1 Option 1 (RBW ≥ EBW method).
	\boxtimes	Refer as FCC KDB 558074, clause 9.1.2 Option 2 (integrated band power method).
		Refer as FCC KDB 558074, clause 9.1.3 Option 2 (peak power meter for VBW ≥ DTS BW)
\boxtimes	Max	imum Conducted Output Power
	[dut	y cycle ≥ 98% or external video / power trigger]
	\boxtimes	Refer as FCC KDB 558074, clause 9.2.2.2 Method AVGSA-1 (spectral trace averaging).
		Refer as FCC KDB 558074, clause 9.2.2.3 Method AVGSA-1 Alt. (slow sweep speed)
	duty	cycle < 98% and average over on/off periods with duty factor
	\boxtimes	Refer as FCC KDB 558074, clause 9.2.2.4 Method AVGSA-2 (spectral trace averaging).
		Refer as FCC KDB 558074, clause 9.2.2.5 Method AVGSA-2 Alt. (slow sweep speed)
	RF	power meter and average over on/off periods with duty factor or gated trigger
		Refer as FCC KDB 558074, clause 9.2.3 Method AVGPM (using an RF average power meter).
\boxtimes	For	conducted measurement.
	\boxtimes	The EUT supports single transmit chain and measurements performed on this transmit chain.
		The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
		The EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
		If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$

Report No.: FR3D0631

3.3.4 Test Setup



SPORTON INTERNATIONAL INC. Page No. : 19 of 51
TEL: 886-3-327-3456 Report Version : Rev. 01

3.3.5 Test Result of Maximum Peak Conducted Output Power


Maximum Peak Conducted Output Power Result								
Condi	tion		RF Output Power (dBm)					
Modulation Mode	N _{TX}	Freq. (MHz)	Chain Port 1	Power Limit	DG (dBi)	EIRP Power	EIRP Limit	
11b	1	2412	20.00	30.00	5.01	25.01	36.00	
11b	1	2437	20.43	30.00	5.01	25.44	36.00	
11b	1	2462	18.84	30.00	5.01	23.85	36.00	
11g	1	2412	17.97	30.00	5.01	22.98	36.00	
11g	1	2437	18.23	30.00	5.01	23.24	36.00	
11g	1	2462	18.14	30.00	5.01	23.15	36.00	
HT20	1	2412	17.38	30.00	5.01	22.39	36.00	
HT20	1	2437	17.52	30.00	5.01	22.53	36.00	
HT20	1	2462	17.54	30.00	5.01	22.55	36.00	
Resu	ılt				Complied			

Report No.: FR3D0631

3.3.6 Test Result of Maximum Conducted Output Power

	Maximum Conducted Output Power							
Condit	tion		RF Output Power (dBm)					
Modulation Mode	N _{TX}	Freq. (MHz)	Chain Port 1	Power Limit	DG (dBi)	EIRP Power	EIRP Limit	
11b	1	2412	17.03	30.00	5.01	22.04	36.00	
11b	1	2437	17.45	30.00	5.01	22.46	36.00	
11b	1	2462	15.88	30.00	5.01	20.89	36.00	
11g	1	2412	13.14	30.00	5.01	18.15	36.00	
11g	1	2437	13.38	30.00	5.01	18.39	36.00	
11g	1	2462	13.29	30.00	5.01	18.30	36.00	
HT20	1	2412	12.23	30.00	5.01	17.24	36.00	
HT20	1	2437	12.41	30.00	5.01	17.42	36.00	
HT20	1	2462	12.33	30.00	5.01	17.34	36.00	
Resu	ılt				Complied			

SPORTON INTERNATIONAL INC. Page No. : 20 of 51
TEL: 886-3-327-3456 Report Version : Rev. 01

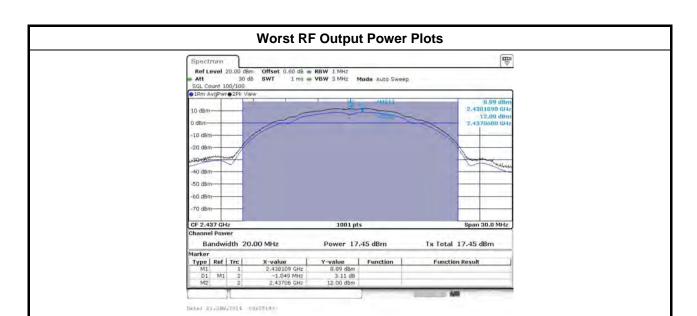

Report No.: FR3D0631

SPORTON INTERNATIONAL INC. Page No. : 21 of 51
TEL: 886-3-327-3456 Report Version : Rev. 01

3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

	Power Spectral Density Limit
\boxtimes	Power Spectral Density (PSD) ≤ 8 dBm/3kHz

Report No.: FR3D0631

3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.


3.4.3 Test Procedures

	Test Method
outp the c cond of th	k power spectral density procedures that the same method as used to determine the conducted out power. If maximum peak conducted output power was measured to demonstrate compliance to output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum ducted output power was measured to demonstrate compliance to the output power limit, then one he average PSD procedures shall be used, as applicable based on the following criteria (the peak procedure is also an acceptable option).
\boxtimes	Refer as FCC KDB 558074, clause 10.2 Method PKPSD (RBW=3-100kHz;detector=peak)
[duty	y cycle ≥ 98% or external video / power trigger]
	Refer as FCC KDB 558074, clause 10.3 Method AVGPSD-1 (spectral trace averaging).
	Refer as FCC KDB 558074, clause 10.4 Method AVGPSD-1 Alt. (slow sweep speed)
duty	cycle < 98% and average over on/off periods with duty factor
	Refer as FCC KDB 558074, clause 10.5 Method AVGPSD-2 (spectral trace averaging).
	Refer as FCC KDB 558074, clause 10.6 Method AVGPSD-2 Alt. (slow sweep speed)
For	conducted measurement.
	The EUT supports single transmit chain and measurements performed on this transmit chain.
	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
\boxtimes	The EUT supports multiple transmit chains using options given below:
	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the N _{TX} output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
	Option 2: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.

SPORTON INTERNATIONAL INC. Page No. : 22 of 51
TEL: 886-3-327-3456 Report Version : Rev. 01




3.4.4 Test Setup

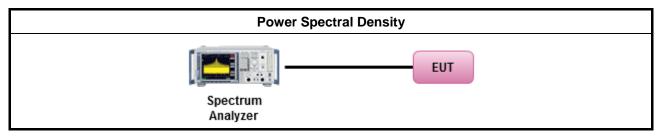

Report No.: FR3D0631

3.4.5 Test Result of Power Spectral Density

			Power Spectral Density Result				
Condi	tion		Power Spectral Density				
Modulation Mode	N _{TX}	Freq. (MHz)	Chain Port 1	Power Limit (dBm/3kHz)			
11b	1	2412	-8.47	8.00			
11b	1	2437	-8.94	8.00			
11b	1	2462	-10.09	8.00			
11g	1	2412	-17.32	8.00			
11g	1	2437	-16.76	8.00			
11g	1	2462	-16.65	8.00			
HT20	1	2412	-18.28	8.00			
HT20	1	2437	-18.15	8.00			
HT20	1	2462	-18.26	8.00			
Resu	ılt		Com	plied			

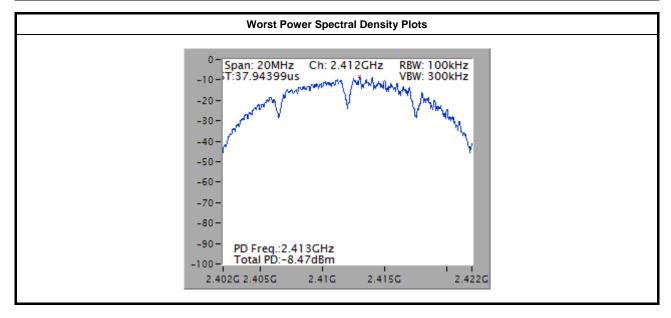


SPORTON INTERNATIONAL INC. Page No. : 23 of 51
TEL: 886-3-327-3456 Report Version : Rev. 01



3.5 Transmitter Bandedge Emissions

3.5.1 Transmitter Radiated Bandedge Emissions Limit

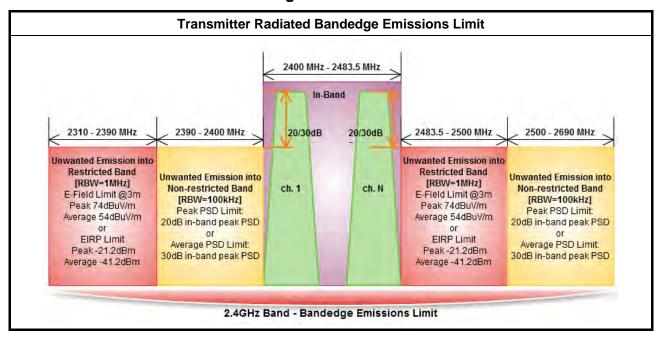

Report No.: FR3D0631

3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.


SPORTON INTERNATIONAL INC. Page No. : 24 of 51 TEL: 886-3-327-3456 Report Version : Rev. 01

3.5.3 Test Procedures

		Test Method							
\boxtimes	The	The average emission levels shall be measured in [duty cycle ≥ 98 or duty factor].							
	Refer as ANSI C63.10, clause 6.9.2.2 bandedge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.								
\boxtimes	For the transmitter unwanted emissions shall be measured using following options below:								
	\boxtimes	Refer as FCC KDB 558074, clause 11 for unwanted emissions into non-restricted bands.							
	\boxtimes	Refer as FCC KDB 558074, clause 12 for unwanted emissions into restricted bands.							
		Refer as FCC KDB 558074, clause 12.2.5.1 Option 1 (trace averaging for duty cycle ≥98%)							
		Refer as FCC KDB 558074, clause 12.2.5.2 Option 2 (trace averaging + duty factor).							
		☐ Refer as FCC KDB 558074, clause 12.2.5.3 Option 3 (Reduced VBW≥1/T).							
		Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW ≥ 1/T, where T is pulse time.							
		Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.							
		Refer as FCC KDB 558074, clause 11.3 and 12.2.4 measurement procedure peak limit.							
\boxtimes	For	the transmitter bandedge emissions shall be measured using following options below:							
		Refer as FCC KDB 558074, clause 13.3 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).							
	\boxtimes	Refer as ANSI C63.10, clause 6.9.2 for band-edge testing.							
		Refer as ANSI C63.10, clause 6.9.3 for marker-delta method for band-edge measurements.							
\boxtimes	For	radiated measurement, refer as FCC KDB 558074, clause 12.2.7.							

Report No.: FR3D0631

3.5.4 Test Setup

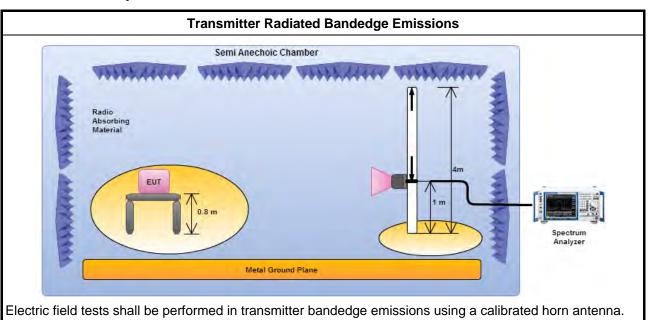

SPORTON INTERNATIONAL INC. Page No. : 25 of 51
TEL: 886-3-327-3456 Report Version : Rev. 01

FCC Test Report No.: FR3D0631

3.5.5 Transmitter Radiated Bandedge Emissions

Modulation	N _{TX}	Test Freq. (MHz)	In-band PSD [i] (dBuV/100kHz)	Freq. (MHz)	Out-band PSD [o] (dBuV/100kHz)	[i] – [o] (dB)	Limit (dB)	Pol.
11b	1	2412	111.47	2399.94	71.34	40.13	20	Н
11b	1	2462	110.69	2541.10	63.57	47.12	20	Н
11g	1	2412	104.47	2399.49	71.54	32.93	20	Н
11g	1	2462	103.72	2541.90	62.92	40.80	20	Н
HT20,M0-7	1	2412	105.41	2399.82	72.98	32.43	20	Н
HT20,M0-7	1	2462	104.13	2536.60	63.36	40.77	20	Н

Modulation Mode	N _{TX}	Freq. (MHz)	Measure Distance (m)	Freq. (MHz) PK	Level (dBuV/m) PK	Limit (dBuV/m) PK	Freq. (MHz) AV	Level (dBuV/m) AV	Limit (dBuV/m) AV	Pol.
11b	1	2412	3	2389.97	66.03	74	2388.62	52.94	54	Н
11b	1	2462	3	2485.40	65.97	74	2483.90	52.92	54	Н
11g	1	2412	3	2389.07	72.14	74	2390.00	52.70	54	Н
11g	1	2462	3	2483.50	69.97	74	2483.50	52.24	54	Н
HT20,M0-7	1	2412	3	2389.63	70.32	74	2390.00	52.22	54	Н
HT20,M0-7	1	2462	3	2483.80	68.80	74	2483.50	52.37	54	Н

SPORTON INTERNATIONAL INC. Page No. : 26 of 51
TEL: 886-3-327-3456 Report Version : Rev. 01

3.6 Transmitter Unwanted Emissions

3.6.1 Transmitter Radiated Unwanted Emissions Limit

Restricted Band Emissions Limit						
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)			
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300			
0.490~1.705	24000/F(kHz)	33.8 - 23	30			
1.705~30.0	30	29	30			
30~88	100	40	3			
88~216	150	43.5	3			
216~960	200	46	3			
Above 960	500	54	3			

Report No.: FR3D0631

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Un-restricted Band Emissions Limit				
RF output power procedure	Limit (dB)			
Peak output power procedure	20			
Average output power procedure	30			

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.

3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

SPORTON INTERNATIONAL INC. Page No. : 27 of 51
TEL: 886-3-327-3456 Report Version : Rev. 01



FCC Test Report Report No.: FR3D0631


3.6.3 Test Procedures

		Test Method
	perfo equi extra dista	isurements may be performed at a distance other than the limit distance provided they are not ormed in the near field and the emissions to be measured can be detected by the measurement ipment. When performing measurements at a distance other than that specified, the results shall be appolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear ance for field-strength measurements, inverse of linear distance-squared for power-density asurements).
\boxtimes	The	average emission levels shall be measured in [duty cycle ≥ 98 or duty factor].
\boxtimes	For	the transmitter unwanted emissions shall be measured using following options below:
		Refer as FCC KDB 558074, clause 11 for unwanted emissions into non-restricted bands.
	\boxtimes	Refer as FCC KDB 558074, clause 12 for unwanted emissions into restricted bands.
		☐ Refer as FCC KDB 558074, clause 12.2.5.1 Option 1 (trace averaging for duty cycle ≥98%)
		Refer as FCC KDB 558074, clause 12.2.5.2 Option 2 (trace averaging + duty factor).
		Refer as FCC KDB 558074, clause 12.2.5.3 Option 3 (Reduced VBW≥1/T).
		Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW ≥ 1/T, where T is pulse time.
		Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
		Refer as FCC KDB 558074, clause 11.3 and 12.2.4 measurement procedure peak limit.
		Refer as FCC KDB 558074, clause 12.2.3 measurement procedure Quasi-Peak limit.
\boxtimes	For	radiated measurement, refer as FCC KDB 558074, clause 12.2.7.
	\boxtimes	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
	\boxtimes	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
	\boxtimes	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1 GHz and test distance is 3m.
\boxtimes	The	any unwanted emissions level shall not exceed the fundamental emission level.
\boxtimes		implitude of spurious emissions that are attenuated by more than 20 dB below the permissible value no need to be reported.

SPORTON INTERNATIONAL INC. Page No. : 28 of 51
TEL: 886-3-327-3456 Report Version : Rev. 01



3.6.4 Test Setup

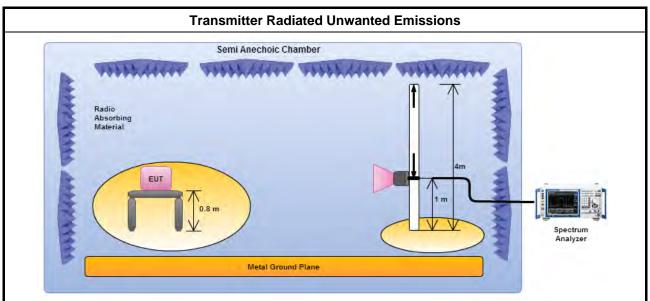

Report No.: FR3D0631


Magnetic field tests shall be performed in the frequency range of 9 kHz to 30 MHz using a calibrated loop antenna. Electric field tests shall be performed in the frequency range of 30 MHz to 1000 MHz using a calibrated bi-log antenna and the frequency range of 1 GHz to 40 GHz using a calibrated horn antenna.

3.6.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)


All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

SPORTON INTERNATIONAL INC. Page No. : 29 of 51
TEL: 886-3-327-3456 Report Version : Rev. 01

6 Transmitter Radiated Unwanted Emissions (Below 1GHz)



Report No.: FR3D0631

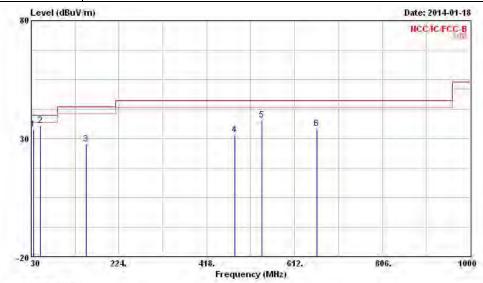

			Over	Limit	Read	Antenna	Cable	Preamp		Ant	Table
	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos
-	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		com	deg
10	35.820	34.11	-5.89	40.00	45.42	15.59	0.82	27.72	Peak		
2 8	51.340	35.43	-4.57	40.00	53.82	8.10	1.03	27.52	Peak		777
3 8	152.220	27.59	-15.91	43.50	42.89	10.53	1.75	27.58	Peak		12-4
4 8	479.110	31.77	-14.23	46.00	39.23	17.56	3.31	28.33	Peak		1775
5 @	540.220	37.85	-8.15	46.00	44.49	18.30	3.52	28.46	Peak		1-2-
68	660.500	34.40	-11.60	46.00	39.93	18.92	3.93	28.38	Peak		


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

SPORTON INTERNATIONAL INC. Page No. : 30 of 51
TEL: 886-3-327-3456 Report Version : Rev. 01

Report No.: FR3D0631



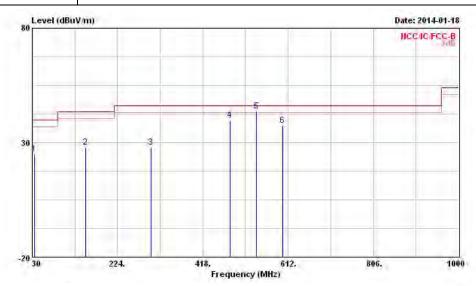

	Freq	Level	Over Limit	200		Antenna Factor	2000 0000	Preamp Factor	Remark	Ant Pos	Table Pos
-	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	-		deg
18	35.820	24.92	-15.08	40.00	36.23	15.59	0.82	27.72	Peak		
2 8	152.220	27.89	-15.61	43.50	43.19	10.53	1.75	27.58	Peak		-
3	299.660	28.02	-17.98	46.00	39.37	13.25	2.55	27.15	Peak		
4 8	479.110	39.76	-6.24	46.00	47.22	17.56	3.31	28.33	Peak		-0.0
5 8	540.220	43.96	-2.04	46.00	50.60	18.30	3.52	28.46	OP		
6 13	599 390	37 47	-8.53	46 00	43 60	18 69	3 68	28 50	Peak		200

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


SPORTON INTERNATIONAL INC. Page No. : 31 of 51
TEL: 886-3-327-3456 Report Version : Rev. 01

FCC Test Report

3.6.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 2400-2483.5MHz

Report No.: FR3D0631



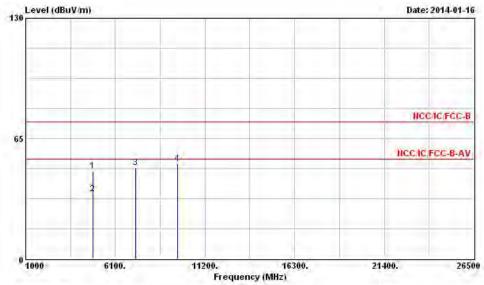


	Freq	Level	Over Limit			Antenna Factor	-	The state of the s		Ant Pos	Table Pos
0	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		can	deg
1	4824.000	47.61	-26.39	74.00	43.26	34.33	4.70	34.68	Peak		94440
2	4824.000	34.92	-19.08	54.00	30.57	34.33	4.70	34.68	Average		
3	7236.000	49.35			43.02	35.90	5.37	34.94	Peak		
4	9648.000	51.25			43.66	36.59	6.35	35.35	Peak		


- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

SPORTON INTERNATIONAL INC. Page No. : 32 of 51
TEL: 886-3-327-3456 Report Version : Rev. 01

Report No.: FR3D0631



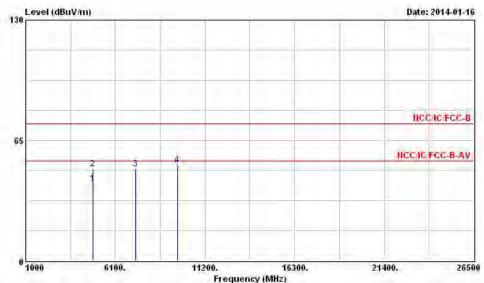

		Freq	Freq	Level	Over Limit	000000		Antenna Factor	2.000	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	MHz	z dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	-	cm	deg	
11	3 482	4.000	41.68	-12.32	54.00	37.33	34.33	4.70	34.68	Average			
2	482	4.000	49.59	-24.41	74.00	45.24	34.33	4.70	34.68	Peak		200	
3	723	6.000	49.73			43.40	35.90	5.37	34.94	Peak			
4	964	8.000	51.89			44.30	36.59	6.35	35.35	Peak			

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

SPORTON INTERNATIONAL INC. Page No. : 33 of 51
TEL: 886-3-327-3456 Report Version : Rev. 01

port Report No. : FR3D0631

Transmitter Radiated Unwanted Emissions (Above 1GHz)										
Modulation Mode11bTest Freq. (MHz)2437										
N_{TX}	1	Polarization	V							

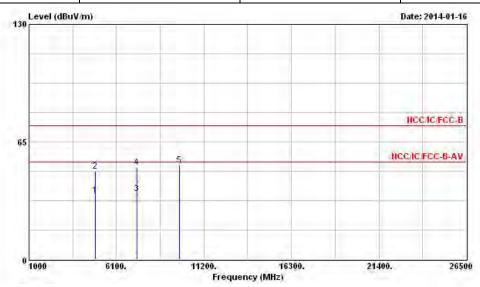


			Over	Limit	Read	Antenna	Cable	Preamp		Ant	Table
	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		can	deg
1	4874.000	35.69	-18.31	54.00	31.31	34.32	4.73	34.67	Average		
2	4874.000	48.65	-25.35	74.00	44.27	34.32	4.73	34.67	Peak		
3	7311.000	36.25	-17.75	54.00	29.85	35.88	5.47	34.95	Average		
4	7311.000	50.82	-23.18	74.00	44.42	35.88	5.47	34.95	Peak		
5	9748.000	52.23			44.47	36.71	6.41	35.36	Peak		

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

SPORTON INTERNATIONAL INC. Page No. : 34 of 51
TEL: 886-3-327-3456 Report Version : Rev. 01

Report No.: FR3D0631

Transmitter Radiated Unwanted Emissions (Above 1GHz)										
Modulation Mode11bTest Freq. (MHz)2437										
N_{TX}	1	Polarization	Н							

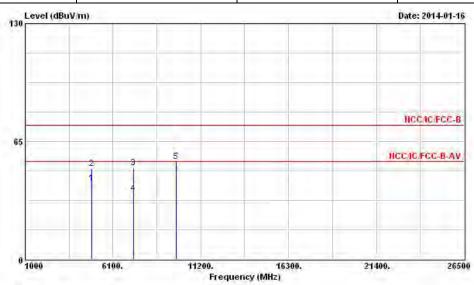


			Over	Limit	Read	Antenna	Cable	Preamp		Ant	Table
	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		com	deg
1 8	4874.000	41.99	-12.01	54.00	37.61	34.32	4.73	34.67	Average		
2	4874.000	49.88	-24.12	74.00	45.50	34.32	4.73	34.67	Peak		
3	7311.000	50.40	-23.60	74.00	44.00	35.88	5.47	34.95	Peak		
4	7311.000	36.34	-17.66	54.00	29.94	35.88	5.47	34.95	Average		
5	9748.000	53.76			46.00	36.71	6.41	35.36	Peak		

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

SPORTON INTERNATIONAL INC. Page No. : 35 of 51
TEL: 886-3-327-3456 Report Version : Rev. 01

Report No.: FR3D0631

Transmitter Radiated Unwanted Emissions (Above 1GHz)										
Modulation Mode11bTest Freq. (MHz)2462										
N _{TX}	1	Polarization	V							

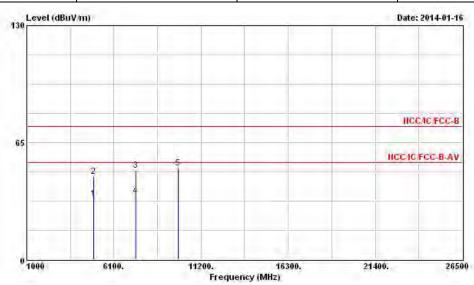


			Over	Limit	Read	Antenna	Cable	Preamp		Ant	Table
	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4924.000	33.97	-20.03	54.00	29.53	34.31	4.79	34.66	Average		
2	4924.000	46.37	-27.63	74.00	41.93	34.31	4.79	34.66	Peak		2-4
3	7386.000	49.66	-24.34	74.00	43.22	35.84	5.57	34.97	Peak		
4	7386.000	35.29	-18.71	54.00	28.85	35.84	5.57	34.97	Average		-2-
5	9848.000	50.95			43.01	36.81	6.50	35.37	Peak		777

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

SPORTON INTERNATIONAL INC. Page No. : 36 of 51
TEL: 886-3-327-3456 Report Version : Rev. 01

Transmitter Radiated Unwanted Emissions (Above 1GHz)									
Modulation Mode	11b	Test Freq. (MHz)	2462						
N _{TX} 1 Polarization H									

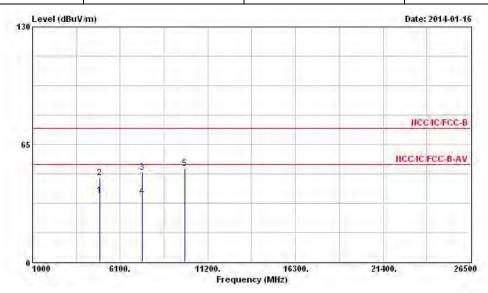


THE STATE OF	4	4.000	Over	District of		Antenna		Preamp	2000	Ant	Table
	Freq	Level	Limit	Line	rever	Factor	Loss	Factor	Remark	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4924.000	36.66	-17.34	54.00	32.22	34.31	4.79	34.66	Average		
2	4924.000	46.65	-27.35	74.00	42.21	34.31	4.79	34.66	Peak	8-8	
3	7386.000	49.70	-24.30	74.00	43.26	35.84	5.57	34.97	Peak		
4	7386.000	36.37	-17.63	54.00	29.93	35.84	5.57	34.97	Average		
5	9848.000	51.80			43.86	36.81	6.50	35.37	Peak		

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

SPORTON INTERNATIONAL INC. Page No. : 37 of 51 TEL: 886-3-327-3456 Report Version : Rev. 01

Transmitter Radiated Unwanted Emissions (Above 1GHz)											
Modulation Mode	11g	Test Freq. (MHz)	2412								
N _{TX}	N _{TX} 1 Polarization V										

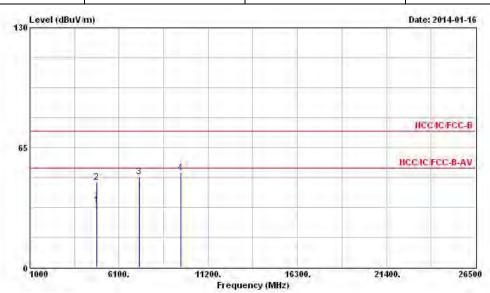


	Freq	Level	Over Limit	Design of		Antenna Factor		The second second	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4824.000	33.82	-20.18	54.00	29.47	34.33	4.70	34.68	Average		
2	4824.000	46.15	-27.85	74.00	41.80	34.33	4.70	34.68	Peak		
3	7236.000	49.07			42.74	35.90	5.37	34.94	Peak		
4	9648.000	51.27			43.68	36.59	6.35	35.35	Peak		

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

SPORTON INTERNATIONAL INC. Page No. : 38 of 51 TEL: 886-3-327-3456 Report Version : Rev. 01

Transmitter Radiated Unwanted Emissions (Above 1GHz)										
Modulation Mode	Modulation Mode 11g Test Freq. (MHz) 2412									
N_{TX}	N _{TX} 1 Polarization H									

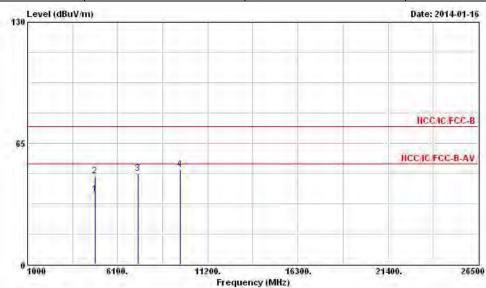


				Over	Limit	Read	Antenna	Cable	Preamp		Ant	Table
		Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos
	-	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		can	deg
1	0	4824.000	37.60	-16.40	54.00	33.25	34.33	4.70	34.68	Average		
2		4824.000	47.64	-26.36	74.00	43.29	34.33	4.70	34.68	Peak		22+
3		7236.000	48.63			42.30	35.90	5.37	34.94	Peak		
4		9648.000	50.74			43.15	36.59	6.35	35.35	Peak		

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

SPORTON INTERNATIONAL INC. Page No. : 39 of 51 TEL: 886-3-327-3456 Report Version : Rev. 01

Transmitter Radiated Unwanted Emissions (Above 1GHz)										
Modulation Mode	11g	Test Freq. (MHz)	2437							
N _{TX} 1 Polarization V										

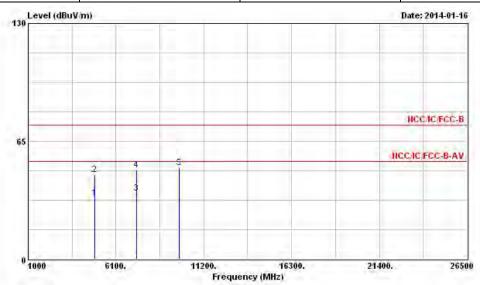


			Over	Limit	Read	Antenna	Cable	Preamp		Ant	Table
	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	-	con	deg
1	4874.000	33.90	-20.10	54.00	29.52	34.32	4.73	34.67	Average	9-9	
2	4874.000	46.76	-27.24	74.00	42.38	34.32	4.73	34.67	Peak		
3	7311.000	36.15	-17.85	54.00	29.75	35.88	5.47	34.95	Average		
4	7311.000	49.14	-24.86	74.00	42.74	35.88	5.47	34.95	Peak		
5	9748.000	50.44			42.68	36.71	6.41	35.36	Peak		

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

SPORTON INTERNATIONAL INC. Page No. : 40 of 51 TEL: 886-3-327-3456 Report Version : Rev. 01

Transmitter Radiated Unwanted Emissions (Above 1GHz)										
Modulation Mode	11g	Test Freq. (MHz)	2437							
N _{TX} 1 Polarization H										

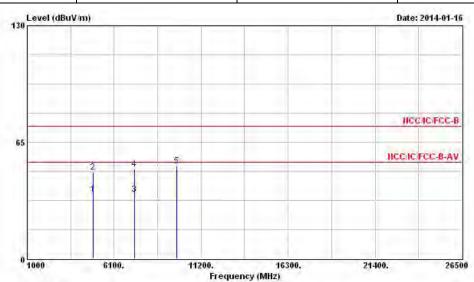


	Freq	Level	Over Limit	- District of	-0,472-70	Antenna Factor	200 - 1 - 10	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg
1	4874.000	36.13	-17.87	54.00	31.75	34.32	4.73	34.67	Average		
2	4874.000	48.48	-25.52	74.00	44.10	34.32	4.73	34.67	Peak		
3	7311.000	36.12	-17.88	54.00	29.72	35.88	5.47	34.95	Average		
4	7311.000	49.89	-24.11	74.00	43.49	35.88	5.47	34.95	Peak		100-
5	9748.000	51.82			44.06	36.71	6.41	35.36	Peak		

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

SPORTON INTERNATIONAL INC. Page No. : 41 of 51 TEL: 886-3-327-3456 Report Version : Rev. 01

Transmitter Radiated Unwanted Emissions (Above 1GHz)									
Modulation Mode	11g	Test Freq. (MHz)	2462						
N _{TX} 1 Polarization V									

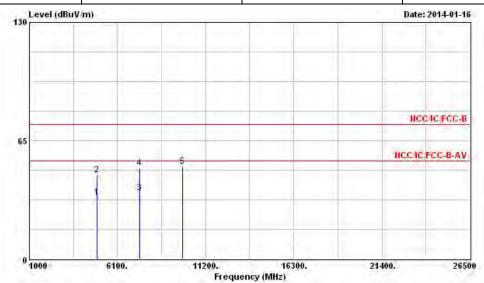


	Freq	Level	Over Limit	-		Antenna Factor		The state of the s		Ant	Table Pos
	9124	42120	24,000		Charles Co.		10000	A 150 to	and and	- 277	2,12
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4924.000	33.68	-20.32	54.00	29.24	34.31	4.79	34.66	Average		34660
2	4924.000	46.22	-27.78	74.00	41.78	34.31	4.79	34.66	Peak		
3	7386.000	36.36	-17.64	54.00	29.92	35.84	5.57	34.97	Average		
4	7386.000	50.03	-23.97	74.00	43.59	35.84	5.57	34.97	Peak		
5	9848.000	50.90			42.96	36.81	6.50	35.37	Peak		

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

SPORTON INTERNATIONAL INC. Page No. : 42 of 51
TEL: 886-3-327-3456 Report Version : Rev. 01

Transmitter Radiated Unwanted Emissions (Above 1GHz)									
Modulation Mode11gTest Freq. (MHz)2462									
N_{TX}	1	Polarization	Н						

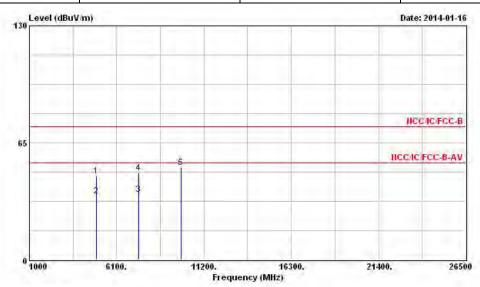


			* 40000	Over	- DAMES	_0/4/8270	Antenna	200	Preamp		Ant	Table
		rreq	Level	Limit	Line	rever	Factor	Loss	ractor	Remark	Pos	Pos
		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		can	deg
1	4924	. 000	46.55	-27.45	74.00	42.11	34.31	4.79	34.66	Peak		
2	4924	. 000	35.50	-18.50	54.00	31.06	34.31	4.79	34.66	Average		
3	7386	. 000	36.23	-17.77	54.00	29.79	35.84	5.57	34.97	Average		
4	7386	. 000	48.46	-25.54	74.00	42.02	35.84	5.57	34.97	Peak		100-
5	9848	. 000	51.37			43.43	36.81	6.50	35.37	Peak		

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

SPORTON INTERNATIONAL INC. Page No. : 43 of 51 TEL: 886-3-327-3456 Report Version : Rev. 01

Tra	Transmitter Radiated Unwanted Emissions (Above 1GHz)									
Modulation Mode HT20 Test Freq. (MHz) 2412										
N _{TX}	1	Polarization	V							

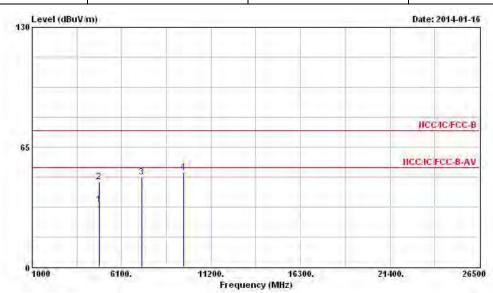


	Freq	Level	Over Limit	- O 4 - 1 - 1 - 1	_ 0/47/8/27/07	Antenna Factor			Remark	Ant Pos	Table Pos
-	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4824.000	33.83	-20.17	54.00	29.48	34.33	4.70	34.68	Average		
2	4824.000	46.26	-27.74	74.00	41.91	34.33	4.70	34.68	Peak		
3	7236.000	48.76			42.43	35.90	5.37	34.94	Peak		
4	9648.000	51.16			43.57	36.59	6.35	35.35	Peak		

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

SPORTON INTERNATIONAL INC. Page No. : 44 of 51 TEL: 886-3-327-3456 Report Version : Rev. 01

Tra	Transmitter Radiated Unwanted Emissions (Above 1GHz)									
Modulation ModeHT20Test Freq. (MHz)2412										
N_{TX}	1	Polarization	Н							

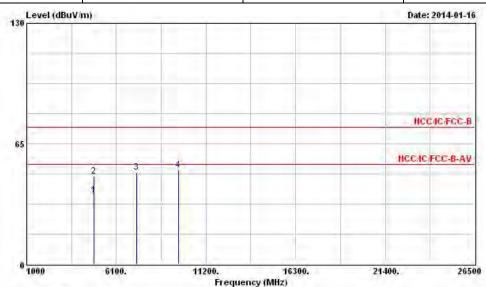


		Freq	Level	Over Limit	200000000000000000000000000000000000000	A1- 4-1	Antenna Factor		Preamp Factor	Remark	Ant Pos	Table Pos
	-	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	дв	dB		cm.	deg
1	9	4824.000	37.41	-16.59	54.00	33.06	34.33	4.70	34.68	Average		
2		4824.000	47.39	-26.61	74.00	43.04	34.33	4.70	34.68	Peak		
3		7236.000	49.72			43.39	35.90	5.37	34.94	Peak		
4		9648.000	50.72			43.13	36.59	6.35	35.35	Peak		

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

SPORTON INTERNATIONAL INC. Page No. : 45 of 51
TEL: 886-3-327-3456 Report Version : Rev. 01

Tra	Transmitter Radiated Unwanted Emissions (Above 1GHz)									
Modulation Mode	HT20	Test Freq. (MHz)	2437							
N _{TX}	1	Polarization	V							

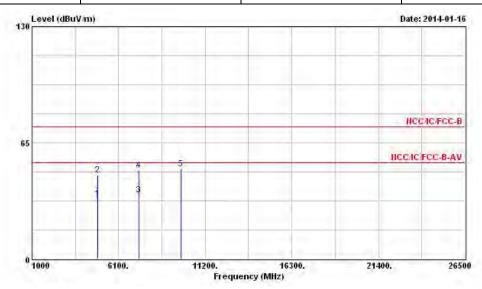


MHz	dBuV/m	- dR	-							
		ш	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
. 000	33.82	-20.18	54.00	29.44	34.32	4.73	34.67	Average		
. 000	47.01	-26.99	74.00	42.63	34.32	4.73	34.67	Peak		
. 000	36.04	-17.96	54.00	29.64	35.88	5.47	34.95	Average		
. 000	49.51	-24.49	74.00	43.11	35.88	5.47	34.95	Peak		
. 000	50.66			42.90	36.71	6.41	35.36	Peak		
	.000 .000 .000	.000 33.82 .000 47.01 .000 36.04 .000 49.51	.000 33.82 -20.18 .000 47.01 -26.99 .000 36.04 -17.96 .000 49.51 -24.49	.000 33.82 -20.18 54.00 .000 47.01 -26.99 74.00 .000 36.04 -17.96 54.00 .000 49.51 -24.49 74.00	.000 33.82 -20.18 54.00 29.44 .000 47.01 -26.99 74.00 42.63 .000 36.04 -17.96 54.00 29.64 .000 49.51 -24.49 74.00 43.11	.000 33.82 -20.18 54.00 29.44 34.32 .000 47.01 -26.99 74.00 42.63 34.32 .000 36.04 -17.96 54.00 29.64 35.88 .000 49.51 -24.49 74.00 43.11 35.88	.000 33.82 -20.18 54.00 29.44 34.32 4.73 .000 47.01 -26.99 74.00 42.63 34.32 4.73 .000 36.04 -17.96 54.00 29.64 35.88 5.47 .000 49.51 -24.49 74.00 43.11 35.88 5.47	.000 33.82 -20.18 54.00 29.44 34.32 4.73 34.67 .000 47.01 -26.99 74.00 42.63 34.32 4.73 34.67 .000 36.04 -17.96 54.00 29.64 35.88 5.47 34.95 .000 49.51 -24.49 74.00 43.11 35.88 5.47 34.95	.000 33.82 -20.18 54.00 29.44 34.32 4.73 34.67 Rverage .000 47.01 -26.99 74.00 42.63 34.32 4.73 34.67 Peak .000 36.04 -17.96 54.00 29.64 35.88 5.47 34.95 Rverage .000 49.51 -24.49 74.00 43.11 35.88 5.47 34.95 Peak	.000 33.82 -20.18 54.00 29.44 34.32 4.73 34.67 Average000 47.01 -26.99 74.00 42.63 34.32 4.73 34.67 Peak000 36.04 -17.96 54.00 29.64 35.88 5.47 34.95 Average000 49.51 -24.49 74.00 43.11 35.88 5.47 34.95 Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

SPORTON INTERNATIONAL INC. Page No. : 46 of 51 TEL: 886-3-327-3456 Report Version : Rev. 01

Tra	Transmitter Radiated Unwanted Emissions (Above 1GHz)										
Modulation Mode	HT20	Test Freq. (MHz)	2437								
N_{TX}	1	Polarization	Н								

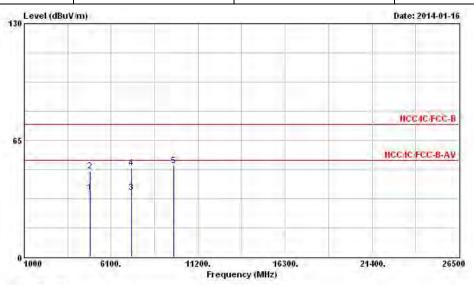


	Freq	Level	Over Limit	244(24)	0.000	Antenna Factor		Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	-	- cm	deg
1	4874.000	36.10	-17.90	54.00	31.72	34.32	4.73	34.67	Average		
2	4874.000	47.75	-26.25	74.00	43.37	34.32	4.73	34.67	Peak		
3	7311.000	36.01	-17.99	54.00	29.61	35.88	5.47	34.95	Average		
4	7311.000	49.43	-24.57	74.00	43.03	35.88	5.47	34.95	Peak		
5	9748.000	51.03			43.27	36.71	6.41	35.36	Peak		

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

SPORTON INTERNATIONAL INC. Page No. : 47 of 51 TEL: 886-3-327-3456 Report Version : Rev. 01

Tra	Transmitter Radiated Unwanted Emissions (Above 1GHz)									
Modulation Mode	Modulation ModeHT20Test Freq. (MHz)2462									
N _{TX}	1	Polarization	V							

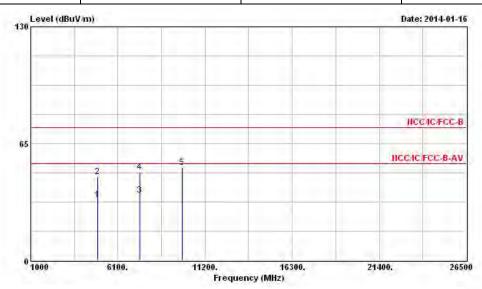


			Over	Limit	Read	Antenna	Cable	Preamp		Ant	Table
	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4924.000	33.61	-20.39	54.00	29.17	34.31	4.79	34.66	Average		
2	4924.000	46.60	-27.40	74.00	42.16	34.31	4.79	34.66	Peak		
3	7386.000	36.18	-17.82	54.00	29.74	35.84	5.57	34.97	Average		
4	7386.000	49.30	-24.70	74.00	42.86	35.84	5.57	34.97	Peak		100-
5	9848.000	51.70			43.76	36.81	6.50	35.37	Peak		

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

SPORTON INTERNATIONAL INC. Page No. : 48 of 51 TEL: 886-3-327-3456 Report Version : Rev. 01

Transmitter Radiated Unwanted Emissions (Above 1GHz)						
Modulation Mode	HT20	Test Freq. (MHz)	2462			
N_{TX}	1	Polarization	Н			

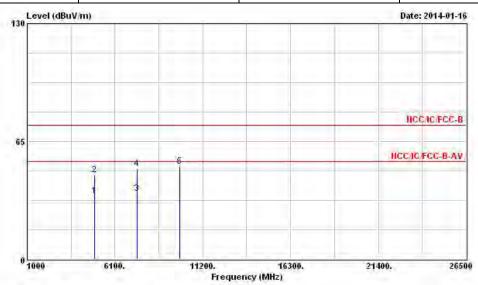

			Over	Limit	Readi	Antenna	Cable	Preamp		Ant	Table
	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		com	deg
1	4924.000	35.11	-18.89	54.00	30.67	34.31	4.79	34.66	Average		
2	4924.000	46.50	-27.50	74.00	42.06	34.31	4.79	34.66	Peak		
3	7386.000	36.22	-17.78	54.00	29.78	35.84	5.57	34.97	Average		
4	7386.000	50.10	-23.90	74.00	43.66	35.84	5.57	34.97	Peak		
5	9848.000	51.46			43.52	36.81	6.50	35.37	Peak		

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

SPORTON INTERNATIONAL INC. Page No. : 49 of 51 TEL: 886-3-327-3456 Report Version : Rev. 01

4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz ~ 2.75GHz	Mar. 25, 2013	Conduction (CO04-HY)
LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	8127-477	9kHz ~ 30MHz	Jan. 22, 2013	Conduction (CO04-HY)
RF Cable-CON	HUBER+SUHNER	RG213/U	7.61183201e+012	9kHz ~ 30MHz	Oct. 30, 2013	Conduction (CO04-HY)
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)

Report No.: FR3D0631

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSV 40	101013	9KHz~40GHz	Jan. 29, 2013	Conducted (TH06-HY)
AC Power Source	G.W	APS-9102	EL920581	AC 0V ~ 300V	Jul. 16, 2013	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Jun. 27, 2013	Conducted (TH01-HY)
RF Cable-0.5m	HUBER+SUHNER	SUCOFLEX_103	10715/4 10716/4	30MHz ~ 26.5GHz	Dec. 02, 2013	Conducted (TH06-HY)

Note: Calibration Interval of instruments listed above is one year.

SPORTON INTERNATIONAL INC. Page No. : 50 of 51
TEL: 886-3-327-3456 Report Version : Rev. 01



FCC Test Report

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP40	100593	9kHz ~ 40GHz	Oct. 03, 2013	Radiation (03CH02-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH02-HY	30MHz ~ 1GHz 3m	May 11, 2013	Radiation (03CH02-HY)
Amplifier	Agilent	8447D	2944A11149	100kHz ~ 1.3GHz	Jul. 18, 2013	Radiation (03CH02-HY)
Amplifier	Agilent	8449B	3008A02373	1GHz ~ 26.5GHz	Aug. 28, 2013	Radiation (03CH02-HY)
Horn Antenna	ETS-LINDGREN	3117	00091920	1GHz ~ 18GHz	Nov. 25, 2013	Radiation (03CH02-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15GHz ~ 40GHz	Jan. 10, 2014	Radiation (03CH02-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	9kHz ~ 1GHz	Nov. 09, 2013	Radiation (03CH02-HY)
RF Cable-high	SUHNER	SUCOFLEX106	03CH02-HY	1GHz ~ 40GHz	Mar. 05, 2013	Radiation (03CH02-HY)
Bilog Antenna	SCHAFFNER	CBL61128	2723	30MHz ~ 2GHz	Oct. 10, 2013	Radiation (03CH02-HY)
Turn Table	Chaintek Instruments	3000	MF7802058	0~ 360 degree	N/A	Radiation (03CH02-HY)
Antenna Mast	MF	MF7802	MF780208205	1 ~ 4 m	N/A	Radiation (03CH02-HY)

Report No.: FR3D0631

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Loop Antenna	TESEQ	HLA 6120	31244	9 kHz - 30 MHz	Dec. 02, 2012	Radiation (03CH02-HY)

Note: Calibration Interval of instruments listed above is two year.

SPORTON INTERNATIONAL INC. Page No. : 51 of 51
TEL: 886-3-327-3456 Report Version : Rev. 01