



## FCC PART 15 B

### TEST REPORT

For

### Shenzhen TongFang Information Technologies CO.,LTD

Floor3, Building D, TongFang Information Harbour, LangShan Road, High-tech Industrial Park North,  
NanShan District, ShenZhen, P.R.China 518058

FCC ID: 2ABKZ-UA791909

<b>Report Type:</b> Original Report	<b>Product Type:</b> MID
<b>Test Engineer:</b> <u>Allen Qiao</u> <i>Allen Qiao</i>	
<b>Report Number:</b> <u>RDG150209002-00D</u>	
<b>Report Date:</b> <u>2015-01-15</u>	
<b>Reviewed By:</b> <u>Sula Huang</u> <i>Sula Huang</i> <u>RF Engineer</u>	
<b>Test Laboratory:</b> Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

## **TABLE OF CONTENTS**

<b>GENERAL INFORMATION.....</b>	<b>3</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	3
OBJECTIVE .....	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY .....	3
TEST FACILITY.....	3
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>4</b>
DESCRIPTION OF TEST CONFIGURATION .....	4
EUT EXERCISE SOFTWARE .....	4
EQUIPMENT MODIFICATIONS .....	4
SUPPORT EQUIPMENT LIST AND DETAILS .....	4
EXTERNAL CABLE.....	4
CONFIGURATION OF TEST SETUP .....	5
<b>SUMMARY OF TEST RESULTS .....</b>	<b>6</b>
<b>FCC§15.107 - CONDUCTED EMISSIONS.....</b>	<b>7</b>
MEASUREMENT UNCERTAINTY .....	7
EUT SETUP .....	7
EMI TEST RECEIVER SETUP.....	8
TEST EQUIPMENT LIST AND DETAILS.....	8
TEST PROCEDURE .....	8
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	8
TEST RESULTS SUMMARY.....	9
TEST DATA .....	9
<b>FCC §15.109 - RADIATED SPURIOUS EMISSIONS.....</b>	<b>12</b>
MEASUREMENT UNCERTAINTY .....	12
EUT SETUP .....	12
EMI TEST RECEIVER SETUP .....	13
TEST PROCEDURE .....	14
TEST EQUIPMENT LIST AND DETAILS.....	14
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	14
TEST RESULTS SUMMARY.....	14
TEST DATA .....	15

## GENERAL INFORMATION

### Product Description for Equipment Under Test (EUT)

The *Shenzhen TongFang Information Technologies CO., LTD*'s product, model number: *B9SS (FCC ID: 2ABKZ-UA791909)* (or the "EUT") in this report is a *MID*, which was measured approximately: 24.7 cm (L) x 19.4 cm (W) x 1.2 cm (H), rated input voltage: DC 3.7V rechargeable Li-ion battery or DC5V charging from USB port. The highest operating frequency is 1.3GHz.

Adapter information:

Model: FEF0500200A1BU  
Input: 100-240V~50/80Hz, 0.3A  
Output: 5V, 2.0A

*All measurement and test data in this report was gathered from production sample serial number: 150209002 (Assigned by BACL, Dongguan). The EUT was received on 2015-02-10*

### Objective

This test report is prepared on behalf of *Shenzhen TongFang Information Technologies CO., LTD* in accordance with Part 2, Subpart J, and Part 15-Subparts A and B of the Federal Communications Commission's rules.

The objective of the manufacturer is to determine the compliance of EUT with FCC Part 15 B Class B.

### Related Submittal(s)/Grant(s)

FCC Part 15C DSS submissions with FCC ID: 2ABKZ-UA791909.  
FCC Part 15C DTS submissions with FCC ID: 2ABKZ-UA791909.  
FCC Part 15E NII submissions with FCC ID: 2ABKZ-UA791909.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Dongguan).

### Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communications Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 06, 2015. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The system was configured for testing in a typical fashion (as normally used by a typical user).

### EUT Exercise Software

Withrax.exe was used in the test.

### Equipment Modifications

No modification was made to the EUT tested.


### Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
DELL	Laptop	PP11L	QDS-BRCM1017
HP	Printer	C3941A	JPTVOB2337
DELL	Keyboard	L100	CNORH656658907BL05DC
AST	Modem	AEM-2100	0293
Earphone	N/A	N/A	N/A

### External Cable

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Serial Cable	yes	no	1.2	Serial Port of Laptop	Modem
Parallel Cable	yes	no	1.2	Parallel Port of Laptop	Printer
Keyboard Cable	yes	no	1.2	USB Port of Laptop	Keyboard
Earphone Cable	no	no	1.2	EUT	Earphone
USB Cable	yes	no	1.0	Laptop	EUT

## Configuration of Test Setup

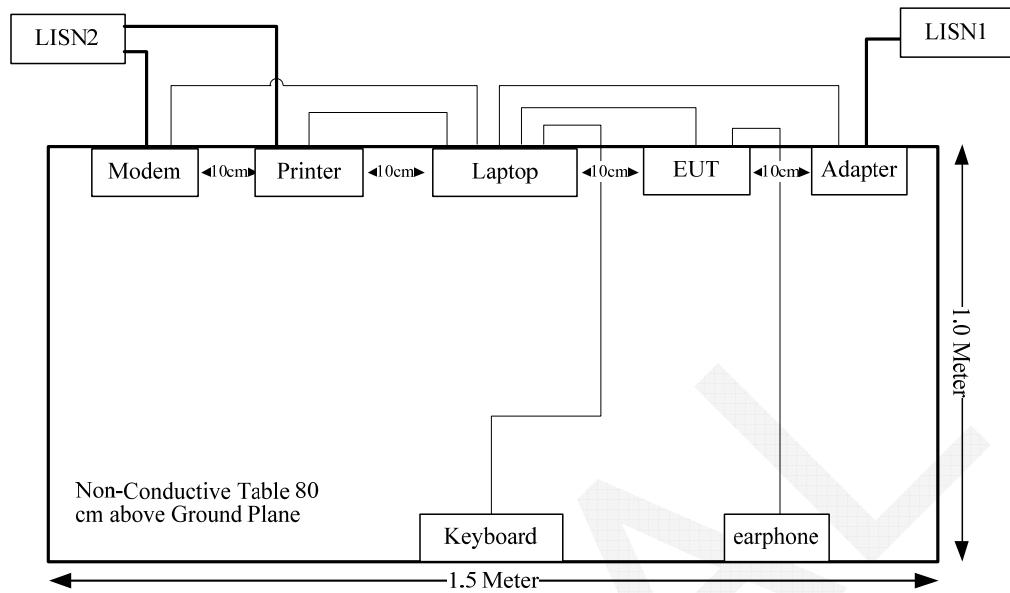

## SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§15.107	Conducted Emissions	Compliance
§15.109	Radiated Emissions	Compliance

## FCC§15.107 - CONDUCTED EMISSIONS

### Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are Receiver, cable loss, and LISN.

Compliance or non- compliance with a disturbance limit shall be determined in the following manner:

If  $U_{\text{lab}}$  is less than or equal to  $U_{\text{cisp}}$  of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non - compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If  $U_{\text{lab}}$  is greater than  $U_{\text{cisp}}$  of Table 1, then:


- compliance is deemed to occur if no measured disturbance level, increased by  $(U_{\text{lab}} - U_{\text{cisp}})$ , exceeds the disturbance limit;
- non - compliance is deemed to occur if any measured disturbance level, increased by  $(U_{\text{lab}} - U_{\text{cisp}})$ , exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Dongguan) is 3.46 dB (150 kHz to 30 MHz).

Table 1 – Values of  $U_{\text{cisp}}$

Measurement	$U_{\text{cisp}}$
Conducted disturbance at mains port using AMN (150 kHz to 30 MHz)	3.4 dB

### EUT Setup

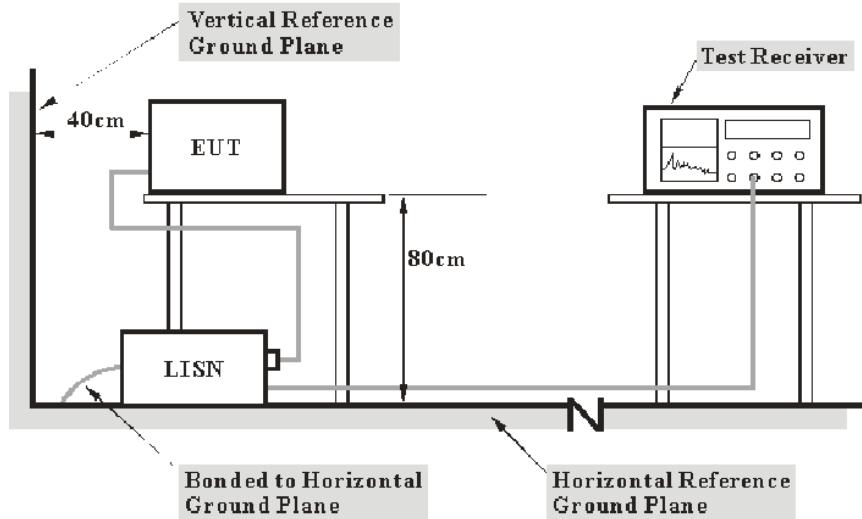

**Note:**

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15 B Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The adapter was connected to a 120V/60Hz AC power source.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2014-10-16	2015-10-16
R&S	L.I.S.N	ESH3-Z5	843331/015	N/A	N/A
R&S	Two-line V-network	ENV 216	3560.6550.12	2014-12-11	2015-12-11
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A

\* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Procedure

During the conducted emission test, the adapter of laptop was connected to the outlet of the first LISN and the other support equipments were connected to the outlet of the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

### Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

Herein,

$V_C$ : corrected voltage amplitude

$V_R$ : reading voltage amplitude

$A_c$ : attenuation caused by cable loss

VDF: voltage division factor of AMN or ISN

The “Margin” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15 B Class B, with the worst margin reading of:

**10.7 dB at 0.219886 MHz in the Neutral conducted mode**

## Test Data


### Environmental Conditions

<b>Temperature:</b>	21 °C
<b>Relative Humidity:</b>	39 %
<b>ATM Pressure:</b>	101.7kPa

*The testing was performed by Allen Qiao on 2015-02-10.*

*Test Mode: USB Downloading*


**AC120V, 60Hz, Line:**

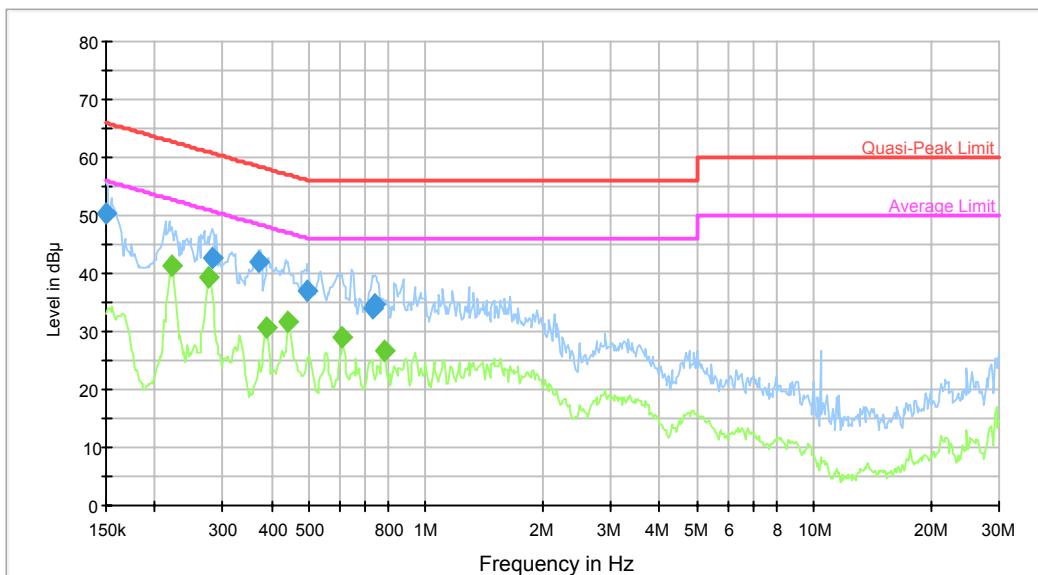

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)	Comment
0.150000	50.3	9.000	L1	10.0	15.7	66.0	Compliance
0.281497	42.8	9.000	L1	10.7	18.0	60.8	Compliance
0.372042	41.8	9.000	L1	10.7	16.6	58.5	Compliance
0.495646	37.0	9.000	L1	10.4	19.1	56.1	Compliance
0.726569	34.1	9.000	L1	10.6	21.9	56.0	Compliance
0.738241	34.5	9.000	L1	10.6	21.5	56.0	Compliance

Frequency (MHz)	Average (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)	Comment
0.221645	41.2	9.000	L1	10.7	11.6	52.8	Compliance
0.274848	39.2	9.000	L1	10.7	11.8	51.0	Compliance
0.390261	30.6	9.000	L1	10.6	17.4	48.1	Compliance
0.443327	31.6	9.000	L1	10.5	15.4	47.0	Compliance
0.609741	28.9	9.000	L1	10.5	17.1	46.0	Compliance
0.780588	26.5	9.000	L1	10.5	19.5	46.0	Compliance

AC120V, 60Hz, Neutral:

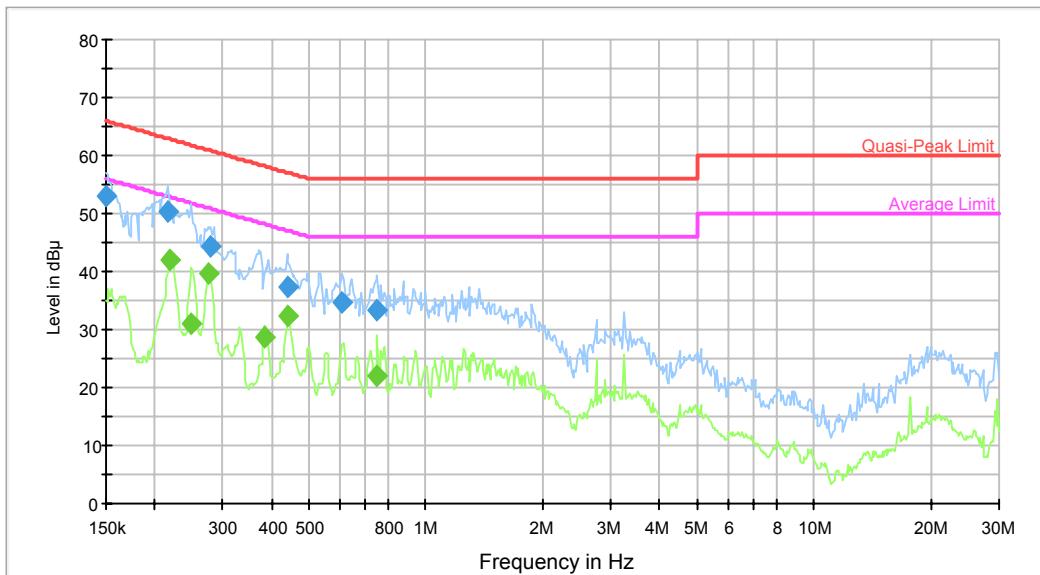

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)	Comment
0.150000	52.9	9.000	N	10.2	13.1	66.0	Compliance
0.216409	50.2	9.000	N	11.3	12.7	63.0	Compliance
0.279263	44.3	9.000	N	11.2	16.6	60.8	Compliance
0.439808	37.3	9.000	N	10.6	19.8	57.1	Compliance
0.609741	34.7	9.000	N	10.5	21.3	56.0	Compliance
0.750100	33.4	9.000	N	10.6	22.6	56.0	Compliance

Frequency (MHz)	Average (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)	Comment
0.219886	42.1	9.000	N	11.3	10.7	52.8	Compliance
0.249785	31.0	9.000	N	11.2	20.8	51.8	Compliance
0.277046	39.8	9.000	N	11.2	11.1	50.9	Compliance
0.384091	28.6	9.000	N	10.8	19.6	48.2	Compliance
0.443327	32.2	9.000	N	10.6	14.8	47.0	Compliance
0.750100	22.1	9.000	N	10.6	23.9	46.0	Compliance

## FCC §15.109 - RADIATED SPURIOUS EMISSIONS

### Measurement Uncertainty

Compliance or non- compliance with a disturbance limit shall be determined in the following manner:

If  $U_{\text{lab}}$  is less than or equal to  $U_{\text{cispr}}$  of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non - compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If  $U_{\text{lab}}$  is greater than  $U_{\text{cispr}}$  of Table 1, then:

- compliance is deemed to occur if no measured disturbance level, increased by  $(U_{\text{lab}} - U_{\text{cispr}})$ , exceeds the disturbance limit;
- non - compliance is deemed to occur if any measured disturbance level, increased by  $(U_{\text{lab}} - U_{\text{cispr}})$ , exceeds the disturbance limit.


Based on CISPR 16-4-2: 2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is:30M~200MHz: 5.0 dB; 200M~1GHz: 6.2 dB; 1G~6GHz: 4.45 dB, 6G~18GHz: 5.23 dB

Table 1 – Values of  $U_{\text{cispr}}$


Measurement	$U_{\text{cispr}}$
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB

### EUT Setup

Below 1GHz:

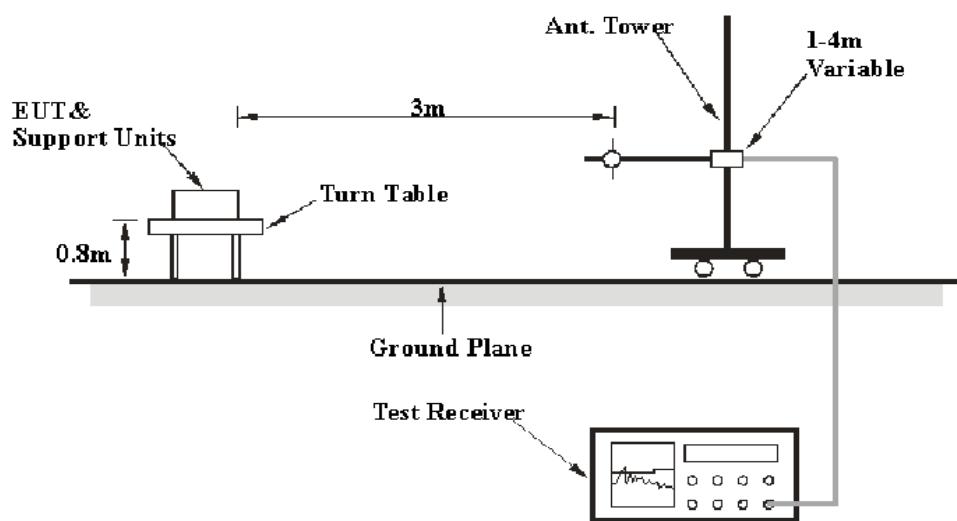

Above 1GHz:

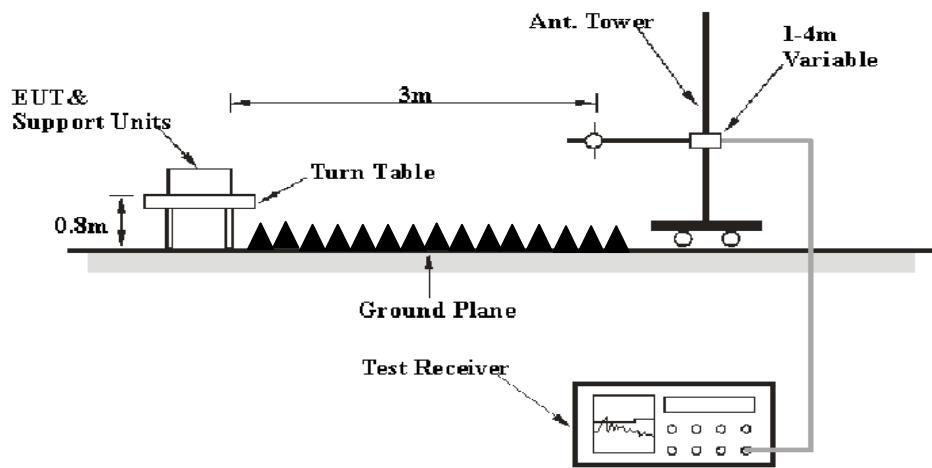

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC Part 15.109 Class B limits.

### EMI Test Receiver Setup

The system was investigated from 30 MHz to 6 GHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	Peak
	1 MHz	10 Hz	/	Ave.

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The data was recorded in the Quasi-peak detection mode for below 1 GHz, peak and average detection mode above 1 GHz.

## Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2014-05-09	2015-05-09
Sunol Sciences	Antenna	JB3	A060611-3	2014-07-28	2017-07-27
HP	Amplifier	8447E	2434A02181	2014-09-01	2015-09-01
R&S	Spectrum Analyzer	FSEM	DE31388	2014-05-09	2015-05-09
ETS-Lindgren	Horn Antenna	3115	000 527 35	2012-09-06	2015-09-06
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2014-02-19	2015-02-19

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Results Summary

According to the data in the following table, the EUT complied with the FCC Part 15 B Class B, with the worst margin reading of:

**2.7 dB at 432.5500 MHz in the Horizontal polarization**

## Test Data

### Environmental Conditions

<b>Temperature:</b>	20.3~20.8 °C
<b>Relative Humidity:</b>	66~67%
<b>ATM Pressure:</b>	101.3~101.7 kPa


The testing was performed by Allen Qiao from 2015-02-10 to 2015-02-12.

Test Result: Compliance

Test Mode: USB Downloading


- 1) Below 1G:

#### Horizontal

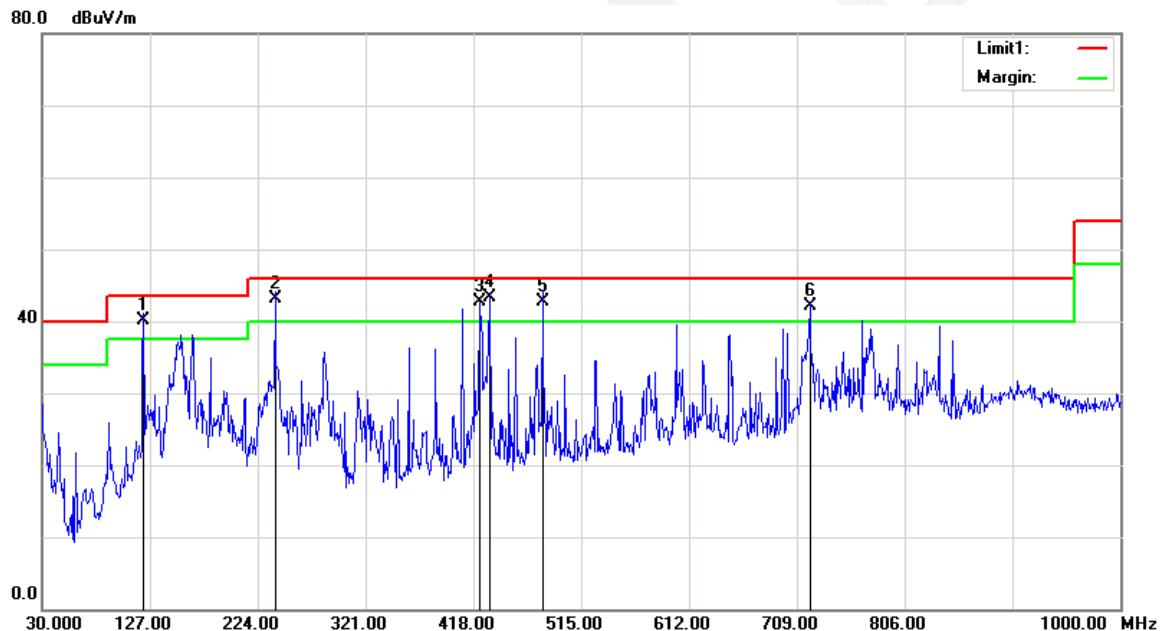

Frequency (MHz)	Receiver Reading (dB $\mu$ V)	Detector (PK/QP/Ave)	Correction Factor (dB/m)	Cord. Amp. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
121.1800	45.73	QP	-5.63	40.10	43.50	3.40*
239.5200	51.17	QP	-7.97	43.20	46.00	2.80*
423.8200	45.73	QP	-3.03	42.70	46.00	3.30*
432.5500	46.03	QP	-2.73	43.30	46.00	2.70*
480.0800	44.23	QP	-1.43	42.80	46.00	3.20*
720.6400	40.58	QP	1.52	42.10	46.00	3.90*

\*Within measurement uncertainty!

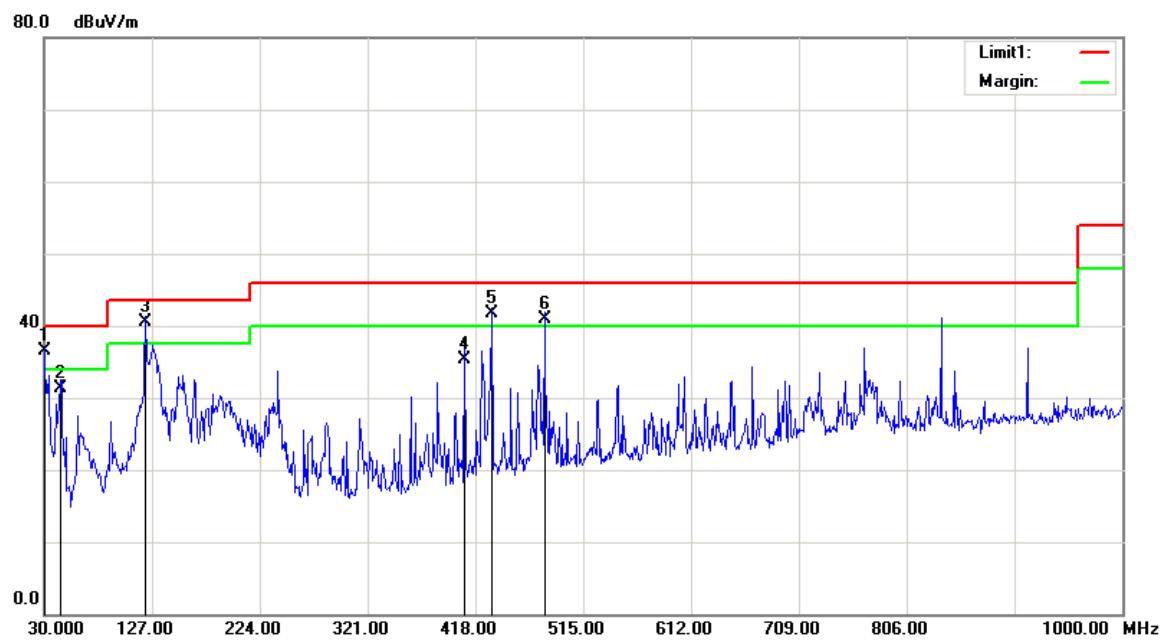
**Vertical**

Frequency (MHz)	Receiver Reading (dB $\mu$ V)	Detector (PK/QP/Ave)	Correction Factor (dB/m)	Cord. Amp. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
30.0000	33.22	QP	3.38	36.60	40.00	3.40*
44.5500	41.10	QP	-9.70	31.40	40.00	8.60
121.1800	46.13	QP	-5.63	40.50	43.50	3.00*
408.3000	38.69	QP	-3.29	35.40	46.00	10.60
432.5500	44.43	QP	-2.73	41.70	46.00	4.30*
30.0000	33.22	QP	3.38	36.60	40.00	3.40*


\*Within measurement uncertainty!

2) Above 1G:

**Horizontal**

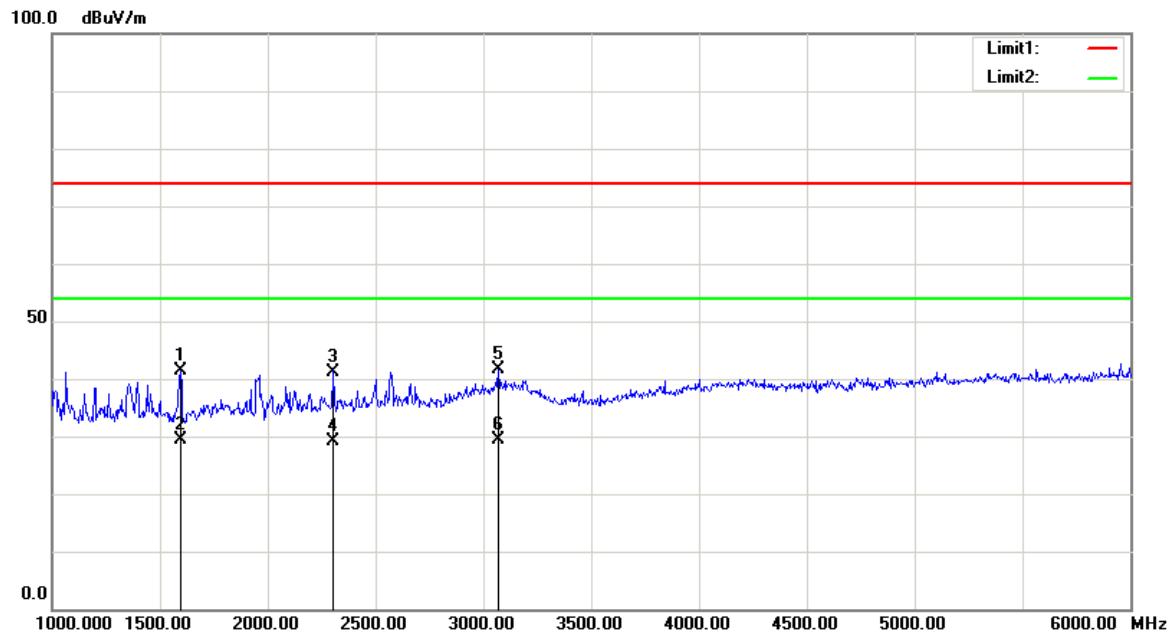

Frequency (MHz)	Receiver Reading (dB $\mu$ V)	Detector (PK/QP/Ave)	Correction Factor (dB/m)	Cord. Amp. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
1595.000	42.73	peak	-1.45	41.28	74.00	32.72
1595.000	30.76	AVG	-1.45	29.31	54.00	24.69
2305.000	39.76	peak	1.49	41.25	74.00	32.75
2305.000	27.58	AVG	1.49	29.07	54.00	24.93
3072.500	34.84	peak	6.69	41.53	74.00	32.47
3072.500	22.65	AVG	6.69	29.34	54.00	24.66

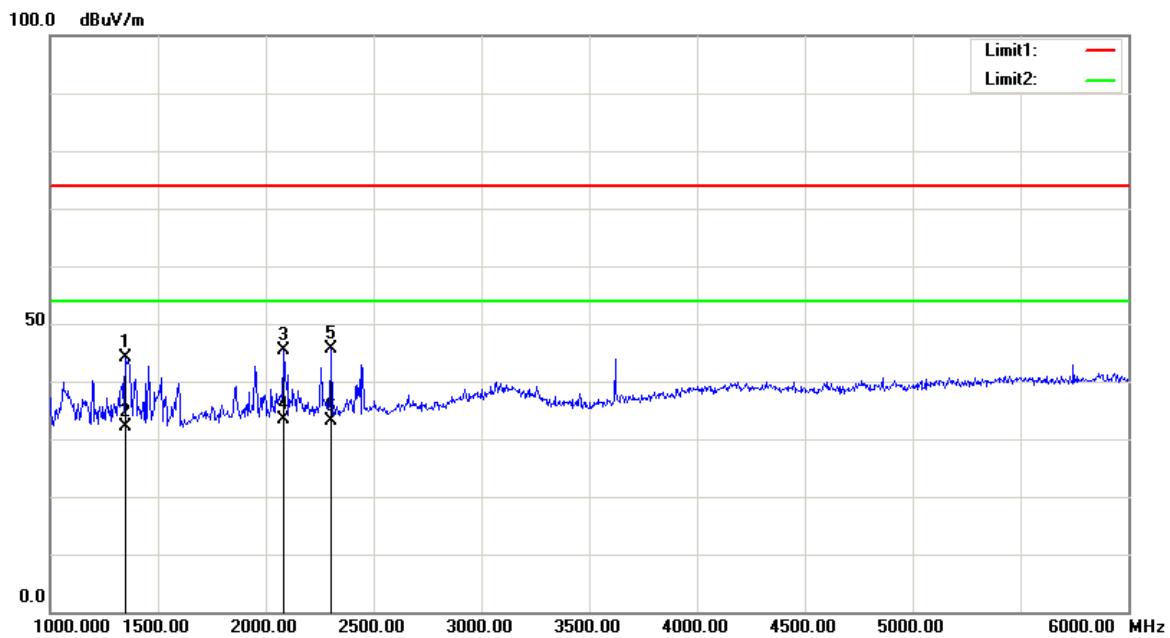**Vertical**

Frequency (MHz)	Receiver Reading (dB $\mu$ V)	Detector (PK/QP/Ave)	Correction Factor (dB/m)	Cord. Amp. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
1350.000	44.70	peak	-0.54	44.16	74.00	29.84
1350.000	32.67	AVG	-0.54	32.13	54.00	21.87
2087.500	44.71	peak	0.72	45.43	74.00	28.57
2087.500	32.65	AVG	0.72	33.37	54.00	20.63
2305.000	44.11	peak	1.49	45.60	74.00	28.40
2305.000	31.76	AVG	1.49	33.25	54.00	20.75

\*\*\*\*\*END OF REPORT\*\*\*\*\*