

FCC RF TEST REPORT

APPLICANT

: Nomura Engineering Co., Ltd.

PRODUCT NAME

: Radio Module

MODEL NAME

TS02FE-F

TRADE NAME

: N.A

BRAND NAME

: N.A

FCC ID

: 2AIXL-TS02FE90

STANDARD(S)

: 47 CFR Part 90 Subpart I

ISSUE DATE

: 2016-11-23



NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.



FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Http://www.morlab.com E-mail: service@morlab.cn

Tel: 86-755-36698555

Fax: 86-755-36698525



DIRECTORY

| TEST | REPORT DECLARATION | | | | | |
|-------------|---------------------------------|-----------------|------|---------|---------|---------------------|
| | | | | | | |
| <u>1. I</u> | ECHNICAL INFORMATION | | | <u></u> | <u></u> | <u>.</u> |
| | | | | | | |
| 1.1 | APPLICANT INFORMATION | | | | | 5 |
| 1.2 | EQUIPMENT UNDER TEST (EUT) DESC | CRIPTION ······ | | | | 5 |
| 1.2.1 | | | | | | 5 |
| 1.3 | TEST STANDARDS AND RESULTS | | | | | 6 |
| 1.3.1 | | | | | | |
| | | | | | | |
| 2. 4 | 17 CFR PART2/15/90 REQUIREME | NTS | | | | ·····- 7 |
| RLAD | | | | | | |
| 2.1 | ANTENNA REQUIREMENT ····· | | | | <u></u> | 7 |
| 2.1.1 | | | | | | , |
| 2.1.2 | | | | | | |
| 2.2 | POWER AND ANTENNA HEIGHT LIMITS | | | | | |
| 2.2.1 | REQUIREMENT | | | | | |
| 2.2.2 | | | | | | |
| 2.2.3 | | | | | | |
| 2.3 | OCCUPIED BANDWIDTH | | | | | |
| 2.3.1 | REQUIREMENT····· | | | <u></u> | | 9 |
| 2.3.2 | TEST DESCRIPTION | | | | | 11 |
| 2.3.3 | TEST RESULT······ | | | | | 13 |
| 2.4 | EMISSION MASK ····· | | | | | |
| 2.4.1 | | | | | | |
| 2.4.2 | | | | | | |
| 2.4.3 | TEST RESULT····· | | | | | 15 |
| 2.5 | FREQUENCY STABILITY | | | | | |
| 2.5.1 | | | | | | |
| 2.5.2 | | | | | | |
| 2.5.3 | | | | | | |
| 2.6 | TRANSMITTER FREQUENCY BEHAVIOR | | | | | |
| 2.6.1 | | | | | | |
| 2.6.2 | | | | | | |
| 2.6.3 | TEST RESULT······ | | | | | 22 |



| 2.7 | TRANSMITTER CONDUCTED SPURIOUS EMISSION | 24 |
|--------|--|-------|
| 2.7.1 | REQUIREMENT | 24 |
| 2.7.2 | TEST DESCRIPTION ····· | 24 |
| 2.7.3 | | |
| 2.8 | TRANSMITTER RADIATED SPURIOUS EMISSION | 29 |
| 2.8.1 | REQUIREMENT TEST DESCRIPTION | 29 |
| 2.8.2 | TEST DESCRIPTION | 29 |
| 2.8.3 | Test Result | 31 |
| 2.9 | RECEIVER CONDUCTED SPURIOUS EMISSION ······ | 35 |
| 2.9.1 | REQUIREMENT | 35 |
| 2.9.2 | | 35 |
| 2.9.3 | | |
| 2.10 | RECEIVER RADIATED SPURIOUS EMISSION | 39 |
| 2.10.1 | 1 REQUIREMENT | 39 |
| 2.10.2 | 2 Test Description ····· | 39 |
| 2.10.3 | 3 TEST RESULT······ | 40 |
| MO | FLE HOW AE IN SELECT MORLE MORLE AE INC. | MORLA |
| ANNE | EX A GENERAL INFORMATION···································· | 42 |

| | Change History | | | | | | | |
|-------|------------------------------|--|--|--|--|--|--|--|
| Issue | Issue Date Reason for change | | | | | | | |
| 1.0 | 1.0 2016-11-23 First edition | | | | | | | |
| MC MC | is the | The Children Month with the Children Month | | | | | | |



TEST REPORT DECLARATION

| Applicant | Nomura Engineering Co., Ltd. |
|----------------------|--|
| Applicant Address | 1-7-2 Shibuya, Yamato City, Kanagawa, 242-0023 Japan |
| Manufacturer | Nomura Engineering Co., Ltd. |
| Manufacturer Address | 1-7-2 Shibuya, Yamato City, Kanagawa, 242-0023 Japan |
| Product Name | Radio Module |
| Model Name | TS02F |
| Brand Name | N.A |
| HW Version | P5-3 |
| SW Version | 0040 |
| Test Standards | 47 CFR Part 90 Subpart I |
| Test Date | 2016-11-15 to 2016-11-23 |
| Test Result | PASS |

| Tested by | - 4 | Zou Jan | |
|-----------|-----|----------|--|
| | | Zou Jian | |

Qiu Xiaojun Reviewed by

Qiù Xiaojun

Approved by Peng Huarui



1. TECHNICAL INFORMATION

Note: Provide by applicant.

1.1 Applicant Information

| Company: | Nomura Engineering Co., Ltd. |
|----------|--|
| Address: | 1-7-2 Shibuya, Yamato City, Kanagawa, 242-0023 Japan |

1.2 Equipment under Test (EUT) Description

| Brand Name: | N.A |
|------------------|--|
| Trade Name: | N.A |
| Model Name: | TS02F |
| Frequency Range: | The frequency used is 434.05MHz – 434.5375MHz (Channel spacing 12.5KHz); |
| Modulation Type: | FSK |
| Antenna Type: | λ/4 antenna |
| Antenna Gain: | 2.14 dBi |

Note1: The EUT is a Radio Module and the frequencies allocated for the Radio Module is F(MHz)=434.05+0.0125*(n-1) (1<=n<=40). The lowest, middle, highest channel numbers of the Bluetooth Module used and tested in this report are separately 1 (434.05MHz), 20 (434.2875MHz) and 40 (434.5375MHz).

Note2: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer..

1.2.1 Identification of all used EUTs

The EUT identity consists of numerical and letter characters, the letter character indicates the test sample, and the following two numerical characters indicate the software version of the test sample.

| EUT Identity | Hardware Version | Software Version | | | | |
|---------------------|------------------|------------------|--|--|--|--|
| 01 | P5-3 | 0040 | | | | |



1.3 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 90 Subpar for the EUT FCC ID Certification:

| No. | Identity | Document Title |
|------|---------------------------------|-------------------------|
| LAE1 | 47 CFR Part 90 (October 1,2015) | Radio Frequency Devices |

Test detailed items/section required by FCC rules and results are as below:

| No. | lo. Section Description | | Test Date | Result |
|-----|-------------------------|---|------------|--------|
| 1 | 15.203 | Antenna Requirement | N.A | PASS |
| 2 | 90.205 | Power and antenna height limits | 2016.11.22 | PASS |
| 3 💎 | 90.209 | Occupied Bandwidth | 2016.11.21 | PASS |
| 4 | 90.210 | Emission Mask | 2016.11.21 | PASS |
| 5 🟑 | 90.213 | Frequency Stability | 2016.11.22 | PASS |
| 6 | 90.214 | Transmitter Frequency Behavior | 2016.11.21 | PASS |
| 7 | 2.1051; 90.210(h) | Transmitter Conducted Spurious Emission | 2016.11.21 | PASS |
| 8 | 2.1053; 90.210(h) | Transmitter Radiated Spurious Emission | 2016.11.23 | PASS |
| 9 | 15.111(a) | Receiver Conducted Spurious Emission | 2016.11.21 | PASS |
| 10 | 15.109;15.111(a) | Receiver Radiated Spurious Emission | 2016.11.23 | PASS |

The test cases were performed according to the method of measurements prescribed in TIA-603-D-2010(JUNE 24, 2010)

1.3.1 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

| Temperature (°C): | 15 - 35 |
|-----------------------------|---------|
| Relative Humidity (%): | 30 -60 |
| Atmospheric Pressure (kPa): | 86-106 |



2. 47 CFR PART2/15/90 REQUIREMENTS

2.1 Antenna requirement

2.1.1 Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2 Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.

2.2 Power and antenna height limits

2.2.1 Requirement


According to FCC section 90.205, The maximum allowable station effective radiated power (ERP) is dependent upon the station's antenna HAAT and required service area and will be authorized in accordance with table 2

| GIAE MORL MO | 2 | B | alp | Ser | vice ar | ea radi | us (km |) 🕫 🦷 | QLAB. | | | | |
|--------------------------|----|-----|------|------|---------|---------|--------|-------|-------|------|--|--|--|
| O' AB THE RLAP | 3 | 8 | 13 | 16 | 24 | 32 | 40 | 48 | 64 | 80 | | | |
| Maximum ERP (w) | 2 | 100 | 2500 | 2500 | 2500 | 2500 | 2500 | 2500 | 2500 | 2500 | | | |
| Up to reference HAAT (m) | 15 | 15 | 15 | 27 | 63 | 125 | 250 | 410 | 950 | 2700 | | | |

2.2.2 Test Description

The measured output power was calculated by the reading of the spectrum analyzer and calibration.

A. Test Setup:



The EUT (Equipment under the test) which is powered by the Battery is connected to the Spectrum analyze with an 30dB attenuator; the path loss as the factor is calibrated to correct the reading, all test result in Spectrum analyzer.



B. Equipments List:

Please reference ANNEX A (1.4).

2.2.3 Test Result

The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the EUT.

A. Test Verdict:

| Modulation Type | Frequency (MHz) | Measured Output Peak Power (dBm) | Antenna Gain (dBd) | ERP (dBm) | ERP (W) |
|--------------------|--------------------|--|--------------------------|--------------|------------|
| All Mor | 434.05 | 8.54 | 110 | 8.53 | 0.0071 |
| FSK | 434.2875 | 8.8 | -0.01 | 8.79 | 0.0076 |
| MOL | 434.5375 | 9.06 | OF | 9.05 | 0.0080 |

Note: The EUT Service area radius is 3km, allow the Maximum ERP is 2w, antenna height above average terrain (HAAT) less than 15m



2.3 Occupied Bandwidth

2.3.1 Requirement

According to FCC section 90.209 Bandwidth limitations:

- (a) Each authorization issued to a station licensed under this part will show an emission designator representing the class of emission authorized. The designator will be prefixed by a specified necessary bandwidth. This number does not necessarily indicate the bandwidth occupied by the emission at any instant. In those cases where §2.202 of this chapter does not provide a formula for the computation of necessary bandwidth, the occupied bandwidth, as defined in part 2 of this chapter, may be used in lieu of the necessary bandwidth.
- (b) The maximum authorized single channel bandwidth of emission corresponding to the type of emission specified in §90.207 is as follows:
- (1) For A1A or A1B emissions, the maximum authorized bandwidth is 0.25 kHz. The maximum authorized bandwidth for type A3E emission is 8 kHz.
- (2) For operations below 25 MHz utilizing J3E emission, the bandwidth occupied by the emission shall not exceed 3000 Hz. The assigned frequency will be specified in the authorization. The authorized carrier frequency will be 1400 Hz lower in frequency than the assigned frequency. Only upper sideband emission may be used. In the case of regularly available double sideband radiotelephone channels, an assigned frequency for J3E emissions is available either 1600 Hz below or 1400 Hz above the double sideband radiotelephone assigned frequency.
- (3) For all other types of emissions, the maximum authorized bandwidth shall not be more than that normally authorized for voice operations.
- (4) Where a frequency is assigned exclusively to a single licensee, more than a single emission may be used within the authorized bandwidth. In such cases, the frequency stability requirements of §90.213 must be met for each emission.
- (5) Unless specified elsewhere, channel spacings and bandwidths that will be authorized in the following frequency bands are given in the following table.





Standard Channel Spacing/Bandwidth

| Frequency band (MHz) | Channel spacing (kHz) | Authorized bandwidth (kHz) |
|---------------------------------------|-----------------------|----------------------------|
| Below 25 ² | 20 | 20 |
| 25-50 | 20 | 20 |
| 72-76 | ¹ 17.5 | ^{1,3} /20/11.25/6 |
| 150-174 | 6.25 | 20/11.25/6 |
| 216-220 ⁵ | 5 | 4 |
| 220-222 | ¹ 16.25 | ^{1,3} /20/11.25/6 |
| 406-512 ² | 12.5 | 20 |
| 806-809/851-854 | 25 | 20 |
| 809-824/854-869 | 12.5 | 13.6 |
| 896-901/935-940 | RIAL MORL | Me AB RLAN |
| 902-928 ⁴ | 25 | 20 |
| 929-930 | 12.5 | 12.5 |
| 1427-1432 ⁵ | AB QLAR | NORTH MO. OF |
| ³ 2450-2483.5 ² | ORL MC AE | RLAP MORL |
| Above 2500 ² | ALUE MORLE | Mo. OF THE SLAP |

¹For stations authorized on or after August 18, 1995.

³Operations using equipment designed to operate with a 25 kHz channel bandwidth will be authorized a 20 kHz bandwidth. Operations using equipment designed to operate with a 12.5 kHz channel bandwidth will be authorized a 11.25 kHz bandwidth. Operations using equipment designed to operate with a 6.25 kHz channel bandwidth will be authorized a 6 kHz bandwidth. All stations must operate on channels with a bandwidth of 12.5 kHz or less beginning January 1, 2013, unless the operations meet the efficiency standard of §90.203(j)(3).


⁴The maximum authorized bandwidth shall be 12 MHz for non-multilateration LMS operations in the band 909.75-921.75 MHz and 2 MHz in the band 902.00-904.00 MHz. The maximum authorized bandwidth for multilateration LMS operations shall be 5.75 MHz in the 904.00-909.75 MHz band; 2 MHz in the 919.75-921.75 MHz band; 5.75 MHz in the 921.75-927.25 MHz band and its associated 927.25-927.50 MHz narrowband forward link; and 8.00 MHz if the 919.75-921.75 MHz and 921.75-927.25 MHz bands and their associated 927.25-927.50 MHz and 927.50-927.75 MHz narrowband forward links are aggregated.

²Bandwidths for radiolocation stations in the 420-450 MHz band and for stations operating in bands subject to this footnote will be reviewed and authorized on a case-by-case basis.



2.3.2 Test Description

A. Test Set:



The EUT (Equipment under the test) which is powered by the Battery is connected to the Spectrum analyze with an 30dB attenuator; the path loss as the factor is calibrated to correct the reading, all test result in Spectrum analyzer.

Set the m spectrum analyzer's Center Frequency = fundamental frequency; RBW= 1 kHz; VBW= 3 kHz; Span= 30 kHz; Detector=peak; Sweep time=AUTO; Set 99% Occupied Bandwidth and 26dB Occupied Bandwidth

B. Equipments List:

Please reference ANNEX A(1.4).

2.3.3 Test Result

The lowest, middle and highest channels are selected to perform testing to record the 6 dB bandwidth of the EUT.

A. Test Verdict:

| . 10 | | | . 3/2 | | | . 5/5 |
|--------------------|--------------------|---------------------------|--------------------------|------------------|-------------|--------|
| Modulation Type | Frequency (MHz) | 99% Bandwidth (KHz) | 26 Bandwidth (KHz) | Refer to Plot | Limits(kHz) | Result |
| RLAL | 434.05 | 8.96 | 10.07 | Plot A1 | ≤11.25 | PASS |
| FSK | 434.2875 | 8.97 | 10.09 | Plot B1 | ≤11.25 | PASS |
| We WORK | 434.5375 | 9.03 | 10.08 | Plot C1 | ≤11.25 | PASS |

B. Test Plots:







(Plot A1: FSK 434.05MHz)



(Plot B1: FSK 434.2875 MHz)







(Plot C1: FSK 434.5375MHz)



2.4 Emission Mask


2.4.1 Requirement

According to FCC section 90.210, (d) Emission Mask D—12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the center of the authorized bandwidth f0 to 5.625 kHz removed from f0: Zero dB.
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least 7.27(fd-2.88 kHz) dB
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 12.5 kHz: At least 50 + 10 log (P) dB or 70 dB, whichever is the lesser attenuation.
- (4) The reference level for showing compliance with the emission mask shall be established using a resolution bandwidth sufficiently wide (usually two or three times the channel bandwidth) to capture the true peak emission of the equipment under test. In order to show compliance with the emission mask up to and including 50 kHz removed from the edge of the authorized bandwidth, adjust the resolution bandwidth to 100 Hz with the measuring instrument in a peak hold mode. A sufficient number of sweeps must be measured to insure that the emission profile is developed. If video filtering is used, its bandwidth must not be less than the instrument resolution bandwidth. For emissions beyond 50 kHz from the edge of the authorized bandwidth, see paragraph (o) of this section. If it can be shown that use of the above instrumentation settings do not accurately represent the true interference potential of the equipment under test, an alternate procedure may be used provided prior Commission approval is obtained.

2.4.2 Test Description

A. Test Set:



The EUT (Equipment under the test) which is powered by the Battery, it is connected to the Spectrum analyze with an 30dB attenuator; the path loss as the factor is calibrated to correct the reading for all test result in Spectrum analyzer. Make the EUT into the maximum power emission state :(1) On any frequency from the center of the authorized bandwidth f0 to 5.625 kHz removed



from f0: Zero dB.(2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least 7.27(fd-2.88 kHz) dB.(3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 12.5 kHz: At least 50 + 10 log (P) dB or 70 dB, whichever is the lesser attenuation. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100Hz. VBW=300Hz; Span=50KHz; Sweep points=2001; Sweep time=AUTO; Detector: Peak; Trace type: Trace average.

B. Equipments List:

Please reference ANNEX A (1.4).


2.4.3 Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.

A. Test Verdict:

| Modulation Type | Frequency (MHz) | Refer to Plot | Verdict |
|-----------------|-----------------|---------------|---------|
| 3 CLAP MO | 434.05 | Plot A4 | PASS |
| FSK | 434.2875 | Plot B4 | PASS |
| QLAD MORLY | 434.5375 | Plot C4 | PASS |

B. Test Plots:








(Plot A4: FSK 434.05MHz)



(Plot B4: FSK 434.2875MHz)





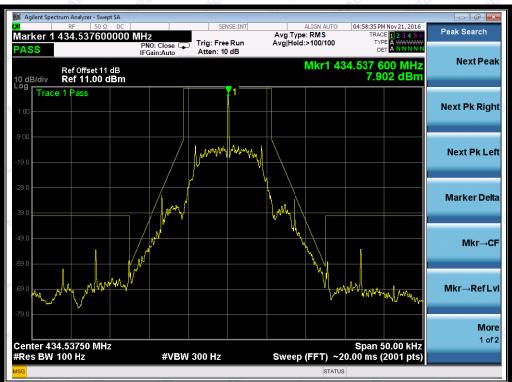

(Plot C4: FSK 434.5375MHz)



2.5 **Frequency Stability**


2.5.1 Requirement

According to FCC section 2.1055, the frequency stability shall be measured with variation of ambient temperature from -30°C to +50°C centigrade, for battery powered equipment, the frequency stability shall be measured with reducing primary supply voltage to the battery operating end point, which is specified by the manufacture. Vary primary supply voltage from 85 to 115 percent of the nominal value.

According to FCC section 90.213, In the 421-512 MHz band, mobile stations designed to operate with a 12.5 kHz channel bandwidth must have a frequency stability of 2.5 ppm

2.5.2 Test Description

A. Test Set:

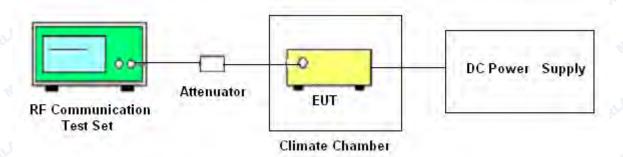

The EUT was set in the climate chamber and powered by the DC power supply, It is connected to the RF Communication Test Set with an 30dB attenuator; the path loss as the factor is calibrated to correct the reading for all test result.

After temperature stabilization for approximately 20 minutes, the lower, the middle and the highest frequency for was measured by the RF Communication Test Set and recorded, For Frequency stability Vs. Voltage the EUT was connected to a DC power supply and the voltage was adjusted in the required ranges.

B. Equipments List:

Please reference ANNEX A (1.4)

2.5.3 Test Result



A. Test Verdict:

| DC Voltage (V) | Frequency (MHz) | Temperature (°C) | Frequency error (Hz) | Measure (ppm) | Limit (ppm) | Result |
|-------------------|--------------------|---------------------|----------------------|------------------|----------------|--------|
| voitage (v) | (IVII IZ) | -30 | 337 | 0.78 | (ррііі) | Pass |
| The Most of M. | -20 | 345 | 0.79 | LAB . | Pass | |
| ZLAE | | -10 | 347 | 0.80 | E. 144 | Pass |
| MOL | | 0 | 339 | 0.78 | | Pass |
| 3.0 | 434.05 | 10 | 340 | 0.78 | 2.5 | Pass |
| Q.0 | LAE TO HOU | 20 | 349 | 0.80 | MOR | Pass |
| MO | | 30 | 352 | 0.81 | | Pass |
| QLAB | | 40 | 361 | 0.83 | | Pass |
| MOL | | 50 | 358 | 0.82 | | Pass |
| 10RLP | Wer | -30 | 366 | 0.84 | , ALA | Pass |
| VB W. | | -20 | 358 | 0.82 | | Pass |
| MO | | -10 | 364 | 0.84 | | Pass |
| ZLAB | | 0 | 359 | 0.83 | 2.5 | Pass |
| 3.0 | 434.2875 | 10 | 352 | 0.81 | | Pass |
| ORLA | | 20 | 374 | 0.86 | | Pass |
| THE MORIAE MORIA | 30 | 371 | 0.85 | MOL | Pass | |
| | 40 | 382 0.88 | | Pass | | |
| 2LAB | | 50 | 389 | 0.90 | L. Bur | Pass |
| MOR | T.A.B | -30 | 336 | 0.77 | ORLA | Pass |
| ORLAN | | -20 | 342 | 0.79 | | Pass |
| -B MI | | -10 | 331 | 0.76 | MORL | Pass |
| MOF | | LAE O OFF | 348 | 0.80 | | Pass |
| 3.0 | 434.5375 | 10 | 353 | 0.81 | 2.5 | Pass |
| NOT | | 20 | 361 | 0.83 | | Pass |
| ORLA | | 30 | 376 | 0.87 | | Pass |
| -B W | | 40 | 368 | 0.85 | | Pass |
| WORR WE | 50 | 377 | 0.87 | | Pass | |
| 2.4 | 424.05 | 20 | 353 | 0.81 | 0.5 | Pass |
| 3.6 | 434.05 | 20 | 345 | 0.79 | 2.5 | Pass |
| 2.4 | 404 0075 | 20 | 371 | 0.85 | 25-14 | Pass |
| 3.6 | 434.2875 | 20 | 368 | 0.85 | 2.5 | Pass |
| 2.4 | 121 E27E | 20 | 363 | 0.84 | LABO E | Pass |
| 3.6 | 434.5375 | 20 | 366 | 0.84 | 2.5 | Pass |



2.6 Transmitter Frequency Behavior

2.6.1 Requirement

According to FCC section 90.214:

Transmitters designed to operate in the 150-174 MHz and 421-512 MHz frequency bands must maintain transient frequencies within the maximum frequency difference limits during the time intervals indicated:

| Time intervals ^{1 2} | Maximum frequency | All equipment | | |
|-------------------------------|---------------------------|--------------------------|-------------------|--|
| rime intervais | difference ³ | 150 to 174 MHz | 421 to 512 MHz | |
| Transient Freque | ncy Behavior for Equipmen | t Designed to Operate of | n 25 kHz Channels | |
| t ₁ ⁴ | ±25.0 kHz | 5.0 ms | 10.0 ms | |
| t ₂ | ±12.5 kHz | 20.0 ms | 25.0 ms | |
| t ₃ ⁴ | ±25.0 kHz | 5.0 ms | 10.0 ms | |
| Transient Frequen | cy Behavior for Equipment | Designed to Operate on | 12.5 kHz Channels | |
| t ₁ ⁴ | ±12.5 kHz | 5.0 ms | 10.0 ms | |
| t ₂ | ±6.25 kHz | 20.0 ms | 25.0 ms | |
| t ₃ ⁴ | ±12.5 kHz | 5.0 ms | 10.0 ms | |
| Transient Frequen | cy Behavior for Equipment | Designed to Operate on | 6.25 kHz Channels | |
| t ₁ ⁴ | ±6.25 kHz | 5.0 ms | 10.0 ms | |
| t ₂ | ±3.125 kHz | 20.0 ms | 25.0 ms | |
| t ₃ ⁴ | ±6.25 kHz | 5.0 ms | 10.0 ms | |

¹_{on} is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.

2.6.2 Test Description

A. Test Setup



t₁ is the time period immediately following t_{on}.

t₂ is the time period immediately following t₁.

t₃ is the time period from the instant when the transmitter is turned off until t_{off}.


t_{off} is the instant when the 1 kHz test signal starts to rise.

² During the time from the end of t₂ to the beginning of t₃, the frequency difference must not exceed the limits specified in §90.213.

³ Difference between the actual transmitter frequency and the assigned transmitter frequency.

If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.



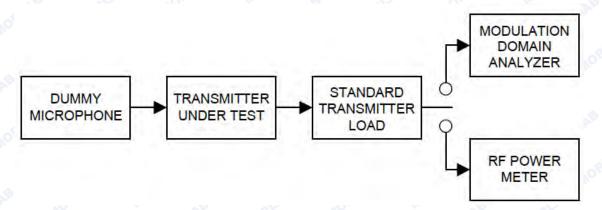

- a) Connect the equipment as illustrated.
- b) Connect the output of the standard transmitter load to the RF power meter. Supply sufficient attenuation via the RF attenuator to provide a level that is approximately 40 dB below the maximum allowable input to the modulation domain analyzer.
- c) Unkey the transmitter.
- d) Disconnect the RF power meter and connect the modulation domain analyzer in its place. Set the envelope trigger of the modulation domain analyzer to the minimum level that will trigger when the transmitter is keyed.
- e) Reduce the attenuation of the RF attenuator so that the input to the to the modulation domain analyzer is increased by 30 dB when the transmitter is keyed.
- f) Set the modulation domain analyzer to trigger on the rising edge of the waveform in order to capture a single-shot turn-on of the transmitter signal.
- g) Adjust the display of the modulation domain analyzer for proper viewing of the transmitter transient behavior. Set the time base reference to the left for observing the transmitter turn-on transient.
- h) Key the transmitter.
- i) Observe the stored display of the modulation domain analyzer. The signal trace shall be maintained within the allowable limits during the periods t1 and t2, and shall also remain within limits following t2.
- j) Adjust the modulation domain analyzer to trigger on the falling edge of the transmitter waveform in order to capture a single-shot turn-off transient of the transmitter signal.
- k) Adjust the display of the modulation domain analyzer for proper viewing of the transmitter transient behavior. Set the time base reference to the right for observing the transmitter turn-off transient.
- I) Unkey the transmitter.
- m) Observe the stored display of the modulation domain analyzer. The signal trace shall be maintained within the allowable limits during the period t3.






B. Equipments List:

Please reference ANNEX A(1.4).

2.6.3 Test Result

| Frequency | Transmitter status | Reference Plot | Result |
|-----------|--------------------|----------------|--------|
| 434.2875 | Off-On | Plot A5 | Pass |
| 434.2875 | On-Off | Plot B5 | Pass |

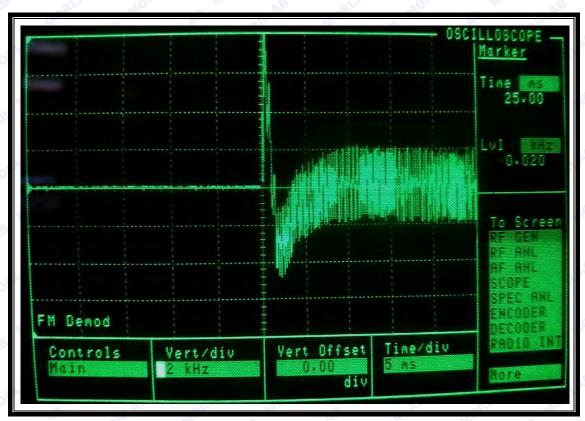

(Plot A5: Transmitter Frequency Behavior @ Frequency: 434.2875MHz Off-On)





(Plot B5: Transmitter Frequency Behavior @ Frequency: 434.2875MHz On-Off)



2.7 Transmitter Conducted Spurious Emission

2.7.1 Requirement

According to FCC section 2.1051, The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in §2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

According to FCC section 90.210, (d) Emission Mask D—12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

(3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 12.5 kHz: At least 50 + 10 log (P) dB or 70 dB, whichever is the lesser attenuation.

Radiated spurious emissions in dB = $50 + 10 \log 10$ (power out in Watts)or an equivalent absolute level of -20 dBm (10 μ W)

2.7.2 Test Description

A. Test Set:



The EUT was set in the climate chamber and powered by the DC power supply, It is connected to the Spectrum analyzer with an 30dB attenuator; the path loss as the factor is calibrated to correct the reading for all test result.

For measurements at frequencies below 1 GHz, the spectrum analyzer resolution bandwidth was set to 100kHz. For measurements at frequencies above 1 GHz, the spectrum analyzer resolution bandwidth was set to 1 MHz. Average detector is used for these measurements.

B. Equipments List:

Please reference ANNEX A (1.4).






2.7.3 Test Result

During the test, the EUT operating at the highest transmit power mode. The lowest, middle and highest channels are selected to perform testing to record the 99%and -26 dB bandwidth of the EUT. The following is the worst test results.

| Modulation Type | Frequency (MHz) | Refer to Plot | Verdict |
|-----------------|-----------------|---------------|---------|
| B RLAB MC | 434.05 | Plot A7 | PASS |
| FSK | 434.2875 | Plot B7 | PASS |
| RLAB | 434.5375 | Plot C7 | PASS |

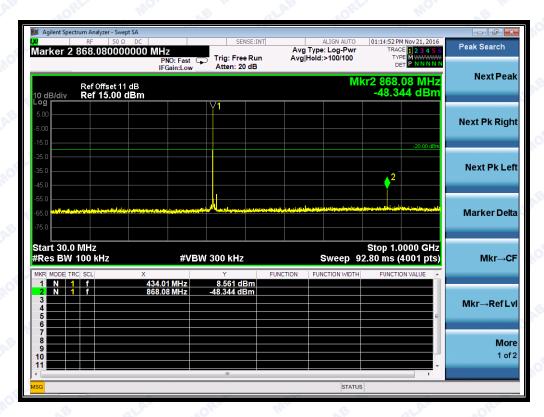


(Plot A7: FSK 434.05MHz 30MHz to 1GHz)








(Plot A7: FSK 434.05MHz 1GHz to 6GHz)

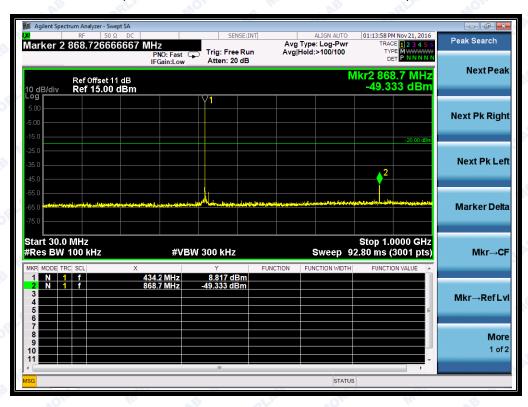

(Plot B7: FSK 434.2875MHz, 30MHz to 1GHz)










(Plot B7: FSK 434.2875MHz, 1GHz to 6GHz)

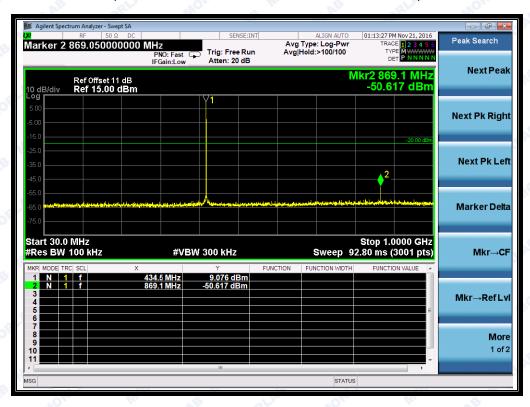

(Plot C7: FSK 434.5375MHz, 30MHz to 1GHz)







(Plot C7: FSK 434.5375MHz, 1GHz to 6GHz)



2.8 Transmitter Radiated Spurious Emission

2.8.1 Requirement

According to FCC section 2.1051 & 90.210,

- (a) Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission. For this test, single sideband, independent sideband, and controlled carrier transmitters shall be modulated under the conditions specified in paragraph (c) of §2.1049, as appropriate. For equipment operating on frequencies below 890 MHz, an open field test is normally required, with the measuring instrument antenna located in the far-field at all test frequencies. In the event it is either impractical or impossible to make open field measurements (e.g. a broadcast transmitter installed in a building) measurements will be accepted of the equipment as installed. Such measurements must be accompanied by a description of the site where the measurements were made showing the location of any possible source of reflections which might distort the field strength measurements. Information submitted shall include the relative radiated power of each spurious emission with reference to the rated power output of the transmitter, assuming all emissions are radiated from half wave dipole antennas.
- (b) The measurements specified in paragraph (a) of this section shall be made for the following equipment:
- (1) Those in which the spurious emissions are required to be 60 dB or more below the mean power of the transmitter.
 - (2) All equipment operating on frequencies higher than 25 MHz.
- (3) All equipment where the antenna is an integral part of, and attached directly to the transmitter.
- (4) Other types of equipment as required, when deemed necessary by the Commission. On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 12.5 kHz: At least 50 + 10 log (P) dB or 70 dB, whichever is the lesser attenuation.

Radiated spurious emissions in dB = $50 + 10 \log 10$ (power out in Watts)or an equivalent absolute level of -20 dBm (10 μ W)


2.8.2 Test Description

A. Test Setup:


1) For radiated emissions from 30MHz to1GHz





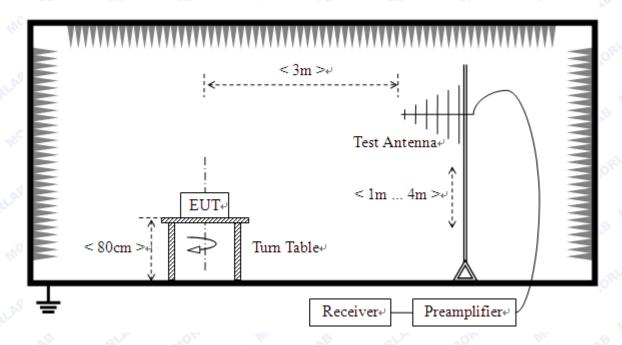

2) For radiated emissions above 1GHz

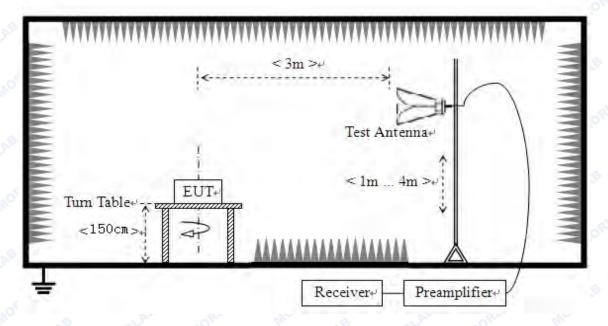

For radiated emissions below or equal to 1GHz, The EUT was set-up on insulator 80cm above the Ground Plane, For radiated emissions above 1GHz, The EUT was set-up on insulator 150cm above the Ground Plane. The set-up and test methods were according to ANSI/TIA-603-D 2010.

The EUT is located in a 3m Semi-Anechoic Chamber and make it in the maximum emission state. The antenna factors, cable loss and so on of the site as factors are calculated to correct the



reading.

For the Test Antenna:

- (a) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.
- (b) For each spurious frequency, raise and lower the test antenna from 1 m to 4m to obtain a maximum reading on the spectrum analyzer with the test antenna at horizontal polarity. Then the turntable should be rotated 360° to determine the maximum reading. Repeat this procedure to obtain the highest possible reading. Record this maximum reading.

C. Equipments List:

Please reference ANNEX A (1.4).

2.8.3 Test Result

During the test, the EUT operating at the highest transmit power mode . The following is the worst test results.


FSK Mode:

Plots for Channel = 434.05MHz



(30MHz to5GHz, Antenna Horizontal, channel 434.05MHz)



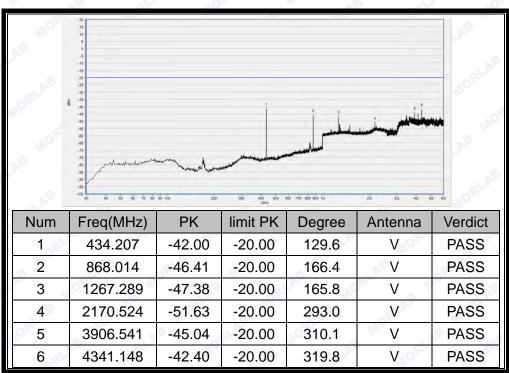


(30MHz to 5GHz, Antenna Vertical, channel 434.05MHz)

Plot for Channel = 434.2875MHz



(30MHz to 5GHz, Antenna Horizontal, channel 434.2875MHz)



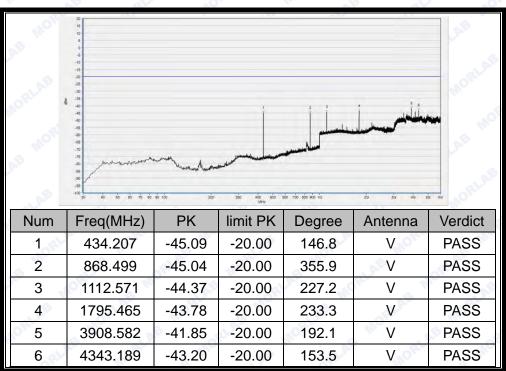


(30MHz to 5GHz, Antenna Vertical, channel 434.2875MHz)

Plot for Channel = 434.5375MHz



(30MHz to 5GHz, Antenna Horizontal, channel 434.5375MHz)



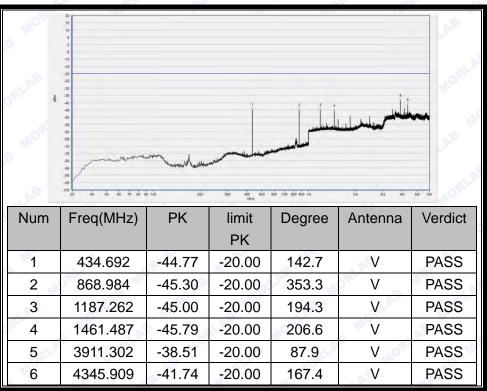

(30MHz to 5GHz, Antenna Vertical, channel 434.5375MHz)



2.9 Receiver Conducted Spurious Emission


2.9.1 Requirement

According to FCC section 15.111, (a) In addition to the radiated emission limits, receivers that operate (tune) in the frequency range 30 to 960 MHz and CB receivers that provide terminals for the connection of an external receiving antenna may be tested to demonstrate compliance with the provisions of §15.109 with the antenna terminals shielded and terminated with a resistive termination equal to the impedance specified for the antenna, provided these receivers also comply with the following: With the receiver antenna terminal connected to a resistive termination equal to the impedance specified or employed for the antenna, the power at the antenna terminal at any frequency within the range of measurements specified in §15.33 shall not exceed 2.0 nanowatts.

(b) CB receivers and receivers that operate (tune) in the frequency range 30 to 960 MHz that are provided only with a permanently attached antenna shall comply with the radiated emission limitations in this part, as measured with the antenna attached.

2.9.2 Test Description

D. Test Set:



The EUT was powered by the battery, It is connected to the Spectrum analyzer with an 30dB attenuator; the path loss as the factor is calibrated to correct the reading for all test result.

For measurements at frequencies below 1 GHz, the spectrum analyzer resolution bandwidth was set to 10kHz. For measurements at frequencies above 1 GHz, the spectrum analyzer resolution bandwidth was set to 1 MHz. Average detector is used for these measurements.

E. Equipments List:


Please reference ANNEX A (1.4).

| Modulation Type Frequency (MHz) | | Refer to Plot | Verdict |
|---------------------------------|----------|---------------|---------|
| MO. VE III | 434.05 | Plot A9 | PASS |
| FSK | 434.2875 | Plot B9 | PASS |
| AB MA SLAB | 434.5375 | Plot C9 | PASS |





2.9.3 Test Result

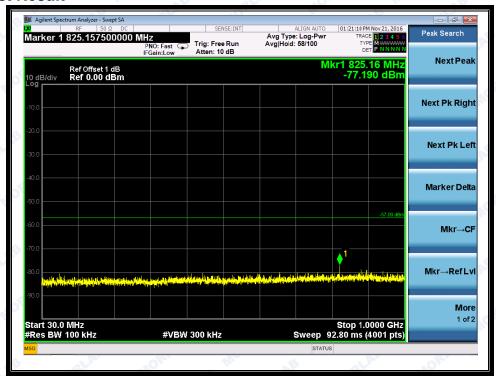


(Plot A9: FSK Channel 434.05MHz, 30MHz to 1GHz)



(Plot A9: FSK Channel 434.05MHz,, 1GHz to 6GHz)





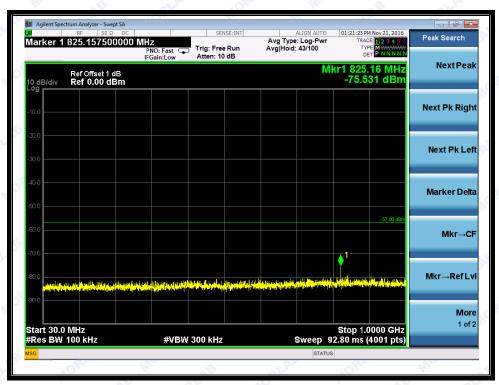


(Plot B9: FSK Channel 434.2875MHz, 30MHz to 1GHz)




(Plot B9: FSK Channel 434.2875MHz, 1GHz to 6GHz)







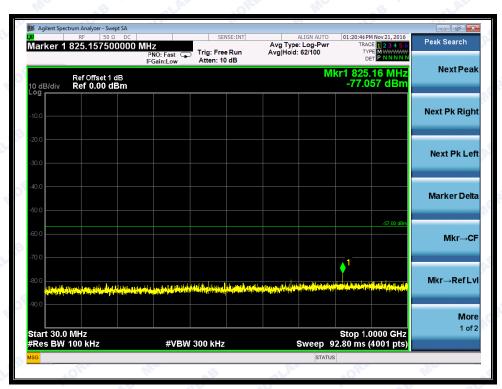

(Plot C9: FSK Channel 434.5375MHz, 30MHz to 1GHz)



(Plot C9: FSK Channel 434.5375MHz, 1GHz to 6GHz)





2.10 Receiver Radiated Spurious Emission

2.10.1 Requirement

According to FCC section 15.209


(a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency of emission (MHz) | Field strength (microvolts/meter) |
|-----------------------------|-----------------------------------|
| 30-88 | 100 |
| 88-216 | 150 |
| 216-960 | 200 |
| Above 960 | 500 |

2.10.2 Test Description


B. Test Setup:

3) For radiated emissions from 30MHz to1GHz

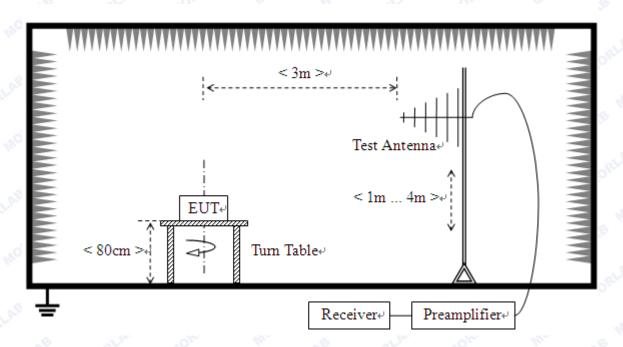

4) For radiated emissions above 1GHz



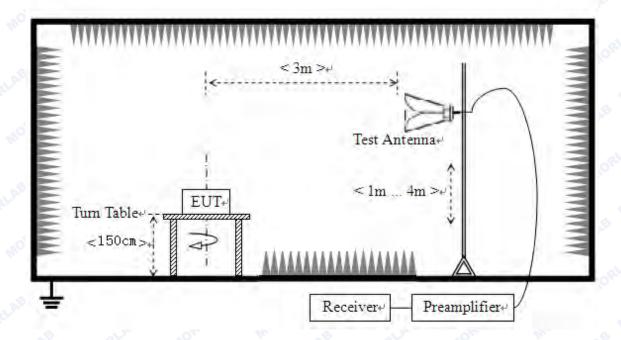

For radiated emissions below or equal to 1GHz, The EUT was set-up on insulator 80cm above the Ground Plane, For radiated emissions above 1GHz, The EUT was set-up on insulator 150cm above the Ground Plane. The set-up and test methods were according to ANSI/TIA-603-D 2010.

The EUT is located in a 3m Semi-Anechoic Chamber and make it in receive mode. The antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

- (a) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.
- (b) For each spurious frequency, raise and lower the test antenna from 1 m to 4m to obtain a maximum reading on the spectrum analyzer with the test antenna at horizontal polarity. Then the turntable should be rotated 360° to determine the maximum reading. Repeat this procedure to obtain the highest possible reading. Record this maximum reading.


F. Equipments List:

Please reference ANNEX A (1.4).


2.10.3 Test Result





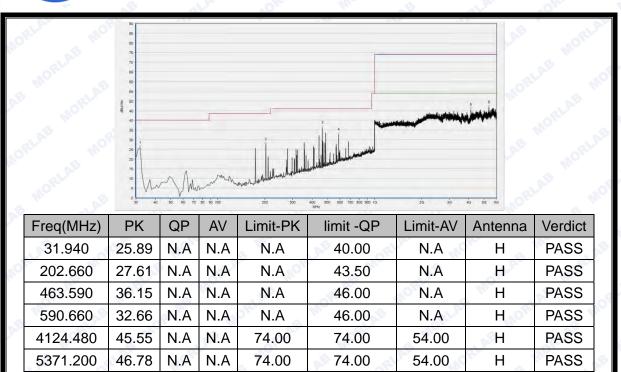

(30MHz to 6GHz, Antenna Horizontal)

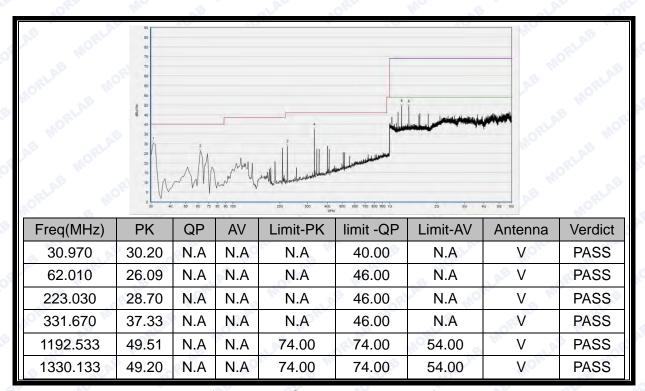

(30MHz to 6GHz, Antenna Vertical)



ANNEX A GENERAL INFORMATION

1.1 Identification of the Responsible Testing Laboratory

| Company Name: Shenzhen Morlab Communications Technology C | |
|---|--|
| Department: | Morlab Laboratory |
| Address: | FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China |
| Responsible Test Lab Manager: | Mr. Su Feng |
| Telephone: | +86 755 36698555 |
| Facsimile: | +86 755 36698525 |

1.2 Identification of the Responsible Testing Location

| Name: | Shenzhen Morlab Communications Technology Co., Ltd. | | |
|----------|--|--|--|
| | Morlab Laboratory | | |
| Address: | FL.3, Building A, FeiYang Science Park, No.8 LongChang | | |
| | Road, Block 67, BaoAn District, ShenZhen, GuangDong | | |
| | Province, P. R. China | | |

1.3 Facilities and Accreditations

Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L3572.

All measurement facilities used to collect the measurement data are located at FL.1, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10 2013 and CISPR Publication 22; the FCC registration number is 695796.

1.4 Maximum measurement uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

| Measurements | Frequency | Uncertainty | |
|---------------------|----------------|-------------|--|
| Conducted emissions | 9KHz~30MHz | 2.44dB | |
| a glab north | 9KHz~30MHz | 2.44dB | |
| | 30MHz~200MHz | 2.93dB | |
| Radiated emissions | 200MHz~1000MHz | 2.95dB | |
| | 1GHz~18GHz | 2.26dB | |
| | 18GHz~40GHz | 1.94dB | |



This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2

1.5 **Test Equipments Utilized**

Conducted Test Equipments 1.5.1

| Conducted Test Equipment | | | | | | | | |
|--------------------------|------------------------------|------------|---------|-----------------|------------|------------|--|--|
| No. | Equipment Name | Serial No. | Туре | Manufacturer | Cal. Date | Cal. Due | | |
| 1,00 | RF Communication Test Set | 3822A02388 | 8920B | RIAE MP HP RIAE | 2016.4.28 | 2017.4.27 | | |
| 2 | USB Wideband Power Sensor | MY54210011 | U2021XA | Agilent | 2016.03.02 | 2017.03.01 | | |
| 3 | EXA Signal Analyzer | MY53470838 | N9010A | Agilent | 2016.08.25 | 2017.08.24 | | |
| 4 | RF cable | CB01 | RF01 | Morlab | N/A | N/A | | |
| 5 | Attenuator | (n.a.) | 10dB | Resnet | N/A | N/A | | |
| 6 | SMA connector Note | CN01 | RF03 | HUBER-SUHNER | N/A | N/A | | |

Note: The SMA antenna connector is soldered on the PCB board in order to perform conducted tests and this SMA antenna connector is listed in the equipment list.

Radiated Test Equipments

| Radiated Test Equipments | | | | | | | |
|--------------------------|-----------------------------|------------|-------------|---------------|------------|-----------------|--|
| No | Equipment Name | Serial No. | Туре | Manufacturer | Cal. Date | Cal.Due Date | |
| 1 | System Simulator | GB45360846 | 8960-E5515C | Agilent | 2016.03.02 | 2017.03.01 | |
| 2 | Receiver | MY54130016 | N9038A | Agilent | 2016.03.02 | 2017.03.01 | |
| 3 | Test Antenna - Bi-Log | N/A | VULB9163 | Schwarzbeck | 2016.03.02 | 2017.03.01 | |
| 4 💉 | Test Antenna - Horn | 9170C-531 | BBHA9170 | Schwarzbeck | 2016.03.02 | 2017.03.01 | |
| 5 | Test Antenna - Loop | 1519-022 | FMZB1519 | Schwarzbeck | 2016.03.02 | 2017.03.01 | |
| 6 | Test Antenna - Horn | 71688 | BBHA 9120D | Schwarzbeck | 2016.03.02 | 2017.03.01 | |
| 7 | Coaxial cable(N male) | CB02 | EMC02 | Morlab | N/A | N/A | |
| 8 | Coaxial cable(N male) | CB03 | EMC03 | Morlab | N/A | N/A | |
| 9 | 1-18GHz pre-Amplifier | MA02 | TS-PR18 | Rohde&Schwarz | 2016.03.02 | 2017.03.01 | |
| 10 | 18-26.5GHz pre-Amplifier | MA03 | TS-PR18 | Rohde&Schwarz | 2016.03.02 | 2017.03.01 | |



1.5.3 Climate Chamber

| Clima | te Chamber | ORLA | More | -0 W | J.B ORLA | WOL W |
|-------|-----------------------|------------|---------|--------------|------------|--------------|
| No. | Equipment Name | Serial No. | Туре | Manufacturer | Cal.Date | Cal.Due Date |
| 101 | Climate Chamber | 2004012 | HL4003T | Yinhe | 2016.03.02 | 2017.03.01 |

1.5.4 Vibration Table

| Vibra | ation Table | G ORLA | Mole | E WE | ORLA | MOKE IN |
|-------|-----------------------|------------|-------------------|--------------|------------|--------------|
| No. | Equipment Name | Serial No. | Туре | Manufacturer | Cal.Date | Cal.Due Date |
| 1 | Vibration Table | N/A | ACT2000- S015L | СМІ-СОМ | 2016.03.02 | 2017.03.01 |

1.5.5 Anechoic Chamber

| Anec | hoic Chamber | Z MC | AB S | LLAL | NIC. A | B . RLAD |
|------|-----------------------|------------|----------|--------------|------------|--------------|
| No. | Equipment Name | Serial No. | Type | Manufacturer | Cal.Date | Cal.Due Date |
| 1 | Anechoic Chamber | N/A | 9m*6m*6m | Changning | 2016.03.02 | 2017.03.01 |

1.5.6 Auxiliary Test Equipment

| Auxil | iary Test Equipment | W. | O.B | -RLAP MORL | MO. | E GLAB |
|-------|---------------------|------------|--------|--------------|----------|--------------|
| No. | Equipment Name | Serial No. | Туре | Manufacturer | Cal.Date | Cal.Due Date |
| 1 | Computer | N.A | PU500C | Asus | N.A | N.A |

***** FND OF REPORT *****