

Certification Test Report

FCC ID: 2ABLX-ZIG24DECO IC: 8832A-ZIG24DECO

FCC Rule Part: 15.247
IC Radio Standards Specification: RSS-210

ACS Report Number: 15-0094.W06.1A

Manufacturer: Qmotion Incorporated

Model: QZR-ZIG2400

Test Begin Date: March 25, 2015 Test End Date: March 26, 2015

Report Issue Date: April 10, 2015



FOR THE SCOPE OF ACCREDITATION UNDER LAB Code 200612-0

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Reviewed by:

Kirby Munroe
Director, Wireless Certifications
ACS, Inc.

This test report shall not be reproduced except in full. This report may be reproduced in part with prior written consent of ACS, Inc. The results contained in this report are representative of the sample(s) submitted for evaluation.

This report contains 20 pages

TABLE OF CONTENTS

| 1 | GENERAL | 3 |
|---|--|----|
| | 1.1 Purpose | 3 |
| | 1.2 PRODUCT DESCRIPTION | |
| | 1.3 TEST METHODOLOGY AND CONSIDERATIONS | 4 |
| 2 | TEST FACILITIES | 5 |
| | 2.1 LOCATION | 5 |
| | 2.2 LABORATORY ACCREDITATIONS/RECOGNITIONS/CERTIFICATIONS | |
| | 2.3 RADIATED EMISSIONS TEST SITE DESCRIPTION | |
| | 2.3.1 Semi-Anechoic Chamber Test Site | |
| | 2.3.2 Open Area Tests Site (OATS) | 7 |
| | 2.4 CONDUCTED EMISSIONS TEST SITE DESCRIPTION | 8 |
| 3 | APPLICABLE STANDARD REFERENCES | 8 |
| 4 | LIST OF TEST EQUIPMENT | 9 |
| 5 | SUPPORT EQUIPMENT | 10 |
| 3 | SUFFORT EQUITMENT | 10 |
| 6 | EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM | 10 |
| 7 | SUMMARY OF TESTS | 11 |
| , | | |
| | 7.1 ANTENNA REQUIREMENT – FCC 15.203 7.2 POWER LINE CONDUCTED EMISSIONS – FCC 15.207, IC: RSS-GEN 8.8 | |
| | 7.2 POWER LINE CONDUCTED EMISSIONS – FCC 15.207, IC: RSS-GEN 8.8 | |
| | 7.3.1 Measurement Procedure | |
| | 7.3.2 Measurement Results | |
| | 7.4 FUNDAMENTAL EMISSION OUTPUT POWER – FCC 15.247(B)(3), IC: RSS-210 A8.4(4) | |
| | 7.4.1 Measurement Procedure | |
| | 7.4.2 Measurement Results | |
| | 7.5 EMISSION LEVELS – FCC 15.247(D), 15.205, 15.209; IC RSS-210 2.2/A8.5, RSS-GEN 8.9 | |
| | 7.5.1 Emissions into Non-restricted Frequency Bands | |
| | 7.5.1.1 Measurement Procedure | |
| | 7.5.1.2 Measurement Results | |
| | 7.5.2 Emissions into Restricted Frequency Bands | |
| | 7.5.2.1 Measurement Procedure | |
| | 7.5.2.2 Duty Cycle Correction | |
| | 7.5.2.3 Measurement Results | |
| | 7.5.2.4 Sample Calculation. 7.6 MAXIMUM POWER SPECTRAL DENSITY IN THE FUNDAMENTAL EMISSION – FCC 15.247(E) IC: | 10 |
| | RSS-210 A8.2(B) | 19 |
| | 7.6.1 Measurement Procedure | |
| | 7.6.2 Measurement Results | |
| R | | 20 |
| • | V A 7 V V I 1 1 1 1 1 1 1 1 1 1 | L |

1 GENERAL

1.1 Purpose

The purpose of this report is to demonstrate compliance with Part 15 Subpart C of the FCC's Code of Federal Regulations and Industry Canada's Radio Standards Specification RSS-210.

1.2 Product Description

The QZR-ZIG2400 is a wireless remote which transmits and receives RF signals according to the IEEE 802.15.4 standard. The remote activates (controls) wireless window shades (treatments) for residential or commercial use.

Technical Information:

| Detail | Description |
|---------------------|---------------------|
| Frequency Range | 2405 – 2480 MHz |
| Number of Channels | 16 |
| Modulation Format | O-QPSK |
| Operating Voltage | 3Vdc |
| Antenna Type / Gain | Inverted F / 3.3dBi |

Manufacturer Information: Qmotion Incorporated. 3400 Copter Rd. Pensacola, FL 32514 USA

EUT Serial Numbers: ACS #1 (Radiated), ACS #2 (RF Conducted)

Test Sample Condition: The test samples were provided in good working order with no visible defects.

1.3 Test Methodology and Considerations

For radiated emissions three orientations of the EUT were evaluated to determine worst case. The worst case orientation was determined to be the Y orientation for spurious emissions and X orientation for band edges. The EUT was powered with a DC bench supply due to current restrictions with the coin cell battery while in test mode.

The EUT is a battery operated handheld device therefore AC power line conducted emissions testing was not performed.

Software power setting during test: +3dBm

Software version number during test: TXSTREAM

Model: QZR-ZIG2400 FCC ID: 2ABLX-ZIG24DECO IC: 8832A-ZIG24DECO

2 TEST FACILITIES

2.1 Location

The radiated and conducted emissions test sites are located at the following address:

Advanced Compliance Solutions 5015 B.U. Bowman Drive Buford, GA 30518 Phone: (770) 831-8048 Fax: (770) 831-8598

2.2 Laboratory Accreditations/Recognitions/Certifications

ACS is accredited to ISO/IEC 17025 by the National Institute of Standards and Technology under their National Voluntary Laboratory Accreditation Program (NVLAP), Lab Code 200612-0. Unless otherwise specified, all tests methods described within this report are covered under the ISO/IEC 17025 scope of accreditation.

The Semi-Anechoic Chamber Test Site, Open Area Test Site (OATS) and Conducted Emissions Site have been fully described, submitted to, and accepted by the FCC, Industry Canada and the Japanese Voluntary Control Council for Interference by information technology equipment.

FCC Registration Number: 511277 Industry Canada Lab Code: IC 4175A

VCCI Member Number: 1831

VCCI OATS Registration Number R-1526

VCCI Conducted Emissions Site Registration Number: C-1608

2.3 Radiated Emissions Test Site Description

2.3.1 Semi-Anechoic Chamber Test Site

The Semi-Anechoic Chamber Test Site consists of a 20° x 30° x 18° shielded enclosure. The chamber is lined with Toyo Ferrite Grid Absorber, model number FFG-1000. The ferrite tile grid is $101 \times 101 \times 19$ mm thick and weighs approximately 550 grams. These tiles are mounted on steel panels and installed directly on the inner walls of the chamber.

The turntable is 150cm in diameter and is located 160cm from the back wall of the chamber. The chamber is grounded via 1 - 8' copper ground rod, installed at the center of the back wall, it is bound to the ground plane using 3/4" stainless steel braided cable.

The turntable is all steel, flush mounted table installed in an all steel frame. The table is remotely operated from inside the control room located 25' from the range. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

Behind the turntable is a 3' x 6' x 4' deep shielded pit used for support equipment if necessary. The pit is equipped with 1 - 4" PVC chases from the turntable to the pit that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit.

A diagram of the Semi-Anechoic Chamber Test Site is shown in Figure 2.3-1 below:

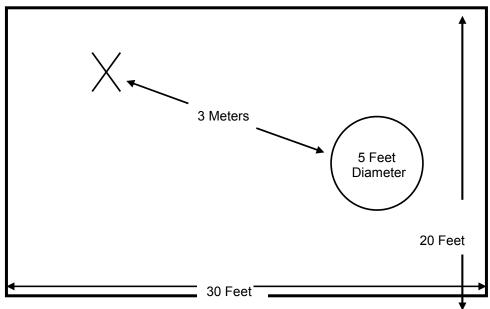


Figure 2.3-1: Semi-Anechoic Chamber Test Site

2.3.2 Open Area Tests Site (OATS)

The open area test site consists of a 40' x 66' concrete pad covered with a perforated electroplated galvanized sheet metal. The perforations in the sheet metal are 1/8" holes that are staggered every 3/16". The individual sheets are placed to overlap each other by 1/4" and are riveted together to provide a continuous seam. Rivets are spaced every 3" in a 3 x 20 meter perimeter around the antenna mast and EUT area. Rivets in the remaining area are spaced as necessary to properly secure the ground plane and maintain the electrical continuity.

The entire ground plane extends 12' beyond the turntable edge and 16' beyond the antenna mast when set to a 10 meter measurement distance. The ground plane is grounded via 4 - 8' copper ground rods, each installed at a corner of the ground plane and bound to the ground plane using 3/4" stainless steel braided cable.

The turntable is an all aluminum 10' flush mounted table installed in an all aluminum frame. The table is remotely operated from inside the control room located 40' from the range. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

Adjacent to the turntable is a 7' x 7' square and 4' deep concrete pit used for support equipment if necessary. The pit is equipped with 5 - 4" PVC chases from the pit to the control room that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit. The pit is covered with 2 sheets of 1/4" diamond style re-enforced steel sheets. The sheets are painted to match the perforated steel ground plane; however the underside edges have been masked off to maintain the electrical continuity of the ground plane. All reflecting objects are located outside of the ellipse defined in ANSI C63.4.

A diagram of the Open Area Test Site is shown in Figure 2.3-2 below:

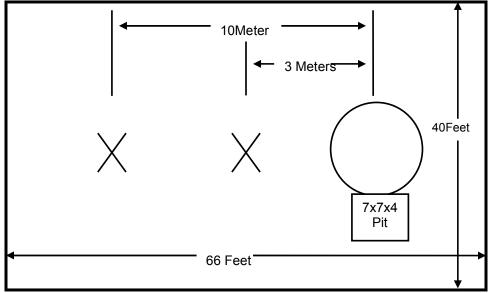


Figure 2.3-2: Open Area Test Site

2.4 Conducted Emissions Test Site Description

The AC mains conducted EMI site is located in the main EMC lab. It consists of an 8' x 8' solid aluminum horizontal ground reference plane (GRP) bonded every 3" to an 8' X 8' vertical ground plane.

The site is of sufficient size to test table top and floor standing equipment in accordance with section 6.1.4 of ANSI C63.4.

A diagram of the room is shown below in figure 4.1.3-1:

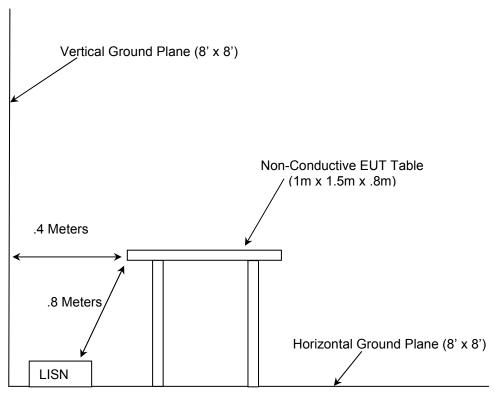


Figure 2.4-1: AC Mains Conducted EMI Site

3 APPLICABLE STANDARD REFERENCES

The following standards were used:

- ANSI C63.4-2009: American National Standard for Methods of Measurement of Radio-Noise Emissions from low-voltage electrical and electronic equipment in the range of 9kHz to 40 GHz
- ❖ ANSI C63.10-2009: American National Standard for Testing Unlicensed Wireless Devices
- ANSI C63.10-2013: American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices – Reference for Industry Canada only
- US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures, 2015
- US Code of Federal Regulations (CFR): Title 47, Part 15, Subpart C: Radio Frequency Devices, Intentional Radiators, 2015
- FCC KDB 558074 D01 DTS Meas Guidance v03r02 Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247, June 5, 2014
- ❖ Industry Canada Radio Standards Specification: RSS-210 Low-power License-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment, Issue 8, Dec 2010
- Industry Canada Radio Standards Specification: RSS-GÉN General Requirements for Compliance of Radio Apparatus, Issue 4, Nov 2014.

4 LIST OF TEST EQUIPMENT

The calibration interval of test equipment is annually or the manufacturer's recommendations. Where the calibration interval deviates from the annual cycle based on the instrument manufacturer's recommendations, it shall be stated below.

Table 4-1: Test Equipment

| | | | | | | Calibration | |
|---------|-----------------------|-----------------|--------------------|------------|-----------------------|-------------|--|
| AssetID | Manufacturer | Model # | Equipment Type | Serial # | Last Calibration Date | Due Date | |
| 1 | Rohde & Schwarz | ESMI - Display | Spectrum Analyzers | 833771/007 | 7/11/2014 | 7/11/2015 | |
| 2 | Rohde & Schwarz | ESMI-Receiver | Spectrum Analyzers | 839587/003 | 7/11/2014 | 7/11/2015 | |
| 30 | Spectrum Technologies | DRH-0118 | Antennas | 970102 | 4/23/2013 | 4/23/2015 | |
| 40 | EMCO | 3104 | Antennas | 3211 | 2/10/2015 | 2/10/2017 | |
| 73 | Agilent | 8447D | Amplifiers | 2727A05624 | 7/15/2014 | 7/15/2015 | |
| | | Chamber EMI | | | | | |
| 167 | ACS | Cable Set | Cable Set | 167 | 10/28/2014 | 10/28/2015 | |
| 267 | Agilent | N1911A | Meters | MY45100129 | 7/30/2013 | 7/30/2015 | |
| 268 | Agilent | N1921A | Sensors | MY45240184 | 7/30/2013 | 7/30/2015 | |
| | | SMR-290AW- | | | | | |
| 292 | Florida RF Cables | 480.0-SMR | Cables | None | 3/3/2015 | 3/3/2016 | |
| 338 | Hewlett Packard | 8449B | Amplifiers | 3008A01111 | 7/30/2013 | 7/30/2015 | |
| 340 | Aeroflex/Weinschel | AS-20 | Attenuators | 7136 | 7/14/2014 | 7/14/2015 | |
| 412 | Electro Metrics | LPA-25 | Antennas | 1241 | 7/24/2014 | 7/24/2016 | |
| | | SMS-200AW-72.0- | | | | | |
| 422 | Florida RF | SMR | Cables | 805 | 11/5/2014 | 11/5/2015 | |
| 432 | Microwave Circuits | H3G020G4 | Filters | 264066 | 6/2/2014 | 6/2/2015 | |
| | | SMRE-200W-12.0- | | | | | |
| 616 | Florida RF Cables | SMRE | Cables | N/A | 9/10/2014 | 9/10/2015 | |
| 622 | Rohde & Schwarz | FSV40 | Analyzers | 101338 | 7/12/2014 | 7/12/2015 | |

5 SUPPORT EQUIPMENT

Table 5-1: Support Equipment

| Item | Equipment Type | Manufacturer | Model/Part Number | Serial Number | |
|------|-----------------|--------------|-------------------|---------------|--|
| 1 | DC Power Supply | Agilent | E3630A | KR64308603 | |

6 EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM

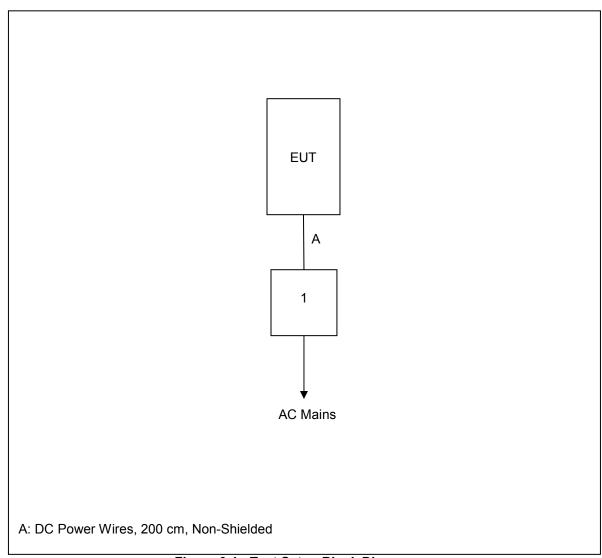


Figure 6-1: Test Setup Block Diagram

7 SUMMARY OF TESTS

Along with the tabular data shown below, plots were taken of all signals deemed important enough to document.

7.1 Antenna Requirement – FCC 15.203

The EUT utilizes an Inverted F antenna. The antenna is integral to the device and cannot be removed or replaced by the end user. The peak gain of the antenna is 3.3dBi.

7.2 Power Line Conducted Emissions – FCC 15.207, IC: RSS-Gen 8.8

The EUT is a battery operated handheld device therefore AC power line conducted emissions testing was not performed.

7.3 6dB / 99% Bandwidth - FCC 15.247(a)(2), IC: RSS-210 A8.2(a)

7.3.1 Measurement Procedure

The 6dB bandwidth was measured in accordance with the FCC KDB 558074 D01 DTS Meas Guidance v03r02. The Resolution Bandwidth (RBW) of the spectrum analyzer was set to 100 kHz. The Video Bandwidth (VBW) was set to \geq 3 times the RBW. The trace was set to max hold with a peak detector active. The marker-delta function of the spectrum analyzer was utilized to determine the 6 dB bandwidth of the emission.

The occupied bandwidth measurement function of the spectrum analyzer was used to measure the 99% bandwidth. The span of the analyzer was set to capture all products of the modulation process, including the emission sidebands. The resolution bandwidth was set to 1% to 5% of the occupied bandwidth. The video bandwidth was set to 3 times the resolution bandwidth. A peak detector was used.

7.3.2 Measurement Results

Table 7.3.2-1: 6dB / 99% Bandwidth

| Frequency [MHz] | 6dB Bandwidth [MHz] | 99% Bandwidth [MHz] |
|--------------------|------------------------|------------------------|
| 2405 | 1.595 | 2.416 |
| 2440 | 1.598 | 2.428 |
| 2480 | 1.599 | 2.431 |



Figure 7.3.2-1: 6dB Bandwidth Plot - LCH




Figure 7.3.2-2: 6dB Bandwidth Plot – MCH

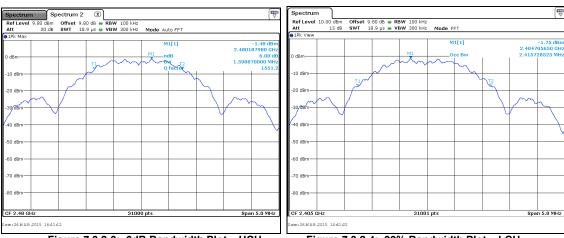


Figure 7.3.2-3: 6dB Bandwidth Plot – HCH

Figure 7.3.2-4: 99% Bandwidth Plot – LCH




Figure 7.3.2-5: 99% Bandwidth Plot - MCH




Figure 7.3.2-6: 99% Bandwidth Plot - HCH

7.4 Fundamental Emission Output Power – FCC 15.247(b)(3), IC: RSS-210 A8.4(4)

7.4.1 Measurement Procedure

The maximum peak conducted output power was measured in accordance with FCC KDB 558074 D01 DTS Meas Guidance v03r02 utilizing the PKPM1 Peak power meter method. The RF output of the equipment under test was directly connected to the input of the peak power meter applying suitable attenuation.

7.4.2 Measurement Results

Table 7.4.2-1: Maximum Peak Conducted Output Power

| Frequency | Level | | | | |
|-----------|-------|--|--|--|--|
| [MHz] | [dBm] | | | | |
| 2405 | 1.77 | | | | |
| 2440 | 1.95 | | | | |
| 2480 | 1.94 | | | | |

7.5 Emission Levels - FCC 15.247(d), 15.205, 15.209; IC RSS-210 2.2/A8.5, RSS-Gen 8.9

7.5.1 Emissions into Non-restricted Frequency Bands

7.5.1.1 Measurement Procedure

The unwanted emissions into non-restricted bands were measured conducted in accordance with FCC KDB 558074 D01 DTS Meas Guidance v03r02. The RF output of the equipment under test was directly connected to the input of the spectrum analyzer applying suitable attenuation. The Resolution Bandwidth (RBW) of the spectrum analyzer was set to 100 kHz. The Video Bandwidth (VBW) was set to \geq 300 kHz. Span was set to 1.5 times the DTS bandwidth. The trace was set to max hold with a peak detector active. The resulting spectrum analyzer peak level was used to determine the reference level with respect to the 20 dBc limit. The spectrum span was then adjusted for the measurement of spurious emissions from 30MHz to 25GHz, 10 times the highest fundamental frequency.

Band-edge compliance was determined using the conducted marker-delta method in which the radio frequency power that is produced by the EUT is at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of desired power.

7.5.1.2 Measurement Results

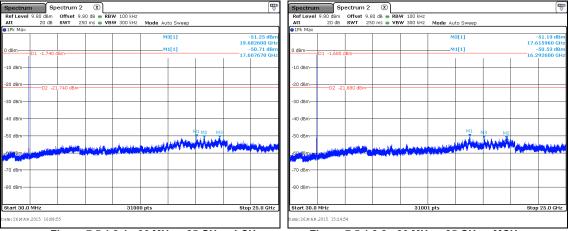


Figure 7.5.1.2-1: 30 MHz - 25 GHz - LCH

Figure 7.5.1.2-2: 30 MHz - 25 GHz - MCH





Figure 7.5.1.2-3: 30 MHz - 25 GHz - HCH






Figure 7.5.1.2-4: Lower Band-edge - LCH

Figure 7.5.1.2-5: Upper Band-edge - HCH

7.5.2 Emissions into Restricted Frequency Bands

7.5.2.1 Measurement Procedure

The unwanted emissions into restricted bands were measured radiated over the frequency range of 30MHz to 25GHz, 10 times the highest fundamental frequency.

The EUT was rotated through 360° and the receive antenna height was varied from 1m to 4m so that the maximum radiated emissions level would be detected. For frequencies below 1000MHz, quasi-peak measurements were made using a RBW of 120 kHz and a VBW of 300 kHz. For frequencies above 1000MHz, peak and average measurements were made with RBW and VBW of 1 MHz and 3 MHz respectively.

Each emission found to be in a restricted band as defined by section 15.205, including any emission at the operational band-edge, was compared to the radiated emission limits as defined in section 15.209.

7.5.2.2 Duty Cycle Correction

For average radiated measurements, using a 66% duty cycle, the measured level was reduced by a factor 3.61dB. The duty cycle correction factor is determined using the formula: 20log (66/100) = -3.61dB. A detailed analysis of the duty cycle timing is provided in the Theory of Operation accompanying the original application for certification.

7.5.2.3 Measurement Results

Table 7.5.2.3-1: Radiated Spurious Emissions Tabulated Data

| rabio riolalo il radalatoa opariodo Efficorono rabalatoa bata | | | | | | | | |
|---|---|--|---|-------------------------------|--|--|--|--|
| vel suV) | Antenna Polarity | Correction Factors | | | | | | argin (dB) |
| Qpk/Avg | (H/V) | (dB) | pk | Qpk/Avg | pk | Qpk/Avg | pk | Qpk/Avg |
| Low Channel | | | | | | | | |
| 36.63 | Η | -6.58 | 49.25 | 26.44 | 74.0 | 54.0 | 24.8 | 27.6 |
| 53.23 | V | -6.58 | 46.65 | 43.04 | 74.0 | 54.0 | 27.4 | 11.0 |
| 48.50 | Н | 1.52 | 59.67 | 46.41 | 74.0 | 54.0 | 14.3 | 7.6 |
| 50.10 | V | 1.52 | 59.95 | 48.01 | 74.0 | 54.0 | 14.0 | 6.0 |
| Middle Channel | | | | | | | | |
| 43.61 | Н | 7.62 | 60.52 | 47.62 | 74.0 | 54.0 | 13.5 | 6.4 |
| 41.86 | > | 7.62 | 58.87 | 45.87 | 74.0 | 54.0 | 15.1 | 8.1 |
| High Channel | | | | | | | | |
| 60.14 | Н | -6.07 | 67.28 | 50.46 | 74.0 | 54.0 | 6.7 | 3.5 |
| 55.70 | V | -6.07 | 63.42 | 46.02 | 74.0 | 54.0 | 10.6 | 8.0 |
| 44.07 | Н | 7.78 | 60.66 | 48.24 | 74.0 | 54.0 | 13.3 | 5.8 |
| 41.25 | V | 7.78 | 58.22 | 45.42 | 74.0 | 54.0 | 15.8 | 8.6 |
| | 36.63 53.23 48.50 50.10 43.61 41.86 60.14 55.70 44.07 | Anteima Polarity Qpk/Avg (H/V) 36.63 H 53.23 V 48.50 H 50.10 V 43.61 H 41.86 V 60.14 H 55.70 V 44.07 H | Polarity Factors (dB) Comparity Factors (dB) | Polarity Factors (dB pk | Polarity Factors (dBuV/m) pk Qpk/Avg (H/V) (dB) pk Qpk/Avg | Polarity Factors (dBuV/m) (dB Qpk/Avg (H/V) (dB) pk Qpk/Avg pk | Polarity Factors (dBuV/m) (dBuV/m) (dBuV/m) (dBuV/m) (dBuV/m) (dBuV/m) (dBuV/m) (dBuV/m) | Polarity Factors (dBuV/m) (dBuV/m) |

Model: QZR-ZIG2400 FCC ID: 2ABLX-ZIG24DECO IC: 8832A-ZIG24DECO

7.5.2.4 Sample Calculation:

 $R_C = R_U + CF_T$

Where:

CF_T = Total Correction Factor (AF+CA+AG)-DC (Average Measurements Only)

R_U = Uncorrected Reading
R_C = Corrected Level
AF = Antenna Factor
CA = Cable Attenuation
AG = Amplifier Gain

DC = Duty Cycle Correction Factor

Example Calculation: Peak

Corrected Level: 55.83 - 6.58 = 49.25dBuV/m Margin: 74.0dBuV/m - 49.25dBuV/m = 24.8dB

Example Calculation: Average

Corrected Level: 36.63 - 6.58 - 3.61 = 26.44dBuV

Margin: 54.0dBuV - 26.44dBuV =27.6dB

7.6 Maximum Power Spectral Density in the Fundamental Emission – FCC 15.247(e) IC: RSS-210 A8.2(b)

7.6.1 Measurement Procedure

The power spectral density was measured in accordance with the FCC KDB 558074 D01 DTS Meas Guidance v03r02 utilizing the PKPSD (peak PSD) method. The RF output of the equipment under test was directly connected to the input of the spectrum analyzer applying suitable attenuation. The Resolution Bandwidth (RBW) of the spectrum analyzer was set to 3 kHz. The Video Bandwidth (VBW) was set to 10 kHz. Span was set to 1.5 times the occupied bandwidth. The trace was set to max hold with a peak detector active.

7.6.2 Measurement Results

Table 7.6.2-1: Peak Power Spectral Density

| Frequency (MHz) | PSD Level (dBm) |
|--------------------|--------------------|
| 2405 | -12.67 |
| 2440 | -12.65 |
| 2480 | -12.78 |

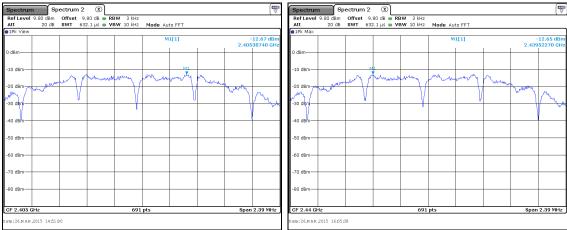


Figure 7.6.2-1: PSD Plot - LCH

Figure 7.6.2-2: PSD Plot - MCH




Figure 7.6.2-3: PSD Plot - HCH

Model: QZR-ZIG2400 FCC ID: 2ABLX-ZIG24DECO IC: 8832A-ZIG24DECO

8 CONCLUSION

In the opinion of ACS, Inc. the QZR-ZIG2400, provided by Qmotion Incorporated meets the requirements of FCC Part 15 subpart C and Industry Canada's Radio Standards Specification RSS-210.

END REPORT