

Report No. 4787050401-5-1

Issued Date: 2015-10-09

# **FCC Test Report**

# Part 15 subpart C

#### **Client Information:**

Applicant : Zhong Shan City LI TAI Electronic industrial Co.,Ltd

Applicant add.: No.3 Industrial District, Wuguishan Town, Zhongshan, GuangDong,

China

# **EUT Information:**

EUT Name: CD MICRO SYSTEM

Model No. : MCB1515

Brand Name: neno

FCC ID : 2ABM5-MCB1515

# **Prepared By:**

#### **UL-CCIC Company Limited**

Add.: Electronic Building, Parage Electronic Industrial Park, No. 8 Nanyun Er Road,

Guangzhou Science Park, Guangzhou, 510663 China

Date of Receipt: Sep. 14, 2015 Date of Test: Sep. 14~21, 2015

Date of Issue: Oct. 09, 2015 Test Result: Pass

Test procedure used: ANSI C63.4-2009

This device described above has been tested by Dongguan Yaxu(AiT) Technology Limited, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.


\*This test report must not be used by the client to claim product endorsement by any agency of the U.S. government.

Approved by: Freher (2)



# 1 Contents


	COVER P	PAGE	Page
1		ENTS	2
2		SUMMARY	
_		OMPLIANCE WITH FCC PART 15 SUBPART C	
		EASUREMENT UNCERTAINTY	
3	TEST	FACILITY	6
	3.1 DE	VIATION FROM STANDARD	6
	3.2 AB	NORMALITIES FROM STANDARD CONDITIONS	6
4	GENE	RAL INFORMATION	7
	4.1 GE	NERAL DESCRIPTION OF EUT	7
	4.2 DE	SCRIPTION OF TEST CONDITIONS	9
	4.3 TE	ST PERIPHERAL LIST	10
	4.4 EL	JT PERIPHERAL LIST	10
5	EQUIP	PMENTS LIST FOR ALL TEST ITEMS	11
6	TEST	RESULT	12
	6.1 AN	ITENNA REQUIREMENT	12
	6.1.1	Standard requirement	
	6.1.2	EUT Antenna	
	6.2 Cc	ONDUCTION EMISSIONS MEASUREMENT	13
	6.2.1	Applied procedures / Limit	13
	6.2.2	Test procedure	13
	6.2.3	Test setup	13
	6.2.4	Test results	14
	6.3 RA	DIATED EMISSIONS MEASUREMENT	16
	6.3.1	Applied procedures / Limit	16
	6.3.2	Test setup	
	6.3.3	Test procedure	
	6.3.4	Test Result	
	6.3.5	TEST RESULTS (Restricted Bands Requirements)	
		ANDWIDTH TEST	
	6.4.1	Applied procedures / Limit	
	6.4.2	Test procedure	
	6.4.3	Deviation from standard	
	6.4.4 6.4.5	Test setup Test results	
		neary Limited	





9

6.5 CAF	RRIER FREQUENCIES SEPARATED	34
6.5.1	Applied procedures / Limit	34
6.5.2	Test procedure	34
6.5.3	Deviation from standard	34
6.5.4	Test setup	34
6.5.5	Test results	35
6.6 Hor	PPING CHANNEL NUMBER	39
6.6.1	Applied procedures / Limit	39
6.6.2	Test procedure	39
6.6.3	Deviation from standard	39
6.6.4	Test setup	39
6.6.5	Test result	40
6.7 Dw	ELL TIME	42
6.7.1	Applied procedures / Limit	42
6.7.2	Test procedure	42
6.7.3	Deviation from standard	42
6.7.4	Test setup	42
6.7.5	Test result	43
6.8 MAX	KIMUM PEAK OUTPUT POWER	47
6.8.1	Applied procedures / Limit	
6.8.2	Test procedure	47
6.8.3	Deviation from standard	47
6.8.4	Test setup	47
6.8.5	Test results	48
6.9 BAN	ID EDGE	
6.9.1	Applied procedures / Limit	
6.9.2	Test procedure	52
6.9.3	Deviation from standard	52
6.9.4	Test setup	52
6.9.5	Test results	
6.10 Con	NDUCTED SPURIOUS EMISSIONS	
6.10.1	Applied procedures / Limit	
6.10.2	Test procedure	
6.10.3	Deviation from standard	57
6.10.4	Test setup	57
6 10 5	Toot regulte	50





# 2 Test Summary


# 2.1 Compliance with FCC Part 15 subpart C

Test	Test Requirement	Standard Paragraph	Result				
Antenna Requirement	FCC Part 15 C:2013	Section 15.247(c)	PASS				
Conduction Emissions	FCC Part 15 C:2013	Section 15.207(a)	PASS				
Radiated Emissions	FCC Part 15 C:2013	Section 15.247(d)	PASS				
Carrier Frequencies Separated	FCC Part 15 C:2013	Section 15.247(a)(1)	PASS				
Hopping Channel Number	FCC Part 15 C:2013	Section 15.247(a)(1) (iii)	PASS				
Dwell Time	FCC Part 15 C:2013	Section 15.247(a)(1) (iii)	PASS				
Maximum Peak Output Power	FCC Part 15 C:2013	Section 15.247(b)	PASS				
Band edge	FCC Part 15 C:2013	Section 15.247(d)	PASS				
Conducted Spurious Emissions	FCC Part 15 C:2013	Section 15.247(d)	PASS				
Note:							
(1)Reference to the	(1)Reference to the FCC Public Notice DA 00-705						
Bluetooth 4.0 D	(2)The pouduct support for Bluetooth classic rate / EDR and low energy connections Bluetooth 4.0 Dual-mode, this report is classic rate / EDR connection test mode, for low energy connection please refers to the report number 4787050401-2-1.						

# 2.2 Test Location

All tests were performed at:

Dongguan Yaxu (AiT) Technology Limited No.22, Jinqianling Third Street, Jitigang, Huangjiang, Dongguan, Guangdong, China Tel.: +86.769.82020499 Fax.: +86.769.82020495






# 2.3 Measurement Uncertainty

All measurements involve certain levels of uncertainties, The following measurements uncertainty Levels have estimated based on ANSI C63.4:2009, the maximum value of the uncertainty as below

No.	Item	Uncertainty	
1	Conducted Emission Test	1.20dB	
2	Radiated Emission Test	3.30dB	





# 3 Test Facility

# The test facility is recognized, certified or accredited by the following organizations:

#### .CNAS- Registration No: L6177

Dongguan Yaxu (AiT) technology Limited is accredited to ISO/IEC 17025:2005 general Requirements for the competence of testing and calibration laboratories (CNAS-CL01 Accreditation Criteria for the competence of testing and calibration laboratories) on Apr. 18, 2013

#### .FCC- Registration No: 248337

The 3m Semi-Anechoic Chamber, 3m/10m Open Area Test Site and Shielding Room of Dongguan Yaxu (AiT) Technology Limited have been registered by Federal Communications Commission (FCC) on Aug.29, 2014.

#### .Industry Canada(IC)-Registration No: IC6819A-1

The 3m Semi-Anechoic Chamber and 3m/10m Open Area Test Site of Dongguan Yaxu (AiT) Technology Limited have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing on Oct. 12, 2014.

#### .VCCI- Registration No: 2705


The 3m/10m Open Area Test Site, Shielding Room and 3m Chamber of Dongguan Yaxu (AiT) Technology Limited have been registered by Voluntary Control Council for Interference on Nov. 21, 2012. The Telecommunication Ports Conducted Disturbance Measurement of Dongguan Yaxu (AiT) Technology Limited have been registered by Voluntary Control Council for Interference on May. 13, 2013.

## 3.1 Deviation from standard

None

## 3.2 Abnormalities from standard conditions

None







# 4 General Information

# 4.1 General Description of EUT

Manufacturer:	Zhong Shan City LI TAI Electronic industrial Co.,Ltd			
Manufacturer Address:	No.3 Industrial District, Wuguishan Town, Zhongshan, GuangDong, China			
EUT Name:	CD MICRO SYSTEM			
Model No:	MCB1515			
Brand Name:	neno			
Serial No:	N/A			
Operation frequency:	2402 MHz to 2480 MHz			
NUMBER OF CHANNEL:	79			
Modulation Technology:	GFSK, π/4-DQPSK, 8DPSK(1/2/3Mbps)			
Bluetooth version:	BT4.0 Dual-mode			
H/W No.:	V1.1			
S/W No.:	V2.1			
Antenna Type:	PCB antenna			
Antenna Gain:	maximum 2.12dBi			
Power Supply Range:	AC 100-240V~,50/60Hz,20W			
Power Supply:	AC 120V 60Hz			
Power Cord:	1.2 m x 2 wires unscreened AC cable			
	1Mbps: 4.71dBm			
Output power (max):	3Mbps: 3.23dBm			
Note:				
1.	For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.			










# 4.2 Description of Test conditions

(1) EUT was tested in normal configuration (Please See following Block diagram)



Note: 1.The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98%.

2.Set EUT as above block diagram, run the software CSR 2.4.8, set the transmit serial port/power/channel/packet type/data type/hopping or not,send configuration,than EUT enter the TX mode. After finishing the test setting, the notebook and the transform board will be removed during measurements.

#### (2) E.U.T. test conditions:

15.31(e): For intentional radiators, measurements of the variation of the input power or the adiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.

#### (3) Test frequencies:


According to the 15.31(m) Measurements on intentional radiators or receivers, other than TV broadcast receivers, shall be performed and. If required reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table:

Frequency range over	Number of	Location in	
which device operates	frequencies	the range of operation	
1 MHz or less	1	Middle	
1 to 10 MHz	2	1 near top and 1 near bottom	
More than 10 MHz	3	1 near top, 1 near middle and 1 near bottom	

# (4) Frequency range of radiated measurements:

According to the 15.33, the test range will be up to the tenth harmonic of the highest fundamental frequency.

(5) Pre-test the EUT in all transmitting mode at the lowest (2402 MHz), middle (2441 MHz) and highest (2480 MHz) channel with different data packet and conducted to determine the worst-case mode, only the worst-case results(1Mbps/3Mbps) are recorded in this report.





# 4.3 Test Peripheral List

No.	Equipment	Manufacturer	EMC Compliance	Model No.	Serial No.	Power cord	signal cable
1	Lap top	ASUS	N/A	X401A	X16-96072	N/A	N/A
2	Adapter (laptop)	ASUS	N/A	EXA070 3YH	N/A	1.8m/unshielded /detachable	N/A
3	USB line	N/A	N/A	N/A	N/A	N/A	1.2m/unshielded /detachable
4	Transform board	N/A	N/A	N/A	N/A	N/A	N/A

# 4.4 EUT Peripheral List


No.	Equipment	Manufacturer	EMC Compliance	Model No.	Serial No.	Power cord	signal cable
1	Remote control	N/A	N/A	N/A	N/A	N/A	N/A
2	Speaker Line	N/A	N/A	N/A	N/A	N/A	1.7m/unshielded /detachable
3	Audio Line	N/A	N/A	N/A	N/A	N/A	1.5m/unshielded /detachable
4	FM Antenna	N/A	N/A	N/A	N/A	N/A	1.8m/unshielded /detachable
5	AC Cable	N/A	N/A	N/A	N/A	1.2m/unshielded /detachable	N/A



# 5 Equipments List for All Test Items

No	Test Equipment	Manufacturer	Model No	Serial No	Cal. Date	Cal. Due Date
1	Spectrum Analyzer	ADVANTEST	R3182	150900201	2015.06.29	2016.06.28
2	EMI Measuring Receiver	R&S	ESR	101660	2014.12.12	2015.12.11
3	Low Noise Pre Amplifier	Tsj	MLA-10K01-B01-27	1205323	2015.06.29	2016.06.28
4	Low Noise Pre Amplifier	Tsj	MLA-0120-A02-34	2648A04738	2014.12.02	2015.12.01
5	TRILOG Super Broadband test Antenna	SCHWARZBECK	VULB9160	9160-3206	2014.12.03	2015.12.02
6	Broadband Horn Antenna	SCHWARZBECK	BBHA9120D	452	2014.12.03	2015.12.02
7	SHF-EHF Horn	SCHWARZBECK	BBHA9170	BBHA9170367	2014.12.03	2015.12.02
8	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2015.09.26	2016.09.25
9	EMI Test Receiver	R&S	ESCI	100124	2015.06.29	2016.06.28
10	LISN	Kyoritsu	KNW-242	8-837-4	2015.06.29	2016.06.28
11	LISN	Kyoritsu	KNW-407	8-1789-3	2015.06.29	2016.06.28
12	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2015.09.25	2016.09.24
13	Loop Antenna	ARA	PLA-1030/B	1029	2015.03.20	2016.03.19
14	Radiated Cable 1# (30MHz-1GHz)	FUJIKURA	5D-2W	01	2015.01.04	2016.01.03
15	Radiated Cable 2# (1GHz -25GHz)	FUJIKURA	10D2W	02	2014.12.25	2015.12.24
16	Conducted Cable 1#(9KHz-30MHz)	FUJIKURA	1D-2W	01	2015.01.04	2016.01.03
17	SMA Antenna connector	Dosin	Dosin-SMA	N/A	N/A	N/A

Note: The SMA antenna connector is soldered on the PCB board in order to perform conducted tests and this SMA antenna connector is listed in the equipment list.





# 6 Test Result

# 6.1 Antenna Requirement

# 6.1.1 Standard requirement

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

#### 6.1.2 EUT Antenna

The antenna is layout on PCB in the EUT and no consideration of replacement. Antenna gain is max 2.12dbi from 2.4GHz to 2.5GHz.



# **6.2 Conduction Emissions Measurement**

## 6.2.1 Applied procedures / Limit


Frequency of Emission (MHz)	equency of Emission (MHz) Conducted Limit (dBμV)		
	Quasi-peak	Average	
0.15-0.5	66 to 56 *	56 to 46 *	
0.5-5	56	46	
5-30	60	50	


Note: Decreases with the logarithm of the frequency.

# 6.2.2 Test procedure

EUT was placed upon a wooden test table 0.8m above the horizontal metal reference plane and 0.4m from the vertical ground plane, and it was connected to an AMN. The closest distance between the boundary of the EUT and the surface of the AMN is 0.8m. All peripherals were connected to another AMN, and placed at a distance of 10cm from each other. A spectrum and receiver was connected to the RF output port of the AMN. Both average and quasi-peak value were detected.

## 6.2.3 Test setup

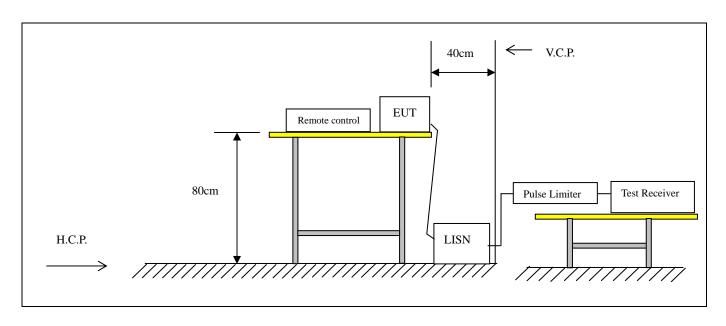






# 6.2.4 Test results

EUT:	CD MICRO SYSTEM	Model Name. :	MCB1515
Temperature:	26 ℃	Relative Humidity:	54%
Pressure:	1010hPa	Test Date :	2015-09-20
Test Mode:	TX (1Mbps) CH00 (worst case)	Phase :	Line
Test Voltage :	AC 120V/60Hz		

Frequency (MHz)	Meter Reading (dBμV)	Factor(dB)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Detector
0.3100	27.28	9.82	37.10	59.97	-22.87	Quasi-Peak
0.3100	24.50	9.82	34.32	49.97	-15.65	Average
0.9340	22.28	9.88	32.16	56.00	-23.84	Quasi-Peak
0.9340	15.23	9.88	25.11	46.00	-20.89	Average
9.6097	29.14	0.88	30.02	60.00	-29.98	Quasi-Peak
9.6097	20.59	0.88	21.47	50.00	-28.53	Average

Remark: Factor = LISN factor + Cable Loss + Pulse limiter factor.

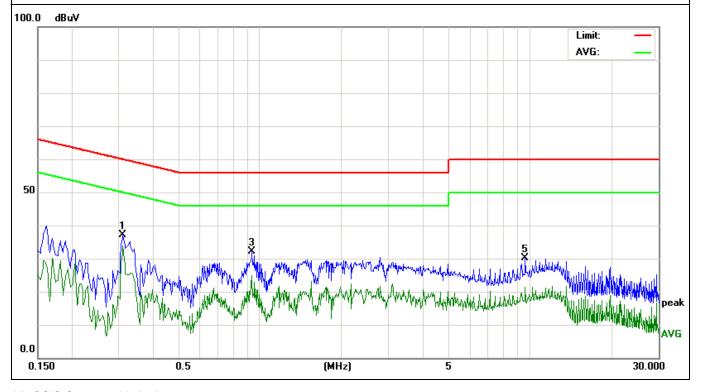


**UL-CCIC** Company Limited




EUT:	CD MICRO SYSTEM	Model Name. :	MCB1515
Temperature:	26 ℃	Relative Humidity:	54%
Pressure:	1010hPa	Test Date :	2015-09-20
Test Mode:	TX (1Mbps) CH00 (worst case)	Phase :	Neutral
Test Voltage :	AC 120V/60Hz		

Frequency (MHz)	Meter Reading (dBµV)	Factor(dB)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Detector
0.3140	32.05	9.83	41.88	59.86	-17.98	Quasi-Peak
0.3140	26.87	9.83	36.70	49.86	-13.16	Average
0.9260	25.51	9.88	35.39	56.00	-20.61	Quasi-Peak
0.9260	18.76	9.88	28.64	46.00	-17.36	Average
11.4739	31.43	1.00	32.43	60.00	-27.57	Quasi-Peak
11.4739	21.45	1.00	22.45	50.00	-27.55	Average

Remark: Factor = LISN factor + Cable Loss + Pulse limiter factor.

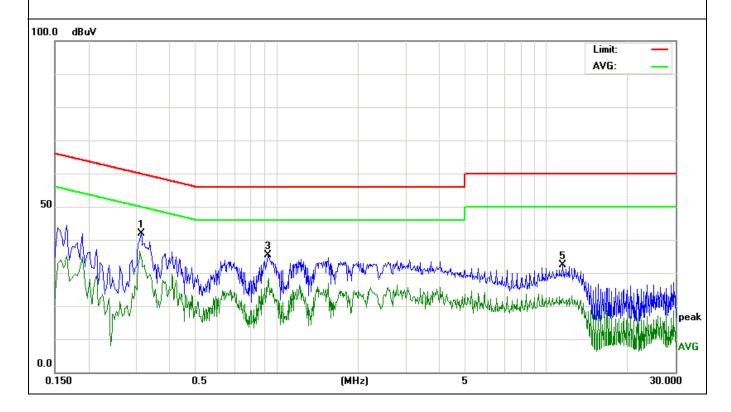





## 6.3 Radiated Emissions Measurement

### 6.3.1 Applied procedures / Limit

15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

	Field Stre	ength	Measurement	
Frequency of Emission (MHz)	μV/m	dBμV/m	Distance (meters)	
0.009-0.49	2400/F(kHz)		300	
0.49-1.705	24000/F(kHz)		30	
1.705-30	30		30	
30-88	100	40	3	
88-216	150	43.5	3	
216-960	200	46	3	
Above 960	500	54	3	


## 6.3.2 Test setup

#### **Test Configuration:**


1) 9 kHz to 30 MHz emissions:






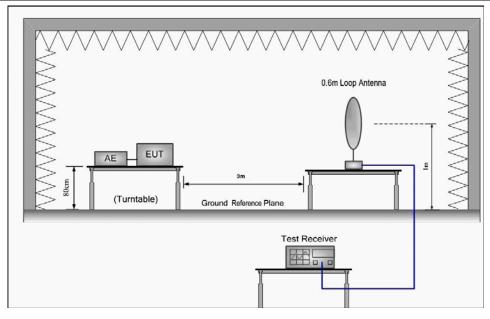


# 2) 30 MHz to 1 GHz emissions:

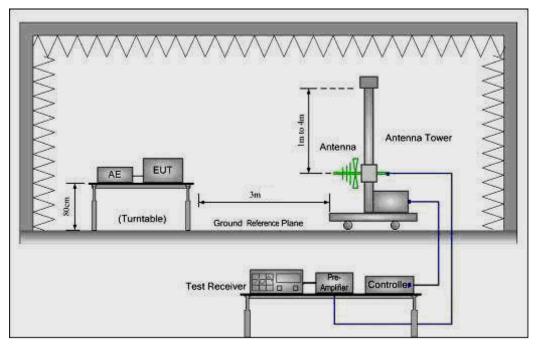


3) 1 GHz to 25 GHz emissions:





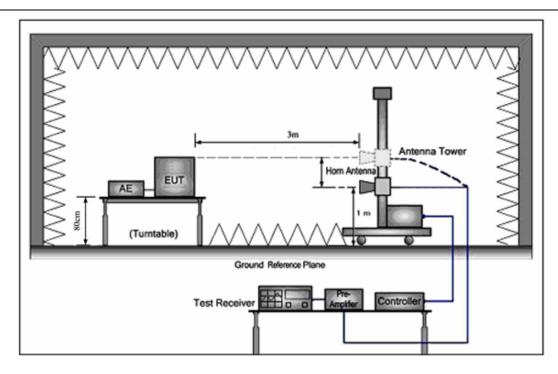






# 6.3.3 Test procedure

EUT was placed upon a wooden test table which was placed on the turn table 0.8m above the horizontal metal ground plane, and operating in the mode as mentioned above. A receiving antenna was placed 3m away from the EUT. During testing, turn around the turn table and move the antenna from 1m to 4m to find the maximum field-strength reading. All peripherals were placed at a distance of 10cm between each other. Both horizontal and vertical antenna polarities were tested. The worst case emissions were reported.

#### For measurement at frequency above 1GHz

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.






## 6.3.4 Test Result

# **Radiated Emissions Test Data Below 30MHz**

EUT:	CD MICRO SYSTEM	Model Name:	MCB1515		
Temperature:	25 ℃	Test Data	2015-09-20		
Pressure:	1005 hPa	Relative Humidity:	60%		
Test Mode :	TX	Test Voltage:	AC 120V/60Hz		
Measurement Distance	3 m	Frenqucy Range	9KHz to 30MHz		
RBW/VBW	9KHz~150KHz/RB 200Hz for QP, 150KHz~30MHz/RB 9KHz for QP				

No emission found between lowest internal used/generated frequencies to 30MHz.





#### **Radiated Emissions Test Data Below 1GHz**

EUT:	CD MICRO SYSTEM	Model Name:	MCB1515			
Temperature:	25 ℃	Test Data	2015-09-20			
Pressure:	1010 hPa	Relative Humidity:	60%			
Test Mode :	TX (1Mbps) CH00 (worst case)	Test Voltage:	AC 120V/60Hz			
Measurement Distance	3 m	Frenqucy Range	30MHz to 1GHz			
RBW/VBW	100KHz / 300KHz for spectrum, RBW=120KHz for receiver.					

#### (a) Antenna polarization: Horizontal

(a) / thorna polarization. Horizontal							
Frequency	Reading	Correct	Measure	Limit	Margin	Detector Type	
(MHz)	Level	Factor	Level	(dBuV/m)	(dB)		
	(dBuV)	(dB)	(dBuV/m)				
45.3755	35.57	-14.43	21.14	40.00	-18.86	QUASIPEAK	
116.5400	39.21	-15.07	24.14	43.50	-19.36	QUASIPEAK	
186.4407	38.40	-11.84	26.56	43.50	-16.94	QUASIPEAK	
253.8367	31.94	-10.99	20.95	46.00	-25.05	QUASIPEAK	
550.9479	33.44	-3.49	29.95	46.00	-16.05	QUASIPEAK	
750.1082	32.69	-1.05	31.64	46.00	-14.36	QUASIPEAK	


# (b) Antenna polarization: vertical

Frequency	Reading	Correct	Measure	Limit	Margin	Detector Type
(MHz)	Level	Factor	Level	(dBuV/m)	(dB)	
	(dBuV)	(dB)	(dBuV/m)			
39.2991	51.10	-16.62	34.48	40.00	-5.52	QUASIPEAK
92.1388	46.15	-18.02	28.13	43.50	-15.37	QUASIPEAK
133.1511	45.35	-14.79	30.56	43.50	-12.94	QUASIPEAK
181.9201	41.74	-14.61	27.13	43.50	-16.37	QUASIPEAK
434.0650	34.55	-6.61	27.94	46.00	-18.06	QUASIPEAK
729.3582	31.30	-0.55	30.75	46.00	-15.25	QUASIPEAK

#### Note:

Measurement Level = Reading Level + Factor

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier





#### **Radiated Emissions Test Data Above 1GHz**

EUT:	CD MICRO SYSTEM	Model Name:	MCB1515		
Temperature:	25 ℃	Test Data	2015-09-20		
Pressure:	1010 hPa	Relative Humidity:	60%		
Test Mode:	1Mbps	Test Voltage:	AC 120V/60Hz		
Measurement Distance	3 m	Frenqucy Range	1GHz to 25GHz		
RBW/VBW	1MHz/1MHz for Peak, 1MHz/10Hz for Average.				

#### (a) Antenna polarization: Horizontal

a) / thoma polarization. Honzontal						
Frequency	Reading	Correct	Measure	Limit	Margin	Detector
(MHz)	Level	Factor	Level	(dBuV/m)	(dB)	Туре
	(dBuV)	(dB)	(dBuV/m)			
4804.000	54.13	5.06	59.19	74.00	-14.81	PEAK
4804.000	40.47	5.06	45.53	54.00	-8.47	AVERAGE
7206.000	46.65	7.03	53.68	74.00	-20.32	PEAK
7206.000	34.24	7.03	41.27	54.00	-12.73	AVERAGE
9608.000	46.11	10.63	56.74	74.00	-17.26	PEAK
9608.000	34.64	10.63	45.27	54.00	-8.73	AVERAGE

# (b) Antenna polarization: Vertical

Frequency	Reading	Correct	Measure	Limit	Margin	Detector
(MHz)	Level	Factor	Level	(dBuV/m)	(dB)	Туре
	(dBuV)	(dB)	(dBuV/m)			
4804.000	53.42	5.06	58.48	74.00	-15.52	PEAK
4804.000	42.93	5.06	47.99	54.00	-6.01	AVERAGE
7206.000	47.81	7.03	54.84	74.00	-19.16	PEAK
7206.000	35.60	7.03	42.63	54.00	-11.37	AVERAGE
9608.000	45.35	10.63	55.98	74.00	-18.02	PEAK
9608.000	33.40	10.63	44.03	54.00	-9.97	AVERAGE

#### Note:


# 10~25GHz at least have 20dB margin. No recording in the test report.

Measurement Level = Reading Level + Factor

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier

Lowest channel: 2402 MHz

Data rate: 1Mbps





## (a) Antenna polarization: Horizontal

Frequency	Reading	Correct	Measure	Limit	Margin	Detector
(MHz)	Level	Factor	Level	(dBuV/m)	(dB)	Туре
	(dBuV)	(dB)	(dBuV/m)			
4882.000	53.31	5.14	58.45	74.00	-15.55	PEAK
4882.000	41.60	5.14	46.74	54.00	-7.26	AVERAGE
7323.000	46.17	7.54	53.71	74.00	-20.29	PEAK
7323.000	34.58	7.54	42.12	54.00	-11.88	AVERAGE
9764.000	45.26	11.39	56.65	74.00	-17.35	PEAK
9764.000	33.34	11.39	44.73	54.00	-9.27	AVERAGE

# (b) Antenna polarization: Vertical

2) Tittorina polarizationi vortical								
Frequency	Reading	Correct	Measure	Limit	Margin	Detector		
(MHz)	Level	Factor	Level	(dBuV/m)	(dB)	Туре		
	(dBuV)	(dB)	(dBuV/m)					
4882.000	54.10	5.14	59.24	74.00	-14.76	PEAK		
4882.000	42.47	5.14	47.61	54.00	-6.39	AVERAGE		
7323.000	46.35	7.54	53.89	74.00	-20.11	PEAK		
7323.000	35.28	7.54	42.82	54.00	-11.18	AVERAGE		
9764.000	44.45	11.39	55.84	74.00	-18.16	PEAK		
9764.000	32.31	11.39	43.70	54.00	-10.30	AVERAGE		

#### Note:


# 10~25GHz at least have 20dB margin. No recording in the test report.

Measurement Level = Reading Level + Factor

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier

Middle Channel: 2441 MHz

Data rate: 1Mbps





### (a) Antenna polarization: Horizontal

(a)/interna polarization. Horizontal								
Frequency	Reading	Correct	Measure	Limit	Margin	Detector		
(MHz)	Level	Factor	Level	(dBuV/m)	(dB)	Туре		
	(dBuV)	(dB)	(dBuV/m)					
4960.000	53.43	5.22	58.65	74.00	-15.35	PEAK		
4960.000	40.67	5.22	45.89	54.00	-8.11	AVERAGE		
7440.000	46.22	8.06	54.28	74.00	-19.72	PEAK		
7440.000	33.56	8.06	41.62	54.00	-12.38	AVERAGE		
9920.000	43.37	12.10	55.47	74.00	-18.53	PEAK		
9920.000	32.85	12.10	44.95	54.00	-9.05	AVERAGE		

## (b) Antenna polarization: Vertical

Frequency	Reading	Correct	Measure	Limit	Margin	Detector
(MHz)	Level	Factor	Level	(dBuV/m)	(dB)	Туре
	(dBuV)	(dB)	(dBuV/m)			
4960.000	54.21	5.22	59.43	74.00	-14.57	PEAK
4960.000	39.55	5.22	44.77	54.00	-9.23	AVERAGE
7440.000	43.60	8.06	51.66	74.00	-22.34	PEAK
7440.000	32.32	8.06	40.38	54.00	-13.62	AVERAGE
9920.000	44.54	12.10	56.64	74.00	-17.36	PEAK
9920.000	33.57	12.10	45.67	54.00	-8.33	AVERAGE

#### Note:


# 10~25GHz at least have 20dB margin. No recording in the test report.

Measurement Level = Reading Level + Factor

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier

Highest Channel: 2480 MHz

Data rate: 1Mbps





EUT:	CD MICRO SYSTEM	Model Name:	MCB1515			
Temperature:	<b>25</b> ℃	Test Data	2015-09-20			
Pressure:	1010 hPa	Relative Humidity:	60%			
Test Mode :	3Mbps	Test Voltage:	AC 120V/60Hz			
Measurement Distance	Frenqucy Range 1GHz to 25GHz					
RBW/VBW	1MHz/1MHz for Peak, 1MHz/10Hz for Average.					

# (a) Antenna polarization: Horizontal

Frequency	Reading	Correct	Measure	Limit	Margin	Detector
(MHz)	Level	Factor	Level	(dBuV/m)	(dB)	Туре
	(dBuV)	(dB)	(dBuV/m)			
4804.000	53.15	5.06	58.21	74.00	-15.79	PEAK
4804.000	41.23	5.06	46.29	54.00	-7.71	AVERAGE
7206.000	46.67	7.03	53.70	74.00	-20.30	PEAK
7206.000	35.40	7.03	42.43	54.00	-11.57	AVERAGE
9608.000	45.54	10.63	56.17	74.00	-17.83	PEAK
9608.000	34.28	10.63	44.91	54.00	-9.09	AVERAGE

## (b) Antenna polarization: Vertical

Frequency	Reading	Correct	Measure	Limit	Margin	Detector
(MHz)	Level	Factor	Level	(dBuV/m)	(dB)	Туре
	(dBuV)	(dB)	(dBuV/m)			
4804.000	54.85	5.06	59.91	74.00	-14.09	PEAK
4804.000	40.40	5.06	45.46	54.00	-8.54	AVERAGE
7206.000	45.32	7.03	52.35	74.00	-21.65	PEAK
7206.000	34.18	7.03	41.21	54.00	-12.79	AVERAGE
9608.000	43.92	10.63	54.55	74.00	-19.45	PEAK
9608.000	32.63	10.63	43.26	54.00	-10.74	AVERAGE

## Note:


# 10~25GHz at least have 20dB margin. No recording in the test report.

Measurement Level = Reading Level + Factor

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier

Lowest Channel: 2402 MHz

Data rate: 3Mbps





### (a) Antenna polarization: Horizontal

(MHz)         Level (dBuV)         Factor (dB)         Level (dBuV/m)         (dBuV/m)         (dBuV/m)           4882.000         54.23         5.14         59.37         74.00         -14.           4882.000         42.60         5.14         47.74         54.00         -6.2           7323.000         46.45         7.54         53.99         74.00         -20.           7323.000         34.47         7.54         42.01         54.00         -11.	a), the ma polarization i forizontal							
(dBuV)     (dB)     (dBuV/m)       4882.000     54.23     5.14     59.37     74.00     -14.       4882.000     42.60     5.14     47.74     54.00     -6.2       7323.000     46.45     7.54     53.99     74.00     -20.       7323.000     34.47     7.54     42.01     54.00     -11.	_imit	Limit	Margin	Detector				
4882.000       54.23       5.14       59.37       74.00       -14.         4882.000       42.60       5.14       47.74       54.00       -6.2         7323.000       46.45       7.54       53.99       74.00       -20.         7323.000       34.47       7.54       42.01       54.00       -11.	BuV/m	(dBuV/m)	) (dB)	Туре				
4882.000     42.60     5.14     47.74     54.00     -6.2       7323.000     46.45     7.54     53.99     74.00     -20.       7323.000     34.47     7.54     42.01     54.00     -11.								
7323.000     46.45     7.54     53.99     74.00     -20.       7323.000     34.47     7.54     42.01     54.00     -11.	74.00	74.00	-14.63	PEAK				
7323.000 34.47 7.54 42.01 54.00 -11.	54.00	54.00	-6.26	AVERAGE				
	74.00	74.00	-20.01	PEAK				
9764.000 44.36 11.39 55.75 74.00 -18.	54.00	54.00	-11.99	AVERAGE				
	74.00	74.00	-18.25	PEAK				
9764.000 32.85 11.39 44.24 54.00 -9.7	54.00	54.00	-9.76	AVERAGE				

## (b) Antenna polarization: Vertical

Frequency	Reading	Correct	Measure	Limit	Margin	Detector
(MHz)	Level	Factor	Level	(dBuV/m)	(dB)	Туре
	(dBuV)	(dB)	(dBuV/m)			
4882.000	54.24	5.14	59.38	74.00	-14.62	PEAK
4882.000	42.67	5.14	47.81	54.00	-6.19	AVERAGE
7323.000	47.81	7.54	55.35	74.00	-18.65	PEAK
7323.000	36.24	7.54	43.78	54.00	-10.22	AVERAGE
9764.000	45.53	11.39	56.92	74.00	-17.08	PEAK
9764.000	33.26	11.39	44.65	54.00	-9.35	AVERAGE

#### Note:


# 10~25GHz at least have 20dB margin. No recording in the test report.

Measurement Level = Reading Level + Factor

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier

Middle Channel: 2441 MHz

Data rate: 3Mbps





# (a) Antenna polarization: Horizontal

7 Arterna polarization. Horizontal								
Frequency	Reading	Correct	Measure	Limit	Margin	Detector		
(MHz)	Level	Factor	Level	(dBuV/m)	(dB)	Туре		
	(dBuV)	(dB)	(dBuV/m)					
4960.000	54.30	5.22	59.52	74.00	-14.48	PEAK		
4960.000	42.48	5.22	47.70	54.00	-6.30	AVERAGE		
7440.000	46.52	8.06	54.58	74.00	-19.42	PEAK		
7440.000	35.21	8.06	43.27	54.00	-10.73	AVERAGE		
9920.000	42.65	12.10	54.75	74.00	-19.25	PEAK		
9920.000	31.37	12.10	43.47	54.00	-10.53	AVERAGE		

## (b) Antenna polarization: Vertical

Frequency	Reading	Correct	Measure	Limit	Margin	Detector
(MHz)	Level	Factor	Level	(dBuV/m)	(dB)	Туре
	(dBuV)	(dB)	(dBuV/m)			
4960.000	53.24	5.22	58.46	74.00	-15.54	PEAK
4960.000	41.66	5.22	46.88	54.00	-7.12	AVERAGE
7440.000	46.43	8.06	54.49	74.00	-19.51	PEAK
7440.000	34.25	8.06	42.31	54.00	-11.69	AVERAGE
9920.000	45.10	12.10	57.20	74.00	-16.80	PEAK
9920.000	34.37	12.10	46.47	54.00	-7.53	AVERAGE

## Note:

# 10~25GHz at least have 20dB margin. No recording in the test report.

Measurement Level = Reading Level + Factor

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier

Highest channel: 2480 MHz

Data rate: 3Mbps



# 6.3.5 TEST RESULTS (Restricted Bands Requirements)

EUT:	CD MICRO SYSTEM	Model Name:	MCB1515					
Temperature:	<b>25</b> ℃	Test Data	2015-09-20					
Pressure:	1010 hPa	Relative Humidity:	60%					
Test Mode:	TX 1Mbps/3Mbps	Test Voltage:	AC 120V/60Hz					
Note:	The transmitter was set strength was measured a	•	vest channel. Then the field					
	2. The transmitter was set	up to transmit at the higl	hest channel. Then the field					
	strength was measured a	strength was measured at 2483.5-2500 MHz.						
	3. The data of 2390MHz an	d 2483.5MHz was the wo	rst.					

Toot	Ant.Pol.	Eroa	Rea	ding	Ant/CF	А	ct	Lir	mit
Test Mode	H/V	Freq. (MHz)	Peak (dBuv)	AV (dBuv)	CF(dB)	Peak (dBuv/m)	AV (dBuv/m)	Peak (dBuv/m)	AV (dBuv/m)
	V	2390.00	43.16	33.25	-5.79	37.37	27.46	74.00	54.00
Data rate	Н	2390.00	43.52	32.43	-5.79	37.73	26.64	74.00	54.00
1Mbps	V	2483.50	47.30	37.87	-4.98	42.32	32.89	74.00	54.00
	Н	2483.50	44.38	31.69	-4.98	39.40	26.71	74.00	54.00
	V	2390.00	47.42	37.41	-5.79	41.63	31.62	74.00	54.00
Data rata	Н	2390.00	46.65	35.43	-5.79	40.86	29.64	74.00	54.00
Data rate 3Mbps	V	2483.50	45.84	35.56	-4.98	40.86	30.58	74.00	54.00
	Н	2483.50	45.76	34.82	-4.98	40.78	29.84	74.00	54.00

#### Remark:

- (1) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode.
- (2) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna
- (3) Corr.Factor = Antenna Factor + Cable Loss Pre-amplifier.



### **6.4 BANDWIDTH TEST**

# 6.4.1 Applied procedures / Limit

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, two-thirds 20dBbandwidth of hopping channel shell be a minimum limit for the hopping channel separation.

# 6.4.2 Test procedure


- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel RBW ≥ 1% of the 20 dB bandwidth, VBW ≥ RBW, Sweep = auto, Detector function = peak Trace = max hold

#### 6.4.3 Deviation from standard

No deviation.

#### 6.4.4 Test setup








# 6.4.5 Test results


EUT:	CD MICRO SYSTEM	Model Name:	MCB1515
Temperature:	26 ℃	Relative Humidity:	53%
Pressure:	1010 hPa	Test Power:	AC 120V/60Hz
Test Mode:	TX 1Mbps/ 3Mbps		

Cha	nnel	Channel frenqucy (MHz)	20dB bandwidth (KHz)	Limit (KHz)	Conclusion
	Low	2402	1099.9	N/A	Pass
1Mbps	Middle	2441	1102.9	N/A	Pass
	High	2480	1099.9	N/A	Pass
3Mbps	Low	2402	1342.7	N/A	Pass
	Middle	2441	1339.7	N/A	Pass
	High	2480	1342.7	N/A	Pass







### CH00-1Mbps

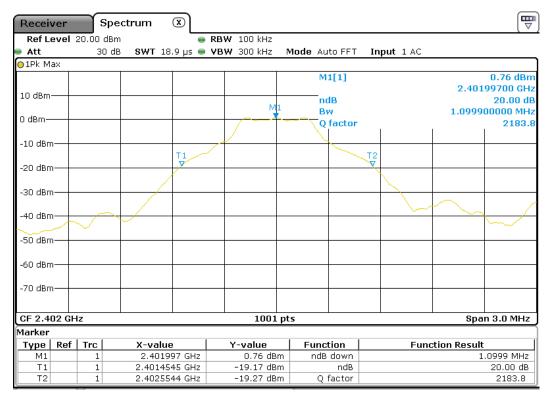


# CH 39-1Mbps

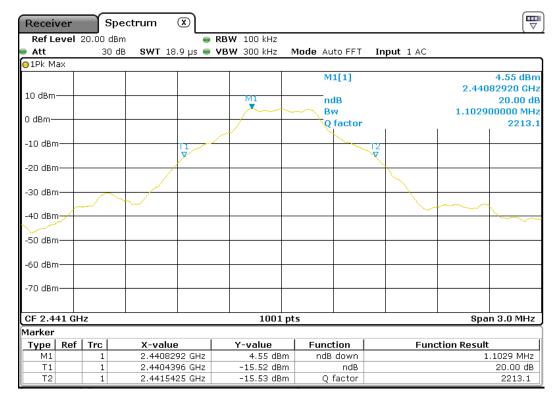







#### CH 78-1Mbps

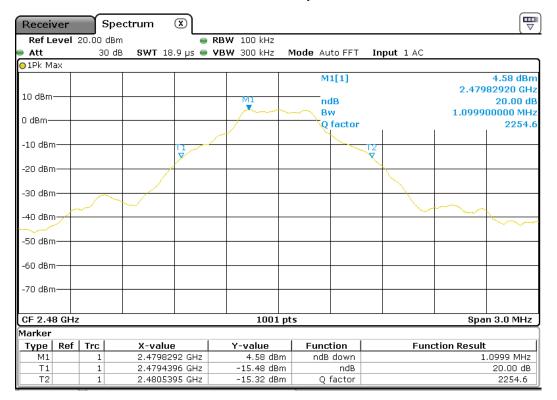


# CH 00-3Mbps

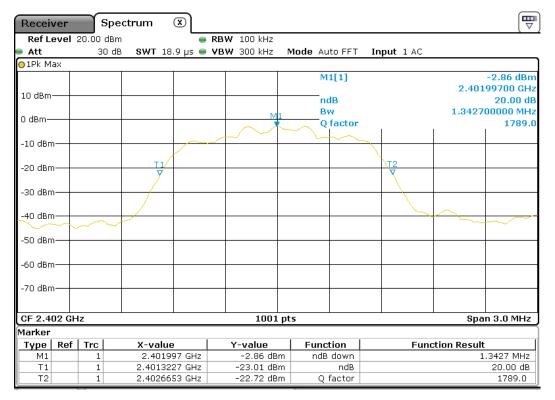







#### CH 39-3Mbps

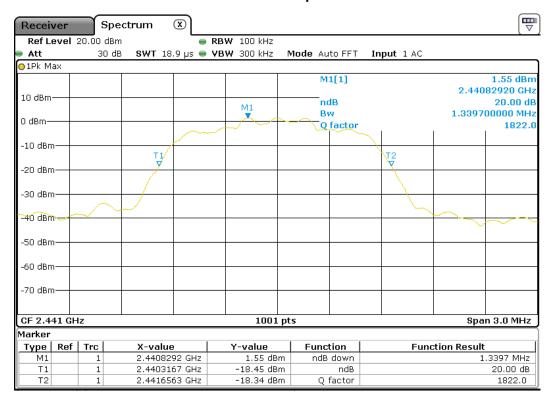

# CH 78-3Mbps

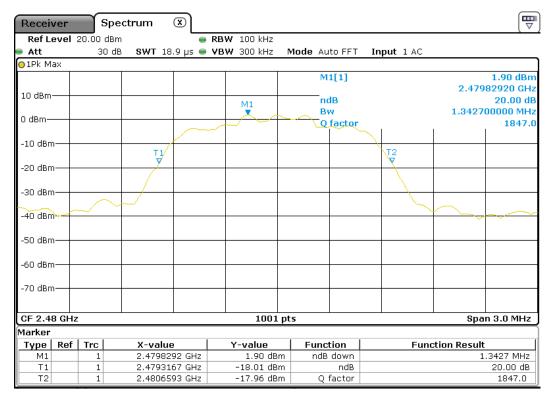





# 6.5 Carrier Frequencies Separated

# 6.5.1 Applied procedures / Limit

15.247(a) (1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

#### 6.5.2 Test procedure


- (1) Connected the antenna port to the Spectrum Analyzer, set the Spectrum Analyzer as Span = wide enough to capture the peaks of two adjacent channels, Resolution (or IF) Bandwidth (RBW) ≥ 1% of the span, Video (or Average) Bandwidth (VBW) ≥ RBW Sweep = auto, Detector function = peak, Trace = max hold
- (2) The EUT should be transmitting at its maximum data rate. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.
- (3) The above procedure shall be repeated at the lowest, the middle, and the highest frequency of the stated frequency range with modulated mode. also shall be performed at different modes of operation.

#### 6.5.3 Deviation from standard

No deviation.

#### 6.5.4 Test setup








# 6.5.5 Test results

EUT:	CD MICRO SYSTEM	Model Name:	MCB1515
Temperature:	26 ℃	Relative Humidity:	53%
Pressure:	1010 hPa	Test Power:	AC 120V/60Hz
Test Mode:	TX 1Mbps/ 3Mbps		


Cha	nnel	Channel frenqucy (MHz)	Channel Separation (MHz)	Conclusion
	Low	2402	1.0008	Pass
1Mbps	Middle	2441	0.9983	Pass
	Highest	2480	0.9986	Pass
	Low	2402	0.9971	Pass
3Mbps	Middle	2441	1.0008	Pass
	Highest	2480	0.9993	Pass

Ch. Separation >2/3(20dB bandwidth)







#### CH 00-1Mbps

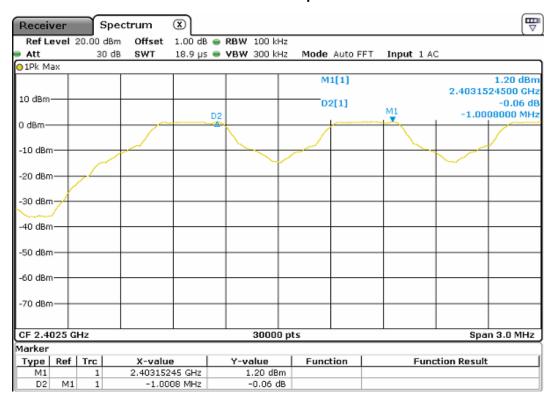


# CH 39-1Mbps

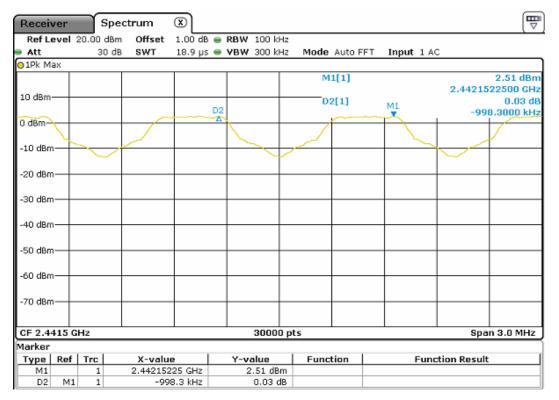







#### CH 78-1Mbps

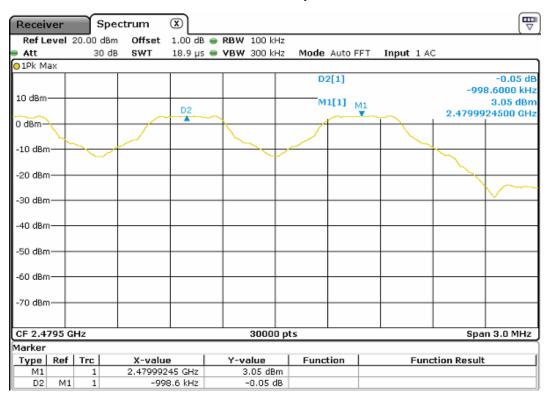


## CH 00-3Mbps

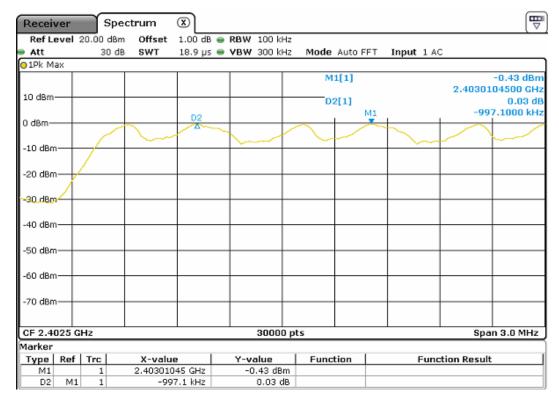







#### CH 39-3Mbps

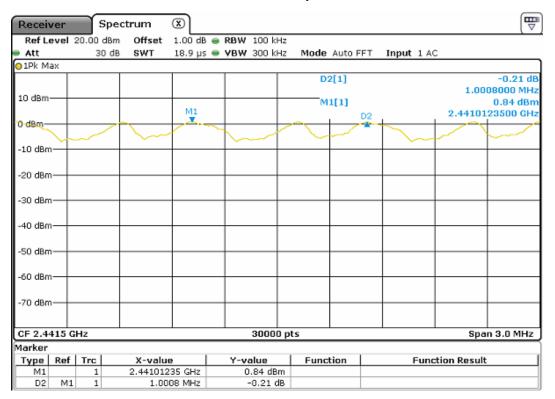

## CH 78-3Mbps

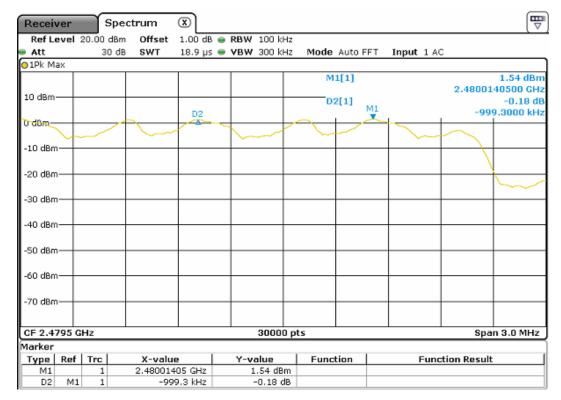





# 6.6 Hopping Channel Number

## 6.6.1 Applied procedures / Limit

15.247(a) (1) (iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

#### 6.6.2 Test procedure


- (1) Connected the antenna port to the Spectrum Analyzer , set the Spectrum Analyzer as Span = the frequency band of operation, RBW ≥ 1% of the span, VBW ≥ RBW Sweep = auto Detector function = peak, Trace = max hold
- (2) The EUT should be have its hopping function enabled. Maxhold and record hopping channels It may prove necessary to break the span up to sections, in order to clearly show all of the hopping frequencies.

#### 6.6.3 Deviation from standard

No deviation.

### 6.6.4 Test setup

EUT	SPECTRUM
	ANALYZER






# 6.6.5 Test result

Hopping Channel Number result				
Operating Mode: 1Mbps/ 3M	bps Mode	Test date:2015-09-20		
Result	Limi	t	Conclusion	
79	15		Pass	




EUT:	CD MICRO SYSTEM	Model Name:	MCB1515
Temperature:	26 ℃	Relative Humidity:	53%
Pressure:	1010 hPa	Test Power:	AC 120V/60Hz
Test Mode:	TX 1Mbps/ 3Mbps		

### 1Mbps

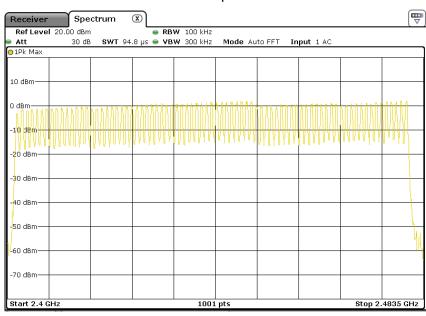

### 3Mbps

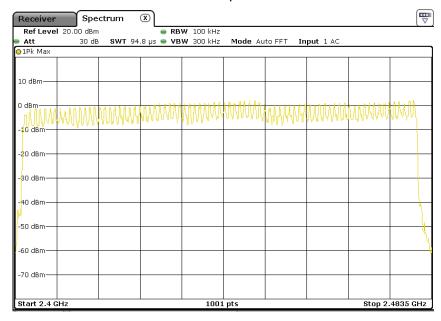



#### 6.7 Dwell time

## 6.7.1 Applied procedures / Limit

15.247(a) (1) (iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

#### 6.7.2 Test procedure

- (1) Place the EUT on the table in the chamber or connect the antenna port of the EUT to spectrum analyzer and set it in transmitting mode.
- (2) Set RBW of spectrum analyzer to 1MHz, VBW ≥ RBW
- (3) Use a video trigger with the trigger level set to enable triggering only on full pulses.
- (4) Sweep Time is more than once pulse time.
- (5) Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- (6) Measure the maximum time duration of one single pulse.
- (7) Set the EUT for DH5, DH3 and DH1 packet transmitting.
- (8) Measure the maximum time duration of one single pulse.
- (9) A Period Time = 79\*0.4=31.6 S

DH1 Time Slot: Reading \* (1600/2)\*31.6/79 DH3 Time Slot: Reading \* (1600/4)\*31.6/79 DH5 Time Slot: Reading \* (1600/6)\*31.6/79

#### 6.7.3 Deviation from standard

No deviation.

#### 6.7.4 Test setup







### 6.7.5 Test result

EUT:	CD MICRO SYSTEM	Model Name:	MCB1515
Temperature:	l26 ℃	Relative Humidity:	53%
Pressure:	1010 hPa	Test Power:	AC 120V/60Hz
Test Mode:	: CH00-DH1/DH3/DH5 (1Mbps Mode)		

Data Packet	Frequency	Pulse Duration (ms)	Dwell Time (ms)	Limits (s)
DH1	2402 MHz	0.452	144.640	0.4000
DH3	2402 MHz	1.692	270.720	0.4000
DH5	2402 MHz	2.956	315.306	0.4000


CH 00- DH1

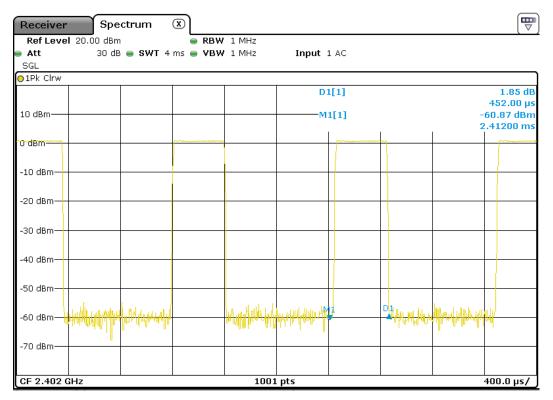






#### CH 00- DH3

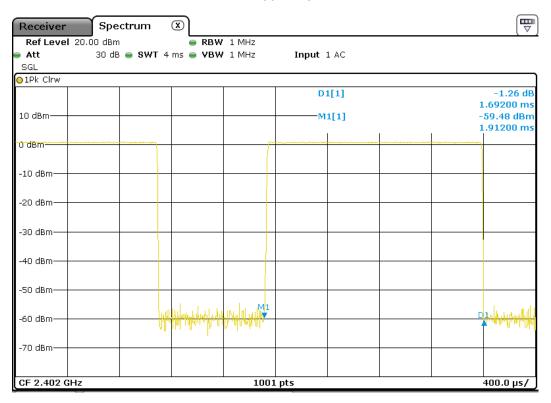

CH 00- DH5

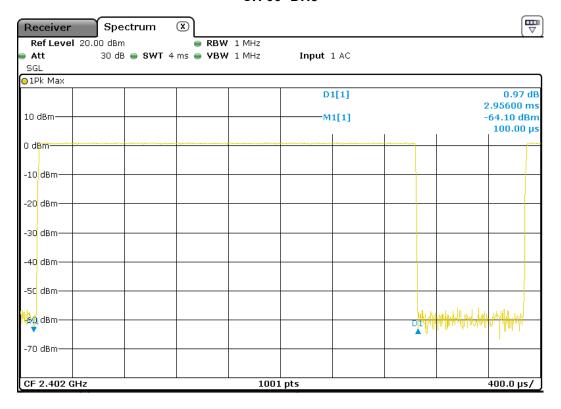





EUT:	CD MICRO SYSTEM	Model Name:	MCB1515
Temperature:	<b>26</b> ℃	Relative Humidity:	53%
Pressure:	1010 hPa	Test Power:	AC 120V/60Hz
Test Mode:	CH00-3DH1/3DH3/3DH5 (3Mbps Mode)		

Data Packet	Frequency	Pulse Duration (ms)	Dwell Time (ms)	Limits (s)
3DH1	2402 MHz	0.444	142.080	0.4000
3DH3	2402 MHz	1.692	270.720	0.4000
3DH5	2402 MHz	2.952	315.306	0.4000


#### CH 00- DH1

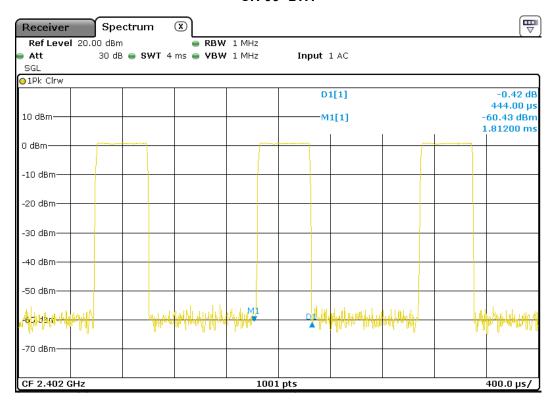







#### CH 00- DH3

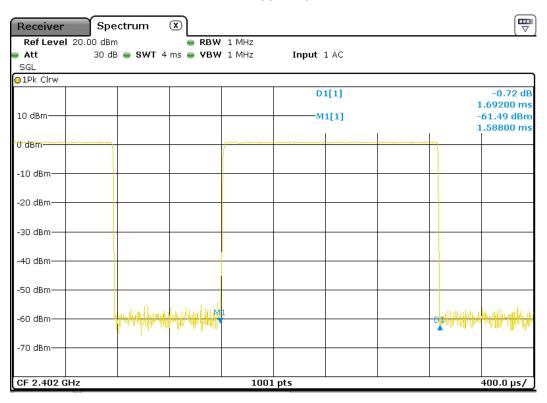

CH 00- DH5

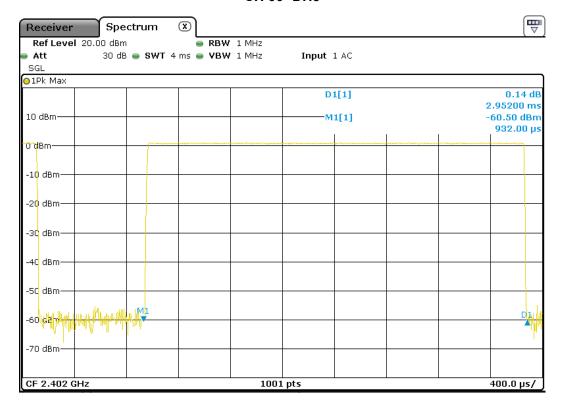





# 6.8 Maximum Peak Output Power

## 6.8.1 Applied procedures / Limit

15.247(a) (1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

15.247(b) (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

### 6.8.2 Test procedure

- (1) Connected the antenna port to the Spectrum Analyzer, set the Spectrum Analyzer as Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel RBW > the 20 dB bandwidth of the emission being measured, VBW ≥ RBW, Sweep = auto Detector function = peak, Trace = max hold
- (2) The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power.
- (3) The above procedure shall be repeated at the lowest, the middle, and the highest frequency of the stated frequency range with modulated mode. Also shall be performed at different modes of operation.


(4)

#### 6.8.3 Deviation from standard

No deviation.

### 6.8.4 Test setup








# 6.8.5 Test results

EUT:	CD MICRO SYSTEM	Model Name:	MCB1515
Temperature:	26 ℃	Relative Humidity:	60%
Pressure:	1010 hPa	Test Voltage:	AC 120V/60Hz
Test Mode: TX			
Note: All the data rates have be tested and the worst-case as the table below.			


Test Mode	Frequency	Peak Output Power (dBm)	Limit (dBm)	Result
Data rate 1Mbps	2402 MHz	1.18	21	Pass
	2441 MHz	4.71	21	Pass
	2480 MHz	2.24	21	Pass
	2402 MHz	-0.68	21	Pass
Data rate 3Mbps	2441 MHz	3.23	21	Pass
	2480 MHz	3.16	21	Pass
Cable loss = 0.5 dBm				




#### CH 00-1Mbps

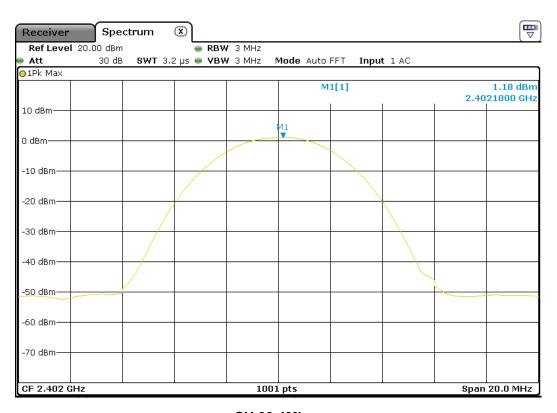


CH 39-1Mbps

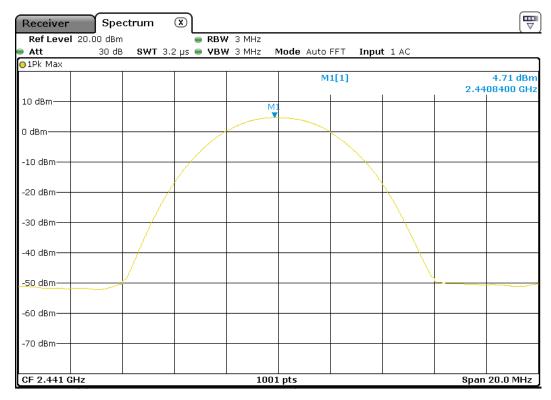







CH 78-1Mbps

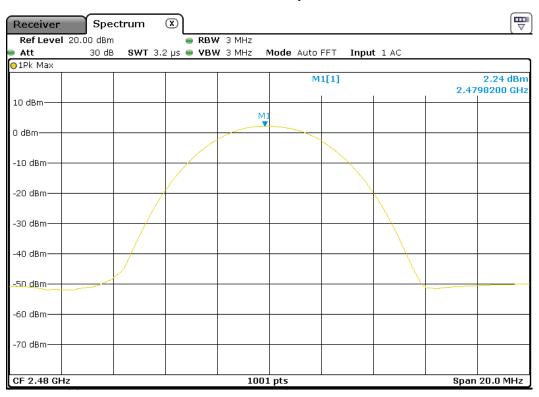


CH 00-3Mbps

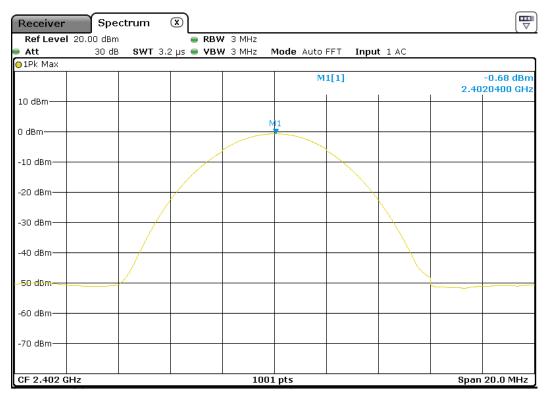







#### CH 39-3Mbps

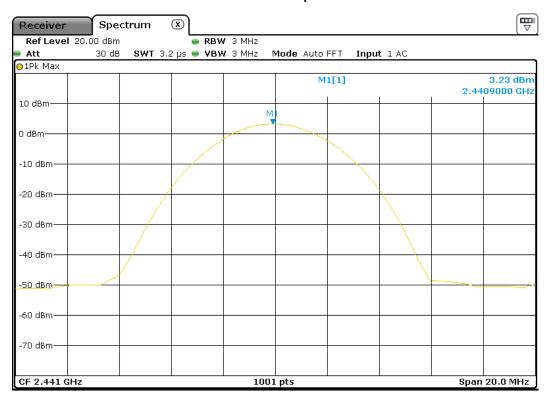

CH 78-3Mbps

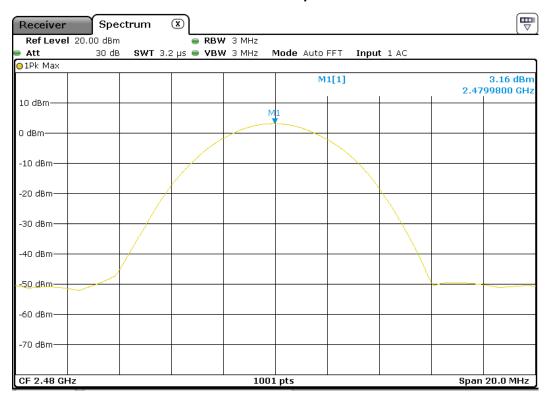





# 6.9 Band edge

#### 6.9.1 Applied procedures / Limit

15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

## 6.9.2 Test procedure

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation, RBW ≥ 1% of the span, VBW ≥ RBW, Sweep = auto, Detector function = peak, Trace = max hold

#### 6.9.3 Deviation from standard

No deviation.


#### 6.9.4 Test setup







#### 6.9.5 Test results

#### CH00 (Lower) Data rate 1Mbps

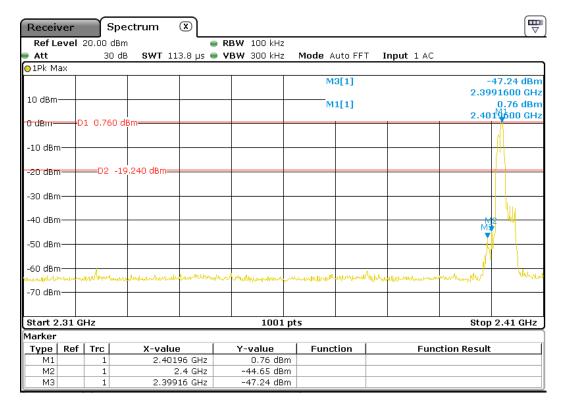


#### CH 78 (Upper) Data rate 1Mbps

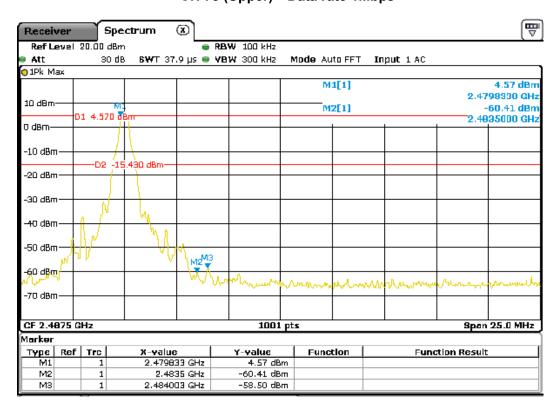







#### CH00 (Lower) Data rate 3Mbps

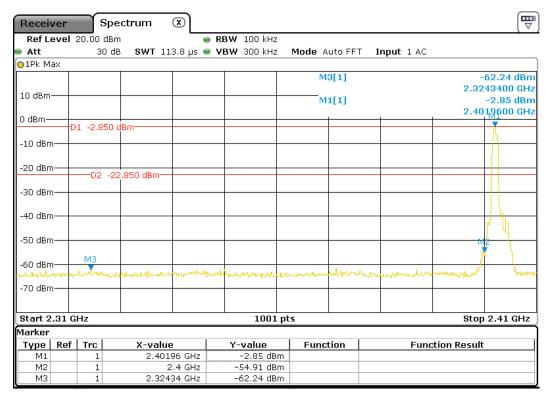


## CH 78 (Upper) Data rate 3Mbps

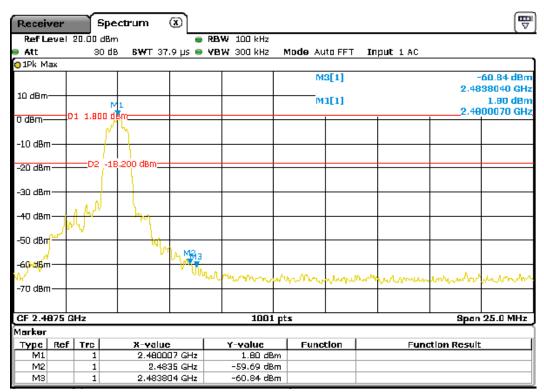







## CH00 (Lower) Data rate 1Mbps

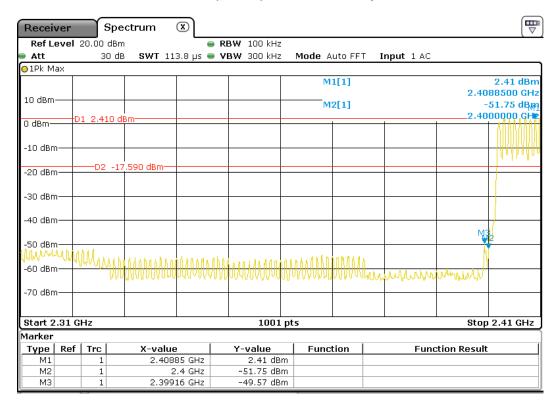


## CH 78 (Upper) Data rate 1Mbps

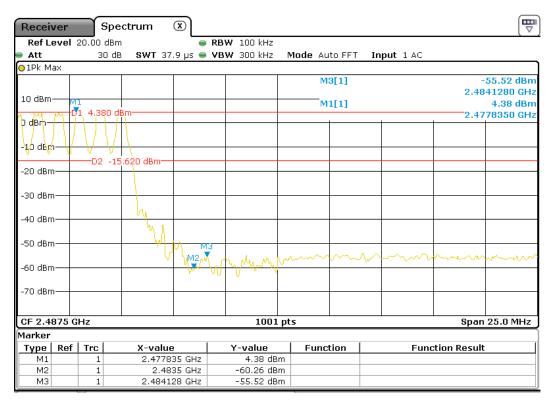







\_\_\_\_\_

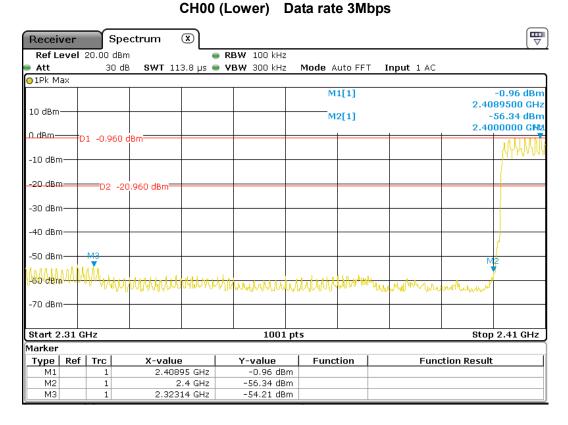

#### CH 78 (Upper) Data rate 3Mbps

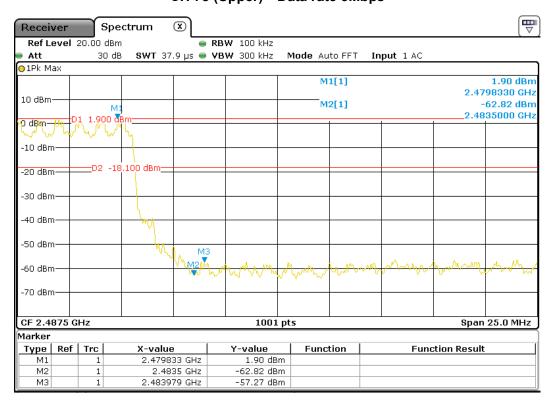





# 6.10 Conducted Spurious Emissions

## 6.10.1 Applied procedures / Limit

15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

#### 6.10.2 Test procedure


- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10<sup>th</sup> harmonic. Typically, several plots are required to cover this entire span. RBW = 100 kHz VBW ≥ RBW, Sweep = auto, Detector function = peak, Trace = max hold sweep points ≥ investigated frequency range/RBW.

#### 6.10.3 Deviation from standard

No deviation.

#### 6.10.4 Test setup










### 6.10.5Test results

## CH00 Data rate 1Mbps

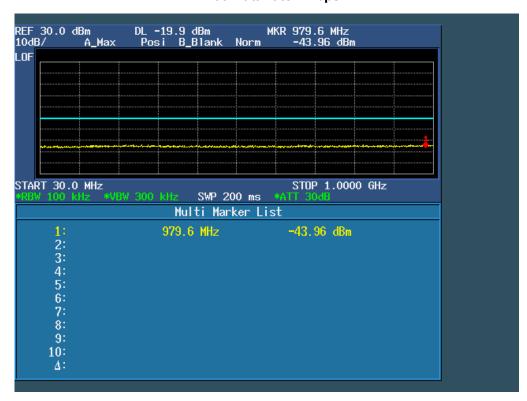


Note: Sweep Points=9700 CH00 Data rate 1Mbps

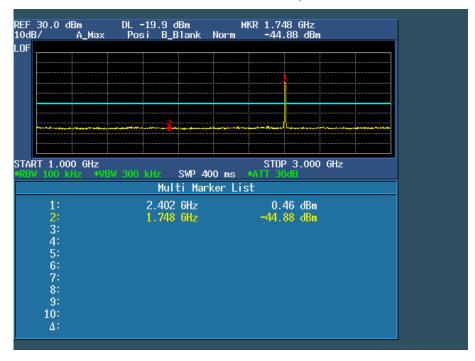







#### **CH00 Data rate 1Mbps**

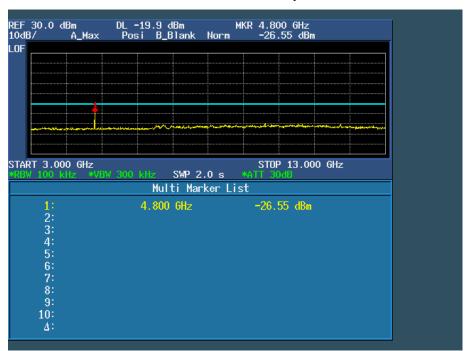


Note: Sweep Points=100000 CH00 Data rate 1Mbps

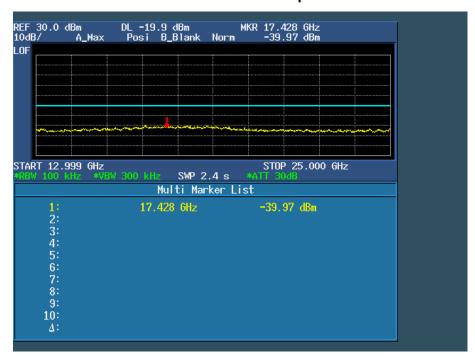







CH39 Data rate 1Mbps

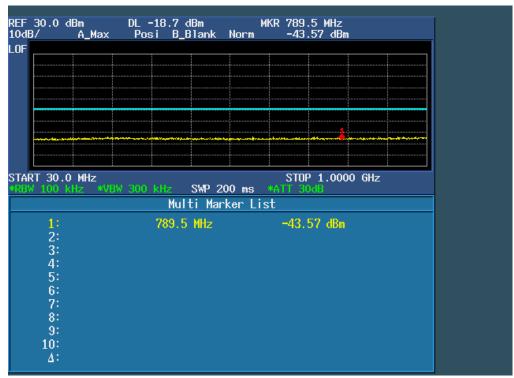


Note: Sweep Points=9700 CH39 Data rate 1Mbps

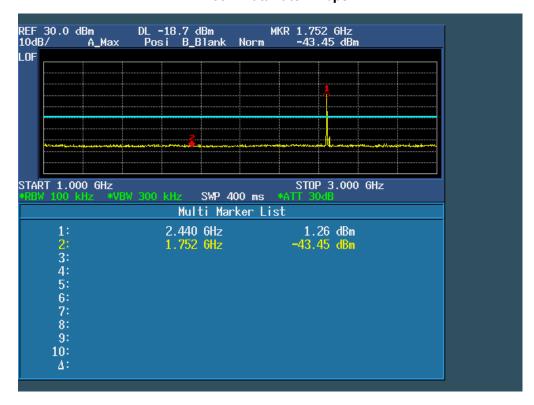







CH39 Data rate 1Mbps

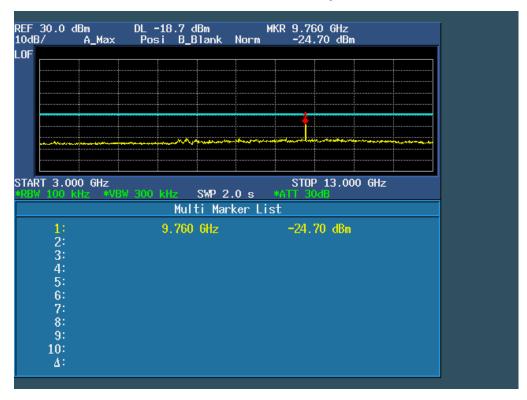


Note: Sweep Points=100000 CH39 Data rate 1Mbps

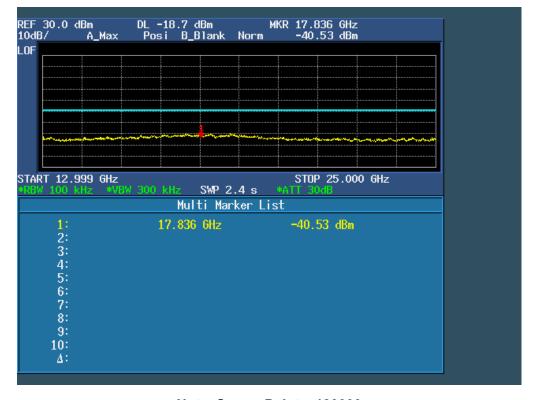






## CH78 Data rate 1Mbps

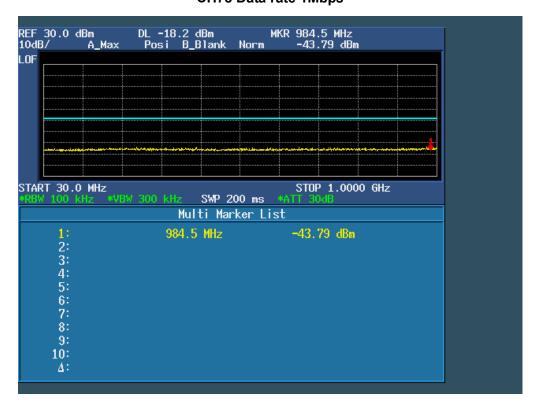


Note: Sweep Points=9700 CH78 Data rate 1Mbps









### CH78 Data rate 1Mbps

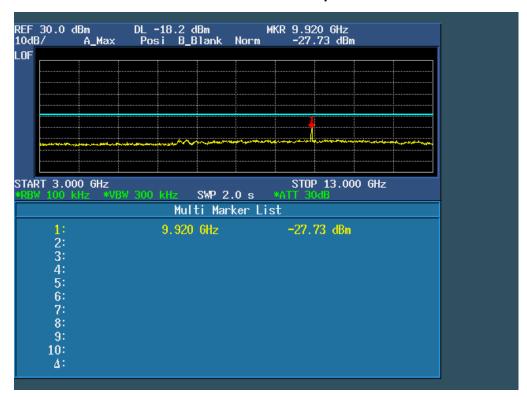


Note: Sweep Points=100000 CH78 Data rate 1Mbps

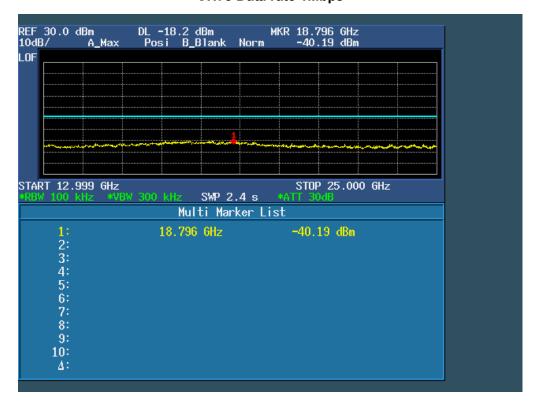






CH00 Data rate 3Mbps

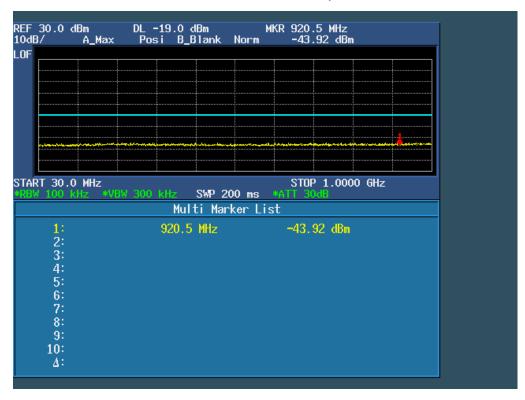


Note: Sweep Points=9700 CH00 Data rate 3Mbps









CH00 Data rate 3Mbps

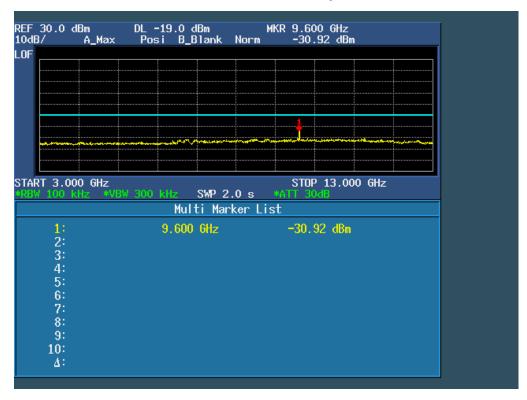


Note: Sweep Points=100000 CH00 Data rate 3Mbps

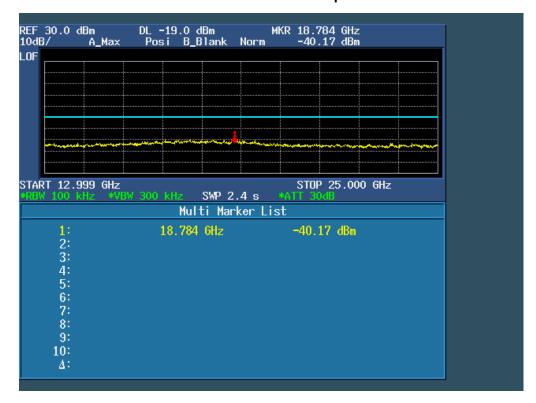







## CH39 Data rate 3Mbps

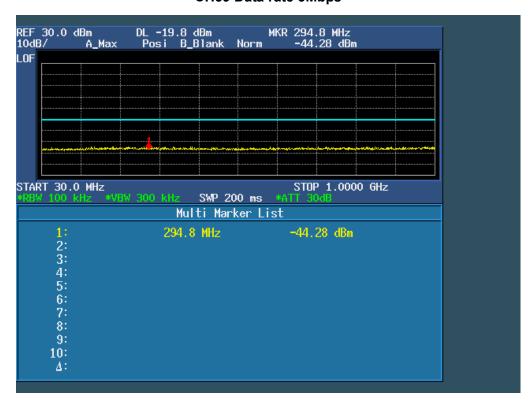


Note: Sweep Points=9700 CH39 Data rate 3Mbps

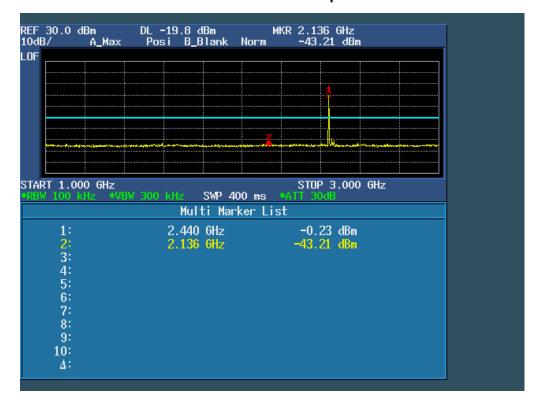







CH39 Data rate 3Mbps

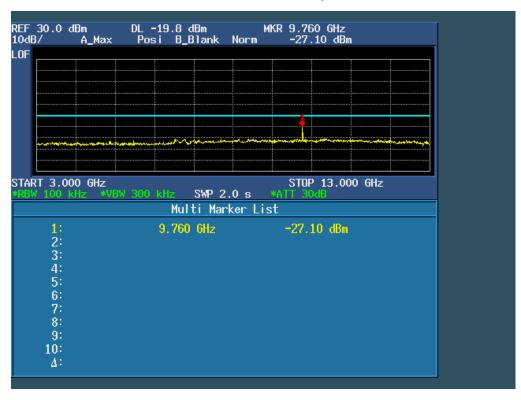


Note: Sweep Points=100000 CH39 Data rate 3Mbps

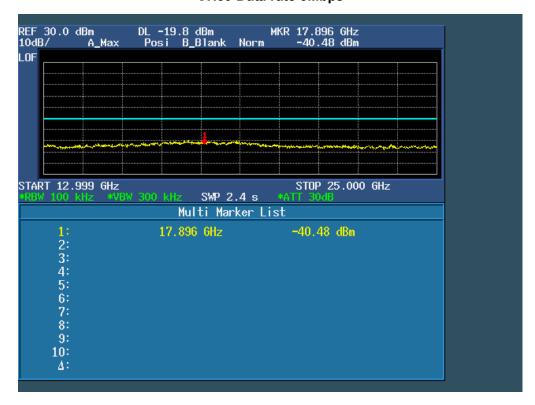






### CH78 Data rate 3Mbps

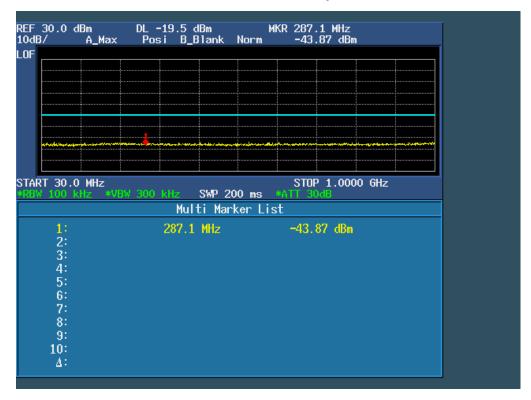


Note: Sweep Points=9700 CH78 Data rate 3Mbps







### CH78 Data rate 3Mbps

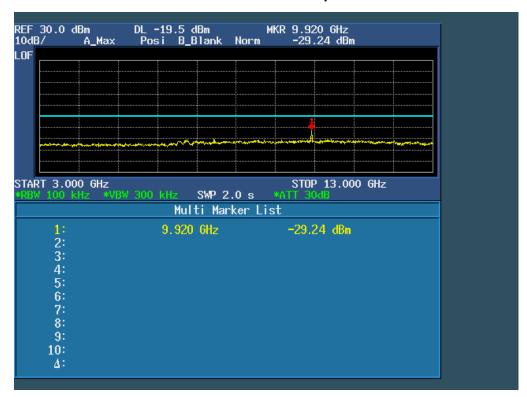

Note: Sweep Points=100000 CH78 Data rate 3Mbps

