

FCC 47 CFR PART 15 SUBPART C ISED RSS-247 ISSUE 2

CERTIFICATION TEST REPORT

For

Bluetooth Speaker

MODEL NUMBER: Jamstack

FCC ID: 2ABM5JAMSTACK

IC: 7844A-JAMSTACK

REPORT NUMBER: 4788512235.3-3

ISSUE DATE: July 31, 2018

Prepared for

ZHONG SHAN CITY LI TAI ELECTRONIC INDUSTRIAL CO.,LTD 3rd Industrial District, Wuguishan, ZhongShan City, Guangdong, China

Prepared by

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone, Dongguan, People's Republic of China


> Tel: +86 769-22038881 Fax: +86 769 33244054 Website: www.ul.com



Page 2 of 95

Revision History

Rev.	Issue Date	Revisions	Revised By
	7/31/2018	Initial Issue	





Summary of Test Results Test Clause **Test Items** FCC/IC Rules Results 20dB Bandwidth And 99% FCC 15.247 (a) (1) 1 Pass Bandwidth RSS-247 Clause 5.1 (a) FCC 15.247 (b) (1) 2 Peak Conducted Output Power Pass RSS-247 Clause 5.1 (b) FCC 15.247 (a) (1) 3 Carrier Hopping Channel Separation Pass RSS-247 Clause 5.1 (b) 15.247 (a) (1) III 4 Number of Hopping Frequency Pass RSS-247 Clause 5.1 (d) 15.247 (a) (1) III 5 Time of Occupancy (Dwell Time) Pass RSS-247 Clause 5.1 (d) FCC 15.247 (d) 6 Conducted Bandedge Pass RSS-247 Clause 5.5 FCC 15.247 (d) FCC 15.209 FCC 15.205 Radiated Bandedge and Spurious 7 Pass **RSS-247 Clause 5.5 RSS-GEN Clause 8.9** RSS-GEN Clause 8.10 Conducted Emission Test For AC FCC 15.207 8 Pass **Power Port RSS-GEN Clause 8.8** FCC 15.203 9 Antenna Requirement Pass RSS-GEN Clause 8.3



TABLE OF CONTENTS

1.	ΑT	TTESTATION OF TEST RESULTS	. 6
2.	TE	ST METHODOLOGY	. 7
3.	FA	ACILITIES AND ACCREDITATION	. 7
4.	CA	ALIBRATION AND UNCERTAINTY	. 8
	4.1.	MEASURING INSTRUMENT CALIBRATION	. 8
	4.2.	MEASUREMENT UNCERTAINTY	. 8
5.	EQ	QUIPMENT UNDER TEST	. 9
	5.1.	DESCRIPTION OF EUT	. 9
	5.2.	MAXIMUM OUTPUT POWER	. 9
	5.3.	PACKET TYPE CONFIGURATION	. 9
	5.4.	CHANNEL LIST	10
	5.5.	TEST CHANNEL CONFIGURATION	10
	5.6.	THE WORSE CASE POWER SETTING PARAMETER	10
	5.7.	DESCRIPTION OF AVAILABLE ANTENNAS	11
	5.8.	WORST-CASE CONFIGURATIONS	11
	5.9.	TEST ENVIRONMENT	11
	5.10.	DESCRIPTION OF TEST SETUP	12
	5.11.	. MEASURING INSTRUMENT AND SOFTWARE USED	13
6.	AN	NTENNA PORT TEST RESULTS	14
	6.1.	ON TIME AND DUTY CYCLE	14
	6.2.	20 dB BANDWIDTH AND 99% BANDWIDTH	
	_	2.1. GFSK MODE	
	6.3.	PEAK CONDUCTED OUTPUT POWER	_
		3.1. GFSK MODE	
	6.3	3.2. ∏/4-DQPSK	25
	6.4.	CARRIER HOPPING CHANNEL SEPARATION	
		4.1. GFSK MODE	
	6.5.	NUMBER OF HOPPING FREQUENCY	
	6.5	5.1. GFSK MODE	30
		5.2. ∏/4-DQPSK	
	6.6. 6.6	TIME OF OCCUPANCY (DWELL TIME)	
	0.0		50



Page 5 of 95

6.6.2.	∏/4-DQPSK	36
6.7. C 6.7.1. 6.7.2.		39
7. RADIA	ATED TEST RESULTS	47
7.1. L	.IMITS AND PROCEDURE	47
7.2. R 7.2.1. 7.2.2.	0.000	52
7.3. S 7.3.1. 7.3.2.		60
7.4. S 7.4.1. 7.4.2.	0. 0.0.002	72
7.5. S 7.5.1.	SPURIOUS EMISSIONS 18G ~ 26GHz	
7.6. S 7.6.1.	SPURIOUS EMISSIONS 30M ~ 1 GHz ∏/4-DQPSK	
7.7. S 7.7.1.	SPURIOUS EMISSIONS BELOW 30M II/4-DQPSK	
8. AC PC	OWER LINE CONDUCTED EMISSIONS	92
8.1.1.	GFSK MODE	93
O ANITE	INNA DECUIDEMENTS	0.5



Page 6 of 95

1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: ZHONG SHAN CITY LI TAI ELECTRONIC INDUSTRIAL

CO.,LTD

Address: 3rd Industrial District, Wuguishan, ZhongShan City, Guangdong,

China

Manufacturer Information

Company Name: ZHONG SHAN CITY LI TAI ELECTRONIC INDUSTRIAL

CO.,LTD

Address: 3rd Industrial District, Wuguishan, ZhongShan City, Guangdong,

China

EUT Description

Product Name Bluetooth Speaker

Model Name Jamstack
Sample Status Normal
Sample ID 1668095
Sample Received date June 26, 2018

Date Tested July 01, 2018 ~ July 30, 2018

APPLICABLE STANDARDS					
STANDARD	TEST RESULTS				
FCC Part 15 Subpart C	PASS				
ISED RSS-247 Issue 2	PASS				
ISED RSS-GEN Issue 5	PASS				

Tested By:

Checked By:

hemmy les

Denny Huang

Engineer Project Associate

Approved By:

Shawn Wen Laboratory Leader

Stephen Guo

Laboratory Manager



Page 7 of 95

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with DA 00-705, KDB414788 D01 Radiated Test Site v01, ANSI C63.10-2013, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 5, and RSS-247 Issue 2.

3. FACILITIES AND ACCREDITATION

	A2LA (Certificate No.: 4102.01)
	UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch.
	has been assessed and proved to be in compliance with A2LA.
	IAS (Lab Code: TL-702)
	UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch.
	has demonstrated compliance with ISO/IEC Standard 17025:2005,
	General requirements for the competence of testing and calibration
	laboratories
	FCC (FCC Designation No.: CN1187)
	UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch.
	Has been recognized to perform compliance testing on equipment subject
Accreditation	to the Commission's Delcaration of Conformity (DoC) and Certification
Certificate	rules
	IC(Company No.: 21320)
	UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch.
	has been registered and fully described in a report filed with ISED. The
	Company Number is 21320.
	VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011)
	UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch.
	has been assessed and proved to be in compliance with VCCI, the
	Membership No. is 3793.
	Facility Name:
	Chamber D, the VCCI registration No. is G-20019 and R-20004
	Shielding Room B, the VCCI registration No. is C-20012 and T-20011

Note:

- 1. All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China
- 2. The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.
- 3. For below 30MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30MHz had been correlated to measurements performed on an OATS.



Page 8 of 95

4. CALIBRATION AND UNCERTAINTY

4.1. **MEASURING INSTRUMENT CALIBRATION**

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. **MEASUREMENT UNCERTAINTY**

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty	
Uncertainty for Conduction emission test	2.90dB	
Uncertainty for Radiation Emission test(include Fundamental emission) (9KHz-30MHz)	2.2dB	
Uncertainty for Radiation Emission test(include Fundamental emission) (30MHz-1GHz)	4.52dB	
Uncertainty for Radiation Emission test	5.04dB(1-6GHz)	
(1GHz to 26GHz)(include Fundamental	5.30dB (6GHz-18Gz)	
emission)	5.23dB (18GHz-26Gz)	

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



Page 9 of 95

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name	Bluetooth Speaker				
Model	Jamstack				
	Operation Frequency 2402 MH		z ~ 2480 MHz		
Product	Modulation Type		Data Rate		
Description (Bluetooth)	GFSK		1Mbps		
()	∏/4-DQPSK		2Mbps		
	Power Adapter	Input		Output	
Power Supply		AC 100~240V, 50/60Hz, 500mA max.		DC 9V, 2000mA	
	Battery	DC 7.4V, 2600mAh			
Bluetooth Version	BT4.2+EDR	,			

5.2. MAXIMUM OUTPUT POWER

Bluetooth Mode	Frequency	Channel Number	Max Output Power	EIRP
Diuelootti ivioue	(MHz)	Chamile Number	(dBm)	(dBm)
GFSK	2402-2480	0-78[79]	-4.380	-4.960
∏/4-DQPSK	2402-2480	0-78[79]	-3.172	-3.752

5.3. PACKET TYPE CONFIGURATION

Test Mode	Packet Type	Setting(Packet Length)	
	DH1	27	
GFSK	DH3	183	
	DH5	339	
	2-DH1	54	
∏/4-DQPSK	2-DH3	367	
	2-DH5	679	



Page 10 of 95

5.4. CHANNEL LIST

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	20	2422	40	2442	60	2462
01	2403	21	2423	41	2443	61	2463
02	2404	22	2424	42	2444	62	2464
03	2405	23	2425	43	2445	63	2465
04	2406	24	2426	44	2446	64	2466
05	2407	25	2427	45	2447	65	2467
06	2408	26	2428	46	2448	66	2468
07	2409	27	2429	47	2449	67	2469
08	2410	28	2430	48	2450	68	2470
09	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461	\	\

5.5. TEST CHANNEL CONFIGURATION

Test Mode	Test Channel Number	Test Channel	
GFSK	CH 00, CH 39, CH 78	Low, Middle, High	
∏/4-DQPSK	CH 00, CH 39, CH 78	Low, Middle, High	

5.6. THE WORSE CASE POWER SETTING PARAMETER

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band						
Test So	oftware	FCCAssist.exe				
Modulation Type	Transmit Antenna Number	Test Channel				
Modulation Type		CH 00	CH 39	CH 78		
GFSK	1	10	10	10		
∏/4-DQPSK 1		10	10	10		



Page 11 of 95

5.7. DESCRIPTION OF AVAILABLE ANTENNAS

Ant.	Frequency (MHz)	Antenna Type	Antenna Gain (dBi)
1	2402-2480	PCB antenna	-0.58

Test Mode	Transmit and Receive Mode	Description
GFSK	1TX, 1RX	Chain 1 can be used as transmitting/receiving antenna.
∏/4-DQPSK	1TX, 1RX	Chain 1 can be used as transmitting/receiving antenna.

5.8. WORST-CASE CONFIGURATIONS

Bluetooth Mode	Modulation Technology	Modulation Type	Data Rate (Mbps)
BR	FHSS	GFSK	1Mbit/s
EDR	FHSS	∏/4-DQPSK	2Mbit/s

Note: Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates.

5.9. TEST ENVIRONMENT

Environment Parameter	Selected Values During Tests		
Relative Humidity	55 ~ 65%		
Atmospheric Pressure:	1025Pa		
Temperature	TN	23 ~ 28 °C	
	VL	N/A	
Voltage :	VN	AC 120V 60Hz	
	VH	N/A	

Note: VL= Lower Extreme Test Voltage

VN= Nominal Voltage.

VH= Upper Extreme Test Voltage

TN= Normal Temperature

Page 12 of 95

5.10. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	P/N
1	PC	Dell	Vostro 3902	8KNDDB2
2	USB TO UART	N/A	N/A	N/A

I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	DC in	DC	Unshielded	2.0	/


ACCESSORY

Item	Accessory	Brand Name	Model Name	Description
1	AC-DC Switching Adapter	1	SW0902000-NM	Input: AC 100~240V, 50/60Hz, 500mA max. Output: DC 9V, 2000mA

TEST SETUP

The EUT can work in an engineer mode with a software through a PC.

SETUP DIAGRAM FOR TESTS

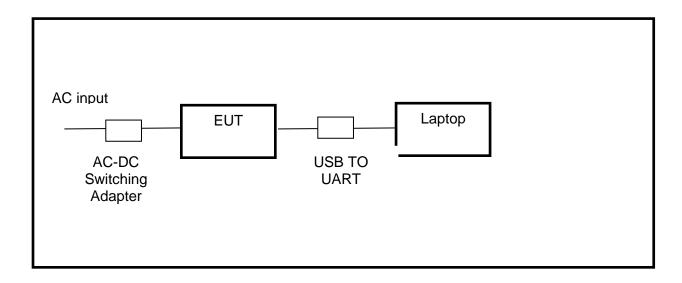

Page 12 of 95



Page 13 of 95

5.11. MEASURING INSTRUMENT AND SOFTWARE USED

0.	Conducted Emissions								
	Instrument								
Used	Equipment	Manufacturer	Model		Serial No.	Upper Last Cal.	Last Cal.	Next Cal.	
V	EMI Test Receiver	R&S	ESR	3	101961	Dec.20, 2016	Dec.12, 2017	Dec.11, 2018	
V	Two-Line V-Network	R&S	ENV2	16	101983	Dec.20, 2016	Dec.12, 2017	Dec.11, 2018	
V	Artificial Mains Networks	Schwarzbeck	NSLK 8	126	8126465	Feb.10, 2017	Dec.12, 2017	Dec.11, 2018	
				Softw	/are				
Used	Des	scription			Manufacturer	Name	Ver	sion	
V	Test Software for	Conducted distu	rbance		Farad	EZ-EMC	Ver. U	IL-3A1	
			Radia	ted E	missions				
			lı	nstrui	ment				
Used	Equipment	Manufacturer	Model	No.	Serial No.	Upper Last Cal.	Last Cal.	Next Cal.	
V	MXE EMI Receiver	KESIGHT	N9038A		MY5640003 6	Feb. 24, 2017	Dec.12, 2017	Dec.11, 2018	
V	Hybrid Log Periodic Antenna	TDK	HLP-30	03C	130960	Jan.09, 2016	Jan.09, 2016	Jan.09, 2019	
V	Preamplifier	HP	8447	D	2944A09099	Feb. 13, 2017	Dec.12, 2017	Dec.11, 2018	
V	EMI Measurement Receiver	R&S	ESR2	26	101377	Dec. 20, 2016	Dec.12, 2017	Dec.11, 2018	
V	Horn Antenna	TDK	HRN-0	118	130939	Jan. 09, 2016	Jan. 09, 2016	Jan. 09, 2019	
	High Gain Horn Antenna	Schwarzbeck	BBHA-9	170	691	Jan.06, 2016	Jan.06, 2016	Jan.06, 2019	
V	Preamplifier	TDK	PA-02-0)118	TRS-305- 00066	Jan. 14, 2017	Dec.12, 2017	Dec.11, 2018	
V	Preamplifier	TDK	PA-02	2-2	TRS-307- 00003	Dec. 20, 2016	Dec.12, 2017	Dec.11, 2018	
V	Loop antenna	Schwarzbeck	1519	В	80000	Mar. 26, 2016	Mar. 26, 2016	Mar. 26, 2019	
				Softw	/are				
Used	Desci	ription		Ma	nufacturer Name Version		sion		
V	Test Software for R	adiated disturba	nce		Farad	EZ-EMC	Ver. U	L-3A1	
			Othe	r inst	ruments				
Used	Equipment	Manufacturer	Model	No.	Serial No.	Upper Last Cal.	Last Cal.	Next Cal.	
V	Spectrum Analyzer	Keysight	N9030	DA_	MY5541051 2	Dec. 20, 2016	Dec.12, 2017	Dec.11, 2018	
V	Power Meter	Keysight	N903 ²	1A	MY5541602 4	Feb. 13, 2017	Dec.12, 2017	Dec.11, 2018	
V	Power Sensor	Keysight	N9323	3A	MY5544001 3	Feb. 13, 2017	Dec.12, 2017	Dec.11, 2018	



Page 14 of 95

6. ANTENNA PORT TEST RESULTS

6.1. ON TIME AND DUTY CYCLE


LIMITS

None; for reporting purposes only

PROCEDURE

KDB 558074 Zero-Span Spectrum Analyzer Method

TEST SETUP



RESULTS


Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (db)	1/T Minimum VBW (KHz)
GFSK	2.920	3.747	0.779	77.9	1.085	0.342
∏/4-DQPSK	2.915	3.749	0.778	77.8	1.090	0.343


Note: Duty Cycle Correction Factor= $10\log(1/x)$.

Where: x is Duty Cycle(Linear)

Where: T is On Time (transmit duration)



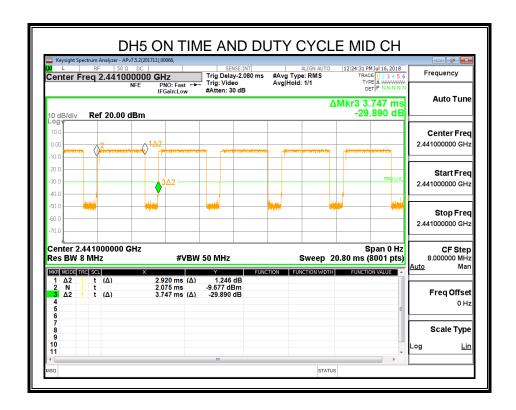

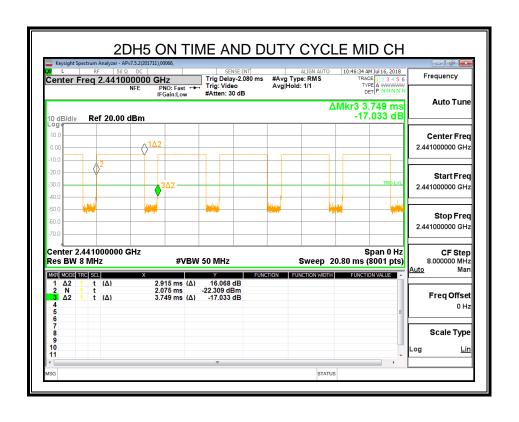

REPORT NO.: 4788512235.3-3 Page 16 of 95

6.2. 20 dB BANDWIDTH AND 99% BANDWIDTH

LIMITS

FCC Part15 (15.247) Subpart C RSS-247 ISSUE 2						
Section Test Item Limit Frequency Range (MHz)						
FCC 15.247 (a) (1) RSS-247 Clause 5.1 (a)	20dB Bandwidth	N/A	2400-2483.5			
RSS-Gen Clause 6.6	99% Bandwidth	N/A	2400-2483.5			


TEST PROCEDURE

Connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The centre frequency of the channel under test
Detector	Peak
RRW	For 20dB Bandwidth:1% of the 20 dB bandwidth For 99% Bandwidth: 1% to 5% of the occupied bandwidth
VBW	For 20dB Bandwidth: ≥ RBW For 99% Bandwidth: approximately 3×RBW
Span	approximately 2 to 3 times the 20 dB bandwidth
Trace	Max hold
Sweep	Auto couple

Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

TEST SETUP






RESULTS


6.2.1. GFSK MODE


Channel	Frequency (MHz)	20dB bandwidth (MHz)	99% bandwidth (MHz)	Result
Low	2402	0.910	0.819	PASS
Middle	2441	0.920	0.825	PASS
High	2480	0.920	0.820	PASS

Test Graph

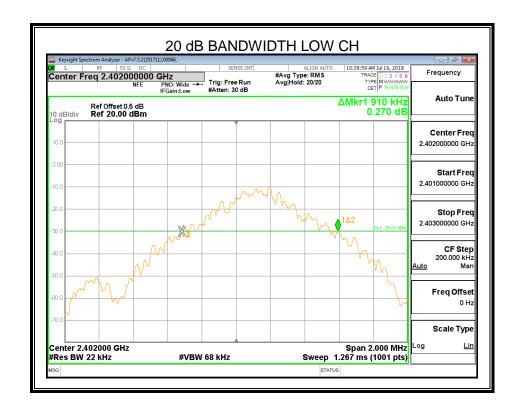





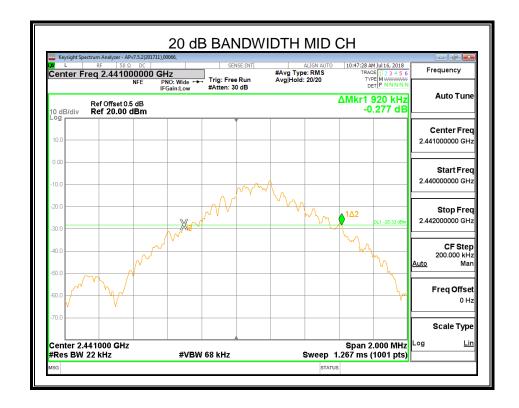

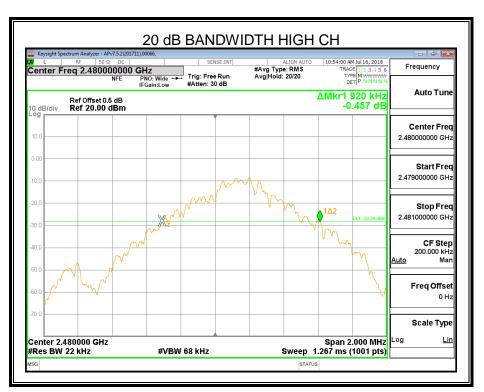




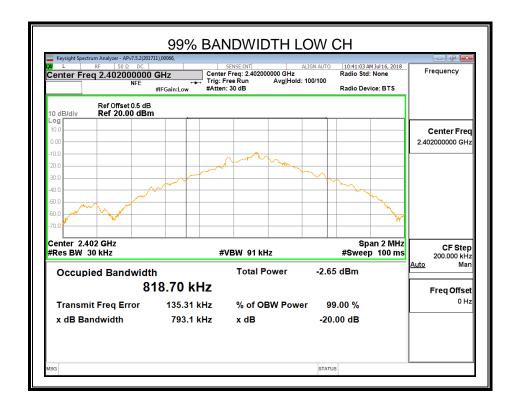

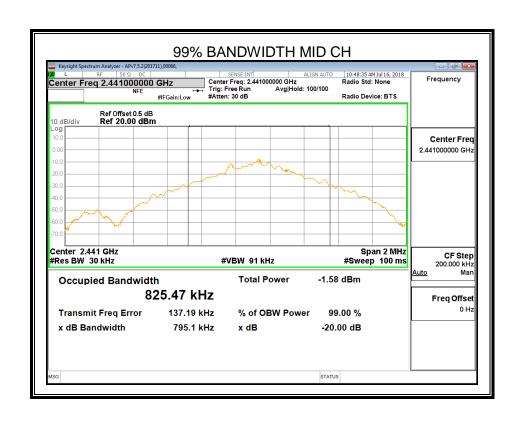




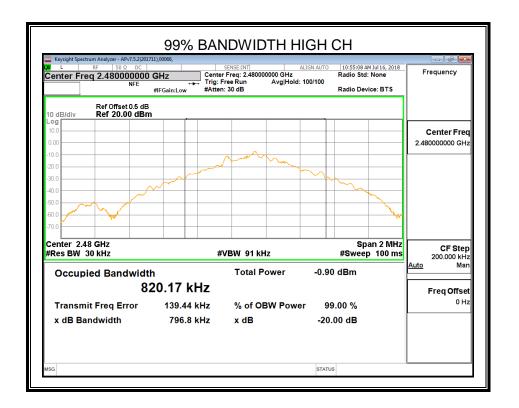


6.2.2. **∏/4-DQPSK**


Channel	Frequency (MHz)	20dB bandwidth (MHz)	99% bandwidth (MHz)	Result
Low	2402	1.194	1.1607	PASS
Middle	2441	1.346	1.1605	PASS
High	2480	1.276	1.1607	PASS




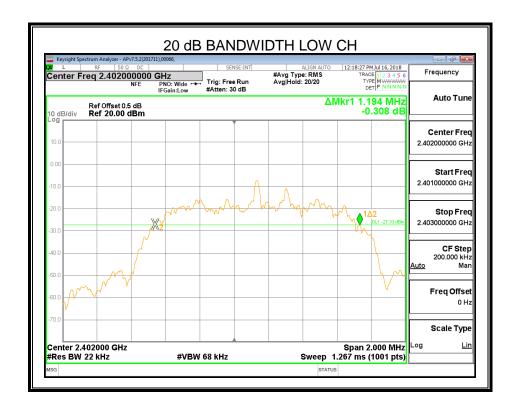

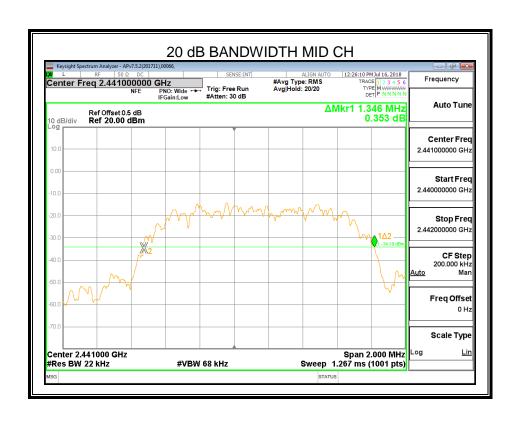





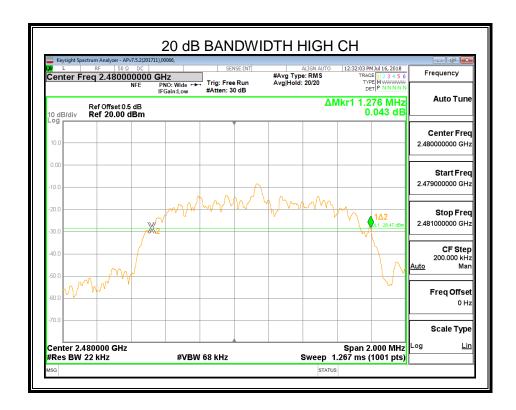

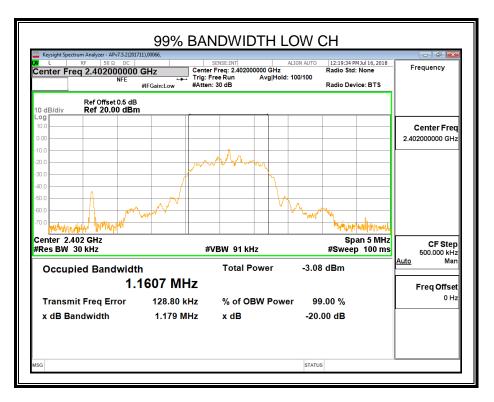



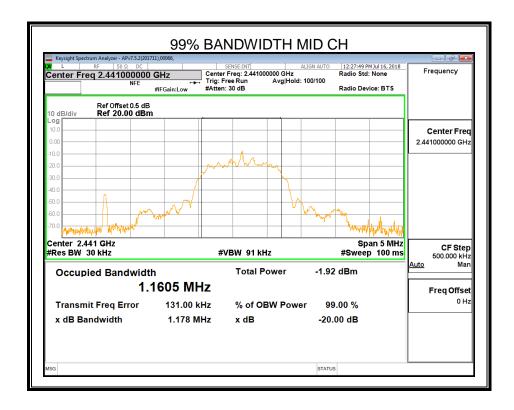

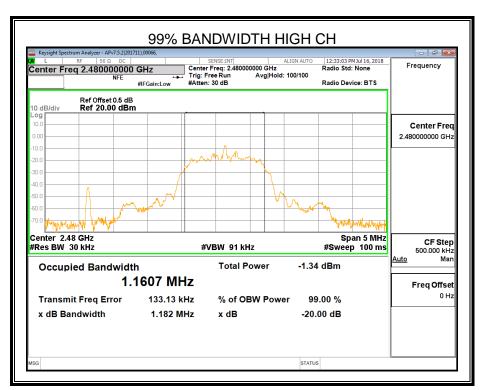

Page 24 of 95

6.3. PEAK CONDUCTED OUTPUT POWER

LIMITS

FCC Part15 (15.247) , Subpart C RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.247 (b) (1) RSS-247 Clause 5.4 (b)	Peak Conducted Output Power	1 watt or 30dBm	2400-2483.5


TEST PROCEDURE

Place the EUT on the table and set it in the transmitting mode.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Power sensor.

Measure peak power each channel.

TEST SETUP





RESULTS

6.3.1. GFSK MODE

Channel	Frequency	Maximum Conducted Output Power(PK)	Maximum Conducted Output Power(AVG)	PK EIRP	Result
	(MHz)	(dBm)	(dBm)	(dBm)	
Low	2402	-6.068	-7.16	-6.648	Pass
Middle	2441	-5.052	-6.18	-5.632	Pass
High	2480	-4.380	-5.61	-4.960	Pass

6.3.2. **□/4-DQPSK**

Channel	Frequency	Maximum Conducted Output Power(PK)	Maximum Conducted Output Power(AVG)	PK EIRP	Result
	(MHz)	(dBm)	(dBm)	(dBm)	
Low	2402	-4.586	-8.33	-5.166	Pass
Middle	2441	-3.853	-7.51	-4.433	Pass
High	2480	-3.172	-6.73	-3.752	Pass

REPORT NO.: 4788512235.3-3 Page 26 of 95

6.4. CARRIER HOPPING CHANNEL SEPARATION

LIMITS

FCC Part15 (15.247) , Subpart C RSS-247 ISSUE 2				
Section Test Item Limit Frequency Rang (MHz)				
FCC 15.247 (a) (1) RSS-247 Clause 5.1 (b)	Carrier Hopping Channel Separation	25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.	2400-2483.5	

TEST PROCEDURE

Connect the UUT to the spectrum Analyzer and use the following settings:


Center Frequency	The center frequency of the channel under test
Span	wide enough to capture the peaks of two adjacent channels
Detector	Peak
RBW	Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
VBW	≥RBW
Trace	Max hold
Sweep time	Auto couple

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

Compliance of an EUT with the appropriate regulatory limit shall be determined.

A plot of the data shall be included in the test report.

TEST SETUP






RESULTS

6.4.1. GFSK MODE

Channel	Carrier Hopping Channel Separation (MHz)	Limit (MHz)	Result
Middle	1.0	≥ two-thirds of the 20 dB Bandwidth Of The Hopping Channel	PASS

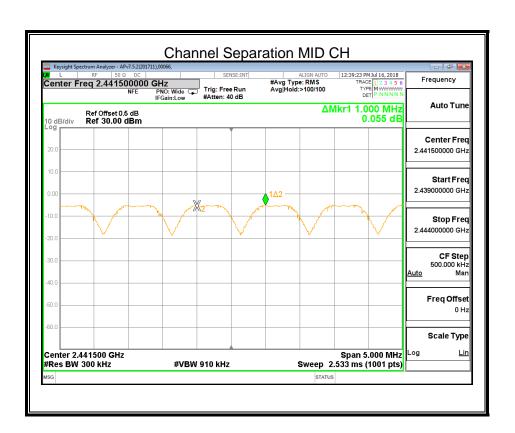


Note: For 20 dB Bandwidth of The Hopping Channel, please refer to clause 6.1.1.



6.4.2. **□/4-DQPSK**

Channel	Carrier Hopping Channel Separation (MHz)	Limit (MHz)	Result
Middle	1.0	≥ two-thirds of the 20 dB Bandwidth Of The Hopping Channel	PASS

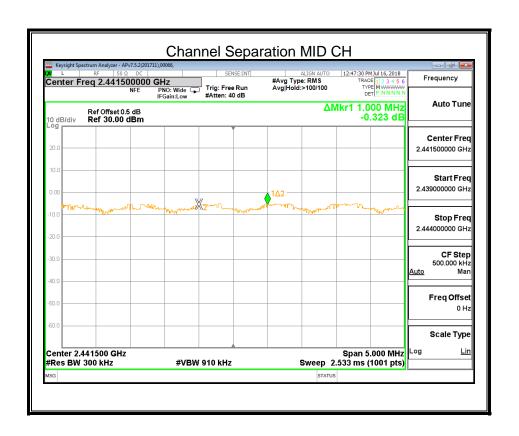

Note: For 20 dB Bandwidth of The Hopping Channel, please refer to clause 6.1.2.

Page 29 of 95

NUMBER OF HOPPING FREQUENCY

LIMITS

FCC Part15 (15.247) , Subpart C RSS-247 ISSUE 2			
Section Test Item Limit			
15.247 (a) (1) III RSS-247 Clause 5.1 (d)	Number of Hopping Frequency	at least 15 hopping channels	

TEST PROCEDURE

Connect the EUT to the spectrum Analyzer and use the following settings:


Detector	Peak
RBW	To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
VBW	≥RBW
Span	The frequency band of operation
Trace	Max hold
Sweep time	Auto couple

Set EUT to transmit maximum output power and switch on frequency hopping function. then set enough count time (larger than 5000 times) to get all the hopping frequency channel displayed on the screen of spectrum analyzer.

Count the quantity of peaks to get the number of hopping channels.

Normal Mode: 79 Channels observed. AFH Mode: 20 Channels declared.

TEST SETUP





RESULTS



6.5.1. GFSK MODE

Hopping numbers	Limit	Results
79	>15	Pass

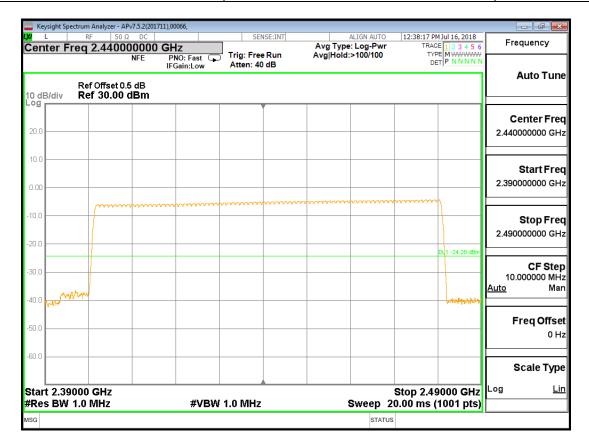






6.5.2. **□/4-DQPSK**

Hopping numbers	Limit	Results
79	>15	Pass

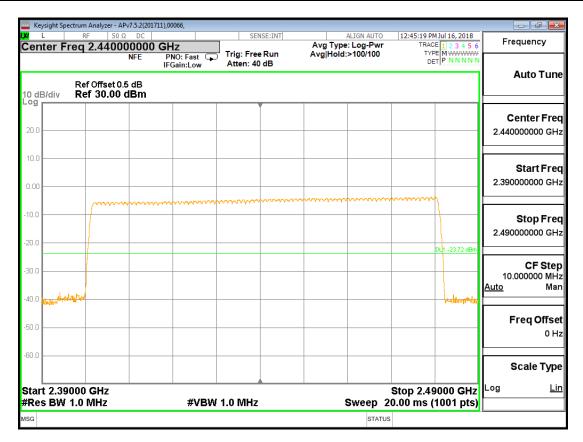

Page 32 of 95

TIME OF OCCUPANCY (DWELL TIME)

LIMITS

FCC Part15 (15.247) , Subpart C RSS-247 ISSUE 2						
Section	Test Item	Limit				
15.247 (a) (1) III RSS-247 Clause 5.1 (d)	Time of Occupancy (Dwell Time)	The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed.				

TEST PROCEDURE

Connect the UUT to the spectrum Analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	1 MHz
VBW	≥RBW
Span	zero span
Trace	Max hold
Sweep time	As necessary to capture the entire dwell time per hopping channel

- a. The transmitter output (antenna port) was connected to the spectrum analyzer
- b. Set RBW of spectrum analyzer to 1MHz and VBW to 1MHz.
- c. Use a video trigger with the trigger level set to enable triggering only on full pulses.
- d. Sweep Time is more than once pulse time.
- e. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- f. Measure the maximum time duration of one single pulse.
- g. Set the EUT for DH5, DH3 and DH1 packet transmitting.
- h. Measure the maximum time duration of one single pulse.

A Period Time = (channel number)*0.4

For Normal Mode (79 Channel):

DH1 Time Slot: Reading * (1600/2)*31.6/(channel number)

DH3 Time Slot: Reading * (1600/4)*31.6/(channel number)

DH5 Time Slot: Reading * (1600/6)*31.6/(channel number)


For AFH Mode (20 Channel):

DH1 Time Slot: Reading * (1600/2)*8/(channel number) DH3 Time Slot: Reading * (1600/4)*8/(channel number)

DH5 Time Slot: Reading * (1600/6)*8/(channel number)



TEST SETUP




RESULTS


6.6.1. GFSK MODE

Normal Mode						
Packet	Channel	Burst Width [ms/hop/ch]	Dwell Time [ms]	Duty Cycle [%]	Results	
DH1	MCH	0.400	0.128	32.2	PASS	
DH3	MCH	1.680	0.269	66.7	PASS	
DH5	MCH	2.910	0.310	77.3	PASS	
AFH Mode						
DH1	MCH	0.400	0.032	32.2	PASS	
DH3	MCH	1.680	0.068	66.7	PASS	
DH5	MCH	2.910	0.079	77.3	PASS	


Test Graph



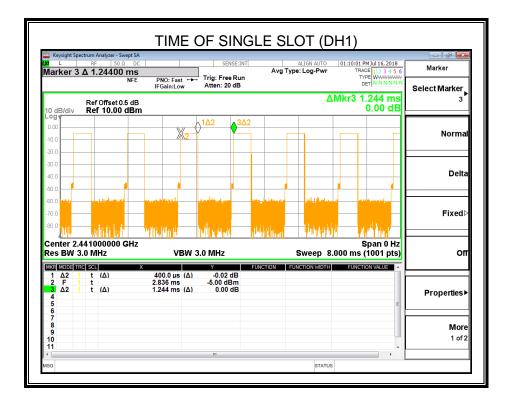

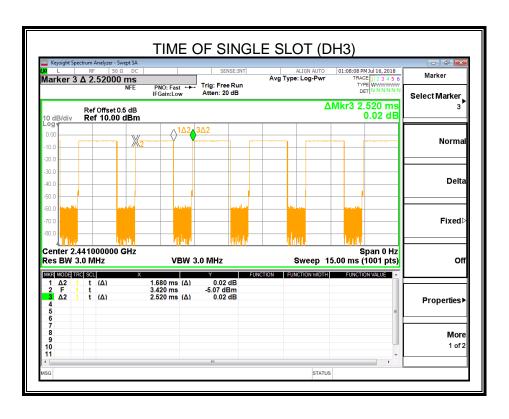



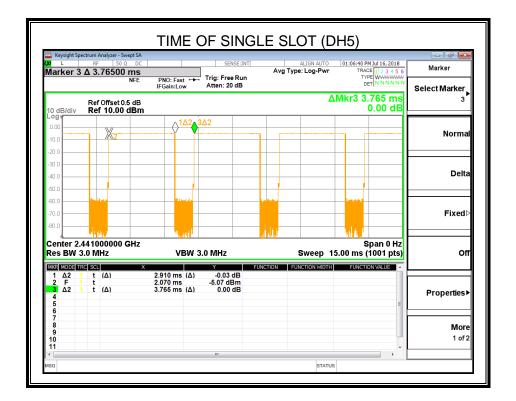





6.6.2. **□/4-DQPSK**


Normal Mode						
Packet	Channel	Burst Width [ms/hop/ch]	Dwell Time [ms]	Duty Cycle [%]	Results	
2DH1	MCH	0.416	0.133	33.4	PASS	
2DH3	MCH	1.680	0.269	66.5	PASS	
2DH5	MCH	2.895	0.309	77.4	PASS	
AFH Mode						
2DH1	MCH	0.416	0.034	33.4	PASS	
2DH3	MCH	1.680	0.068	66.5	PASS	
2DH5	MCH	2.895	0.078	77.4	PASS	

Test Graph

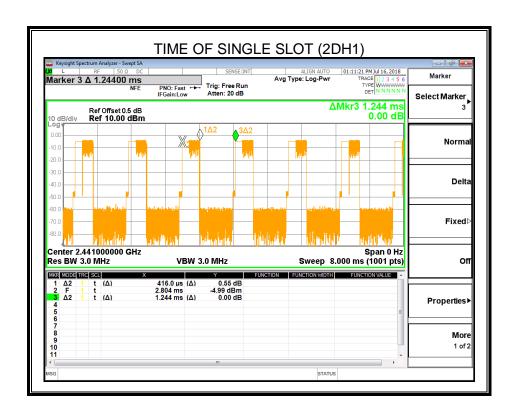



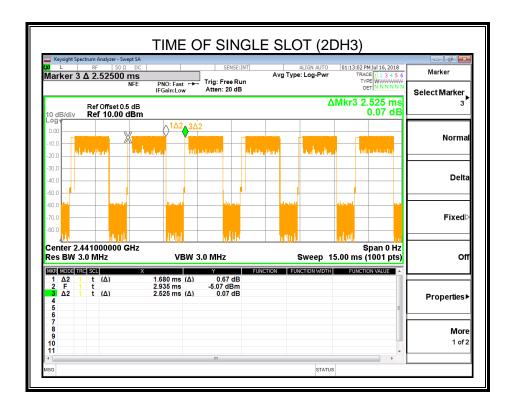

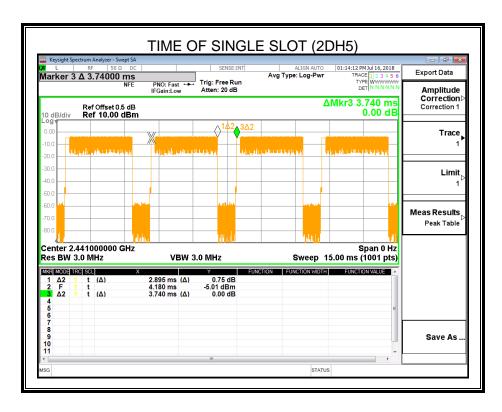



6.7. CONDUCTED SPURIOUS EMISSION

LIMITS

FCC Part15 (15.247) , Subpart C RSS-247 ISSUE 2						
Section Test Item Limit						
FCC §15.247 (d) RSS-247 5.5	Conducted Spurious Emission	at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power				

TEST PROCEDURE

Please refer to the ANSI C63.10 section 6.10.

For Bandedge use the following settings:


Detector	Peak
RBW	100KHz
VBW	300KHz
Span	wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation
Trace	Max hold
Sweep time	Couple

For Spurious Emission use the following settings:

Detector	Peak
RBW	100KHz
VBW	300KHz
Span	Wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
Trace	Max hold
Sweep time	Couple

Use the peak marker function to determine the maximum amplitude level.

TEST SETUP




Page 38 of 95




RESULTS

6.7.1. GFSK MODE


SPURIOUS EMISSIONS, LOW CHANNEL

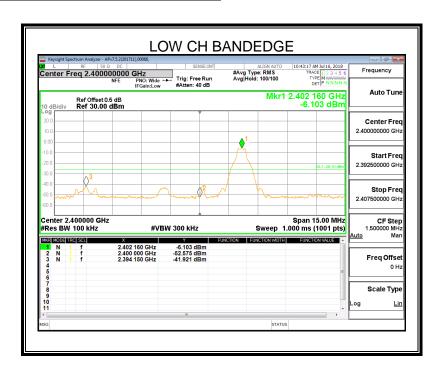


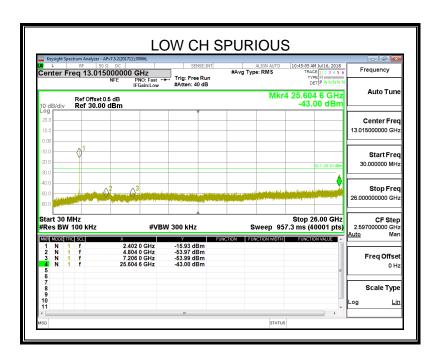




SPURIOUS EMISSIONS, MID CHANNEL

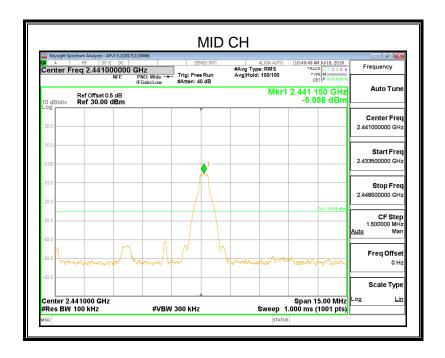


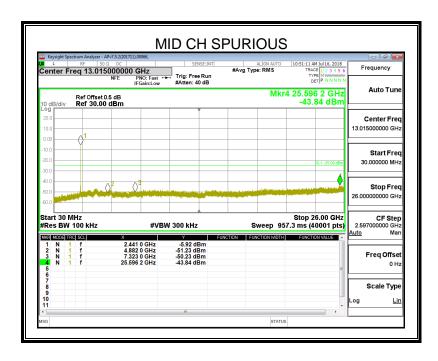




SPURIOUS EMISSIONS, HIGH CHANNEL

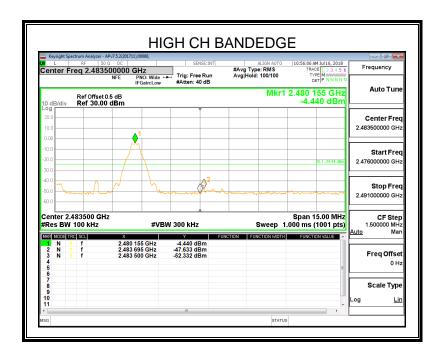


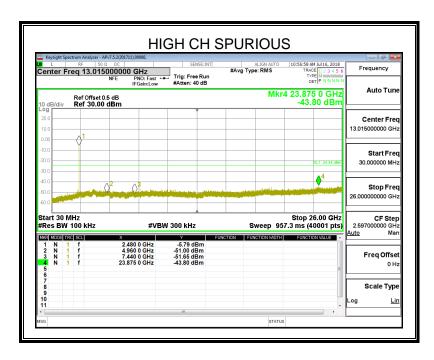



SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

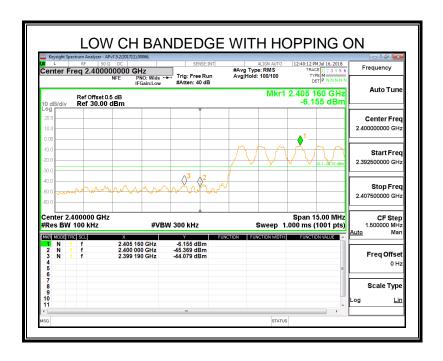


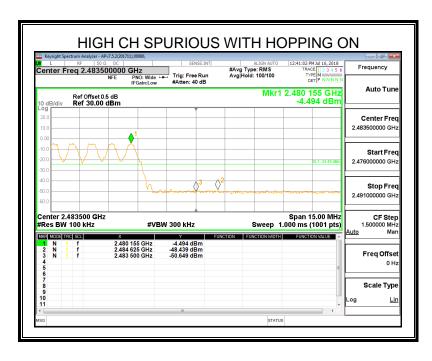




6.7.2. **□/4-DQPSK**


SPURIOUS EMISSIONS, LOW CHANNEL

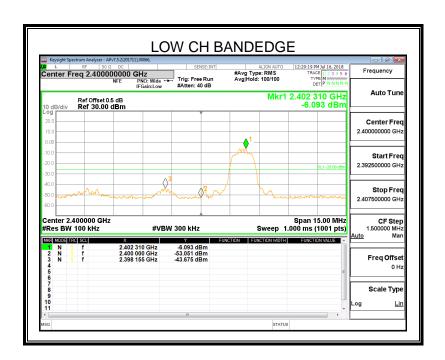


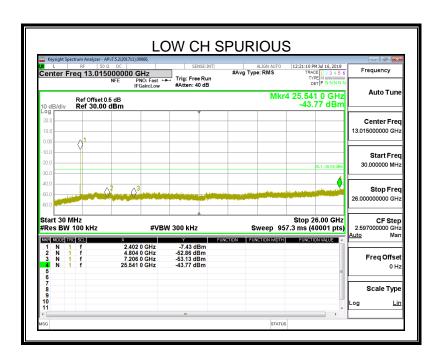




SPURIOUS EMISSIONS, MID CHANNEL

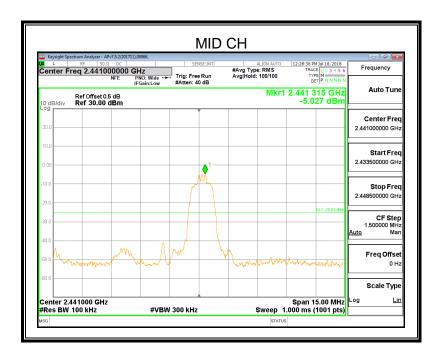


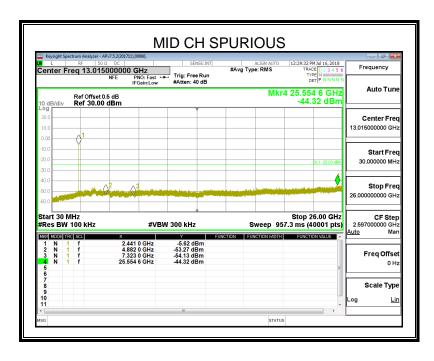




SPURIOUS EMISSIONS, HIGH CHANNEL

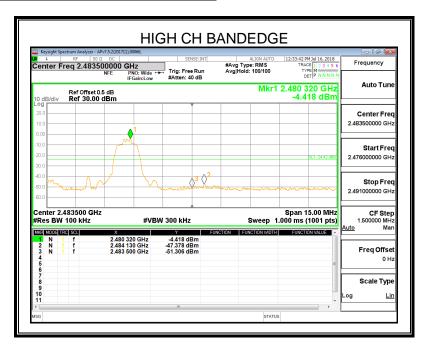


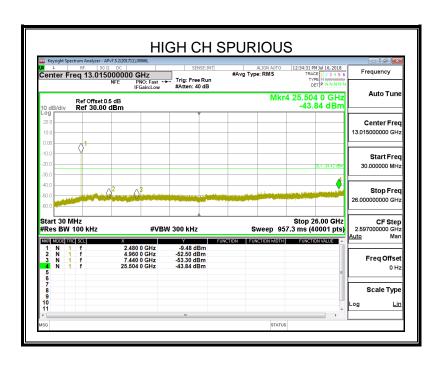



SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

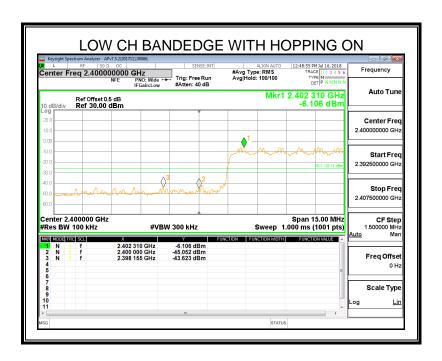

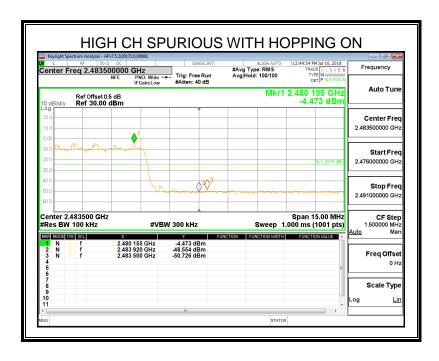



REPORT NO.: 4788512235.3-3

Page 47 of 95

7. RADIATED TEST RESULTS

7.1. LIMITS AND PROCEDURE

LIMITS

Please refer to FCC §15.205 and §15.209

Please refer to RSS-GEN Clause 8.9 and Clause 8.10

Radiation Disturbance Test Limit for FCC (Class B)(9KHz-1GHz)

Frequency	Field Strength	Measurement Distance
(MHz)	(microvolts/meter)	(meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Note: 1) At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

(2) At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). This paragraph (f) shall not apply to Access BPL devices operating below 30 MHz.



REPORT NO.: 4788512235.3-3

Page 48 of 95

Radiation Disturbance Test Limit for FCC (Above 1G)

Frequency (MHz)	dB(uV/m) (at 3 meters)		
Frequency (Miriz)	Peak	Average	
Above 1000	74	54	


Restricted bands of operation

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: 1 Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz. 2 Above 38.6c



TEST SETUP AND PROCEDURE Below 30MHz

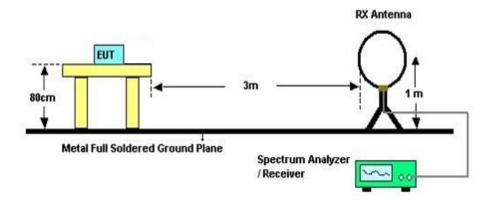


The setting of the spectrum Analyzer

RBW	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)
VBW	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)
Sweep	Auto
Trace	Max hold

- 1. The testing follows the guidelines in ANSI C63.10-2013 and 414788 D01 Radiated Test Site v01.
- 2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 3. The EUT was placed on a turntable with 80cm meter above ground.
- 4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
- 5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.
- 6. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
- 7. Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30m open are test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.



Below 1G and above 30MHz

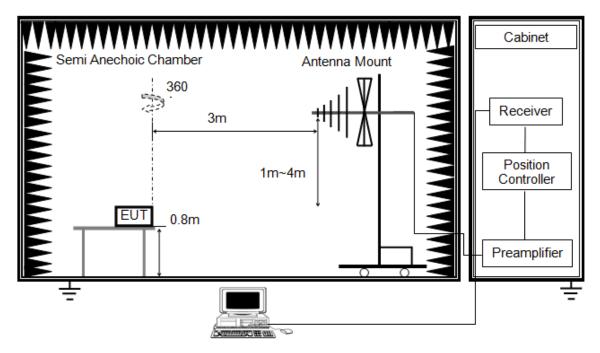


The setting of the spectrum Analyzer

RBW	120K
VBW	300K
Sweep	Auto
Trace	Max hold

- 1. The testing follows the guidelines in ANSI C63.10-2013.
- 2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 3. The EUT was placed on a turntable with 80cm above ground.
- 4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
- 5. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.



Above 1G

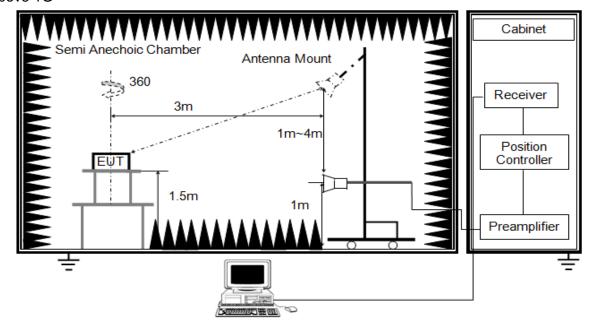


RBW	1M
VBW	PEAK: 3M AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

- 1. The testing follows the guidelines in ANSI C63.10-2013.
- 2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 3. The EUT was placed on a turntable with 80cm above ground.
- 4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
- 5. For measurement above 1GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
- 6. For average power measurement, set the Detector to RMS, the detector and averaging type may be set for linear voltage averaging, while maintaining all of the other instrument settings, if the duty cycle of the EUT is less than 98%, the Duty Cycle Correction Factor shall be added to the measured emission levels. For the Duty Cycle and Correction Factor please refer to clause 7.1.ON TIME AND DUTY CYCLE.



X axis, Y axis, Z axis positions:




Note: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

7.2. RESTRICTED BANDEDGE

7.2.1. GFSK MODE

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

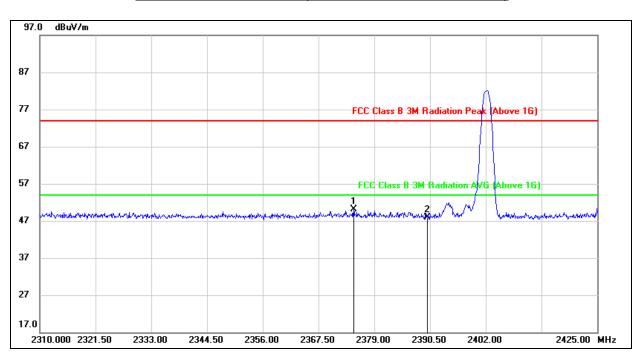

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2374.745	16.77	33.25	50.02	74.00	-23.98	peak
2	2390.000	14.69	33.14	47.83	74.00	-26.17	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. Only the worst case emission recorded in the report, if Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.



REPORT NO.: 4788512235.3-3 Page 53 of 95

RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

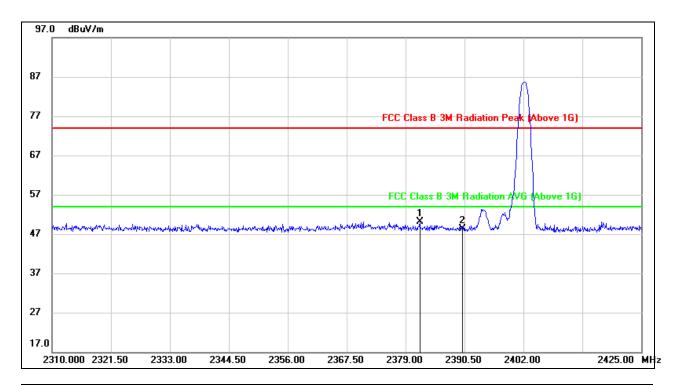

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2381.760	16.85	33.31	50.16	74.00	-23.84	peak
2	2390.000	15.03	33.24	48.27	74.00	-25.73	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. Only the worst case emission recorded in the report, if Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Peak: Peak detector.

.



REPORT NO.: 4788512235.3-3 Page 54 of 95

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

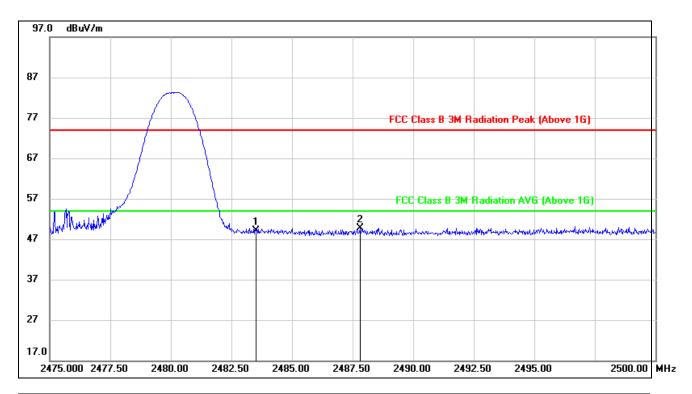


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.500	16.38	32.78	49.16	74.00	-24.84	peak
2	2487.800	16.97	32.78	49.75	74.00	-24.25	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. Only the worst case emission recorded in the report, if Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.



RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

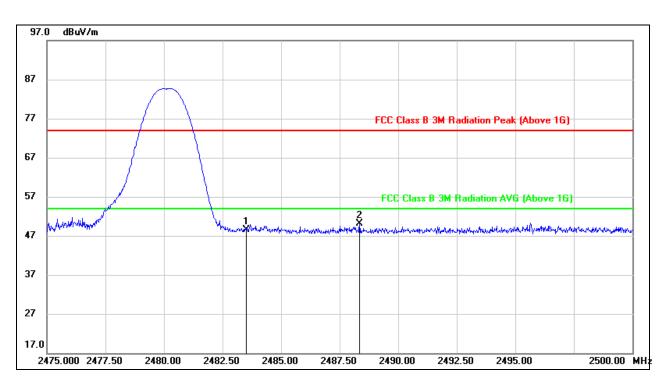

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.500	15.60	32.88	48.48	74.00	-25.52	peak
2	2488.350	17.16	32.88	50.04	74.00	-23.96	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. Only the worst case emission recorded in the report, if Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.



7.2.2. **□/4-DQPSK**


RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

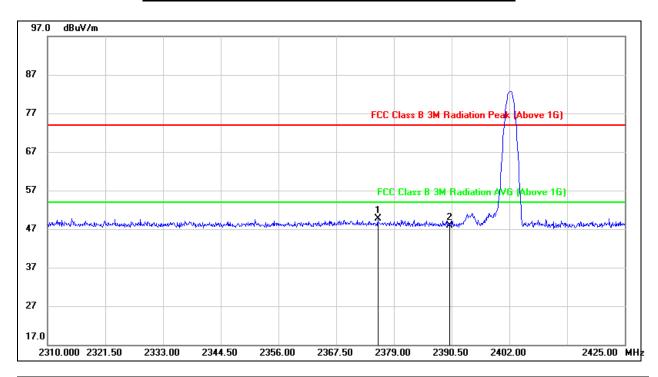

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2375.780	16.48	33.24	49.72	74.00	-24.28	peak
2	2390.000	14.85	33.14	47.99	74.00	-26.01	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. Only the worst case emission recorded in the report, if Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.





RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

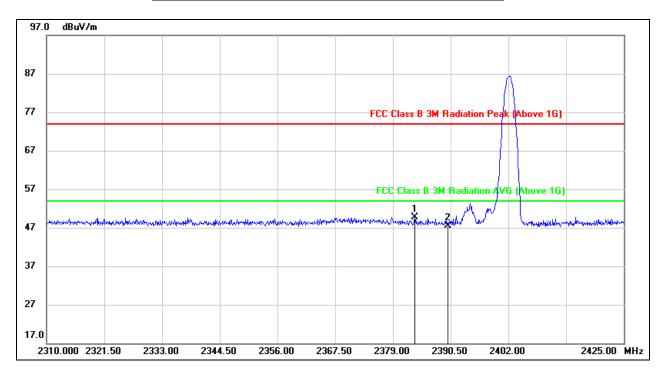

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2383.370	16.40	33.29	49.69	74.00	-24.31	peak
2	2390.000	14.30	33.24	47.54	74.00	-26.46	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. Only the worst case emission recorded in the report, if Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.



Page 58 of 95


RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

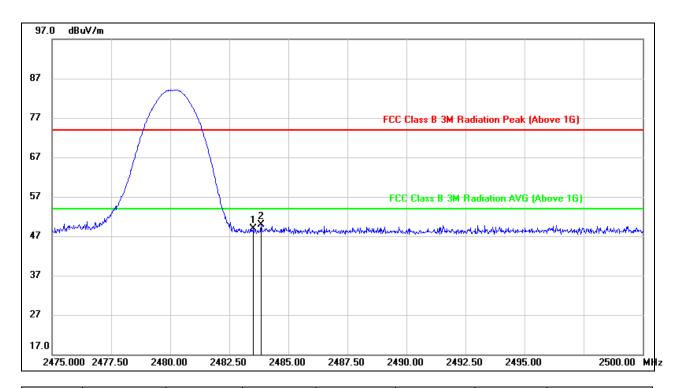

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.500	16.07	32.78	48.85	74.00	-25.15	peak
2	2483.850	17.07	32.78	49.85	74.00	-24.15	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. Only the worst case emission recorded in the report, if Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.






RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

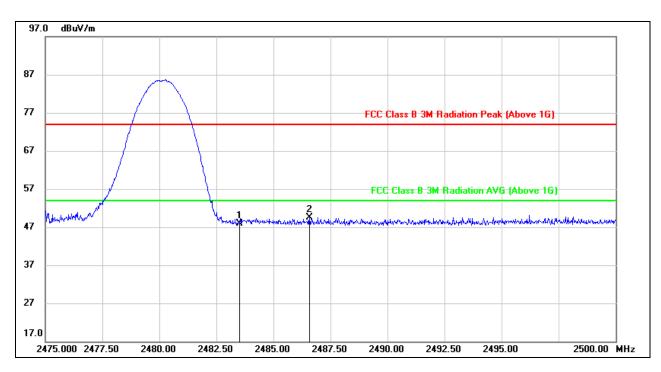

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.500	15.12	32.88	48.00	74.00	-26.00	peak
2	2486.575	16.68	32.89	49.57	74.00	-24.43	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. Only the worst case emission recorded in the report, if Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.






7.3. SPURIOUS EMISSIONS (1~3GHz)

7.3.1. GFSK MODE


HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

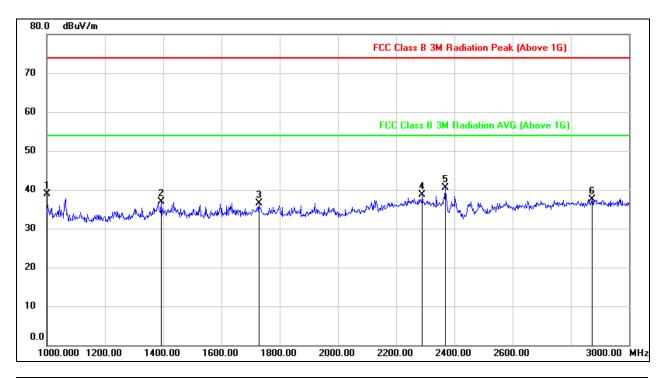

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	1000.0000	53.06	-14.21	38.85	74.00	-35.15	peak
2	1392.000	48.98	-12.11	36.87	74.00	-37.13	peak
3	1728.000	47.97	-11.38	36.59	74.00	-37.41	peak
4	2290.000	46.20	-7.43	38.77	74.00	-35.23	peak
5	2368.000	48.29	-7.88	40.41	74.00	-33.59	peak
6	2874.000	44.08	-6.61	37.47	74.00	-36.53	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.






HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

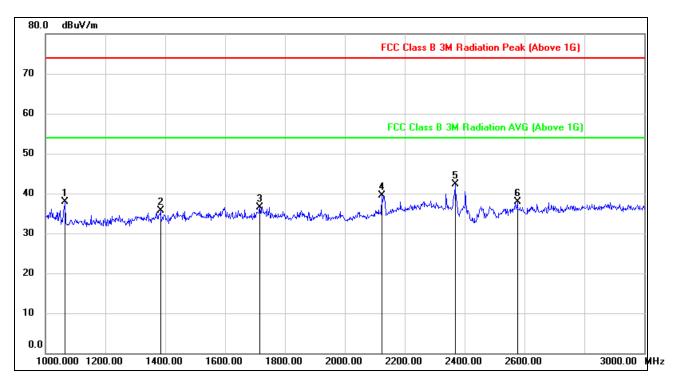

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	1066.000	51.90	-13.92	37.98	74.00	-36.02	peak
2	1384.000	48.06	-12.44	35.62	74.00	-38.38	peak
3	1716.000	48.01	-11.44	36.57	74.00	-37.43	peak
4	2124.000	48.90	-9.36	39.54	74.00	-34.46	peak
5	2368.000	50.11	-7.78	42.33	74.00	-31.67	peak
6	2576.000	46.16	-8.18	37.98	74.00	-36.02	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.






HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

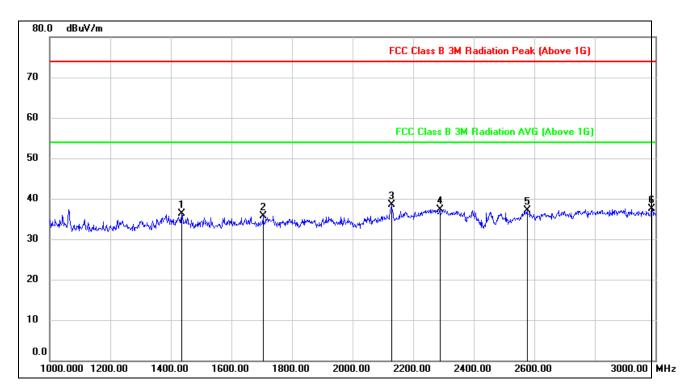

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	1436.000	48.46	-12.21	36.25	74.00	-37.75	peak
2	1704.000	47.24	-11.50	35.74	74.00	-38.26	peak
3	2128.000	47.69	-9.21	38.48	74.00	-35.52	peak
4	2288.000	44.80	-7.45	37.35	74.00	-36.65	peak
5	2576.000	45.39	-8.23	37.16	74.00	-36.84	peak
6	2988.000	44.20	-6.60	37.60	74.00	-36.40	peak

Note: 1. Measurement = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.





Page 63 of 95


HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

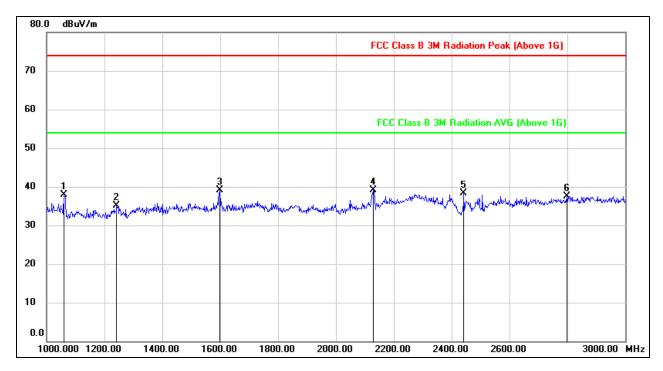

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	1060.000	51.83	-13.92	37.91	74.00	-36.09	peak
2	1242.000	47.84	-12.79	35.05	74.00	-38.95	peak
3	1598.000	51.07	-12.06	39.01	74.00	-34.99	peak
4	2128.000	48.41	-9.31	39.10	74.00	-34.90	peak
5	2442.000	46.59	-8.21	38.38	74.00	-35.62	peak
6	2798.000	44.54	-6.97	37.57	74.00	-36.43	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.






HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

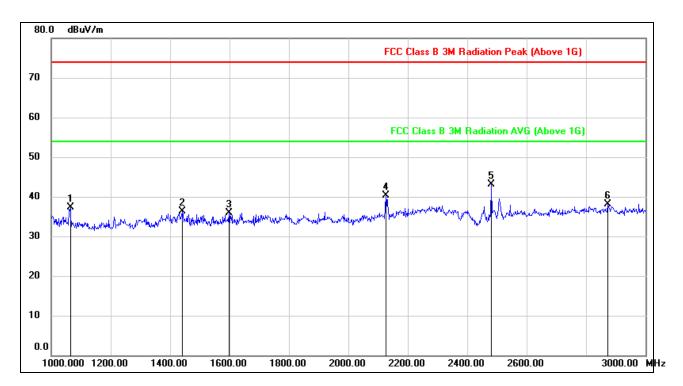

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	1064.000	51.00	-13.62	37.38	74.00	-36.62	peak
2	1440.000	48.59	-12.22	36.37	74.00	-37.63	peak
3	1598.000	47.99	-12.07	35.92	74.00	-38.08	peak
4	2126.000	49.62	-9.24	40.38	74.00	-33.62	peak
5	2480.000	51.57	-8.38	43.19	74.00	-30.81	peak
6	2872.000	44.66	-6.62	38.04	74.00	-35.96	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.






HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

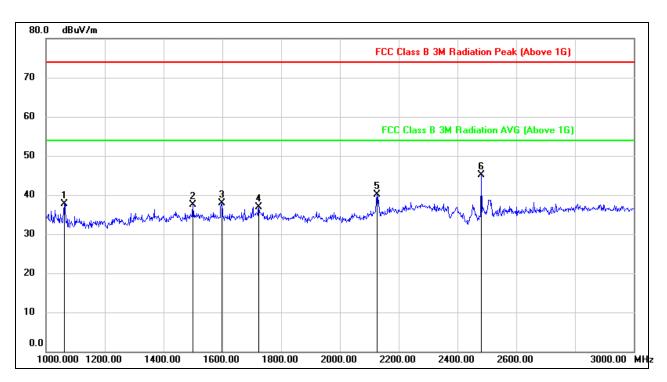

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	1062.000	51.71	-13.92	37.79	74.00	-36.21	peak
2	1500.000	49.80	-12.28	37.52	74.00	-36.48	peak
3	1598.000	49.95	-12.06	37.89	74.00	-36.11	peak
4	1724.000	48.36	-11.40	36.96	74.00	-37.04	peak
5	2126.000	49.45	-9.34	40.11	74.00	-33.89	peak
6	2480.000	53.45	-8.28	45.17	74.00	-28.83	peak

Note: 1. Measurement = Reading Level + Correct Factor.


- 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- 3. Peak: Peak detector.





7.3.2. **□/4-DQPSK**


HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

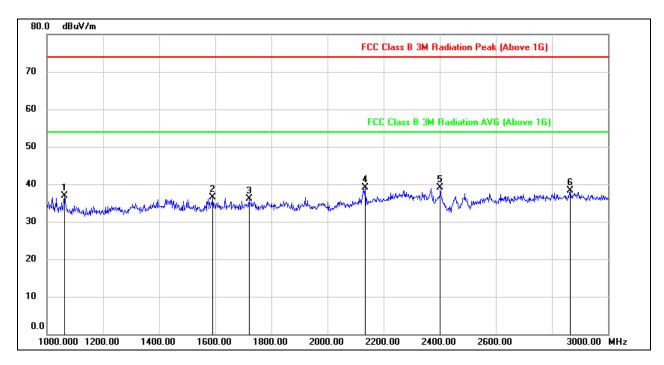

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	1062.000	50.54	-13.62	36.92	74.00	-37.08	peak
2	1590.000	48.68	-12.12	36.56	74.00	-37.44	peak
3	1720.000	47.46	-11.42	36.04	74.00	-37.96	peak
4	2134.000	48.17	-9.13	39.04	74.00	-34.96	peak
5	2402.000	47.29	-8.11	39.18	74.00	-34.82	peak
6	2866.000	44.98	-6.65	38.33	74.00	-35.67	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.






HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

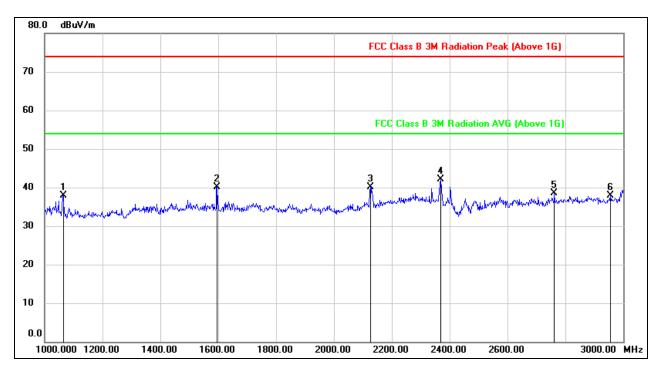

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	1064.000	51.89	-13.92	37.97	74.00	-36.03	peak
2	1596.000	52.22	-12.08	40.14	74.00	-33.86	peak
3	2126.000	49.45	-9.34	40.11	74.00	-33.89	peak
4	2370.000	49.96	-7.79	42.17	74.00	-31.83	peak
5	2762.000	45.71	-7.24	38.47	74.00	-35.53	peak
6	2956.000	44.38	-6.57	37.81	74.00	-36.19	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.






HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

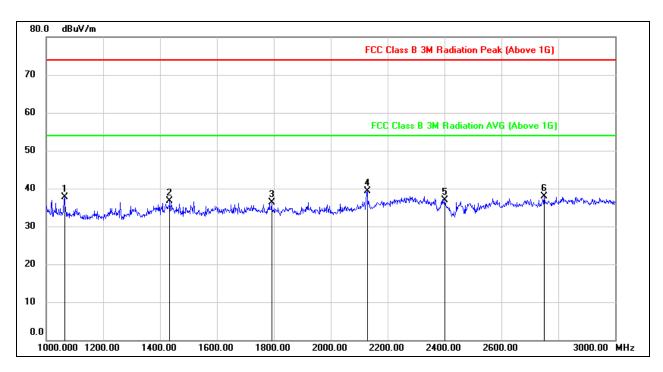

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	1064.000	51.39	-13.62	37.77	74.00	-36.23	peak
2	1434.000	48.97	-12.20	36.77	74.00	-37.23	peak
3	1792.000	47.38	-11.16	36.22	74.00	-37.78	peak
4	2128.000	48.44	-9.21	39.23	74.00	-34.77	peak
5	2402.000	44.97	-8.11	36.86	74.00	-37.14	peak
6	2750.000	45.04	-7.23	37.81	74.00	-36.19	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.






HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

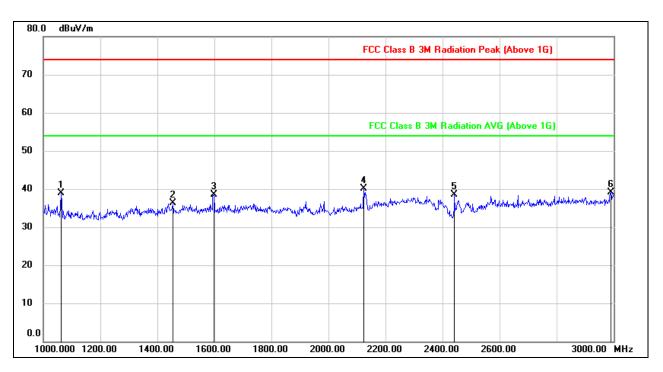

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	1062.000	52.74	-13.92	38.82	74.00	-35.18	peak
2	1454.000	48.66	-12.28	36.38	74.00	-37.62	peak
3	1598.000	50.64	-12.06	38.58	74.00	-35.42	peak
4	2124.000	49.41	-9.36	40.05	74.00	-33.95	peak
5	2442.000	46.74	-8.21	38.53	74.00	-35.47	peak
6	2990.000	45.75	-6.59	39.16	74.00	-34.84	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.





HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

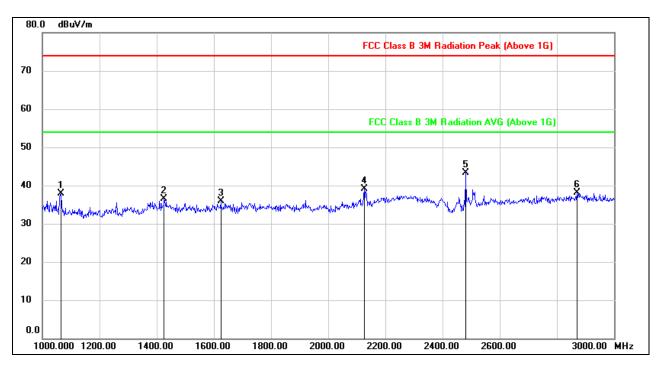


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	1066.000	51.60	-13.62	37.98	74.00	-36.02	peak
2	1426.000	48.69	-12.17	36.52	74.00	-37.48	peak
3	1624.000	47.83	-11.90	35.93	74.00	-38.07	peak
4	2126.000	48.31	-9.24	39.07	74.00	-34.93	peak
5	2480.000	51.75	-8.38	43.37	74.00	-30.63	peak
6	2870.000	44.64	-6.62	38.02	74.00	-35.98	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.



HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

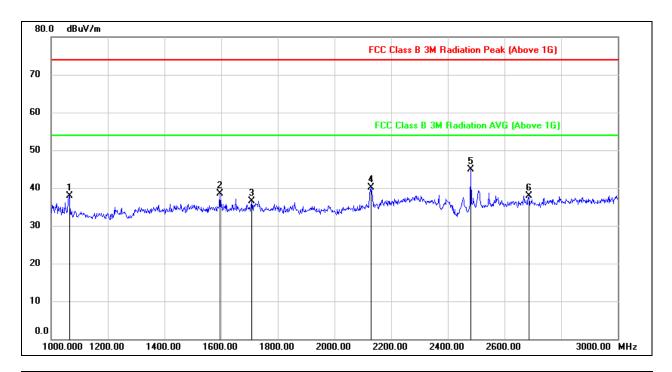

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	1064.000	51.86	-13.92	37.94	74.00	-36.06	peak
2	1596.000	50.51	-12.08	38.43	74.00	-35.57	peak
3	1708.000	48.03	-11.48	36.55	74.00	-37.45	peak
4	2130.000	49.48	-9.28	40.20	74.00	-33.80	peak
5	2480.000	53.16	-8.28	44.88	74.00	-29.12	peak
6	2686.000	45.61	-7.70	37.91	74.00	-36.09	peak

Note: 1. Measurement = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.



7.4. SPURIOUS EMISSIONS (3~18GHz)

7.4.1. GFSK MODE


HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

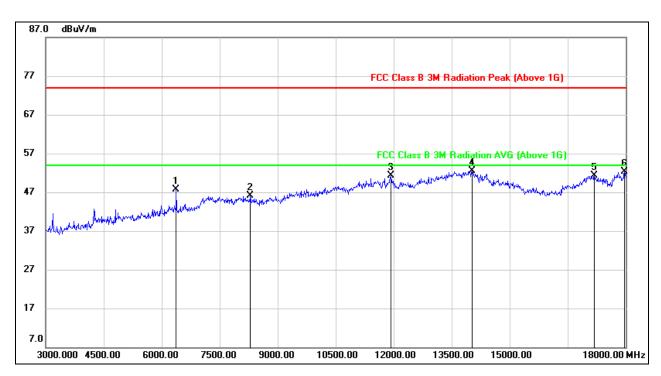

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	6375.000	43.00	4.65	47.65	74.00	-26.35	peak
2	8295.000	37.59	8.42	46.01	74.00	-27.99	peak
3	11925.000	34.47	16.74	51.21	74.00	-22.79	peak
4	14025.000	31.80	20.62	52.42	74.00	-21.58	peak
5	17190.000	28.53	22.77	51.30	74.00	-22.70	peak
6	17970.000	25.31	27.04	52.35	74.00	-21.65	peak

Note: 1. Measurement = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.





Page 73 of 95

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

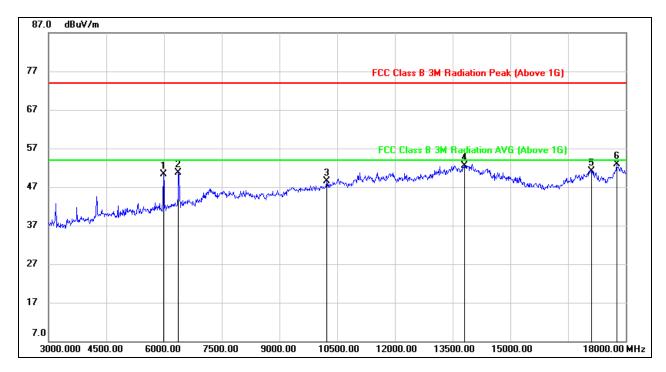

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	5985.000	47.09	3.28	50.37	74.00	-23.63	peak
2	6375.000	45.95	4.70	50.65	74.00	-23.35	peak
3	10230.000	35.80	12.72	48.52	74.00	-25.48	peak
4	13800.000	31.23	21.21	52.44	74.00	-21.56	peak
5	17115.000	28.32	22.85	51.17	74.00	-22.83	peak
6	17760.000	26.47	26.39	52.86	74.00	-21.14	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.



REPORT NO.: 4788512235.3-3 Page 74 of 95

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

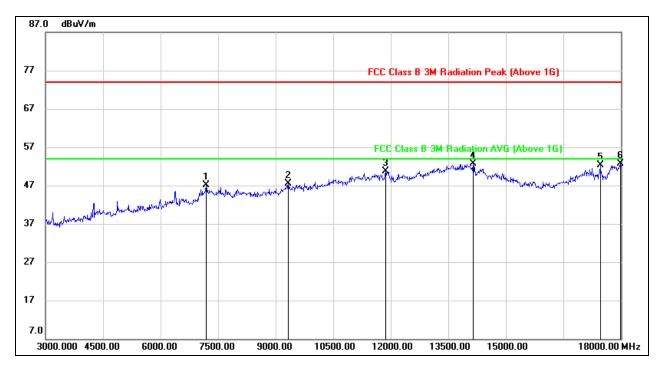


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	7185.000	39.39	7.73	47.12	74.00	-26.88	peak
2	9330.000	36.75	10.77	47.52	74.00	-26.48	peak
3	11865.000	34.23	16.44	50.67	74.00	-23.33	peak
4	14145.000	32.27	20.44	52.71	74.00	-21.29	peak
5	17460.000	29.06	23.32	52.38	74.00	-21.62	peak
6	17985.000	25.60	27.05	52.65	74.00	-21.35	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.




HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

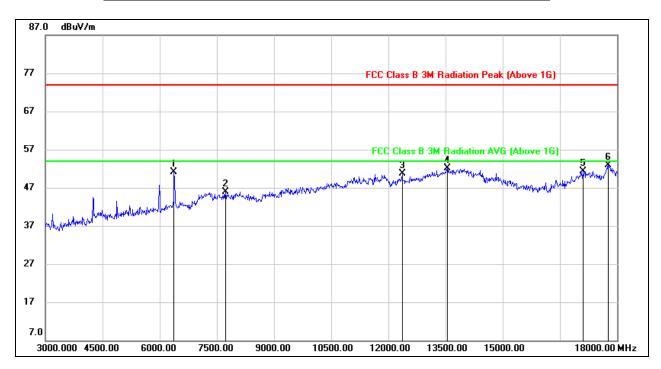

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	6375.000	46.40	4.70	51.10	74.00	-22.90	peak
2	7725.000	37.86	8.13	45.99	74.00	-28.01	peak
3	12360.000	34.32	16.40	50.72	74.00	-23.28	peak
4	13545.000	31.13	20.88	52.01	74.00	-21.99	peak
5	17100.000	28.51	22.84	51.35	74.00	-22.65	peak
6	17775.000	26.29	26.57	52.86	74.00	-21.14	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.






HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

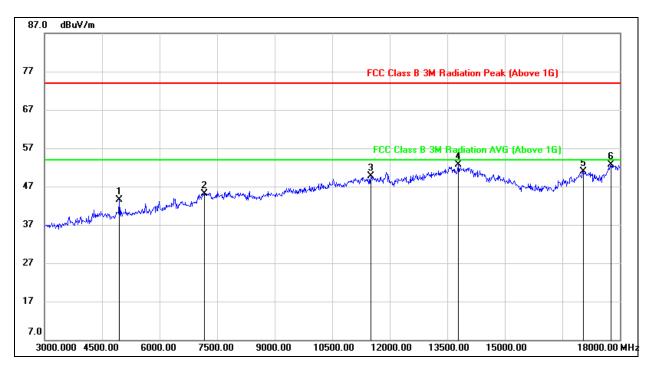

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4950.000	42.89	0.59	43.48	74.00	-30.52	peak
2	7170.000	37.44	7.72	45.16	74.00	-28.84	peak
3	11505.000	34.12	15.68	49.80	74.00	-24.20	peak
4	13785.000	32.00	20.76	52.76	74.00	-21.24	peak
5	17040.000	28.84	22.11	50.95	74.00	-23.05	peak
6	17760.000	26.64	25.99	52.63	74.00	-21.37	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.






HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

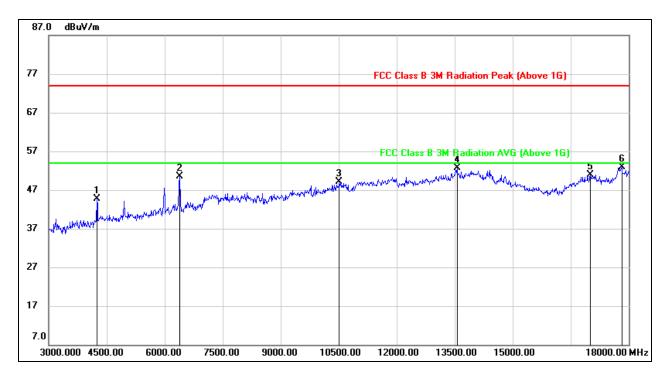

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4245.000	46.63	-1.92	44.71	74.00	-29.29	peak
2	6390.000	45.72	4.73	50.45	74.00	-23.55	peak
3	10515.000	35.23	13.78	49.01	74.00	-24.99	peak
4	13560.000	31.92	20.81	52.73	74.00	-21.27	peak
5	17010.000	28.48	22.36	50.84	74.00	-23.16	peak
6	17820.000	26.27	26.56	52.83	74.00	-21.17	peak

Note: 1. Measurement = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.





7.4.2. **□/4-DQPSK**

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

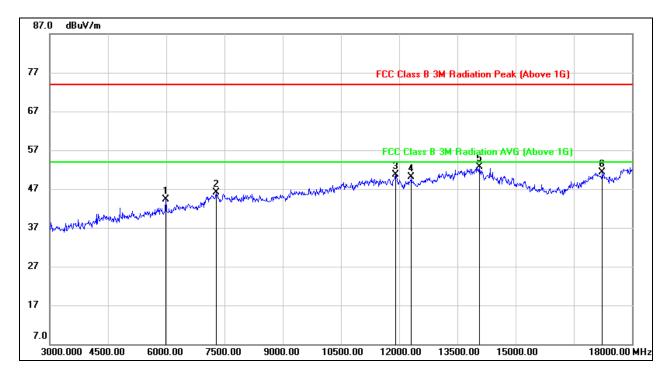


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	5985.000	41.22	3.18	44.40	74.00	-29.60	peak
2	7290.000	38.31	7.86	46.17	74.00	-27.83	peak
3	11910.000	33.63	16.98	50.61	74.00	-23.39	peak
4	12315.000	33.83	16.19	50.02	74.00	-23.98	peak
5	14070.000	32.08	20.65	52.73	74.00	-21.27	peak
6	17235.000	28.56	22.72	51.28	74.00	-22.72	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.



HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

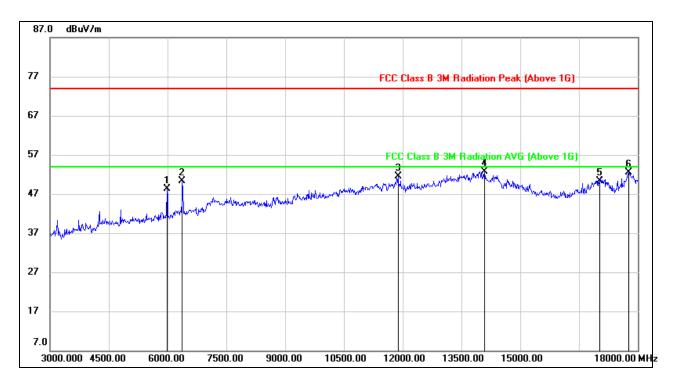


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	5985.000	45.07	3.28	48.35	74.00	-25.65	peak
2	6375.000	45.53	4.70	50.23	74.00	-23.77	peak
3	11880.000	34.96	16.64	51.60	74.00	-22.40	peak
4	14085.000	32.03	20.63	52.66	74.00	-21.34	peak
5	17025.000	27.75	22.48	50.23	74.00	-23.77	peak
6	17760.000	26.21	26.39	52.60	74.00	-21.40	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.






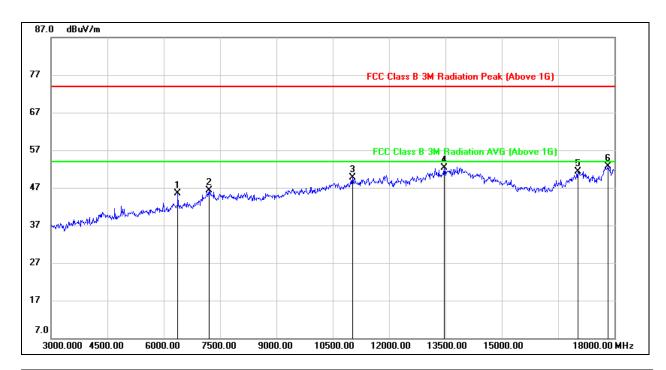

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	6375.000	40.93	4.65	45.58	74.00	-28.42	peak
2	7200.000	38.53	7.75	46.28	74.00	-27.72	peak
3	11025.000	35.16	14.64	49.80	74.00	-24.20	peak
4	13470.000	32.30	20.09	52.39	74.00	-21.61	peak
5	17025.000	29.37	22.03	51.40	74.00	-22.60	peak
6	17820.000	26.23	26.48	52.71	74.00	-21.29	peak

Note: 1. Measurement = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.





Page 81 of 95

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

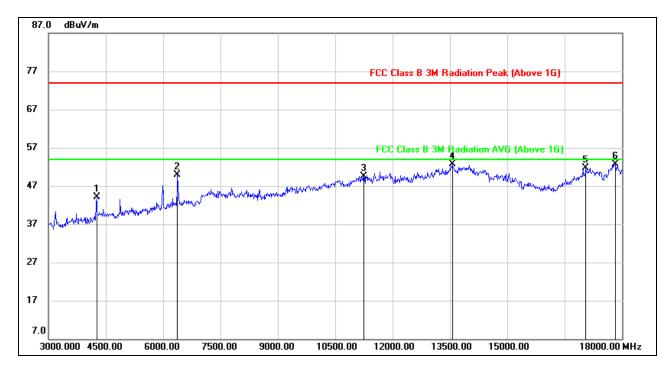

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4260.000	45.97	-1.80	44.17	74.00	-29.83	peak
2	6375.000	45.26	4.70	49.96	74.00	-24.04	peak
3	11250.000	34.21	15.34	49.55	74.00	-24.45	peak
4	13560.000	31.93	20.81	52.74	74.00	-21.26	peak
5	17055.000	28.98	22.68	51.66	74.00	-22.34	peak
6	17835.000	26.47	26.33	52.80	74.00	-21.20	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.






HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

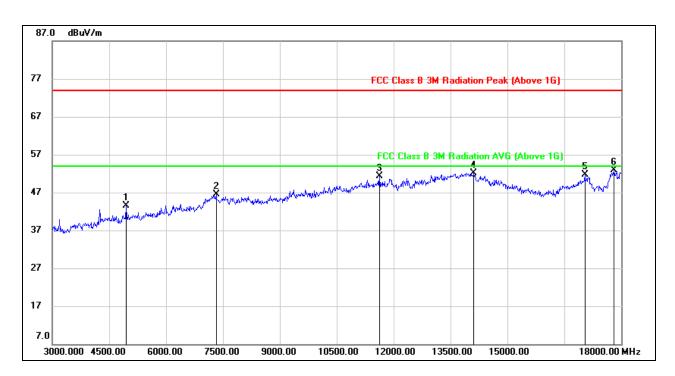

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4950.000	42.86	0.59	43.45	74.00	-30.55	peak
2	7320.000	38.94	7.63	46.57	74.00	-27.43	peak
3	11625.000	35.20	16.02	51.22	74.00	-22.78	peak
4	14115.000	31.52	20.59	52.11	74.00	-21.89	peak
5	17040.000	29.60	22.11	51.71	74.00	-22.29	peak
6	17805.000	26.40	26.48	52.88	74.00	-21.12	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.





HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

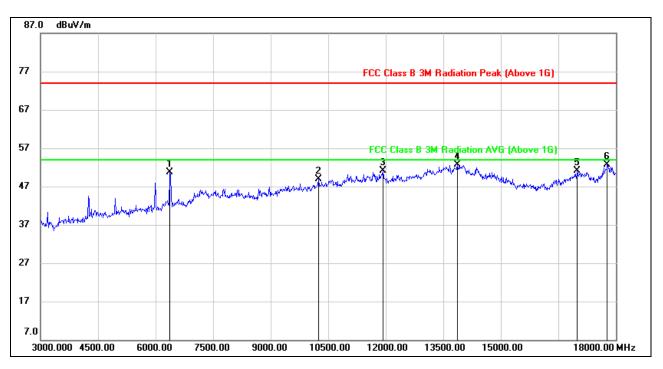

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	6375.000	45.92	4.70	50.62	74.00	-23.38	peak
2	10245.000	36.17	12.73	48.90	74.00	-25.10	peak
3	11925.000	34.45	16.64	51.09	74.00	-22.91	peak
4	13860.000	31.73	20.92	52.65	74.00	-21.35	peak
5	16995.000	28.82	22.22	51.04	74.00	-22.96	peak
6	17775.000	26.13	26.57	52.70	74.00	-21.30	peak

Note: 1. Measurement = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.



7.5. SPURIOUS EMISSIONS 18G ~ 26GHz

7.5.1. **□/4-DQPSK**

SPURIOUS EMISSIONS (HIGH CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

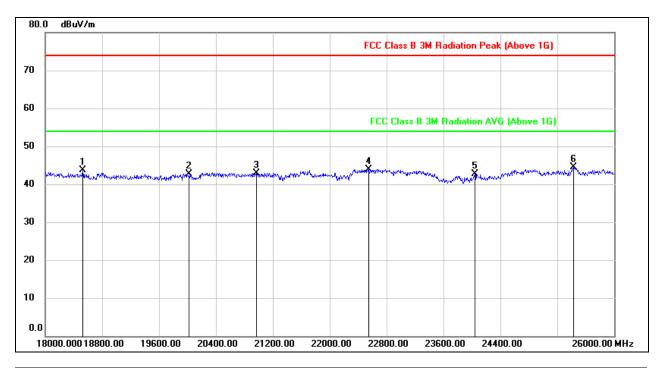

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	18528.000	48.91	-5.26	43.65	74.00	-30.35	peak
2	20024.000	48.25	-5.47	42.78	74.00	-31.22	peak
3	20968.000	47.84	-4.91	42.93	74.00	-31.07	peak
4	22544.000	47.72	-3.84	43.88	74.00	-30.12	peak
5	24040.000	45.39	-2.76	42.63	74.00	-31.37	peak
6	25432.000	46.21	-1.75	44.46	74.00	-29.54	peak


Note: 1. Peak Result= Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.



Page 85 of 95

SPURIOUS EMISSIONS (HIGH CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)

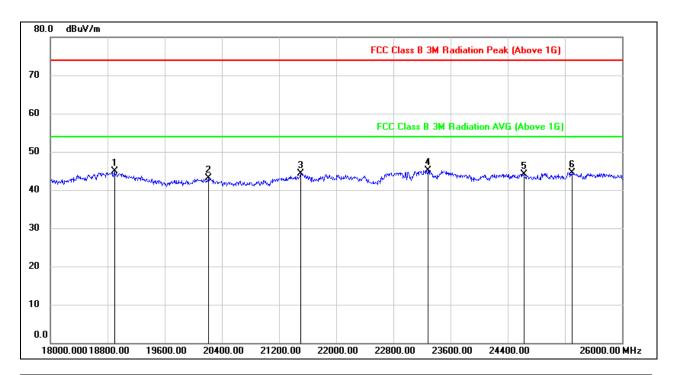

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	18896.000	50.14	-5.30	44.84	74.00	-29.16	peak
2	20208.000	48.61	-5.59	43.02	74.00	-30.98	peak
3	21504.000	49.03	-4.69	44.34	74.00	-29.66	peak
4	23288.000	48.42	-3.33	45.09	74.00	-28.91	peak
5	24624.000	46.49	-2.33	44.16	74.00	-29.84	peak
6	25296.000	46.19	-1.69	44.50	74.00	-29.50	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


Note: All the modulation and channels had been tested, but only the worst data recorded in the report.



7.6. SPURIOUS EMISSIONS 30M ~ 1 GHz

7.6.1. **□/4-DQPSK**

SPURIOUS EMISSIONS (HIGH CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

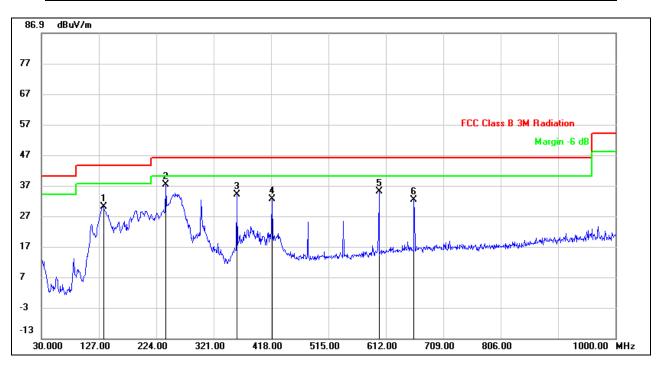

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	134.7600	48.58	-18.48	30.10	43.50	-13.40	QP
2	240.4900	55.32	-18.02	37.30	46.00	-8.70	QP
3	359.8000	47.50	-13.52	33.98	46.00	-12.02	QP
4	419.9400	44.55	-12.09	32.46	46.00	-13.54	QP
5	600.3600	44.08	-9.01	35.07	46.00	-10.93	QP
6	659.5300	40.54	-8.31	32.23	46.00	-13.77	QP


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

- 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
- 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.



Page 87 of 95

SPURIOUS EMISSIONS (HIGH CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)

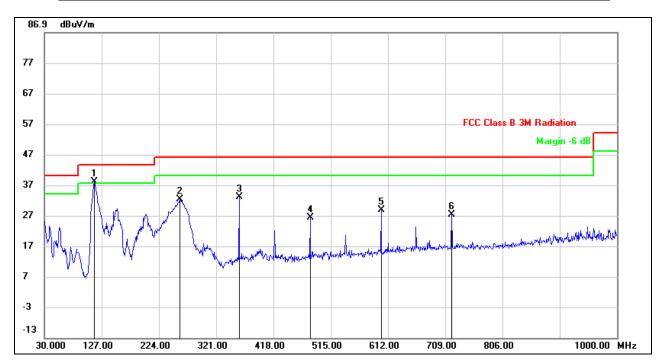

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	114.3900	57.88	-19.75	38.13	43.50	-5.37	QP
2	258.9200	49.70	-17.36	32.34	46.00	-13.66	QP
3	359.8000	46.45	-13.52	32.93	46.00	-13.07	QP
4	480.0800	37.69	-11.44	26.25	46.00	-19.75	QP
5	600.3600	37.67	-9.01	28.66	46.00	-17.34	QP
6	719.6700	34.91	-7.66	27.25	46.00	-18.75	QP

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

- 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
- 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto

Note: All the modulation and channels had been tested, but only the worst data recorded in the report.






REPORT NO.: 4788512235.3-3 Page 88 of 95

7.7. SPURIOUS EMISSIONS BELOW 30M

7.7.1. **□/4-DQPSK**

SPURIOUS EMISSIONS (HIGH CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

9KHz~ 150KHz

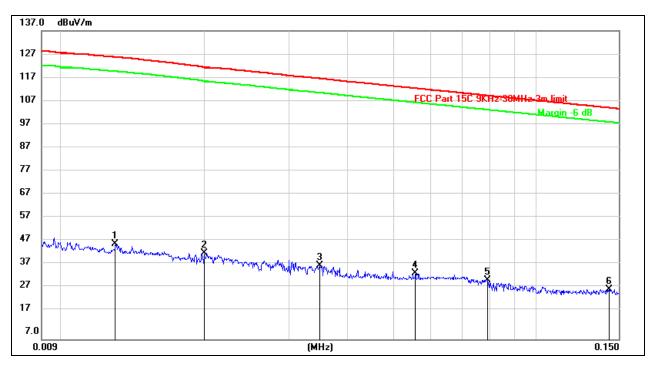

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(KHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	0.0129	26.81	20.24	47.05	125.85	-78.80	peak
2	0.0200	22.80	20.31	43.11	121.58	-78.47	peak
3	0.0349	17.67	20.31	37.98	116.84	-78.86	peak
4	0.0555	14.39	20.31	34.70	112.75	-78.05	peak
5	0.0792	11.65	20.29	31.94	109.63	-77.69	peak
6	0.1428	7.73	20.39	28.12	104.51	-76.39	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.



REPORT NO.: 4788512235.3-3 Page 89 of 95

150KHz ~ 30M

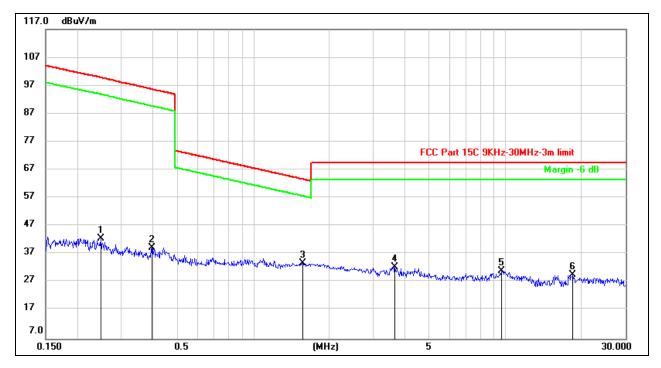

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	0.2479	22.41	20.32	42.73	99.89	-57.16	peak
2	0.3955	18.99	20.27	39.26	95.67	-56.41	peak
3	1.5684	13.30	20.58	33.88	63.70	-29.82	peak
4	3.6417	11.49	21.00	32.49	69.54	-37.05	peak
5	9.6539	10.08	21.04	31.12	69.54	-38.42	peak
6	18.5237	8.68	21.01	29.69	69.54	-39.85	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

Page 90 of 95

SPURIOUS EMISSIONS (HIGH CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)

9KHz~ 150KHz

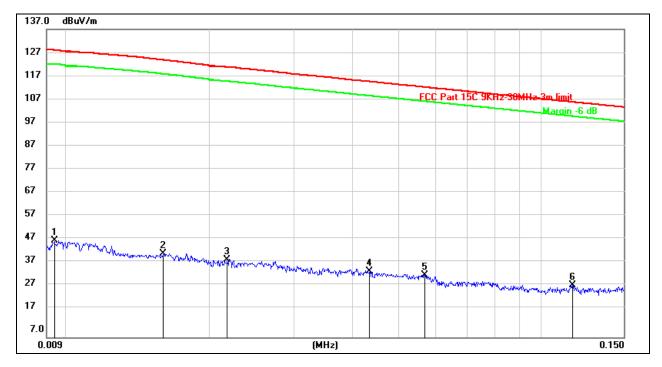


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(KHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	0.0094	27.37	20.26	47.63	128.06	-80.43	peak
2	0.0159	21.99	20.27	42.26	124.05	-81.79	peak
3	0.0217	19.40	20.31	39.71	120.98	-81.27	peak
4	0.0434	14.48	20.31	34.79	114.90	-80.11	peak
5	0.0568	13.01	20.31	33.32	112.55	-79.23	peak
6	0.1168	8.74	20.29	29.03	106.26	-77.23	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.



150KHz ~ 30M

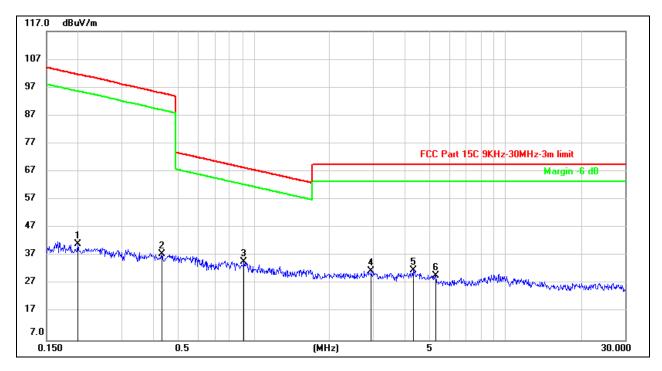

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	0.1995	20.85	20.37	41.22	101.60	-60.38	peak
2	0.4304	17.43	20.27	37.70	94.97	-57.27	peak
3	0.9133	14.59	20.37	34.96	68.40	-33.44	peak
4	2.9305	10.63	20.88	31.51	69.54	-38.03	peak
5	4.3146	10.96	20.99	31.95	69.54	-37.59	peak
6	5.3048	9.11	20.84	29.95	69.54	-39.59	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

Note: All the modulation and channels had been tested, but only the worst data recorded in the report.

Page 92 of 95


8. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

Please refer to FCC §15.207 (a) and RSS-Gen Clause 8.8.

FREQUENCY (MHz)	Class A	(dBuV)	Class B (dBuV)		
FREQUENCT (IVII12)	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	
0.50 -5.0	73.00	60.00	56.00	46.00	
5.0 -30.0	73.00	60.00	60.00	50.00	

TEST SETUP AND PROCEDURE

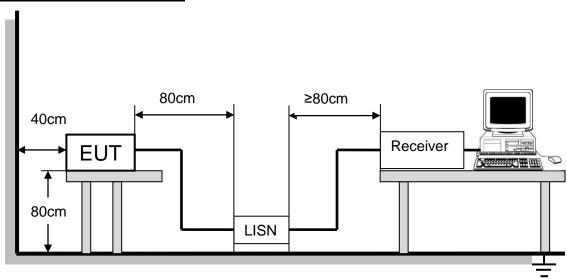

The EUT is put on a table of non-conducting material that is 80cm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013.Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9kHz.


The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.



8.1.1. GFSK MODE

TEST RESULTS (MID CHANNEL, WORST-CASE CONFIGURATION)

LINE N RESULTS

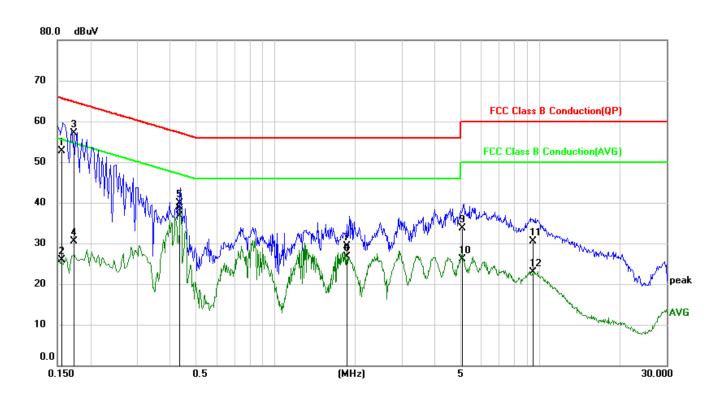


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1	0.1549	43.01	9.62	52.63	65.73	-13.10	QP
2	0.1549	16.38	9.62	26.00	55.73	-29.73	AVG
3	0.1736	47.40	9.62	57.02	64.79	-7.77	QP
4	0.1736	20.91	9.62	30.53	54.79	-24.26	AVG
5	0.4334	30.21	9.63	39.84	57.19	-17.35	QP
6	0.4334	26.99	9.63	36.62	47.19	-10.57	AVG
7	1.8682	19.58	9.65	29.23	56.00	-26.77	QP
8	1.8682	17.08	9.65	26.73	46.00	-19.27	AVG
9	5.0687	24.08	9.70	33.78	60.00	-26.22	QP
10	5.0687	16.46	9.70	26.16	50.00	-23.84	AVG
11	9.3154	20.40	10.05	30.45	60.00	-29.55	QP
12	9.3154	12.81	10.05	22.86	50.00	-27.14	AVG

Note: 1. Result = Reading +Correct Factor.

- 2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
- 3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
- 4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.



LINE L RESULTS

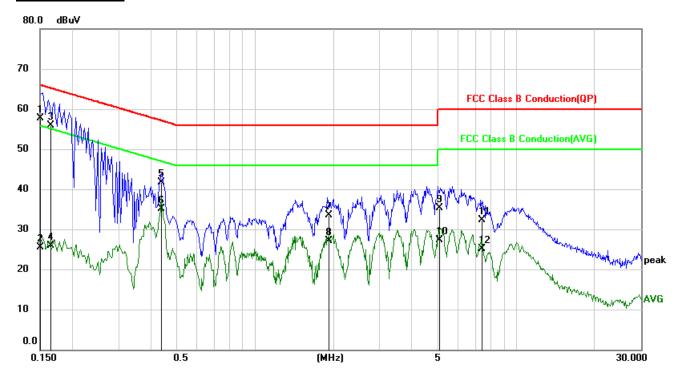

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1	0.1503	48.10	9.64	57.74	65.98	-8.24	QP
2	0.1503	15.89	9.64	25.53	55.98	-30.45	AVG
3	0.1659	46.31	9.63	55.94	65.16	-9.22	QP
4	0.1659	16.24	9.63	25.87	55.16	-29.29	AVG
5	0.4378	32.17	9.63	41.80	57.10	-15.30	QP
6	0.4378	25.51	9.63	35.14	47.10	-11.96	AVG
7	1.9144	23.77	9.66	33.43	56.00	-22.57	QP
8	1.9144	17.51	9.66	27.17	46.00	-18.83	AVG
9	5.0696	25.68	9.71	35.39	60.00	-24.61	QP
10	5.0696	17.65	9.71	27.36	50.00	-22.64	AVG
11	7.3448	22.53	9.81	32.34	60.00	-27.66	QP
12	7.3448	15.29	9.81	25.10	50.00	-24.90	AVG

Note: 1. Result = Reading +Correct Factor.

- 2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
- 3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
- 4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

Note: All the modulation and channels had been tested, but only the worst data recorded in the report.



Page 95 of 95

9. ANTENNA REQUIREMENTS

APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

ANTENNA CONNECTOR

EUT has a PCB antenna without antenna connector.

ANTENNA GAIN

The antenna gain of EUT is less than 6 dBi.

END OF REPORT