



Date: 2014-01-02 Page 1 of 87

No.: DM113697

Applicant (SZJ012): GOLDEN CHINA AUDIO (HK) PRODUCT LIMITED

(AOK)

UNIT 2509, 25/F HO KING COMM CTR 2-16 FA YUEN

ST KLN HONG KONG

Manufacturer: GOLDEN CHINA AUDIO (HK) PRODUCT LIMITED

(AOK)

UNIT 2509, 25/F HO KING COMM CTR 2-16 FA YUEN

ST KLN HONG KONG

Description of Sample(s): Product: bluetooth speaker

Brand Name: HMDX Model Number: HX-P120

FCC ID: 2ABNBHX-P120

Date Sample(s) Received: 2013-12-17

Date Tested: 2013-12-19 to 2013-12-27

Investigation Requested: Perform ElectroMagnetic Interference measurement in

accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2012 and ANSI C63.4: 2009 for FCC Certification.

Conclusion(s): The submitted product <u>COMPLIED</u> with the requirements of

Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on Section 2.2 in this

Test Report.

Remark(s): ----



LONG Yun Jian, Along
Authorized Signatory
ElectroMagnetic Compatibility Department
For and on behalf of
STC (Dongguan) Company Limited



Date: 2014-01-02 Page 2 of 87 No.: DM113697 **CONTENT:** Cover Page 1 of 87 Content Page 2 of 87 1.0 **General Details** Page 3 of 87 1.1 **Test Laboratory** Page 3 of 87 1.2 Equipment Under Test [EUT] Description of EUT operation Page 3 of 87 1.3 Date of Order Page 3 of 87 1.4 Submitted Sample Page 3 of 87 1.5 **Test Duration** Page 3 of 87 Country of Origin 1.6 Page 4 of 87 1.7 RF Module Details Page 4 of 87 1.8 Antenna Details 2.0 **Technical Details** Page 5 of 87 2.1 Investigations Requested 2.2 Page 5 of 87 Test Standards and Results Summary Page 6 of 87 2.3 Table for Test Modes 3.0 **Test Results** Page 7 - 80 of 87 3.1 Emission Appendix A Page 81 of 87 List of Measurement Equipment Appendix B **Ancillary Equipment** Page 82 of 87 Appendix C

The Hong Kong Standards and Testing Centre Ltd.

Photographs

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

Page 83-87 of 87



Date: 2014-01-02 Page 3 of 87

No.: DM113697

1.0 General Details

1.1 Test Laboratory

STC (Dongguan) Company Limited

EMC Laboratory

68 Fumin Nan Road, Dalang, Dongguan, China

Telephone: (86 769) 81119888 Fax: (86 769) 81116222

1.2 Equipment Under Test [EUT] Description of Sample(s)

Product: bluetooth speaker

Manufacturer: GOLDEN CHINA AUDIO (HK) PRODUCT LIMITED

(AOK)

Brand Name: HMDX Model Number: HX-P120

Rating: 5Vd.c. (Powered by PC USB port) /

3.7Vd.c. (rechargeable battery x 1)

1.2.1 Description of EUT Operation

The Equipment Under Test (EUT) is a bluetooth speaker of GOLDEN CHINA AUDIO (HK) PRODUCT LIMITED (AOK), it is Audio System, modulation by IC; and type is frequency hopping speed spectrum Modulation.

1.3 Date of Order

2013-12-17

1.4 Submitted Sample(s):

1 Sample

1.5 Test Duration

2013-12-19 to 2013-12-27

1.6 Country of Origin

China



Date: 2014-01-02 Page 4 of 87

No.: DM113697

1.7 **RF Module Details**

Module Model Number: BT_Module_V1.1.1

Spotlight10C_AK1055C

Module FCC ID:

Module Transmission Type: Bluetooth V2.1+EDR

Modulation: FHSS (GFSK / π /4-DQPSK / 8DPSK)

Data Rates: 1MBps: GFSK

> 2 MBps: π/4-DQPSK 3 MBps: 8DPSK

Frequency Range: 2400-2483.5MHz Carrier Frequencies: 2402MHz - 2480MHz

Module Specification (specification provided by manufacturer)

1.8 **Antenna Details**

PCB antenna Antenna Type:

Antenna Gain: 0dBi



Date: 2014-01-02 Page 5 of 87

No.: DM113697

Technical Details 2.0

2.1 **Investigations Requested**

Perform Electromagnetic Interference measurements in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2012 Regulations. FCC Pubic Notice DA 00-705 and ANSI C63.4: 2009 for FCC Certification.

2.2 **Test Standards and Results Summary Tables**

EMISSION Results Summary								
Test Condition	Test Requirement	Test Method	Class /	Т	est Resu	ılt		
			Pass	Fail	N/A			
Maximum Peak Conducted Output Power	FCC 47CFR 15.247(b)(1)	FCC Pubic Notice DA 00-705	N/A					
Radiated Spurious Emissions	FCC 47CFR 15.209	ANSI C63.4:2009	N/A					
AC Mains Conducted Emissions	FCC 47CFR 15.207	ANSI C63.4:2009	N/A					
Number of Hopping Frequency	FCC 47CFR 15.247(a)(2)(b)(1)	FCC Pubic Notice DA 00-705	N/A					
20dB Bandwidth	FCC 47CFR 15.247(a)(2)	FCC Pubic Notice DA 00-705	N/A					
Hopping Channel Separation	FCC 47CFR 15.247(a)(1)	FCC Pubic Notice DA 00-705	N/A					
Band-edge compliance of RF Conducted Emission	FCC 47CFR 15.247(c)	FCC Pubic Notice DA 00-705	N/A					
Time of Occupancy (Dwell Time)	FCC 47CFR 15.247(a)(1)(iii)	FCC Pubic Notice DA 00-705	N/A					
Antenna requirement	FCC 47CFR 15.203	N/A	N/A	\boxtimes				
RF Exposure	FCC 47CFR 15.247(i)	N/A	N/A	\boxtimes				

Note: N/A - Not Applicable



Date: 2014-01-02 Page 6 of 87

No.: DM113697

2.3 Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate in the table below is the worst case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases.

The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate
Maximum Peak Conducted Output Power	GFSK / π/4-DQPSK / 8DPSK	1MBps / 2MBps / 3MBps
Hopping Channel Separation	GFSK / π/4-DQPSK / 8DPSK	1MBps / 2MBps / 3MBps
Number of Hopping Frequency	GFSK / π/4-DQPSK / 8DPSK	2MBps
Time of Occupancy(Dwell Time)	8DPSK (DH1 / DH3 / DH5)	2MBps
Radiated Spurious Emissions	GFSK / π/4-DQPSK / 8DPSK	1MBps / 2MBps / 3MBps
Band-edge compliance of Conducted Emission	GFSK / π/4-DQPSK / 8DPSK	2MBps



Date: 2014-01-02 Page 7 of 87

No.: DM113697

3.0 Test Results

3.1 Emission

3.1.1 Maximum Peak Conducted Output Power

Test Requirement: FCC 47CFR 15.247(b)(1)
Test Method: FCC Pubic Notice DA 00-705

Test Date: 2013-12-26 Mode of Operation: Tx mode


Test Method:

The RF output of the EUT was connected to the spectrum analyzer. All the attenuation or cable loss will be added to the measured maximum output power. The results are recorded in dBm.

Spectrum Analyzer Setting:

RBW = 3 MHz, VBW= 3MHz, Sweep = Auto, Span = 10MHz Detector = Peak, Trace = Max. hold

Test Setup:

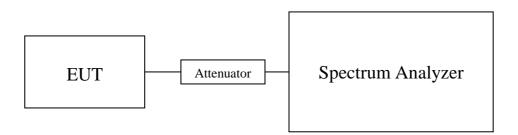



Date: 2014-01-02 Page 8 of 87

No.: DM113697

Limits for Maximum Peak Conducted Output Power [FCC 47CFR 15.247]:

The maximum peak output power shall not exceeded the following limits:

For frequency hopping systems employing at least 75 hopping channels: 1 Watt For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 Watts

For Digital Transmission systems in 2400-2483.5 MHz Band: 1 Watt

Results of Bluetooth Communication mode (GFSK) (Fundamental Power): Pass

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2402	0.00166
Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2441	0.00169
Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2480	0.00168

Results of Bluetooth Communication mode (π /4-DQPSK) (Fundamental Power): Pass

Maximum conducted output power (Watt)
0.00157
Maximum conducted output power (Watt)
0.00158

Transmitter Frequency (MITIE)	Maximum conducted output power (Watt)
2480	0.00156

Results of Bluetooth Communication mode (8 DPSK) (Fundamental Power): Pass

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2402	0.00155
Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2441	0.00156
<u>.</u>	

0.00158

Calculated measurement uncertainty : 30MHz to 1GHz 1.7dB 1GHz to 18GHz 1.7dB

Remark:

2480

- 1. All test data for each data rate were verified, but only the worst case was reported.
- 2. The EUT is programmed to transmit signals continuously for all testing.

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Date: 2014-01-02 Page 9 of 87

No.: DM113697

3.1.2 Radiated Spurious Emissions

Test Requirement: FCC 47CFR 15.209
Test Method: ANSI C63.4:2009
Test Date: 2013-12-26

Mode of Operation: Tx mode / Bluetooth Communication + Charging mode (GFSK /

 $\pi/4$ -DQPSK/ 8DPSK)

Test Method:

The sample was placed 0.8m above the ground plane of semi-anechoic Chamber*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

*: Semi-anechoic chamber located on the STC (Dongguan) Company Ltd. 68 Fumin Nan Road, Dalang, Dongguan, Guangdong, PRC with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 629686.



Date: 2014-01-02 Page 10 of 87

No.: DM113697

Spectrum Analyzer Setting:

9KHz – 30MHz (Pk & Av) RBW: 10kHz

VBW: 30kHz Sweep: Auto

Span: Fully capture the emissions being measured

Trace: Max. hold

30MHz – 1GHz (QP) RBW: 120kHz

VBW: 120kHz Sweep: Auto

Span: Fully capture the emissions being measured

Trace: Max. hold


Above 1GHz (Pk & Av) RBW: 1MHz

VBW: 3MHz Sweep: Auto

Span: Fully capture the emissions being measured

Trace: Max. hold

Test Setup:

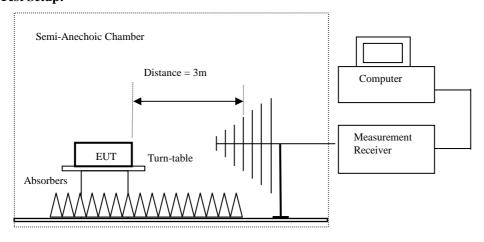

Ground Plane

- Absorbers placed on top of the ground plane are for measurements above $1000 \mathrm{MHz}$ only.
- Measurements between 30MHz to 1000MHz made with Bi-log antennas, above 1000MHz horn antennas are used, 9kHz to 30MHz loop antennas are used.



Date: 2014-01-02 Page 11 of 87

No.: DM113697

Limits for Radiated Emissions [FCC 47 CFR 15,209 Class B]:

Frequency Range	Quasi-Peak Limits
[MHz]	$[\mu V/m]$
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Result of Tx mode (2402.0 MHz) (GFSK mode) (9kHz - 30MHz); Pass

Field Strength of Spurious Emissions						
Average Value						
Frequency	Measured	Correction	Field	Field	Limit	E-Field
	Level Factor Strength Strength Polarity					
MHz	dΒμV	dB/m	$dB\mu V/m$	$\mu V/m$	$\mu V/m$	
Emissions detected are more than 20 dB below the FCC Limits						

Result of Tx mode (2402.0 MHz) (GFSK mode) (30MHz - 1GHz): Pass

Field Strength of Spurious Emissions							
Average Value							
Frequency	Measured	Correction	Field	Field	Limit	E-Field	
	Level Factor Strength Strength Polarity						
MHz	MHz $dB\mu V$ dB/m $dB\mu V/m$ $\mu V/m$ $\mu V/m$						
	Emissions detected are more than 20 dB below the FCC Limits						

sult of Tv mode (2402 0 MHz) (CFSK mode) (Above 1CHz). Po

	Field Strength of Spurious Emissions							
	Peak Value							
Frequency	Measured	Correction	Field	Limit	Margin	E-Field		
	Level @3m	Factor	Strength	@3m		Polarity		
MHz	dΒμV	dB/m	dBμV/m	dBμV/m	$dB\mu V/m$			
4804.0	20.0	41.5	61.5	74.0	12.5	Vertical		
4804.0	16.4	42.4	58.8	74.0	15.2	Horizontal		
7206.0	10.5	45.1	55.6	74.0	18.4	Vertical		
7206.0	8.3	46.2	54.5	74.0	19.5	Horizontal		
9608.0	6.8	48.0	54.8	74.0	19.2	Vertical		
9608.0	6.2	48.8	55.0	74.0	19.0	Horizontal		
12010.0	4.6	51.5	56.1	74.0	17.9	Vertical		
12010.0	3.5	52.4	55.9	74.0	18.1	Horizontal		



Date: 2014-01-02 Page 12 of 87

No.: DM113697

Result of Tx mode (2402.0 MHz) (GFSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Average Value							
Frequency	Measured	Correction	Field	Limit	Margin	E-Field		
	Level @3m	Factor	Strength	@3m	_	Polarity		
MHz	dΒμV	dB/m	$dB\mu V/m$	dBμV/m	dBμV/m			
4804.0	1.7	41.5	43.2	54.0	10.8	Vertical		
4804.0	0.1	42.4	42.5	54.0	11.5	Horizontal		
7206.0	-5.1	45.1	40.0	54.0	14.0	Vertical		
7206.0	-6.9	46.2	39.3	54.0	14.7	Horizontal		
9608.0	-8.8	48.0	39.2	54.0	14.8	Vertical		
9608.0	-9.2	48.8	39.6	54.0	14.4	Horizontal		
12010.0	-10.5	51.5	41.0	54.0	13.0	Vertical		
12010.0	-12.2	52.4	40.2	54.0	13.8	Horizontal		

Result of Tx mode (2441.0 MHz) (GFSK mode) (9kHz - 30MHz): Pass

Field Strength of Spurious Emissions							
Average Value							
Frequency	Measured	Correction	Field	Field	Limit	E-Field	
	Level Factor Strength Strength Polarity						
MHz	dΒμV	dB/m	$dB\mu V/m$	$\mu V/m$	$\mu V/m$		
Emissions detected are more than 20 dB below the FCC Limits							

Results of Tx mode (2441.0 MHz) (GFSK mode) (30MHz - 1000MHz): PASS

	Field Strength of Spurious Emissions							
Average Value								
Frequency	Measured	Correction	Field	Field	Limit	E-Field		
	Level	Factor	Strength	Strength		Polarity		
MHz	dΒμV	dB/m	$dB\mu V/m$	$\mu V/m$	$\mu V/m$			
	Emissions	detected are r	nore than 20	dB below the	FCC Limits	_		



Date: 2014-01-02 Page 13 of 87

No.: DM113697

Result of Tx mode (2441.0 MHz) (GFSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Peak Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@3m		Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m					
4882.0	20.1	41.6	61.7	74.0	12.3	Vertical				
4882.0	16.4	42.5	58.9	74.0	15.1	Horizontal				
7323.0	9.3	45.2	54.5	74.0	19.5	Vertical				
7323.0	8.7	46.3	55.0	74.0	19.0	Horizontal				
9764.0	7.3	48.1	55.4	74.0	18.6	Vertical				
9764.0	6.3	48.9	55.2	74.0	18.8	Horizontal				
12205.0	4.3	51.6	55.9	74.0	18.1	Vertical				
12205.0	2.9	52.5	55.4	74.0	18.6	Horizontal				

Result of Tx mode (2441.0 MHz) (GFSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Average Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@3m		Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m					
4882.0	2.1	41.6	43.7	54.0	10.3	Vertical				
4882.0	-0.2	42.5	42.3	54.0	11.7	Horizontal				
7323.0	-5.6	45.2	39.6	54.0	14.4	Vertical				
7323.0	-6.1	46.3	40.2	54.0	13.8	Horizontal				
9764.0	-7.8	48.1	40.3	54.0	13.7	Vertical				
9764.0	-8.8	48.9	40.1	54.0	13.9	Horizontal				
12205.0	-10.8	51.6	40.8	54.0	13.2	Vertical				
12205.0	-11.5	52.5	41.0	54.0	13.0	Horizontal				



Date: 2014-01-02 Page 14 of 87

No.: DM113697

Result of Tx mode (2480.0 MHz) (GFSK mode) (9kHz - 30MHz): Pass

Field Strength of Spurious Emissions							
Average Value							
Frequency	Measured	Correction	Field	Field	Limit	E-Field	
	Level	Factor	Strength	Strength		Polarity	
MHz	dΒμV	dB/m	dBµV/m	$\mu V/m$	$\mu V/m$		
	Emissions detected are more than 20 dB below the FCC Limits						

Results of Tx mode (2480.0 MHz) (GFSK mode) (30MHz - 1000MHz): PASS

	Field Strength of Spurious Emissions							
Average Value								
Frequency	Measured	Correction	Field	Field	Limit	E-Field		
	Level	Factor	Strength	Strength		Polarity		
MHz	dΒμV	dB/m	$dB\mu V/m$	$\mu V/m$	$\mu V/m$			
	Emissions detected are more than 20 dB below the FCC Limits							

Result of Tx mode (2480.0 MHz) (GFSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Peak Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@3m		Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m					
4960.0	20.1	41.4	61.5	74.0	12.5	Vertical				
4960.0	16.6	42.7	59.3	74.0	14.7	Horizontal				
7440.0	9.4	45.6	55.0	74.0	19.0	Vertical				
7440.0	8.0	46.5	54.5	74.0	19.5	Horizontal				
9920.0	7.1	48.6	55.7	74.0	18.3	Vertical				
9920.0	5.6	49.7	55.3	74.0	18.7	Horizontal				
12400.0	3.9	51.7	55.6	74.0	18.4	Vertical				
12400.0	3.1	52.7	55.8	74.0	18.2	Horizontal				



Date: 2014-01-02 Page 15 of 87

No.: DM113697

Result of Tx mode (2480.0 MHz) (GFSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Average Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@3m	C	Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m					
4960.0	1.7	41.4	43.1	54.0	10.9	Vertical				
4960.0	0.7	42.7	43.4	54.0	10.6	Horizontal				
7440.0	-5.9	45.6	39.7	54.0	14.3	Vertical				
7440.0	-7.4	46.5	39.1	54.0	14.9	Horizontal				
9920.0	-8.0	48.6	40.6	54.0	13.4	Vertical				
9920.0	-10.1	49.7	39.6	54.0	14.4	Horizontal				
12400.0	-11.5	51.7	40.2	54.0	13.8	Vertical				
12400.0	-11.6	52.7	41.1	54.0	12.9	Horizontal				

Result of Tx mode (2402.0 MHz) (π /4-DOPSK mode) (9kHz – 30MHz): Pass

Result of 1x mode (2402.0 W1112) (W4-DQ1 51x mode) (5x112 – 50W1112). I ass								
Field Strength of Spurious Emissions								
Average Value								
Frequency	Measured	Correction	Field	Field	Limit	E-Field		
	Level	Factor	Strength	Strength		Polarity		
MHz	dΒμV	dB/m	$dB\mu V/m$	$\mu V/m$	$\mu V/m$			
	Emissions	detected are r	nore than 20	dB below the	FCC Limits			

Result of Tx mode (2402.0 MHz) (π/4-DOPSK mode) (30MHz – 1GHz): Pass

	Field Strength of Spurious Emissions								
Average Value									
Frequency	Measured	Correction	Field	Field	Limit	E-Field			
	Level	Factor	Strength	Strength		Polarity			
MHz	dΒμV	dB/m	$dB\mu V/m$	$\mu V/m$	$\mu V/m$				
	Emissions detected are more than 20 dB below the FCC Limits								



Date: 2014-01-02 Page 16 of 87

No.: DM113697

Result of Tx mode (2402.0 MHz) (π /4-DQPSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Peak Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@3m		Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m					
4804.0	19.4	41.5	60.9	74.0	13.1	Vertical				
4804.0	16.9	42.4	59.3	74.0	14.7	Horizontal				
7206.0	10.0	45.1	55.1	74.0	18.9	Vertical				
7206.0	9.1	46.2	55.3	74.0	18.7	Horizontal				
9608.0	7.2	48.0	55.2	74.0	18.8	Vertical				
9608.0	5.7	48.8	54.5	74.0	19.5	Horizontal				
12010.0	3.5	51.5	55.0	74.0	19.0	Vertical				
12010.0	3.5	52.4	55.9	74.0	18.1	Horizontal				

Result of Tx mode (2402.0 MHz) (π /4-DQPSK mode) (Above 1GHz): Pass

		Field Streng	th of Spurio	us Emissions						
	Average Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@3m		Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m					
4804.0	1.9	41.5	43.4	54.0	10.6	Vertical				
4804.0	0.6	42.4	43.0	54.0	11.0	Horizontal				
7206.0	-5.0	45.1	40.1	54.0	13.9	Vertical				
7206.0	-6.7	46.2	39.5	54.0	14.5	Horizontal				
9608.0	-8.6	48.0	39.4	54.0	14.6	Vertical				
9608.0	-9.6	48.8	39.2	54.0	14.8	Horizontal				
12010.0	-12.3	51.5	39.2	54.0	14.8	Vertical				
12010.0	-12.3	52.4	40.1	54.0	13.9	Horizontal				



Date: 2014-01-02 Page 17 of 87

No.: DM113697

Result of Tx mode (2441.0 MHz) (π/4-DQPSK mode) (9kHz – 30MHz): Pass

	Field Strength of Spurious Emissions							
Average Value								
Frequency	Measured	Correction	Field	Field	Limit	E-Field		
	Level	Factor	Strength	Strength		Polarity		
MHz	dΒμV	dB/m	$dB\mu V/m$	$\mu V/m$	$\mu V/m$			
	Emissions detected are more than 20 dB below the FCC Limits							

Results of Tx mode (2441.0 MHz) (π /4-DQPSK mode) (30MHz – 1000MHz): PASS

Field Strength of Spurious Emissions							
Average Value							
Frequency	Measured	Correction	Field	Field	Limit	E-Field	
	Level	Factor	Strength	Strength		Polarity	
MHz	dΒμV	dB/m	dBµV/m	$\mu V/m$	$\mu V/m$		
	Emissions detected are more than 20 dB below the FCC Limits						

Result of Tx mode (2441.0 MHz) (π /4-DQPSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions								
Peak Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m				
4882.0	20.4	41.6	62.0	74.0	12.0	Vertical			
4882.0	16.9	42.5	59.4	74.0	14.6	Horizontal			
7323.0	9.4	45.2	54.6	74.0	19.4	Vertical			
7323.0	9.0	46.3	55.3	74.0	18.7	Horizontal			
9764.0	6.9	48.1	55.0	74.0	19.0	Vertical			
9764.0	6.4	48.9	55.3	74.0	18.7	Horizontal			
12205.0	3.8	51.6	55.4	74.0	18.6	Vertical			
12205.0	3.2	52.5	55.7	74.0	18.3	Horizontal			



Date: 2014-01-02 Page 18 of 87

No.: DM113697

Result of Tx mode (2441.0 MHz) (π/4-DOPSK mode) (Above 1GHz): Pass

Result of TA III	tesuit of 1x mode (2441.0 MHz) (7/4-DQFSK mode) (Above 1GHz): Pass								
	Field Strength of Spurious Emissions								
	Average Value								
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m				
4882.0	2.3	41.6	43.9	54.0	10.1	Vertical			
4882.0	0.2	42.5	42.7	54.0	11.3	Horizontal			
7323.0	-5.9	45.2	39.3	54.0	14.7	Vertical			
7323.0	-6.8	46.3	39.5	54.0	14.5	Horizontal			
9764.0	-9.0	48.1	39.1	54.0	14.9	Vertical			
9764.0	-10.0	48.9	38.9	54.0	15.1	Horizontal			
12205.0	-11.5	51.6	40.1	54.0	13.9	Vertical			
12205.0	-12.3	52.5	40.2	54.0	13.8	Horizontal			

Result of Tx mode (2480.0 MHz) (π /4-DQPSK mode) (9kHz – 30MHz): Pass

Field Strength of Spurious Emissions							
Average Value							
Frequency	Measured	Correction	Field	Field	Limit	E-Field	
	Level	Factor	Strength	Strength		Polarity	
MHz	dΒμV	dB/m	$dB\mu V/m$	$\mu V/m$	$\mu V/m$		
Emissions detected are more than 20 dB below the FCC Limits							

Results of Tx mode (2480.0 MHz) (π /4-DQPSK mode) (30MHz – 1000MHz): PASS

Field Strength of Spurious Emissions							
Average Value							
Frequency	Measured	Correction	Field	Field	Limit	E-Field	
	Level	Factor	Strength	Strength		Polarity	
MHz	dΒμV	dB/m	dBμV/m	$\mu V/m$	$\mu V/m$		
	Emissions detected are more than 20 dB below the FCC Limits						



Date: 2014-01-02 Page 19 of 87

No.: DM113697

Result of Tx mode (2480.0 MHz) (π /4-DQPSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Peak Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@3m		Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m					
4960.0	19.4	41.4	60.8	74.0	13.2	Vertical				
4960.0	16.2	42.7	58.9	74.0	15.1	Horizontal				
7440.0	8.9	45.6	54.5	74.0	19.5	Vertical				
7440.0	8.7	46.5	55.2	74.0	18.8	Horizontal				
9920.0	6.0	48.6	54.6	74.0	19.4	Vertical				
9920.0	4.9	49.7	54.6	74.0	19.4	Horizontal				
12400.0	4.0	51.7	55.7	74.0	18.3	Vertical				
12400.0	2.6	52.7	55.3	74.0	18.7	Horizontal				

Result of Tx mode (2480.0 MHz) (π /4-DQPSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions								
	Average Value								
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m				
4960.0	1.5	41.4	42.9	54.0	11.1	Vertical			
4960.0	0.0	42.7	42.7	54.0	11.3	Horizontal			
7440.0	-6.5	45.6	39.1	54.0	14.9	Vertical			
7440.0	-6.9	46.5	39.6	54.0	14.4	Horizontal			
9920.0	-9.6	48.6	39.0	54.0	15.0	Vertical			
9920.0	-10.5	49.7	39.2	54.0	14.8	Horizontal			
12400.0	-11.8	51.7	39.9	54.0	14.1	Vertical			
12400.0	-12.2	52.7	40.5	54.0	13.5	Horizontal			



Date: 2014-01-02 Page 20 of 87

No.: DM113697

Result of Tx mode (2402.0 MHz) (8DPSK) (9kHz – 30MHz): Pass

Field Strength of Spurious Emissions								
Average Value								
Frequency	Measured	Correction	Field	Field	Limit	E-Field		
	Level	Factor	Strength	Strength		Polarity		
MHz	dΒμV	dB/m	$dB\mu V/m$	$\mu V/m$	$\mu V/m$			
	Emissions detected are more than 20 dB below the FCC Limits							

Result of Tx mode (2402.0 MHz) (8DPSK) (30MHz - 1GHz): Pass

result of Thing	Result of TA mode (2402.0 MIII2) (ODI SIX) (SUMILE TOTIZ). Tuss								
Field Strength of Spurious Emissions									
Average Value									
Frequency	Measured	Correction	Field	Field	Limit	E-Field			
	Level	Factor	Strength	Strength		Polarity			
MHz	dΒμV	dB/m	dBµV/m	$\mu V/m$	$\mu V/m$				
	Emissions detected are more than 20 dB below the FCC Limits								

Result of Tx mode (2402.0 MHz) (8DPSK) (Above 1GHz): Pass

	Field Strength of Spurious Emissions								
Peak Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m				
4804.0	20.4	41.5	61.9	74.0	12.1	Vertical			
4804.0	16.4	42.4	58.8	74.0	15.2	Horizontal			
7206.0	9.7	45.1	54.8	74.0	19.2	Vertical			
7206.0	8.4	46.2	54.6	74.0	19.4	Horizontal			
9608.0	7.1	48.0	55.1	74.0	18.9	Vertical			
9608.0	5.9	48.8	54.7	74.0	19.3	Horizontal			
12010.0	4.1	51.8	55.9	74.0	18.1	Vertical			
12010.0	3.2	52.4	55.6	74.0	18.4	Horizontal			



Date: 2014-01-02 Page 21 of 87

No.: DM113697

Result of Tx mode (2402.0 MHz) (8DPSK) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Average Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@3m		Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m					
4804.0	2.0	41.5	43.5	54.0	10.5	Vertical				
4804.0	0.5	42.4	42.9	54.0	11.1	Horizontal				
7206.0	-5.8	45.1	39.3	54.0	14.7	Vertical				
7206.0	-7.3	46.2	38.9	54.0	15.1	Horizontal				
9608.0	-8.4	48.0	39.6	54.0	14.4	Vertical				
9608.0	-9.6	48.8	39.2	54.0	14.8	Horizontal				
12010.0	-11.3	51.8	40.5	54.0	13.5	Vertical				
12010.0	-12.1	52.4	40.3	54.0	13.7	Horizontal				

Result of Tx mode (2441.0 MHz) (8DPSK) (9kHz - 30MHz): Pass

Field Strength of Spurious Emissions							
Average Value							
Frequency	Measured	Correction	Field	Field	Limit	E-Field	
	Level	Factor	Strength	Strength		Polarity	
MHz	dΒμV	dB/m	dBμV/m	μV/m	$\mu V/m$		
	Emissions detected are more than 20 dB below the FCC Limits						

Results of Tx mode (2441.0 MHz) (8DPSK) (30MHz - 1000MHz): PASS

	Field Strength of Spurious Emissions						
Average Value							
Frequency	Measured	Correction	Field	Field	Limit	E-Field	
	Level	Factor	Strength	Strength		Polarity	
MHz	MHz $dB\mu V$ dB/m $dB\mu V/m$ $\mu V/m$ $\mu V/m$						
	Emissions detected are more than 20 dB below the FCC Limits						



Date: 2014-01-02 Page 22 of 87

No.: DM113697

Result of Tx mode (2441.0 MHz) (8DPSK) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Peak Value							
Frequency	Measured	Correction	Field	Limit	Margin	E-Field		
	Level @3m	Factor	Strength	@3m		Polarity		
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m			
4882.0	20.4	41.6	62.0	74.0	12.0	Vertical		
4882.0	16.8	42.5	59.3	74.0	14.7	Horizontal		
7323.0	9.4	45.2	54.6	74.0	19.4	Vertical		
7323.0	8.4	46.3	54.7	74.0	19.3	Horizontal		
9764.0	6.6	48.1	54.7	74.0	19.3	Vertical		
9764.0	6.0	48.9	54.9	74.0	19.1	Horizontal		
12205.0	3.9	51.6	55.5	74.0	18.5	Vertical		
12205.0	3.2	52.5	55.7	74.0	18.3	Horizontal		

Result of Tx mode (2441.0 MHz) (8DPSK) (Above 1GHz): Pass

	Field Strength of Spurious Emissions							
	Average Value							
Frequency	Measured	Correction	Field	Limit	Margin	E-Field		
	Level @3m	Factor	Strength	@3m		Polarity		
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m			
4882.0	1.6	41.6	43.2	54.0	10.8	Vertical		
4882.0	-0.3	42.5	42.2	54.0	11.8	Horizontal		
7323.0	-6.3	45.2	38.9	54.0	15.1	Vertical		
7323.0	-7.6	46.3	38.7	54.0	15.3	Horizontal		
9764.0	-8.9	48.1	39.2	54.0	14.8	Vertical		
9764.0	-9.3	48.9	39.6	54.0	14.4	Horizontal		
12205.0	-11.3	51.6	40.3	54.0	13.7	Vertical		
12205.0	-12.4	52.5	40.1	54.0	13.9	Horizontal		



Date: 2014-01-02 Page 23 of 87

No.: DM113697

Result of Tx mode (2480.0 MHz) (8DPSK) (9kHz - 30MHz): Pass

	Field Strength of Spurious Emissions						
Average Value							
Frequency	Measured	Correction	Field	Field	Limit	E-Field	
	Level	Factor	Strength	Strength		Polarity	
MHz	MHz $dB\mu V$ dB/m $dB\mu V/m$ $\mu V/m$ $\mu V/m$						
	Emissions detected are more than 20 dB below the FCC Limits						

Results of Tx mode (2480.0 MHz) (8DPSK) (30MHz - 1000MHz): PASS

Field Strength of Spurious Emissions						
Average Value						
Frequency	Measured	Correction	Field	Field	Limit	E-Field
	Level	Factor	Strength	Strength		Polarity
MHz $dB\mu V$ dB/m $dB\mu V/m$ $\mu V/m$ $\mu V/m$						
	Emissions detected are more than 20 dB below the FCC Limits					

Result of Tx mode (2480.0 MHz) (8DPSK) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Peak Value							
Frequency	Measured	Correction	Correction Field Limit Margin					
	Level @3m	Factor	Strength	@3m		Polarity		
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m			
4960.0	20.2	41.4	61.6	74.0	12.4	Vertical		
4960.0	16.7	42.7	59.4	74.0	14.6	Horizontal		
7440.0	8.8	45.6	54.4	74.0	19.6	Vertical		
7440.0	8.0	46.5	54.5	74.0	19.5	Horizontal		
9920.0	6.9	48.6	55.5	74.0	18.5	Vertical		
9920.0	5.4	49.7	55.1	74.0	18.9	Horizontal		
12400.0	3.6	51.7	55.3	74.0	18.7	Vertical		
12400.0	2.7	52.7	55.4	74.0	18.6	Horizontal		



Date: 2014-01-02 Page 24 of 87

No.: DM113697

Result of Tx mode (2480.0 MHz) (8DPSK) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Average Value							
Frequency	Measured	Correction	Field	Limit	Margin	E-Field		
	Level @3m	Factor	Strength	@3m		Polarity		
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m			
4960.0	1.4	41.4	42.8	54.0	11.2	Vertical		
4960.0	0.0	42.7	42.7	54.0	11.3	Horizontal		
7440.0	-6.6	45.6	39.0	54.0	15.0	Vertical		
7440.0	-7.6	46.5	38.9	54.0	15.1	Horizontal		
9920.0	-9.0	48.6	39.6	54.0	14.4	Vertical		
9920.0	-9.2	49.7	40.5	54.0	13.5	Horizontal		
12400.0	-11.3	51.7	40.4	54.0	13.6	Vertical		
12400.0	-12.9	52.7	39.8	54.0	14.2	Horizontal		

Remarks:

* Denotes restricted band of operation.

Measurements were made using a peak detector. Any emission less than 1000MHz and falling within the restricted bands of FCC Rules Part 15 Section 15.205 and the limits of FCC Rules Part 15 Section 15.209 were applied.

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty: (9kHz - 30MHz): 3.3dB

(30MHz - 1GHz): 4.6dB (1GHz - 26GHz): 4.4dB

Emissions in the vertical and horizontal polarizations have been investigated and the worst-case test results are recorded in this report.



Date: 2014-01-02 Page 25 of 87

No.: DM113697

Limits for Radiated Emissions [FCC 47 CFR 15,209 Class B]:


mits for Radiated Emissions [1 CC 47 CTR 13:207 Class D].					
Frequency Range	Quasi-Peak Limits				
[MHz]	$[\mu V/m]$				
0.009-0.490	2400/F (kHz)				
0.490-1.705	24000/F (kHz)				
1.705-30	30				
30-88	100				
88-216	150				
216-960	200				
Above960	500				

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Result of Bluetooth Communication mode (EUT paired with iPod) (GFSK / π /4-DQPSK/ 8DPSK) (30MHz – 1GHz): Pass

Please refer to the following table for result details

Horizontal

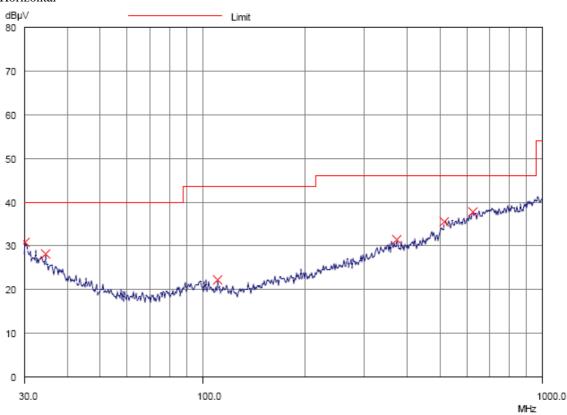

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Date: 2014-01-02 Page 26 of 87

No.: DM113697

Result of Bluetooth Communication mode (EUT paired with iPod) (GFSK / π /4-DQPSK/8DPSK) (30MHz - 1GHz): Pass

	Radiated Emissions						
	Quasi-Peak						
Emission	E-Field	Level	Limit	Level	Limit		
Frequency	Polarity	@3m	@3m	@3m	@3m		
MHz		dBμV/m	dBμV/m	μV/m	μV/m		
30.1	Horizontal	30.8	40.0	34.7	100		
34.6	Horizontal	28.3	40.0	26.0	100		
110.8	Horizontal	22.3	43.5	13.0	150		
373.6	Horizontal	31.4	46.0	37.2	200		
514.1	Horizontal	35.7	46.0	61.0	200		
625.8	Horizontal	37.8	46.0	77.6	200		



Date: 2014-01-02 Page 27 of 87

No.: DM113697


Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:

mits for Radiated Emissions [1 CC 47 CTR 13:207 Class D].					
Frequency Range	Quasi-Peak Limits				
[MHz]	$[\mu V/m]$				
0.009-0.490	2400/F (kHz)				
0.490-1.705	24000/F (kHz)				
1.705-30	30				
30-88	100				
88-216	150				
216-960	200				
Above960	500				

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Result of Bluetooth Communication mode (EUT paired with iPod) (GFSK / π /4-DQPSK/ 8DPSK) (30MHz – 1GHz): Pass

Please refer to the following table for result details

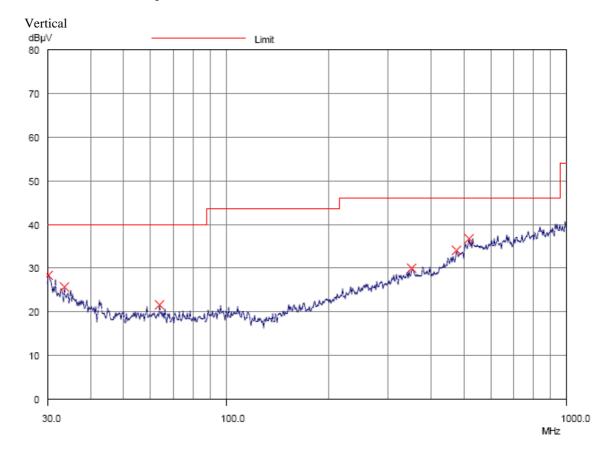

Result of Bluetooth Communication mode (EUT paired with iPod) (GFSK / π /4-DQPSK/8DPSK)

The Hong Kong Standards and Testing Centre Ltd.



Date: 2014-01-02 Page 28 of 87

No.: DM113697

(30MHz - 1GHz): Pass

3011112 - 10112). 1 ass							
	Radiated Emissions						
	Quasi-Peak						
Emission	E-Field	Level	Limit	Level	Limit		
Frequency	Polarity	@3m	@3m	@3m	@3m		
MHz		dBµV/m	dBµV/m	μV/m	μV/m		
30.1	Vertical	28.4	40.0	26.3	100		
33.5	Vertical	25.9	40.0	19.7	100		
63.8	Vertical	21.7	40.0	12.2	100		
349.8	Vertical	30.1	46.0	32.0	200		
474.3	Vertical	34.2	46.0	51.3	200		
516.9	Vertical	36.8	46.0	69.2	200		



Date: 2014-01-02 Page 29 of 87

No.: DM113697


Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:

07 Class D].
Quasi-Peak Limits
$[\mu V/m]$
2400/F (kHz)
24000/F (kHz)
30
100
150
200
500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Result of Bluetooth Communication + Charging mode (EUT paired with iPod, USB port connected to PC) (GFSK / π /4-DQPSK / 8DPSK) (30MHz – 1GHz): Pass

Please refer to the following table for result details

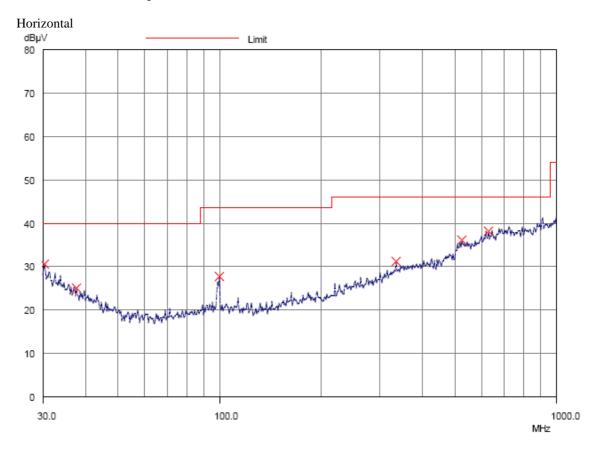



Date: 2014-01-02 Page 30 of 87

No.: DM113697

Result of Bluetooth Communication + Charging mode (EUT paired with iPod, USB port connected to PC) (CFSK / π/4-DOPSK / SDPSK) (30MHz = 1CHz). Page

Radiated Emissions Ouasi-Peak					
					Emission
Frequency	Polarity	@3m	@3m	@3m	@3m
MHz		dBμV/m	dΒμV/m	μV/m	μV/m
30.3	Horizontal	30.6	40.0	33.9	100
37.8	Horizontal	25.2	40.0	18.2	100
100.1	Horizontal	27.8	43.5	24.5	150
333.8	Horizontal	31.3	46.0	36.7	200
524.0	Horizontal	36.1	46.0	63.8	200
627.1	Horizontal	38.3	46.0	82.2	200



Date: 2014-01-02 Page 31 of 87

No.: DM113697


Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:

Emits for Radiated Emissions [FCC 47 CFR 13.207 Class D].			
Frequency Range	Quasi-Peak Limits		
[MHz]	$[\mu V/m]$		
0.009-0.490	2400/F (kHz)		
0.490-1.705	24000/F (kHz)		
1.705-30	30		
30-88	100		
88-216	150		
216-960	200		
Above960	500		

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Result of Bluetooth Communication + Charging mode (EUT paired with iPod, USB port connected to PC) (GFSK / π /4-DQPSK / 8DPSK) (30MHz – 1GHz): Pass

Please refer to the following table for result details

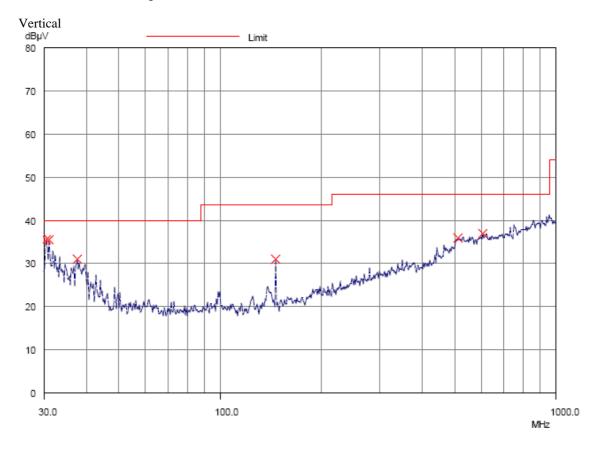



Date: 2014-01-02 Page 32 of 87

No.: DM113697

Result of Bluetooth Communication + Charging mode (EUT paired with iPod, USB port connected to PC) (GFSK / π/4-DOPSK / 8DPSK) (30MHz – 1GHz): Pass

Radiated Emissions					
Quasi-Peak					
Emission	E-Field	Level	Limit	Level	Limit
Frequency	Polarity	@3m	@3m	@3m	@3m
MHz		dBμV/m	dBμV/m	μV/m	μV/m
30.4	Vertical	35.2	40.0	57.5	100
31.1	Vertical	35.3	40.0	58.2	100
37.7	Vertical	31.0	40.0	35.5	100
147.4	Vertical	31.1	43.5	35.9	150
509.4	Vertical	36.1	46.0	63.8	200
604.6	Vertical	37.1	46.0	71.6	200

Remarks:

Calculated measurement uncertainty (30MHz - 1GHz): 4.6dB

Emissions in the vertical and horizontal polarizations have been investigated and the worst-case test results are recorded in this report.



Date: 2014-01-02 Page 33 of 87

No.: DM113697

3.1.3 AC Mains Conducted Emissions (0.15MHz to 30MHz)

Test Requirement: FCC 47CFR 15.207 Test Method: ANSI C63.4:2009 Test Date: 2013-12-19


Mode of Operation: Bluetooth Communication + Charging mode

Test Voltage: 117Va.c., 60Hz

Test Method:

The test was performed in accordance with ANSI C63.4: 2009, with the following: an initial measurement was performed in peak and average detection mode on the live line, any emissions recorded within 30dB of the relevant limit line were re-measured using quasi-peak and average detection on the live and neutral lines with the worst case recorded in the table of results.

Test Setup:

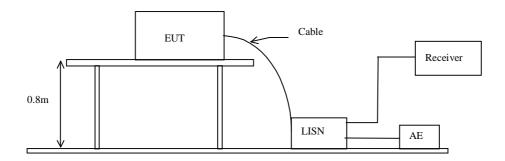



Date: 2014-01-02 Page 34 of 87

No.: DM113697

Limit for Conducted Emissions (FCC 47 CFR 15.207):


Frequency Range	Quasi-Peak Limits	Average
[MHz]	[dBµV]	[dBµV]
0.15-0.5	66 to 56*	56 to 46*
0.5-5.0	56	46
5.0-30.0	60	50

^{*} Decreases with the logarithm of the frequency.

Limits for Conducted Emissions Test, please refer to limit lines (Quasi-Peak and Average) in the following diagram.

Result of Bluetooth Communication + Charging mode (EUT paired with iPod, USB port connected to PC, PC Mains) (L): PASS

Please refer to the following diagram for individual results.

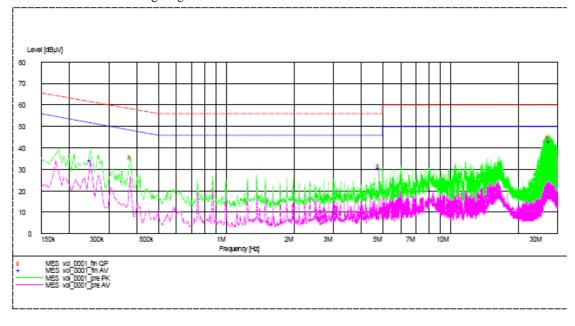



Date: 2014-01-02 Page 35 of 87

No.: DM113697

Result of Bluetooth Communication mode (EUT paired with iPod, USB port connected to PC, PC Mains) (L): PASS

1 C Walls) (L). I ASS					
		Quasi-peak		Average	
Conductor	Frequency	Level	Limit	Level	Limit
Live or Neutral	MHz	dΒμV	dΒμV	dΒμV	dΒμV
Live	0.300	_*_	_*_	28.7	50.0
Live	0.900	_*_	_*_	30.0	46.0
Live	3.125	_*_	_*_	21.6	46.0
Live	16.025	_*_	_*_	23.0	50.0
Live	0.180	37.7	65.0	_*_	_*_
Live	0.895	30.6	56.0	_*_	_*_
Live	3.125	23.8	56.0	_*_	_*_
Live	16.325	29.6	60.0	_*_	_*_



Date: 2014-01-02 Page 36 of 87

No.: DM113697

Limit for Conducted Emissions (FCC 47 CFR 15.207):


Frequency Range	Quasi-Peak Limits	Average	
[MHz]	[dBµV]	[dBµV]	
0.15-0.5	66 to 56*	56 to 46*	
0.5-5.0	56	46	
5.0-30.0	60	50	

^{*} Decreases with the logarithm of the frequency.

Limits for Conducted Emissions Test, please refer to limit lines (Quasi-Peak and Average) in the following diagram.

Result of Bluetooth Communication + Charging mode (EUT paired with iPod, USB port connected to PC, PC Mains) (N): PASS

Please refer to the following diagram for individual results.

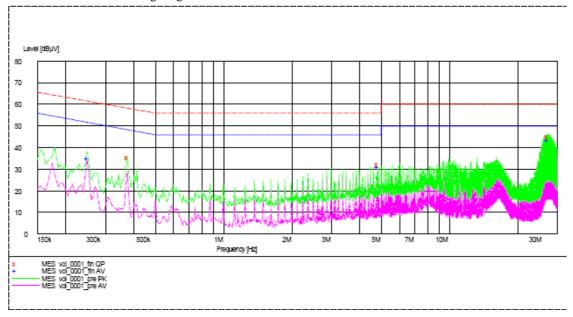



Date: 2014-01-02 Page 37 of 87

No.: DM113697

Result of Bluetooth Communication + Charging mode (EUT paired with iPod, USB port connected

to PC, PC Mains) (N): PASS

		Quasi-peak		Average	
Conductor	Frequency	Level	Limit	Level	Limit
Live or Neutral	MHz	dΒμV	dΒμV	dBμV	dΒμV
Neutral	0.250	_*_	_*_	35.0	52.0
Neutral	4.810	_*_	_*_	31.0	46.0
Neutral	27.235	_*_	_*_	43.8	50.0
Neutral	0.375	35.6	58.0	_*_	_*_
Neutral	4.810	32.1	56.0	_*_	_*_
Neutral	27.235	45.2	60.0	_*_	_*_

Remarks:

Calculated measurement uncertainty (0.15MHz - 30MHz): 3.2dB

-*- Emission(s) that is far below the corresponding limit line.



Date: 2014-01-02 Page 38 of 87

No.: DM113697

3.1.4 Number of Hopping Frequency

Limit of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels

Test Method:

The RF output of the EUT was connected to the spectrum analyzer by a low loss cable.

Spectrum Analyzer Setting:

RBW = 1MHz, $VBW \ge RBW$, Sweep = Auto, Span = the frequency band of operation <math>Detector = Peak, Trace = Max. hold

Test Setup:

As Test Setup of clause 3.1.1 in this test report.


Measurement Data:

GFSK: 79 of 79 Channel







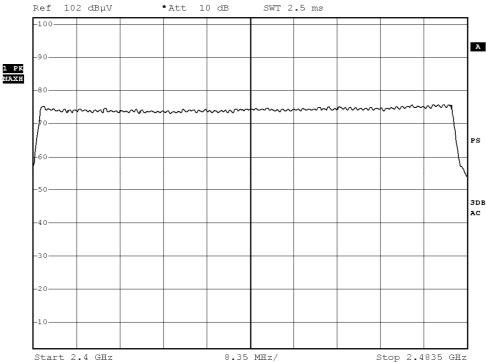




Date: 2014-01-02 Page 39 of 87

No.: DM113697

$\pi/4$ -DQPSK: 79 of 79 Channel

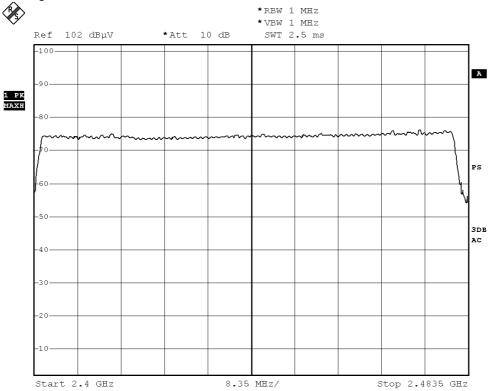




Date: 2014-01-02 Page 40 of 87

No.: DM113697

8DPSK: 79 of 79 Channel

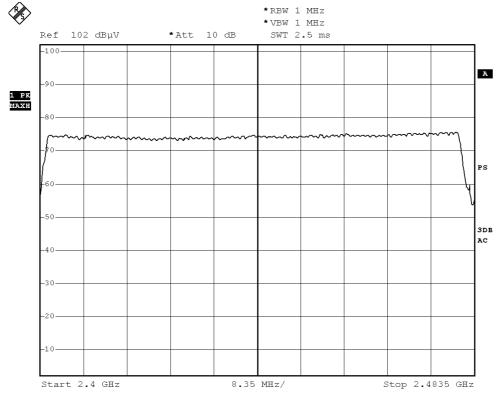



Date: 2014-01-02 Page 41 of 87

No.: DM113697

3.1.5 20dB Bandwidth

Test Requirement: FCC 47CFR 15.247(a)(1)

Test Method: ANSI C63.4:2009

Test Date: 2013-12-25

Mode of Operation: Communication mode

Remark:

The result has been done on all the possible configurations for searching the worst cases.

Test Method:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

Test Setup:


As Test Setup of clause 3.1.1 in this test report.



Date: 2014-01-02 Page 42 of 87

No.: DM113697

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2402	0.684	Within 2400-2483.5

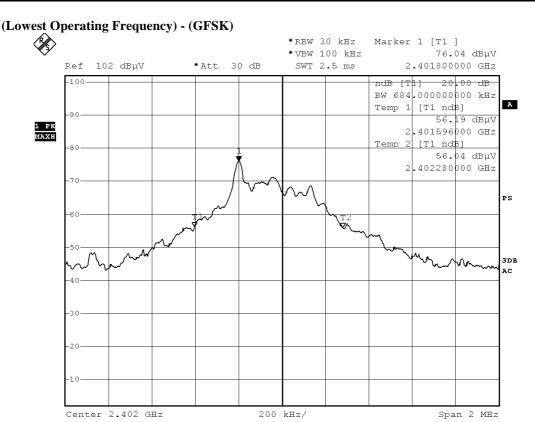

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org




Date: 2014-01-02 Page 43 of 87

No.: DM113697

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2441	0.724	Within 2400-2483.5

(Middle Operating Frequency) - (GFSK)

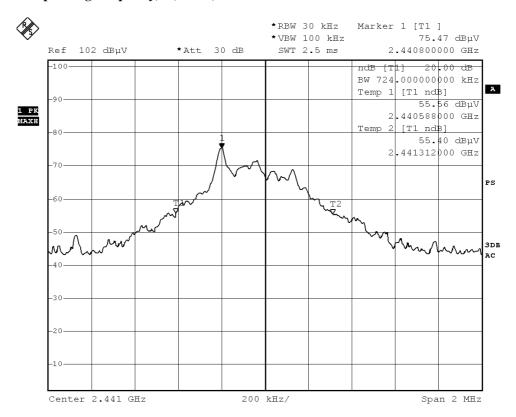




Date: 2014-01-02 Page 44 of 87

No.: DM113697

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2480	0.728	Within 2400-2483.5

(Highest Operating Frequency) - (GFSK)

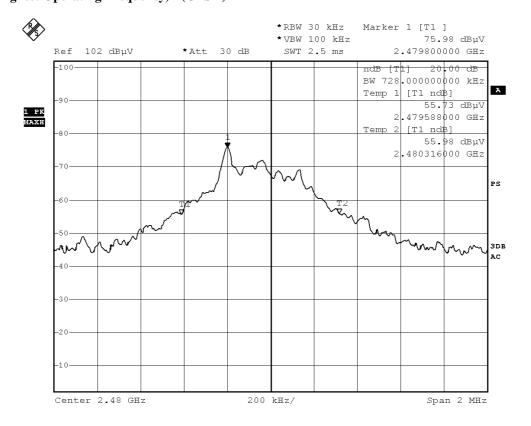

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org




Date: 2014-01-02 Page 45 of 87

No.: DM113697

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2402	1.095	Within 2400-2483.5

(Lowest Operating Frequency) - (π/4-DQPSK)

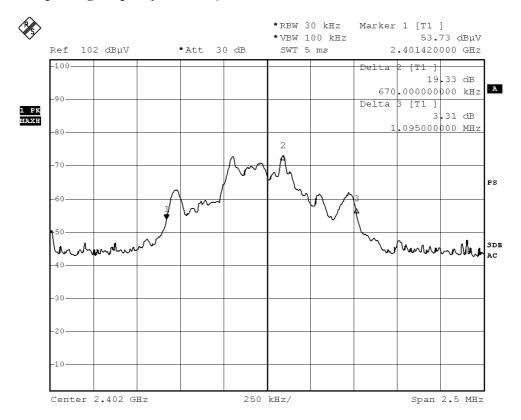




Date: 2014-01-02 Page 46 of 87

No.: DM113697

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2441	1.090	Within 2400-2483.5

(Middle Operating Frequency) - $(\pi/4 - DQPSK)$

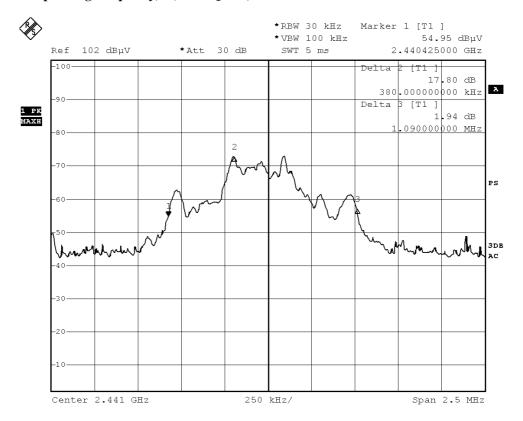

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org




Date: 2014-01-02 Page 47 of 87

No.: DM113697

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2480	1.092	Within 2400-2483.5

(Highest Operating Frequency) - $(\pi/4 - DQPSK)$

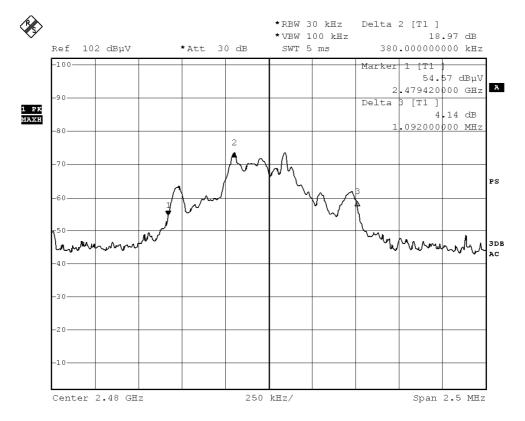




Date: 2014-01-02 Page 48 of 87

No.: DM113697

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2402	1.100	Within 2400-2483.5

(Lowest Operating Frequency) - (8DPSK)

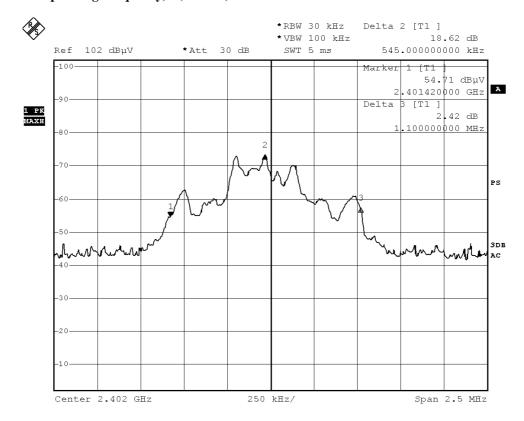




Date: 2014-01-02 Page 49 of 87

No.: DM113697

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2441	1.105	Within 2400-2483.5

(Middle Operating Frequency) - (8DPSK)

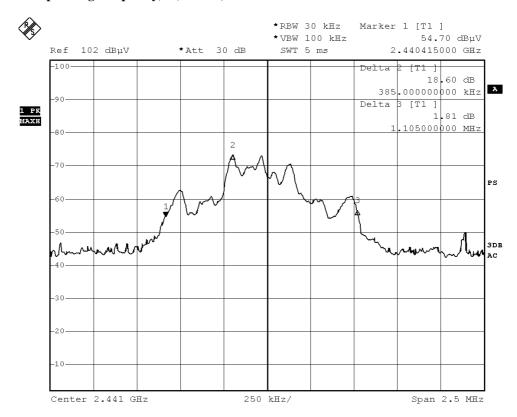




Date: 2014-01-02 Page 50 of 87

No.: DM113697

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2480	1.125	Within 2400-2483.5

(Highest Operating Frequency) - (8DPSK)

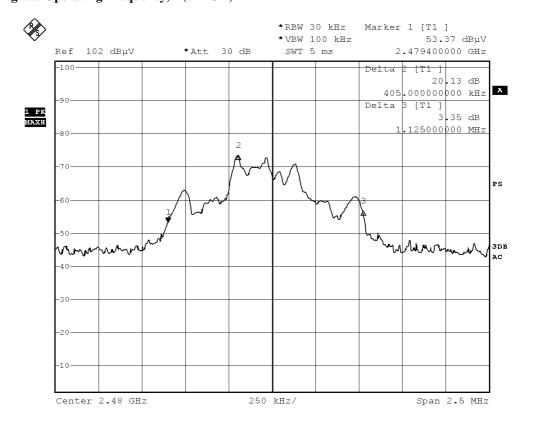

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Date: 2014-01-02 Page 51 of 87

No.: DM113697

3.1.6 Hopping Channel Separation

Requirements:

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Limit:


The measured minimum bandwidth * 2/3 = 1.125MHz * 2/3 = 749.99kHz



Date: 2014-01-02 Page 52 of 87


No.: DM113697

Channel separation = 1MHz (>749.99kHz) (GFSK)

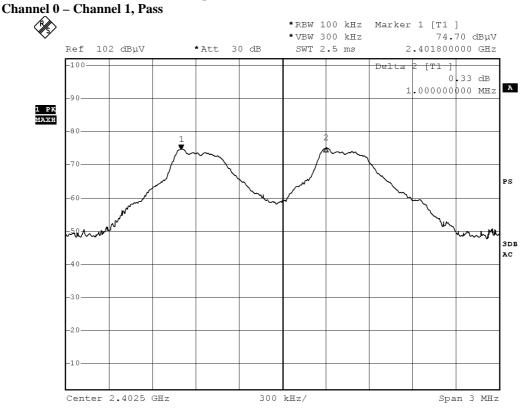




Date: 2014-01-02 Page 53 of 87

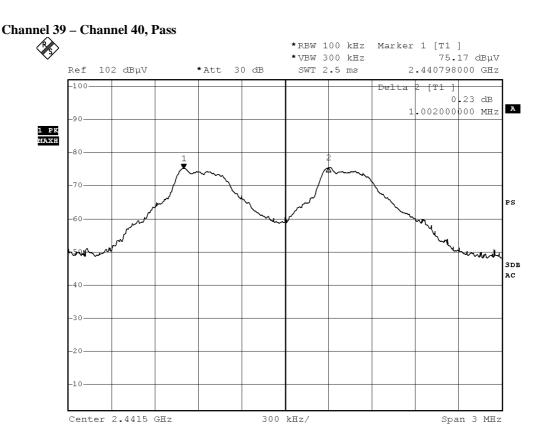



Date: 2014-01-02 Page 54 of 87

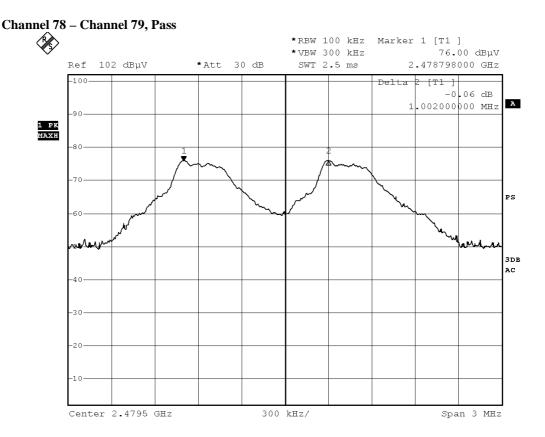




Date: 2014-01-02 Page 55 of 87


No.: DM113697

Channel separation = 1MHz (>749.99kHz) (π /4- DQPSK)

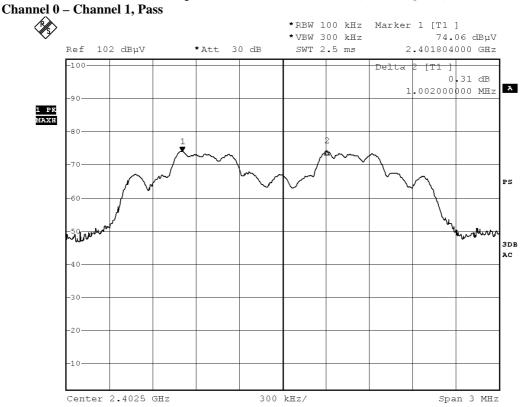




Date: 2014-01-02 Page 56 of 87

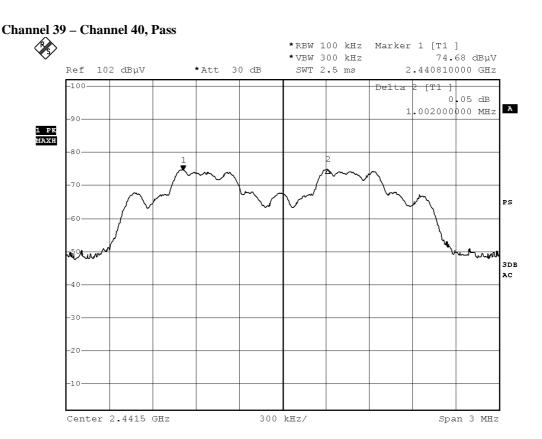



Date: 2014-01-02 Page 57 of 87

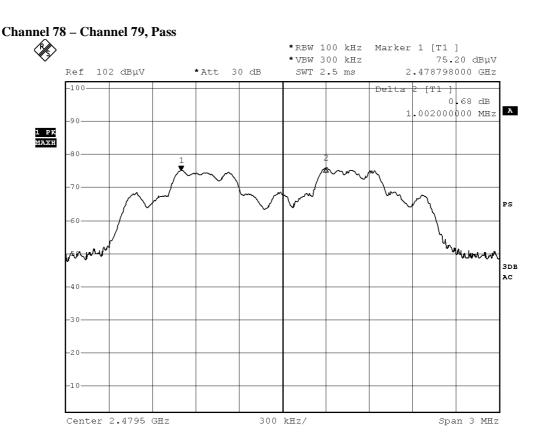




Date: 2014-01-02 Page 58 of 87


No.: DM113697

Channel separation = 1MHz (>749.99kHz) (8DPSK)

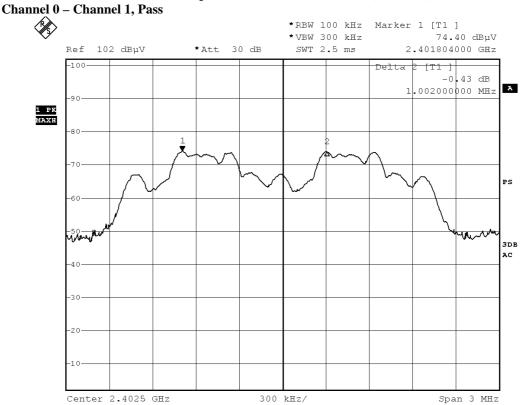




Date: 2014-01-02 Page 59 of 87

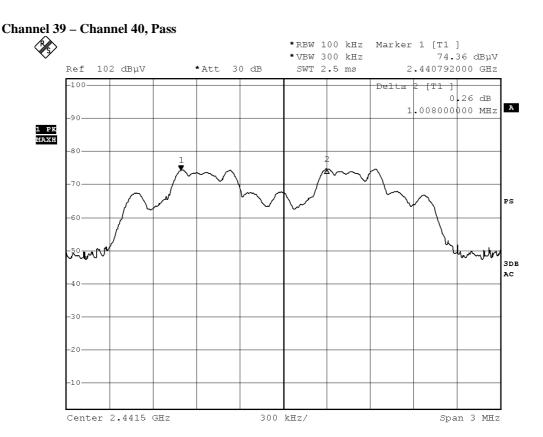



Date: 2014-01-02 Page 60 of 87

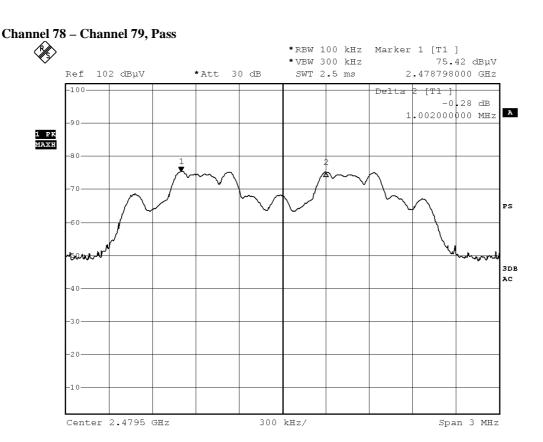




Date: 2014-01-02 Page 61 of 87

No.: DM113697


3.1.7 Band-edge Compliance of RF Conducted Emissions

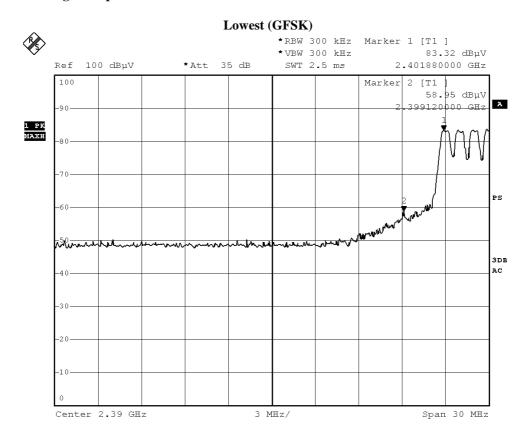

Field Strength of Band-edge Compliance						
Peak Value						
Frequency	Measured	Correction	Field	Limit	Margin	E-Field
	Level @3m	Factor	Strength	@3m		Polarity
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	$dB\mu V/m$	
2400.0	19.6	35.4	55.0	74.0	19.0	Vertical
	F	ield Strength	of Band-edg	ge Compliance		
		A	verage Valu	e		
Frequency	Measured	Correction	Field	Limit	Margin	E-Field
	Level @3m	Factor	Strength	@3m		Polarity
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	dBμV/m	
2400.0	4.8	35.4	40.2	54.0	13.8	Vertical



Date: 2014-01-02 Page 62 of 87

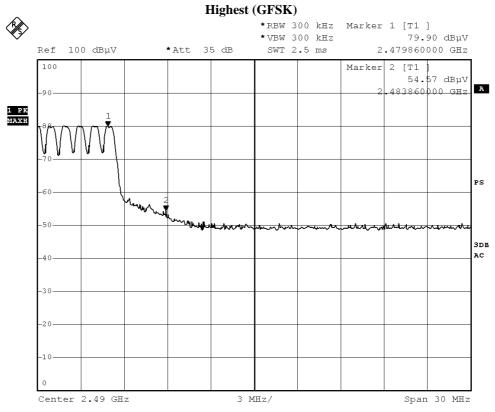

Field Strength of Band-edge Compliance						
Peak Value						
Frequency	Measured	Correction	Field	Limit	Margin	E-Field
	Level @3m	Factor	Strength	@3m		Polarity
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	dBμV/m	
2483.5	19.2	35.4	54.6	74.0	19.4	Horizontal
Field Strength of Band-edge Compliance						
	F	ield Strength	of Band-edg	ge Compliance		
	F	U	of Band-edg verage Valu	_		
Frequency	Measured	U		_	Margin	E-Field
Frequency		A	verage Valu	e		E-Field Polarity
Frequency MHz	Measured	Correction	verage Valu Field	e Limit		




Date: 2014-01-02 Page 63 of 87



Field Strength of Band-edge Compliance							
Peak Value							
Frequency	Measured	Correction	Field	Limit	Margin	E-Field	
	Level @3m	Factor	Strength	@3m		Polarity	
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	$dB\mu V/m$		
2400.0	19.8	35.4	55.2	74.0	18.8	Vertical	
	Field Strength of Band-edge Compliance						
		A	verage Valu	e			
Frequency	Measured	Correction	Field	Limit	Margin	E-Field	
	Level @3m	Factor	Strength	@3m		Polarity	
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	dBμV/m		
2400.0	5.3	35.4	40.7	54.0	13.3	Vertical	




Date: 2014-01-02 Page 64 of 87

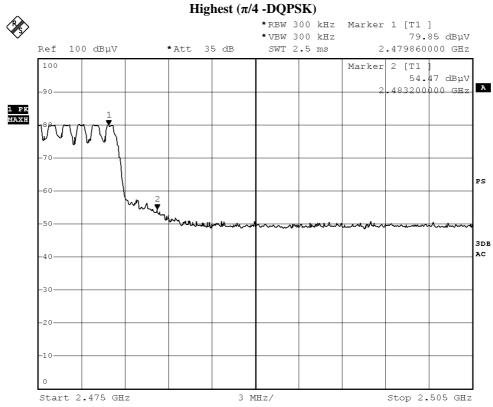

Field Strength of Band-edge Compliance							
Peak Value							
Frequency	Measured	Correction	Field	Limit	Margin	E-Field	
	Level @3m	Factor	Strength	@3m		Polarity	
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	$dB\mu V/m$		
2483.5	19.2	35.4	54.6	74.0	19.4	Horizontal	
	Field Strength of Band-edge Compliance						
		A	verage Valu	e			
Frequency	Measured	Correction	Field	Limit	Margin	E-Field	
	Level @3m	Factor	Strength	@3m		Polarity	
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	$dB\muV/m$		
2483.5	3.7	35.4	39.1	54.0	14.9	Horizontal	




Date: 2014-01-02 Page 65 of 87

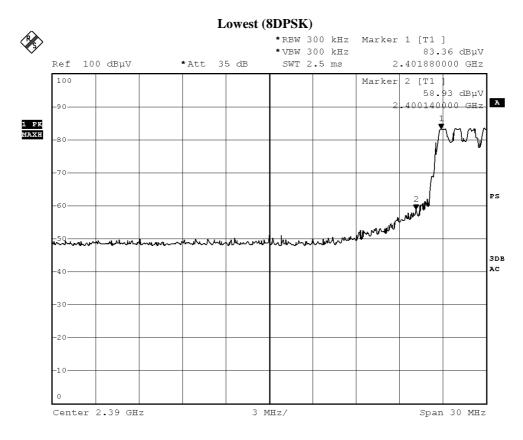

Field Strength of Band-edge Compliance							
Peak Value							
Frequency	Measured	Correction	Field	Limit	Margin	E-Field	
	Level @3m	Factor	Strength	@3m		Polarity	
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	$dB\mu V/m$		
2400.0	20.1	35.4	55.5	74.0	18.5	Vertical	
	Field Strength of Band-edge Compliance						
		A	verage Valu	e			
Frequency	Measured	Correction	Field	Limit	Margin	E-Field	
	Level @3m	Factor	Strength	@3m		Polarity	
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	$dB\mu V/m$		
2400.0	5.2	35.4	40.6	54.0	13.4	Vertical	



Date: 2014-01-02 Page 66 of 87

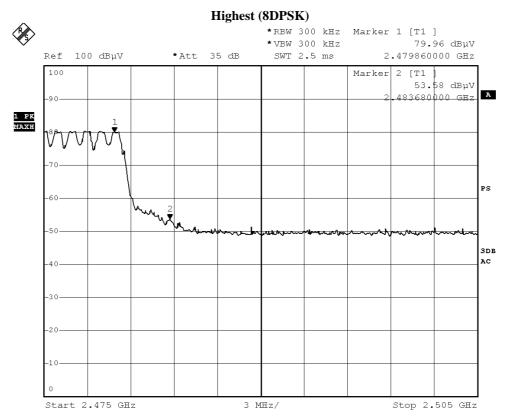

Field Strength of Band-edge Compliance							
Peak Value							
Frequency	Measured	Correction	Field	Limit	Margin	E-Field	
	Level @3m	Factor	Strength	@3m		Polarity	
MHz	dΒμV	dB/m	$dB\mu V/m$	dBμV/m	dBμV/m		
2483.5	19.2	35.4	54.6	74.0	19.4	Horizontal	
Field Strength of Band-edge Compliance							
	F	ield Strength	of Band-edg	ge Compliance			
	F	U	of Band-edg verage Valu	_			
Frequency	Measured	U		_	Margin	E-Field	
Frequency		A	verage Valu	e		E-Field Polarity	
Frequency	Measured	Correction	verage Valu Field	e Limit			



Date: 2014-01-02 Page 67 of 87

No.: DM113697

3.1.8 Time of Occupancy (Dwell Time)

Occupancy Time (Dwell time)

Requirements:


The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channel employed. No requirements for Digital Transmission System.

Dwell Time = Pulse Duration * hop rate / number of channel * observation duration

Observed duration: $0.4s \times 79 = 31.6s$

Measurement Data:

Channel Occupied in 8DPSK: 79 of 79 Channel

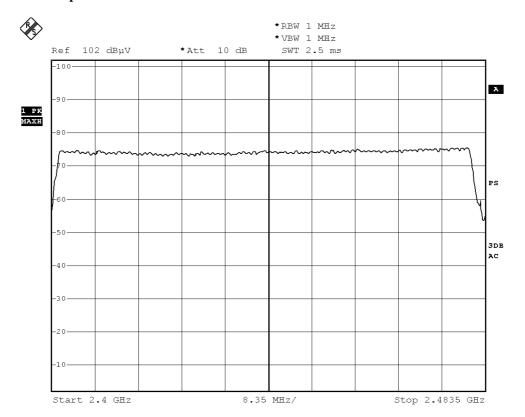




Date: 2014-01-02 Page 68 of 87

No.: DM113697

DH5 Packet:

DH5 Packet permit maximum 1600/79/6 = 3.37 hops per second in each channel (5 time slots RX, 1 time slot TX). The Dwell time is the time duration of the pulse times $3.37 \times 31.6 = 106.6$ within 31.6 seconds

Fig. A
[Pulse duration of Lowest Channel]

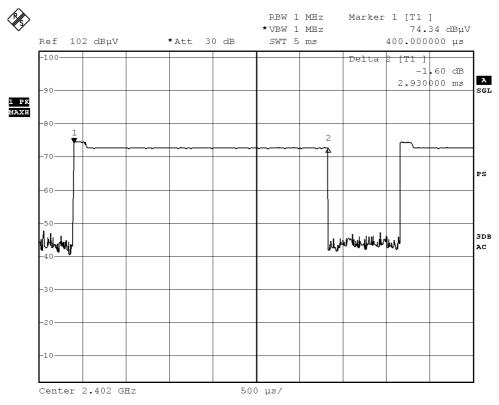




Date: 2014-01-02 Page 69 of 87

No.: DM113697

Fig. B [Pulse duration of Middle Channel]

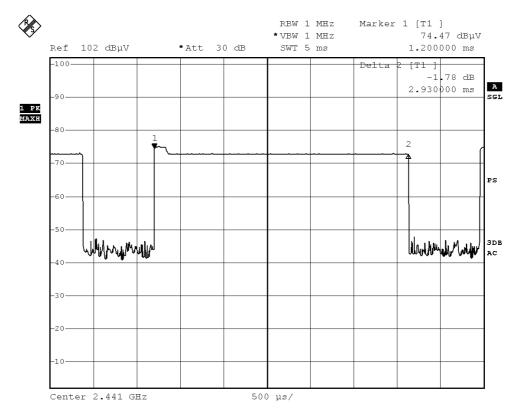

The Hong Kong Standards and Testing Centre Ltd.


10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Date: 2014-01-02 Page 70 of 87

No.: DM113697

Fig. C [Pulse duration of Highest Channel]

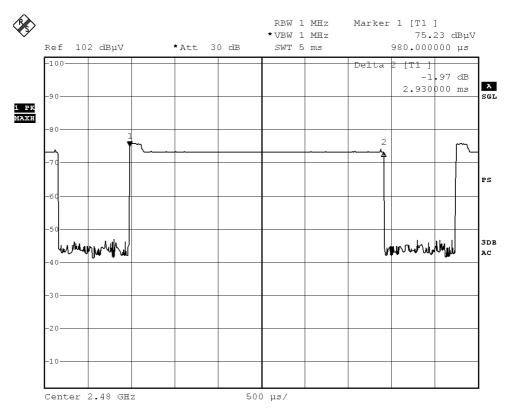

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org




Date: 2014-01-02 Page 71 of 87

No.: DM113697

DH3 Packet:

DH3 Packet permit maximum 1600/79/4 = 5.06 hops per second in each channel (3 time slots RX, 1 time slot TX). The Dwell time is the time duration of the pulse times $5.06 \times 31.6 = 160$ within 31.6 seconds


Fig. D
[Pulse duration of Lowest Channel]

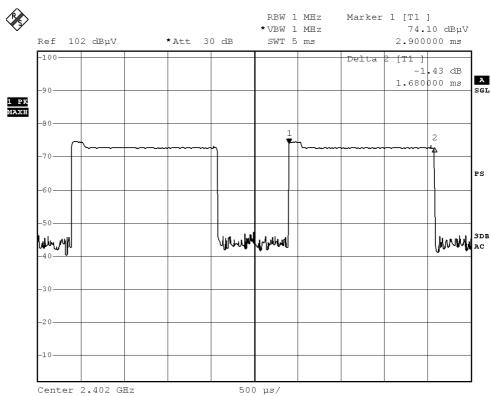



Date: 2014-01-02 Page 72 of 87

Fig. E [Pulse duration of Middle Channel]

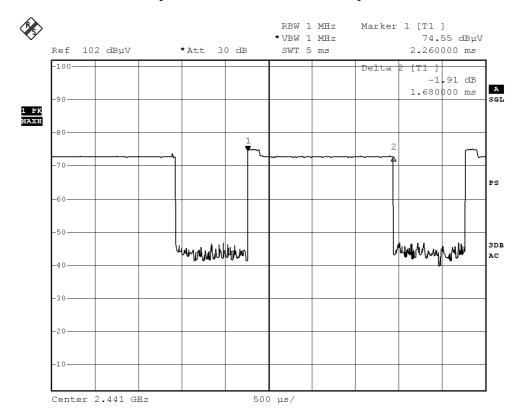




Date: 2014-01-02 Page 73 of 87

No.: DM113697

Fig. F [Pulse duration of Highest Channel]

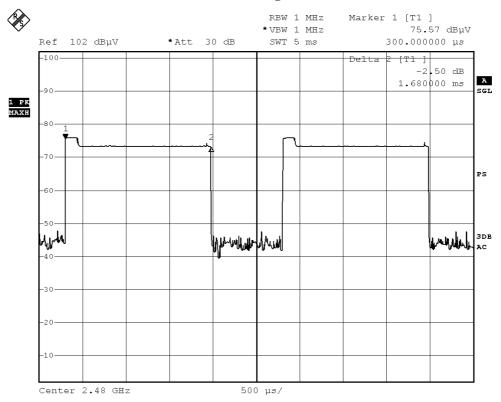




Date: 2014-01-02 Page 74 of 87

No.: DM113697

DH1 Packet:

DH1 Packet permit maximum 1600/79/2 = 10.12 hops per second in each channel (3 time slots RX, 1 time slot TX). The Dwell time is the time duration of the pulse times $10.12 \times 31.6 = 320$ within 31.6 seconds

Fig. G [Pulse duration of Lowest Channel]

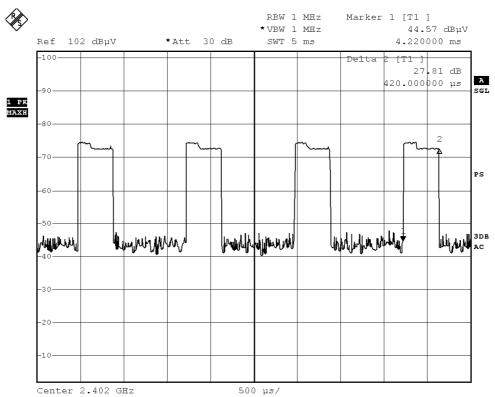




Date: 2014-01-02 Page 75 of 87

No.: DM113697

Fig. H [Pulse duration of Middle Channel]

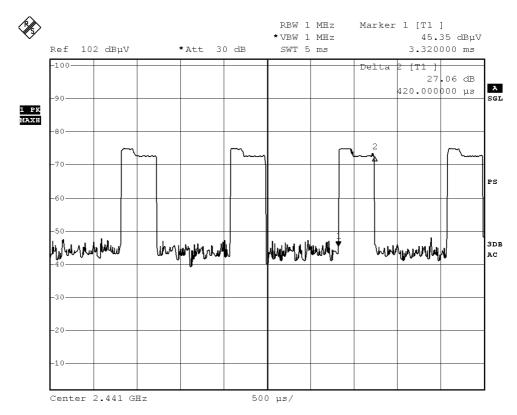




Date: 2014-01-02 Page 76 of 87

No.: DM113697

Fig. I [Pulse duration of Highest Channel]

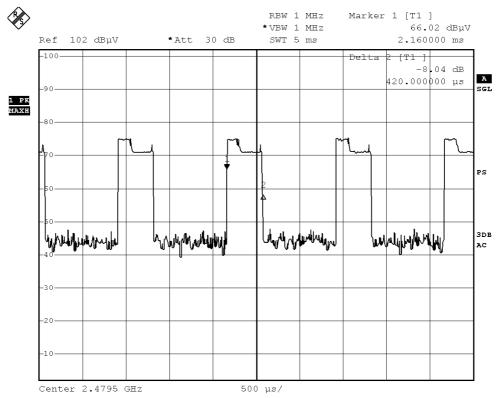

Time of occupancy (Dwell Time):

Data Packet	Frequency	Pulse Duration	Dwell Time	Limits	Test Results
	(MHz)	(ms)	(s)	(s)	
DH5	2402	2.930	0.312	0.400	Complies
DH5	2441	2.930	0.312	0.400	Complies
DH5	2480	2.930	0.312	0.400	Complies
DH3	2402	1.680	0.269	0.400	Complies
DH3	2441	1.680	0.269	0.400	Complies
DH3	2480	1.680	0.269	0.400	Complies
DH1	2402	0.420	0.134	0.400	Complies
DH1	2441	0.420	0.134	0.400	Complies
DH1	2480	0.420	0.134	0.400	Complies



Date: 2014-01-02 Page 77 of 87

No.: DM113697

3.1.9 Channel Centre Frequency

Requirements:

Frequency hopping system in the 2400-2483.5MHz band shall use at least 79 (Channel 0 to 78) non-overlapping channels.

The EUT operates in according with the Bluetooth system specification within the 2400 - 2483.5 MHz frequency band.

RF channels for Bluetooth systems are spaced 1 MHz and are ordered in channel number k. In order to comply with out-of-band regulations, a lower frequency guard band of 2.0 MHz and a higher frequency guard band of 3.5MHz is used.

The operating frequencies of each channel are as follows:

First RF channel start from 2400MHz + 2MHz guard band = 2402MHz Frequency of RF Channel = 2402+k MHz, k = 0,...,78 (Channel separation = 1MHz)



Date: 2014-01-02 Page 78 of 87

No.: DM113697

3.1.10 Pseudorandom Hopping Algorithm

Requirements:

The channel frequencies shall be selected from a pseudorandom ordered list of hopping frequencies. Each frequency must be used equally by the transmitter.

EUT Pseudorandom Hopping Algorithm

The EUT is a Bluetooth device, the Pseudo-random hopping pattern; hopping characteristics and algorithm are based on the Bluetooth specification.



Date: 2014-01-02 Page 79 of 87

No.: DM113697

3.1.11 Antenna Requirement

Test Requirements: § 15.203

Test Specification:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Test Results:

This is PCB antenna. There is no external antenna, the antenna gain = 0dBi. User is unable to remove or changed the Antenna.



Date: 2014-01-02 Page 80 of 87

No.: DM113697

3.12 RF Exposure

Test Requirement: FCC 47CFR 15.247(i)

Test Date: 2013-12-27 Mode of Operation: BT mode

Dimension of EUT: 64.5mm x 64.5mm x 62mm

Requirements:

In 15.247(i), an equipment shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the limits in §§ 1.1310 and 2.1093 of this chapter. Applications to the Commission for construction permits, licenses to transmit or renewals thereof, equipment authorizations or modifications in existing facilities must contain a statement confirming compliance with the limits unless the facility, operation, or transmitter is categorically excluded, as discussed below. Technical information showing the basis for this statement must be submitted to the Commission upon request.

According to KDB 447498 D01 General RF Exposure Guidance v05, unless specifically required by the published RF exposure KDB procedures, standalone 1-g head or body and 10-g extremity SAR evaluation for general population exposure conditions, by measurement or numerical simulation, is not required when the corresponding SAR Exclusion Threshold condition.

Test Results:

RF Exposure Evaluation

The Maximum conducted output power = 1.69mW (at frequency = 2.441 GHz)

It's Conducted source-based time-averaging output power = 1.67mW (at frequency = 2.441 GHz)

Since the SAR test exclusion thresholds for 2450MHz at test separation distances ≤ 5 mm = 10mW and the Conducted source-based time-averaging output power is less than 10mW.

Therefore. the SAR evaluation can be exempted.



Date: 2014-01-02 Page 81 of 87

No.: DM113697

Appendix A

List of Measurement Equipment

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL
EMD004	LISN	ROHDE & SCHWARZ	ESH3-Z5	100102	2013.03.15	2014.03.14
EMD022	EMI Test Receiver	ROHDE & SCHWARZ	ESCS30	100314	2013.03.15	2014.03.14
EMD035	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	100441	2013.05.28	2014.05.27
EMD036	EMI Test Receiver	ROHDE & SCHWARZ	ESIB 26	100388	2013.05.28	2014.05.27
EMD041	TWO-LINE V- NETWORK	ROHDE & SCHWARZ	ENV216	100261	2013.05.28	2014.05.27
EMD061	Biconilog Antenna	ETS.LINDGREN	3142C	00060439	2012.11.03	2014.11.02
EMD062	Double-Ridged Waveguide (1GHz – 18GHz)	ETS.LINDGREN	3117	00075933	2012.11.28	2014.11.27
EMD084	MULTI-DVICE CONTROLLER	ETS.LINDGREN	2090	00060107	N/A	N/A
EMD088	Video Contol Unit	ETS.LINDGREN	Y21953A	2601073	N/A	N/A
EMD093	Monitor	ViewSonic	VA9036	Q8X064201876	N/A	N/A
EMD102	Intelligent Frequency	Ainuo Instrument Co., Ltd	AN97005SS	79707454	N/A	N/A
EMD103	Intelligent Frequency	Ainuo Instrument Co., Ltd	AN97005SS	79707455	N/A	N/A
EMD105	FACT-3 EMC Chamber	ETS.LINDGREN	FACT-3	3803	N/A	N/A
EMD106	Shielding Room #1	ETS.LINDGREN	RFD-100	3802	N/A	N/A
EMD111	Power meter	ROHDE & SCHWARZ	NRVD	102051	2013.03.15	2014.03.14
	100V Insertion Unit	ROHDE & SCHWARZ	URV5-Z4	100464	2013.03.15	2014.03.14
EMD113	Pre-Amplifier	ROHDE & SCHWARZ	N/A	1129588	2013.03.15	2014.03.14
EMD124	Loop Antenna	ETS-Lindgren	6502	00104905	2012.03.26	2014.03.25
EMD131	Standard Gain Horn Antenna (18GHz – 26.5GHz)	Chengdu AINFO lnc.	JXTXLB-42- 15-C-KF	J2021100721001	2013.01.25	2015.01.24

Remarks:-

CM Corrective Maintenance

N/A Not Applicable or Not Available

TBD To Be Determined



Date: 2014-01-02 Page 82 of 87

No.: DM113697

Appendix B

Ancillary Equipment

ITEM NO.	DESCRIPTION	MODEL NO.	FCC ID	REMARK
1	DELL COMPUTER	DMC	N/A	N/A
2	DELL MONITOR	E177FPB	ARSCM356N	RESOLUTION 1024*768 (DURING TESTING) 1.0M UNSHIEDED POWER VORD CONNECTED TO THE COMPUTER 1.5M SHIELDED CABLE CONNECTED TO THE COMPUTER
3	DELL KEYBOARD	SK-8110	N/A	1.8M SHIELDED COILED CABLE CONNECTED TO THE COMPUTER
4	DELL MOUSE	N/A	N/A	2.4M UNSHIELDED CABLE CONNECTED TO THE COMPUTER
5	LASER PRINTER	HP LASERJET 1020 PLUS	N/A	1.8M UNSHIELDED POWER CORD 2.8M SHIELDED CABLE (BUNDLED TO 1M) CONNECTED TO THE COMPUTER
6	iPod Touch	A1367	BCG-E2407	N/A



Date: 2014-01-02 Page 83 of 87

No.: DM113697

Appendix C

Photographs of EUT

Front View of the product




Rear View of the product



Inner Circuit Top View

Inner Circuit Bottom View





Inner Circuit Bottom View





Date: 2014-01-02 Page 84 of 87

No.: DM113697

Photographs of EUT






Date: 2014-01-02 Page 85 of 87

No.: DM113697

Photographs of EUT

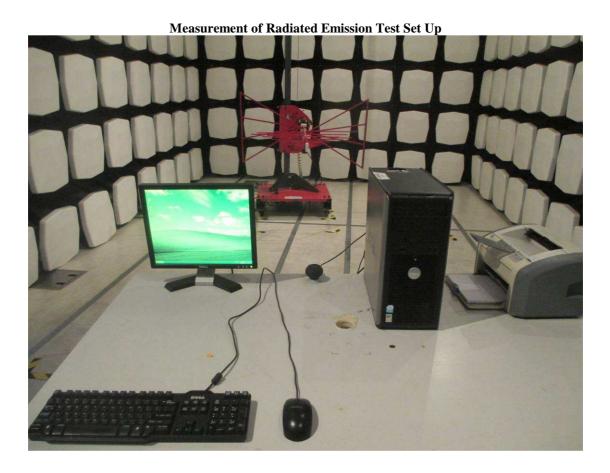




Date: 2014-01-02 Page 86 of 87

No.: DM113697

Photographs of EUT

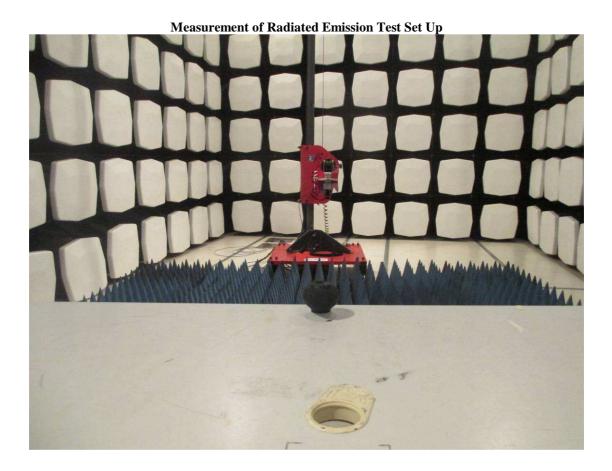



Date: 2014-01-02 Page 87 of 87

No.: DM113697

Photographs of EUT

Measurement of Conducted Emission Test Set Up

***** End of Test Report *****