

# **SAR Test Report**

Report No.: AGC00068131206FH01

FCC ID : 2ABNX-DMW7

**APPLICATION PURPOSE**: Original Equipment

**PRODUCT DESIGNATION**: GSM Mobile Phone

**BRAND NAME** : D-Mobile

**MODEL NAME** : DMW7

**CLIENT**: D-Mobile Ltd.

**DATE OF ISSUE**: Dec.24, 2013

IEEE Std. 1528:2003

**STANDARD(S)** : 47CFR § 2.1093

IEEE/ANSI C95.1

**REPORT VERSION**: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd.

#### **CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.

#### **Report Revise Record**

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	1	Dec.24, 2013	Valid	Original Report

The test plans were performed in accordance with IEEE Std. 1528:2003; 47CFR § 2.1093; IEEE/ANSI C95.1 and the following specific FCC Test Procedures:

- KDB 447498 D01 General RF Exposure Guidance v05r01
- KDB 648474 D04 SAR Handsets Multi Xmiter and Ant v01
- KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01

Test Report Certification			
Applicant Name	D-Mobile Ltd.		
Applicant Address	6 The Island, Wraysbury, Middlesex, TW19 5AS, UK		
Manufacturer Name	Kingtech Telecom (Shenzhen) Co., Ltd.		
Manufacturer Address	Floor 3, Building A, No.3, Road 1 of Shangxue Dengxinkeng Industry Park, Bantian Street, Longgang District, Shenzhen City, PRC		
Product Designation	GSM Mobile Phone		
Brand Name	D-Mobile		
Model Name	DMW7		
Different Description	N/A		
EUT Voltage	DC3.7V by battery		
Applicable Standard	IEEE Std. 1528:2003 47CFR § 2.1093 IEEE/ANSI C95.1		
Test Date	Dec.24, 2013		
	Attestation of Global Compliance(Shenzhen) Co., Ltd.		
Performed Location	2 F, Building 2, No.1-No.4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang Street, Bao'an District, Shenzhen, China		
Report Template	AGCRT-US-2.5G/SAR (2013-03-01)		

Tested By

Eric Zhou

Dec.24, 2013

fir Thou

Checked By

Angela Li

Dec.24, 2013

Authorized By

Solger Zhang

Dec.24, 2013

#### **TABLE OF CONTENTS**

1. SUMMARY OF MAXIMUM SAR VALUE	5
2. GENERAL INFORMATION	6
2.1. EUT DESCRIPTION	6
2.2. TEST PROCEDURE	
2.3. TEST ENVIRONMENT	
3. SAR MEASUREMENT SYSTEM	
3.1. SPECIFIC ABSORPTION RATE (SAR)	10 11
3.3. COMOSAR System Description	
3.4. COMOSAR E-FIELD PROBE	14
3.5. ISOTROPIC E-FIELD PROBE SPECIFICATION	
3.6. ROBOT	
3.8. DEVICE HOLDER	
3.9. SAM Twin Phantom	
4. TISSUE SIMULATING LIQUID	17
4.1. THE COMPOSITION OF THE TISSUE SIMULATING LIQUID	17
4.2. TISSUE CALIBRATION RESULT	18
4.3. TISSUE DIELECTRIC PARAMETERS FOR HEAD AND BODY PHANTOMS	
5. SAR MEASUREMENT PROCEDURE	
5.1. SAR SYSTEM VALIDATION PROCEDURES	
5.2. SAR SYSTEM VALIDATION	
6. EUT TEST POSITION	
6.1. DEFINE TWO IMAGINARY LINES ON THE HANDSET	
6.2. CHEEK POSITION	
6.4. Body Worn Position	
7. SAR EXPOSURE LIMITS	
8. TEST EQUIPMENT LIST	27
9. CONDUCTED POWER MEASUREMENT	28
10. TEST RESULTS	30
10.1. SAR TEST RESULTS SUMMARY	30
APPENDIX A. SAR SYSTEM VALIDATION DATA	36
APPENDIX B. SAR MEASUREMENT DATA	40
APPENDIX C. TEST SETUP PHOTOGRAPHS &EUT PHOTOGRAPHS	68
APPENDIX D. PROBE CALIBRATION DATA	78
APPENDIX E. DIPOLE CALIBRATION DATA	88

#### 1. SUMMARY OF MAXIMUM SAR VALUE

The maximum results of Specific Absorption Rate (SAR) found during testing for EUT are as follows:

**Highest Report standalone SAR Summary** 

Exposure Position Frequency Band		Highest Reported 1g-SAR(W/Kg)	Highest Reported 1g-SAR(W/Kg)	
Hood	GSM 835	0.366	0.366	
Head	PCS 1900	0.236		
Body- worn	GSM 835	0.714		
	PCS 1900	0.427	0.714	

**Maximum Scaling standalone SAR Summary** 

Exposure Frequency Band		Frequency(MHz)	Maximum Scaling 1g-SAR(W/Kg)	
Body Back	GSM 835	836.6	0.825	

**Highest Simultaneous transmission SAR Summary** 

Exposure Position Frequency Band		Highest Reported 1g-SAR(W/Kg)	Highest Reported 1g-SAR(W/Kg)	
Hood	GSM 835+Bluetooth	0.499	0.499	
Head	PCS 1900+Bluetooth	0.369		
Dody worn	GSM 835+Bluetooth	0.847	0.947	
Body- worn	PCS 1900+Bluetooth	0.560	0.847	

This device is compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6W/Kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1, and had been tested in accordance with measurement methods and procedures specified in IEEE 1528-2003 and the relevant KDB files like KDB 941225 D01, KDB 941225 D03, KDB 865664 D02....etc.

#### 2. GENERAL INFORMATION

### 2.1. EUT Description

General Information			
Product Designation	GSM Mobile Phone		
Test Model	DMW7		
Hardware Version	H28_MB_V1.1_20130810		
Device Category	Portable		
RF Exposure Environment	Uncontrolled		
Antenna Type	Internal		
GSM and GPRS			
Support Band	<ul><li>☑GSM 850</li><li>☑PCS 1900 (U.S. Bands)</li><li>☑GSM 900</li><li>☑DCS 1800 (Non-U.S. Bands)</li></ul>		
GPRS Type	pe Class B		
GPRS Class	RS Class Class 12(1Tx+4Rx, 2Tx+3Rx, 3Tx+2Rx, 4Tx+1Rx)		
TX Frequency Range	GSM 850 : 824.2~848.8MHz; PCS 1900: 1850.2~1909.8MHz;		
RX Frequency Range	GSM 850 : 869~894MHz PCS 1900: 1930~1990MHz		
Release Version	R99		
Type of modulation	GMSK for GSM/GPRS		
Antenna Gain	1.0dBi		
Max. Average Power (Max. Peak Power)	GSM850: 31.46dBm(32.37dBm- Peak Power) PCS1900: 28.62dBm(29.54dBm-Peak Power)		
Bluetooth			
Bluetooth Version	□V2.0         □V2.1         □V2.1+EDR         □V3.0         □V3.0+HS         □V4.0		
Operation Frequency	2402~2480MHz		
Type of modulation	⊠GFSK ⊠∏/4-DQPSK ⊠8-DPSK		
Avg. Burst Power	5.02dBm		
Antenna Gain	1.0dBi		

Accessories	
Battery	Brand name: D-Mobile Model No. : DMW7 Voltage and Capacitance: 3.7 V & 1000mAh
Adapter	Brand name: D-Mobile Model No. : DMW7 Input: AC 100-240V, 50/60Hz, 0.15A Output: DC 5V, 500mA
Earphone	Brand name: D-Mobile Model No. : DMW7

Note: The sample used for testing is end product.

#### 2.2. Test Procedure

1	Setup the EUT and simulators as shown on above.
2	Turn on the power of all equipment.
3	EUT Communicate with 8960, and test them respectively at U.S. bands

#### 2.3. Test Environment

Ambient conditions in the laboratory:


Items	Required	Actual
Temperature (°C)	18-25	21± 2
Humidity (%RH)	30-70	55±2

#### 2.4. Test Configuration and setting

The EUT is a model of GSM Portable Mobile Station (MS). It supports GSM/GPRS, BT.

For WWAN SAR testing, the device was controlled by using a base station emulator. Communication between The device and the emulator were established by air link. The distance between the EUT and the antenna is larger than 50cm, and the output power radiated from the emulator antenna is at least 30db smaller than the output power of EUT.

#### **Antenna Location:**

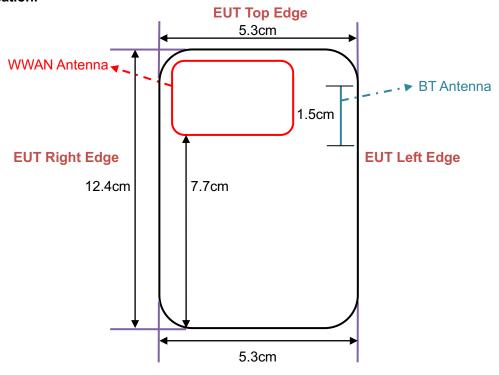

**EUT Bottom Edge** 

The separation distance for antenna to edge:

Antenna	To Top Side(cm)	To Bottom Side(cm)	To Left Side(cm)	To Right Side(cm)
WWAN	0.2	7.7	1.8	0.2
BT	2.5	7.8	0.1	5.2

The simultaneous transmission possibilities are listed as below:

Simultaneous TX Combination	Configuration	Head	Body	Hotspot
1	GSM835(Voice)+ BT	Yes	Yes	No
2	PCS 1900(Voice)+ BT	Yes	Yes	No

#### 3. SAR MEASUREMENT SYSTEM

#### 3.1. Specific Absorption Rate (SAR)

SAR is related to the rate at which energy is absorbed per unit mass in object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and occupational/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume (dv) of given mass density ( $\rho$ ). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dV} \right)$$

SAR is expressed in units of Watts per kilogram (W/Kg) SAR can be obtained using either of the following equations:

$$SAR = \frac{\sigma E^2}{\rho}$$

$$SAR = c_h \frac{dT}{dt}\Big|_{t=0}$$

Where

SAR is the specific absorption rate in watts per kilogram;

E is the r.m.s. value of the electric field strength in the tissue in volts per meter;

σ is the conductivity of the tissue in siemens per metre;

ρ is the density of the tissue in kilograms per cubic metre;

c<sub>h</sub> is the heat capacity of the tissue in joules per kilogram and Kelvin;

 $\frac{dT}{dt}$  | t=0 is the initial time derivative of temperature in the tissue in kelvins per second

#### 3.2. SAR Measurement Procedure

The EUT is set to transmit at the required power in line with product specification, at each frequency relating to the LOW, MID, and HIGH channel settings.


Pre-scans are made on the device to establish the location for the transmitting antenna, using a large area scan in either air or tissue simulation fluid.

The EUT is placed against the Universal Phantom where the maximum area scan dimensions are larger than the physical size of the resonating antenna. When the scan size is not large enough to cover the peak SAR distribution, it is modified by either extending the area scan size in both the X and Y directions, or the device is shifted within the predefined area.

The area scan is then run to establish the peak SAR location (interpolated resolution set at 1mm<sup>2</sup>) which is then used to orient the center of the zoom scan. The zoom scan is then executed and the 1g and 10g averages are derived from the zoom scan volume (interpolated resolution set at 1mm<sup>3</sup>).

When multiple peak SAR location were found during the same configuration or test mode, Zoom scan shall performed on each peak SAR location, only the peak point with maximum SAR value will be reported for the configuration or test mode.

#### 3.3. COMOSAR System Description

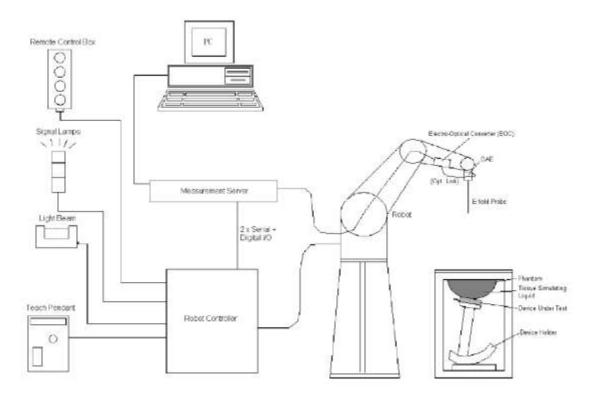

The COMOSAR system for performing compliance tests consists of the following items:

A standard high precision 6axis robot with controller, teach pendant and software.

$\Delta \Pi G$	11111 E	VICHOL	on ioi accor	minoualing in	ie uala	acquisit	ion electro	HICS	$(D \cap L)$ .			
	Α	data	acquistion	electronics	(DAE)	which	performs	the	signal	amplification,	signal	multiplexing
ΔD_(	nnve	reion	offeat mass	curamante n	nechani	cal curf	aca datacti	on				

collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically

transmitted to the EOC.

- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital Communicate Mobile to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP and the Opensar software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targetedmeasurement.

#### 3.3.1. Applications

Predefined procedures and evaluations for automated compliance worldwide standards, e.g., IEEE 1528, OET 65, IEC 62209-1, IEC 62209-2, EN 50360, EN 50383 and others.

#### 3.3.2. Area Scans

Area scans are defined prior to the measurement process being executed with a user

defined variable spacing between each measurement point (integral) allowing low uncertainty measurements to be conducted. Scans defined for FCC applications utilize a 10mm² step integral, with 1mm interpolation used to locate the peak SAR area used for zoom scan assessments.

When an Area Scan has measured all reachable points, it computes the field maxima found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE 1528-2003, EN 50361 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan).

#### 3.3.3. Zoom Scan (Cube Scan Averaging)

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. A density of 1000 kg/m³ is used to represent the head and body tissue density and not the phantom liquid density, in order to be consistent with the definition of the liquid dielectric properties, i.e. the side length of the 1 g cube is 10mm, with the side length of the 10 g cube 21,5mm.

The zoom scan integer steps can be user defined so as to reduce uncertainty, but normal practice for typical test applications utilize a physical step of 7x7x7 (5mmx5mmx5mm) providing a volume of 30mm in the X & Y axis, and 30mm in the Z axis.

#### 3.3.4. Uncertainty of Inter-/Extrapolation and Averaging

In order to evaluate the uncertainty of the interpolation, extrapolation and averaged SAR calculation algorithms of the Post processor, COMOSAR allows the generation of measurement grids which are artificially predefined by analytically based test functions. Therefore, the grids of area scans and zoom scans can be filled with uncertainty test data, according to the SAR benchmark functions of IEEE 1528. The three analytical functions shown in equations as below are used to describe the possible range of the expected SAR distributions for the tested handsets. The field gradients are covered by the spatially flat distribution f1, the spatially steep distribution f3 and f2 accounts for H-field cancellation on the phantom/tissue surface.

$$f_1(x,y,z) = Ae^{-\frac{z}{2a}}\cos^2\left(\frac{\pi}{2}\frac{\sqrt{x'^2 + y'^2}}{5a}\right)$$

$$f_2(x,y,z) = Ae^{-\frac{z}{a}}\frac{a^2}{a^2 + x'^2}\left(3 - e^{-\frac{2z}{a}}\right)\cos^2\left(\frac{\pi}{2}\frac{y'}{3a}\right)$$

$$f_3(x,y,z) = A\frac{a^2}{\frac{a^2}{4} + x'^2 + y'^2}\left(e^{-\frac{2z}{a}} + \frac{a^2}{2(a+2z)^2}\right)$$

#### 3.4. COMOSAR E-Field Probe

The SAR measurement is conducted with the dissymmetric probe manufactured by SATIMO. The probe is specially designed and calibrated for use in liquid with high permittivity. The dissymmetric probe has special calibration in liquid at different frequency.

SATIMO conducts the probe calibration in compliance with international and national standards (e.g. IEEE 152).

SATIMO conducts the probe calibration in compliance with international and national standards (e.g. IEEE 1528, EN62209-1, IEC 62209, etc.) Under ISO17025. The calibration data are in Appendix D.

#### 3.5. Isotropic E-Field Probe Specification

Model	EP165		
Manufacture	SATIMO		
Frequency	0.03GHz-3 GHz Linearity:±0.2dB(30 MHz-3 GHz)		
Dynamic Range	0.01W/Kg-100W/Kg Linearity:±0.2dB		
Dimensions	Overall length:330mm Length of individual dipoles:4.5mm Maximum external diameter:8mm Probe Tip external diameter:5mm Distance between dipoles/ probe extremity:2.7mm		
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 3 GHz with precision of better 30%.		

#### 3.6. Robot

The COMOSAR system uses the KUKA robot from SATIMO SA (France).For the 6-axis controller COMOSAR system, the KUKA robot controller version from SATIMO is used.

The XL robot series have many features that are important for our application:

High precision (repeatability 0.02 mm)

High reliability (industrial design)

Jerk-free straight movements

Low ELF interference (the closed metallic construction shields against motor control fields)


6-axis controller

#### 3.7. Video Positioning System

The video positioning system is used in OpenSAR to check the probe. Which is composed of a camera, LED, mirror and mechanical parts. The camera is piloted by the main computer with firewire link.

During the process, the actual position of the probe tip with respect to the robot arm is measured, as well as the probe length and the horizontal probe offset. The software then corrects all movements, such that the robot coordinates are valid for the probe tip.

The repeatability of this process is better than 0.1 mm. If a position has been taught with an aligned probe, the same position will be reached with another aligned probe within 0.1 mm, even if the other probe has different dimensions. During probe rotations, the probe tip will keep its actual position.




#### 3.8. Device Holder

The COMOSAR device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (EPR).

Thus the device needs no repositioning when changing the angles.

The COMOSAR device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity  $\epsilon r$  =3 and loss tangent  $\delta$  = 0.02. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



#### 3.9. SAM Twin Phantom

The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region where shell thickness increases to 6mm). It has three measurement areas:

- □ Left head
- ☐ Right head
- ☐ Flat phantom



The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

#### 4. TISSUE SIMULATING LIQUID

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15cm. For head SAR testing the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15cm For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5% are listed in 4.2

#### 4.1. The composition of the tissue simulating liquid

Ingredient	835MHz	835MHz	1900MHz	1900MHz
(% Weight)	Head	Body	Head	Body
Water	40.45	52.4	54.90	40.5
Salt	1.42	1.40	0.18	0.50
Sugar	57.6	45.0	0.00	58.0
HEC	0.40	1.00	0.00	0.50
Preventol	0.10	0.20	0.00	0.50
DGBE	0.00	0.00	44.92	0.00

#### 4.2. Tissue Calibration Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using COMOSAR Dielectric Probe Kit and R&S Network Analyzer ZVL6.

Tissue Stimulant Measurement for GSM 835					
Frequency (MHz)	Parts	Description	Dielectric F	Tissue Temp	
835MHz	Head	Reference result ±5% window	er 41.50 39.425-43.575	δ[s/m] 0.90 0.855-0.945	N/A
		Dec.24, 2013	40.31	0.87	21
835MHz	Body	Reference result ±5% window	εr 55.20 52.44-57.96	δ[s/m] 0.97 0.9215-1.0185	N/A
		Dec.24, 2013	53.62	0.97	21

Tissue Stimulant Measurement for PCS 1900						
Frequency (MHz)	Parts	Description	Dielectric F	Tissue Temp		
1900MHz	Head	Reference result ±5% window	εr 40.00 38.00-42.00	δ[s/m] 1.40 1.33-1.47	N/A	
		Dec.24, 2013	40.25	1.37	21	
1900MHz	Body	Reference result ±5% window	εr 53.30 50.635-55.965	δ[s/m] 1.52 1.444-1.596	N/A	
		Dec.24, 2013	51.27	1.49	21	

#### 4.3. Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

Target Frequency	ŀ	nead	bo	dy
(MHz)	εr	σ (S/m)	εr	σ (S/m)
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	1.01	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00


( $\epsilon r = relative permittivity$ ,  $\sigma = conductivity and <math>\rho = 1000 \text{ kg/m3}$ )

#### 5. SAR MEASUREMENT PROCEDURE

#### 5.1. SAR System Validation Procedures


Each SATIMO system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the SATIMO software, enable the user to conduct the system performance check and system validation. System kit includes a dipole, and dipole device holder.

The system check verifies that the system operates within its specifications. It's performed daily or before every SAR measurement. The system check uses normal SAR measurement in the flat section of the phantom with a matched dipole at a specified distance. The system validation setup is shown as below.

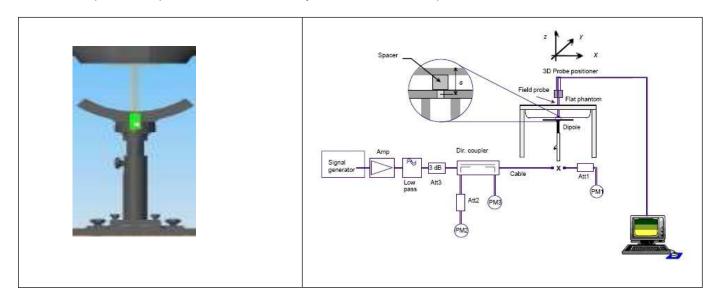

### 5.2. SAR System Validation

#### 5.2.1. Validation Dipoles



The dipoles used is based on the IEEE-1528 standard, and is complied with mechanical and electrical specifications in line with the requirements of both IEEE and FCC Supplement C. the table below provides details for the mechanical and electrical Specifications for the dipoles.

Frequency	L (mm)	h (mm)	d (mm)
900 MHz	149.0	83.3	3.6
1900MHz	68	39.5	3.6

#### 5.2.2. Validation Result


System Perfo	System Performance Check at 835 MHz &1900MHz for Head				
Validation Kit	t: SN 46/11DIP 0G900-	185			
Frequency [MHz]	Description	SAR [w/kg] 1g	SAR [w/kg] 10g	Tissue Temp.[°C]	
835 MHz	Reference result ± 10% window	10.9 9.81 to 11.99	6.99 6.29 to 7.69	N/A	
	Dec.24, 2013	10.98	6.96	21.0	
Validation Kit	t: SN 46/11DIP 1G900-	187			
Frequency [MHz]	Description	SAR [w/kg] 1g	SAR [w/kg] 10g	Tissue Temp.[°C]	
1900 MHz	Reference result ± 10% window	39.7 35.73 to 43.67	20.5 18.45 to 22.55	N/A	
	Dec.24, 2013	39.98	20.84	21.0	
Note: All SAR	values are normalized t	to 1W forward power.			

#### 6. EUT TEST POSITION

This EUT was tested in Right Cheek, Right Titled, Left Cheek, Left Titled, Front Face and Rear Face.


#### 6.1. Define Two Imaginary Lines on the Handset

- (1)The vertical centerline passes through two points on the front side of the handset the midpoint of the width wt of the handset at the level of the acoustic output, and the midpoint of the width wb of the handset.
- (2)The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.
- (3)The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

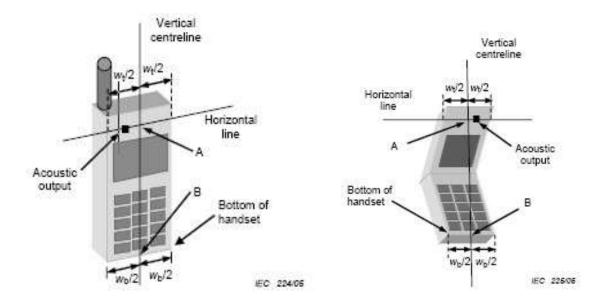

#### 6.2. Cheek Position

- (1) To position the device with the vertical center line of the body of the device and the horizontal line crossing the center picec in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- (2) To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost








#### 6.3. Title Position


- (1) To position the device in the "cheek" position described above.
- (2) While maintaining the device in the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until with the ear is lost.








- 6.4. Body Worn Position(1) To position the EUT parallel to the phantom surface.(2) To adjust the EUT parallel to the flat phantom.(3) To adjust the distance between the EUT surface and the flat phantom to 5mm.





#### 7. SAR EXPOSURE LIMITS

SAR assessments have been made in line with the requirements of IEEE-1528, FCC Supplement C, and comply with ANSI/IEEE C95.1-1992 "Uncontrolled Environments" limits. These limits apply to a location which is deemed as "Uncontrolled Environment" which can be described as a situation where the general public may be exposed to an RF source with no prior knowledge or control over their exposure.

#### Limits for General Population/Uncontrolled Exposure (W/kg)

Type Exposure	Uncontrolled Environment Limit
Spatial Peak SAR (1g cube tissue for brain or body)	1.60 W/kg

#### **8. TEST EQUIPMENT LIST**

Equipment description	Manufacturer/ Model	Identification No.	Current calibration date	Next calibration date
SAR Probe	SATIMO	SN 04/13 EP165	01/31/2013	01/30/2014
Phantom	SATIMO	SN_4511_SAM90	Validated. No cal required.	Validated. No cal required.
Liquid	SATIMO	-	Validated. No cal required.	Validated. No cal required.
Comm Tester	R&S - CMU200	069Y7-158-13-712	02/28/2013	02/27/2014
Comm Tester	Agilent-8960	GB46310822	10/22/2013	10/21/2014
Multimeter	Keithley 2000	1188656	02/28/2013	02/27/2014
Dipole	SATIMO SID900	SN46/11 DIP 0G900-185	11/14/2013	11/13/2015
Dipole	SATIMO SID1900	SN46/11 DIP 1G900-187	11/14/2013	11/13/2015
Amplifier	Aethercomm	SN 046	12/08/2013	12/07/2014
Signal Generator	Agilent-E4421B	MY43351603	05/13/2013	05/12/2014
Power Probe	HP E4418A	US38261498	02/28/2013	02/27/2014
SPECTRUM ANALYZER	Agilent/E4440A	MY44303916	10/22/2013	10/21/2014
Power Attenuator	BED	DLA-5W	07/30/2013	07/29/2014
Network Analyzer	Rhode & Schwarz ZVA	SN100132	02/28/2013	02/27/2014

Note: Per KDB 50824 Dipole SAR Validation Verification, AGC Lab has adopted 3 years calibration intervals. On annual basis, every measurement dipole has been evaluated and is in compliance with the following criteria:

- 1. There is no physical damage on the dipole;
- 2. System validation with specific dipole is within 10% of calibrated value;
- 3. Return-loss is within 20% of calibrated measurement;
- 4. Impedance is within  $5\Omega$  of calibrated measurement.

## 9. CONDUCTED POWER MEASUREMENT

Mode	Frequency(MHz)	Avg. Burst Power(dBm)	Duty cycle Factor(dBm)	Frame Power(dBm)
Maximum Power	<1>			
	824.2	31.46	-9	22.46
GSM 835	836.6	31.41	-9	22.41
	848.8	31.39	-9	22.39
CDDC 025	824.2	31.43	-9	22.43
GPRS 835 (1 Slot)	836.6	31.37	-9	22.37
(1 3101)	848.8	31.31	-9	22.31
ODDC 025	824.2	28.35	-6	22.35
GPRS 835	836.6	28.41	-6	22.41
(2 Slot)	848.8	28.38	-6	22.38
ODDO 005	824.2	26.55	-4.26	22.29
GPRS 835	836.6	26.49	-4.26	22.23
(3 Slot)	848.8	26.47	-4.26	22.21
0000 005	824.2	25.32	-3	22.32
GPRS 835	836.6	25.28	-3	22.28
(4 Slot)	848.8	25.54	-3	22.54
	1850.2	28.62	-9	19.62
PCS1900	1880	28.53	-9	19.53
	1909.8	28.45	-9	19.45
00004000	1850.2	28.59	-9	19.59
GPRS1900 (1 Slot)	1880	28.46	-9	19.46
(1 5101)	1909.8	28.44	-9	19.44
ODD04000	1850.2	25.39	-6	19.39
GPRS1900 (2 Slot)	1880	25.53	-6	19.53
(2 5101)	1909.8	25.46	-6	19.46
00004000	1850.2	24.29	-4.26	20.03
GPRS1900 (3 Slot)	1880	24.16	-4.26	19.9
(3 3101)	1909.8	24.19	-4.26	19.93
ODD04000	1850.2	22.63	-3	19.63
GPRS1900 (4 Slot)	1880	22.57	-3	19.57
(4 3101)	1909.8	22.53	-3	19.53
Maximum Power	<2>		•	
GSM 835	824.2	31.42	-9	22.42
PCS1900	1850.2	28.55	-9	19.55

#### Note 1:

The Frame Power (Source-based time-averaged Power) is scaled the maximum burst average power based on time slots. The calculated methods are show as following:

Frame Power = Max burst power (1 Up Slot) – 9 dB

Frame Power = Max burst power (2 Up Slot) - 6 dB

Frame Power = Max burst power (3 Up Slot) -4.26dB

Frame Power = Max burst power (4 Up Slot) – 3 dB

#### **Bluetooth**

Modulation	Channel	Frequency(MHz)	Average Power (dBm)
	0	2402	3.96
GFSK	39	2441	4.74
	78	2480	5.02
	0	2402	3.09
π /4-DQPSK	39	2441	3.88
	78	2480	4.10
	0	2402	3.04
8-DPSK	39	2441	3.85
	78	2480	4.01

#### 10. TEST RESULTS

#### 10.1. SAR Test Results Summary

#### 10.1.1. Test position and configuration

Head SAR was performed with the device configured in the positions according to IEEE1528, and Body SAR was performed with the device 5mm from the phantom; Body SAR was also performed with the headset attached and without.

#### 10.1.2. Operation Mode

- According to KDB 447498 D01 v05r01 ,for each exposure position, if the highest 1-g SAR is  $\leq$  0.8 W/kg, testing for low and high channel is optional.
- Per KDB 865664 D01 v01r01,for each frequency band, if the measured SAR is ≥0.8W/Kg, testing for repeated SAR measurement is required, that the highest measured SAR is only to be tested. When the SAR results are near the limit, the following procedures are required for each device to verify these types of SAR measurement related variation concerns by repeating the highest measured SAR configuration in each frequency band.
- (1) When the original highest measured SAR is  $\geq$ 0.8W/Kg, repeat that measurement once.
- (2) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is >1.20 or when the original or repeated measurement is >1.45 W/Kg.
- (3) Perform a third repeated measurement only if the original, first and second repeated measurement is  $\geq$  1.5 W/Kg and ratio of largest to smallest SAR for the original, first and second measurement is  $\geq$ 1.20.
- Body-worn exposure conditions are intended to voice call operations, therefore GSM voice call mode is selected to be test.
- According to KDB 648474 D04 v01r01, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤1.2W/Kg, SAR testing with a headset connected is not required.
- •Maximum Scaling SAR in order to calculate the Maximum SAR values to test under the standard Peak Power, Calculation method is as follows:
- Maximum Scaling SAR =tested SAR (Max.)  $\times$  [GSM standard Peak Power (mw)/ tested Max. Peak Power (mw)]

#### 10.1.3. Test Result

SAR MEASUREMENT	
Ambient Temperature (°C) : 21 ± 2	Relative Humidity (%): 55
Liquid Temperature (°C) : 21 ± 2	Depth of Liquid (cm):>15
Product: GSM Mobile Phone	

Test Mode: GSM835 with GMSK modulation

	Configuration		Antenna	Freq	Frequency		SAR (1g)	Limit
SIM	Position	Status	Position	channel	MHz	(<±5%)	(W/kg)	(W/kg)
				128	824.2			
		Cheek	Fixed	190	836.6	-2.11	0.330	1.6
	Left			251	848.8			
	Head	Tilted	ed Fixed	128	824.2			
				190	836.6	2.07	0.241	1.6
<1>				251	848.8			
\			Fixed	128	824.2			
		Cheek		190	836.6	1.82	0.366	1.6
	Right			251	848.8			
	Head	Head		128	824.2			
			Fixed	190	836.6	-3.07	0.262	1.6
				251	848.8			
<2>	Right	Cheek	Fixed	190	836.6	1.74	0.346	1.6

Note: when the 1-g SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. refer to KDB 941225.

SAR MEASUREMENT	
Ambient Temperature (°C) : 21 ± 2	Relative Humidity (%): 55
Liquid Temperature (°C): 21 ± 2	Depth of Liquid (cm):>15

Product: GSM Mobile Phone

Test Mode: GSM835 with GMSK modulation

	Configura	tion	Antenna			Power Drift	SAR (1g)	Limit	
SIM	Position	Status	Position	channel	MHz	(<±5%)	(W/kg)	(W/kg)	
				128	824.2				
Body back	MS	Fixed	190	836.6	1.07	0.714	1.6		
			251	848.8					
\	<1>	_			128	824.2			
Body Front	Body Front MS	Fixed	190	836.6	1.27	0.594	1.6		
			251	848.8					

Note: when the 1-g SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. refer to KDB 941225.

SAR MEASUREMENT	
Ambient Temperature (°C) : 21 ± 2	Relative Humidity (%): 55
Liquid Temperature (°C) : 21 ± 2	Depth of Liquid (cm):>15
Product: GSM Mobile Phone	

Test Mode: PCS1900 with GMSK modulation

Configuration		Antenna	Freq	Frequency		SAR (1g)	Limit	
SIM	Position	Status	Position	channel	MHz	(<±5%)	(W/kg)	(W/kg)
				512	1850.2			
		Cheek	Fixed	661	1880.0	1.34	0.140	1.6
	Left			810	1909.8		-	
	Head	Head Tilted	Fixed	512	1850.2			
				661	1880.0	2.24	0.206	1.6
<1>				810	1909.8			
\		Cheek	Fixed	512	1850.2			
				661	1880.0	-1.73	0.202	1.6
	Right			810	1909.8			
	Head			512	1850.2			
		Tilted	Fixed	661	1880.0	1.42	0.236	1.6
				810	1909.8			
<2>	Right	Tilted	Fixed	661	1880.0	-2.62	0.230	1.6

Note: when the 1-g SAR is  $\leq$  0.8 W/kg, testing for low and high channel is optional. refer to KDB 941225.

SAR MEASUREMENT	
Ambient Temperature (°C) : 21 ± 2	Relative Humidity (%): 55
Liquid Temperature (°C) : 21 ± 2	Depth of Liquid (cm):>15
Product: GSM Mobile Phone	

Test Mode: PCS 1900 with GMSK modulation

	Configura	tion	/ untorina		uency	Power Drift	SAR (1g)	Limit
SIM	Position	Status	Position	channel	MHz	(<±5%)	(W/kg)	(W/kg)
	Body Back MS		512	1850.2				
			Fixed	661	1880.0	1.27	0.427	1.6
<1>				810	1909.8			
\1/				512	1850.2			
Body front	front MS Fixe	Fixed	661	1880.0	-2.40	0.153	1.6	
			810	1909.8				

Note: when the 1-g SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. refer to KDB 941225.

#### Simultaneous Multi-band Transmission Evaluation: Application Simultaneous Transmission information:

Position	Simultaneous state	
Head	1.WWAN(voice)+Bluetooth	
Body	2.WWAN(voice)+Bluetooth	

#### NOTE:

- 1. For simultaneous transmission at head and body exposure position, 2 transmitters simultaneous transmission was the worst state.
- 2. Based upon KDB 447498 D01 v05, BT SAR is excluded as below table.
- 3. Based upon KDB 447498 D01 v05, for handsets the test separation distance is determined by the smallest distance between the outer surface of the device and the user; which is 0mm for head SAR AND 5mm for body-worn SAR.
- 4. If the test separation distance is <5mm, 5mm is used for excluded SAR calculation.
- 5. For minimum test separation distance  $\leq$  50mm,Bluetooth standalone SAR is excluded according to [(max. power of channel, including tune-up tolerance, mW)/ (min. test separation distance, mm)  $\cdot \lceil \sqrt{f} (GHz)/x \rceil \leq 3.0$  for 1-g SAR and  $\leq$  7.5 for 10-g extremity SAR
- 6. KDB 447498 / 4.3.2 (2) when standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:
  - a) (max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)]·[ $\sqrt{f}$  (GHz) /x] W/kg for test separation distances 50 mm; Where x = 7.5 for 1-g SAR, and x = 18.75 for 10-g SAR.
  - b) 0.4W/Kg for 1-g SAR and 1.0W/Kg for 10-g SAR, when the separation distance is >50mm.

		Maximum Pov	n Average wer	Antenna to user	SAR exclusion	SAR testing required	Head	Body
		dBm	mW	(mm)	threshold (mW)	(Yes/No)	(0mm gap)	(5mm gap)
ВТ	Head	5.02	3.177	5	10	NO	0.1334	0.1334
ы	Body	J.U2	3.177	5	10	NO	W/kg	W/kg

#### Maximum test results (WWAN) with BT SAR:

BT: Head (0 cm gap): 0.1334 W/kg and Body (0.5 cm gap): 0.1334 W/kg

#### APPENDIX A. SAR SYSTEM VALIDATION DATA

Test Laboratory: AGC Lab Date: Dec.24, 2013

System Check Head 835 MHz

DUT: Dipole 900 MHz Type: SID 900

Communication System CW; Communication System Band: D835 (835.0 MHz); Duty Cycle: 1:1; Conv.F=5.30 Frequency: 835 MHz; Medium parameters used: f = 835 MHz;  $\sigma = 0.87$  mho/m;  $\epsilon r = 40.31$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

Phantom section: Flat Section; Input Power=10dBm Ambient temperature ( $^{\circ}$ C): 21, Liquid temperature ( $^{\circ}$ C): 21

#### **SATIMO Configuration:**


Probe: EP165; Calibrated: 01/31/2013

· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: Flat Phantom; Type: Elliptical Phantom

· Measurement SW: OpenSAR V4\_02\_01


Configuration/System Check GSM 835 Head/Area Scan: Measurement grid: dx=8mm,dy=8mm Configuration/System Check GSM 835 Head/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm

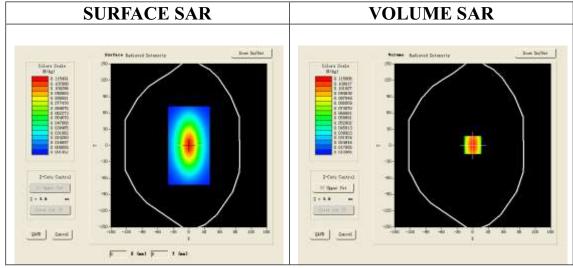

Maximum location: X=0.00, Y=1.00

SAR 10g (W/Kg)	0.069574
SAR 1g (W/Kg)	0.109841

Z (mm)	0.00	4.00	9.00	14.00	19.00		
SAR (W/Kg)	0.0000	0.1173	0.0736	0.0484	0.0324		
	SAR, Z Axis Scan $(X = 0, Y = 1)$						
	1. 12 -						
<b>1</b> è	). 08 –				-		
	). 06 -						
o	1.02- 0.0 2.5 5	5.0 7.5 10.0	12.5 15.0 17.	5 20.0 22.5 25	s.' o		
			Z (mm)				

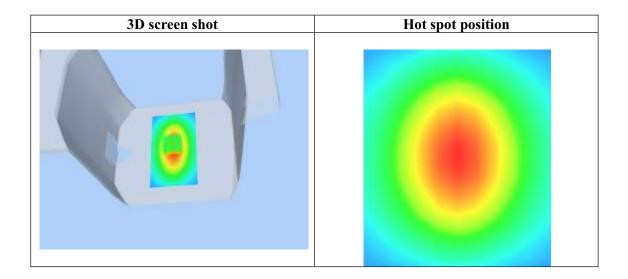

System Check Head 1900MHz

DUT: Dipole 1900 MHz; Type: SID 1900

Communication System: CW; Communication System Band: D1900 (1900.0 MHz); Duty Cycle:1:1; Conv.F=4.72 Frequency: 1900 MHz; Medium parameters used: f = 1900 MHz;  $\sigma = 1.37 \text{ mho/m}$ ;  $\epsilon = 40.25$ ;  $\rho = 1000 \text{ kg/m}^3$ ;

Phantom section: Flat Section; Input Power=10dBm Ambient temperature ( $^{\circ}$ ): 21, Liquid temperature ( $^{\circ}$ ): 21

#### **SATIMO Configuration:**


Probe: EP165; Calibrated: 01/31/2013

Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: Flat Phantom; Type: Elliptical Phantom

· Measurement SW: OpenSAR V4 02 01


Configuration/System Check PCS1900 Head/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/System Check PCS1900 Head/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm

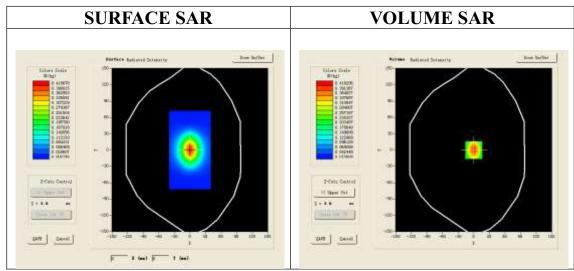

Maximum location: X=0.00, Y=0.00

SAR 10g (W/Kg)	0.208364	
SAR 1g (W/Kg)	0.399782	

Z (mm)	0.00	4.00	9.00	14.00	19.00		
SAR (W/Kg)	0.0000	0.4192	0.2343	0.1366	0.0833		
	SAR, Z Axis Scan $(X = 0, Y = 0)$						
0	1. 42 -						
0	1. 35 -	$\longrightarrow$					
(#/kg)	1. 30 -	$+ \lambda +$	+		-		
(¥/} (€/	). 25 -	+			-		
SAR 0	). 20 -	+	+		-		
, 0	). 15 -	+			-		
0	. 10 -		+		-		
0	). 05 –				-		
	0.0 2.5 5.0 7.5 10.0 12.5 15.0 17.5 20.0 22.5 25.0 Z (nm)						

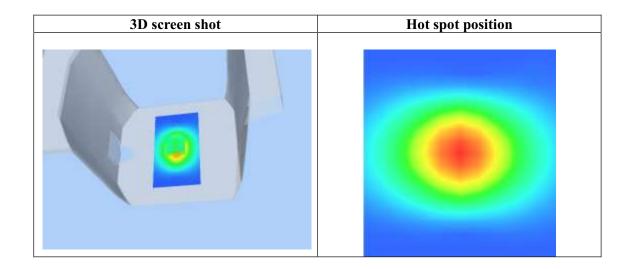

# APPENDIX B. SAR MEASUREMENT DATA

Test Laboratory: AGC Lab Date: Dec.24, 2013

GSM 835 Mid-Touch-Left <SIM 1>

**DUT: GSM Mobile Phone;** Type: DMW7

Communication System: Generic GSM; Communication System Band: GSM 835; Duty Cycle: 1:8.3; Conv.F=5.30 Frequency: 836.6 MHz; Medium parameters used: f = 835 MHz;  $\sigma = 0.87$  mho/m;  $\epsilon = 40.31$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

Phantom section: Left Section

Ambient temperature ( $^{\circ}$ C): 21.0, Liquid temperature ( $^{\circ}$ C): 21.0

### **SATIMO Configuration:**

Probe: EP165; Calibrated: 01/31/2013


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: Flat Phantom; Type: Elliptical Phantom

· Measurement SW: OpenSAR V4\_02\_01

Configuration/GSM 835 Mid-Touch-Left/Area Scan (6x8x1): Measurement grid: dx=8mm, dy=8mm Configuration/GSM 835 Mid-Touch-Left/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Area Scan	sam_direct_droit2_surf8mm.txt		
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast		
Phantom	Left head		
Device Position	Cheek		
Band	GSM 835		
Channels	Middle		
Signal	TDMA (Crest factor: 8.0)		

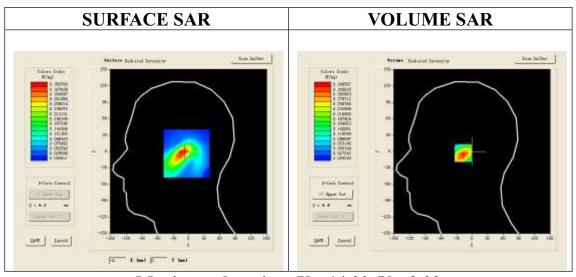

Maximum location: X=-14.00, Y=-3.00

SAR 10g (W/Kg)	0.179226
SAR 1g (W/Kg)	0.330149

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.3486	0.2052	0.1212	0.0736
	SAR, Z	Axis Scan	(X = −14,	<b>∀</b> = −3)	
0	). 35 –				
0	1. 30 –	$\longrightarrow$			-
⊙ <sub>0</sub>	1. 25 -	+			-
		++			-
SAR o	). 15-		+		-
0	. 10-			+	-
o	0.04-	50.75.400	10.5.15.0.17	5 00 0 00 5 00	-
	0.0 2.5		12.5 15.0 17. Z (mm)	5 20.0 22.5 25	5. U

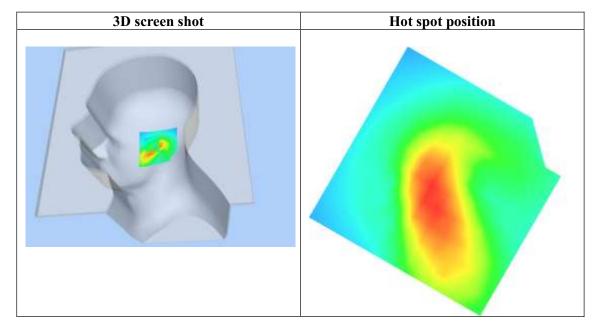

GSM 835 Mid-Tilt-Left <SIM 1>

DUT: GSM Mobile Phone; Type: DMW7

Communication System: Generic GSM; Communication System Band: GSM 835; Duty Cycle: 1:8.3; Conv.F=5.30; Frequency: 836.6 MHz; Medium parameters used: f = 835 MHz;  $\sigma = 0.87$  mho/m;  $\epsilon r = 40.31$ ;  $\rho = 1000$  kg/m³;

Phantom section: Left Section

Ambient temperature (°ℂ): 21.0, Liquid temperature(°ℂ): 21.0

### SATIMO Configuration:

Probe: EP165; Calibrated: 01/31/2013


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: Flat Phantom; Type: Elliptical Phantom

· Measurement SW: OpenSAR V4\_02\_01

Configuration/GSM 835 Mid-Tilt-Left/Area Scan (6x8x1): Measurement grid: dx=8mm, dy=8mm Configuration/GSM 835 Mid-Tilt-Left/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm,dz=5mm;


Area Scan	sam_direct_droit2_surf8mm.txt		
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast		
Phantom	Left head		
Device Position	Tilt		
Band	GSM 835		
Channels	Middle		
Signal	TDMA (Crest factor: 8.0)		

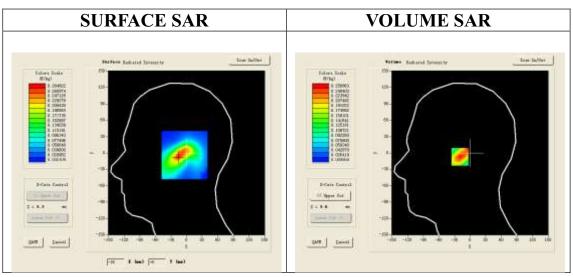

Maximum location: X=-16.00, Y=-7.00

	,
SAR 10g (W/Kg)	0.146842
SAR 1g (W/Kg)	0.240958

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.2569	0.1696	0.1127	0.0761
	SAR, Z	Axis Scan	(X = -16,	Y = -7)	
0	). 257 –				_
0	1. 225 -	$\longrightarrow$			
	. 200 -	$+ \lambda +$			
(%)	). 175 – ). 150 –	+			-
≥ 0	. 150 -	++	+		-
SAR	. 125 -		$\rightarrow$		-
0	. 100 –		$\overline{}$		-
0	. 075 -		$\overline{}$	$\leftarrow$	-
0	. 050 -				
	0.0 2.5		12.5 15.0 17. Z (mm)	5 20.0 22.5 25	5.0

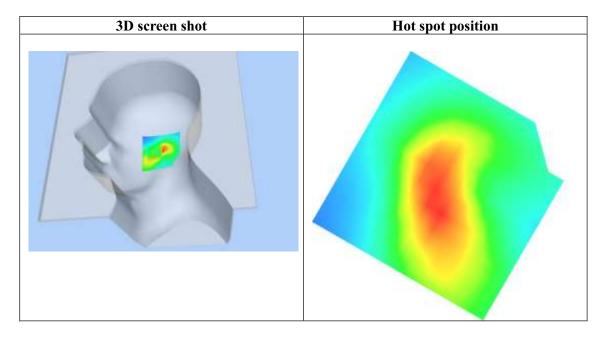

GSM 835 Mid-Touch-Right <SIM 1>

**DUT: GSM Mobile Phone;** Type: DMW7

Communication System: Generic GSM; Communication System Band: GSM 835; Duty Cycle: 1:8.3; Conv.F=5.30; Frequency: 836.6 MHz; Medium parameters used: f = 835 MHz;  $\sigma = 0.87$  mho/m;  $\epsilon r = 40.31$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

Phantom section: Right Section

Ambient temperature (°C): 21.0, Liquid temperature (°C): 21.0

### SATIMO Configuration:

Probe: EP165; Calibrated: 01/31/2013


Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: Flat Phantom; Type: Elliptical Phantom

· Measurement SW: OpenSAR V4\_02\_01

Configuration/GSM 835 Mid-Touch-Right/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/GSM 835 Mid-Touch-Right/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;


Area Scan	sam_direct_droit2_surf8mm.txt		
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast		
Phantom	Right head		
Device Position	Cheek		
Band	GSM 835		
Channels	Middle		
Signal	TDMA (Crest factor: 8.0)		

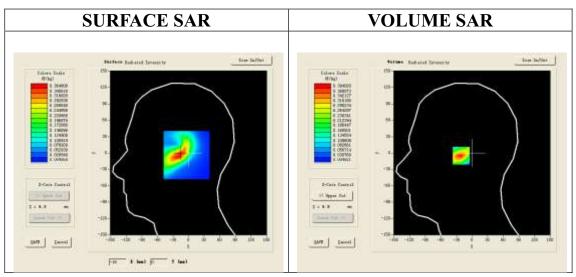

**Maximum location: X=-18.00, Y=-5.00** 

	,
SAR 10g (W/Kg)	0.193962
SAR 1g (W/Kg)	0.366064

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.3940	0.2217	0.1288	0.0815
c	SAR, Z	Axis Scan	(X = -18,	Y = -5)	
SAR G	), 25				-
	).05-    0.0 2.5 5		12.5 15.0 17. Z (mm)	5 20.0 22.5 25	5.0

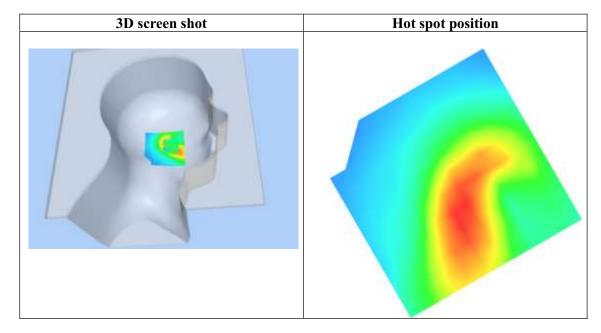

Test Laboratory: AGC Lab

GSM 835 Mid-Tilt-Right <SIM 1>

Date: Dec.24, 2013

DUT: GSM Mobile Phone; Type: DMW7

Communication System: Generic GSM; Communication System Band: GSM 835; Duty Cycle: 1:8.3; Conv.F=5.30; Frequency: 836.6 MHz; Medium parameters used: f = 835 MHz;  $\sigma = 0.87$  mho/m;  $\epsilon r = 40.31$ ;  $\rho = 1000$  kg/m³;

Phantom section: Right Section

Ambient temperature (°C): 21.0, Liquid temperature (°C): 21.0

### SATIMO Configuration:

Probe: EP165; Calibrated: 01/31/2013

· Sensor-Surface: 4mm (Mechanical Surface Detection)


· Phantom: Flat Phantom; Type: Elliptical Phantom

· Measurement SW: OpenSAR V4\_02\_01

Configuration/GSM 835 Mid-Tilt-Right/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/GSM 835 Mid-Tilt-Right/Zoom Scan: Measurement grid: dx=8mm,

dy=8mm, dz=5mm;


Area Scan	sam_direct_droit2_surf8mm.txt		
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast		
Phantom	Right head		
Device Position	Tilt		
Band	GSM 835		
Channels	Middle		
Signal	TDMA (Crest factor: 8.0)		

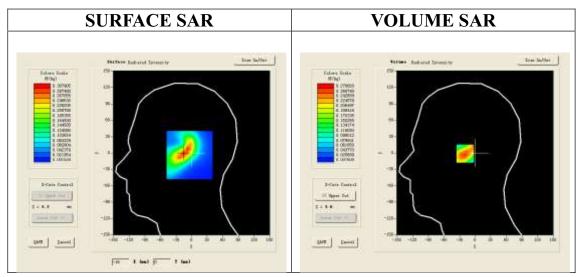

Maximum location: X=-16.00, Y=-1.00

<b>SAR 10g (W/Kg)</b>	0.151842
SAR 1g (W/Kg)	0.261833

Z (mm)	0.00	4.00	9.00	14.00	19.00	
SAR (W/Kg)	0.0000	0.2788	0.1772	0.1121	0.0710	
c		Axis Scan	(X = -16,	¥ = -1)		
	). 28 -					
'kg)	). 20 -					
	). 15-					
	). 10 -				-	
0	0.04 - 0.0 2.5 5	5.0 7.5 10.0	12.5 15.0 17.	5 20.0 22.5 25	o	
	Z (mm)					

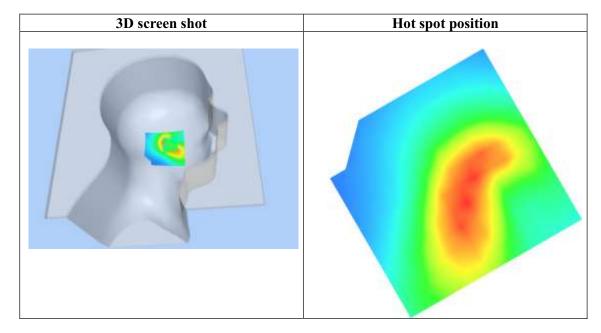

GSM 835 Mid- Touch-Right <SIM 2>

DUT: GSM Mobile Phone; Type: DMW7

Communication System: Generic GSM; Communication System Band: GSM 835; Duty Cycle: 1:8.3; Conv.F=5.30; Frequency: 836.6 MHz; Medium parameters used: f = 835 MHz;  $\sigma = 0.87$  mho/m;  $\epsilon r = 40.31$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

Phantom section: Right Section

Ambient temperature (°C): 21.0, Liquid temperature (°C): 21.0

### SATIMO Configuration:

Probe: EP165; Calibrated: 01/31/2013


Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: Flat Phantom; Type: Elliptical Phantom

· Measurement SW: OpenSAR V4\_02\_01

Configuration/GSM 835 Mid-Touch-Right/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/GSM 835 Mid-Touch-Right/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;


Area Scan	sam_direct_droit2_surf8mm.txt		
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast		
Phantom	Right head		
Device Position	Cheek		
Band	GSM 835		
Channels	Middle		
Signal	TDMA (Crest factor: 8.0)		

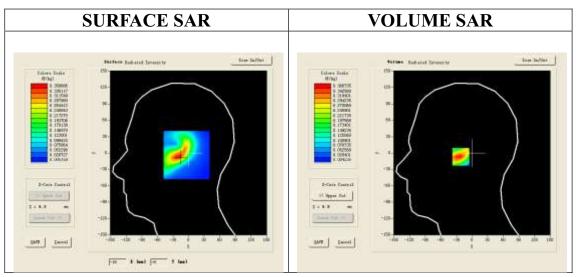

Maximum location: X=-18.00, Y=-7.00

<b>SAR 10g (W/Kg)</b>	0.189154
SAR 1g (W/Kg)	0.345642

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.3667	0.2170	0.1297	0.0806
C	SAR, Z	L	(X = −18,		
路 (第/kg)	). 25 -				
	0.10-				
	0.05-    0.0 2.5 5		12.5 15.0 17. Z (mm)	5 20.0 22.5 25	o

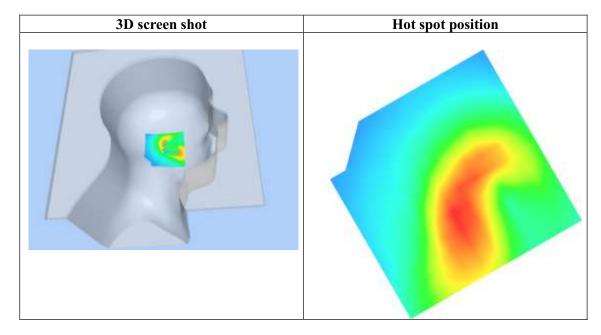

GSM 835 Mid- Body- Back <SIM 1>

DUT: GSM Mobile Phone; Type: DMW7

Communication System: Generic GSM; Communication System Band: GSM 835; Duty Cycle: 1:8.3; Conv.F=5.46; Frequency: 836.6 MHz; Medium parameters used: f = 835 MHz;  $\sigma = 0.97 \text{ mho/m}$ ;  $\epsilon = 53.62$ ;  $\rho = 1000 \text{ kg/m}^3$ ;

Phantom section: Flat Section

Ambient temperature (°C): 21.0, Liquid temperature (°C): 21.0

### SATIMO Configuration:

Probe: EP165; Calibrated: 01/31/2013


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: Flat Phantom; Type: Elliptical Phantom

· Measurement SW: OpenSAR V4\_02\_01

Configuration/GSM 835 Mid-Body-Back/Area Scan (6x8x1): Measurement grid: dx=8mm, dy=8mm Configuration/GSM 835 Mid-Body-Back/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm;


Area Scan	surf_sam_plan.txt		
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast		
Phantom	Validation plane		
Device Position	Body Back		
Band	GSM 835		
Channels	Middle		
Signal	TDMA (Crest factor: 8.0)		

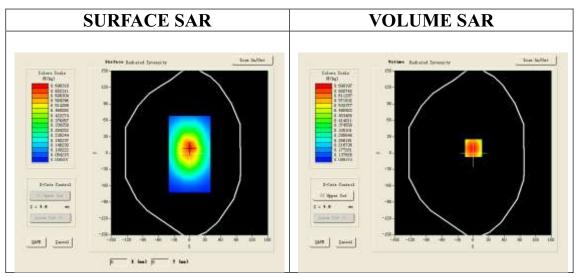

Maximum location: X=1.00, Y=9.00

<b>SAR 10g (W/Kg)</b>	0.465829
SAR 1g (W/Kg)	0.713741

Z (mm)	0.00	4.00	9.00	14.00	19.00			
SAR (W/Kg)	0.0000	0.6928	0.4465	0.2945	0.2129			
	SAR, Z Axis Scan $(X = 1, Y = 9)$							
0	0.7-							
0	1. 6 -	$\longrightarrow$	+		-			
, ke	1.5-	+						
SAR (W/kg)	1. 4 -		$\perp$					
SA.	1.3-							
0	0.0 2.5 5	.0 7.5 10.0	12.5 15.0 17.	5 20.0 22.5 25	5.0			
			(mm)					

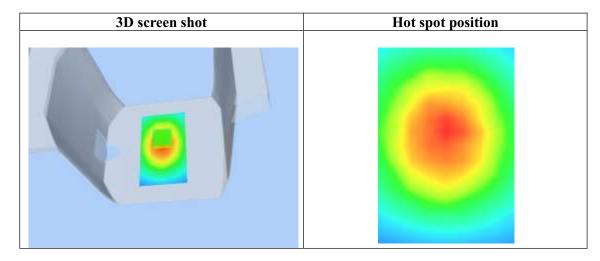

GSM 835 Mid- Body- Front (MS) <SIM 1> DUT: GSM Mobile Phone; Type: DMW7

Communication System: Generic GSM; Communication System Band: GSM 835; Duty Cycle: 1:8.3; Conv.F=5.46; Frequency: 836.6 MHz; Medium parameters used: f = 835 MHz;  $\sigma = 0.97$ mho/m;  $\epsilon r = 53.62$ ;  $\rho = 1000$  kg/m³;

Phantom section: Flat Section

Ambient temperature (°C): 21.0, Liquid temperature (°C): 21.0

### SATIMO Configuration:

Probe: EP165; Calibrated: 01/31/2013


Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: Flat Phantom; Type: Elliptical Phantom

· Measurement SW: OpenSAR V4\_02\_01

Configuration/GSM 835 Mid-Body- Front /Area Scan (6x8x1): Measurement grid: dx=8mm, dy=8mm Configuration/GSM 835 Mid-Body- Front Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm;


Area Scan	surf_sam_plan.txt		
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast		
Phantom	Validation plane		
Device Position	Body Front		
Band	GSM 835		
Channels	Middle		
Signal	TDMA (Crest factor: 8.0)		

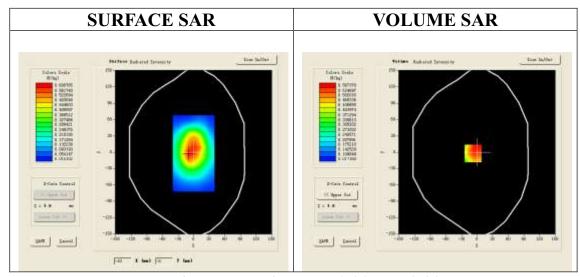

Maximum location: X=-8.00, Y=-2.00

SAR 10g (W/Kg)	0.416982
SAR 1g (W/Kg)	0.593774

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.5429	0.4137	0.3028	0.2050
	SAR, Z	Axis Scan	(X = -8,	<b>∀</b> = −2)	
0	). 54 –			1 1	
0	1. 50 -	$\overline{}$	<del>-   -  </del>		-
0	1. 45 –	+			-
ಇ ೦	. 40 –	+	$\rightarrow$		
4,€	). 40 – ). 35 –		$\overline{}$		-
<b>≝</b> 0	1.30		$\rightarrow$		-
, ο ω	. 25 –	+	+		-
О	1. 20 -			+	-
О	0.0 2.5 5	5.0 7.5 10.0	12 5 15 0 17	5 20.0 22.5 25	-
	0.0 2.5 5		I2.5 15.0 II. Z (mm)	J 20.0 22.3 25	,. 0

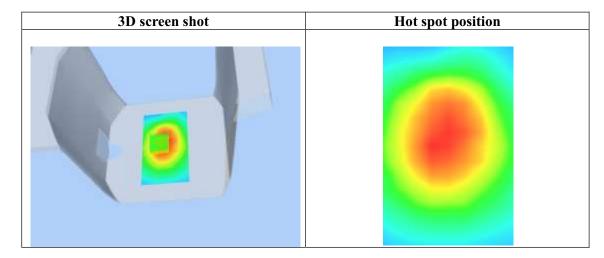

PCS 1900 Mid-Touch- Left <SIM 1>

DUT: GSM Mobile Phone; Type: DMW7

Communication System: Generic GSM; Communication System Band: PCS 1900; Duty Cycle: 1:8.3; Conv.F=4.72; Frequency: 1880 MHz; Medium parameters used: f = 1900 MHz;  $\sigma = 1.37$  mho/m;  $\epsilon = 40.25$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

Phantom section: Left Section

Ambient temperature (°C): 21.0, Liquid temperature (°C): 21.0

### SATIMO Configuration:

Probe: EP165; Calibrated: 01/31/2013


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: Flat Phantom; Type: Elliptical Phantom

· Measurement SW: OpenSAR V4\_02\_01

Configuration/PCS1900 Mid-Touch-Left/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/PCS1900 Mid-Touch-Left/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;


Area Scan	sam_direct_droit2_surf8mm.txt			
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast			
Phantom	Left head			
Device Position	Cheek			
Band	PCS 1900			
Channels	Middle			
Signal	TDMA (Crest factor: 8.0)			

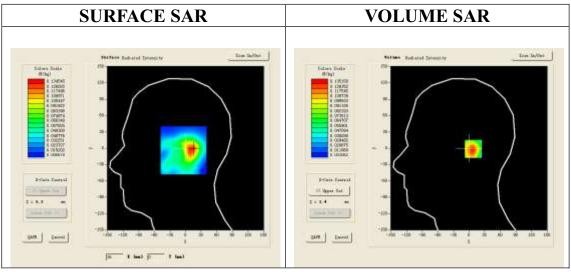

Maximum location: X=14.00, Y=-1.00

SAR 10g (W/Kg)	0.074100	
SAR 1g (W/Kg)	0.139776	

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.1352	0.0716	0.0379	0.0211
	SAR, Z	Axis Scan	(X = 14,	<b>y</b> = −1)	
0	0.14-				
0	1.12-	$\longrightarrow$			-
0	. 10-				
(A)	1. 08 -				
	0.06	$  \cdot   \cdot  $			
38.	1. 06 -				
0	1.04-				-
0	0.00 2.5 5		12.5 15.0 17. Z (nm)	5 20.0 22.5 25	- 5'. o
			2 (mm)		

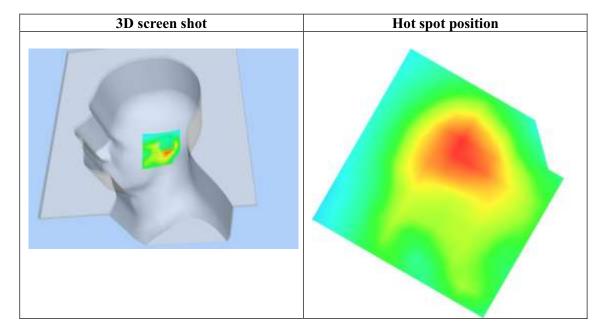

Test Laboratory: AGC Lab
PCS 1900 Mid-Tilt-Left <SIM 1>

Date: Dec.24, 2013

DUT: GSM Mobile Phone; Type: DMW7

Communication System: Generic GSM; Communication System Band: PCS 1900; Duty Cycle: 1:8.3; Conv.F=4.72; Frequency: 1880 MHz; Medium parameters used: f = 1900 MHz;  $\sigma = 1.37$  mho/m;  $\epsilon = 40.25$ ;  $\rho = 1000$  kg/m³;

Phantom section: Left Section

Ambient temperature ( $^{\circ}$ C): 21.0, Liquid temperature ( $^{\circ}$ C): 21.0

## SATIMO Configuration:

Probe: EP165; Calibrated: 01/31/2013


Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: Flat Phantom; Type: Elliptical Phantom

· Measurement SW: OpenSAR V4 02 01

Configuration/PCS1900 Mid-Tilt-Left/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/PCS1900 Mid-Tilt-Left/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;


Area Scan	sam_direct_droit2_surf8mm.txt			
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast			
Phantom	Left head			
Device Position	Tilt			
Band	PCS 1900			
Channels	Middle			
Signal	TDMA (Crest factor: 8.0)			

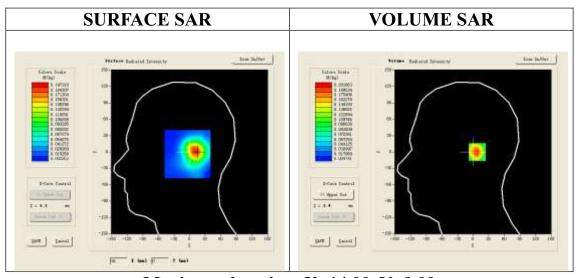

Maximum location: X=14.00, Y=0.00

SAR 10g (W/Kg)	0.108741
SAR 1g (W/Kg)	0.206149

Z (mm)	0.00	4.00	9.00	14.00	19.00	
SAR (W/Kg)	0.0000	0.2017	0.1077	0.0580	0.0333	
	SAR, Z	Axis Scar	(X = 14,	¥ = 0)		
0	). 202 -	<del>\                                    </del>	1 1 1	1 1	•	
o	). 175 -	$\longrightarrow$				
	). 150 –	+ $+$ $+$				
SAR (W/kg)	). 125 –	$+ \lambda +$			-	
ළ අ	). 100 –	++			-	
∞ឹ០	). 075 -	++++	+			
C	). 050 -					
О	0.019					
	0.0 2.5 5.0 7.5 10.0 12.5 15.0 17.5 20.0 22.5 25.0 Z (mm)					

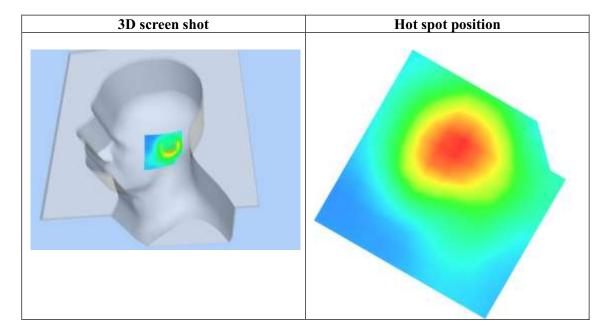

PCS 1900 Mid-Touch-Right <SIM 1>

**DUT: GSM Mobile Phone;** Type: DMW7

Communication System: Generic GSM; Communication System Band: PCS 1900; Duty Cycle: 1:8.3; Conv.F=4.72; Frequency: 1880 MHz; Medium parameters used: f = 1900 MHz;  $\sigma = 1.37 \text{ mho/m}$ ;  $\epsilon = 40.25$ ;  $\rho = 1000 \text{ kg/m}^3$ ;

Phantom section: Right Section

Ambient temperature (°C): 21.0, Liquid temperature (°C): 21.0

### SATIMO Configuration:

Probe: EP165; Calibrated: 01/31/2013


Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: Flat Phantom; Type: Elliptical Phantom

· Measurement SW: OpenSAR V4\_02\_01

**Configuration/PCS1900 Mid-Touch-Right/Area Scan:** Measurement grid: dx=8mm, dy=8mm **Configuration/PCS1900 Mid-Touch-Right/Zoom Scan:** Measurement grid: dx=8mm, dy=8mm, dz=5mm;


Area Scan	sam_direct_droit2_surf8mm.txt			
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast			
Phantom	Right head			
Device Position	Cheek			
Band	PCS 1900			
Channels	Middle			
Signal	TDMA (Crest factor: 8.0)			

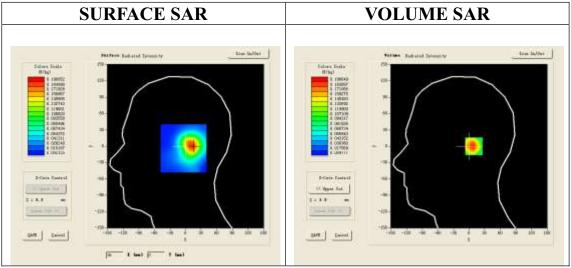

Maximum location: X=15.00, Y=0.00

SAR 10g (W/Kg)	0.108089	
SAR 1g (W/Kg)	0.202101	

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.1966	0.1049	0.0566	0.0326
	SAR, Z	Axis Scar	(X = 15,	Y = 0)	
0	. 197 –		1 1 1		
0	. 175 -	$\longrightarrow$			
0	. 150 –	$\perp$			
/kg)	). 125 –	$+\lambda+$			
≥ 0	. 100 –	++			
₩.0	0.075-		$\overline{}$		
	. 050 –				
O	0.019 - 0.0 2.5	50 75 10 0	12 5 15 0 17	5 20.0 22.5 25	-
Z (mm)					

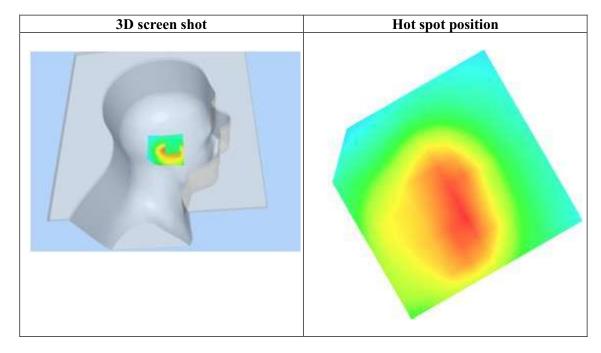

Test Laboratory: AGC Lab
PCS 1900 Mid-Tilt-Right <SIM 1>

Date: Dec.24, 2013

DUT: GSM Mobile Phone; Type: DMW7

Communication System: Generic GSM; Communication System Band: PCS 1900; Duty Cycle: 1:8.3; Conv.F=4.72; Frequency: 1880 MHz; Medium parameters used: f = 1900 MHz;  $\sigma = 1.37 \text{ mho/m}$ ;  $\epsilon = 40.25$ ;  $\rho = 1000 \text{ kg/m}^3$ ;

Phantom section: Right Section

Ambient temperature (°C): 21.0, Liquid temperature (°C): 21.0

## SATIMO Configuration:

Probe: EP165; Calibrated: 01/31/2013


Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: Flat Phantom; Type: Elliptical Phantom

· Measurement SW: OpenSAR V4 02 01

**Configuration/PCS1900 Mid-Tilt-Right/Area Scan:** Measurement grid: dx=8mm, dy=8mm **Configuration/PCS1900 Mid-Tilt-Right/Zoom Scan:** Measurement grid: dx=8mm, dy=8mm, dz=5mm;


Area Scan	sam_direct_droit2_surf8mm.txt		
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast		
Phantom	Right head		
Device Position	Tilt		
Band	PCS 1900		
Channels	Middle		
Signal	TDMA (Crest factor: 8.0)		

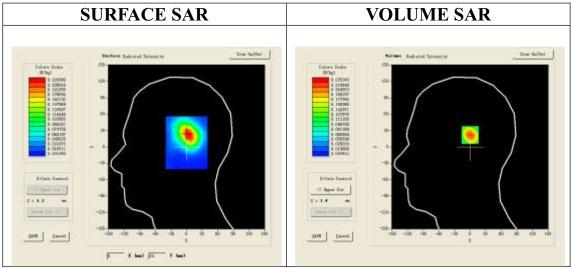

Maximum location:  $X=\overline{3.00, Y=23.00}$ 

SAR 10g (W/Kg)	0.122834
SAR 1g (W/Kg)	0.236311

Z (mm)	0.00	4.00	9.00	14.00	19.00		
SAR (W/Kg)	0.0000	0.2353	0.1186	0.0602	0.0332		
n	SAR, Z Axis Scan (X = 3, Y = 23)						
	). 20-	$\downarrow \downarrow \downarrow$					
(%/kg)	). 15-						
	). 10 -						
	1.02 -	7.5.10.0	10 5 15 0 17	5 20.0 22.5 25			
	0.0 2.5 5		12.5 15.0 17. Z (mm)	5 20.0 22.5 25	. 0		

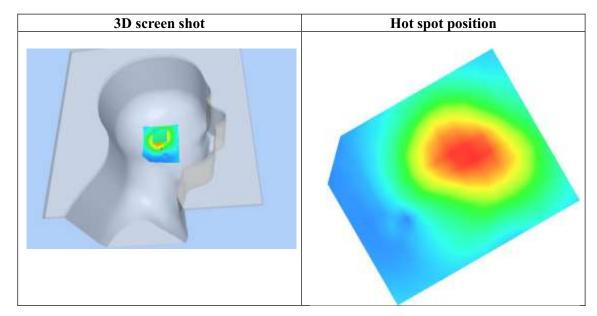

PCS 1900 Mid-Tilt-Right <SIM 2>

DUT: GSM Mobile Phone; Type: DMW7

Communication System: Generic GSM; Communication System Band: PCS 1900; Duty Cycle: 1:8.3; Conv.F=4.72; Frequency: 1880 MHz; Medium parameters used: f = 1900 MHz;  $\sigma = 1.37$  mho/m;  $\epsilon = 40.25$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

Phantom section: Right Section

Ambient temperature (°C): 21.0, Liquid temperature (°C): 21.0

## SATIMO Configuration:

Probe: EP165; Calibrated: 01/31/2013

Sensor-Surface: 4mm (Mechanical Surface Detection)


· Phantom: Flat Phantom; Type: Elliptical Phantom

· Measurement SW: OpenSAR V4 02 01

Configuration/PCS1900 Mid-Tilt-Right/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/PCS1900 Mid-Tilt-Right/Zoom Scan: Measurement grid: dx=8mm,

dy=8mm, dz=5mm;


Area Scan	sam_direct_droit2_surf8mm.txt			
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast			
Phantom	Right head			
Device Position	Tilt			
Band	PCS 1900			
Channels	Middle			
Signal	TDMA (Crest factor: 8.0)			

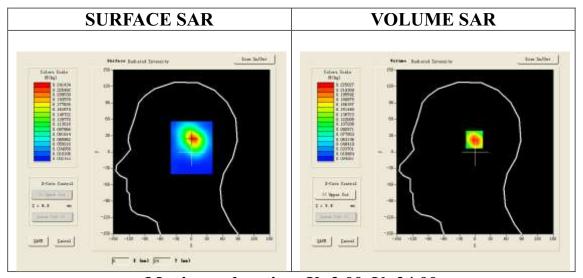

Maximum location: X=2.00, Y=24.00

SAR 10g (W/Kg)	0.118960
SAR 1g (W/Kg)	0.230392

Z (mm)	0.00	4.00	9.00	14.00	19.00	
SAR (W/Kg)	0.0000	0.2250	0.1125	0.0567	0.0312	
	SAR, Z	Axis Scar	(X = 2,	Y = 24)		
0	. 225 –					
0	. 200 -	$\longrightarrow$				
0	. 175 -	+				
⊙و⊊	. 150 -	+ $+$ $+$				
₹0	). 150 – ). 125 –	$+$ $\wedge$ $+$			-	
<b>4</b> 0	. 100 –	++				
ν, ο	. 075 -	+	$\downarrow$		-	
o	. 050 -					
O	0.018-	50 75 10 0	12 5 15 0 17	E 20 0 22 E 25		
	0.0 2.5 5.0 7.5 10.0 12.5 15.0 17.5 20.0 22.5 25.0 Z (mm)					

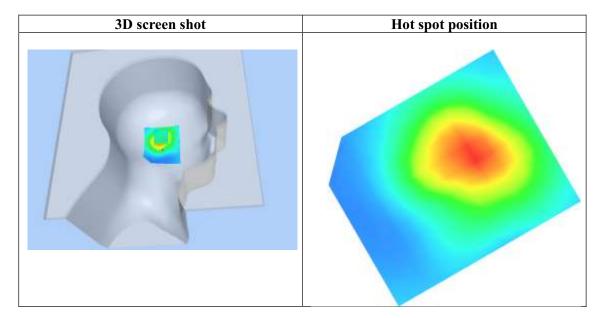

PCS 1900 Mid-Body-Back <SIM 1>

**DUT: GSM Mobile Phone;** Type: DMW7

Communication System: Generic GSM; Communication System Band: PCS 1900; Duty Cycle: 1:8.3; Conv.F=4.84; Frequency: 1880 MHz; Medium parameters used: f = 1900 MHz;  $\sigma = 1.49 \text{ mho/m}$ ;  $\epsilon = 51.27$ ;  $\rho = 1000 \text{ kg/m}^3$ ;

Phantom section: Flat Section

Ambient temperature (°C): 21.0, Liquid temperature (°C): 21.0

### SATIMO Configuration:

Probe: EP165; Calibrated: 01/31/2013


Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: Flat Phantom; Type: Elliptical Phantom

· Measurement SW: OpenSAR V4\_02\_01

Configuration/PCS1900 Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/PCS1900 Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;


Area Scan	surf_sam_plan.txt			
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast			
Phantom	Validation plane			
Device Position	Body Back			
Band	PCS 1900			
Channels	Middle			
Signal	TDMA (Crest factor: 8.0)			

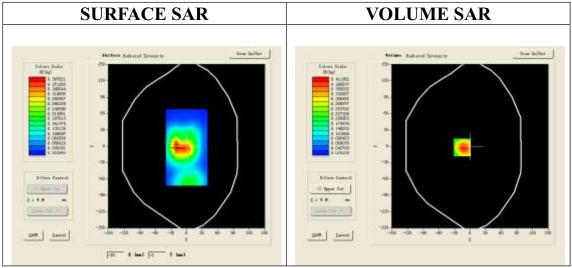

**Maximum location: X=-15.00, Y=-2.00** 

SAR 10g (W/Kg)	0.232437	
SAR 1g (W/Kg)	0.427009	

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.4120	0.2122	0.1133	0.0684
	SAR, Z	Axis Scan	(X = −15,	<b>₹</b> = −2)	
c	0. 41 -				-
c	). 35 –	$\longrightarrow$			-
20	). 30 -	+			-
(#/kg)	). 25 -	$+ \lambda +$			-
S	). 20 -	++	+		-
, s	). 15 –	+	$\downarrow$		_
c	). 10 –	$\perp$			_
	0.04-				.
		5.0 7.5 10.0	12.5 15.0 17.	5 20.0 22.5 25	5.0
Z (mm)					

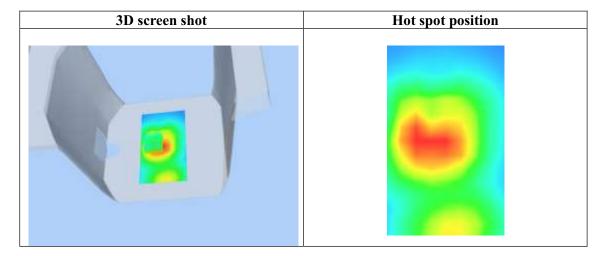

PCS 1900 Mid-Body -Front (MS) <SIM 1> **DUT: GSM Mobile Phone; Type: DMW7** 

Communication System: Generic GSM; Communication System Band: PCS 1900; Duty Cycle: 1:8.3; Conv.F=4.84; Frequency: 1880 MHz; Medium parameters used: f = 1900 MHz;  $\sigma = 1.49$  mho/m;  $\epsilon = 51.27$ ;  $\rho = 1000$  kg/m³;

Phantom section: Flat Section

Ambient temperature (°C): 21.0, Liquid temperature (°C): 21.0

### SATIMO Configuration:

Probe: EP165; Calibrated: 01/31/2013


Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: Flat Phantom; Type: Elliptical Phantom

· Measurement SW: OpenSAR V4\_02\_01

Configuration/PCS1900 Mid-Body- Front /Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/PCS1900 Mid-Body- Front /Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt			
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast			
Phantom	Validation plane			
Device Position	Body Front			
Band	PCS 1900			
Channels	Middle			
Signal	TDMA (Crest factor: 8.0)			

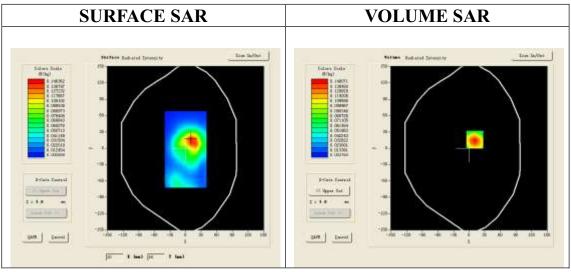

Maximum location: X=11.00, Y=16.00

SAR 10g (W/Kg)	0.080589	
SAR 1g (W/Kg)	0.152811	

Z (mm)	0.00	4.00	9.00	14.00	19.00		
SAR (W/Kg)	0.0000	0.1481	0.0759	0.0392	0.0218		
	SAR, Z Axis Scan (X = 11, Y = 16)						
0	0.15-						
0	1. 12 -	$\longrightarrow$					
, kg)	). 10 – ). 08 –	$+ \setminus +$			-		
≥ 0	. 08 -	+	$\perp$				
SAR	1. 06 -	++					
O	0.04-				-		
0	0.01 - 0.0 2.5 5	5.0 7.5 10.0	12.5 15.0 17.	5 20.0 22.5 25	s. o		
Z (mm)							

