



# FCC PART 15.247 TEST REPORT

For

## Sky Phone LLC

1348 Washington Av.Suite 350 Miami Beach, FL, United States 33139

**FCC ID: 2ABOSPLAT50W**

<b>Report Type:</b> Original Report	<b>Product Name:</b> Smartphone
<b>Test Engineer:</b> <u>Kevin Hu</u>	<i>Kevin hu</i>
<b>Report Number:</b> <u>RDG161025002B</u>	
<b>Report Date:</b> <u>2016-11-08</u>	
<b>Reviewed By:</b> <u>Henry Ding</u> EMC Leader	<i>Henry Ding</i>
<b>Test Laboratory:</b>	Bay Area Compliance Laboratories Corp. (Chengdu) No.5040, Huilongwan Plaza, No.1, Shawan Road, Jinniu District, Chengdu, Sichuan, China Tel: 028-65523123, Fax: 028-65525125 www.baclcorp.com

**Note:** This test report was prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Chengdu). Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. This report was valid only with a valid digital signature.

## TABLE OF CONTENTS

<b>GENERAL INFORMATION .....</b>	<b>4</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE.....	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY .....	4
TEST FACILITY.....	5
<b>SYSTEM TEST CONFIGURATION .....</b>	<b>6</b>
DESCRIPTION OF TEST CONFIGURATION.....	6
EUT EXERCISE SOFTWARE .....	6
EQUIPMENT MODIFICATIONS .....	6
EXTERNAL CABLE .....	6
BLOCK DIAGRAM OF TEST SETUP .....	6
<b>SUMMARY OF TEST RESULTS.....</b>	<b>7</b>
<b>FCC §15.247 (i) &amp; §1.1310 &amp; §2.1093- RF EXPOSURE.....</b>	<b>8</b>
APPLICABLE STANDARD.....	8
<b>FCC §15.203 - ANTENNA REQUIREMENT .....</b>	<b>9</b>
APPLICABLE STANDARD.....	9
ANTENNA CONNECTOR CONSTRUCTION .....	9
<b>FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS .....</b>	<b>10</b>
APPLICABLE STANDARD.....	10
MEASUREMENT UNCERTAINTY .....	10
EUT SETUP .....	10
EMI TEST RECEIVER SETUP .....	11
TEST PROCEDURE .....	11
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	11
TEST EQUIPMENT LIST AND DETAILS .....	12
TEST DATA .....	12
<b>FCC §15.209, §15.205 &amp; §15.247(d) - SPURIOUS EMISSIONS .....</b>	<b>15</b>
APPLICABLE STANDARD.....	15
MEASUREMENT UNCERTAINTY .....	15
EUT SETUP .....	16
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....	17
TEST PROCEDURE .....	17
TEST EQUIPMENT LIST AND DETAILS .....	17
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	18
TEST DATA .....	18
<b>FCC §15.247(a) (1) - CHANNEL SEPARATION TEST.....</b>	<b>23</b>
APPLICABLE STANDARD.....	23
TEST EQUIPMENT LIST AND DETAILS .....	23
TEST PROCEDURE .....	23
TEST DATA .....	23
<b>FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING.....</b>	<b>29</b>
APPLICABLE STANDARD.....	29
TEST PROCEDURE .....	29

TEST EQUIPMENT LIST AND DETAILS .....	29
TEST DATA .....	29
<b>FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST .....</b>	<b>35</b>
APPLICABLE STANDARD .....	35
TEST PROCEDURE .....	35
TEST EQUIPMENT LIST AND DETAILS .....	35
TEST DATA .....	35
<b>FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME) .....</b>	<b>39</b>
APPLICABLE STANDARD .....	39
TEST PROCEDURE .....	39
TEST EQUIPMENT LIST AND DETAILS .....	39
TEST DATA .....	39
<b>FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT .....</b>	<b>55</b>
APPLICABLE STANDARD .....	55
TEST PROCEDURE .....	55
TEST EQUIPMENT LIST AND DETAILS .....	55
TEST DATA .....	55
<b>FCC §15.247(d) - BAND EDGES TESTING .....</b>	<b>61</b>
APPLICABLE STANDARD .....	61
TEST PROCEDURE .....	61
TEST EQUIPMENT LIST AND DETAILS .....	61
TEST DATA .....	62

## GENERAL INFORMATION

---

### Product Description for Equipment under Test (EUT)

The **Sky Phone LLC**'s product, model number: **Platinum 5.0W (FCC ID: 2ABOSPLAT50W)** (the "EUT") in this report was a **Smartphone**, which was measured approximately: 14.2 cm (L) × 7.2 cm (W) × 1 cm (H), rated input voltage: DC3.7V rechargeable Li-ion battery or DC5V from adapter.

Adapter information:

Model: JK050100-S02USU

Input: 100-240V~50/60Hz 0.3A Max

Output: DC 5V, 1000mA

*Note: The series product, model Platinum 5.0W, PQ51 are electrically identical, the difference between them just have the different model name and color, we selected Platinum 5.0W for fully testing, the details was explained in the declaration letter.*

*\*All measurement and test data in this report was gathered from final production sample, serial number: 161025002 (assigned by the BACL, Chengdu). It may have deviation from any other sample. The EUT supplied by the applicant was received on 2016-10-25, and EUT conformed to test requirement.*

### Objective

This report is prepared on behalf of **Sky Phone LLC** in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communications Commission's rules

The tests were performed in order to determine the Bluetooth BDR and EDR mode of EUT compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

### Related Submittal(s)/Grant(s)

FCC Part 15B JBP submissions with FCC ID: 2ABOSPLAT50W.

FCC Part 22H, 24E PCE submissions with FCC ID: 2ABOSPLAT50W.

FCC Part 15C DTS submissions with FCC ID: 2ABOSPLAT50W.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

The uncertainty of any RF tests which use conducted method measurement is  $\pm 3.17$  dB, the uncertainty of any radiation on emissions measurement is:

30M~200MHz:  $\pm 4.7$  dB;

200M~1GHz:  $\pm 6.0$  dB;

1G~6GHz:  $\pm 5.13$ dB;

6G~25GHz:  $\pm 5.47$ dB;

And the uncertainty will not be taken into consideration for all test data recorded in the report.

## **Test Facility**

The test site used by BACL to collect test data is located in the No.5040, Huilongwan Plaza, No.1, Shawan Road, Jinniu District, Chengdu, Sichuan, China

Test site at BACL has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on April 24, 2015. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 560332. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The system was configured for testing in engineering mode.

### EUT Exercise Software

The engineering mode configured the maximum power as default setting.


### Equipment Modifications

No modification was made to the EUT.

### External Cable

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
USB Cable	Yes	No	1.0	USB Port of Adapter	EUT
Earphone Cable	No	No	1.2	Audio Port of EUT	Earphone

### Block Diagram of Test Setup

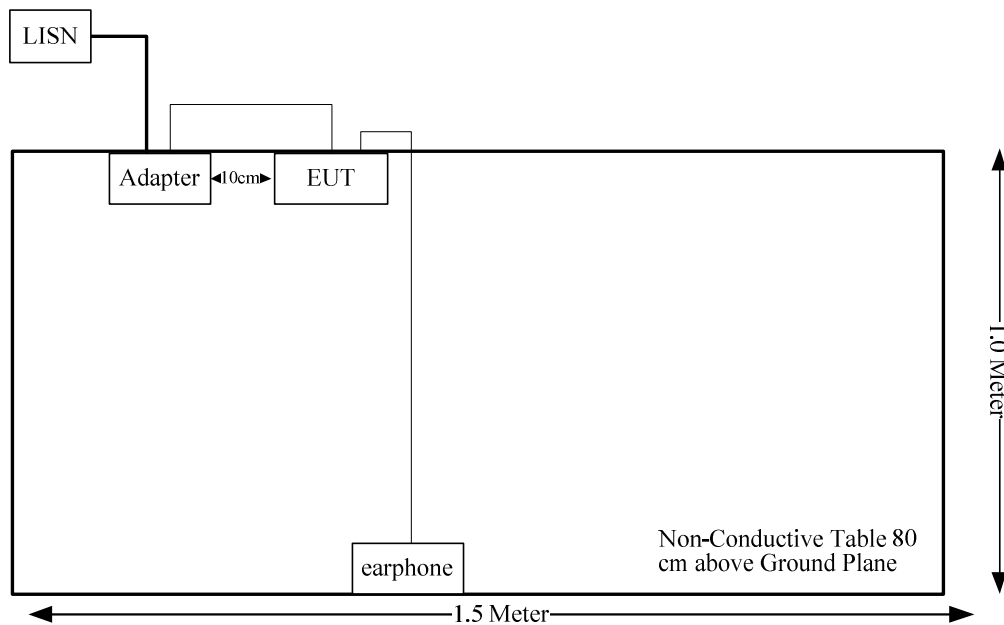

## **SUMMARY OF TEST RESULTS**

---

<b>FCC Rules</b>	<b>Description of Test</b>	<b>Result</b>
FCC §15.247 (i) & §1.1310 & §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(1)	20 dB Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band Edges	Compliance

## **FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE**

---

### **Applicable Standard**

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v06:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$  for 1-g SAR and  $\leq 7.5$  for 10-g extremity SAR, where

- $f(\text{GHz})$  is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is  $\leq 50$  mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

### **Measurement Result**

The max conducted power including tune-up tolerance is 3.4 dBm (2.19 mW).  
 $[(\text{max. power of channel, mW})/(\text{min. test separation distance, mm})][\sqrt{f(\text{GHz})}]$   
 $= 2.19/5 \cdot (\sqrt{2.480}) = 0.7 < 3.0$

**So the stand-alone SAR evaluation is not necessary.**



## **FCC §15.203 - ANTENNA REQUIREMENT**

---

### **Applicable Standard**

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### **Antenna Connector Construction**

The EUT has one internal antenna arrangement for Wifi/BT, and the antenna gain is 0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

**Result:** Compliance.

## FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

### Applicable Standard

FCC§15.207

### Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If  $U_{lab}$  is less than or equal to  $U_{cispr}$  of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If  $U_{lab}$  is greater than  $U_{cispr}$  of Table 1, then:


- compliance is deemed to occur if no measured disturbance level, increased by  $(U_{lab} - U_{cispr})$ , exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by  $(U_{lab} - U_{cispr})$ , exceeds the disturbance limit.

Based on CISPR 16-4-2:2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Chengdu) is  $\pm 3.17$  dB (150 kHz to 30 MHz).

Table 1 – Values of  $U_{cispr}$

Measurement	$U_{cispr}$
Conducted disturbance at mains port using AMN (150 kHz to 30 MHz)	3.4 dB

### EUT Setup

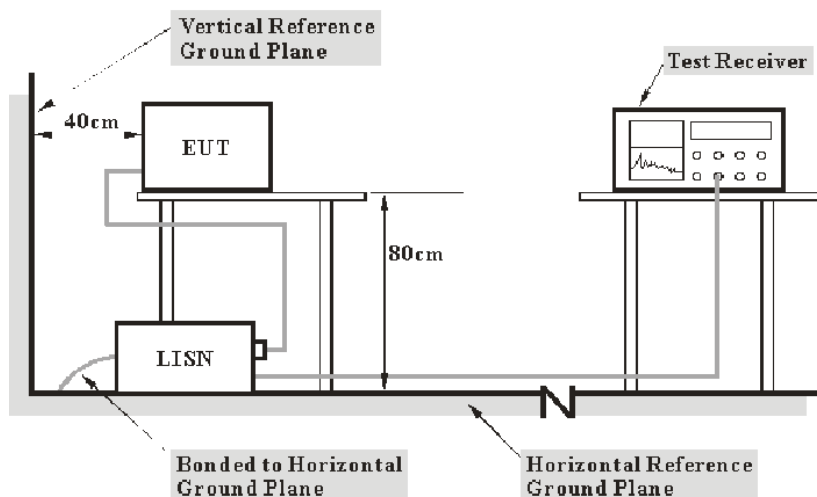

- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 V/60 Hz AC power source.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

### Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

### Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

Herein,

$V_C$ : corrected voltage amplitude

$V_R$ : reading voltage amplitude

$A_C$ : attenuation caused by cable loss

$VDF$ : voltage division factor of AMN or ISN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS 30	836858/0016	2015-12-02	2016-12-01
Rohde & Schwarz	L.I.S.N.	ENV216	3560.6550.06	2015-12-02	2016-12-01
Rohde & Schwarz	PULSE LIMITER	ESH3Z2	357.8810.52	2016-10-31	2017-10-30
N/A	Conducted Cable	NO.5	N/A	2015-11-10	2016-11-09
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A

\* **Statement of Traceability:** BACL (Chengdu) attested that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Data


#### Environmental Conditions

<b>Temperature:</b>	24.9 °C
<b>Relative Humidity:</b>	37 %
<b>ATM Pressure:</b>	100.9 kPa

*The testing was performed by Kevin Hu on 2016-11-04.*

Test Mode: Transmitting


AC120 V, 60 Hz, Line:

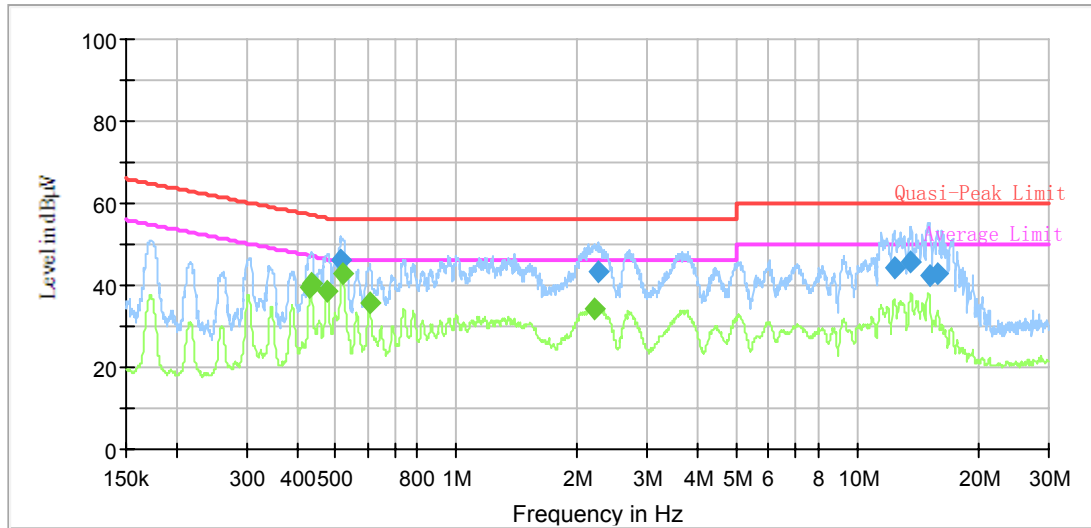

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.515636	46.3	9.000	L1	20.0	9.7	56.0	Compliance
2.261817	43.5	9.000	L1	20.1	12.5	56.0	Compliance
12.335392	44.3	9.000	L1	20.3	15.7	60.0	Compliance
13.495856	45.8	9.000	L1	20.4	14.2	60.0	Compliance
15.093600	42.4	9.000	L1	20.5	17.6	60.0	Compliance
15.866673	42.6	9.000	L1	20.5	17.4	60.0	Compliance

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.431635	39.6	9.000	L1	19.9	7.6	47.2	Compliance
0.433363	40.5	9.000	L1	19.9	6.7	47.2	Compliance
0.476030	38.7	9.000	L1	19.9	7.7	46.4	Compliance
0.519774	42.9	9.000	L1	20.0	3.1	46.0	Compliance
0.606218	35.8	9.000	L1	20.0	10.2	46.0	Compliance
2.208232	34.3	9.000	L1	20.1	11.7	46.0	Compliance

**AC120 V, 60 Hz, Neutral:**

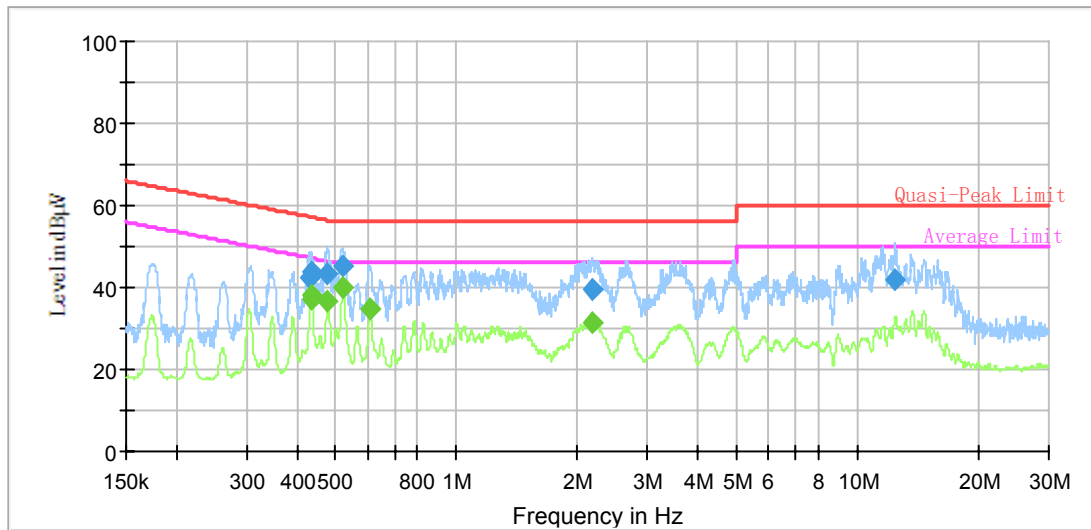

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.429055	42.5	9.000	N	19.9	14.8	57.3	Compliance
0.433363	44.0	9.000	N	19.9	13.2	57.2	Compliance
0.474132	43.2	9.000	N	19.9	13.2	56.4	Compliance
0.518736	45.0	9.000	N	19.9	11.0	56.0	Compliance
2.186282	39.5	9.000	N	20.1	16.5	56.0	Compliance
12.409553	41.8	9.000	N	20.3	18.2	60.0	Compliance

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.432498	37.1	9.000	N	19.9	10.1	47.2	Compliance
0.434230	38.0	9.000	N	19.9	9.2	47.2	Compliance
0.477936	36.8	9.000	N	19.9	9.6	46.4	Compliance
0.521855	39.8	9.000	N	19.9	6.2	46.0	Compliance
0.608645	34.7	9.000	N	19.9	11.3	46.0	Compliance
2.173216	31.6	9.000	N	20.1	14.4	46.0	Compliance

## FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

### Applicable Standard

FCC §15.247 (d); §15.209; §15.205;

### Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If  $U_{lab}$  is less than or equal to  $U_{cispr}$  of Table 2, then:

–compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;  
–non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If  $U_{lab}$  is greater than  $U_{cispr}$  of Table 2, then:

–compliance is deemed to occur if no measured disturbance level, increased by  $(U_{lab} - U_{cispr})$ , exceeds the disturbance limit;  
–non-compliance is deemed to occur if any measured disturbance level, increased by  $(U_{lab} - U_{cispr})$ , exceeds the disturbance limit.

Based on CISPR 16-4-2-2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Chengdu) is:

30M~200MHz: ±4.7 dB;

200M~1GHz: ±6.0 dB;

1G~6GHz: ±5.13dB;


6G~25GHz: ±5.47 dB;

Table 2 – Values of  $U_{cispr}$


Measurement	$U_{cispr}$
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB

## EUT Setup

### Below 1GHz:

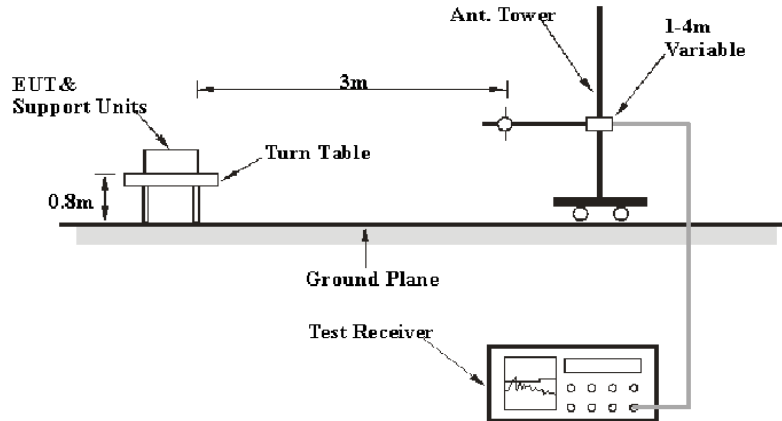

### Above 1GHz:

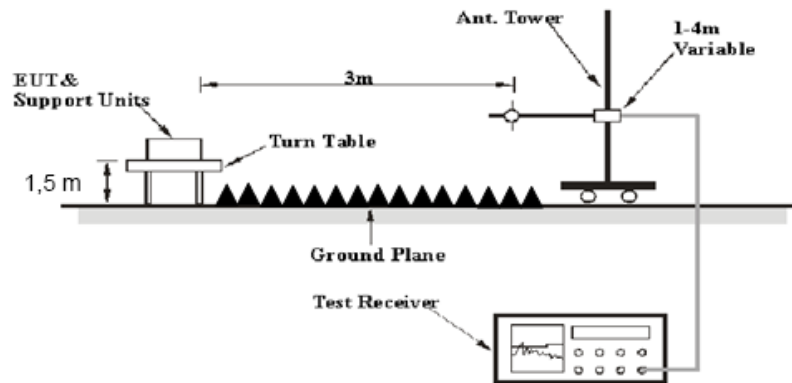

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.



## EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	AV

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz - 1 GHz, peak and average detection modes for frequencies above 1 GHz.

## Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	Amplifier	8447D	2944A10442	2015-12-02	2016-12-01
Rohde & Schwarz	EMI Test Receiver	ESCI	100028	2015-12-02	2016-12-01
Sunol Sciences	Broadband Antenna	JB3	A101808	2016-04-10	2019-04-09
Rohde & Schwarz	Spectrum Analyzer	FSEM30	100018	2015-12-02	2016-12-01
ETS	Horn Antenna	3115	003-6076	2015-12-02	2016-12-01
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-0113024	2014-06-16	2017-06-15
Mini-circuits	Amplifier	ZVA-183-S+	771001215	2016-05-20	2017-05-19
HP	Amplifier	8449B	3008A00277	2015-12-02	2016-12-01
EMCT	Semi-Anechoic Chamber	966	N/A	2015-04-24	2018-04-23
N/A	RF Cable (below 1GHz)	NO.1	N/A	2015-11-10	2016-11-09
N/A	RF Cable (below 1GHz)	NO.4	N/A	2015-11-10	2016-11-09
N/A	RF Cable (above 1GHz)	NO.2	N/A	2015-11-10	2016-11-09

\* **Statement of Traceability:** BACL (Chengdu) attested that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

### Test Data


#### Environmental Conditions

<b>Temperature:</b>	24.9 °C
<b>Relative Humidity:</b>	37 %
<b>ATM Pressure:</b>	100.9 kPa

\* The testing was performed by Kevin Hu on 2016-11-04.

*Test Mode: Transmitting*

1) 30 MHz to 1 GHz:

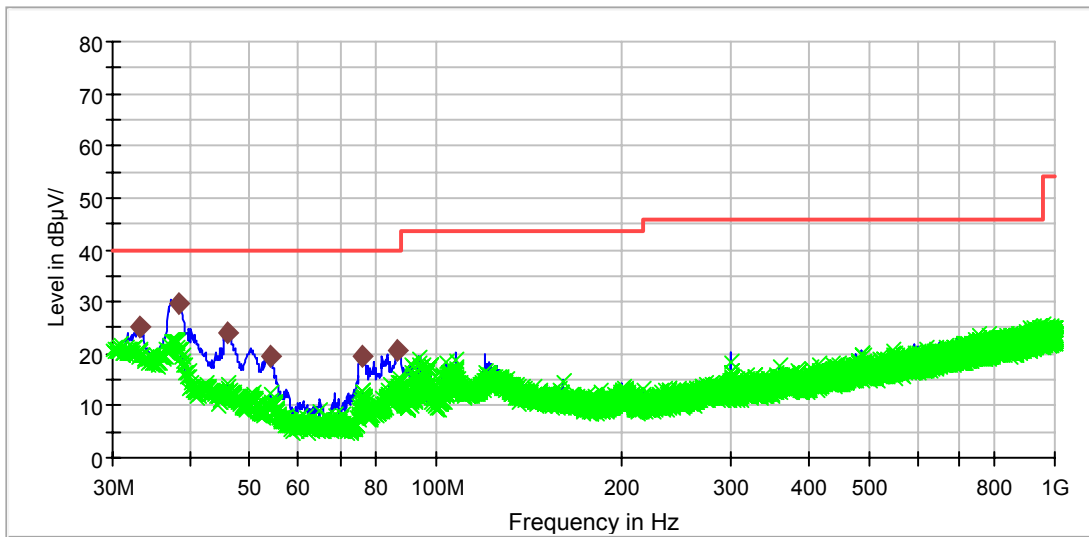

Frequency (MHz)	QuasiPeak (dBµV/m)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
33.273750	25.0	100.0	V	36.0	-7.6	15.0	40.0
38.366250	29.7	100.0	V	133.0	-11.6	10.3	40.0
46.126250	23.9	100.0	V	358.0	-17.4	16.1	40.0
53.886250	19.7	100.0	V	214.0	-20.1	20.3	40.0
76.196250	19.6	200.0	V	25.0	-20.1	20.4	40.0
86.866250	20.5	200.0	V	8.0	-19.3	19.5	40.0

2) 1-25GHz:

BDR Mode (GFSK):

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	FCC 15.247	
	Reading (dBµV)	Detector	Polar (H/V)	Factor (dB)				Limit (dBµV/m)	Margin (dB)
Low Channel: 2402 MHz									
2402	65.14	PK	H	23.53	3.00	0.00	91.67	N/A	N/A
2402	54.18	AV	H	23.53	3.00	0.00	80.71	N/A	N/A
2402	69.96	PK	V	23.53	3.00	0.00	96.49	N/A	N/A
2402	58.92	AV	V	23.53	3.00	0.00	85.45	N/A	N/A
2390	29.93	PK	V	23.57	3.00	0.00	56.50	74.00	17.50
2390	17	AV	V	23.57	3.00	0.00	43.57	54.00	10.43
4804	34.55	PK	V	30.77	5.12	26.87	43.57	74.00	30.43
4804	22.01	AV	V	30.77	5.12	26.87	31.03	54.00	22.97
7206	32.5	PK	V	34.71	6.16	26.35	47.02	74.00	26.98
7206	20.03	AV	V	34.71	6.16	26.35	34.55	54.00	19.45
3908	36.46	PK	V	28.63	4.78	26.56	43.31	74.00	30.69
3908	24.04	AV	V	28.63	4.78	26.56	30.89	54.00	23.11
Middle Channel: 2441 MHz									
2441	64.58	PK	H	23.40	3.00	0.00	90.98	N/A	N/A
2441	53.66	AV	H	23.40	3.00	0.00	80.06	N/A	N/A
2441	69.51	PK	V	23.40	3.00	0.00	95.91	N/A	N/A
2441	58.46	AV	V	23.40	3.00	0.00	84.86	N/A	N/A
4882	34.18	PK	V	31.02	5.09	26.87	43.42	74.00	30.58
4882	21.7	AV	V	31.02	5.09	26.87	30.94	54.00	23.06
7323	32.39	PK	V	34.95	6.22	26.40	47.16	74.00	26.84
7323	19.86	AV	V	34.95	6.22	26.40	34.63	54.00	19.37
3908	36.2	PK	V	28.63	4.78	26.56	43.05	74.00	30.95
3908	23.95	AV	V	28.63	4.78	26.56	30.80	54.00	23.20
3747	36.01	PK	V	27.99	4.55	26.57	41.98	74.00	32.02
3747	23.64	AV	V	27.99	4.55	26.57	29.61	54.00	24.39
High Channel: 2480 MHz									
2480	63.95	PK	H	23.27	2.99	0.00	90.21	N/A	N/A
2480	53.01	AV	H	23.27	2.99	0.00	79.27	N/A	N/A
2480	68.76	PK	V	23.27	2.99	0.00	95.02	N/A	N/A
2480	57.82	AV	V	23.27	2.99	0.00	84.08	N/A	N/A
2483.5	32.75	PK	V	23.26	2.99	0.00	59.00	74.00	15.00
2483.5	15.41	AV	V	23.26	2.99	0.00	41.66	54.00	12.34
4960	33.86	PK	V	31.27	5.05	26.88	43.30	74.00	30.70
4960	21.36	AV	V	31.27	5.05	26.88	30.80	54.00	23.20
7440	32.21	PK	V	35.18	6.27	26.45	47.21	74.00	26.79
7440	19.7	AV	V	35.18	6.27	26.45	34.70	54.00	19.30
3908	36.44	PK	V	28.63	4.78	26.56	43.29	74.00	30.71
3908	23.97	AV	V	28.63	4.78	26.56	30.82	54.00	23.18

EDR Mode ( $\pi/4$ -DQPSK):

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB $\mu$ V/m)	FCC 15.247	
	Reading (dB $\mu$ V)	Detector	Polar (H/V)	Factor (dB)				Limit (dB $\mu$ V/m)	Margin (dB)
Low Channel: 2402 MHz									
2402	64.71	PK	H	23.53	3.00	0.00	91.24	N/A	N/A
2402	52.02	AV	H	23.53	3.00	0.00	78.55	N/A	N/A
2402	69.52	PK	V	23.53	3.00	0.00	96.05	N/A	N/A
2402	56.67	AV	V	23.53	3.00	0.00	83.20	N/A	N/A
2390	32.59	PK	V	23.57	3.00	0.00	59.16	74.00	14.84
2390	15.41	AV	V	23.57	3.00	0.00	41.98	54.00	12.02
4804	34.28	PK	V	30.77	5.12	26.87	43.30	74.00	30.70
4804	21.79	AV	V	30.77	5.12	26.87	30.81	54.00	23.19
7206	32.34	PK	V	34.71	6.16	26.35	46.86	74.00	27.14
7206	19.92	AV	V	34.71	6.16	26.35	34.44	54.00	19.56
3908	36.35	PK	V	28.63	4.78	26.56	43.20	74.00	30.80
3908	24.28	AV	V	28.63	4.78	26.56	31.13	54.00	22.87
Middle Channel: 2441 MHz									
2441	63.98	PK	H	23.40	3.00	0.00	90.38	N/A	N/A
2441	51.38	AV	H	23.40	3.00	0.00	77.78	N/A	N/A
2441	68.74	PK	V	23.40	3.00	0.00	95.14	N/A	N/A
2441	55.97	AV	V	23.40	3.00	0.00	82.37	N/A	N/A
4882	34.02	PK	V	31.02	5.09	26.87	43.26	74.00	30.74
4882	21.54	AV	V	31.02	5.09	26.87	30.78	54.00	23.22
7323	32.22	PK	V	34.95	6.22	26.40	46.99	74.00	27.01
7323	19.77	AV	V	34.95	6.22	26.40	34.54	54.00	19.46
3908	36.72	PK	V	28.63	4.78	26.56	43.57	74.00	30.43
3908	23.98	AV	V	28.63	4.78	26.56	30.83	54.00	23.17
3747	36.09	PK	V	27.99	4.55	26.57	42.06	74.00	31.94
3747	23.71	AV	V	27.99	4.55	26.57	29.68	54.00	24.32
High Channel: 2480 MHz									
2480	63.1	PK	H	23.27	2.99	0.00	89.36	N/A	N/A
2480	50.34	AV	H	23.27	2.99	0.00	76.60	N/A	N/A
2480	67.93	PK	V	23.27	2.99	0.00	94.19	N/A	N/A
2480	55.14	AV	V	23.27	2.99	0.00	81.40	N/A	N/A
2483.5	31.1	PK	V	23.26	2.99	0.00	57.35	74.00	16.65
2483.5	15.41	AV	V	23.26	2.99	0.00	41.66	54.00	12.34
4960	33.81	PK	V	31.27	5.05	26.88	43.25	74.00	30.75
4960	21.28	AV	V	31.27	5.05	26.88	30.72	54.00	23.28
7440	32.09	PK	V	35.18	6.27	26.45	47.09	74.00	26.91
7440	19.65	AV	V	35.18	6.27	26.45	34.65	54.00	19.35
3908	36.35	PK	V	28.63	4.78	26.56	43.20	74.00	30.80
3908	24.28	AV	V	28.63	4.78	26.56	31.13	54.00	22.87

EDR Mode (8-DPSK):

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	FCC 15.247	
	Reading (dBµV)	Detector	Polar (H/V)	Factor (dB)				Limit (dBµV/m)	Margin (dB)
Low Channel: 2402 MHz									
2402	64.95	PK	H	23.53	3.00	0.00	91.48	N/A	N/A
2402	52.02	AV	H	23.53	3.00	0.00	78.55	N/A	N/A
2402	66.78	PK	V	23.53	3.00	0.00	93.31	N/A	N/A
2402	53.75	AV	V	23.53	3.00	0.00	80.28	N/A	N/A
2390	32.12	PK	V	23.57	3.00	0.00	58.69	74.00	15.31
2390	15.41	AV	V	23.57	3.00	0.00	41.98	54.00	12.02
4804	34.4	PK	V	30.77	5.12	26.87	43.42	74.00	30.58
4804	21.83	AV	V	30.77	5.12	26.87	30.85	54.00	23.15
7206	32.39	PK	V	34.71	6.16	26.35	46.91	74.00	27.09
7206	19.89	AV	V	34.71	6.16	26.35	34.41	54.00	19.59
3908	36.56	PK	V	28.63	4.78	26.56	43.41	74.00	30.59
3908	23.88	AV	V	28.63	4.78	26.56	30.73	54.00	23.27
Middle Channel: 2441 MHz									
2441	64.19	PK	H	23.40	3.00	0.00	90.59	N/A	N/A
2441	51.39	AV	H	23.40	3.00	0.00	77.79	N/A	N/A
2441	66.01	PK	V	23.40	3.00	0.00	92.41	N/A	N/A
2441	53.01	AV	V	23.40	3.00	0.00	79.41	N/A	N/A
4882	34.26	PK	V	31.02	5.09	0.00	70.37	74.00	3.63
4882	21.7	AV	V	31.02	5.09	0.00	57.81	54.00	-3.81
7323	32.28	PK	V	34.95	6.22	26.40	47.05	74.00	26.95
7323	19.75	AV	V	34.95	6.22	26.40	34.52	54.00	19.48
3908	36.46	PK	V	28.63	4.78	26.56	43.31	74.00	30.69
3908	24.22	AV	V	28.63	4.78	26.56	31.07	54.00	22.93
3747	36.16	PK	V	27.99	4.55	26.57	42.13	74.00	31.87
3747	23.75	AV	V	27.99	4.55	26.57	29.72	54.00	24.28
High Channel: 2480 MHz									
2480	63.34	PK	H	23.27	2.99	0.00	89.60	N/A	N/A
2480	50.41	AV	H	23.27	2.99	0.00	76.67	N/A	N/A
2480	65.16	PK	V	23.27	2.99	0.00	91.42	N/A	N/A
2480	52.22	AV	V	23.27	2.99	0.00	78.48	N/A	N/A
2483.5	30.92	PK	V	23.26	2.99	0.00	57.17	74.00	16.83
2483.5	15.41	AV	V	23.26	2.99	0.00	41.66	54.00	12.34
4960	34.15	PK	V	31.27	5.05	26.88	43.59	74.00	30.41
4960	21.54	AV	V	31.27	5.05	26.88	30.98	54.00	23.02
7440	32.14	PK	V	35.18	6.27	26.45	47.14	74.00	26.86
7440	19.63	AV	V	35.18	6.27	26.45	34.63	54.00	19.37
3908	36.85	PK	V	28.63	4.78	26.56	43.70	74.00	30.30
3908	23.96	AV	V	28.63	4.78	26.56	30.81	54.00	23.19

## FCC §15.247(a) (1) - CHANNEL SEPARATION TEST

### Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.50 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100028	2015-12-02	2016-12-01
N/A	RF Cable	N/A	N/A	Each Time	/

\* **Statement of Traceability:** BACL (Chengdu) attested that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Procedure

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 30 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another trace.
3. Measure the channel separation.

### Test Data

#### Environmental Conditions

<b>Temperature:</b>	28.2 °C
<b>Relative Humidity:</b>	50 %
<b>ATM Pressure:</b>	101.2 kPa

\* *The testing was performed by Kevin Hu on 2016-11-03.*

**Test Result:** Compliance.

Please refer to following tables and plots


Test Mode: Transmitting

Mode	Channel	Frequency	Channel Separation	Limit
		MHz	MHz	MHz
BDR (GFSK)	Low	2402	1.000	0.60
	Middle	2441	1.000	0.59
	High	2480	1.000	0.59
EDR (π/4-DQPSK)	Low	2402	1.004	0.85
	Middle	2441	1.004	0.85
	High	2480	1.004	0.83
EDR (8DPSK)	Low	2402	1.000	0.84
	Middle	2441	1.000	0.85
	High	2480	1.000	0.84

Note: Limit= (2/3) × 20dB bandwidth

BDR Mode (GFSK):


Low Channel

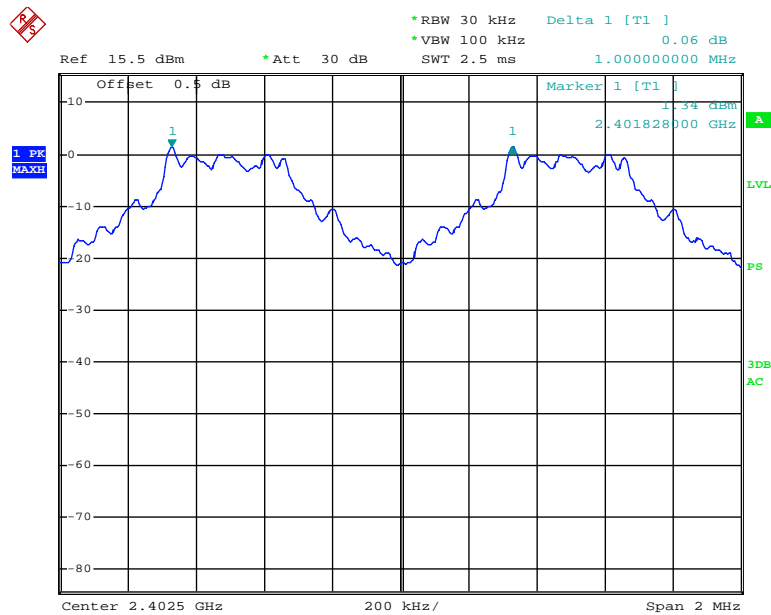

Date: 3.NOV.2016 18:47:39




### Middle Channel

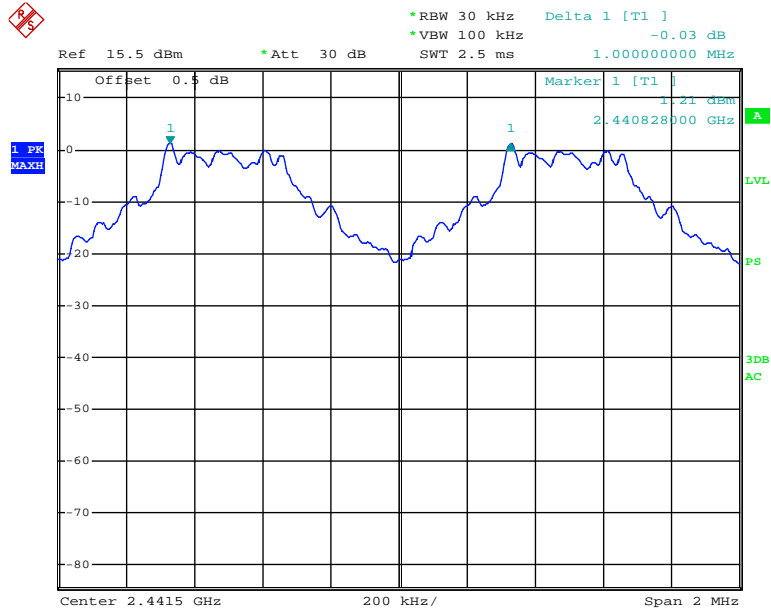

Date: 3.NOV.2016 18:46:54


### High Channel

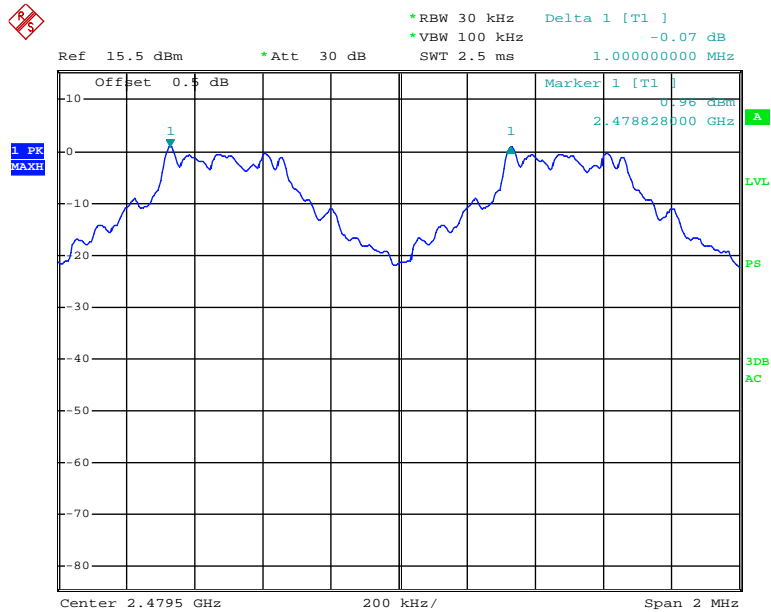

Date: 3.NOV.2016 18:46:09


EDR Mode ( $\pi/4$ -DQPSK):

### Low Channel

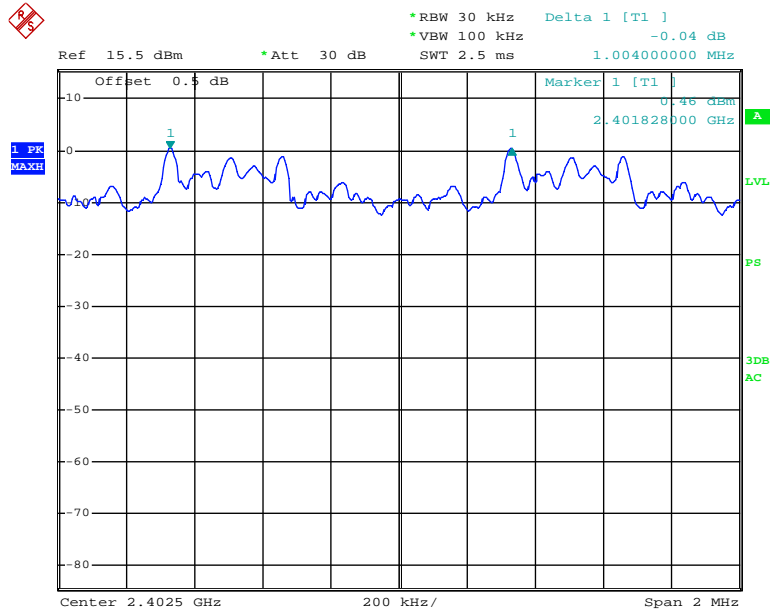


Date: 3.NOV.2016 18:43:38

### Middle Channel

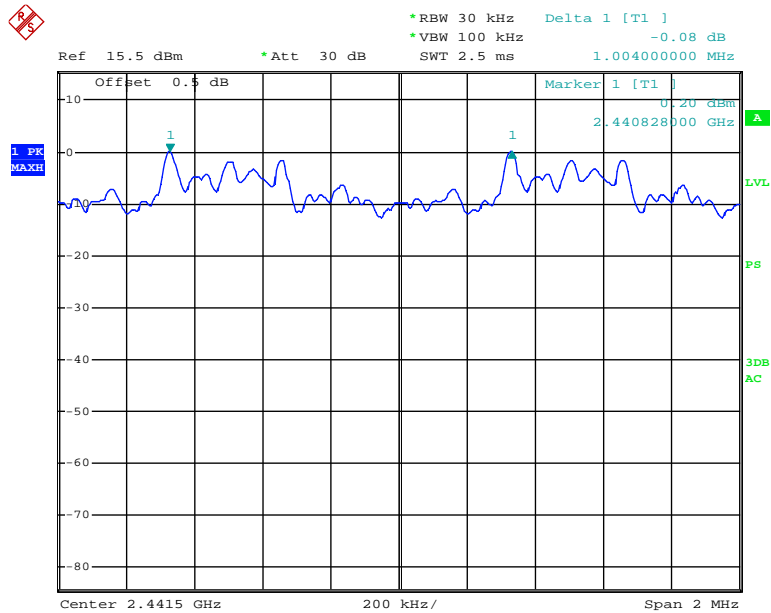

Date: 3.NOV.2016 18:44:22


### High Channel

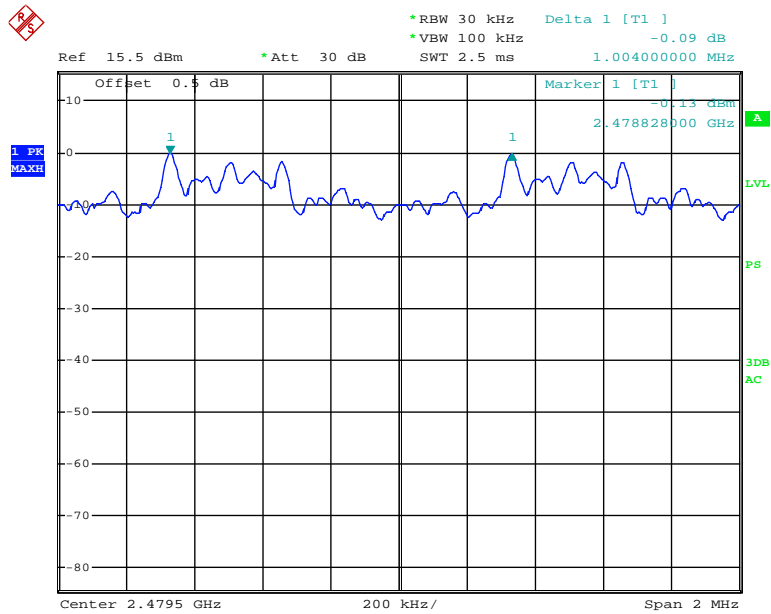

Date: 3.NOV.2016 18:45:02


### EDR Mode (8-DPSK):

### Low Channel

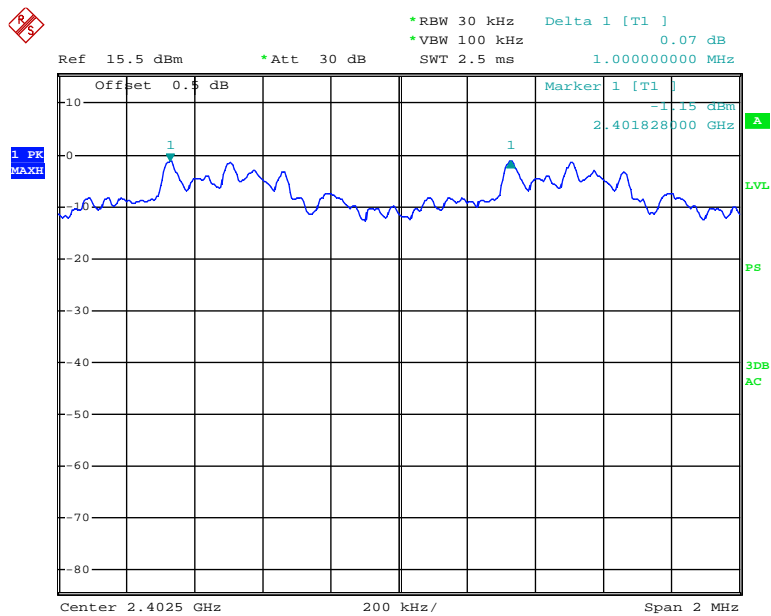


Date: 3.NOV.2016 18:42:46

### Middle Channel

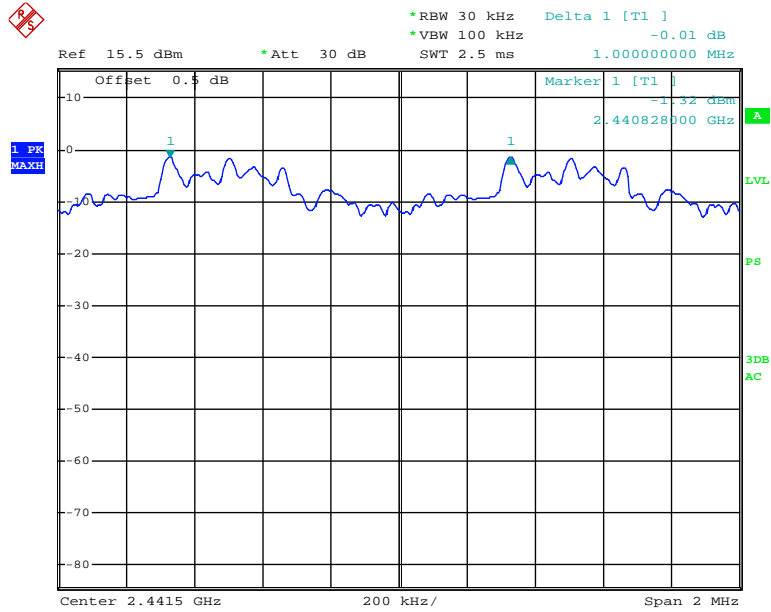

Date: 3.NOV.2016 18:42:03

### High Channel

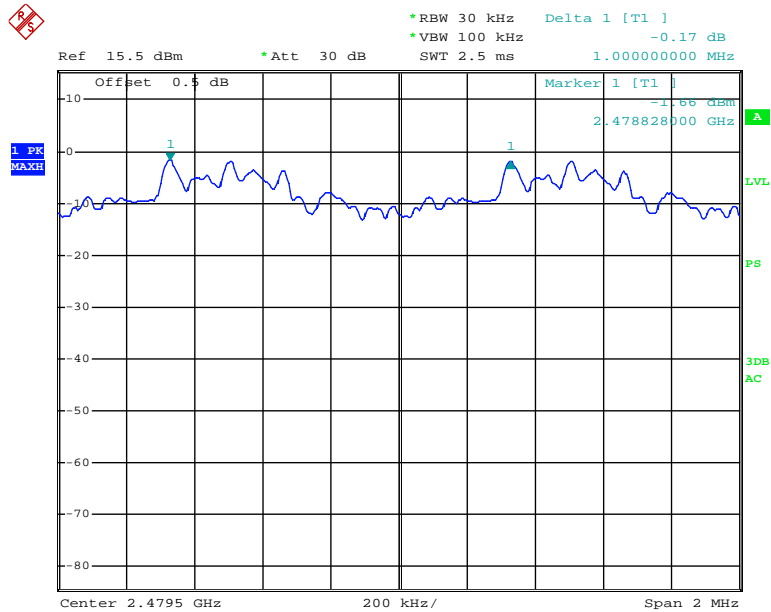

Date: 3.NOV.2016 18:41:16

## FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING

### Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100028	2015-12-02	2016-12-01
N/A	RF Cable	N/A	N/A	Each Time	/

\* **Statement of Traceability:** BACL (Chengdu) attested that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions

Temperature:	28.2 °C
Relative Humidity:	50 %
ATM Pressure:	101.2 kPa

\* *The testing was performed by Kevin Hu on 2016-11-03.*

**Test Result:** Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

Mode	Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
BDR Mode (GFSK)	Low	2402	0.90
	Middle	2441	0.89
	High	2480	0.89
EDR Mode ( $\pi/4$ -DQPSK)	Low	2402	1.27
	Middle	2441	1.27
	High	2480	1.25
EDR Mode (8-DPSK)	Low	2402	1.26
	Middle	2441	1.27
	High	2480	1.26


BDR Mode (GFSK):

Low Channel

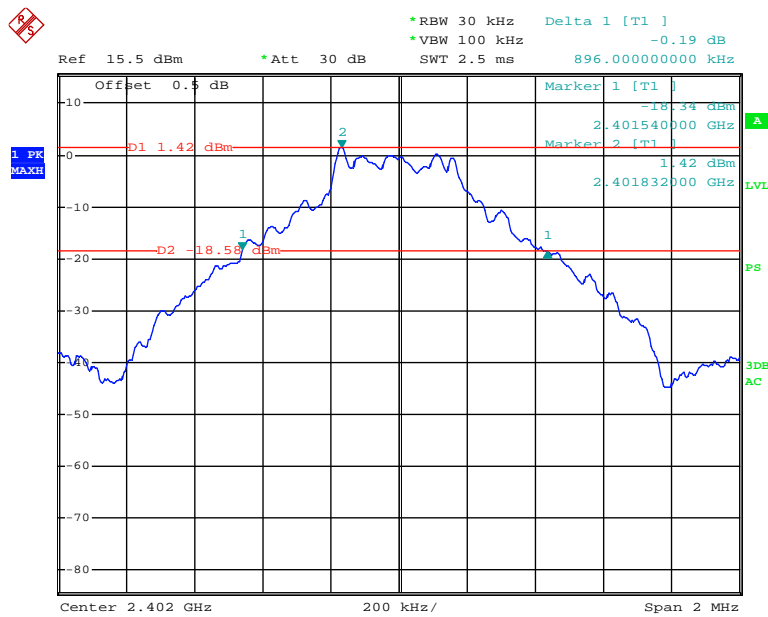


Date: 3.NOV.2016 18:30:22

### Middle Channel

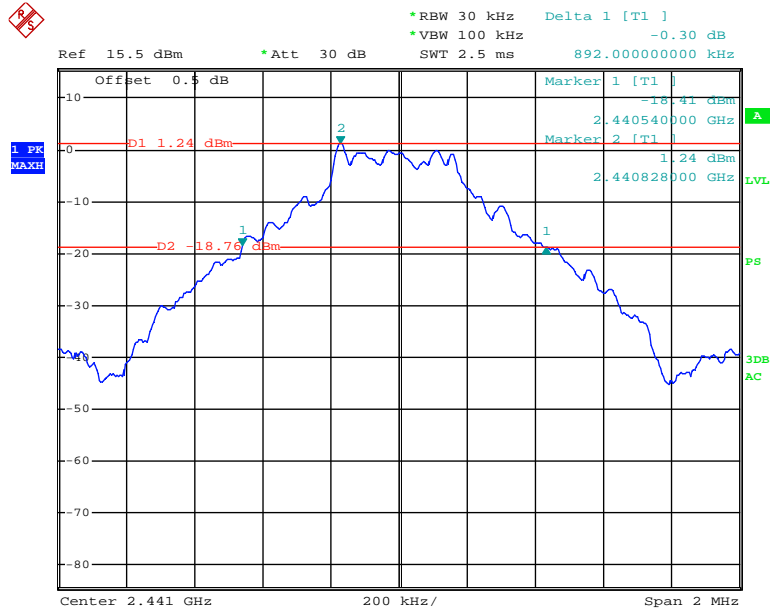

Date: 3.NOV.2016 18:31:42


### High Channel

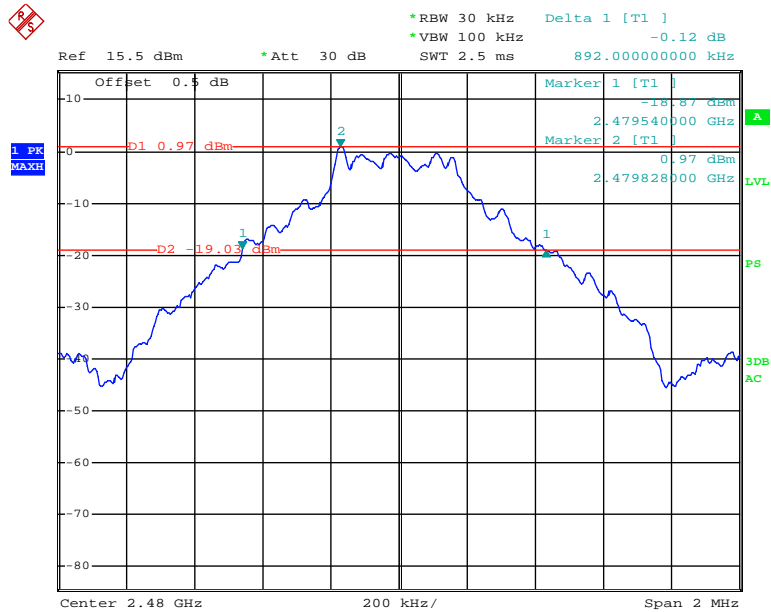

Date: 3.NOV.2016 18:32:35


EDR Mode ( $\pi/4$ -DQPSK):

Low Channel

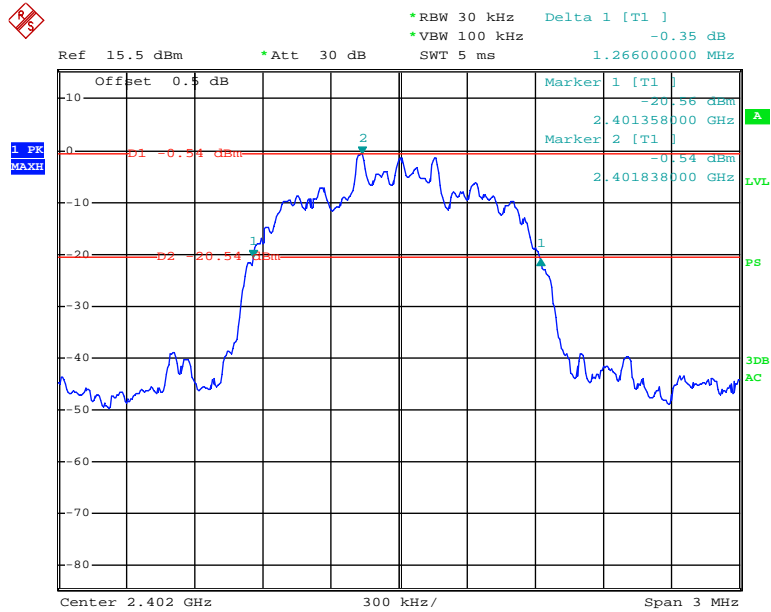

Date: 3.NOV.2016 18:36:01


Middle Channel

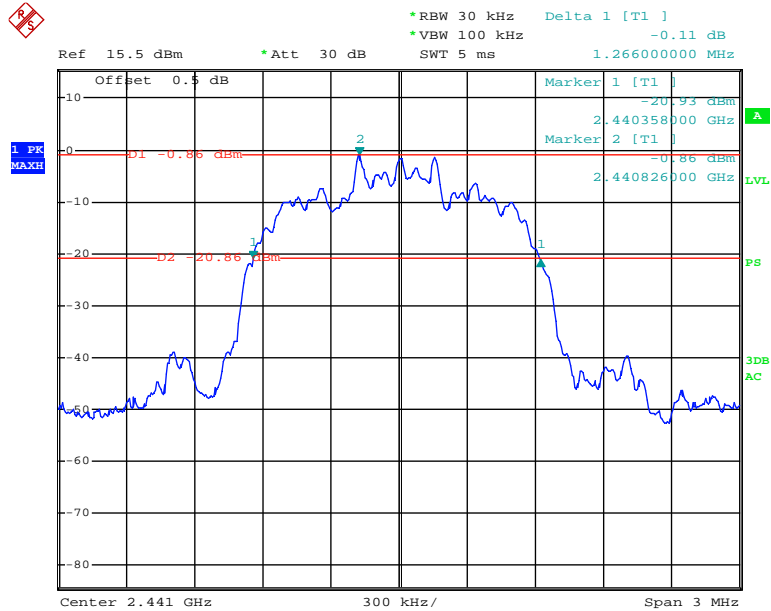

Date: 3.NOV.2016 18:35:10




### High Channel

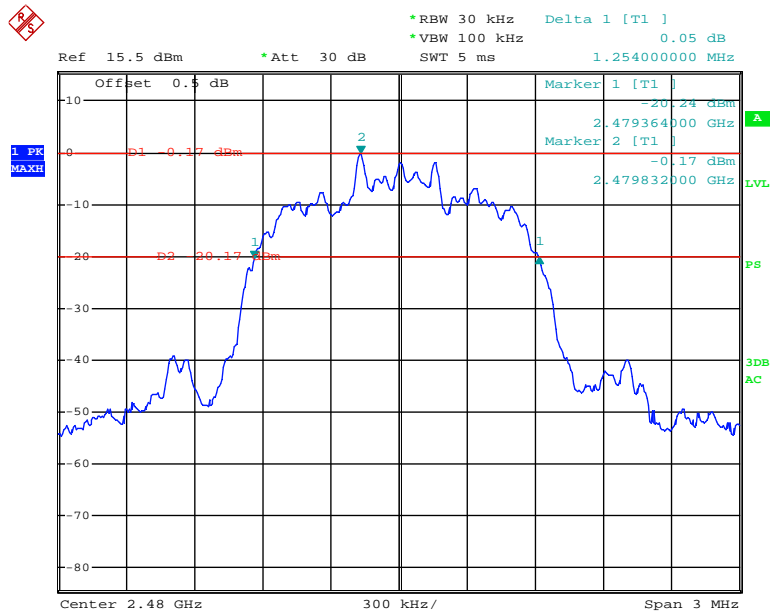

Date: 3.NOV.2016 18:34:04


EDR Mode (8-DPSK):

### Low Channel

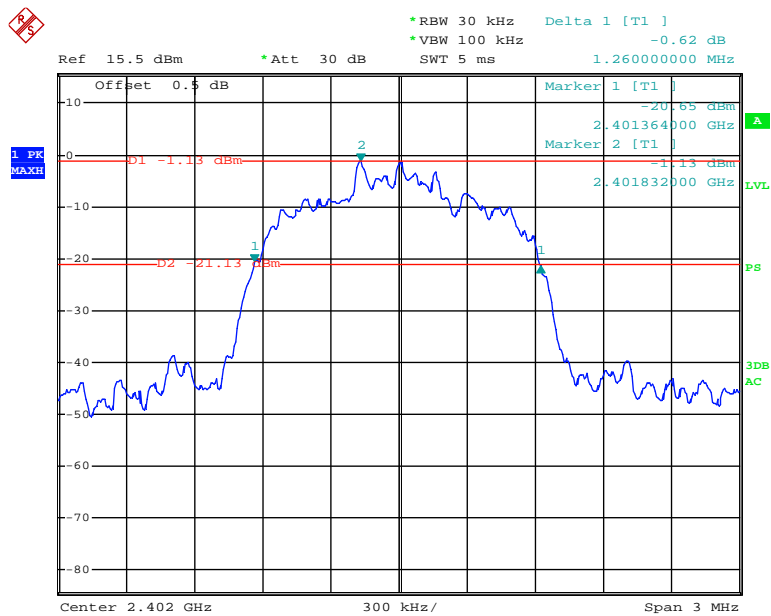


Date: 3.NOV.2016 18:37:19

### Middle Channel

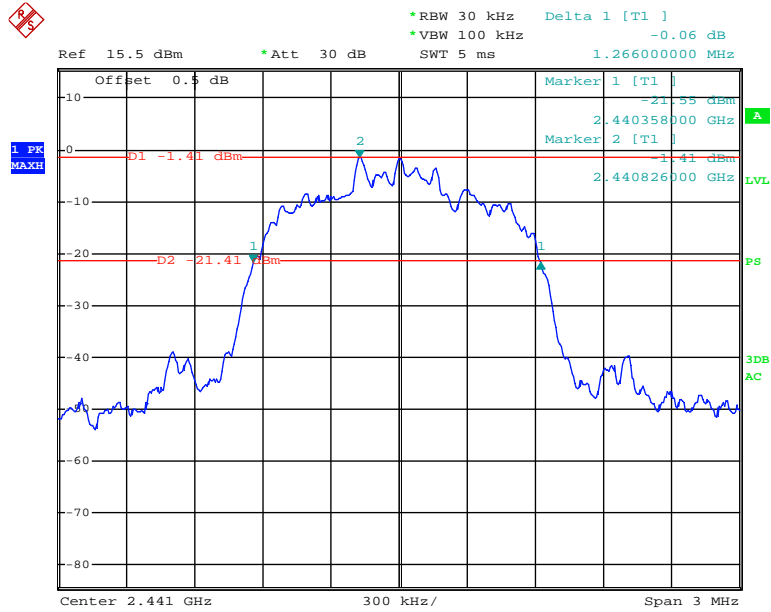

Date: 3.NOV.2016 18:38:39

### High Channel

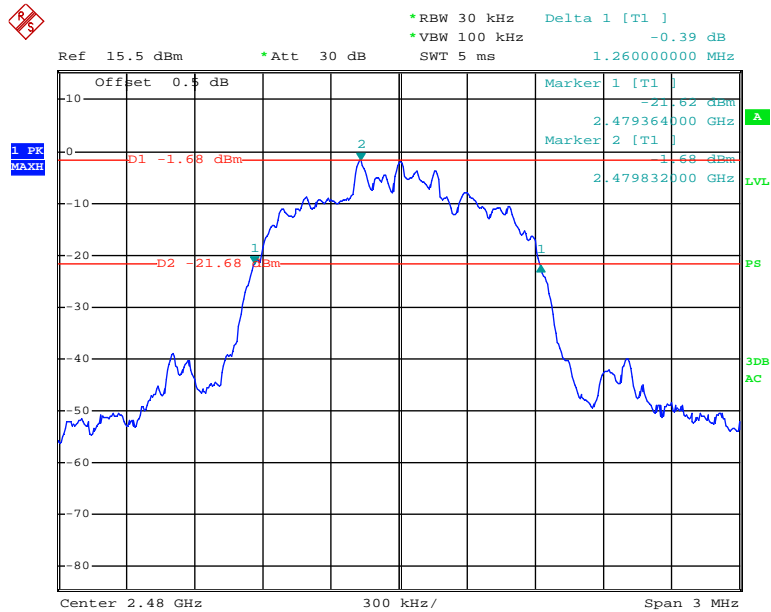

Date: 3.NOV.2016 18:39:33

## **FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST**

### **Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### **Test Procedure**

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

### **Test Equipment List and Details**

<b>Manufacturer</b>	<b>Description</b>	<b>Model</b>	<b>Serial Number</b>	<b>Calibration Date</b>	<b>Calibration Due Date</b>
Rohde & Schwarz	EMI Test Receiver	ESCI	100028	2015-12-02	2016-12-01
N/A	RF Cable	N/A	N/A	Each Time	/

\* **Statement of Traceability:** BACL (Chengdu) attested that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### **Test Data**

#### **Environmental Conditions**

<b>Temperature:</b>	28.2 °C
<b>Relative Humidity:</b>	50 %
<b>ATM Pressure:</b>	101.2 kPa

\* *The testing was performed by Kevin Hu on 2016-11-03.*

**Test Result:** Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

BDR Mode (GFSK):

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥15

### Number of Hopping Channels

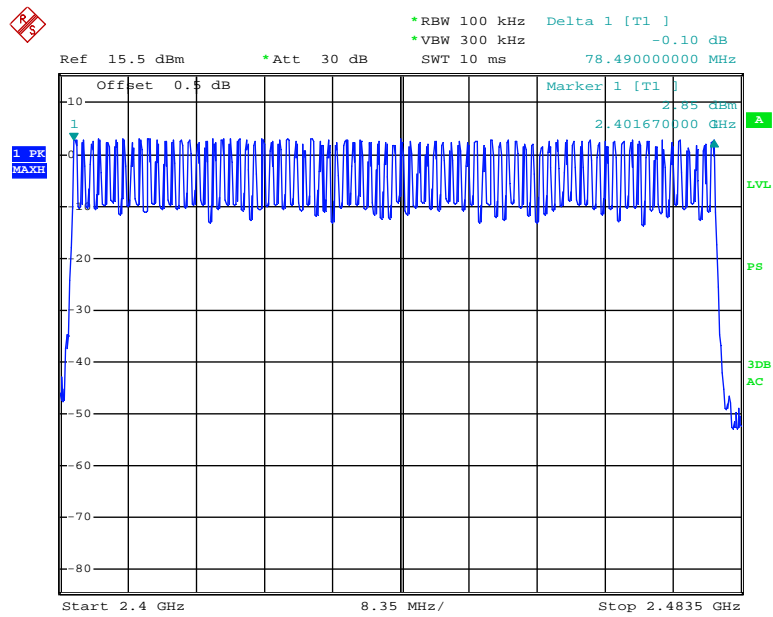


Date: 3.NOV.2016 18:50:23

EDR Mode ( $\pi/4$ -DQPSK):

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	$\geq 15$

### Number of Hopping Channels

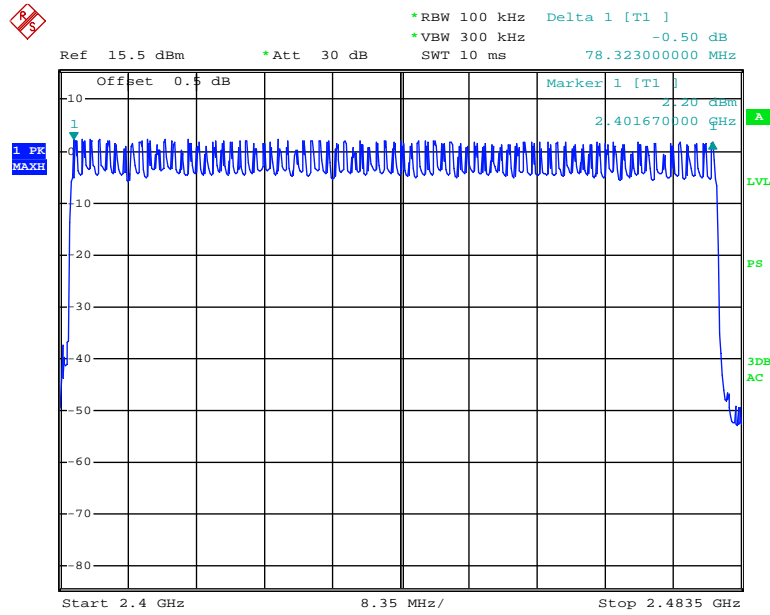


Date: 3.NOV.2016 18:55:22

EDR Mode (8-DPSK):

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥15

Number of Hopping Channels

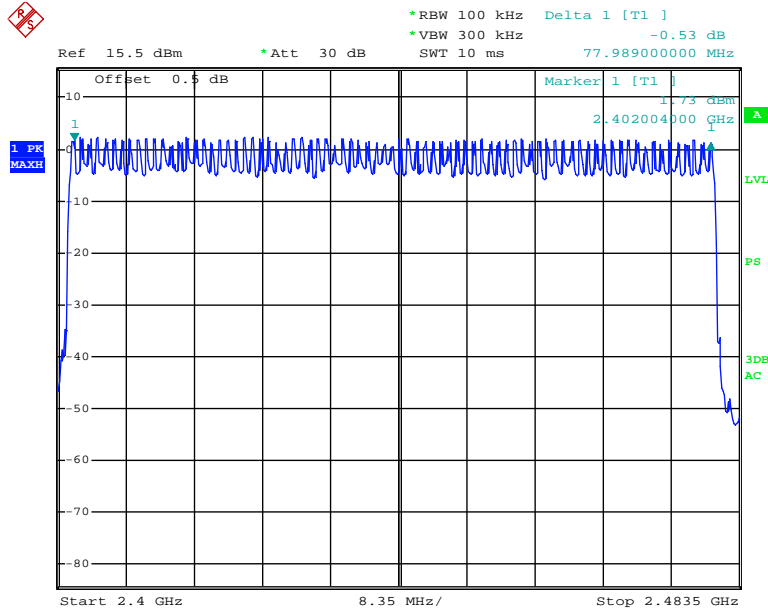

Date: 3.NOV.2016 19:03:42

## **FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)**

### **Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### **Test Procedure**

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 \* channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell Time= time slot length \* hope rate/ number of hopping channels \* 31.6s  
Hop rate=1600/s

### **Test Equipment List and Details**

<b>Manufacturer</b>	<b>Description</b>	<b>Model</b>	<b>Serial Number</b>	<b>Calibration Date</b>	<b>Calibration Due Date</b>
Rohde & Schwarz	EMI Test Receiver	ESCI	100028	2015-12-02	2016-12-01
N/A	RF Cable	N/A	N/A	Each Time	/

\* **Statement of Traceability:** BACL (Chengdu) attested that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### **Test Data**

#### **Environmental Conditions**

<b>Temperature:</b>	28.2 °C
<b>Relative Humidity:</b>	50 %
<b>ATM Pressure:</b>	101.2 kPa

\* *The testing was performed by Kevin Hu on 2016-11-03.*

**Test Result:** Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

BDR Mode (GFSK):

Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
<b>DH1</b>	Low	0.384	0.123	0.4	Compliance
	Middle	0.386	0.124	0.4	Compliance
	High	0.384	0.123	0.4	Compliance
	Note: Dwell time=Pulse time (ms) × (1600/2/79) ×31.6 s				
<b>DH3</b>	Low	1.656	0.265	0.4	Compliance
	Middle	1.656	0.265	0.4	Compliance
	High	1.656	0.265	0.4	Compliance
	Note: Dwell time=Pulse time (ms) × (1600/4/79) ×31.6 s				
<b>DH5</b>	Low	2.910	0.310	0.4	Compliance
	Middle	2.920	0.311	0.4	Compliance
	High	2.920	0.311	0.4	Compliance
	Note: Dwell time=Pulse time (ms) × (1600/6/79) ×31.6 s				


**DH1: Low Channel**

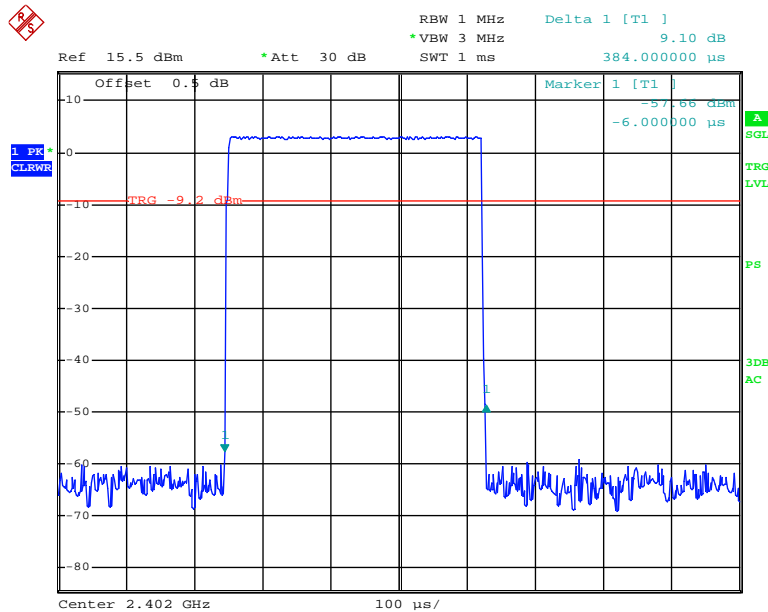

Date: 3.NOV.2016 19:11:07




### DH1: Middle Channel

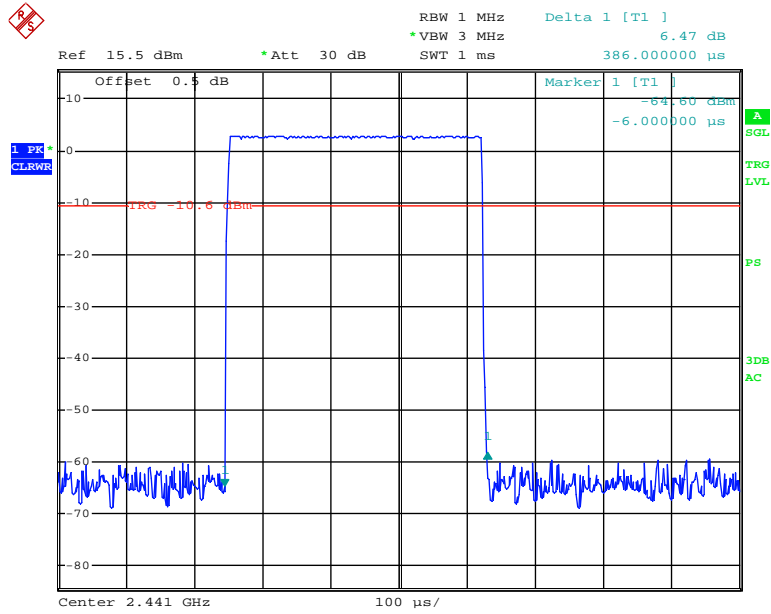


Date: 3.NOV.2016 19:11:14

### DH1: High Channel

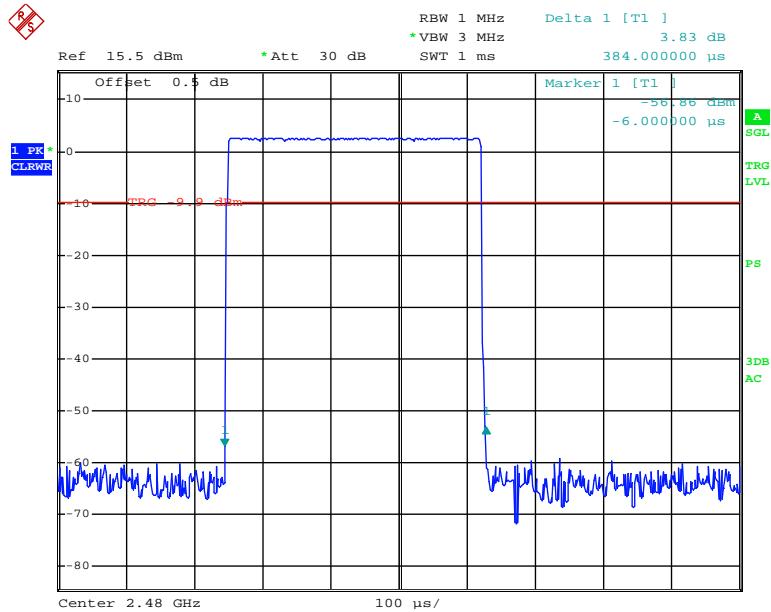


Date: 3.NOV.2016 19:11:37

### DH3: Low Channel

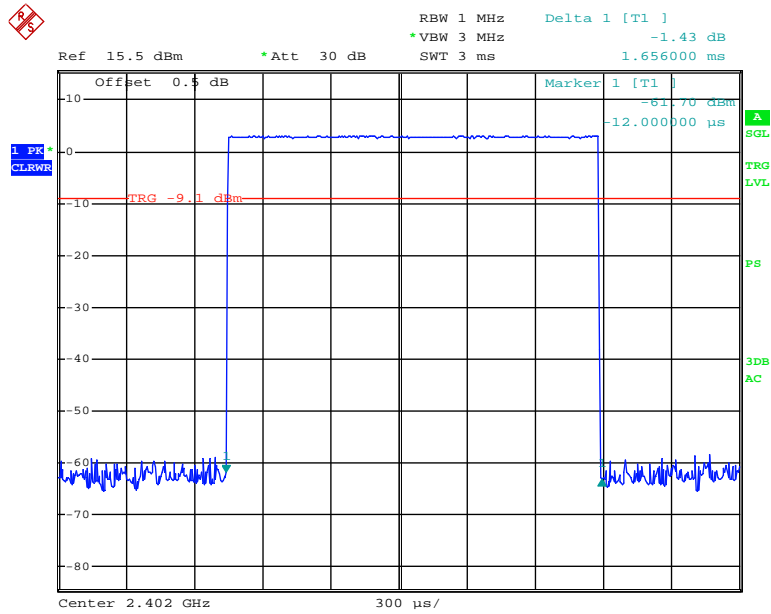


Date: 3.NOV.2016 19:12:14

### DH3: Middle Channel

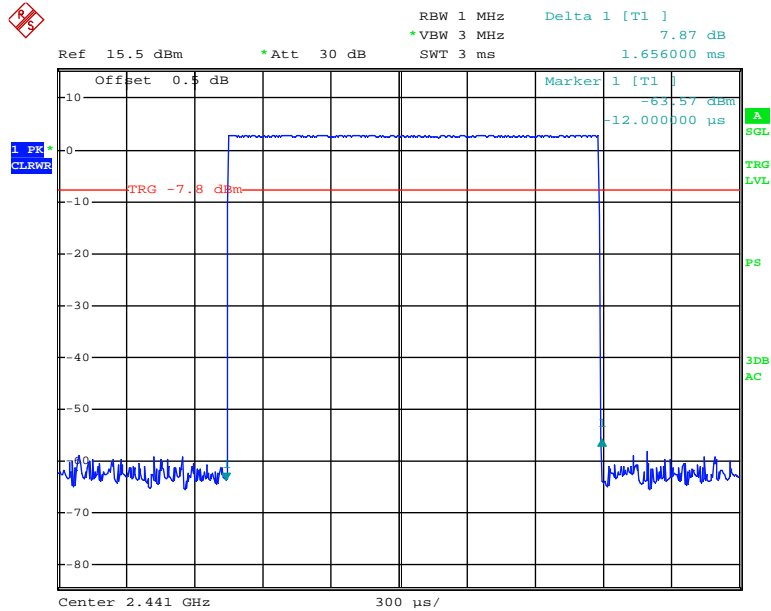


Date: 3.NOV.2016 19:12:22

### DH3: High Channel

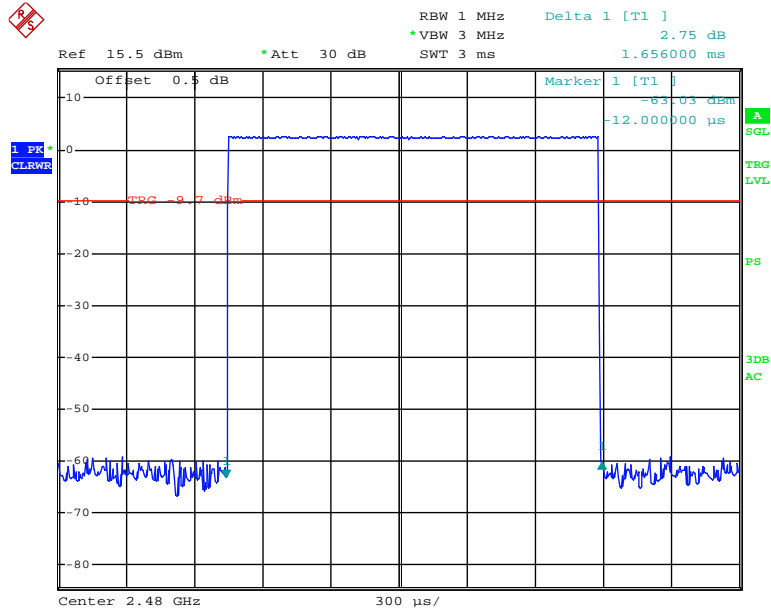


Date: 3.NOV.2016 19:12:29

### DH5: Low Channel

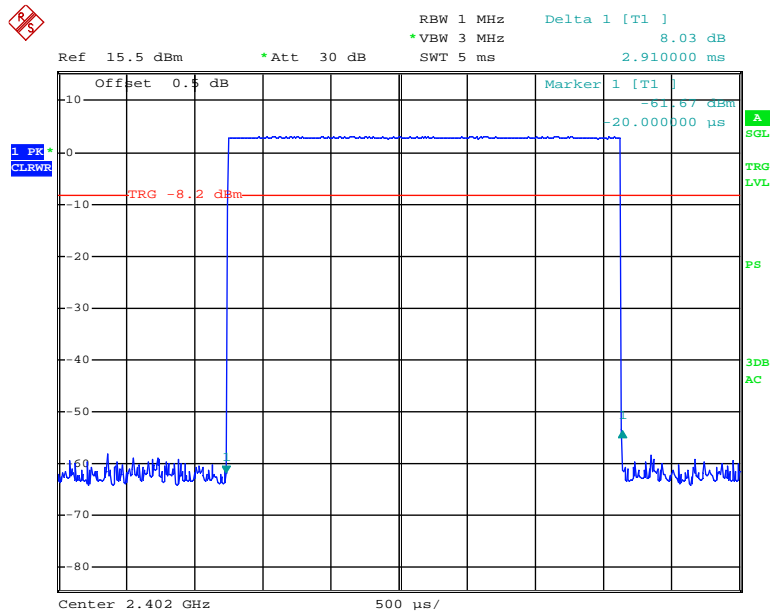


Date: 3.NOV.2016 19:13:54

### DH5: Middle Channel

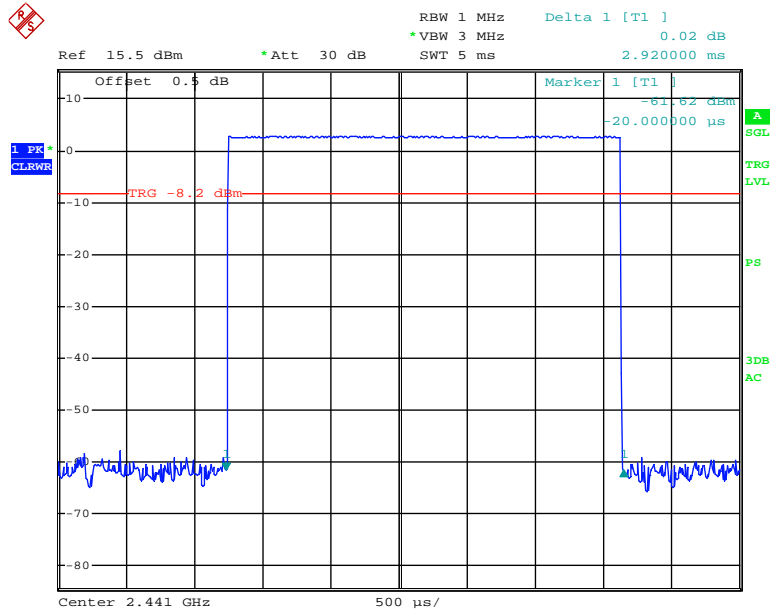

Date: 3.NOV.2016 19:14:02

### DH5: High Channel

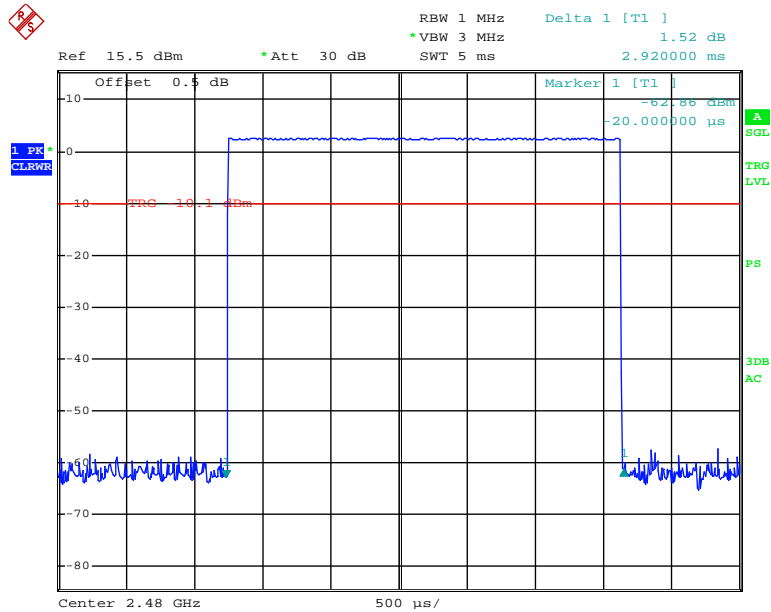


Date: 3.NOV.2016 19:14:21

EDR Mode ( $\pi/4$ -DQPSK):


Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
<b>2DH1</b>	Low	0.392	0.125	0.4	Compliance
	Middle	0.394	0.126	0.4	Compliance
	High	0.394	0.126	0.4	Compliance
	Note: Dwell time=Pulse time (ms) × (1600/2/79) ×31.6 s				
<b>2DH3</b>	Low	1.662	0.266	0.4	Compliance
	Middle	1.656	0.265	0.4	Compliance
	High	1.662	0.266	0.4	Compliance
	Note: Dwell time=Pulse time (ms) × (1600/4/79) ×31.6 s				
<b>2DH5</b>	Low	2.920	0.311	0.4	Compliance
	Middle	2.920	0.311	0.4	Compliance
	High	2.920	0.311	0.4	Compliance
	Note: Dwell time=Pulse time (ms) × (1600/6/79) ×31.6 s				

2DH1: Low Channel

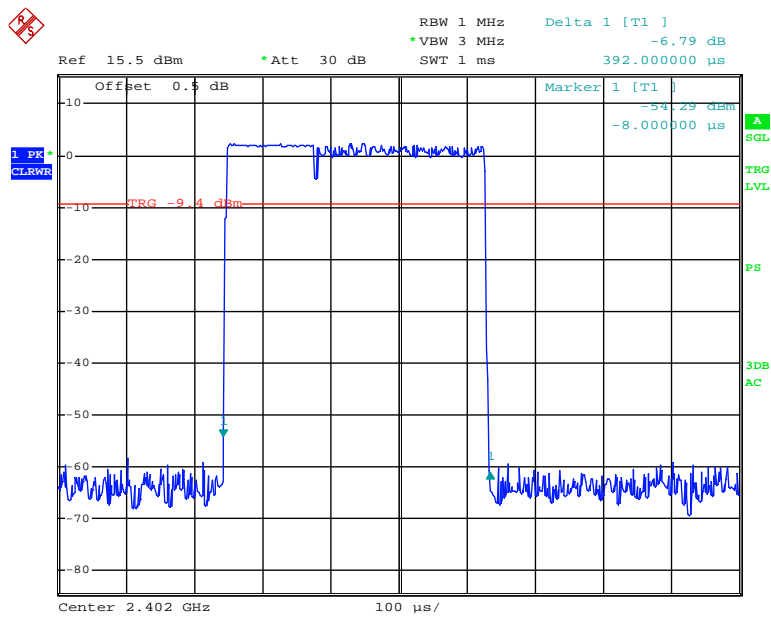


Date: 3.NOV.2016 19:10:00

### 2DH1: Middle Channel

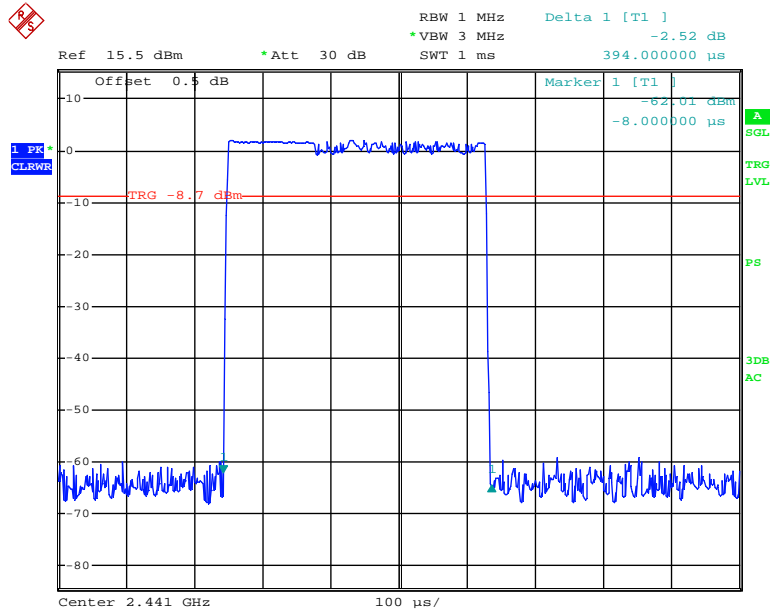


Date: 3.NOV.2016 19:10:08

### 2DH1: High Channel

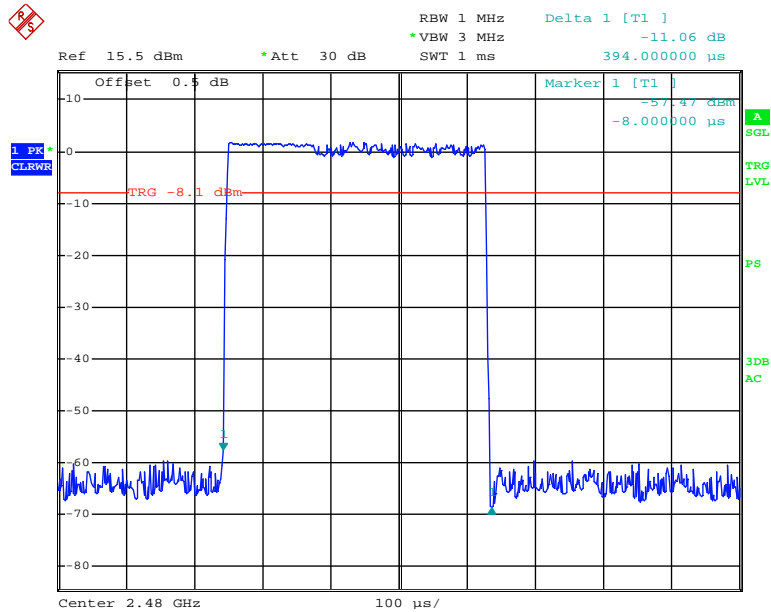


Date: 3.NOV.2016 19:10:16

### 2DH3: Low Channel

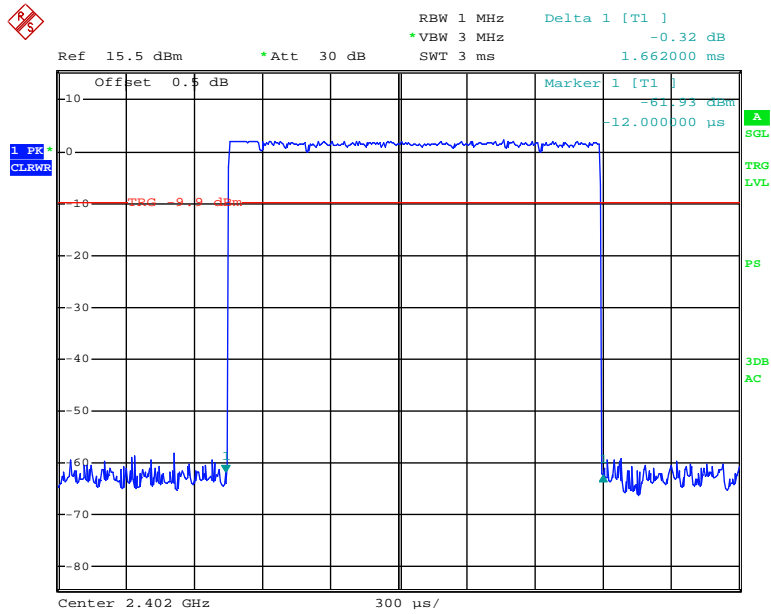


Date: 3.NOV.2016 19:09:08

### 2DH3: Middle Channel

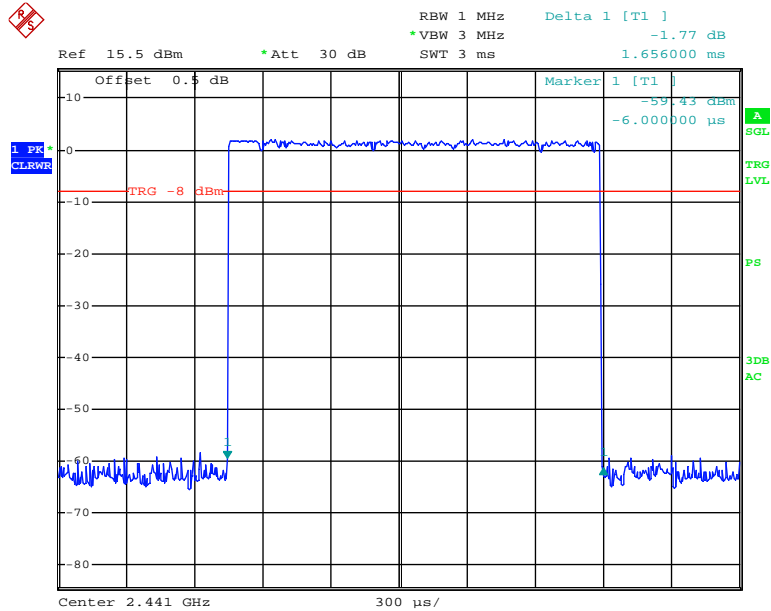


Date: 3.NOV.2016 19:09:17

### 2DH3: High Channel

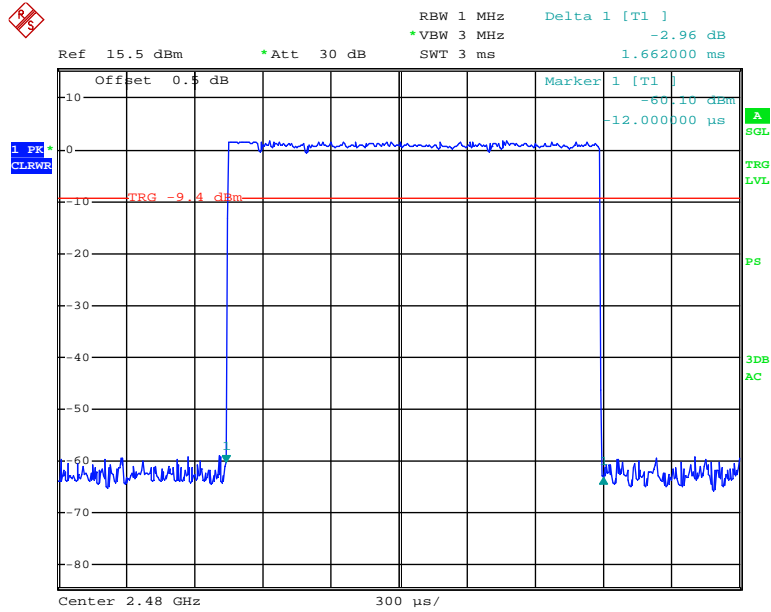

Date: 3.NOV.2016 19:09:25


### 2DH5: Low Channel

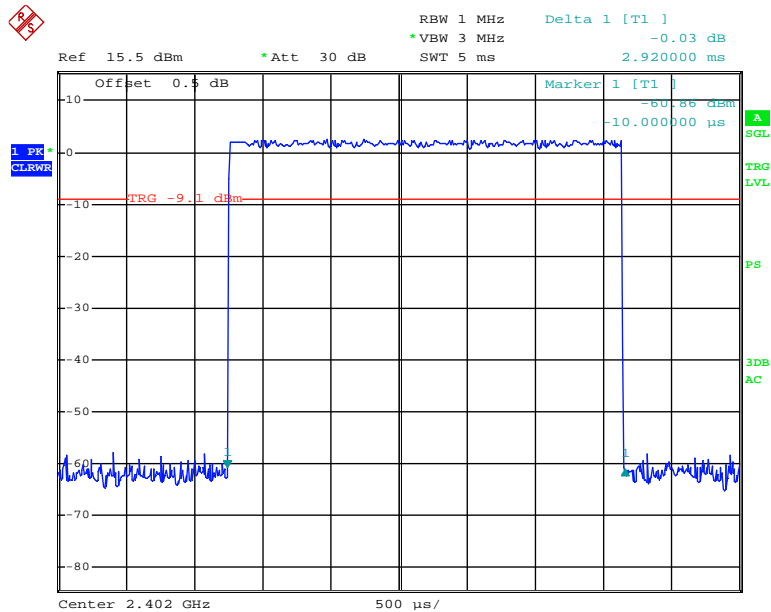

Date: 3.NOV.2016 19:08:05




### 2DH5: Middle Channel

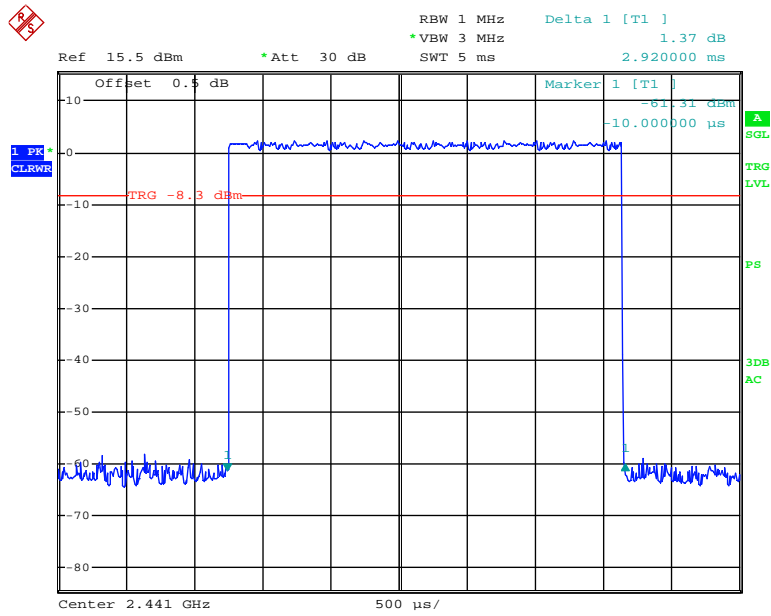

Date: 3.NOV.2016 19:08:13

### 2DH5: High Channel

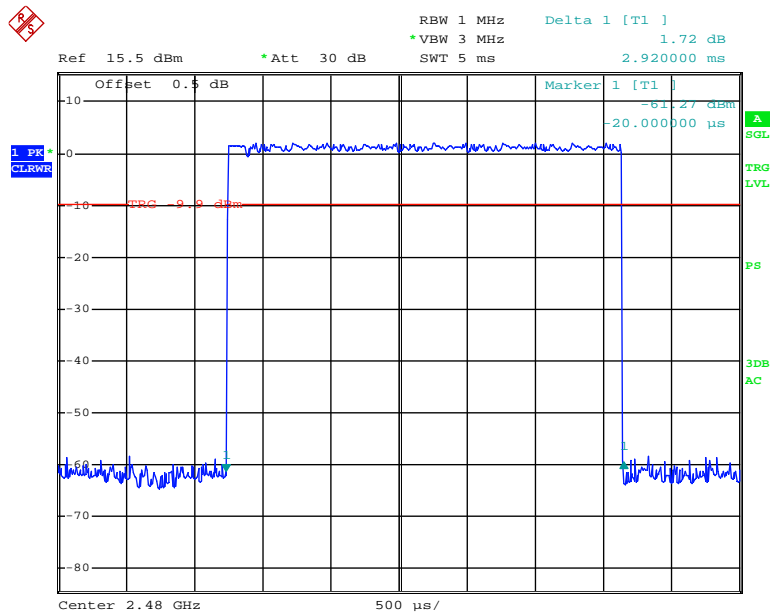


Date: 3.NOV.2016 19:08:20

EDR Mode (8-DPSK):


Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
3DH1	Low	0.394	0.126	0.4	Compliance
	Middle	0.394	0.126	0.4	Compliance
	High	0.394	0.126	0.4	Compliance
	Note: Dwell time=Pulse time (ms) × (1600/2/79) ×31.6 s				
3DH3	Low	1.656	0.265	0.4	Compliance
	Middle	1.656	0.265	0.4	Compliance
	High	1.656	0.265	0.4	Compliance
	Note: Dwell time=Pulse time (ms) × (1600/4/79) ×31.6 s				
3DH5	Low	2.920	0.311	0.4	Compliance
	Middle	2.920	0.311	0.4	Compliance
	High	2.920	0.311	0.4	Compliance
	Note: Dwell time=Pulse time (ms) × (1600/6/79) ×31.6 s				

3DH1: Low Channel

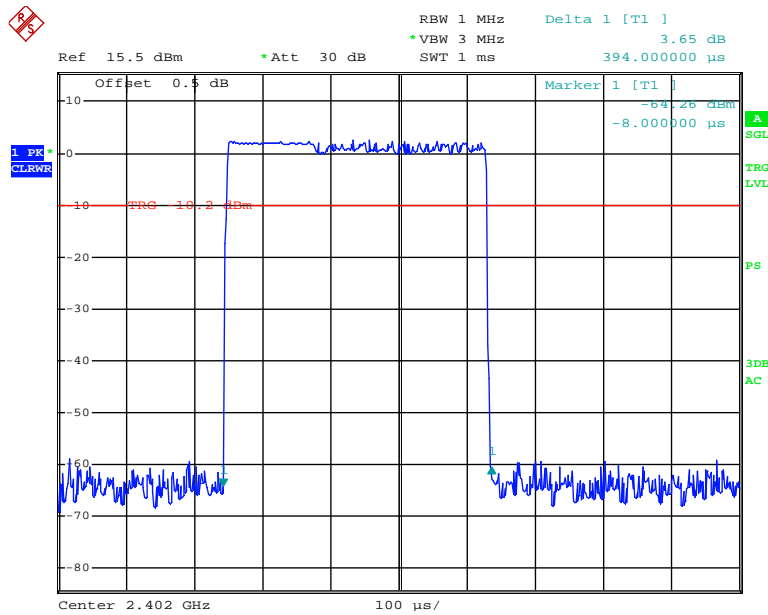


Date: 3.NOV.2016 19:04:33

### 3DH1: Middle Channel

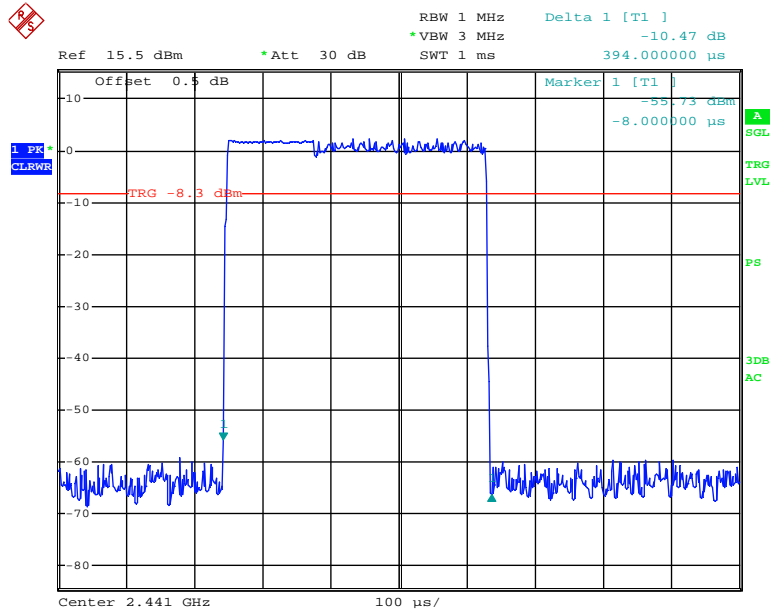


Date: 3.NOV.2016 19:04:41

### 3DH1: High Channel

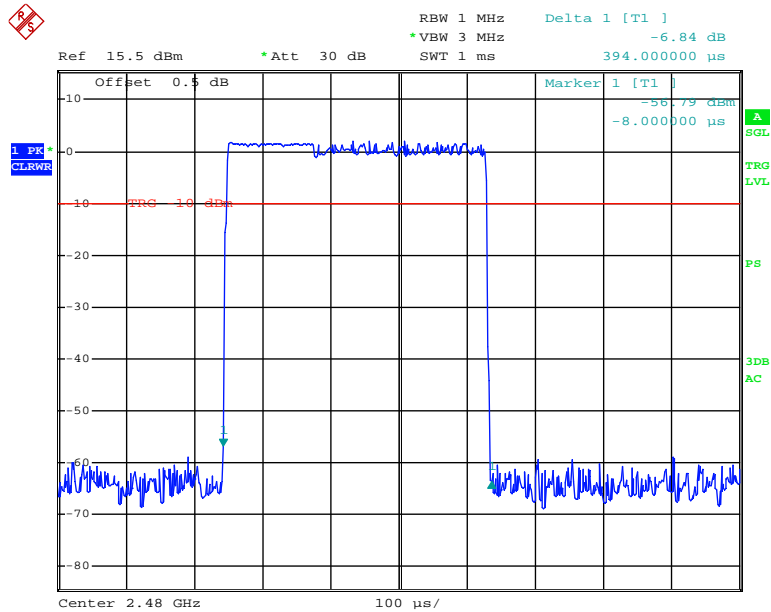


Date: 3.NOV.2016 19:05:09

### 3DH3: Low Channel

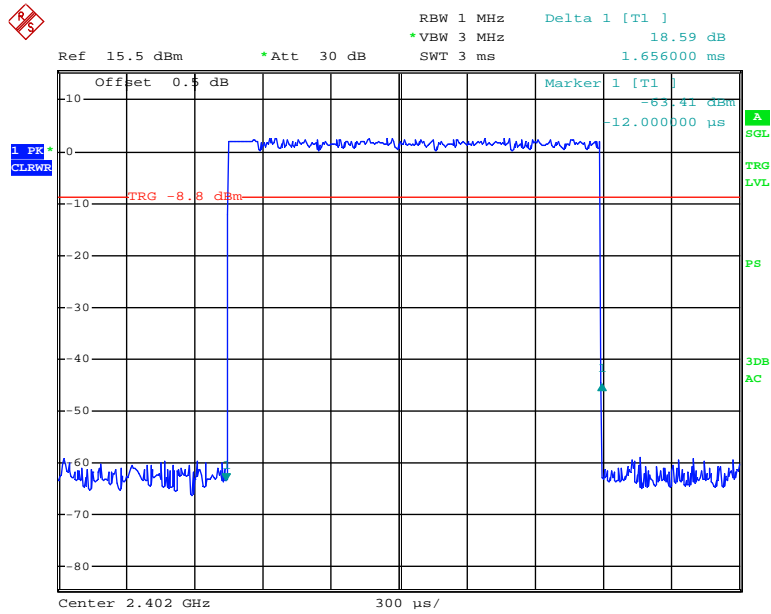


Date: 3.NOV.2016 19:06:15

### 3DH3: Middle Channel

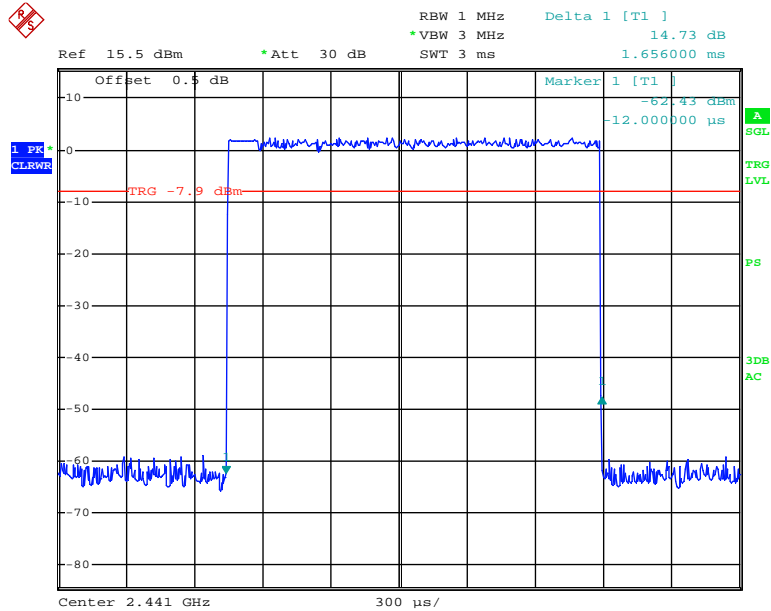


Date: 3.NOV.2016 19:06:23

### 3DH3: High Channel

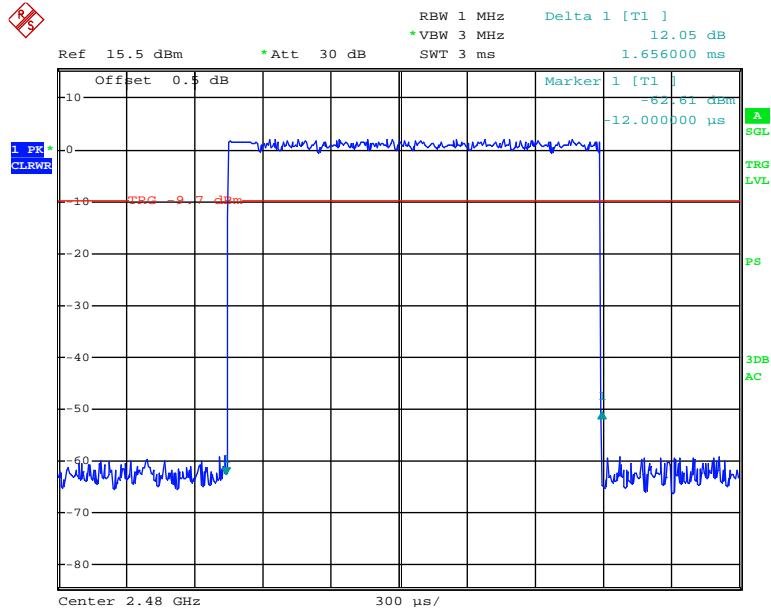


Date: 3.NOV.2016 19:06:30

### 3DH5: Low Channel

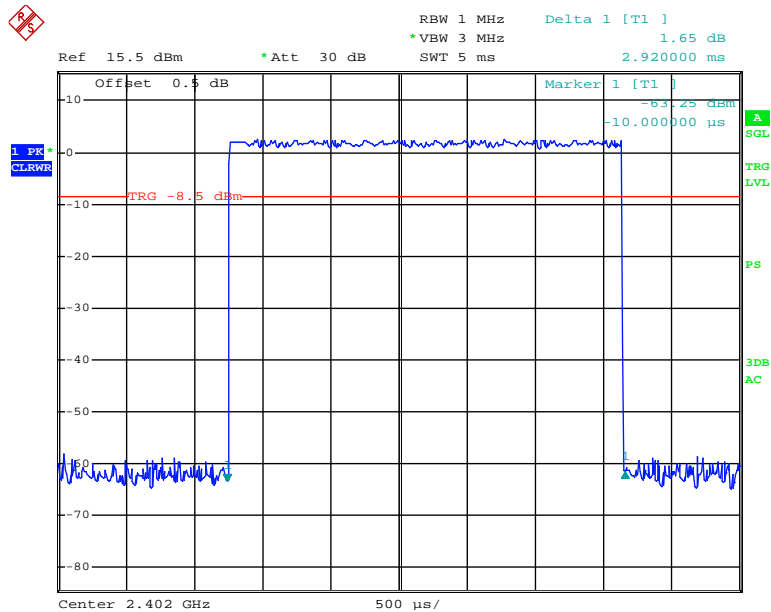


Date: 3.NOV.2016 19:07:03

### 3DH5: Middle Channel

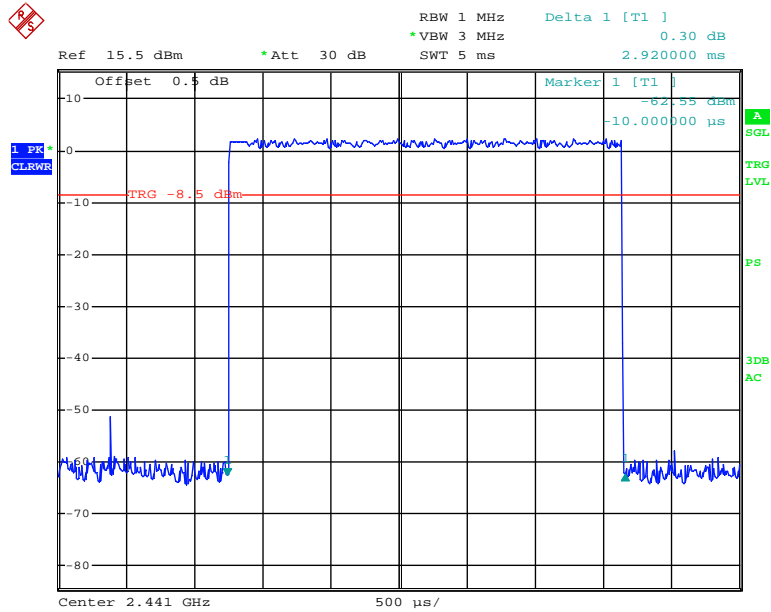

Date: 3.NOV.2016 19:07:10

### 3DH5: High Channel

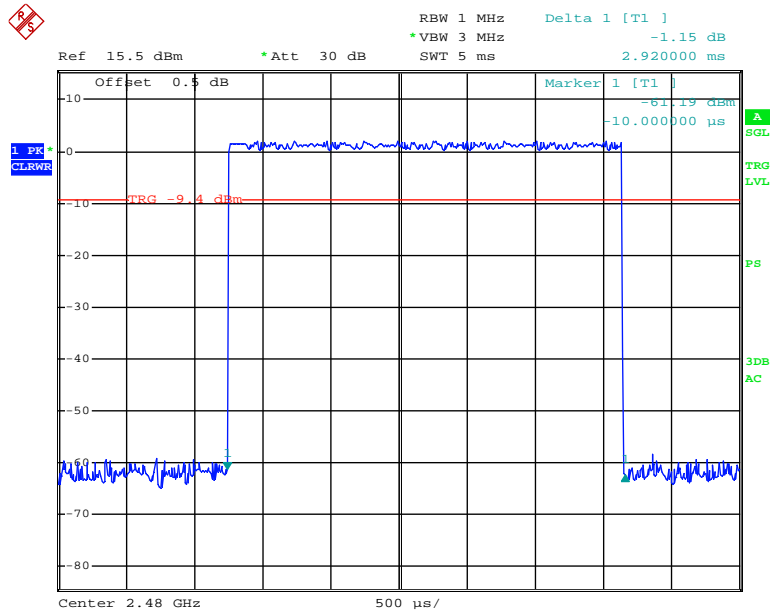

Date: 3.NOV.2016 19:07:17

## FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

### Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts

### Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100028	2015-12-02	2016-12-01
N/A	RF Cable	N/A	N/A	Each Time	/

\* **Statement of Traceability:** BACL (Chengdu) attested that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions

Temperature:	28.2 °C
Relative Humidity:	50 %
ATM Pressure:	101.2 kPa

\* The testing was performed by Kevin Hu on 2016-11-03.

**Test Result:** Compliance.


Test Mode: Transmitting

Mode	Frequency (MHz)	Peak Output power (dBm)	Limit (dBm)
BDR Mode (GFSK)	2402	3.29	30
	2441	3.11	30
	2480	2.86	30
EDR Mode ( $\pi/4$ -DQPSK)	2402	3.05	30
	2441	2.9	30
	2480	2.62	30
EDR Mode (8-DPSK)	2402	3.23	30
	2441	3.08	30
	2480	2.9	30

Note: The data above was tested in conducted mode.

BDR Mode (GFSK):


Low Channel

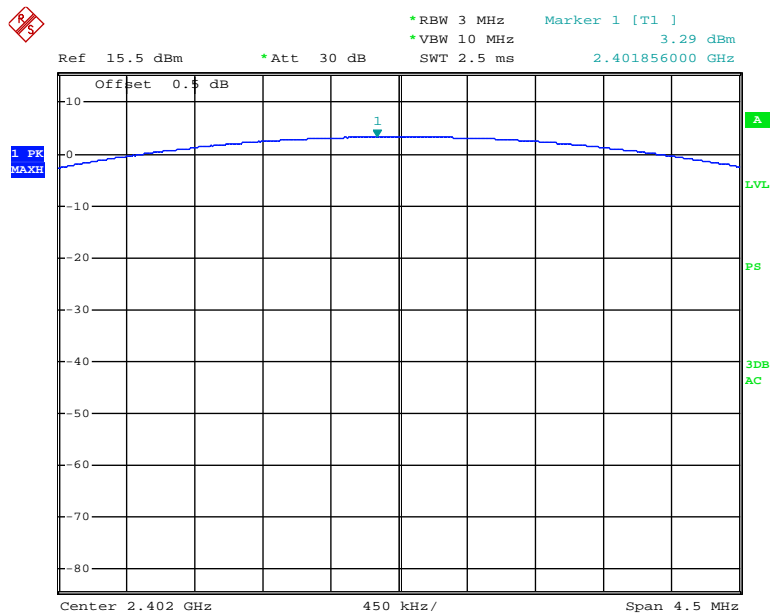

Date: 3.NOV.2016 18:30:46




### Middle Channel

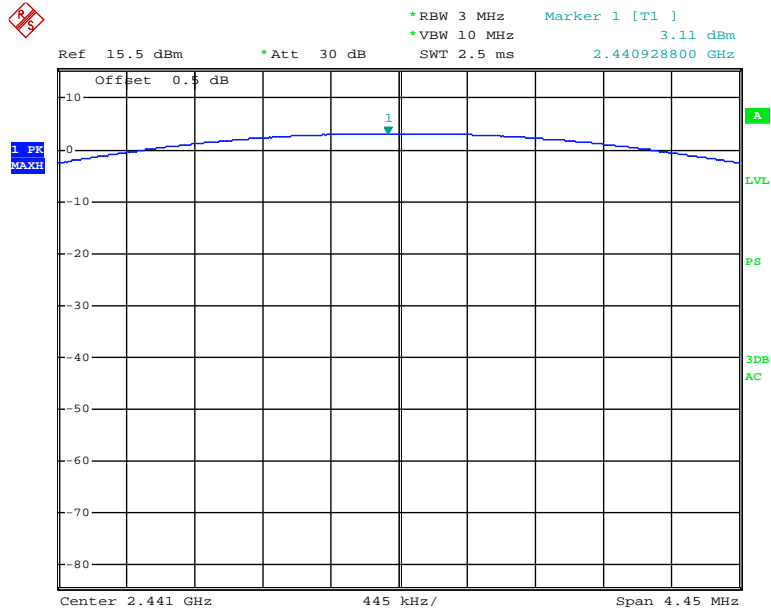

Date: 3.NOV.2016 18:32:05


### High Channel

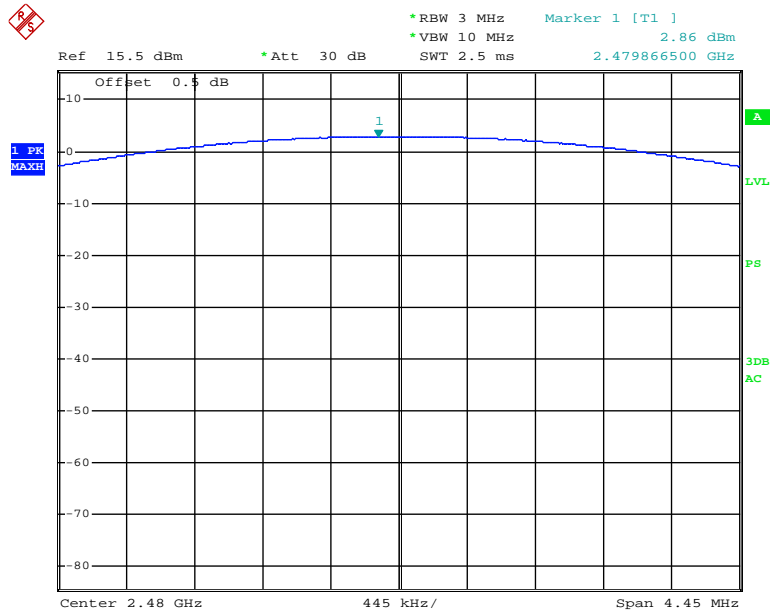

Date: 3.NOV.2016 18:32:56


EDR Mode ( $\pi/4$ -DQPSK):

### Low Channel

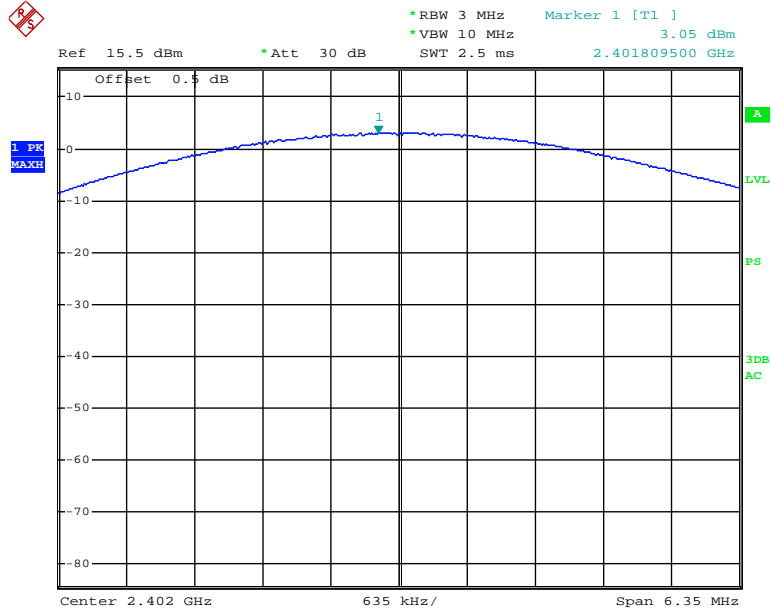


Date: 3.NOV.2016 18:36:23

### Middle Channel

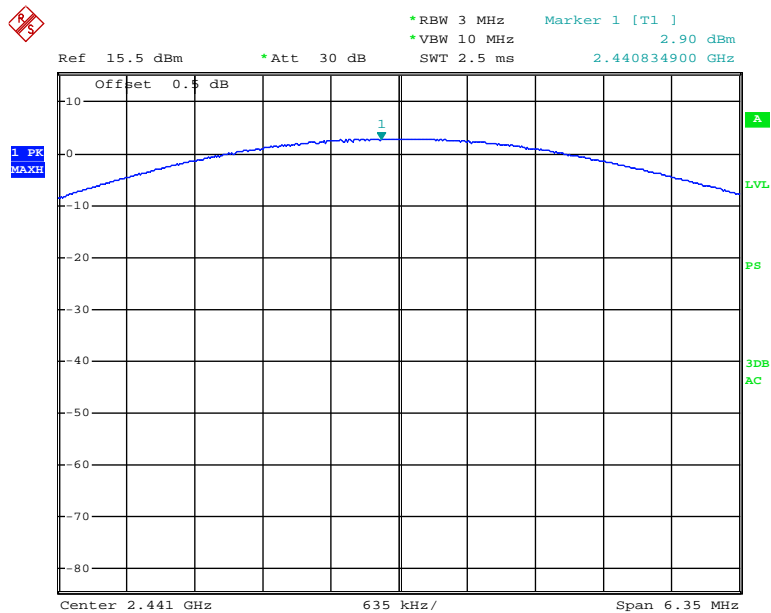

Date: 3.NOV.2016 18:35:33


### High Channel

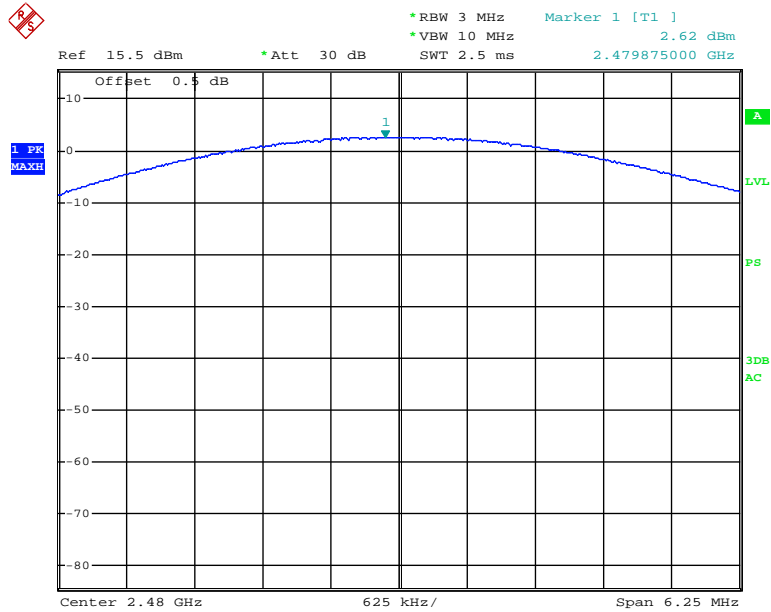

Date: 3.NOV.2016 18:34:27


EDR Mode (8-DPSK):

### Low Channel

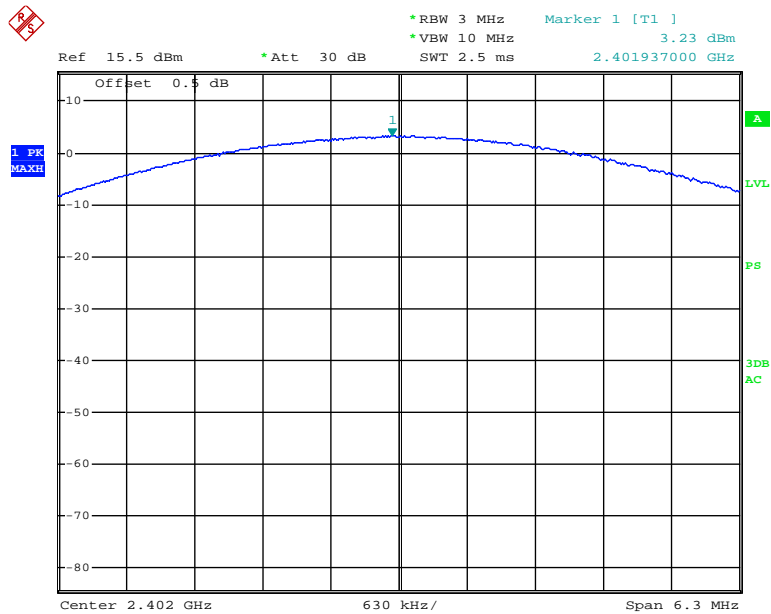


Date: 3.NOV.2016 18:37:42

### Middle Channel

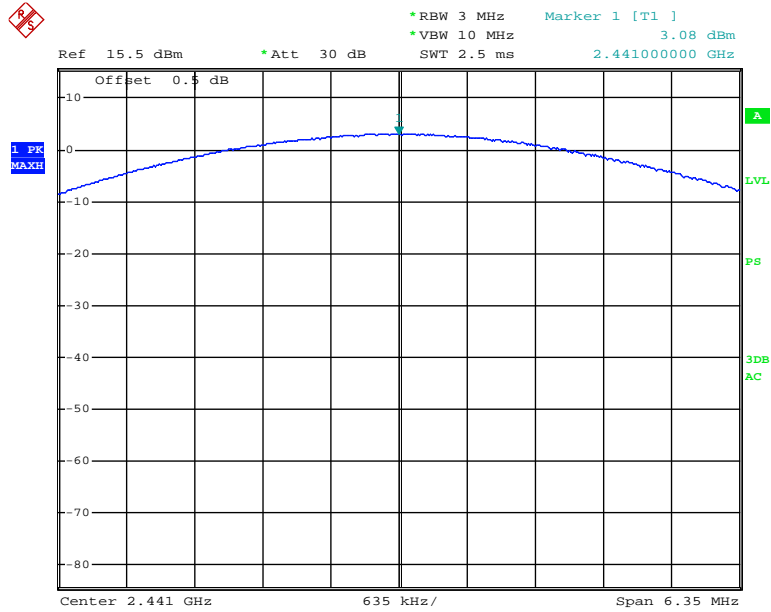

Date: 3.NOV.2016 18:39:01

### High Channel

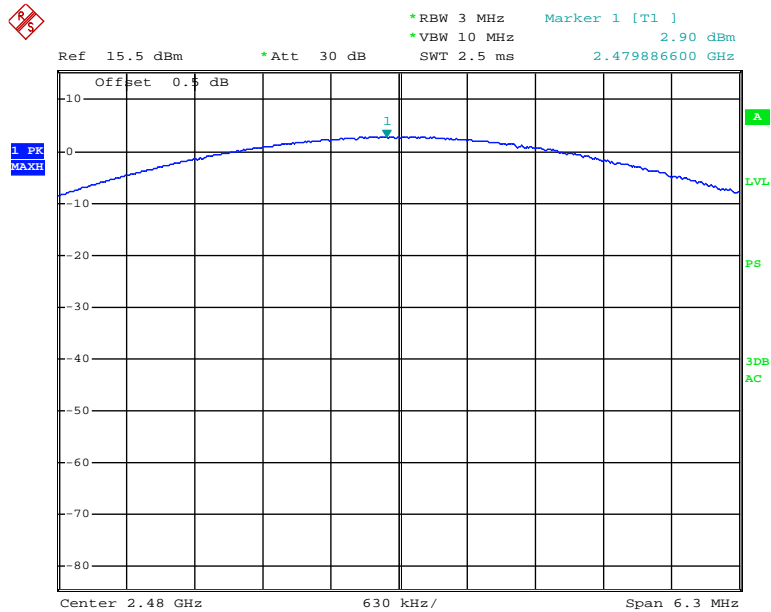

Date: 3.NOV.2016 18:39:55

## FCC §15.247(d) - BAND EDGES TESTING

### Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100028	2015-12-02	2016-12-01
N/A	RF Cable	N/A	N/A	Each Time	/

\* **Statement of Traceability:** BACL (Chengdu) attested that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions


Temperature:	28.2 °C
Relative Humidity:	50 %
ATM Pressure:	101.2 kPa

\* The testing was performed by Kevin Hu on 2016-11-03.

**Test Result:** Compliance


*BDR Mode (GFSK):*

#### Band Edge, Left Side

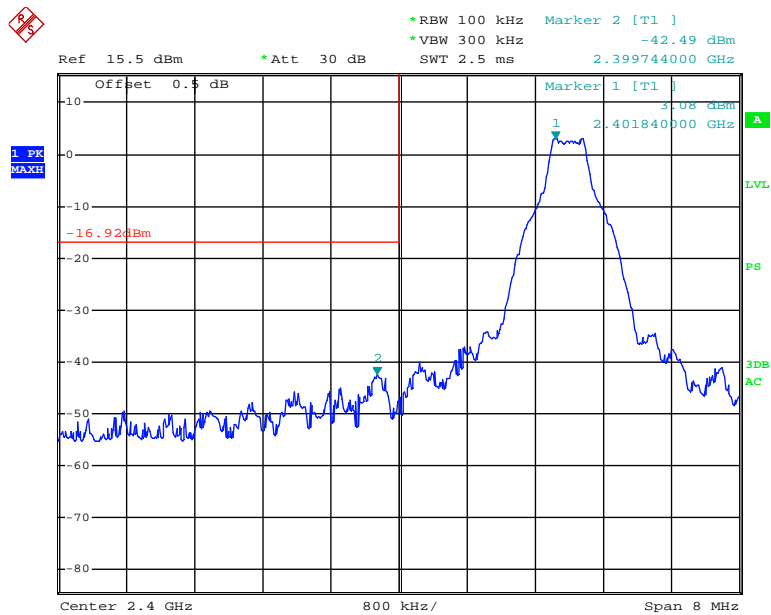

Date: 3.NOV.2016 18:31:02


### Band Edge, Right Side

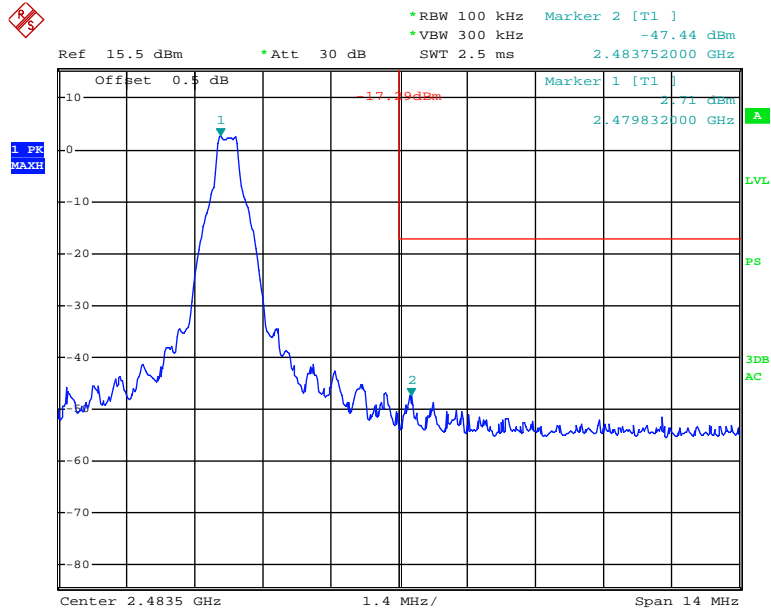

Date: 3.NOV.2016 18:33:24


### EDR Mode ( $\pi/4$ -DQPSK):

### Band Edge, Left Side

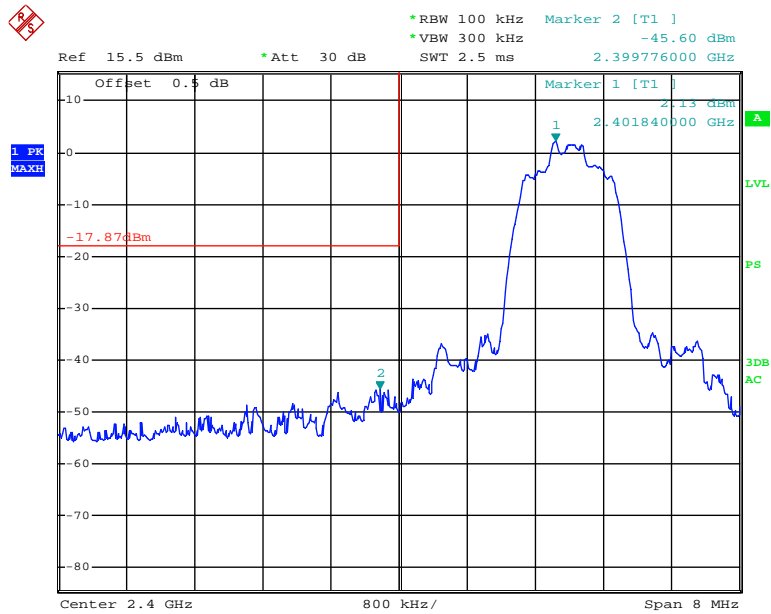

Date: 3.NOV.2016 18:36:44


### Band Edge, Right Side

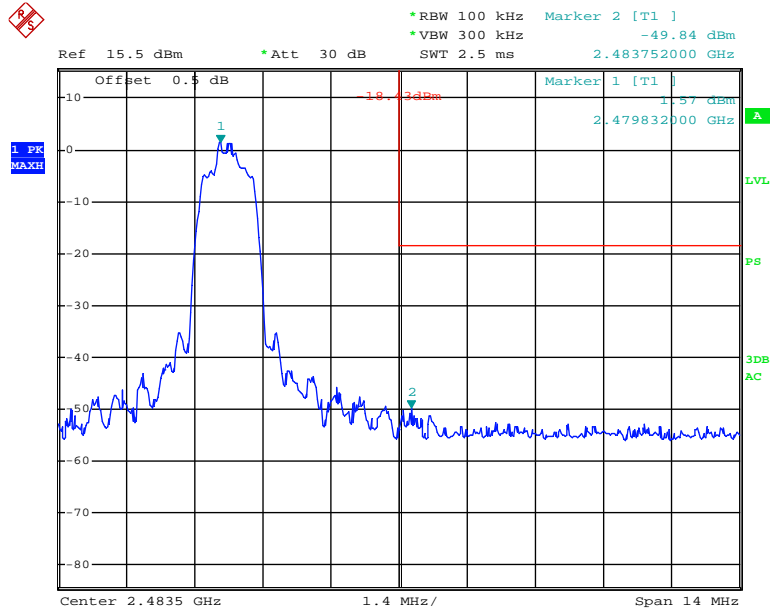

Date: 3.NOV.2016 18:34:42

### EDR Mode (8-DPSK):


### Band Edge, Left Side

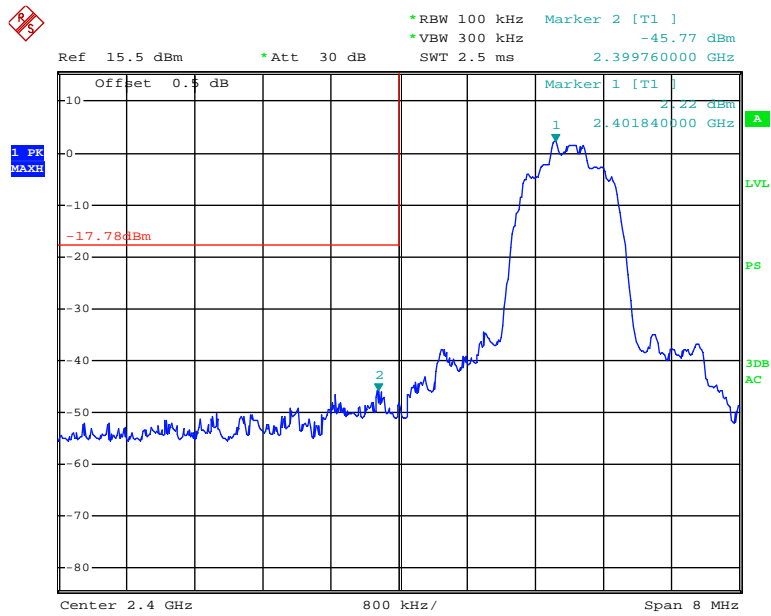

Date: 3.NOV.2016 18:38:03



### Band Edge, Right Side

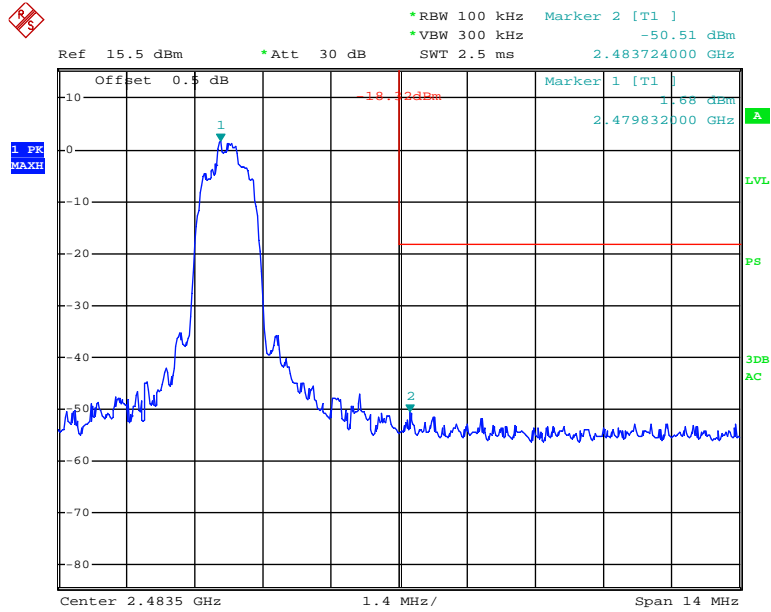

Date: 3.NOV.2016 18:40:10

\*\*\*\*\* END OF REPORT \*\*\*\*\*