

FCC 47 CFR PART 15 SUBPART B ICES-003 ISSUE 5

TEST REPORT

FOR

802.15.4 MODEM MODULE

MODEL NUMBER: 02-0084-00

REPORT NUMBER: 16U23023-E3V1

ISSUE DATE: 3/31/2016

Prepared for

ELECSYS CORPORATION 846 N. Mart-Way Court Olathe, KS 66061

Prepared by

UL VERIFICATION SERVICES INC. 47173 BENICIA STREET FREMONT, CA 94538, U.S.A.

> TEL: (510) 771-1000 FAX: (510) 661-0888



Revision History

Rev.	Issue Date	Revisions	Revised By
V1	03/31/16	Initial Issue	C. Vergonio

TABLE OF CONTENTS

1.	ATT	TTESTATION OF TEST RESULTS4				
2.	TES	ST METHODOLOGY	ı			
3.		CILITIES AND ACCREDITATION				
4.	CAL	LIBRATION AND UNCERTAINTY	6			
	4.1.	MEASURING INSTRUMENT CALIBRATION	6			
	4.2.	SAMPLE CALCULATION	6			
	4.3.	MEASUREMENT UNCERTAINTY	6			
5.	FQI	UIPMENT UNDER TEST	7			
٠.	5.1.	DESCRIPTION OF EUT				
	5.2.	TEST CONFIGURATIONS				
	5.3.	MODE(S) OF OPERATION				
	<i>5.4.</i>	MODIFICATIONS				
	5.5.	DETAILS OF TESTED SYSTEM	8			
6.	TES	ST AND MEASUREMENT EQUIPMENT	10			
	6.1.	RADIATED EMISSIONS LIMITS AND RESULTS				
7.	AC I	POWER LINE CONDUCTED EMISSIONS	14			
8.	SET	TUP PHOTOS	17			
	Ω 1	PADIATED EMISSIONS	1			

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: ELECSYS CORPORATION

846 N. Mart-Way Court Olathe, KS 66061

EUT DESCRIPTION: 802.15.4 MODEM MODULE

MODEL: 02-0084-00 SERIAL NUMBER: SAMPLE Q

DATE TESTED: March 31 – April 1, 2016

APPLICABLE STANDARDS

STANDARD

FCC 47 CFR PART 15 SUBPART B ICES-003 ISSUE 5 **TEST RESULTS**

Pass Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For

UL Verification Services Inc. By:

Prepared By:

CHARLES VERGONIO

CONSUMER TECHNOLOGY DIVISION

WISE ENGINEER

UL VERIFICATION SERVICES INC

ROLLY ALEGRE

CONSUMER TECHNOLOGY DIVISION

WISE LAB TECHNICIAN

Rally Cleme

UL VERIFICATION SERVICES INC

2. TEST METHODOLOGY

All tests were performed in accordance with the procedures documented in ANSI C63.4-2014.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
☐ Chamber A	☐ Chamber D
	☐ Chamber E
☐ Chamber C	☐ Chamber F
	☐ Chamber G
	☐ Chamber H

The above test sites and facilities are covered under FCC Test Firm Registration # 208313.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0.

Chambers A through H are covered under Industry Canada company address code 2324B with site numbers 2324B -1 through 2324B-8, respectively.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

SAMPLE CALCULATION 4.2.

Where relevant, the following sample calculation is provided:

Field Strength (dBuV/m) = Measured Voltage (dBuV) + Antenna Factor (dB/m) + Cable Loss (dB) - Preamp Gain (dB) 36.5 dBuV + 18.7 dB/m + 0.6 dB - 26.9 dB = 28.9 dBuV/m

4.3. **MEASUREMENT UNCERTAINTY**

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Disturbance, 9KHz to 30 MHz	2.14 dB
Radiated Disturbance, 30 to 1000 MHz	4.98 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is an 802.15.4 MODEM MODULE.

GENERAL INFORMATION

Power Requirements	2.5-12V External DC
List of frequencies generated or used by the EUT	42MHz(Clock Frequency)

5.2. TEST CONFIGURATIONS

The EUT was performed in X orientation.

Mode	Description
Data Transfer	EUT + micro USB cable + minimum configuration PC + Radio is on Receive mode

5.3. MODE(S) OF OPERATION

Mode	Description
Data Transfer	EUT + micro USB cable + minimum configuration PC.

5.4. MODIFICATIONS

No modification made to the EUT.

5.5. DETAILS OF TESTED SYSTEM

SUPPORT EQUIPMENT & PERIPHERALS

Support Equipment List						
Description	Manufacturer	Model	Serial Number	FCC ID		
DC Power Supply	Sorensen	XT 15-4	N/A	N/A		
Laptop	Lenovo	2349CW5	PB05HPL	N/A		
AC ADAPTER(Laptop)	Lenovo	ADLX90NLT2A	N/A	N/A		


I/O CABLES

	I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks	
1	Data	1	USB	Unshielded	1.2	N/A	
2	Power	1	Banana	Unshielded	1.5	N/A	

TEST SETUP

The EUT is stand-alone unit during the tests.

TEST SETUP DIAGRAM

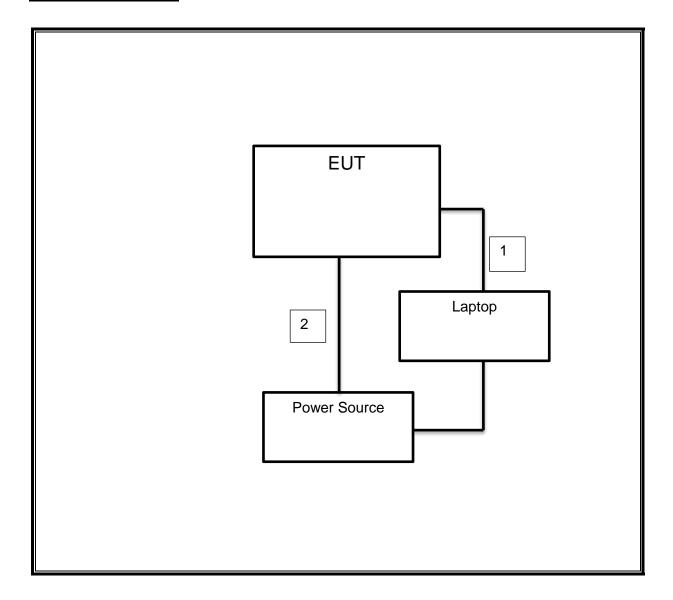

REPORT NO: 16U23023-E3V1 MODEL NUMBER: 02-0084-00

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List					
Description	Manufacturer	Model	T Number	Cal Due	
Antenna, Biconolog, 30MHz-1 GHz	Sunol Sciences	JB3	477	06/10/16	
RF Preamplifier, 10 KHz-1000 MHz	Sonoma	310N	300	11/05/16	
Spectrum Analyzer, PXA, 3 Hz to 44 GHz	Keysight	N9030A	146	06/17/16	
EMI Test Receiver, 9Khz to 7GHz	Rohde & Schwarz	ECSI7	284	9/10/2016	
LISN, 30MHz	FCC	50/250-25-2	24	9/16/2016	

Test Software List				
Description Manufacturer Model Version			Version	
Radiated Software	UL	UL EMC	Ver 9.5, June 24, 2015	
Conducted Software	UL	UL EMC	Ver 9.5, May 26, 2015	

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

DATE: 3/31/2016

6.1. RADIATED EMISSIONS LIMITS AND RESULTS

LIMIT

FCC Part 15 Subpart B Class B

FCC §15.109 (a)

Class B Limits below 1 GHz

Limits for radiated disturbance of Class B ITE at measuring distance of 3 m				
Frequency range (MHz)	Quasi-peak limits (dBµV/m)			
30 to 88	40			
88 to 216	43.5			
216 to 960 46				
Above 960 MHz 54				
Note: The lower limit shall apply at the transition frequency.				

TEST PROCEDURE


ANSI C63.4

The highest clock frequency generated or used in the EUT was 42 MHz. Therefore, the frequency range was investigated from 30MHz to 1000MHz.

Highest frequency generated or	Upper frequency of measurement						
used in the device or on which	range						
the device operates or tunes	(2.41.1.)						
(MHz)	(MHz)						
Below 108	1000						
108-500	2000						
500-1000	5000						
	5 th harmonic of the highest frequency						
Above 1000	or 40 GHz, whichever is lower for						
	FCC/IC, or 6 GHz for EU and others						

RESULTS

RADIATED EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

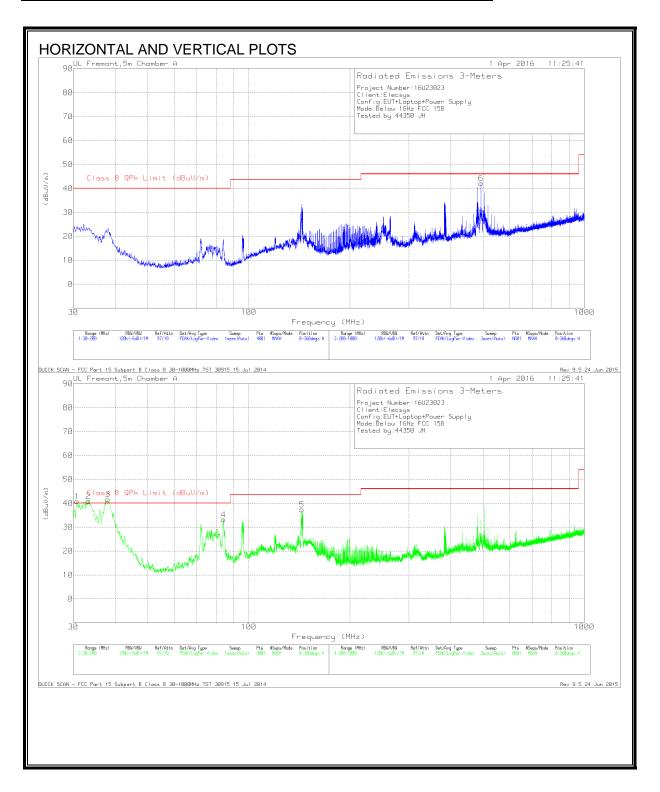

WORST CASE EMISSIONS - DATA FOR 30 TO 1000 MHz

Trace Markers

Marker	Frequency	Meter	Det	AF T477	Amp/Cbl	Corrected	Class B QPk	Margin	Azimuth	Height	Polarity
	(MHz)	Reading		(dB/m)	(dB/m)	Reading	Limit	(dB)	(Degs)	(cm)	
		(dBuV)				(dBuV/m)	(dBuV/m)				
1	30.765	47.4	Pk	24.6	-31.2	40.8	40	.8	0-360	100	V
2	33.2725	49.27	Pk	22.9	-31.2	40.97	40	.97	0-360	100	V
3	38.0325	53.41	Pk	19.4	-31.2	41.61	40	1.61	0-360	100	V
4	83.975	52.72	Pk	11.1	-30.7	33.12	40	-6.88	0-360	100	V
5	143.8575	50.93	Pk	16.7	-30.3	37.33	43.52	-6.19	0-360	100	V
6	492	49.21	Pk	21.7	-28.7	42.21	46.02	-3.81	0-360	100	Н

Pk - Peak detector

Radiated Emissions

Frequency (MHz)	Meter Reading (dBuV)	Det	AF T477 (dB/m)	Amp/Cbl (dB/m)	Corrected Reading (dBuV/m)	Class B QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
30.6992	43.53	Qp	24.7	-31.2	37.03	40	-2.97	91	131	V
33.2749	46.69	Qp	22.9	-31.2	38.39	40	-1.61	81	105	V
38.0239	50.15	Qp	19.4	-31.2	38.35	40	-1.65	102	104	V
492.0432	41.51	Qp	21.7	-28.7	34.51	46.02	-11.51	126	107	Н

Qp - Quasi-Peak detector

REPORT NO: 16U23023-E3V1 MODEL NUMBER: 02-0084-00

7. AC POWER LINE CONDUCTED EMISSIONS LIMITS

TEST PROCEDURE

ANSI C63.4

LIMITS

FCC Part 15 Subpart B Class B

FCC §15.107 (a)

Frequency of Emission (MHz)	Conducted Limit (dBuV)				
	Quasi-peak	Average			
0.15 – 0.5	66 to 56	56 to 46			
0.5 - 5	56	46			
5 - 30	60	50			

^{*}Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.


RESULTS

RESULTS

DATE: 3/31/2016

6 WORST EMISSIONS

LINE 1 PLOT

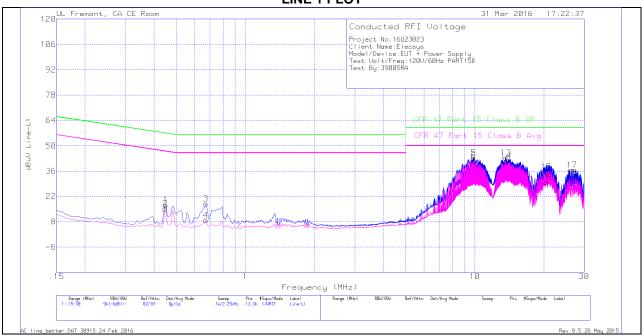

LINE 1 RESULT

Trace Markers

Range 1: Line-L1 .15 - 30MHz

_											
Marker	Frequency	Meter	Det	T24 IL L1	LC Cables	Limiter	Corrected	CFR 47	QP Margin	CFR 47	Av(CISPR)
	(MHz)	Reading			1&3	(dB)	Reading	Part 15	(dB)	Part 15	Margin
		(dBuV)					dBuV	Class B QP		Class B Avg	(dB)
1	.44925	6.9	Qp	.4	0	10.1	17.4	56.89	-39.49	-	-
2	.447	4.82	Ca	.4	0	10.1	15.32	-	-	46.93	-31.61
3	.672	7.57	Qp	.3	0	10.1	17.97	56	-38.03	-	-
4	.672	-1.56	Ca	.3	0	10.1	8.84	-	-	46	-37.16
5	9.879	32.75	Qp	.2	.2	10.2	43.35	60	-16.65	-	-
6	9.879	31.25	Ca	.2	.2	10.2	41.85	-	-	50	-8.15
13	13.67925	32.79	Qp	.2	.2	10.2	43.39	60	-16.61	-	-
14	13.67925	30.83	Ca	.2	.2	10.2	41.43	-	-	50	-8.57
15	20.5395	24.79	Qp	.3	.2	10.3	35.59	60	-24.41	-	-
16	20.544	19.04	Ca	.3	.2	10.3	29.84	-	-	50	-20.16
17	26.52	25.49	Qp	.3	.3	10.5	36.59	60	-23.41	-	-
18	26.52	21.4	Ca	.3	.3	10.5	32.5	-	-	50	-17.5

Qp - Quasi-Peak detector

Ca - CISPR average detection

LINE 2 PLOT



LINE 2 RESULT

Range 2: Line-L2 .15 - 30MHz

Marker	Frequency	Meter	Det	T24 IL L2	LC Cables	Limiter	Corrected	CFR 47	QP Margin	CFR 47	Av(CISPR)
	(MHz)	Reading			2&3	(dB)	Reading	Part 15	(dB)	Part 15	Margin
		(dBuV)					dBuV	Class B QP		Class B Avg	(dB)
7	.44925	-2.88	Qp	.4	0	10.1	7.62	56.89	-49.27	-	-
8	.44925	-4.89	Ca	.4	0	10.1	5.61	-	-	46.89	-41.28
9	1.8285	-4.1	Qp	.2	.1	10.1	6.3	56	-49.7	-	-
10	1.8285	-5.87	Ca	.2	.1	10.1	4.53	-	-	46	-41.47
11	9.9195	34.48	Qp	.2	.2	10.2	45.08	60	-14.92	-	-
12	9.9195	32.97	Ca	.2	.2	10.2	43.57	-	-	50	-6.43
19	14.199	31.52	Qp	.2	.2	10.2	42.12	60	-17.88	-	-
20	14.199	29.7	Ca	.2	.2	10.2	40.3	-	-	50	-9.7
21	20.481	29.16	Qp	.3	.2	10.3	39.96	60	-20.04	-	-
22	20.47875	26.13	Ca	.3	.2	10.3	36.93	-	-	50	-13.07
23	26.601	24.75	Qp	.3	.3	10.5	35.85	60	-24.15	-	-
24	26.59875	20.01	Ca	.3	.3	10.5	31.11	-	-	50	-18.89

Qp - Quasi-Peak detector

Ca - CISPR average detection