

FCC Test Report

Product Name	OMBEA Response System
Model No.	ResponseLink
FCC ID	2ABQQRL-01

Applicant	OMBEA AB
Address	Torbjorn Klockares Gata 14 0tr, Stockholm 11330, Sweden

Date of Receipt	Jan. 16, 2014
Issued Date	Mar. 06, 2014
Report No.	1410368R-RFUSP15V00
Report Version	V1.0



The test results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of QuieTek Corporation.
This report must not be used to claim product endorsement by TAF or any agency of the U.S. Government

Test Report Certification

Issued Date: Mar. 06, 2014

Report No.: 1410368R-RFUSP15V00



Product Name	OMBEA Response System
Applicant	OMBEA AB
Address	Torbjorn Klockares Gata 14 0tr, Stockholm 11330, Sweden
Manufacturer	OMBEA AB
Model No.	ResponseLink
EUT Rated Voltage	DC 5V (Power by PC via USB)
EUT Test Voltage	AC 120V/ 60Hz
Trade Name	OMBEA
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C: 2012 ANSI C63.10: 2009
Test Result	Complied

Test results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of QuieTek Corporation.
This report must not be used to claim product endorsement by TAF or any agency of the U.S. Government

Documented By :

A handwritten signature in blue ink that appears to read "Anita Chou".

(Senior Engineering Adm. Specialist /
Anita Chou)

Tested By :

A handwritten signature in blue ink that appears to read "Benjamin Pan".

(Assistant Engineer / Benjamin Pan)

Approved By :

A handwritten signature in blue ink that appears to read "Vincent Lin".

(Director / Vincent Lin)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	4
1.1. EUT Description.....	4
1.2. Operational Description	5
1.3. Tested System Details.....	6
1.4. Configuration of Test System	6
1.5. EUT Exercise Software	6
1.6. Test Facility	7
2. Conducted Emission.....	8
2.1. Test Equipment.....	8
2.2. Test Setup	8
2.3. Limits	9
2.4. Test Procedure	9
2.5. Uncertainty	9
2.6. Test Result of Conducted Emission.....	10
3. Radiated Emission.....	12
3.1. Test Equipment.....	12
3.2. Test Setup	13
3.3. Limits	14
3.4. Test Procedure	15
3.5. Uncertainty	15
3.6. Test Result of Radiated Emission.....	16
4. Band Edge	25
4.1. Test Equipment.....	25
4.2. Test Setup	26
4.3. Limits	27
4.4. Test Procedure	27
4.5. Uncertainty	27
4.6. Test Result of Band Edge	28
5. Duty Cycle	36
5.1. Test Equipment.....	36
5.2. Test Setup	36
5.3. Uncertainty	36
5.4. Test Result of Duty Cycle.....	37
6. EMI Reduction Method During Compliance Testing	38

Attachment 1: EUT Test Photographs

Attachment 2: EUT Detailed Photographs

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	OMBEA Response System
Trade Name	OMBEA
Model No.	ResponseLink
FCC ID	2ABQQRL-01
Frequency Range	2405~2480MHz
Channel Control	Auto
Channel Separation	5MHz
Antenna Type	PIFA (Printed on PCB)
Channel Number	16
Type of Modulation	O-PQSK
USB Cable	Shielded, 0.5m

Antenna List

No.	Manufacturer	Part No.	Peak Gain
1	Freescale	AN2731	2.2dBi for 2.4 GHz

Note: The antenna of EUT is conform to FCC 15.203

Frequency of Each Channel

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 01:	2405 MHz	Channel 02:	2410 MHz	Channel 03:	2415 MHz	Channel 04:	2420 MHz
Channel 05:	2425 MHz	Channel 06:	2430 MHz	Channel 07:	2435MHz	Channel 08:	2440 MHz
Channel 09:	2445 MHz	Channel 10:	2450 MHz	Channel 11:	2455MHz	Channel 12:	2460 MHz
Channel 13:	2465 MHz	Channel 14:	2470 MHz	Channel 15:	2475 MHz	Channel 16:	2480 MHz

Note:

1. The EUT is an OMBEA Response System with a built-in 2.4GHz transceiver.
2. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
3. These tests are conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15 Subpart C Paragraph 15.249 for spread spectrum devices.

Test Mode	Mode 1: Transmit
-----------	------------------


1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	Power Cord
1 ResponseLink	OMBEA	N/A	N/A	N/A
2 Notebook PC	DELL	PPT	N/A	Non-Shielded, 0.8m

Signal Cable Type	Signal cable Description
A USB Cable	Shielded, 0.5m

1.4. Configuration of Test System

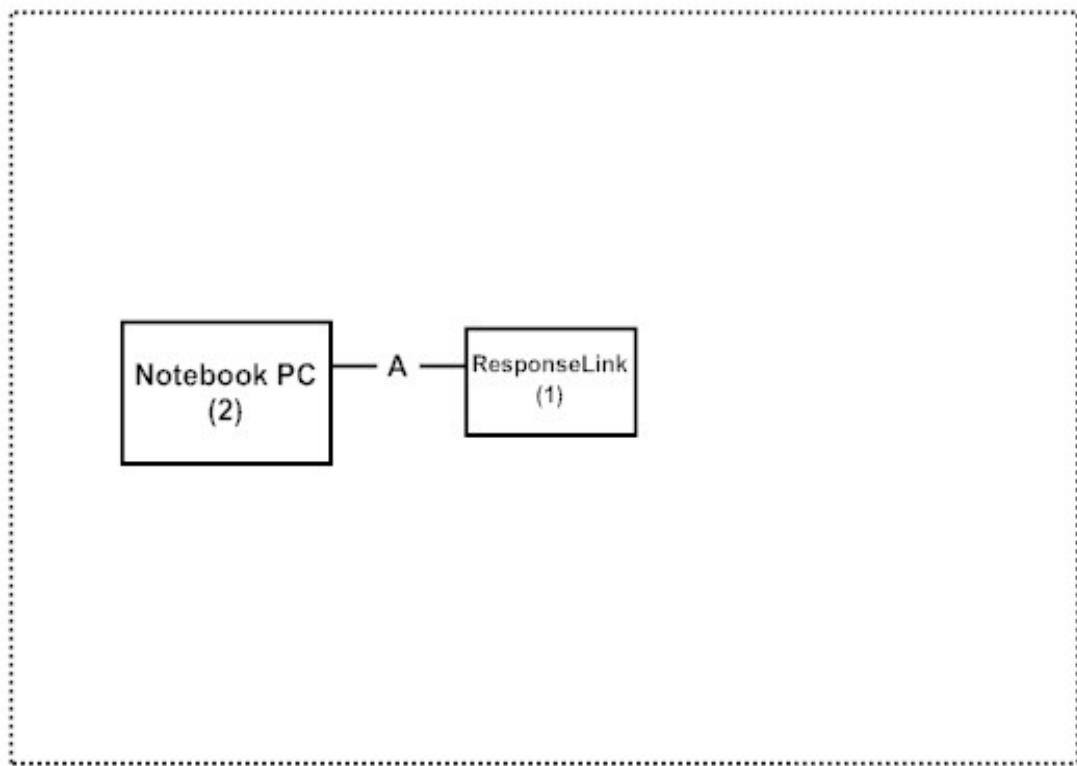

1.5. EUT Exercise Software

- (1) Setup the EUT as shown in Section 1.4.
- (2) Execute “OmbeaResponse11.exe” on the Notebook PC.
- (3) Configure the test mode and the test channel.
- (4) Start the continuous Transmit.
- (5) Verify that the EUT works properly.

1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

The related certificate for our laboratories about the test site and management system can be downloaded from QuieTek Corporation's Web Site : <http://www.quietek.com/tw/ctg/cts/accreditations.htm>
The address and introduction of QuieTek Corporation's laboratories can be founded in our Web site : <http://www.quietek.com/>

Site Description: File on
Federal Communications Commission
FCC Engineering Laboratory
7435 Oakland Mills Road
Columbia, MD 21046
Registration Number: 92195

Site Name: Quietek Corporation
Site Address: No.5-22, Ruishukeng, Linkou Dist.,
New Taipei City 24451,
Taiwan, R.O.C
TEL: 886-2-8601-3788 / FAX : 886-2-8601-3789
E-Mail : service@quietek.com

FCC Accreditation Number: TW1014

2. Conducted Emission


2.1. Test Equipment

	Equipment	Manufacturer	Model No. / Serial No.	Last Cal.	Remark
X	Test Receiver	R & S	ESCS 30 / 825442/018	Sep., 2013	
X	Artificial Mains Network	R & S	ENV4200 / 848411/10	Feb., 2014	Peripherals
X	LISN	R & S	ESH3-Z5 / 825562/002	Feb., 2014	EUT
	DC LISN	Schwarzbeck	8226 / 176	Mar, 2014	EUT
X	Pulse Limiter	R & S	ESH3-Z2 / 357.8810.52	Feb., 2014	
	No.1 Shielded Room				

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked by "X" are used to measure the final test results.

2.2. Test Setup

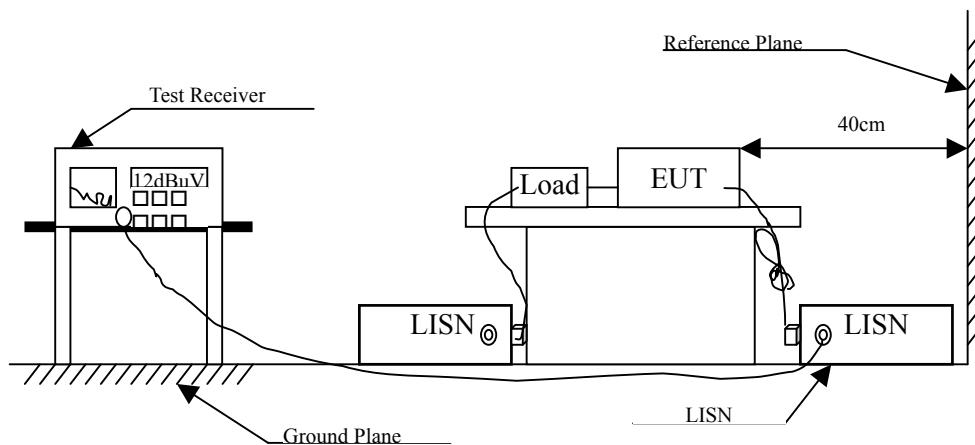

2.3. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dBuV) Limit		
Frequency MHz	Limits	
	QP	AV
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.

2.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2009 on conducted measurement.

Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

2.5. Uncertainty

± 2.26 dB

2.6. Test Result of Conducted Emission

Product : OMBEA Response System
 Test Item : Conducted Emission Test
 Power Line : Line 1
 Test Mode : Mode 1: Transmit

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV	dB	dBuV
Line 1					
Quasi-Peak					
0.181	9.724	40.960	50.684	-14.430	65.114
0.240	9.680	35.010	44.690	-18.739	63.429
0.302	9.650	28.510	38.160	-23.497	61.657
0.361	9.650	22.000	31.650	-28.321	59.971
1.880	9.680	19.230	28.910	-27.090	56.000
3.888	9.700	22.940	32.640	-23.360	56.000
Average					
0.181	9.724	31.760	41.484	-13.630	55.114
0.240	9.680	27.740	37.420	-16.009	53.429
0.302	9.650	10.270	19.920	-31.737	51.657
0.361	9.650	15.190	24.840	-25.131	49.971
1.880	9.680	16.240	25.920	-20.080	46.000
3.888	9.700	17.180	26.880	-19.120	46.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “  “ means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : OMBEA Response System
 Test Item : Conducted Emission Test
 Power Line : Line 2
 Test Mode : Mode 1: Transmit

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV	dB	dBuV
Line 2					
Quasi-Peak					
0.181	9.732	40.920	50.652	-14.462	65.114
0.244	9.689	35.340	45.029	-18.285	63.314
0.298	9.660	24.020	33.680	-28.091	61.771
0.353	9.655	10.950	20.605	-39.595	60.200
3.822	9.700	26.010	35.710	-20.290	56.000
15.466	10.000	8.840	18.840	-41.160	60.000
Average					
0.181	9.732	32.030	41.762	-13.352	55.114
0.244	9.689	26.810	36.499	-16.815	53.314
0.298	9.660	19.500	29.160	-22.611	51.771
0.353	9.655	3.310	12.965	-37.235	50.200
3.822	9.700	19.630	29.330	-16.670	46.000
15.466	10.000	3.060	13.060	-36.940	50.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “  “ means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

3. Radiated Emission

3.1. Test Equipment

The following test equipment are used during the radiated emission test:


Test Site	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
☒ Site # 3	X Bilog Antenna	Schaffner Chase	CBL6112B/2673	Sep., 2013
	X Horn Antenna	Schwarzbeck	BBHA9120D/D305	Sep., 2013
	X Horn Antenna	Schwarzbeck	BBHA9170/208	Jul., 2013
	X Pre-Amplifier	QTK	QTK-AMP-03 / 0003	May, 2013
	X Pre-Amplifier	QTK	AP-180C / CHM_0906076	Sep., 2013
	X Pre-Amplifier	MITEQ	AMF-4D-180400-45-6P / 925975	Mar, 2014
	X Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2013
	X Test Receiver	R & S	ESCS 30/ 825442/018	Sep., 2013
	X Coaxial Cable	QuieTek	QTK-CABLE/ CAB5	Feb., 2014
	X Controller	QuieTek	QTK-CONTROLLER/ CTRL3	N/A
	X Coaxial Switch	Anritsu	MP59B/6200265729	N/A

Note: 1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.


2. The test instruments marked with "X" are used to measure the final test results.

3.2. Test Setup

Radiated Emission Below 1GHz

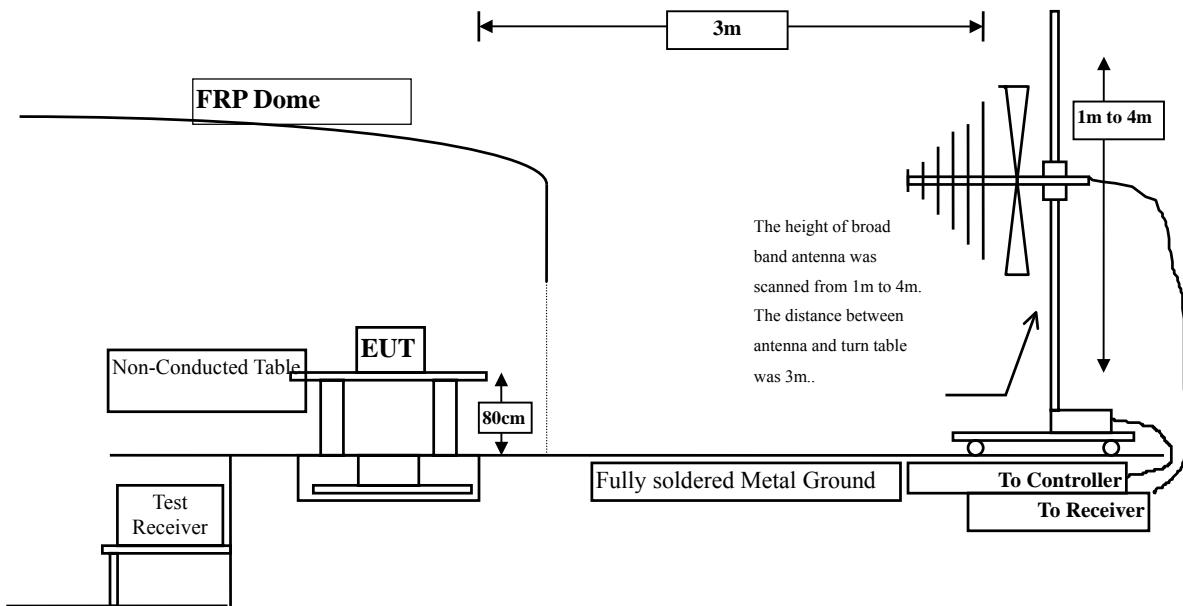

Radiated Emission Above 1GHz

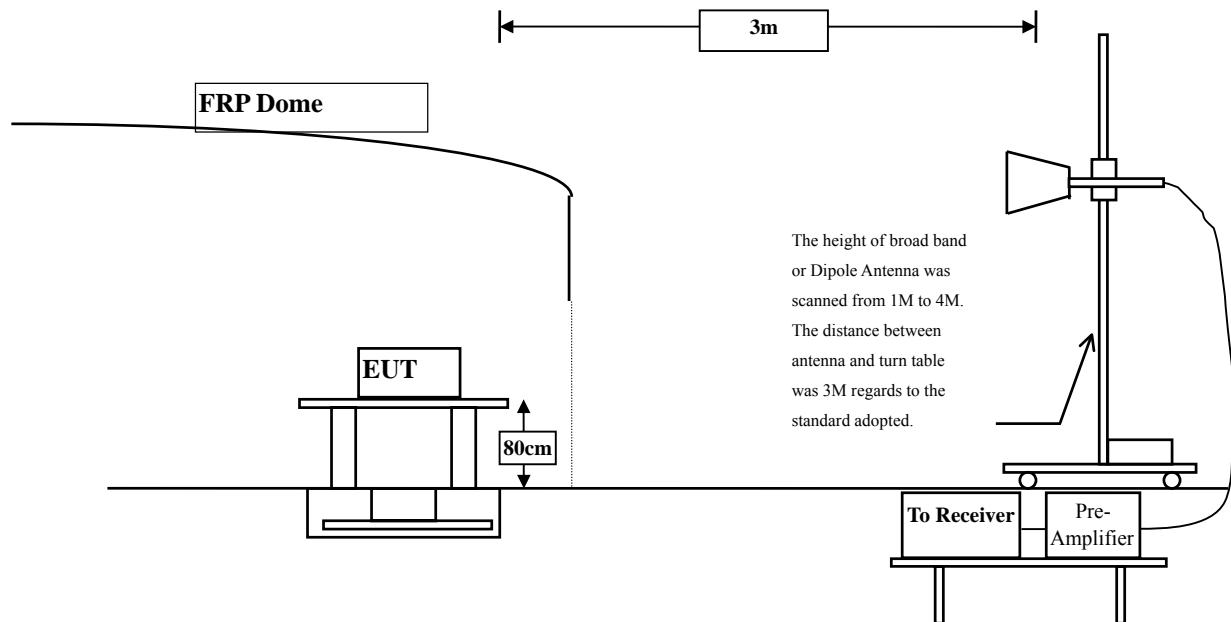

3.3. Limits

➤ Fundamental and Harmonics Emission Limits

FCC Part 15 Subpart C Paragraph 15.249 Limits				
Frequency MHz	Field Strength of Fundamental		Field Strength of Harmonics	
	(mV/m @3m)	(dBuV/m @3m)	(uV/m @3m)	(dBuV/m @3m)
902-928	50	94	500	54
2400-2483.5	50	94	500	54
5725-5875	50	94	500	54

Remarks : 1. RF Voltage (dBuV/m) = 20 log RF Voltage (uV/m)

2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209(a) Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remarks: E field strength (dBuV/m) = 20 log E field strength (uV/m)

3.4. Test Procedure

The EUT was setup according to ANSI C63.10, 2009 and tested compliance to FCC 47CFR 15.249 requirements.

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2009 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The worst radiated emission is measured in the Open Area Test Site on the Final Measurement.

The measurement frequency range from 9kHz - 10th Harmonic of fundamental was investigated.

3.5. Uncertainty

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz

3.6. Test Result of Radiated Emission

Product : OMBEA Response System
 Test Item : Fundamental Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
2405.000	33.759	69.150	102.909	-11.091	114.000
2440.000	33.838	69.010	102.848	-11.152	114.000
2480.000	33.941	68.890	102.831	-11.169	114.000
Vertical					
Peak Detector:					
2405.000	30.798	57.700	89.942	-24.058	114.000
2440.000	32.352	57.210	91.048	-22.952	114.000
2480.000	31.038	56.830	89.398	-24.602	114.000

Note:

1. Measurement Level = Reading Level + Correct Factor.
2. Correct Factor = Antenna Factor + Cable Loss – PreAMP.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Average Detector:

Frequency MHz	Peak Measurement dBuV/m	Duty Cycle Correct Factor dB	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
------------------	-------------------------------	------------------------------------	--------------------------------	--------------	-----------------

Horizontal
Average Detector:

2405.000	102.909	-35.918	66.991	-27.009	94.000
2440.000	102.848	-35.918	66.930	-27.070	94.000
2480.000	102.831	-35.918	66.913	-27.087	94.000


Vertical
Average Detector:

2405.000	89.942	-35.918	54.024	-39.976	94.000
2440.000	91.048	-35.918	55.130	-38.870	94.000
2480.000	89.398	-35.918	53.480	-40.520	94.000

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 5.

Product : OMBEA Response System
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (2405MHz)

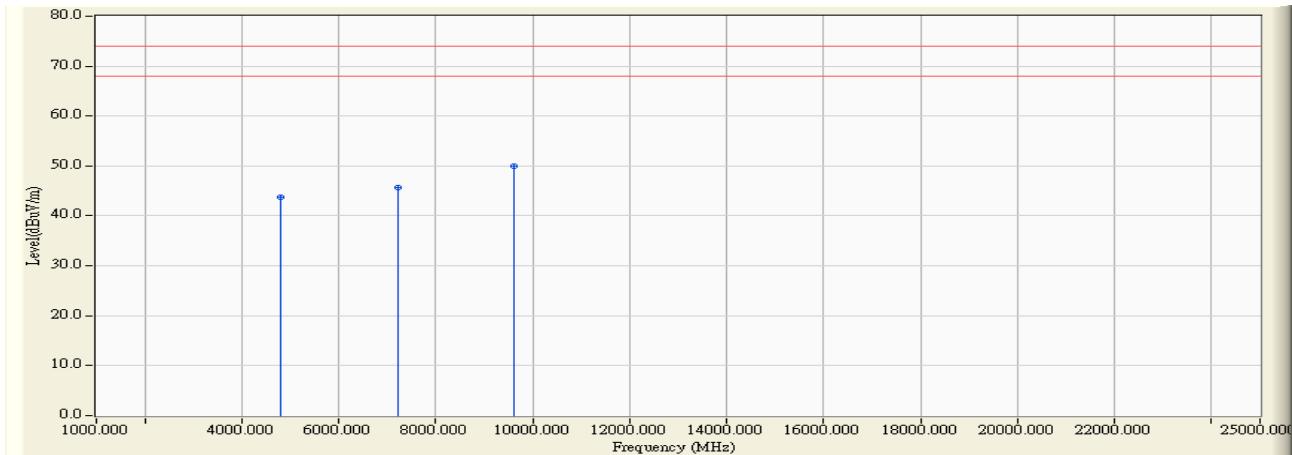


Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
4810.000	3.323	40.410	43.733	-30.267	74.000
7215.000	10.289	35.340	45.630	-28.370	74.000
9620.000	13.595	36.430	50.026	-23.974	74.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : OMBEA Response System
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (2405MHz)

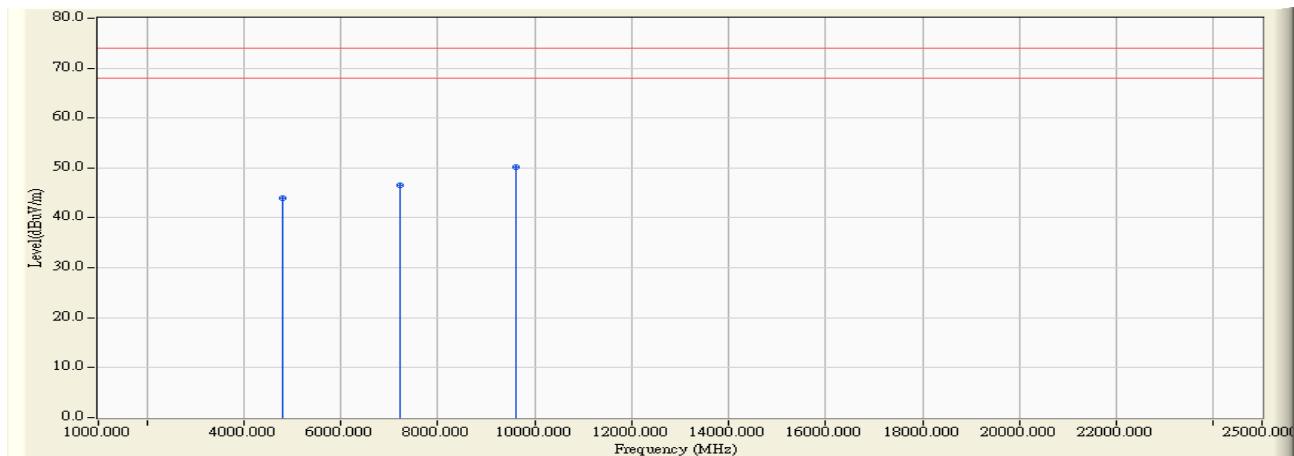


Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Vertical					
Peak Detector:					
4810.000	6.591	37.300	43.891	-30.109	74.000
7215.000	11.151	35.490	46.642	-27.358	74.000
9620.000	14.014	36.200	50.215	-23.785	74.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : OMBEA Response System
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (2440 MHz)

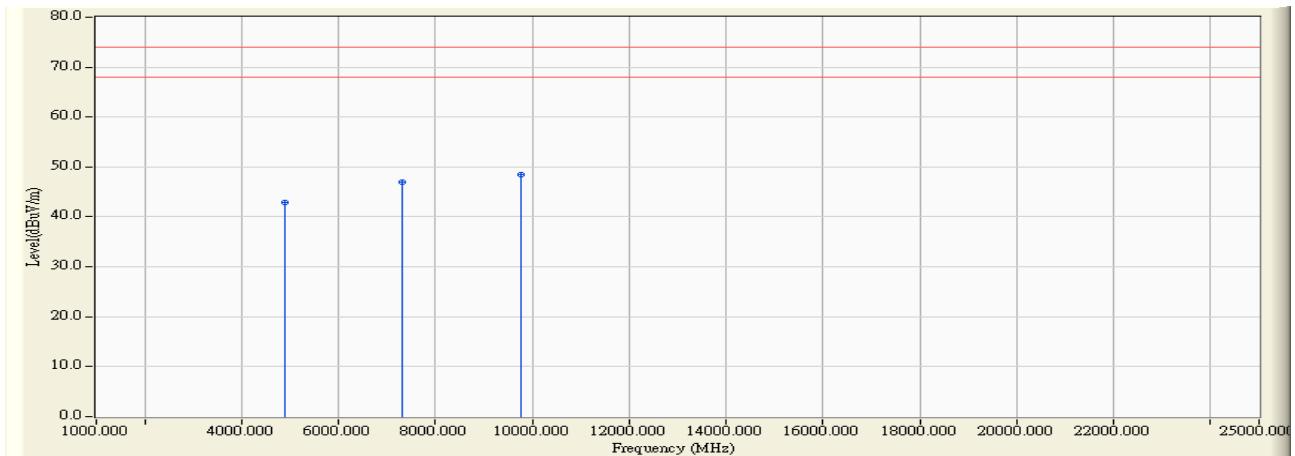


Frequency MHz	Correct Factor Db	Reading Level dBuV	Measurement Level dBuV/m	Margin Db	Limit dBuV/m
Horizontal					
Peak Detector:					
4880.000	3.010	39.980	42.990	-31.010	74.000
7320.000	11.833	35.070	46.904	-27.096	74.000
9760.000	12.580	35.790	48.371	-25.629	74.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : OMBEA Response System
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (2440MHz)

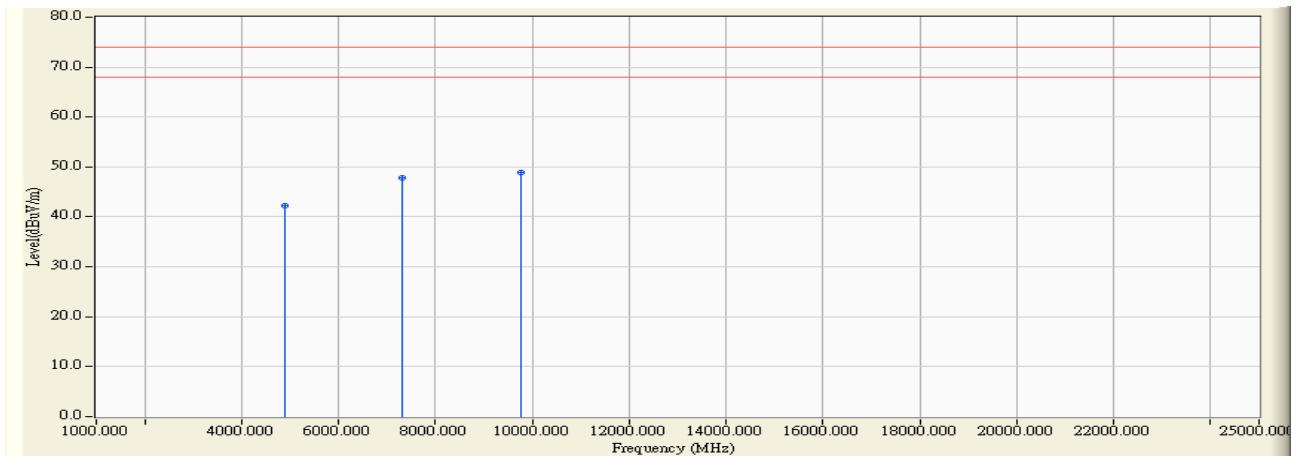


Frequency MHz	Correct Factor Db	Reading Level dBuV	Measurement Level dBuV/m	Margin Db	Limit dBuV/m
Vertical					
Peak Detector:					
4880.000	5.738	36.440	42.178	-31.822	74.000
7320.000	12.703	35.150	47.853	-26.147	74.000
9760.000	13.052	35.780	48.832	-25.168	74.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : OMBEA Response System
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (2480 MHz)

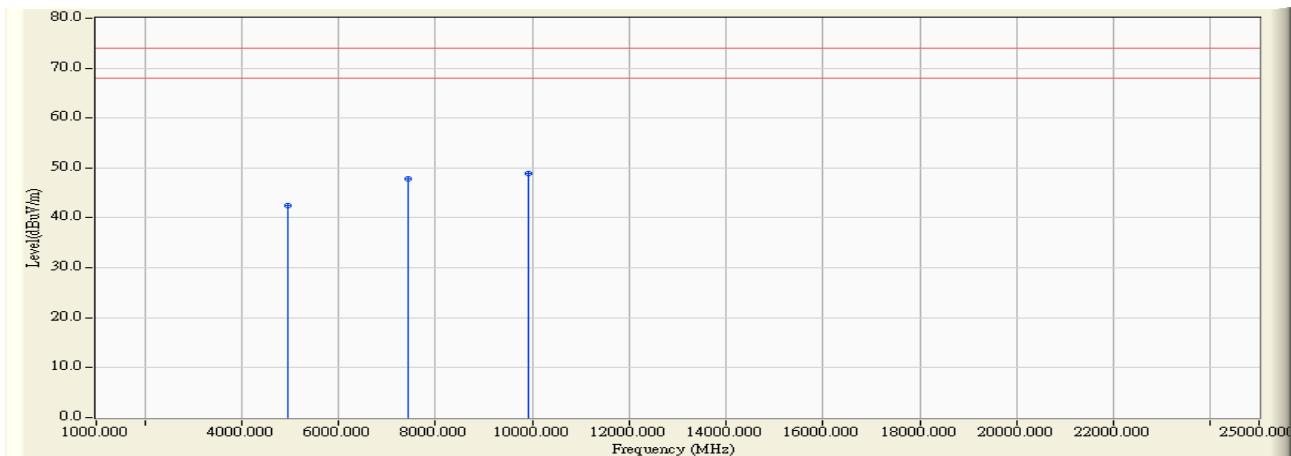


Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
4960.000	2.760	39.670	42.430	-31.570	74.000
7440.000	12.567	35.340	47.906	-26.094	74.000
9920.000	13.456	35.550	49.006	-24.994	74.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : OMBEA Response System
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (2480 MHz)

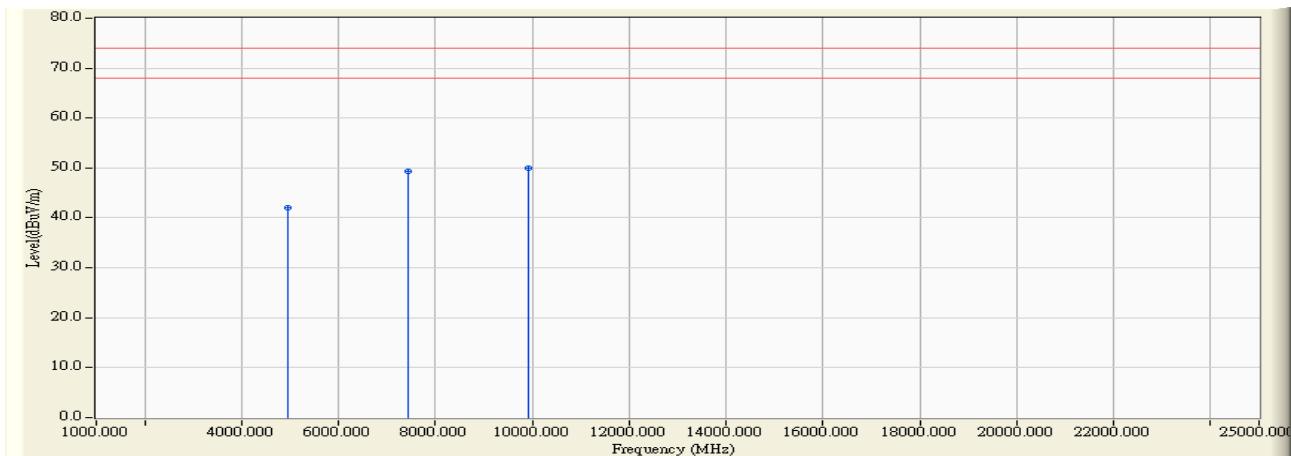

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Vertical					
Peak Detector:					
4960.000	5.557	36.480	42.037	-31.963	74.000
7440.000	13.426	36.010	49.435	-24.565	74.000
9920.000	13.958	36.000	49.958	-24.042	74.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : OMBEA Response System
 Test Item : General Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (2440 MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
123.120	-7.320	29.495	22.175	-21.325	43.500
268.620	-5.522	37.660	32.138	-13.862	46.000
460.680	4.030	27.319	31.349	-14.651	46.000
613.940	3.132	26.416	29.548	-16.452	46.000
792.420	6.391	23.812	30.203	-15.797	46.000
965.080	7.222	27.624	34.846	-19.154	54.000
Vertical					
86.260	-4.042	30.951	26.909	-13.091	40.000
332.640	-2.255	40.414	38.159	-7.841	46.000
489.780	-2.262	26.787	24.525	-21.475	46.000
666.320	-0.951	35.990	35.039	-10.961	46.000
817.640	2.966	25.372	28.338	-17.662	46.000
968.960	3.936	34.564	38.500	-15.500	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

4. Band Edge

4.1. Test Equipment

RF Conducted Measurement

The following test equipments are used during the band edge tests:

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2013
Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2013
X Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2013

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

The following test equipments are used during the band edge tests:


Test Site	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
☒ Site # 3	Bilog Antenna	Schaffner Chase	CBL6112B/2673	Sep., 2013
	X Horn Antenna	Schwarzbeck	BBHA9120D/D305	Sep., 2013
	Horn Antenna	Schwarzbeck	BBHA9170/208	Jul., 2013
	X Pre-Amplifier	QTK	AP-180C / CHM_0906076	Sep., 2013
	X Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2013
	Test Receiver	R & S	ESCS 30/ 825442/018	Sep., 2013
	X Coaxial Cable	QuieTek	QTK-CABLE/ CAB5	Feb., 2014
	X Controller	QuieTek	QTK-CONTROLLER/ CTRL3	N/A
	X Coaxial Switch	Anritsu	MP59B/6200265729	N/A

Note:


1. All equipments are calibrated every one year.
2. The test equipments marked by “X” are used to measure the final test results.

4.2. Test Setup

RF Conducted Measurement

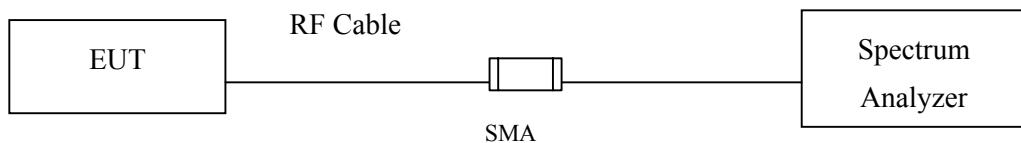

RF Radiated Measurement:

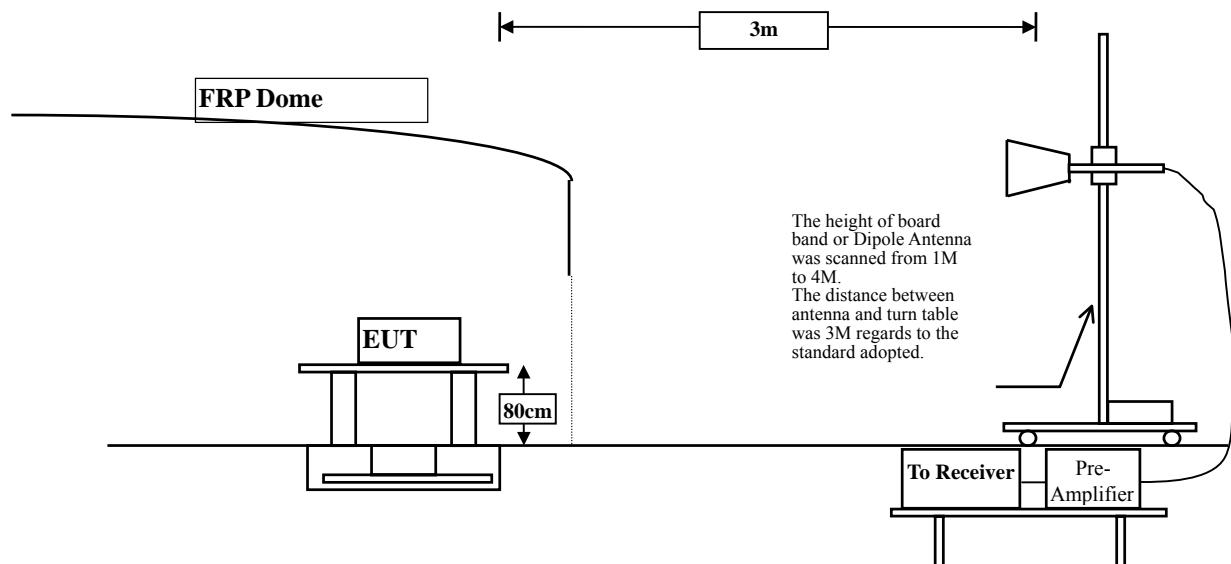

4.3. Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 50 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

4.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10: 2009 on radiated measurement.

The bandwidth setting below 1GHz and above 1GHz on the field strength meter is 120 kHz and 1MHz, respectively.

4.5. Uncertainty

Conducted is \pm 1.27 dB

Radiated is \pm 3.9 dB

4.6. Test Result of Band Edge


Product : OMBEA Response System
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (2405 MHz)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
01 (Peak)	2390.000	33.739	34.225	67.964	74.00	54.00	Pass
01 (Peak)	2399.800	33.751	38.982	72.733	74.00	54.00	Pass
01 (Peak)	2400.000	33.752	33.138	66.889	74.00	54.00	Pass
01 (Peak)	2404.600	33.759	69.827	103.586	--	--	--

Figure Channel 01:

Horizontal (Peak)

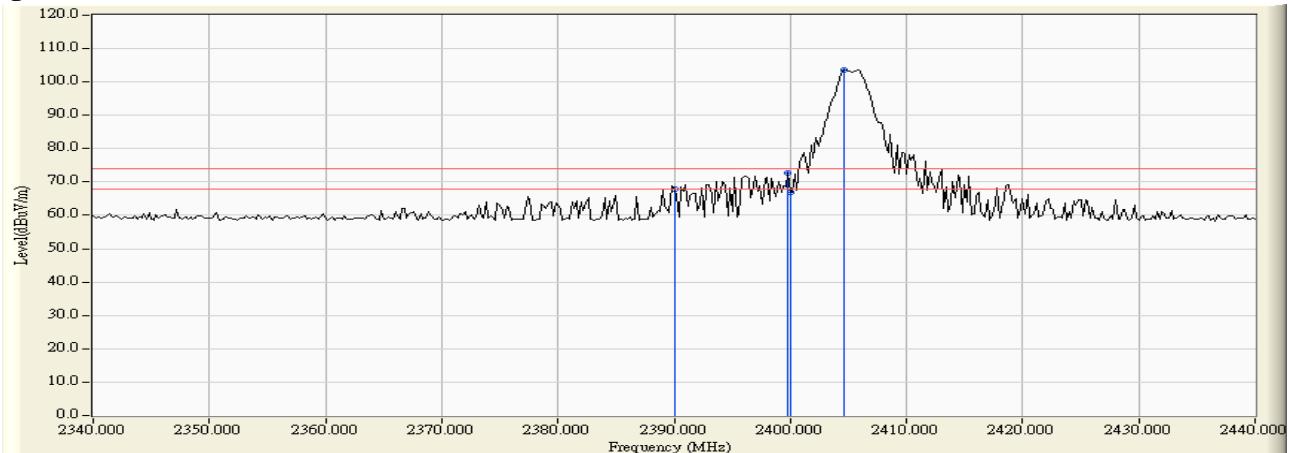

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Average Detector:

Frequency MHz	Peak Measurement dB μ V/m	Duty Cycle Factor dB	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m	Result Pass
------------------	-------------------------------------	----------------------------	--------------------------------------	--------------	-----------------------	----------------

Horizontal**Average Detector:**

2390.000	67.964	-35.918	32.046	-21.954	54.000	Pass
2399.800	72.733	-35.918	36.815	-17.185	54.000	Pass
2400.000	66.889	-35.918	30.971	-23.029	54.000	Pass


Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 5.

Product : OMBEA Response System
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (2405 MHz)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
01 (Peak)	2390.000	32.267	25.104	57.371	74.00	54.00	Pass
01 (Peak)	2399.000	32.240	27.023	59.263	74.00	54.00	Pass
01 (Peak)	2400.000	32.241	25.431	57.672	74.00	54.00	Pass
01 (Peak)	2404.800	32.242	57.268	89.510	--	--	--

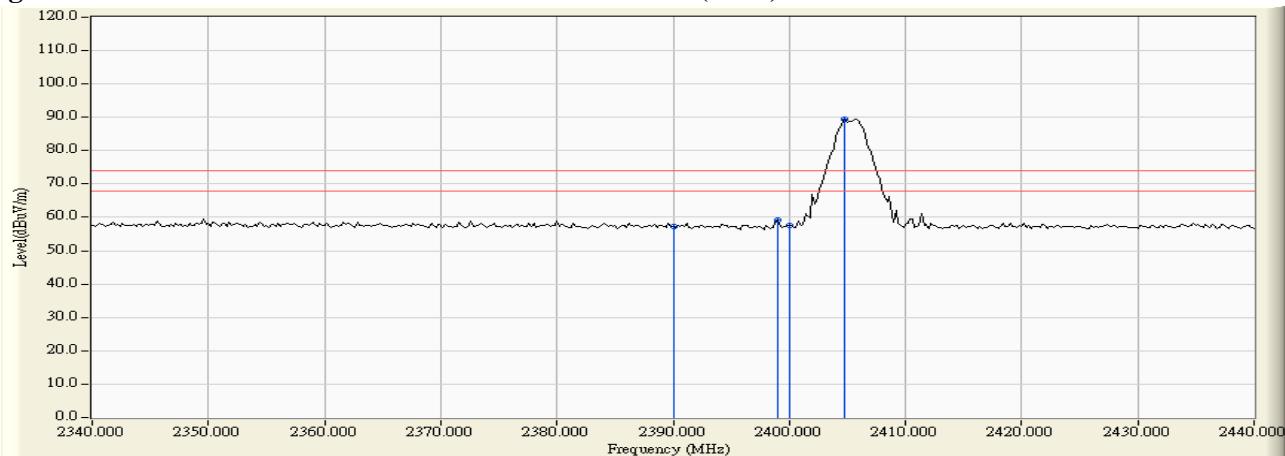Figure Channel 01:
Vertical (Peak)

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Average Detector:

Frequency MHz	Peak Measurement dB μ V/m	Duty Cycle Factor dB	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m	Result Pass
------------------	-------------------------------------	----------------------------	--------------------------------------	--------------	-----------------------	----------------

Vertical**Average Detector:**

2390.000	57.371	-35.918	21.453	-32.547	54.000	Pass
2399.000	59.263	-35.918	23.345	-30.655	54.000	Pass
2400.000	57.672	-35.918	21.754	-32.246	54.000	Pass

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 5.


Product : OMBEA Response System
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (2480 MHz)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
16 (Peak)	2479.700	33.941	63.974	97.914	--	--	--
16 (Peak)	2483.500	33.951	38.160	72.110	74.00	54.00	Pass

Figure Channel 16:

Horizontal (Peak)

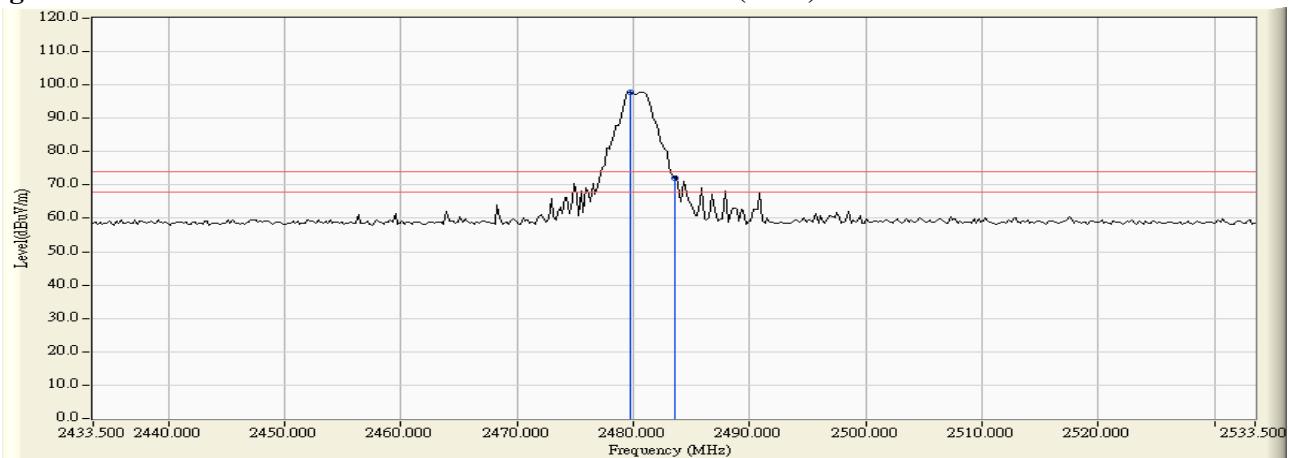

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Average Detector:

Frequency	Peak	Duty Cycle	Measurement	Margin	Limit	Result
MHz	Measurement	Factor	Level	dB	dB	Pass
	dB μ V/m	dB	dB μ V/m		dB μ V/m	

Horizontal**Average Detector:**

2483.500	72.11	-35.918	36.192	-17.808	54.000	Pass
----------	-------	---------	--------	---------	--------	------


Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 5.

Product : OMBEA Response System
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (2480 MHz)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
16 (Peak)	2479.900	32.568	52.426	84.993	--	--	--
16 (Peak)	2483.500	32.586	25.234	57.819	74.00	54.00	Pass

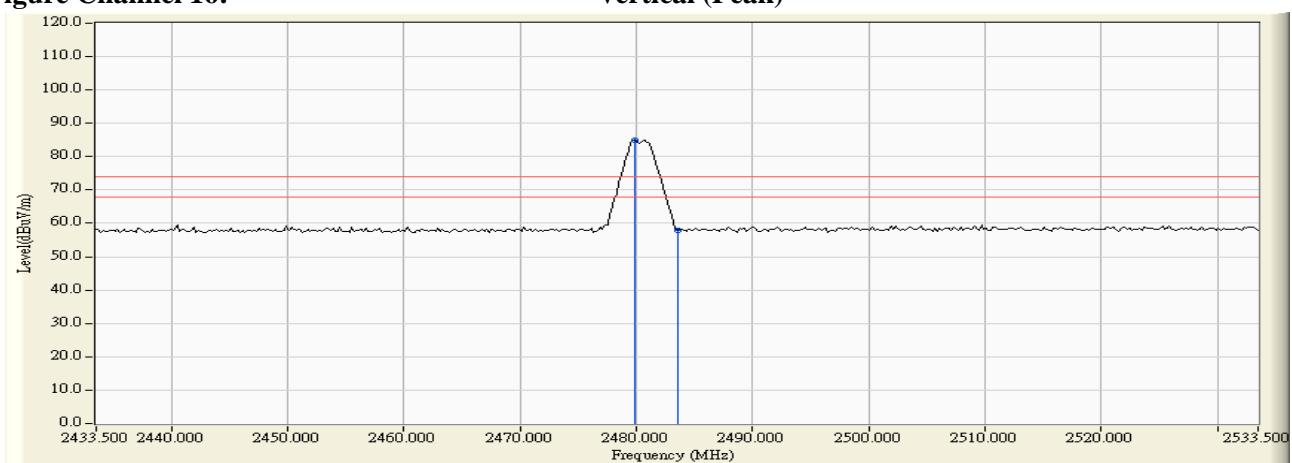Figure Channel 16:**Vertical (Peak)****Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Average Detector:

Frequency	Peak Measurement	Duty Cycle Factor	Measurement Level	Margin	Limit	Result
MHz	dB μ V/m	dB	dB μ V/m	dB	dB μ V/m	Pass

Vertical**Average Detector:**

2483.500	57.819	-35.918	21.901	-32.099	54.000	Pass
----------	--------	---------	--------	---------	--------	------

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 5.

5. Duty Cycle


5.1. Test Equipment

The following test equipments are used during the band edge tests:

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2013
Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2013
X Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2013

Note: 1. All equipments are calibrated every one year.
2. The test equipments marked by “X” are used to measure the final test results.

5.2. Test Setup

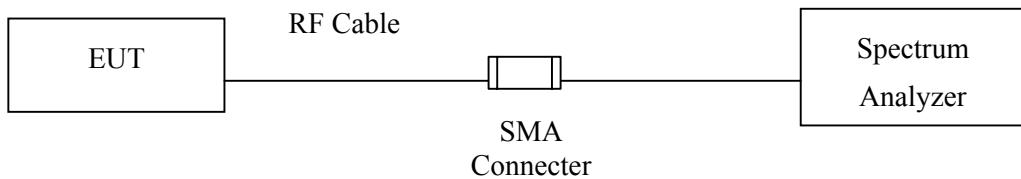


5.3. Uncertainty

± 150Hz

5.4. Test Result of Duty Cycle

Product : OMBEA Response System
 Test Item : Duty Cycle Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit

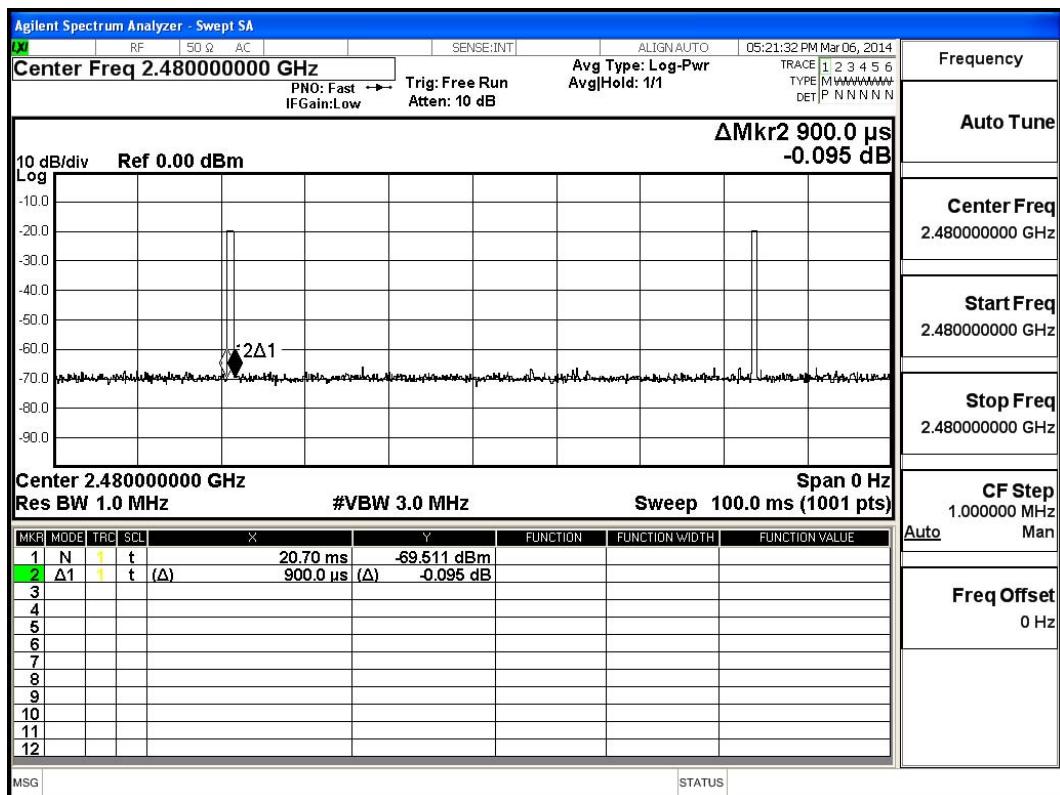

Time on of 100ms= 1.6ms

Duty Cycle= 1.6ms / 100ms= 0.016

Duty Cycle correction factor= 20 LOG 0.016= -35.918 dB

Duty Cycle correction factor	-35.918	dB
-------------------------------------	----------------	-----------

6. EMI Reduction Method During Compliance Testing

No modification was made during testing.