

## General Description

BDE-BW335P2 is a 2.4-GHz & 5-GHz Wi-Fi 6 and Bluetooth Low Energy 5.4 combo wireless module series based on TI's chip. This module series is ideal for use in cost sensitive embedded applications with a Linux or RTOS host running TCP/IP, where the peak throughput requirement is 50 Mbps maximum at the IP layer. BDE-BW335P2 module series could be the best choice for bringing the efficiency of Wi-Fi 6 to embedded device applications with a small PCB footprint and highly optimized bill of materials with lower cost. The module is backward compatible with Wi-Fi 4 (802.11 b/g/n) and Wi-Fi 5 (802.11 ac).

In order to fulfil different integration requirements, BDE provides different variants. They are listed in Table 1.

**Table 1. Module Variants**

Orderable Part Number	Connectivity	Antenna Options	Antenna Diversity Support	Operating Temperature
BDE-BW3351NP2	Wi-Fi 6 2.4-GHz & 5-GHz SISO & BLE 5.4	ANT pin	Supported	-40 °C to +85 °C
BDE-BW3351UP2	Wi-Fi 6 2.4-GHz & 5-GHz SISO & BLE 5.4	U.FL connector	Supported	-40 °C to +85 °C
BDE-BW3350NP2	Wi-Fi 6 2.4-GHz & 5-GHz SISO & BLE 5.4	ANT pin	Supported	-40 °C to +85 °C
BDE-BW3350UP2	Wi-Fi 6 2.4-GHz & 5-GHz SISO & BLE 5.4	U.FL connector	Supported	-40 °C to +85 °C
BDE-BW3351NP2-IN	Wi-Fi 6 2.4-GHz & 5-GHz SISO & BLE 5.4	ANT pin	Supported	-40 °C to +105 °C
BDE-BW3351UP2-IN	Wi-Fi 6 2.4-GHz & 5-GHz SISO & BLE 5.4	U.FL connector	Supported	-40 °C to +105 °C
BDE-BW3350NP2-IN	Wi-Fi 6 2.4-GHz & 5-GHz SISO & BLE 5.4	ANT pin	Supported	-40 °C to +105 °C
BDE-BW3350UP2-IN	Wi-Fi 6 2.4-GHz & 5-GHz SISO & BLE 5.4	U.FL connector	Supported	-40 °C to +105 °C

## Key Features

- Highly optimized Wi-Fi 6 and Bluetooth Low Energy 5.4 system for low cost embedded IoT applications
- Seamless integration with any processor or MCU host capable of running a TCP/IP stack
- Integrated 2.4-GHz & 5-GHz PA for complete wireless solution with up to +20 dBm output power
- Application throughput up to 50 Mbps
- Wi-Fi 6
  - 2.4 GHz & 5-GHz, 20 MHz, single spatial stream
  - MAC, baseband, and RF transceiver with support for IEEE 802.11 b/g/n/ax
  - Target wake time (TWT), OFDMA, MU-MIMO (Downlink), Basic Service Set Coloring, and trigger frame for improved efficiency
  - Hardware-based encryption and decryption supporting WPA2 and WPA3
  - Excellent interoperability
  - Support for 4 bit SDIO or SPI host interfaces
- Bluetooth Low Energy 5.4
  - LE Coded PHYs (Long Range), LE 2M PHY (High Speed) and Advertising Extension
  - Host controller interface (HCI) transport with option for UART or shared SDIO
- Enhanced Security
  - Secured host interface
  - Firmware authentication
  - Anti-rollback protection
- Multirole support (for example, concurrent STA and AP) to connect with Wi-Fi devices on different RF channels (Wi-Fi networks)
- 3-wire or 1-wire PTA for external coexistence with additional 2.4-GHz radios (for example, Thread or Zigbee)
- Operating temperature: -40°C to +85°C or -40°C to +105°C
- Power Management
  - VDD\_1V8: 1.62 V - 1.98 V
  - VDD\_3V3: 2.1 V - 4.2 V
- Clock Source
  - On-board 40 MHz XTAL fast clock
  - External 32.768-kHz slow clock by default
- Antenna Options
  - ANT pin for external antenna
  - U.FL connector for external antenna
- Package
  - LGA-64, 13.4-mm x 13.3-mm x 2-mm

## BDE-BW335P2

BDE Dual Band (2.4 and 5GHz) Wi-Fi 6 & BLE Combo Module

- LGA-64, 18.4-mm x 13.3-mm x 2-mm
- Pin to Pin Compatible with TI's WL1837MOD
- Pin to Pin Compatible with BDE's BDE-BW2837
- Qualification and Regulatory Compliance
  - Bluetooth SIG
  - FCC
  - IC
  - TELEC
  - CE-RED

## Applications

- Grid Infrastructure
  - Electricity Meter
  - String Inverter
  - Micro Inverter
  - Energy Storage Power Conversion System (PCS)
  - EV Charging Infrastructure
- Building and Home Automation
  - HVAC Controller
  - HVAC Gateway
  - Thermostat
  - Building Security Gateway
  - Garage Door System
  - IP Network Camera/ Video Doorbell
  - Wireless Security Camera
- Appliances
  - Refrigerator & Freezer
  - Oven
  - Washer & Dryer
- Residential Water Heater & Heating System
- Air Purifier & Humidifier
- Coffee Machine
- Air Conditioner Indoor Unit
- Vacuum Robot
- Robotic Lawn Mower
- Medical
  - Infusion Pump
  - Electronic Hospital Bed & Bed Control
  - Multiparameter Patient Monitor
  - Blood Pressure Monitor
  - CPAP Machine
  - Telehealth Systems
  - Ultrasound Scanner
  - Ultrasound Smart Probe
  - Electric Toothbrush
- Retail Automation and Payment
- Printers

## Contents

General Description.....	1
Key Features.....	1
Applications.....	2
Contents.....	3
List of Tables.....	4
List of Figures.....	5
References.....	6
1. System Overview.....	7
1.1. Block Diagram.....	7
2. Pinout Functions.....	9
2.1. Pin Diagram.....	9
2.2. Pinout Description.....	10
3. Characteristics.....	12
3.1. Electrical Characteristics.....	12
3.1.1. Absolute Maximum Ratings.....	12
3.1.2. ESD Ratings.....	12
3.1.3. Recommended Operating Conditions.....	12
3.1.4. I/O DC Characteristics.....	12
3.1.5. Power Consumption.....	12
3.1.6. Fast Clock Characteristics.....	14
3.1.7. External Slow Clock Requirements.....	14
3.1.8. Power Supply Sequencing.....	14
3.1.9. SDIO Timing Characteristics.....	15
3.1.10. SPI Timing Characteristics.....	16
3.1.11. UART 4-Wire Interface.....	17
3.2. RF Characteristics.....	17
3.2.1. WLAN Performance: 2.4-GHz Receiver Characteristics.....	17
3.2.2. WLAN Performance: 5-GHz Receiver Characteristics.....	18
3.2.3. WLAN Performance: 2.4-GHz Transmitter Characteristics.....	18
3.2.4. WLAN Performance: 5-GHz Transmitter Characteristics.....	18
3.2.5. BLE Performance: Receiver Characteristics.....	19
3.2.6. BLE Performance: Transmitter Characteristics.....	19
4. Mechanical Specifications.....	20
4.1. Module Dimensions.....	20
4.2. PCB Footprints.....	21
4.3. U.FL Connector Specification.....	22
5. Integration Guideline.....	23
5.1. System Diagram.....	23
5.2. Module Placement.....	23
5.3. Reference Design.....	24
5.4. Other Design Considerations.....	24
6. Handling Instructions.....	25
6.1. Module Marking.....	25
6.2. Packaging Information.....	26
6.2.1. Tape and Reel Package Information.....	26
6.2.2. Carton Information and Labeling.....	28
6.3. Assembly Instruction.....	28

6.3.1.	Moisture Sensitive Level.....	28
6.3.2.	Reflow Profile.....	28
6.3.3.	Other Consideration.....	29
7.	Certification.....	29
7.1.	Bluetooth Qualification.....	29
7.1.1.	Bluetooth Qualification Information.....	29
7.1.2.	Bluetooth Qualification Process.....	29
7.2.	Regulatory Compliance.....	30
7.2.1.	Certified Antennas.....	30
7.2.2.	FCC Caution.....	32
	Important Note:.....	32
	End Product Labeling.....	32
	Manual Information to the End User.....	32
	Integration instructions for host product manufacturers according to KDB 996369 D03 OEM Manual v01r01.....	33
2.2	List of applicable FCC rules.....	33
2.3	Specific operational use conditions.....	33
2.4	Limited module procedures.....	33
2.5	Trace antenna designs.....	33
2.6	RF exposure considerations.....	33
2.7	Antennas.....	33
2.8	Label and compliance information.....	33
2.9	Information on test modes and additional testing requirements.....	33
2.10	Additional testing, Part 15 Subpart B disclaimer.....	33
2.11	Note EMI Considerations.....	34
2.12	How to make changes.....	34
7.2.3.	ISED Statement.....	34
8.	Ordering Information.....	35
9.	Revision History.....	35
	Important Notice and Disclaimer.....	36
	Contact.....	36

## List of Tables

Table 1.	Module Variants.....	1
Table 2.	Pinout Description.....	10
Table 3.	Absolute Maximum Ratings.....	12
Table 4.	ESD Ratings.....	12
Table 5.	Recommended Operating Conditions.....	12
Table 6.	I/O DC Characteristics.....	12
Table 7.	Current Consumption – WLAN 2.4-GHz Static Modes.....	13
Table 8.	Current Consumption – WLAN 2.4-GHz Use Cases.....	13
Table 9.	Current Consumption – WLAN 5-GHz Static Modes.....	13
Table 10.	Current Consumption – WLAN 5-GHz Use Cases.....	13
Table 11.	Current Consumption – BLE Static Modes.....	14
Table 12.	Current Consumption – Device States.....	14
Table 13.	40-MHz Crystal Oscillator (HFXT) Characteristics.....	14
Table 14.	External 32.768-KHz Slow Clock Requirements.....	14
Table 15.	SDIO Timing Parameters - Default Speed.....	15
Table 16.	SDIO Timing Parameters - High Speed.....	16
Table 17.	SPI Timing Parameters.....	17

Table 18. UART Timing Parameters.....	17
Table 19. WLAN Performance: 2.4-GHz Receiver Characteristics.....	17
Table 20. WLAN Performance: 5-GHz Receiver Characteristics.....	18
Table 21. WLAN Performance: 2.4-GHz Transmitter Power.....	18
Table 22. WLAN Performance: 5-GHz Transmitter Power.....	18
Table 23. BLE Performance: 2.4-GHz Receiver Characteristics.....	19
Table 24. BLE Performance: Transmitter Characteristics.....	20
Table 25. Other Design Considerations.....	25
Table 26. Reflow Profile Parameters <sup>(1)(3)</sup> .....	29
Table 27. Bluetooth Qualification Information.....	29
Table 28. Certification Information.....	30
Table 29. Certified Antenna List.....	30
Table 30. Ordering Information.....	35
Table 31. Revision History.....	35

## List of Figures

Figure 1. The block diagram of BDE-BW335XNP2.....	7
Figure 2. The block diagram of BDE-BW335XUP2.....	8
Figure 3. The block diagram of CC3351 (Adopted from CC3351 Datasheet).....	8
Figure 4. Pin Diagram of BDE-BW335XNP1 and BDE-BW335XNP2 (Top View).....	9
Figure 5. Pin Diagram of BDE-BW335XUP1 and BDE-BW335XUP2 (Top View).....	9
Figure 6. SDIO Default Input Timing.....	15
Figure 7. SDIO Default Output Timing.....	15
Figure 8. SDIO High Speed Input Timing.....	16
Figure 9. SDIO High Speed Output Timing.....	16
Figure 10. SDIO Default Input Timing.....	17
Figure 11. SPI Output Timing.....	17
Figure 12. Mechanical Drawing of BDE-BW335XNP1 and BDE-BW335XNP2.....	20
Figure 13. Mechanical Drawing of BDE-BW335XUP1 and BDE-BW335XUP2.....	21
Figure 14. Recommended Footprint Drawings.....	21
Figure 15. U.FL Connector Drawing and Specification.....	22
Figure 16. High-Level System Block Diagram.....	23
Figure 17. Recommended Module Placement.....	24
Figure 18. Module Marking.....	26
Figure 19. Carrier Tape Drawing for BDE-BW335XUPX variants.....	27
Figure 20. 13-INnch Reel Drawing.....	27
Figure 21. Thermal Profile Schematic.....	28

## References

1. CC3351 resources: <https://www.ti.com/product/CC3351>;

# 1. System Overview

## 1.1. Block Diagram

BDE-BW335P2 module series is based on the TI's 10<sup>th</sup> generation connectivity combo chip. The module series, as seen in below diagrams, depending on different configurations, comprises of:

- 40-MHz XTAL
- Bandpass filter
- Decoupling capacitors
- U.FL connector (U.FL variants)



Figure 1. The block diagram of BDE-BW335XNP2



Figure 2. The block diagram of BDE-BW335XUP2


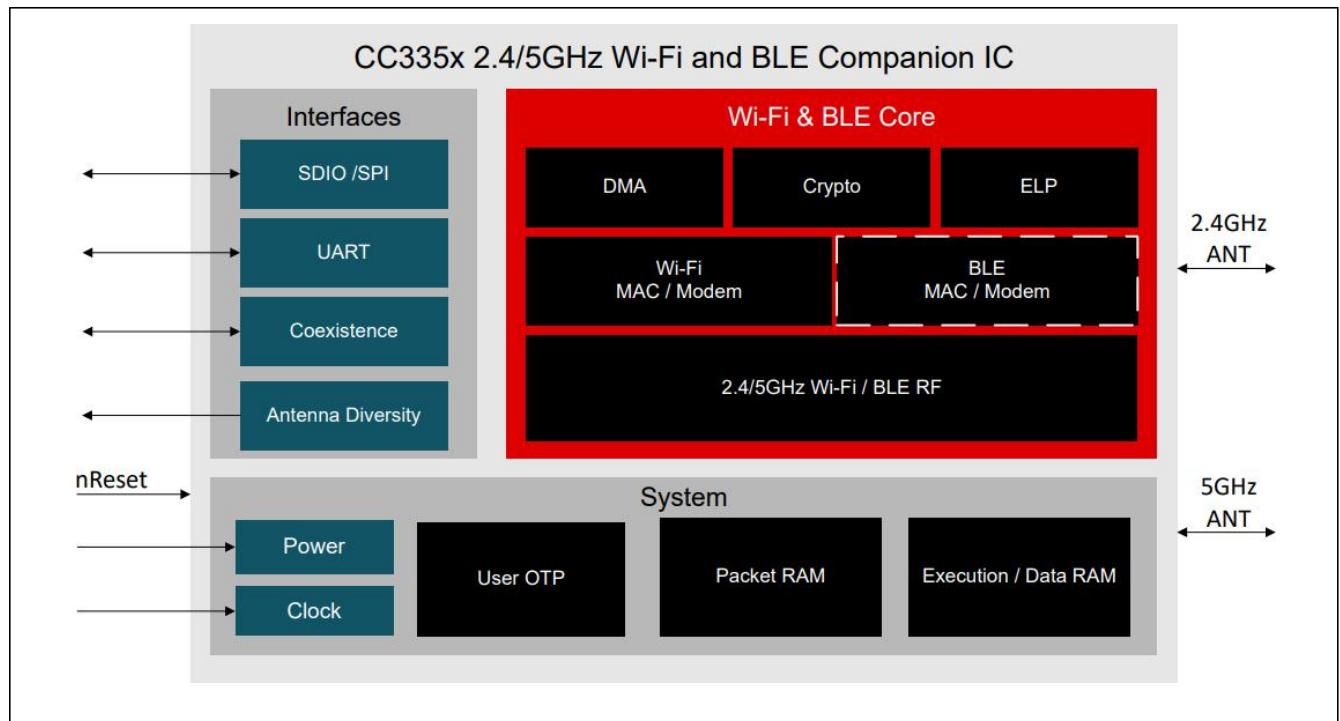



Figure 3. The block diagram of CC3351 (Adopted from CC3351 Datasheet)

## 2. Pinout Functions

## 2.1. Pin Diagram

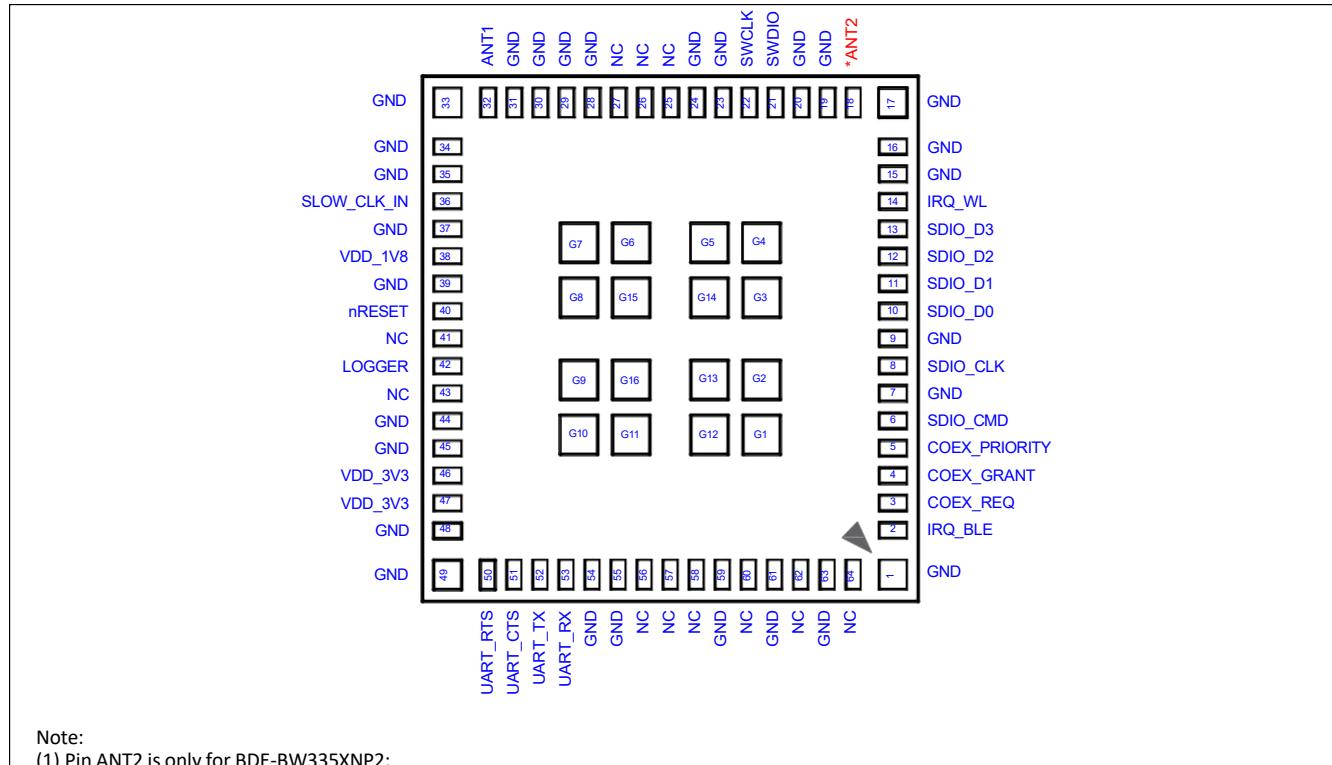

**Figure 4. Pin Diagram of BDE-BW335XNP1 and BDE-BW335XNP2 (Top View)**

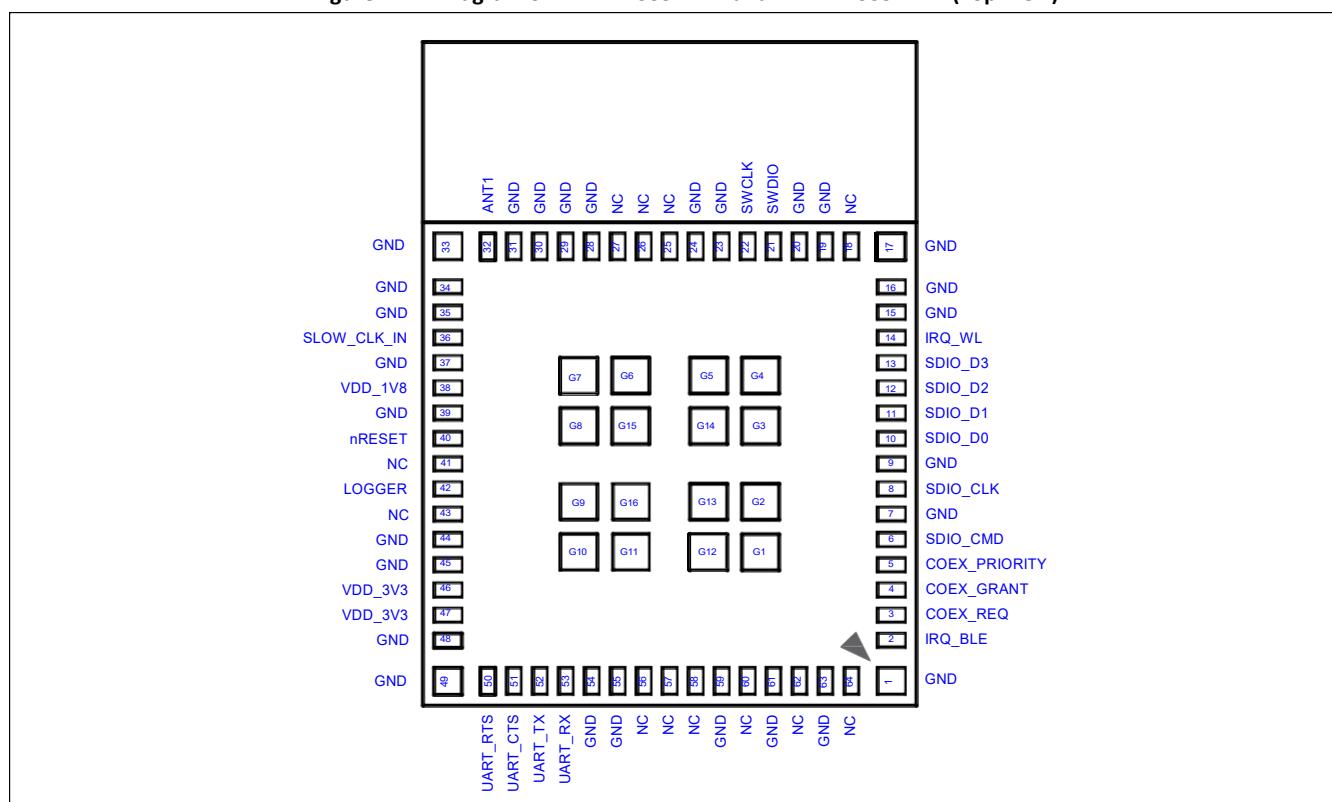

**Figure 5. Pin Diagram of BDE-BW335XUP1 and BDE-BW335XUP2 (Top View)**

## 2.2. Pinout Description

Table 2. Pinout Description

Module Pin #	Pin Name	Type	Voltage Level	Shutdown State <sup>(1)</sup>	State After Power-up <sup>(1)</sup>	Description
1	GND	Ground	-	-	-	Power ground
2	IRQ_BLE <sup>(2)</sup>	O	VDD_1V8	PD	PD	Interrupt request to host for BLE (in shared SDIO mode)
3	COEX_REQ	I	VDD_1V8	PU	PU	External coexistence interface – request
4	COEX_GRANT	O	VDD_1V8	PD	PD	External coexistence interface – grant
5	COEX_PRIORITY	I	VDD_1V8	PU	PU	External coexistence interface – priority
6	SDIO_CMD	I/O	VDD_1V8	Hi-Z	Hi-Z	SDIO command or SPI PICO
7	GND	Ground	-	-	-	Power ground
8	SDIO_CLK	I	VDD_1V8	Hi-Z	Hi-Z	SDIO clock or SPI clock
9	GND	Ground	-	-	-	Power ground
10	SDIO_D0	I/O	VDD_1V8	Hi-Z	Hi-Z	SDIO data D0 or SPI POCI
11	SDIO_D1	I/O	VDD_1V8	Hi-Z	Hi-Z	SDIO data D1
12	SDIO_D2	I/O	VDD_1V8	Hi-Z	Hi-Z	SDIO data D2
13	SDIO_D3	I/O	VDD_1V8	Hi-Z	PU	SDIO data D3 or SPI CS
14	IRQ_WL <sup>(2)</sup>	O	VDD_1V8	PD	PD	Interrupt request to host for WLAN
15	GND	Ground	-	-	-	Power ground
16	GND	Ground	-	-	-	Power ground
17	GND	Ground	-	-	-	Power ground
18	ANT2	RF	-	-	-	Secondary antenna for antenna diversity, only for BDE-BW335XNP2
	NC	-	-	-	-	No connect for other variants except for BDE-BW335XNP2
19	GND	Ground	-	-	-	Power ground
20	GND	Ground	-	-	-	Power ground
21	SWDIO	I/O	VDD_1V8	PU	PU	Serial wire debug I/O
22	SWCLK	I	VDD_1V8	PD	PD	Serial wire debug clock
23	GND	Ground	-	-	-	Power ground
24	GND	Ground	-	-	-	Power ground
25	NC	-	-	-	-	No connect
26	NC	-	-	-	-	No connect
27	NC	-	-	-	-	No connect
28	GND	Ground	-	-	-	Power ground
29	GND	Ground	-	-	-	Power ground
30	GND	Ground	-	-	-	Power ground
31	GND	Ground	-	-	-	Power ground
32	ANT1	RF	-	-	-	Bluetooth Low Energy and WLAN 2.4-GHz & 5-GHz port
33	GND	Ground	-	-	-	Power ground
34	GND	Ground	-	-	-	Power ground
35	GND	Ground	-	-	-	Power ground
36	SLOW_CLK_IN	I	VDD_1V8	PD	PD	32.768-KHz RTC clock input
37	GND	Ground	-	-	-	Power ground
38	VDD_1V8	Power	-	-	-	1.8V power supply for SRAM, digital, analog, I/O, and programming
39	GND	Ground	-	-	-	Power ground
40	nRESET	I	VDD_1V8	PU	PU	Reset line for enabling or disabling device (active low)
41	NC	-	-	-	-	No connect
42	LOGGER <sup>(2)</sup>	O	VDD_1V8	PU	PU	Tracer (UART TX debug logger)
43	NC	-	-	-	-	No connect
44	GND	Ground	-	-	-	Power ground
45	GND	Ground	-	-	-	Power ground
46	VDD_3V3	Power	-	-	-	3.3V power supply for PA
47						
48	GND	Ground	-	-	-	Power ground
49	GND	Ground	-	-	-	Power ground
50	UART_RTS	O	VDD_1V8	PU	PU	UART RTS signal - flow control for BLE HCI
51	UART_CTS	I	VDD_1V8	PU	PU	UART CTS signal - flow control for BLE HCI
52	UART_TX	O	VDD_1V8	PU	PU	UART TX for BLE HCI
53	UART_RX	I	VDD_1V8	PU	PU	UART RX for BLE HCI
54	GND	Ground	-	-	-	Power ground
55	GND	Ground	-	-	-	Power ground
56	NC	-	-	-	-	No connect
57	NC	-	-	-	-	No connect
58	NC	-	-	-	-	No connect

Module Pin #	Pin Name	Type	Voltage Level	Shutdown State <sup>(1)</sup>	State After Power-up <sup>(1)</sup>	Description
59	GND	Ground	-	-	-	Power ground
60	NC	-	-	-	-	No connect
61	GND	Ground	-	-	-	Power ground
62	NC	-	-	-	-	No connect
63	GND	Ground	-	-	-	Power ground
64	NC	-	-	-	-	No connect
G1 – G16	GND	Ground	-	-	-	Power ground, thermal pads

**Note:**

---

(1) All digital I/Os are with internal PU/PD according to the "shutdown state" column when the device is in shutdown mode (with the exception of SDIO signals are Hi-Z). PU means pull-up, PD means pull-down, Hi-Z means high impedance;  
(2) LOGGER and IRQ\_WL pins are sensed by the device during boot. They should be kept "10" state on power-up with LOGGER pin being high.

---

## 3. Characteristics

### 3.1. Electrical Characteristics

#### 3.1.1. Absolute Maximum Ratings

Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only, so functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specification are not implied. Exposure to Absolute Maximum Rating conditions for extended periods may affect device reliability.

**Table 3. Absolute Maximum Ratings**

Parameter	MIN	MAX	Unit
VDD_3V3	-0.5	4.2	V
VDD_1V8	-0.5	2.1	V
Operating ambient temperature	-40	105	°C
Storage temperature	-40	105	°C

#### 3.1.2. ESD Ratings

**Table 4. ESD Ratings**

Parameter	Description	Value	Unit	Note
Electrostatic discharge	Contact discharge	4000	V	As per EN 301-489
	Air discharge	8000	V	As per EN 301-489

#### 3.1.3. Recommended Operating Conditions

**Table 5. Recommended Operating Conditions**

Parameter	MIN	TYP	MAX	Unit
VDD_3V3	3	3.3	3.6	V
VDD_1V8	1.62	1.8	1.98	V
Operating ambient temperature	-40		85	°C
Operating ambient temperature (-IN variants)	-40		105 (1)	°C

**Note:**

(1) -IN variants module may operate at temperature of up to 105 °C. This allows the device to be used reliably in applications that may be exposed to higher ambient temperature over certain periods of the product's life. At temperatures higher than 85 °C, the WLAN/BLE performance may degrade.

#### 3.1.4. I/O DC Characteristics

**Table 6. I/O DC Characteristics**

Parameter	Description	Test Condition	MIN	TYP	MAX	Unit
V <sub>IH</sub>	High level input voltage		0.65 x VDD_1V8		VDD_1V8	V
V <sub>IL</sub>	Low level input voltage		0		0.35 x VDD_1V8	V
V <sub>OH</sub>	High level output voltage	At 4mA	VDD_1V8 – 0.45		VDD_1V8	V
V <sub>OL</sub>	Low level output voltage	At 4mA	0		0.45	V

#### 3.1.5. Power Consumption

The measurement is made with the evaluation module (EM board) BDE-BW33PN-EM at room temperature, unless otherwise noted.

Table 7. Current Consumption – WLAN 2.4-GHz Static Modes

Parameter	Test Condition	Supply	TYP	Unit
Continuous TX <sup>(1)</sup>	1 DSSS	VDD_1V8	100	mA
		VDD_3V3	210	
	6 OFDM	VDD_1V8	105	
		VDD_3V3	220	
	54 OFDM	VDD_1V8	100	
		VDD_3V3	178	
	HT MCS0	VDD_1V8	107	
		VDD_3V3	214	
	HT MCS7	VDD_1V8	105	
		VDD_3V3	165	
HE MCS0	TX power = 20 dBm	VDD_1V8	105	mA
		VDD_3V3	215	
HE MCS7	TX power = 20 dBm	VDD_1V8	100	mA
		VDD_3V3	188	
Continuous RX		VDD_1V8	62	
		VDD_3V3	0	

Note:

(1) Peak current VDD\_3V3 can hit 340mA during device calibration; Peak current VDD\_1V8 of 185mA including peripherals and internal cortex.

Table 8. Current Consumption – WLAN 2.4-GHz Use Cases

Mode	Description	TYP	Unit
DTIM = 1	System with 3.3V to Ext. DC/DC at 85% efficiency WLAN beacon reception every DTIM=1 (~102ms)	637	μA
	System with 1.8V WLAN beacon reception every DTIM=1 (~102ms)	980	
DTIM = 3	System with 3.3V to Ext. DC/DC at 85% efficiency WLAN beacon reception every DTIM=1 (~102ms)	371	μA
	System with 1.8V WLAN beacon reception every DTIM=1 (~102ms)	570	
DTIM = 5	System with 3.3V to Ext. DC/DC at 85% efficiency WLAN beacon reception every DTIM=1 (~102ms)	319	
	System with 1.8V WLAN beacon reception every DTIM=1 (~102ms)	490	

Table 9. Current Consumption – WLAN 5-GHz Static Modes

Parameter	Test Condition	Supply	TYP	Unit
Continuous TX	6 OFDM	VDD_1V8	170	mA
		VDD_3V3	250	
	54 OFDM	VDD_1V8	175	
		VDD_3V3	190	
	HT MCS0	VDD_1V8	175	
		VDD_3V3	250	
	HT MCS7	VDD_1V8	175	
		VDD_3V3	190	
	HE MCS0	VDD_1V8	170	
		VDD_3V3	250	
Continuous RX		VDD_1V8	175	
		VDD_3V3	190	
		VDD_1V8	110	
		VDD_3V3	0	

Note:

(2) Peak current VDD\_3V3 can hit 450mA during device calibration; Peak current VDD\_1V8 of 300mA including peripherals and internal cortex.

Table 10. Current Consumption – WLAN 5-GHz Use Cases

Mode	Description	TYP	Unit
DTIM = 1	System with 3.3V to Ext. DC/DC at 85% efficiency WLAN beacon reception every DTIM=1 (~102ms)	735	μA
	System with 1.8V WLAN beacon reception every DTIM=1 (~102ms)	1130	
DTIM = 3	System with 3.3V to Ext. DC/DC at 85% efficiency WLAN beacon reception every DTIM=1 (~102ms)	390	μA
	System with 1.8V WLAN beacon reception every DTIM=1 (~102ms)	600	
DTIM = 5	System with 3.3V to Ext. DC/DC at 85% efficiency WLAN beacon reception every DTIM=1 (~102ms)	340	
	System with 1.8V WLAN beacon reception every DTIM=1 (~102ms)	520	

**Table 11. Current Consumption – BLE Static Modes**

Parameter	Test Condition	Supply	TYP	Unit
TX, max duty cycle	TX power = 0 dBm	VDD_1V8	104	mA
		VDD_3V3	40	
	TX power = 10 dBm	VDD_1V8	100	
		VDD_3V3	98	
	TX power = 20 dBm	VDD_1V8	105	
		VDD_3V3	220	
RX		VDD_1V8	62	μA
		VDD_3V3	0	

**Table 12. Current Consumption – Device States**

Mode	Description	Supply	TYP	Unit
Shutdown	External supplies are available, device held in reset (nRESET is low)	VDD_1V8	10	μA
		VDD_3V3	2	
Sleep	Low power mode – RAM in retention	VDD_1V8	330	μA
		VDD_3V3	2	

### 3.1.6. Fast Clock Characteristics

The fast clock running at 40-MHz for WLAN/BLE functions is included in the module. The specification is shown in below table.

**Table 13. 40-MHz Crystal Oscillator (HFXT) Characteristics**

Parameter	Test Condition	MIN	TYP	MAX	Unit
Crystal frequency			40		MHz
ESR, Equivalent series resistance				20	Ω
Frequency tolerance	T <sub>A</sub> : 25°C	-10		+10	ppm
Frequency stability	T <sub>A</sub> : -40°C ~ 85°C/105°C <sup>(1)</sup>	-30		+30	ppm
C <sub>L</sub> , Crystal load capacitance			8		pF

**Note:**

(1) -IN variants can support up to 105 °C.

### 3.1.7. External Slow Clock Requirements

The slow clock running at 32.768-KHz for low power modes is not included in the module. The slow clock can be generated internally or externally. The external slow clock requirements are listed in below table.

**Table 14. External 32.768-KHz Slow Clock Requirements**

Parameter	Description	MIN	TYP	MAX	Unit
Crystal frequency	Square wave		32768		Hz
Frequency accuracy	Initial + temperature + aging	-250		+250	ppm
Input duty cycle		30	50	70	%
Rise and fall time	10% to 90% (rise) and 90% to 10% (fall) of digital signal level			100	ns
Input low level		0		0.35 x VDD_1V8	V
Input high level		0.65 x VDD_1V8		1.95	V
Input impedance		1			MΩ
Input capacitance				5	pF

### 3.1.8. Power Supply Sequencing

For proper operation of the module, perform the recommended power-up sequencing as follows:

1. VDD\_3V3 and VDD\_1V8 must be available before nRESET is released;
2. For an external slow clock, ensure that the clock is stable before nRESET is deasserted (high);
3. The nRESET pin should be held low for at least 10 us after stabilization of the external power supplies.

### 3.1.9. SDIO Timing Characteristics

SDIO is the main host interfaces for WLAN, and it supports a maximum clock rate of 52-MHz. The module also supports shared SDIO interface for both BLE and WLAN.

The timing diagram for default speed and high speed SDIO are as follows:

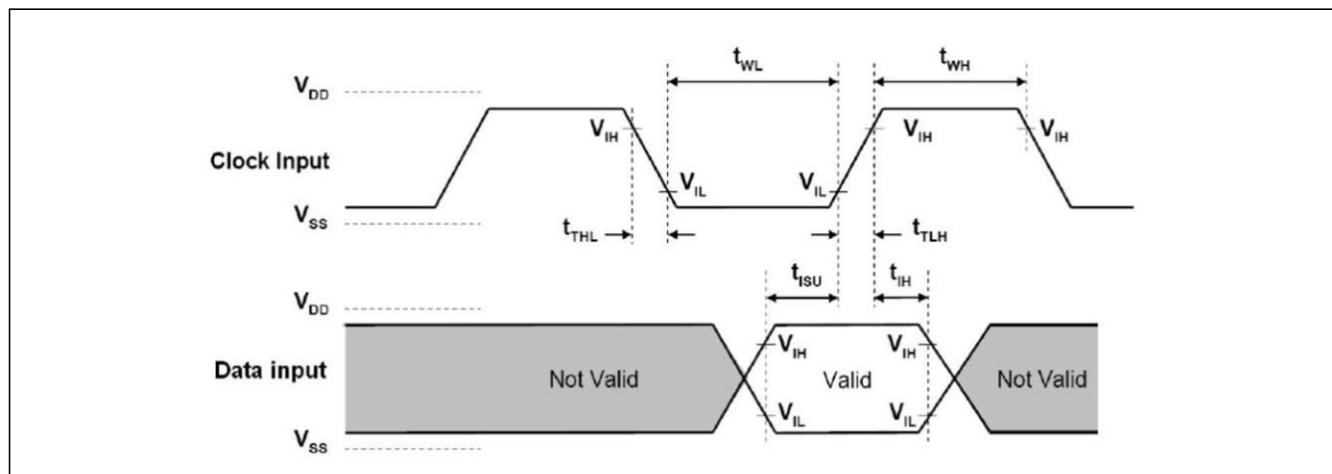


Figure 6. SDIO Default Input Timing

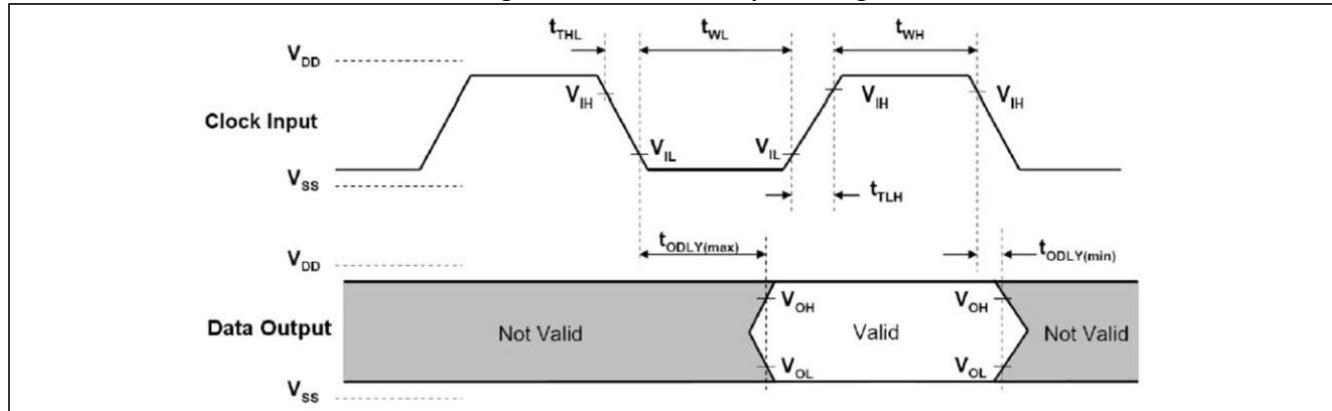


Figure 7. SDIO Default Output Timing

Table 15. SDIO Timing Parameters - Default Speed

Parameter	Description	MIN	MAX	Unit
$t_{clock}$	Clock frequency, CLK		26	MHz
$t_{High}$	High period	10		ns
$t_{Low}$	Low period	10		
$t_{TLH}$	Rise time, CLK		10	
$t_{THL}$	Fall time, CLK		10	
$t_{ISU}$	Setup time, input valid before CLK $\uparrow$	5		
$t_{IH}$	Hold time, input valid after CLK $\uparrow$	5		
$t_{ODLY}$	Delay time, CLK $\downarrow$ to output valid	2	14	
$C_L$	Capacitive load on outputs	15	40	pF

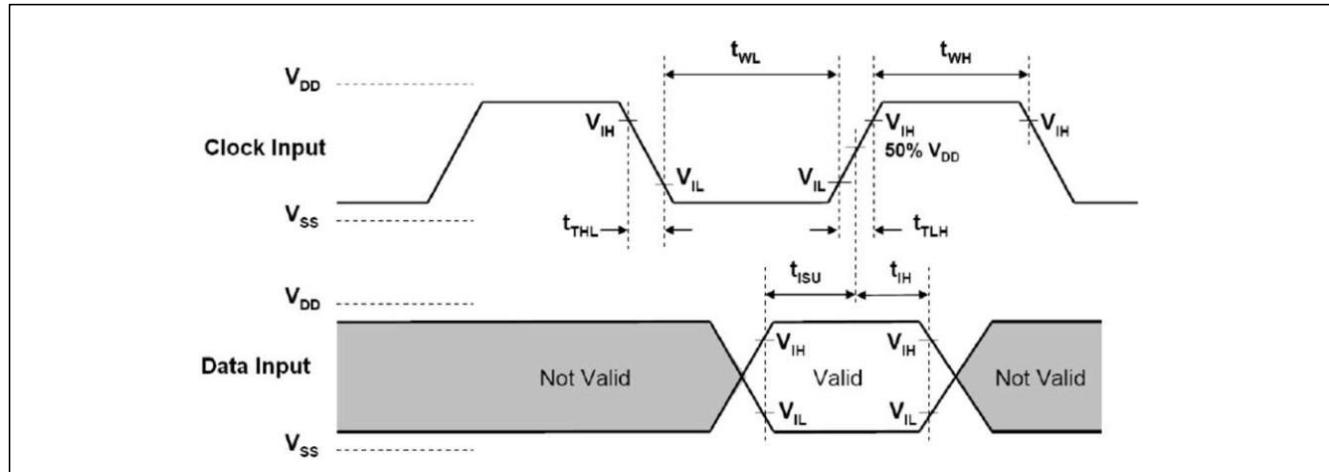


Figure 8. SDIO High Speed Input Timing

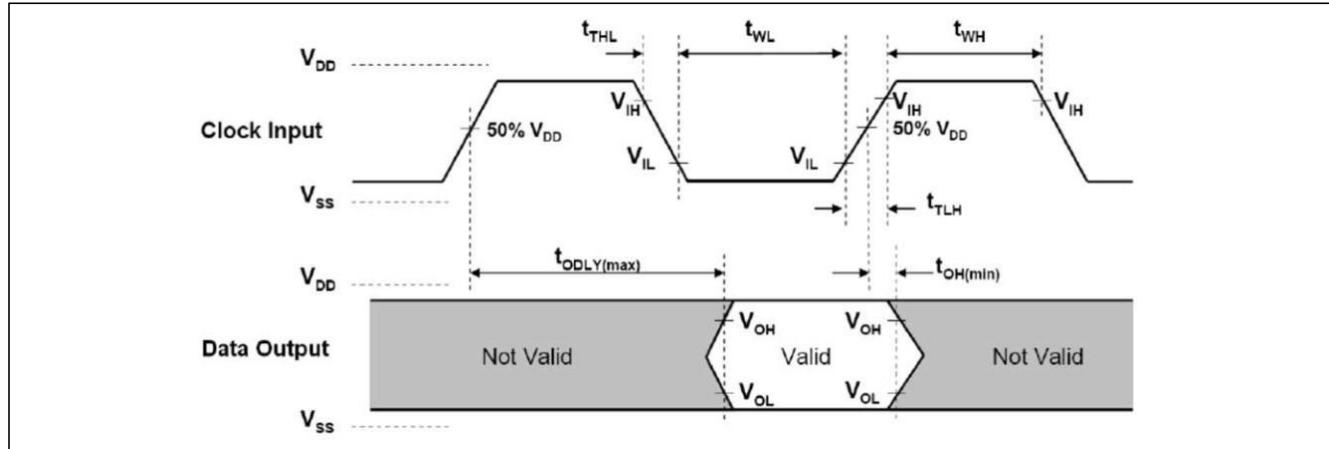


Figure 9. SDIO High Speed Output Timing

Table 16. SDIO Timing Parameters - High Speed

Parameter	Description	MIN	MAX	Unit
$t_{clock}$	Clock frequency, CLK		52	MHz
$t_{High}$	High period	7		ns
$t_{Low}$	Low period	7		
$t_{TLH}$	Rise time, CLK		3	
$t_{THL}$	Fall time, CLK		3	
$t_{ISU}$	Setup time, input valid before CLK $\uparrow$	6		
$t_{IH}$	Hold time, input valid after CLK $\uparrow$	2		
$t_{ODLY}$	Delay time, CLK $\downarrow$ to output valid	2	14	
$C_L$	Capacitive load on outputs	15	40	pF

### 3.1.10. SPI Timing Characteristics

SPI is another host interface for WLAN. The module also supports shared SPI interface for both BLE and WLAN.

The timing diagram for SPI is as follows:

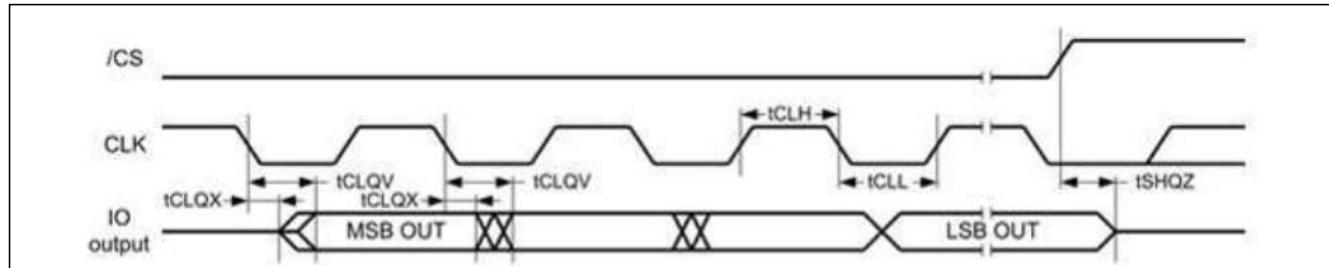


Figure 10. SDIO Default Input Timing

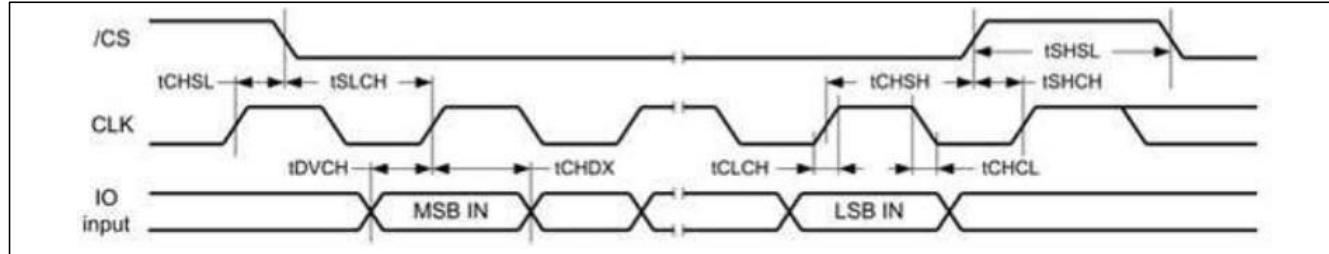


Figure 11. SPI Output Timing

Table 17. SPI Timing Parameters

Parameter	Description	MIN	MAX	Unit
$t_{clock}$	Clock frequency, CLK		26	MHz
$t_{High}$	High period	10		
$t_{Low}$	Low period	10		
$t_{TLH}$	Rise time, CLK		3	
$t_{THL}$	Fall time, CLK		3	
$t_{CSU}$	CS setup time, CS valid before CLK $\uparrow$	3		
$t_{ISU}$	PICO, input valid before CLK $\uparrow$	3		
$t_{IH}$	PICO Hold time, input valid after CLK $\uparrow$	3		
$t_{Df, t_{Df}}$ - Active	Delay time, CLK $\uparrow/\downarrow$ to output valid	2	10	
$t_{Df, t_{Df}}$ - Sleep	Delay time, CLK $\uparrow/\downarrow$ to output valid		12	
$C_L$	Capacitive load on outputs	15	40	pF

### 3.1.11. UART 4-Wire Interface

UART is the main host interface for BLE, which supports host controller interface (HCI) transport layer.

Table 18. UART Timing Parameters

Parameter	Description	MIN	TYP	MAX	Unit
Baud rate	Clock frequency, CLK	37.5		4364	kbps
Baud rate accuracy per byte	Receive/Transmit	-2.5		+1.5	%
Baud rate accuracy per bit	Receive/Transmit	-12.5		+12.5	%
CTS low to TX_DATA on		0	2		ms
CTS high to TX_DATA off	Hardware flow control			1	Byte
CTS high pulse width		1			bit
RTS low to RX_DATA on		0	2		ms
RTS high to RX_DATA off	Interrupt set to 1/4 FIFO			16	Byte

## 3.2. RF Characteristics

### 3.2.1. WLAN Performance: 2.4-GHz Receiver Characteristics

Table 19. WLAN Performance: 2.4-GHz Receiver Characteristics

Parameter	Test Condition	MIN	TYP	MAX	Unit
Operational frequency range		2412		2472	MHz
Sensitivity: 8% PER for 11b rates, 10% PER for 11g/n/ax rates	1 DSSS		-98		dBm
	2 DSSS		-95		
	11 DSSS		-90		
	6 OFDM		-93		
	54 OFDM		-75		
	HT MCS0 MM 4K		-93		

Parameter	Test Condition	MIN	TYP	MAX	Unit
Maximum input level: 8% PER for 11b rates, 10% PER for 11g/n/ax rates	HT MCS7 MM 4K		-72		dBm
	HE MCS0 4K		-92		
	HE MCS7 4K		-72		
Adjacent channel rejection	1 DSSS	0			dB
	6 OFDM, HT MCS0, HE MCS0	0			
	54 OFDM, HT MCS7, HE MCS7		-9		
	1 DSSS	45			
	2 DSSS	39			
	11 DSSS	20			
	6 OFDM	3			
RSSI accuracy		-90 dBm to -30 dBm	-3	3	dB

### 3.2.2. WLAN Performance: 5-GHz Receiver Characteristics

Table 20. WLAN Performance: 5-GHz Receiver Characteristics

Parameter	Test Condition	MIN	TYP	MAX	Unit
Sensitivity: 10% PER for 11g/n/ax rates	Operational frequency range	5180		5845	MHz
	6 OFDM		-93		dBm
	54 OFDM		-75		
	HT MCS0 MM 4K		-93		
	HT MCS7 MM 4K		-73		
	HE MCS0 4K		-92		
	HE MCS7 4K		-73		
Adjacent channel rejection	6 OFDM, HT MCS0, HE MCS0		-23		dB
	54 OFDM, HT MCS7, HE MCS7		-24		
	6 OFDM	20			
	54 OFDM	3			
	HT MCS0	18			
	HT MCS7	0			
	HE MCS0	16			
RSSI accuracy		-90 dBm to -30 dBm	-3	3	dB

### 3.2.3. WLAN Performance: 2.4-GHz Transmitter Characteristics

Table 21. WLAN Performance: 2.4-GHz Transmitter Power

Parameter	Test Condition	MIN	TYP	MAX	Unit
Output power at VDD_3V3 = 3.3 V	Operational frequency range	2412		2472	MHz
	1 DSSS		20.5		dBm
	6 OFDM		20.2		
	54 OFDM		17.4		
	HT MCS0 MM 4K		20.2		
	HT MCS7 MM 4K		17.4		
	HE MCS0 4K		20.2		
RSSI accuracy		-90 dBm to -30 dBm	-3	3	dB

#### Note:

(1) The output power is measured at frequency 2437MHz.

### 3.2.4. WLAN Performance: 5-GHz Transmitter Characteristics

Table 22. WLAN Performance: 5-GHz Transmitter Power

Parameter	Test Condition	MIN	TYP	MAX	Unit
Output power at VDD_3V3 = 3.3 V	Operational frequency range	5180		5845	MHz
	6 OFDM		19.5		dBm
	54 OFDM		15		
	HT MCS0		19.5		
	HT MCS7		15		
	HE MCS0		19.5		
	HE MCS7		15		

**Note:**

(2) The output power is measured at frequency 5580MHz.

### 3.2.5. BLE Performance: Receiver Characteristics

**Table 23. BLE Performance: 2.4-GHz Receiver Characteristics**

Parameter	Test Condition	MIN	TYP	MAX	Unit
<b>BLE 125Kbps (LE Coded) Receiver Characteristics</b>					
Receiver sensitivity	PER <30.8%		-102		
Receiver saturation	PER <30.8%		0		dBm
Co-channel rejection <sup>(1)</sup>	Wanted signal at -79 dBm, modulated interferer in channel		10		
Selectivity, $\pm 1$ MHz <sup>(1)</sup>	Wanted signal at -79 dBm, modulated interferer at $\pm 1$ MHz		0 / 0 <sup>(2)</sup>		
Selectivity, $\pm 2$ MHz <sup>(1)</sup>	Wanted signal at -79 dBm, modulated interferer at $\pm 2$ MHz		-37 / -30 <sup>(2)</sup>		
Selectivity, $\pm 3$ MHz <sup>(1)</sup>	Wanted signal at -79 dBm, modulated interferer at $\pm 3$ MHz		-39 / -36 <sup>(2)</sup>		
Selectivity, $\pm 4$ MHz <sup>(1)</sup>	Wanted signal at -79 dBm, modulated interferer at $\pm 4$ MHz		-45 / -41 <sup>(2)</sup>		
RSSI accuracy	-90 dBm to -20 dBm	-4		4	
<b>BLE 500Kbps (LE Coded) Receiver Characteristics</b>					
Receiver sensitivity	PER <30.8%		-99		
Receiver saturation	PER <30.8%		0		dBm
Co-channel rejection <sup>(1)</sup>	Wanted signal at -72 dBm, modulated interferer in channel		10		
Selectivity, $\pm 1$ MHz <sup>(1)</sup>	Wanted signal at -72 dBm, modulated interferer at $\pm 1$ MHz		0 / 0 <sup>(2)</sup>		
Selectivity, $\pm 2$ MHz <sup>(1)</sup>	Wanted signal at -72 dBm, modulated interferer at $\pm 2$ MHz		-35 / -25 <sup>(2)</sup>		
Selectivity, $\pm 3$ MHz <sup>(1)</sup>	Wanted signal at -72 dBm, modulated interferer at $\pm 3$ MHz		-40 / -37 <sup>(2)</sup>		
Selectivity, $\pm 4$ MHz <sup>(1)</sup>	Wanted signal at -72 dBm, modulated interferer at $\pm 4$ MHz		-45 / -40 <sup>(2)</sup>		
RSSI accuracy	-90 dBm to -20 dBm	-4		4	
<b>BLE 1Mbps (LE 1M) Receiver Characteristics</b>					
Receiver sensitivity	PER <30.8%, 37-byte packets		-99		
Receiver sensitivity	PER <30.8%, 255-byte packets		-98		
Receiver saturation	PER <30.8%		0		dBm
Co-channel rejection <sup>(1)</sup>	Wanted signal at -67 dBm, modulated interferer in channel		10		
Selectivity, $\pm 1$ MHz <sup>(1)</sup>	Wanted signal at -67 dBm, modulated interferer at $\pm 1$ MHz		0 / 0 <sup>(2)</sup>		
Selectivity, $\pm 2$ MHz <sup>(1)</sup>	Wanted signal at -67 dBm, modulated interferer at $\pm 2$ MHz		-35 / -28 <sup>(2)</sup>		
Selectivity, $\pm 3$ MHz <sup>(1)</sup>	Wanted signal at -67 dBm, modulated interferer at $\pm 3$ MHz		-38 / -32 <sup>(2)</sup>		
Selectivity, $\pm 4$ MHz <sup>(1)</sup>	Wanted signal at -67 dBm, modulated interferer at $\pm 4$ MHz		-45 / -40 <sup>(2)</sup>		
Out-of-band blocking	30 MHz to 2000 MHz, wanted signal at -67 dBm		-23		
Out-of-band blocking	2003 MHz to 2399 MHz, wanted signal at -67 dBm		-30		
Out-of-band blocking	2484 MHz to 2997 MHz, wanted signal at -67 dBm		-30		
Out-of-band blocking	3000 MHz to 6 GHz, wanted signal at -67 dBm		-21		
Intermodulation	Wanted signal at 2402 MHz, -64 dBm, two interferers at 2405 and 2408 MHz respectively, at the given power level		-40		
RSSI accuracy	-90 dBm to -20 dBm	-4		4	dB
<b>BLE 2Mbps (LE 2M) Receiver Characteristics</b>					
Receiver sensitivity	PER <30.8%, 37-byte packets		-95		
Receiver saturation	PER <30.8%		0		dBm
Co-channel rejection <sup>(1)</sup>	Wanted signal at -67 dBm, modulated interferer in channel		10		
Selectivity, $\pm 2$ MHz <sup>(1)</sup>	Wanted signal at -67 dBm, modulated interferer at $\pm 1$ MHz		0 / 0 <sup>(2)</sup>		
Selectivity, $\pm 4$ MHz <sup>(1)</sup>	Wanted signal at -67 dBm, modulated interferer at $\pm 2$ MHz		-35 / -28 <sup>(2)</sup>		
Selectivity, $\pm 6$ MHz <sup>(1)</sup>	Wanted signal at -67 dBm, modulated interferer at $\pm 3$ MHz		-35 / -28 <sup>(2)</sup>		
Alternate channel rejection, $\pm 8$ MHz <sup>(1)</sup>	Wanted signal at -67 dBm, modulated interferer at $\pm 8$ MHz		-37 / -32 <sup>(2)</sup>		
Out-of-band blocking	30 MHz to 2000 MHz, wanted signal at -67 dBm		-23		
Out-of-band blocking	2003 MHz to 2399 MHz, wanted signal at -67 dBm		-30		
Out-of-band blocking	2484 MHz to 2997 MHz, wanted signal at -67 dBm		-30		
Out-of-band blocking	3000 MHz to 6 GHz, wanted signal at -67 dBm		-21		
Intermodulation	Wanted signal at 2402 MHz, -64 dBm, two interferers at 2405 and 2408 MHz respectively, at the given power level		-44		
RSSI accuracy	-90 dBm to -20 dBm	-4		4	dB

**Note:**

(1) Numbers given as C/I dB;

(2) X / Y, where X is +N MHz and Y is -N dB;

### 3.2.6. BLE Performance: Transmitter Characteristics

Table 24. BLE Performance: Transmitter Characteristics

Parameter	Test Condition	MIN	TYP Peak Power	TYP Average Power	MAX	Unit
Operational frequency range		2402	20		2480	MHz
Output power	Highest setting		20			dBm

**Note:**

(1) The output power is measured at frequency 2440MHz.

## 4. Mechanical Specifications

### 4.1. Module Dimensions

The module dimensions are shown in following figures:

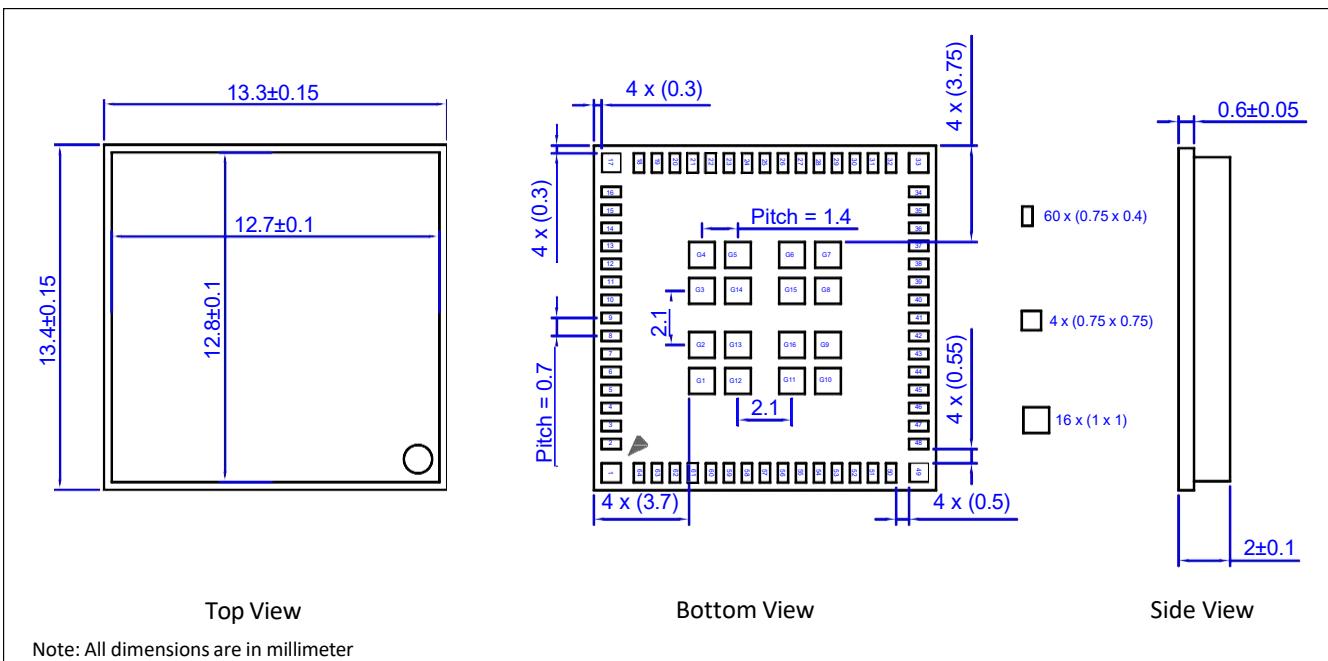


Figure 12. Mechanical Drawing of BDE-BW335XNP1 and BDE-BW335XNP2

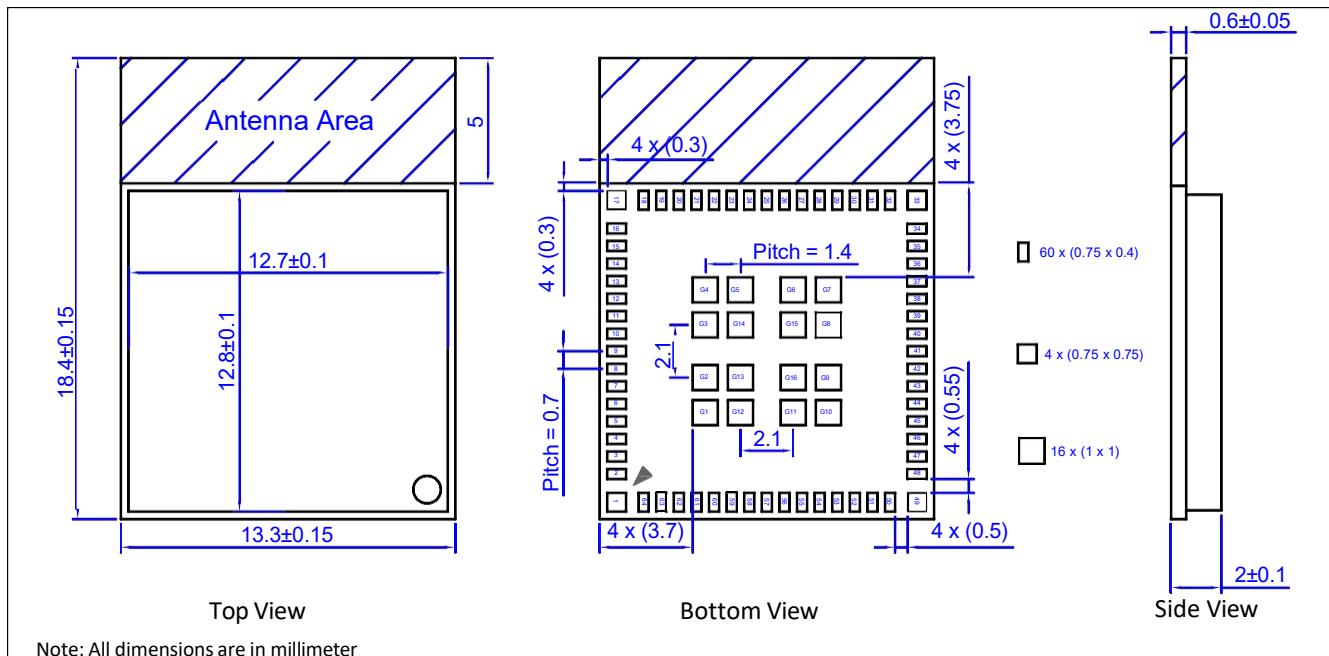


Figure 13. Mechanical Drawing of BDE-BW335XUP1 and BDE-BW335XUP2

## 4.2. PCB Footprints

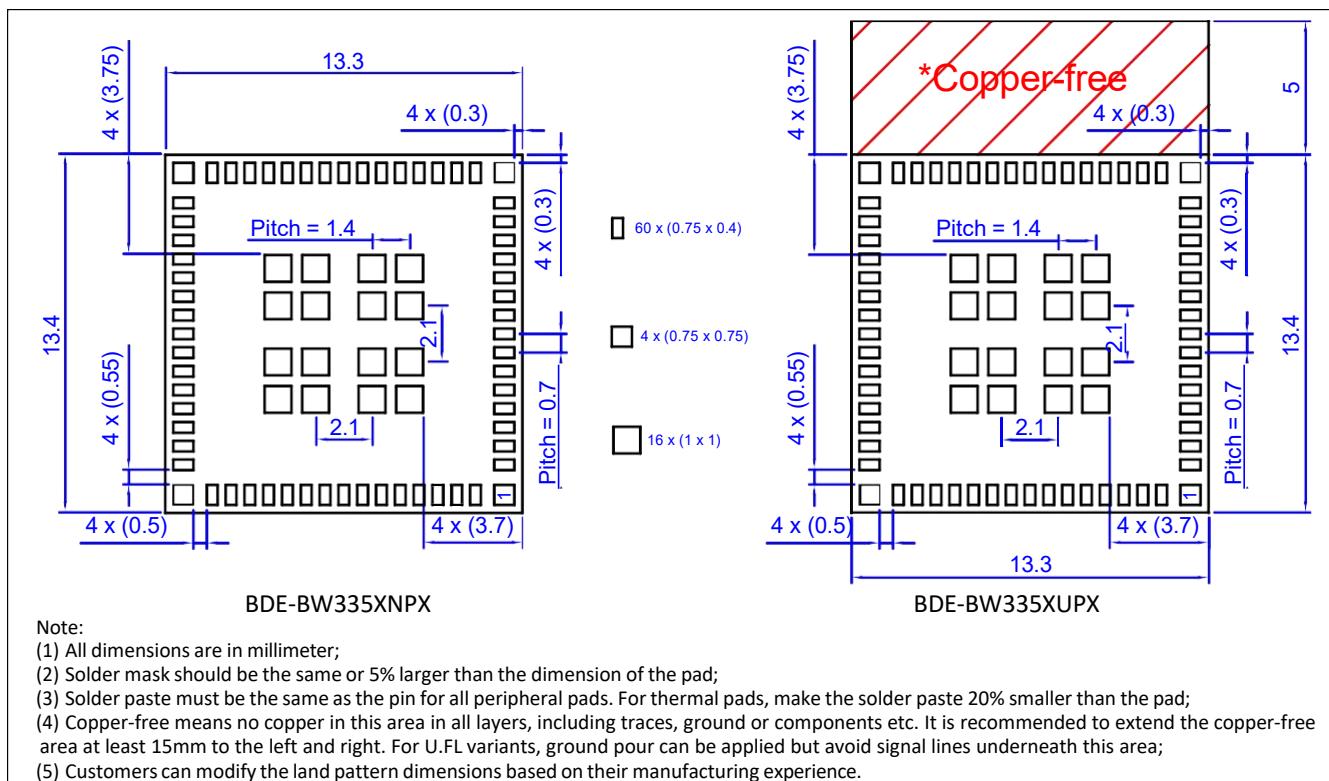


Figure 14. Recommended Footprint Drawings

### 4.3. U.FL Connector Specification

The drawing and specification of the U.FL connector utilized in the module is as below for reference.

The dimension unit in below drawing is millimeter.

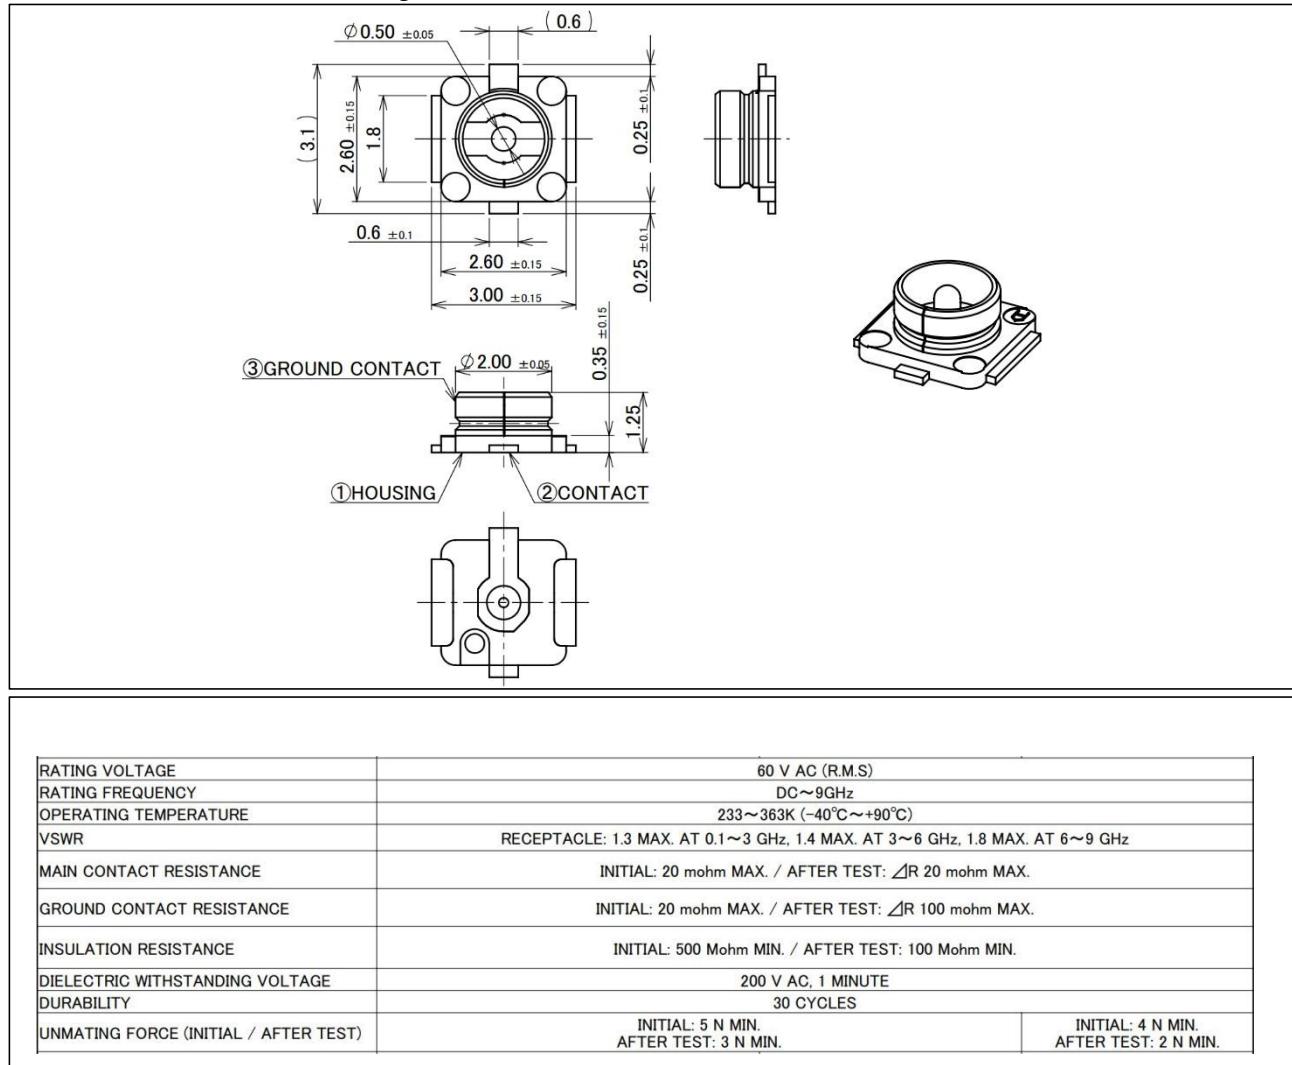


Figure 15. U.FL Connector Drawing and Specification

## 5. Integration Guideline

### 5.1. System Diagram

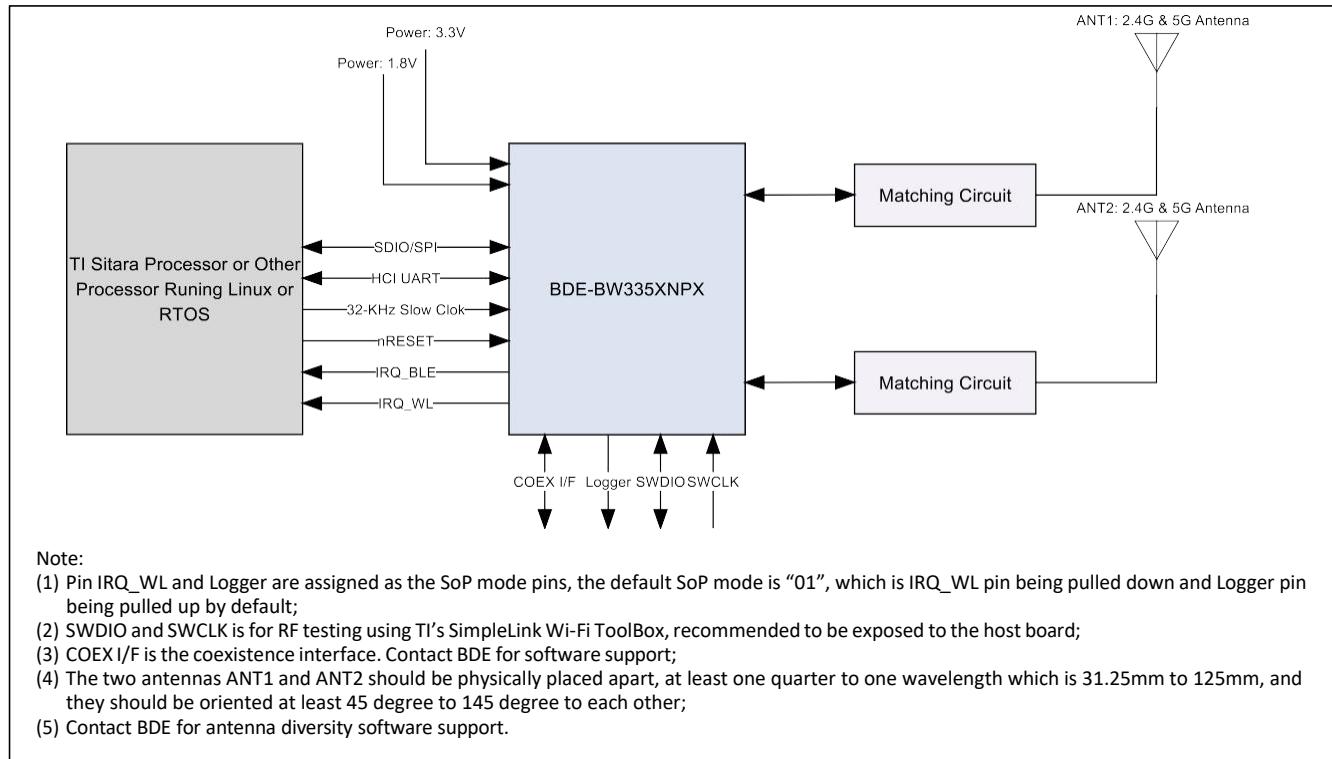
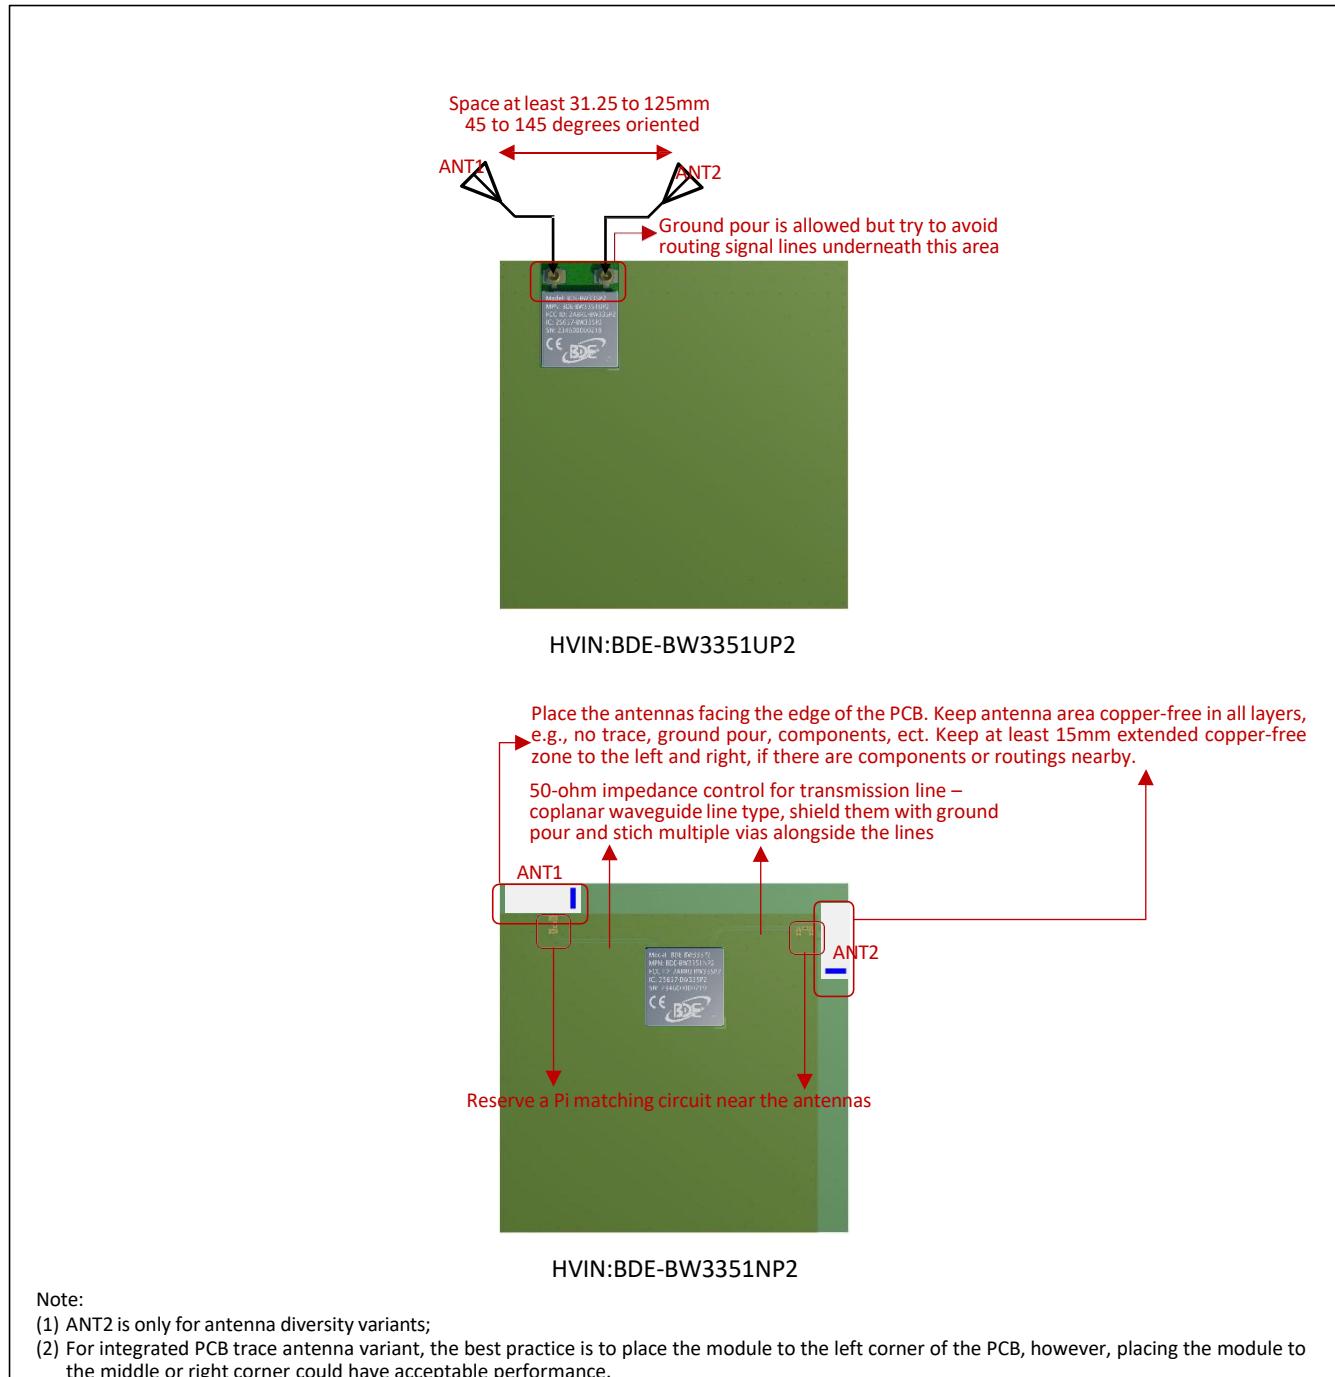


Figure 16. High-Level System Block Diagram

### 5.2. Module Placement

The placement of the module in the base board is critical in your design. Improper placement can lead to poor antenna performance. BDE recommend following below practical placement to achieve acceptable antenna performance.

Any form of proximity to the metal or other material will change/degrade the antenna performance. Keep the antenna area as far as possible to the metal material in any direction. If metal materials cannot be avoided in your design for example the design with metal enclosure, we recommended keep the antenna area at least 40mm distance to the enclosure in all directions. Customers should verify the communication range with the mock-up or real product prototype on their own.


**Figure 17. Recommended Module Placement**

### 5.3. Reference Design

For reference schematic and layout, please refer to the design files of BDE-33PN-EM and BDE-33PA-EM.

### 5.4. Other Design Considerations

**Table 25. Other Design Considerations**

Thermal	
1	The proximity of ground vias must be close to each ground pad of the module.
2	Signal traces must not be run underneath the module on the layer where the module is mounted.
3	Have a complete ground pour in layer 2 for thermal dissipation.
4	Have a solid ground plane and ground vias under the module for stable system and thermal dissipation.
5	Increase the ground pour in the first layer and have all of the traces from the first layer on the inner layers, if possible.
6	Signal traces can be run on a third layer under the solid ground layer, which is below the module mounting layer.
RF Trace and Antenna Routing	
7	The RF trace antenna feed must be as short as possible beyond the ground reference. At this point, the trace starts to radiate.
8	The RF trace bends must be gradual with an approximate maximum bend of 45° with trace mitered. RF traces must not have sharp corners.
9	RF traces must have via stitching on the ground plane beside the RF trace on both sides.
10	RF traces must have constant impedance (50-ohm Coplanar or microstrip transmission line).
11	For best results, the RF trace ground layer must be the ground layer immediately below the RF trace. The ground layer must be solid.
12	There must be no traces or ground under the antenna section.
13	RF traces must be as short as possible. The antenna, RF traces, and modules must be on the edge of the PCB product. The proximity of the antenna to the enclosure and the enclosure material must also be considered.
14	BDE recommends using double-shielded coaxial RF cable to connect with the U.FL connector with antenna if the U.FL variants are selected.
15	Do not place or run the RF cable right above or below the module.
16	If there are some other radios besides this module in the system, try to place them apart as far as possible. And ensure there is at least 25 dB isolation between the antenna port of every radio.
Supply and Interface	
17	The power trace for VDD_3V3 must be at least 40-mil wide.
18	The VDD_1V8 trace must be at least 18-mil wide.
19	Make VDD_3V3 and VDD_1V8 traces as wide as possible to ensure reduced inductance and trace resistance.
20	If possible, shield 3V3 and 1V8 traces with ground above, below, and beside the traces.
21	SDIO signals traces (CLK, CMD, DO, 01,02, and 03) must be routed in parallel to each other and as short as possible (less than 12 cm). In addition, every trace length must be the same as the others. There should be enough space between traces- greater than 1.5 times the trace width or ground- to ensure signal quality, especially for the SDIO_CLK trace. Remember to keep these traces away from the other digital or analog signal traces. It is recommended adding ground shielding around these buses.
22	SDIO and digital clock signals are a source of noise. Keep the traces of these signals as short as possible. If possible, maintain a clearance around them.

## 6. Handling Instructions

The module is the surface mount module with LGA footprint. It is designed to conform to the major manufacturing guidelines, including the commercial, industrial manufacturing process.

In this section, we will cover the basic shipping information, including the module markings, packaging, labeling, etc. And also, the instructions on how to handle the module in terms of storage, assembly and so on.

### 6.1. Module Marking

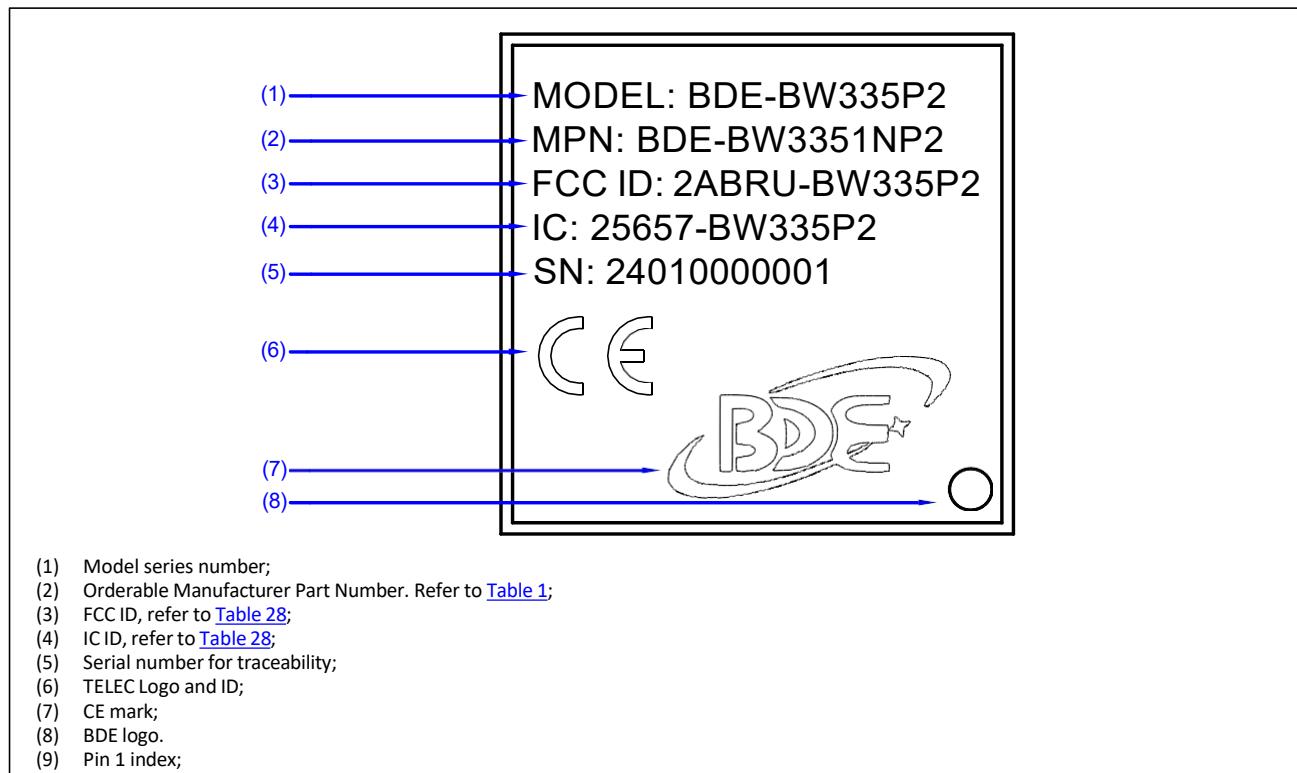


Figure 18. Module Marking

## 6.2. Packaging Information

### 6.2.1. Tape and Reel Package Information

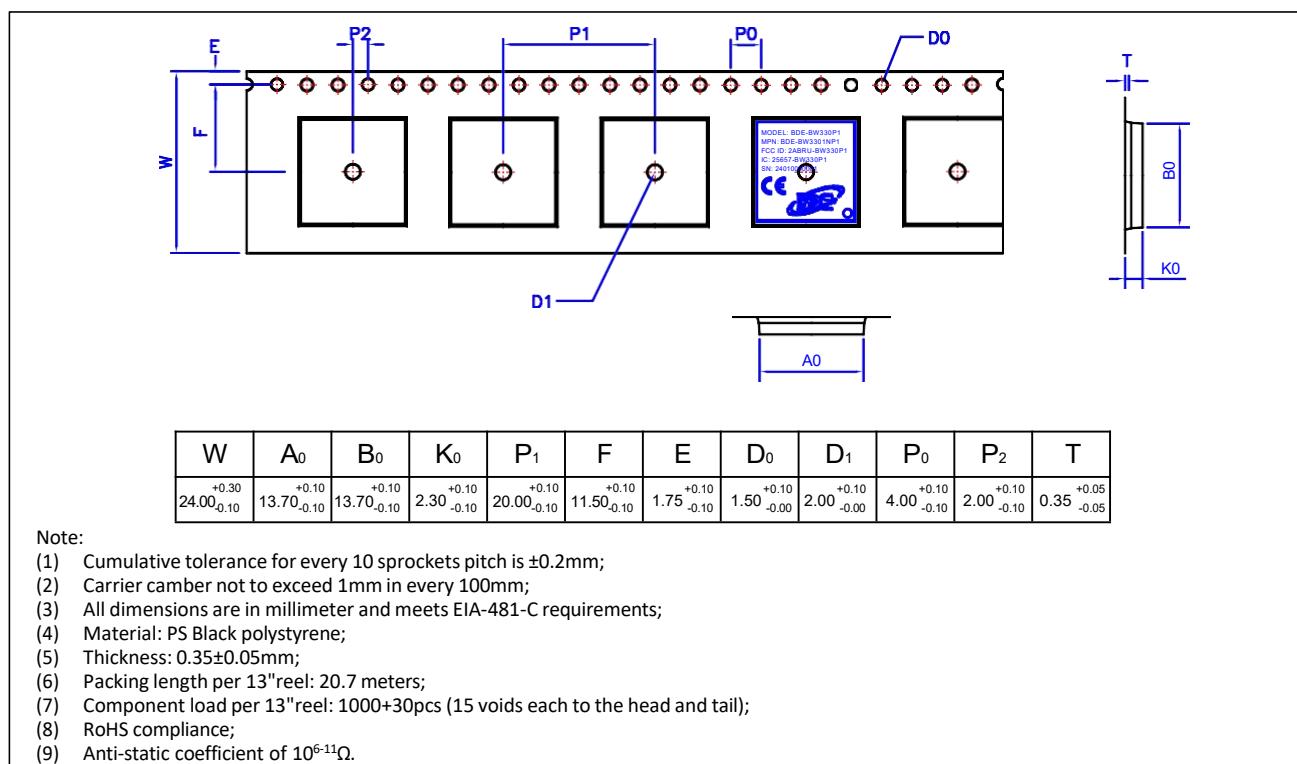


Figure 19. Carrier Tape Drawing for BDE-BW335XNPX variants

## BDE-BW335P2

BDE Dual Band (2.4 and 5GHz) Wi-Fi 6 & BLE Combo Module

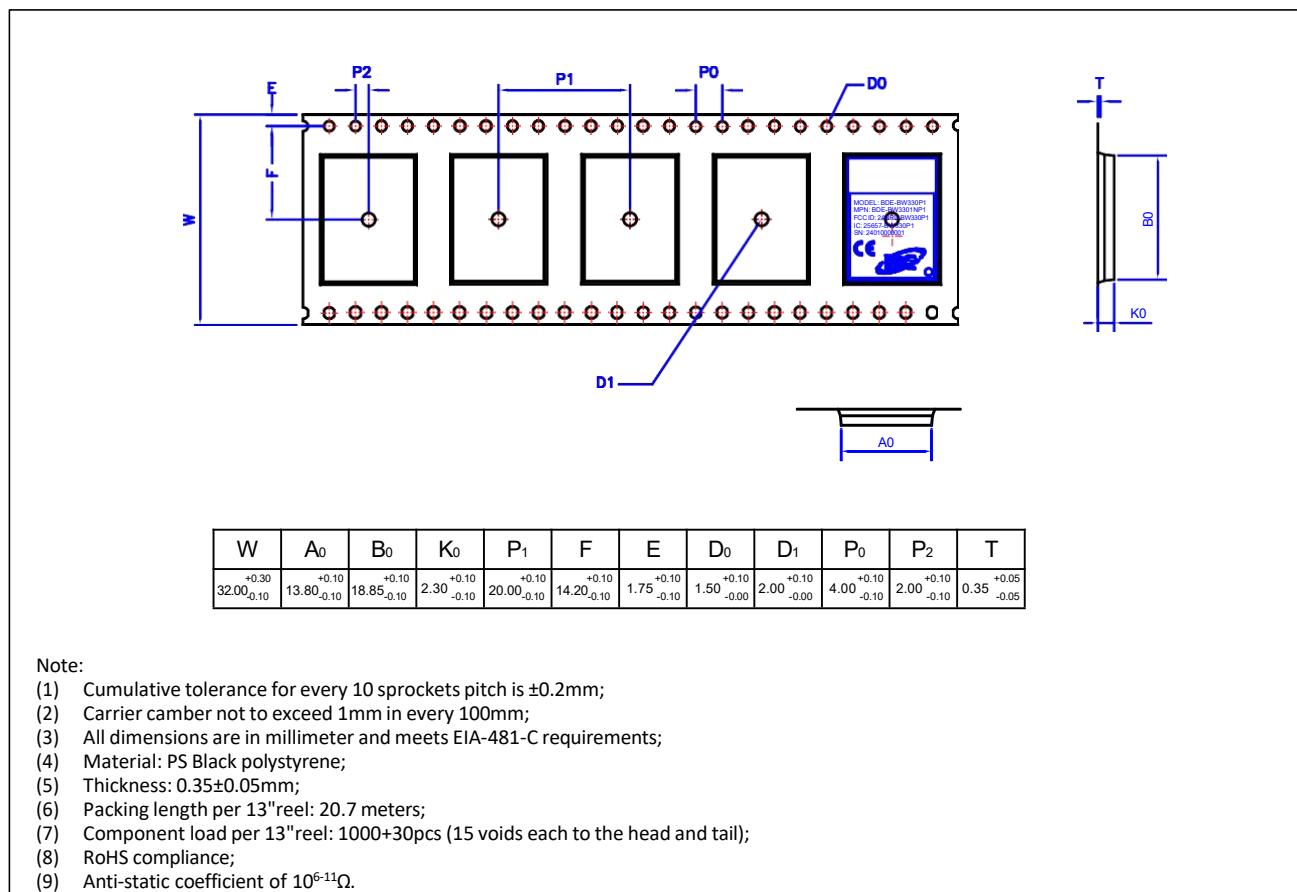


Figure 19. Carrier Tape Drawing for BDE-BW335XUPX variants

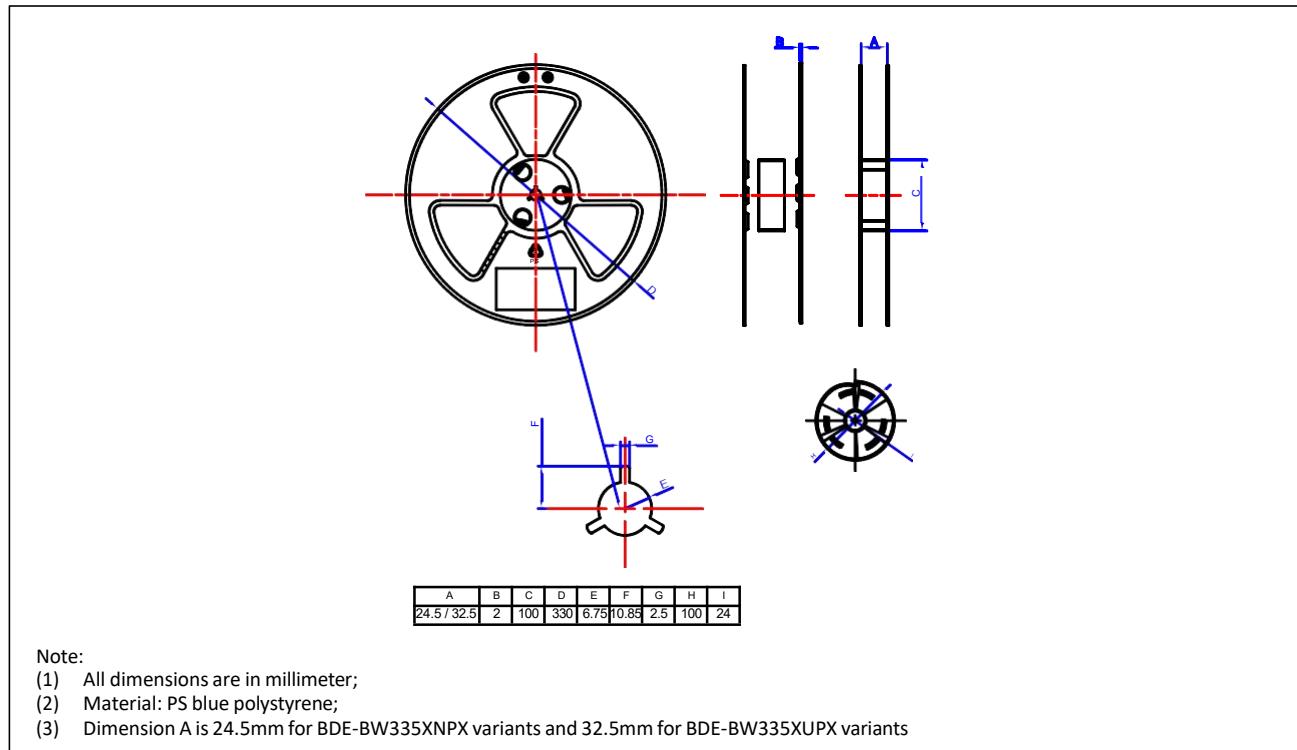


Figure 20. 13-INch Reel Drawing

## 6.2.2. Carton Information and Labeling

TBD


## 6.3. Assembly Instruction

### 6.3.1. Moisture Sensitive Level

The MSL (Moisture Sensitive Level) of the module is MSL-3. Handling guidelines are listed as below:

- (1) The floor life for MSL-3 device is 168 hours in ambient environment 30°C/60%RH. Before assembly, make sure to check if the modules are packaged with desiccate and humidity indicator card;
- (2) After the bag is opened, make sure to mount the modules within 168 hours at factory conditions (< 30°C/60% RH) or stored at <10% RH. Repackage is needed with new desiccate and humidity indicator card if the modules are not mounted before exceeding floor life;
- (3) If the card reads >10%, or the modules have been exposed for over 168 hours, the modules need to be baked before mounted. Recommended baking condition is 125°C for 8 hours.

### 6.3.2. Reflow Profile

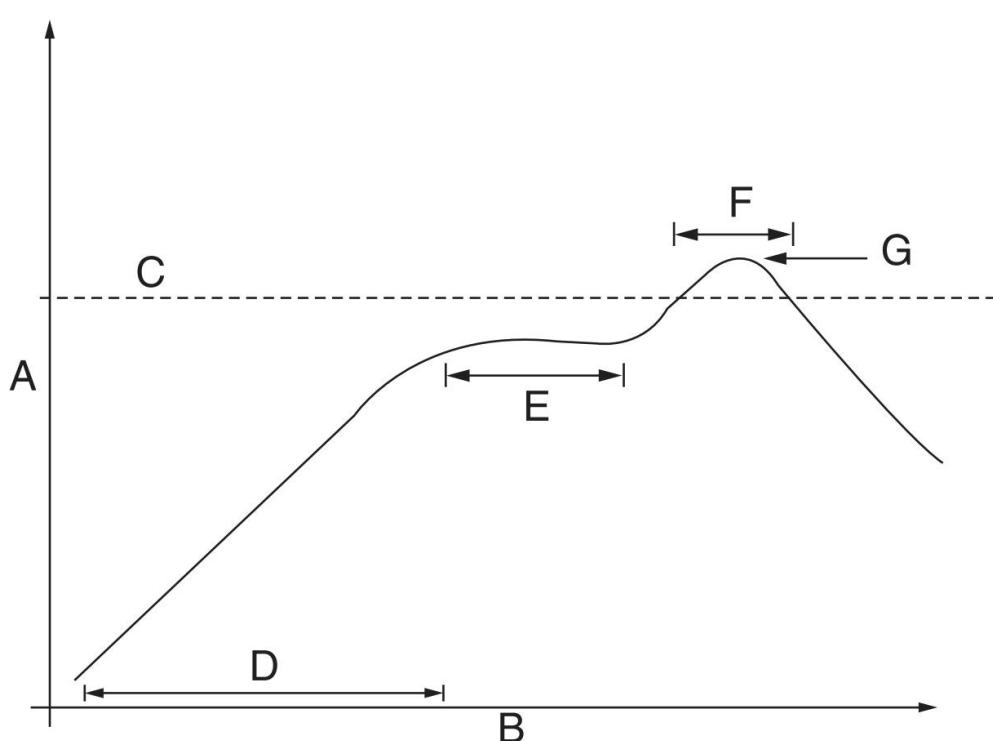

Note:

- A – Temperature
- B – Time
- C – Alloy liquidus temperature
- D – Preheat slope = temperature ramp rate
- E – Preheat dwell = soak time
- F – Time above liquidus
- G – Peak temperature = maximum assembly temperature

Figure 21. Thermal Profile Schematic

**Table 26. Reflow Profile Parameters<sup>(1)(3)</sup>**

Item	Temperature Range	Ramp Rate / Time
D, preheat zone	30°C ~ 175°C	2°C ~ 4°C per second
E, soak zone	150°C ~ 200°C	60 ~ 120 seconds
C, Alloy liquidus temperature	217°C ~ 220°C	-
F, reflow zone	230°C ~ 245°C	60 ~ 90 seconds
G, target maximum reflow temperature	250°C	-
Absolute peak temperature <sup>(2)</sup>	260°C	-

**Note:**

(1) This is for Pb-free (SAC 305) paste. Different pastes require different profiles for optimum performance, so it is important to consult the paste manufacturer before developing the solder profile;

(2) Exceed the absolute peak temperature for certain period, e.g. 20s might damage the device or affect the reliability;

(3) It is recommended that the modules do not go through the reflow process more than one time.

### 6.3.3. Other Consideration

(1) Ultrasonic cleaning process is discouraged for the modules as the process might damage the module permanently, especially for the crystal oscillator in the module.

(2) Conformal coating is not allowed to this module. It will impact the reliability of the module once the coating flooded into the shield.

## 7. Certification

### 7.1. Bluetooth Qualification

#### 7.1.1. Bluetooth Qualification Information

The module series is listed on the Bluetooth SIG website as a qualified End Product, referencing a Controller and Host Subsystem combination. The detail information can be found in below table.

**Table 27. Bluetooth Qualification Information**

Declaration ID	Reference QDID	
D067335	Controller Subsystem	229129
	Host Subsystem	TBD

#### 7.1.2. Bluetooth Qualification Process

Below Bluetooth qualification process is provided for customers when they are listing their end product referencing BDE module.

- (1) Go to <https://launchstudio.bluetooth.com/> and log in;
- (2) Select **Start the Bluetooth Qualification Process with No Required Testing**;
- (3) Project Basics:
  - (a) Enter your project name, it can be the product name or the product series name;
  - (b) Enter QDID that the product reference, in this case the QDID is 229129 for controller subsystem and .TBD for host subsystem.
- (4) Product Declaration:
  - (a) Select the listing date. You can select a date that you want your product listed and go public, although the qualification will complete immediately after your submission.

(b) Add every product that integrated with this module. You can add a series of individual product models that use the same design/module without any modification.

(5) Declaration ID:  
(a) Select a DID. If you don't have one, you need to purchase a DID for your product by clicking Pay Declaration Fee.

(6) Review and Submit:  
(a) Review all information that you have entered and make sure no mistakes;  
(b) Tick all check boxes if you confirmed above information and add your name to the signature page;  
(c) Click **Signature Confirmed – Complete Project & Submit Product(s) for Qualification**.

(7) The qualification will be done immediately and your product will be listed to the Bluetooth SIG website as per your required listed date in step (4).

For more information about listing your product to Bluetooth SIG, please visit below webpage:

<https://www.bluetooth.com/develop-with-bluetooth/qualification-listing/>

## 7.2. Regulatory Compliance

The module is certified for FCC, IC/ISED and ETSI/CE as listed in below table. More regions can be cover by request.

**Table 28. Certification Information**

Regulatory Body / Region	ID	MPN
FCC (USA)	2ABRU-BW335P2	BDE-BW3351NP2 BDE-BW3351UP2
IC/ISED (Canada)	25657-BW335P2	BDE-BW3350NP2 BDE-BW3350UP2
TELEC (Japan)	XXX-XXXXXX	BDE-BW3351NP2-IN BDE-BW3351UP2-IN
ETSI/CE (Europe)	NA	BDE-BW3350NP2-IN BDE-BW3350UP2-IN

### 7.2.1. Certified Antennas

The module series has been tested and certified with three antennas, where BDE-BW335XAP1 variants utilize an integrated PCB trace antenna and BDE-BW335XUPX variants utilize an external whip antenna through U.FL connector and BDE-BW335XNPX utilize a ceramic chip antenna utilized in the EM board through the dedicated ANT pin of the module.

The characteristic of the four antennas is listed in below table.

**Table 29. Certified Antenna List**

Antenna Type	Manufacturer	MPN	Frequency Range (MHz)	Note
Chip antenna	Ethertronics	M830520	2400 – 2500; 5150 – 5850	External
PCB trace antenna	BDE	BDE-ANT-BW33P2	2400 – 2500; 5150 – 5850	External
FPC antenna	BDE	BDE-FPC25-4017-120F1	2400 – 2500; 5150 – 5850	External
Whip antenna	BDE	BDE-W25-17010-HRP	2400 – 2500; 5150 – 5850	External
Chip antenna	Pulse	W3006	2400 – 2500; 5150 – 5850	External

Customers are encouraged to use the certified antennas in the case of external antenna options to reduce certification testing effort and risk of failing. If customer want to choose another antenna that fits their product, there are some scenarios that need to be considered.

If the external antenna is of the same antenna type and of equal or less gain compared to the ones listed in above table, and with similar in-band and out-of-band characteristic, then the antenna can be used with the module in USA and Canada where modular approval is applicable, as long as the spot-check testing of the new antenna with host is performed to verified that it will not change the performance. However, in countries such as EU countries applying the ETSI standards where the modular approval is not applicable, the radiated emissions are always tested with the end product with any antennas.

## BDE-BW335P2

BDE Dual Band (2.4 and 5GHz) Wi-Fi 6 & BLE Combo Module

If the external antenna is of a different type or with non-similar in-band and out-of-band characteristic, but still has equal gain or less gain compared to the above listed antennas. The new antenna can be added to the existing modular grant/certificate by filing a permissive change, C2PC (Class II Permissive Change) in case of FCC and ISED. The radiated emission testing is needed, but re-certification is not required.

In the case of the external antenna with higher gain than the peak gain listed in above table are very likely to require a full new end product certification. However, we recommended that you consult with your certification house to understand the correct approaches for your product case by case.

For the case where customer choose the certified antenna with BDE-BW335XNPX through the dedicated ANT pin of the module, the customer must copy the design exactly as the one that tested in the certification to comply with the requirement.

## 7.2.2. FCC Caution

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

### **Radiation Exposure Statement**

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. Country Code selection feature to be disabled for products marketed to the US/Canada.

This device is intended only for OEM integrators under the following conditions:

1. The antenna must be installed such that 20 cm is maintained between the antenna and users, and
2. The transmitter module may not be co-located with any other transmitter or antenna,
3. For all products market in US, OEM has to limit the operation channels in CH1 to CH11 for 2.4G band by supplied firmware programming tool. OEM shall not supply any tool or info to the end-user regarding to Regulatory Domain change. (if modular only test Channel 1-11)

As long as the three conditions above are met, further transmitter testing will not be required. However, the OEM integrator is still responsible for testing their end-product for any additional compliance requirements required with this module installed.

### **Important Note:**

In the event that these conditions cannot be met (for example certain laptop configurations or co-location with another transmitter), then the FCC authorization is no longer considered valid and the FCC ID cannot be used on the final product. In these circumstances, the OEM integrator will be responsible for re-evaluating the end product (including the transmitter) and obtaining a separate FCC authorization.

### **End Product Labeling**

The final end product must be labeled in a visible area with the following"

Contains FCC ID: 2ABRU-BW335P2 "

### **Manual Information to the End User**

The OEM integrator has to be aware not to provide information to the end user regarding how to install or remove this RF module in the user's manual of the end product which integrates this module.

The end user manual shall include all required regulatory information/warning as shown in this manual.

**Integration instructions for host product manufacturers according to KDB 996369 D03 OEM Manual v01r01****2.2 List of applicable FCC rules**

CFR 47 FCC PART 15 SUBPART C has been investigated. It is applicable to the modular transmitter

**2.3 Specific operational use conditions**

This module is stand-alone modular. If the end product will involve the Multiple simultaneously transmitting condition or different operational conditions for a stand-alone modular transmitter in a host, host manufacturer have to consult with module manufacturer for the installation method in end system.

**2.4 Limited module procedures**

Not applicable

**2.5 Trace antenna designs**

Not applicable

**2.6 RF exposure considerations**

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

**2.7 Antennas**

This radio transmitter **FCC ID:2ABRU-BW335P2** has been approved by Federal Communications Commission to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Internal/External Identification	Antenna type and antenna number	Operate frequency band	Maximum antenna gain	Notes
Antenna 1:	FPC Antenna	2402-2480 MHz 2404-2478 MHz	BT: 1.5dBi	Bluetooth Antenna
Antenna 1:	Ceramic Antenna 0	2402-2480 MHz 2404-2478 MHz	BT: 1.0dBi	Bluetooth Antenna
Antenna 1:	PCB Antenna	2402-2480 MHz 2404-2478 MHz	BT: 0.78dBi	Bluetooth Antenna
Antenna 1:	Dipole Antenna	2402-2480 MHz 2404-2478 MHz	BT: 2.7dBi	Bluetooth Antenna
Antenna 1:	Ceramic Antenna 1	2402-2480 MHz 2404-2478 MHz	BT: 2.2dBi	Bluetooth Antenna
Antenna 0: Antenna 1:	FPC Antenna	2412-2462 MHz 5180-5240 MHz 5725-5850 MHz	2.4G WIFI: 1.5dBi 5.2G WIFI: 2.9dBi 5.8G WIFI: 2.9dBi	2.4GWIFI /5G WIFI Antenna
Antenna 0: Antenna 1:	Ceramic Antenna 0	2412-2462 MHz 5180-5240 MHz 5725-5850 MHz	2.4G WIFI: 1.0dBi 5.2G WIFI: 2.6dBi 5.8G WIFI: 2.6dBi	2.4GWIFI /5G WIFI Antenna
Antenna 0: Antenna 1:	PCB Antenna	2412-2462 MHz 5180-5240 MHz 5725-5850 MHz	2.4G WIFI: 0.78dBi 5.2G WIFI: 1.41dBi 5.8G WIFI: 1.41dBi	2.4GWIFI /5G WIFI Antenna
Antenna 0: Antenna 1:	Dipole Antenna	2412-2462 MHz 5180-5240 MHz 5725-5850 MHz	2.4G WIFI: 2.7dBi 5.2G WIFI: 2.3dBi 5.8G WIFI: 2.3dBi	2.4GWIFI /5G WIFI Antenna
Antenna 0: Antenna 1:	Ceramic Antenna 1	2412-2462 MHz 5180-5240 MHz 5725-5850 MHz	2.4G WIFI: 2.2dBi 5.2G WIFI: 5.2dBi 5.8G WIFI: 5.2dBi	2.4GWIFI /5G WIFI Antenna

## BDE-BW335P2

BDE Dual Band (2.4 and 5GHz) Wi-Fi 6 & BLE Combo Module

### 2.8 Label and compliance information

The final end product must be labeled in a visible area with the following " Contains **FCC ID:2ABRU-BW335P2**".

### 2.9 Information on test modes and additional testing requirements

Host manufacturer is strongly recommended to confirm compliance with FCC requirements for the transmitter when the module is installed in the host.

### 2.10 Additional testing, Part 15 Subpart B disclaimer

Host manufacturer is responsible for compliance of the host system with module installed with all other applicable requirements for the system such as Part 15 B.

## 2.11 Note EMI Considerations

Host manufacture is recommended to use D04 Module Integration Guide recommending as "best practice" RF design engineering testing and evaluation in case non-linear interactions generate additional non-compliant limits due to module placement to host components or properties.

## 2.12 How to make changes

This module is stand-alone modular. If the end product will involve the Multiple simultaneously transmitting condition or different operational conditions for a stand-alone modular transmitter in a host, host manufacturer have to consult with module manufacturer for the installation method in end system. According to the KDB 996369 D02 Q&A Q12, that a host manufacture only needs to do an evaluation (i.e., no C2PC required when no emission exceeds the limit of any individual device (including unintentional radiators) as a composite. The host manufacturer must fix any failure.

## 7.2.3. ISED Statement

-English: This device complies with Industry Canada license - exempt RSS standard(s). Operation is subject to the following two conditions: (1) This device may not cause interference, and (2) This device must accept any interference, including interference that may cause undesired operation of the device.

The digital apparatus complies with Canadian CAN ICES - 3 (B)/NMB - 3(B).

- French: Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes: (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

l'appareil numérique du ciem conforme canadien peut - 3 (b) / nmb - 3 (b).

This device meets the exemption from the routine evaluation limits in section 6.3 of RSS 102 and compliance with RSS 102 RF exposure, users can obtain Canadian information on RF exposure and compliance.

cet appareil est conforme à l'exemption des limites d'évaluation courante dans la section 6.3 du cnr - 102 et conformité avec rss 102 de l'exposition aux rf, les utilisateurs peuvent obtenir des données canadiennes sur l'exposition aux champs rf et la conformité.

This equipment complies with Canada radiation exposure limits set forth for an uncontrolled environment.

Cet équipement est conforme Canada limites d'exposition aux radiations dans un environnement non contrôlé.

This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Cet équipement doit être installé et utilisé à une distance minimale de 20 cm entre le radiateur et votre corps.

### ISED Modular Usage Statement

NOTE 1: When the ISED certification number is not visible when the module is installed inside another device, then the outside of the device into which the module is installed must also display a label referring to the enclosed module. This exterior label can use the

wording " Contains transmitter module **IC: 25657-BW335P2**" or "Contains **IC: 25657-BW335P2**" .

NOTE 1: Lorsque le numéro de certification ISED n'est pas visible lorsque le module est installé dans un autre appareil, l'extérieur de l'appareil dans lequel le module est installé doit également afficher une étiquette faisant référence au module inclus. Cette étiquette extérieure peut être libellée Contient le module émetteur IC: 25657-BW335P2 ou Contient **IC: 25657-BW335P2**.

## 8. Ordering Information

**Table 30. Ordering Information**

Orderable Part Number	Description	Size (mm)	Shipping Form	MOQ
BDE-BW3351NP2	Wi-Fi 6 2.4-GHz & 5-GHz SISO & BLE 5.4, Dual Antenna Port with ANT Pin, -40 °C to +85 °C	13.3 x 13.4 x 2	Tape & Reel	1K
BDE-BW3351UP2	Wi-Fi 6 2.4-GHz & 5-GHz SISO & BLE 5.4, Dual Antenna Port with U.FL Connector, -40 °C to +85 °C	13.3 x 18.4 x 2	Tape & Reel	1K
BDE-BW3350NP2	Wi-Fi 6 2.4-GHz & 5-GHz SISO & BLE 5.4, Dual Antenna Port with ANT Pin, -40 °C to +85 °C	13.3 x 13.4 x 2	Tape & Reel	1K
BDE-BW3350UP2	Wi-Fi 6 2.4-GHz & 5-GHz SISO & BLE 5.4, Dual Antenna Port with U.FL Connector, -40 °C to +85 °C	13.3 x 18.4 x 2	Tape & Reel	1K
BDE-BW3351NP2-IN	Wi-Fi 6 2.4-GHz & 5-GHz SISO & BLE 5.4, Dual Antenna Port with ANT Pin, -40 °C to +105 °C	13.3 x 13.4 x 2	Tape & Reel	1K
BDE-BW3351UP2-IN	Wi-Fi 6 2.4-GHz & 5-GHz SISO & BLE 5.4, Dual Antenna Port with U.FL Connector, -40 °C to +105 °C	13.3 x 18.4 x 2	Tape & Reel	1K
BDE-BW3350NP2-IN	Wi-Fi 6 2.4-GHz & 5-GHz SISO & BLE 5.4, Dual Antenna Port with ANT Pin, -40 °C to +105 °C	13.3 x 13.4 x 2	Tape & Reel	1K
BDE-BW3350UP2-IN	Wi-Fi 6 2.4-GHz & 5-GHz SISO & BLE 5.4, Dual Antenna Port with U.FL Connector, -40 °C to +105 °C	13.3 x 18.4 x 2	Tape & Reel	1K

## 9. Revision History

**Table 31. Revision History**

Revision	Date	Description
V0.1	16-Dec-2022	Preliminary, draft
V0.2	13-Feb-2023	Updated pinout, added reference design
V0.3	29-Mar-2023	Added more information
V0.4	14-Jul-2023	Corrected some editorial mistakes, updated reference design
V0.5	30-Jan-2024	Added detailed information
V0.6	20-Mar-2024	Updated some data, corrected some mistakes

**Note:**

The latest datasheet can be found with this [Link](#).

## Important Notice and Disclaimer

The information contained herein is believed to be reliable. BDE makes no warranties regarding the information contained herein. BDE assumes no responsibility or liability whatsoever for any of the information contained herein. BDE assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for BDE products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

All module WIFI dual antennas do not support MINO

### Module difference declaration

In BDE-BW335P2 series, the difference between BDE-BW3351NP2 and BDE-BW3351UP2 is the antenna lead-in connector: BDE-BW3351NP2 is the bottom pad lead-in, which can be connected to an external antenna, and BDE-BW3351UP2 is the U.FL connector on the board, which can be connected to an external antenna;

The difference between the BDE-BW3351NP2-IN and BDE-BW3351UP2-IN models and the previous two models is that the models with -IN suffix can work in the temperature range of -40° ~ 105°, and the models without -IN suffix can work in the temperature range of -40° ~ 85°;

BDE-BW3350NP2, BDE-BW3350UP2, BDE-BW3350NP2-IN, BDE-BW3350UP2-IN differ from the previous four models by their names, and are mainly distinguished from the previous four models by the silk-screening on the shielding cover.

## Contact

### BDE Technology Inc.

USA: 67 E Madison St, # 1603A, Chicago, IL 60603, US

Tel: +1-312-379-9589

Website: <http://www.bdecomm.com> Email: [info@bdecomm.com](mailto:info@bdecomm.com)

China: B2-403, 162 Science Avenue, Huangpu District, Guangzhou 510663, China

Tel: +86-20-28065335

Website: <http://www.bdecomm.com> Email: [info@bdecomm.com](mailto:info@bdecomm.com)