





FCC Test Report

Report No.: AGC02390220401FE05

FCC ID : 2ABRU-WF3235

APPLICATION PURPOSE Original Equipment

PRODUCT DESIGNATION BDE Dual-Band WiFi MCU Module

BRAND NAME : BDE

BDE-WF3235SFA32, BDE-WF3235SFAU32,

MODEL NAME : BDE-WF3235SFN32, BDE-WF3235SA32,

BDE-WF3235SAU32, BDE-WF3235SN32

APPLICANT : Guangzhou BDE Technology Inc.

DATE OF ISSUE Aug. 26, 2022

STANDARD(S)

TEST PROCEDURE(S)

FCC Part 15.247

REPORT VERSION

ance (Shenzhen) Co., Ltd **A**ttestation of **G**lob





Page 2 of 105


REPORT REVISE RECORD

Rep	oort Version	Revise Time	Issued Date	Valid Version	Notes
	V1.0	/	Aug. 26, 2022	Valid	Initial Release




TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	5
2. GENERAL INFORMATION	6
2.1. PRODUCT DESCRIPTION	6
2.2. TABLE OF CARRIER FREQUENCYS	
2.3. IEEE 802.11N MODULATION SCHEME	8
2.4. RELATED SUBMITTAL(S) / GRANT (S)	8
2.5. TEST METHODOLOGY	8
2.6. SPECIAL ACCESSORIES	8
2.7. EQUIPMENT MODIFICATIONS	
2.8. ANTENNA REQUIREMENT	
3. MEASUREMENT UNCERTAINTY	11
4. DESCRIPTION OF TEST MODES	12
5. SYSTEM TEST CONFIGURATION	13
5.1. CONFIGURATION OF EUT SYSTEM	13
5.2. EQUIPMENT USED IN EUT SYSTEM	13
5.3. SUMMARY OF TEST RESULTS	13
6. TEST FACILITY	14
7. OUTPUT POWER	15
7.1. MEASUREMENT PROCEDURE	15
7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	15
7.3. LIMITS AND MEASUREMENT RESULT	16
8. BANDWIDTH	17
8.1. MEASUREMENT PROCEDURE	17
8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	17
8.3. LIMITS AND MEASUREMENT RESULTS	18
9. CONDUCTED SPURIOUS EMISSION	29
9.1. MEASUREMENT PROCEDURE	
9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
9.3. MEASUREMENT EQUIPMENT USEDJN	
9.4. LIMITS AND MEASUREMENT RESULT	29





10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY	41
10.1 MEASUREMENT PROCEDURE	41
10.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	41
10.3 MEASUREMENT EQUIPMENT USED	41
10.4 LIMITS AND MEASUREMENT RESULT	41
11. RADIATED EMISSION	47
11.1. MEASUREMENT PROCEDURE	
11.2. TEST SETUP	48
11.3. LIMITS AND MEASUREMENT RESULT	
11.4. TEST RESULT	49
12. LINE CONDUCTED EMISSION TEST	101
12.1. LIMITS OF LINE CONDUCTED EMISSION TEST	101
12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	101
12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	102
12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	102
12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	103
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	105
APPENDIX B: PHOTOGRAPHS OF EUT	105





1. VERIFICATION OF CONFORMITY

Applicant	Guangzhou BDE Technology Inc.		
Address	B2-403, Chuangyi Building, 162 Science Avenue, Huangpu District, Guangzhou		
Address	510663, China		
manufacturer	Guangzhou BDE Technology Inc.		
Address	B2-403, Chuangyi Building, 162 Science Avenue, Huangpu District, Guangzhou		
Address	510663, China		
Factory			
Address	B2-403, Chuangyi Building, 162 Science Avenue, Huangpu District, Guangzhou		
Address	510663, China		
Product Designation	BDE Dual-Band WiFi MCU Module		
Brand Name	BDE		
Test Model	BDE-WF3235SFA32		
Carina Madal	BDE-WF3235SFAU32, BDE-WF3235SFN32, BDE-WF3235SA32,		
Series Model	BDE-WF3235SAU32, BDE-WF3235SN32		
	BDE-WF3235SFA32, BDE-WF3235SA32 has a PCB antenna integrated, while		
	BDE-WF3235SFAU32, BDE-WF3235SAU32 has an U.FL connector on board		
	which can be connected to an external antenna, and BDE-WF3235SFN32,		
Declaration of Difference	BDE-WF3235SN32 has no antenna included but can be connected to an external		
Declaration of Difference	antenna through the application PCB. In addition, BDE-WF3235SFA32,		
	BDE-WF3235SFAU32, BDE-WF3235SFN32 has on-chip flash integrated, while		
	BDE-WF3235SA32, BDE-WF3235SAU32, BDE-WF3235SN32 has not. Otherwise,		
	they are the same.		
Date of test	Jun. 13, 2022 to Aug. 26, 2022		
Deviation No any deviation from the test method			
Condition of Test Sample	Normal		
Test Result Pass			
Report Template	AGCRT-US-BGN/RF		
•			

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.247.

Prepared By	Alan Duan	
_	Alan Duan (Project Engineer)	Aug. 26, 2022
Reviewed By	Calin Lin	
	Calvin Liu (Reviewer)	Aug. 26, 2022
Approved By	Max Zhang	
_	Max Zhang (Authorized Officer)	Aug. 26, 2022

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



Page 6 of 105

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

The EUT is designed as "BDE Dual-Band WiFi MCU Module". It is designed by way of utilizing the DSSS and OFDM technology to achieve the system operation.

A major technical description of EUT is described as following

Equipment Type	WLAN 2.4G
Frequency Band	2400MHz ~ 2483.5MHz
Operation Frequency	2412MHz ~ 2462MHz
Output Power (Average)	IEEE 802.11b:12.69dBm; IEEE 802.11g:12.81dBm;
Output Fower (Average)	IEEE 802.11n(HT20):11.73dBm
Output Power (Peak)	IEEE 802.11b:13.42dBm; IEEE 802.11g:18.33dBm;
Output I Ower (I eak)	IEEE 802.11n(HT20):17.15dBm
Modulation	802.11b:DQPSK, DBPSK, CCK
Wiodulation	802.11g/n: 64-QAM, 16-QAM, QPSK, BPSK
	802.11b: 1/2/5.5/11Mbps
Data Rate	802.11g: 6/9/12/18/24/36/48/54Mbps
	802.11n: up to 300Mbps
Number of channels	11
Hardware Version	1.2
Software Version	4.11
Antenna Designation	Refer to Chapter 2.9 of the report. (Comply with requirements of the FCC part 15.203)
Antenna Gain	Refer to Chapter 2.9 of the report.
Power Supply	DC 3.3V



Page 7 of 105

2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency
	1	2412 MHZ
	2	2417 MHZ
	3	2422 MHZ
	4	2427 MHZ
	5	2432 MHZ
2400~2483.5MHZ	6	2437 MHZ
	7	2442 MHZ
	8	2447 MHZ
	9	2452 MHZ
	10	2457 MHZ
	11	2462 MHZ

Note: For 20MHZ bandwidth system use Channel 1 to Channel 11.



Report No.: AGC02390220401FE05 Page 8 of 105

2.3. IEEE 802.11N MODULATION SCHEME

MCS Index	Nss	s Modulation	R	NBPSC	NCBPS		NDBPS		Data rate(Mbps) 800nsGl	
					20MHz	40MHz	20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0
6	1	64-QAM	3/4	6	312	648	234	489	58.5	121.5
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPSC	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	Guard interval

2.4. RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID**: **2ABRU-WF3235** filing to comply with the FCC Part 15 requirements.

2.5. TEST METHODOLOGY

KDB 558074 D01 15.247 Meas Guidance v05: Guidance for compliance measurements on Digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules

ANSI C63.10:2013: American National Standard for Testing Unlicensed Wireless Devices

2.6. SPECIAL ACCESSORIES

Refer to section 5.2.

2.7. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.



Page 9 of 105

2.8. ANTENNA REQUIREMENT

This intentional radiator is designed with a permanently attached antenna of an antenna to ensure that no antenna other than that furnished by the responsible party shall be used with the device. For more information of the antenna, please refer to the APPENDIX B: PHOTOGRAPHS OF EUT.

2.9. DESCRIPTION OF AVAILABLE ANTENNAS

Model No.: BDE-WF3235SFA32/BDE-WF3235SA32


WIFI Dedicated Antenna					
Antenna number	Antenna Type	Frequency Band (MHz)	Max Peak Gain (dBi)		
1	PCB antenna	2400 ~ 2483.5	2.5		

Model No.: BDE-WF3235SFAU32/BDE-WF3235SAU32

WIFI Dedicated Antenna						
Antenna number	Antenna Type	Frequency Band (MHz)	Max Peak Gain (dBi)			
2	Whip antenna	2400 ~ 2483.5	6			

Model No.: BDE-WF3235SFN32/BDE-WF3235SN32

WIFI Internal Antenna					
Antenna number	Antenna Type	Frequency Band (MHz)	Max Peak Gain (dBi)		
3	Ceramic Antenna	2400 ~ 2483.5	1.0		
2	Whip antenna	2400 ~ 2483.5	6		





2.10. DESCRIPTION OF ANTENNA RF PORT

	Antenna RF Port						
	WIFI (BDE-WF3235SFA32/ BDE-WF3235SA32)	WIFI (BDE-WF3235SFAU32/ BDE-WF3235SAU32)	WIFI (BDE-WF3235SFN32/ BDE-WF3235SN32)				
Software Control Port	, , ,		Ceramic Antenna or U.FL Port				
	PCB Antenna	Connect An External Antenna Through U.F. Connector Connect An External Antenna Through U.F. Connector	Ox Consect An External Anterior Ghip Anterina Through U.F. Connector Cox Through U.F. Connector Cox Through U.F. Connector Cox Through U.F. Connector Cox Through U.F. Cox MDE-WF3235SN32 Cox Through U.F. Cox Throu				

Note: The above RF soldering board is for testing use only.




Page 11 of 105

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 3.1 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 4.0 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.8 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	$U_c = \pm 2 \%$
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$





4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel transmitting (TX)
2	Middle channel transmitting (TX)
3	High channel transmitting (TX)

Note:

Transmit by 802.11b with Date rate (1/2/5.5/11)


Transmit by 802.11g with Date rate (6/9/12/18/24/36/48/54)

Transmit by 802.11n (20MHz) with Date rate (6.5/13/19.5/26/39/52/58.5/65)

The test channel for 20MHZ bandwidth system is channel 1, 6 and 11.

Note:

- The EUT has been set to operate continuously on the lowest, middle and highest operation frequency Individually, and the EUT is operating at its maximum duty cycle>or equal 98%
- 2. All modes under which configure applicable have been tested and the worst mode test data recording in the test report, if no other mode data.

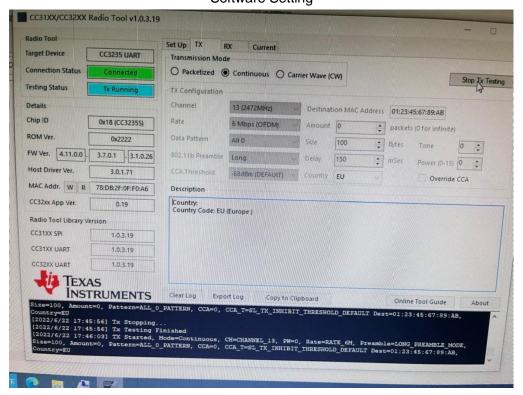


Software Setting



Page 13 of 105

5. SYSTEM TEST CONFIGURATION 5.1. CONFIGURATION OF EUT SYSTEM

Configure:



5.2. EQUIPMENT USED IN EUT SYSTEM

_								
Item	Equipment	Model No.	ID or Specification	Remark				
1	BDE Dual-Band WiFi MCU Module	BDE-WF3235SFA32	2ABRU-WF3235	EUT				
2	PC	Nbl-WAQ9R		AE				
3	PC adapter	HW-200200CP1		AE				
4	Control	J5K-NPC		AE				

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.247(b)(3)	Output Power	Compliant
§15.247(a)(2)	6 dB Bandwidth	Compliant
§15.247	Conducted Spurious Emission	Compliant
§15.247(e)	Maximum Conducted Output Power Spectral Density	Compliant
§15.209	Radiated Emission	Compliant
§15.247(d)	Band Edges	Compliant
§15.207	Line Conduction Emission	Compliant



Page 14 of 105

6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Communi Fuhai Street, Bao'an District, Shenzhen, Guangdong, China	
Designation Number	CN1259
FCC Test Firm Registration Number	975832
A2LA Cert. No.	5054.02
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA

TEST EQUIPMENT OF CONDUCTED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	Mar. 28, 2022	Mar. 27, 2023
LISN	R&S	ESH2-Z5	100086	Jun. 08, 2022	Jun. 07, 2023
Test software	R&S	ES-K1(Ver.V1.71)	N/A	N/A	N/A

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Mar. 28, 2022	Mar. 27, 2023
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Nov. 17, 2021	Nov. 16, 2022
Power sensor	Aglient	U2021XA	MY54110007	Mar. 04, 2022	Mar. 03, 2023
2.4GHz Fliter	Micro-tronics	087	N/A	Mar. 22, 2022	Mar. 21, 2024
Attenuator	Weinachel Corp	58-30-33	N/A	Sep. 03, 2020	Sep. 02, 2022
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Oct. 31, 2021	Oct. 30, 2023
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	00034609	Mar. 12, 2022	Mar. 21, 2024
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	Apr. 23, 2021	Apr. 22, 2023
Broadband Preamplifier	ETS LINDGREN	3117PA	00225134	Sep. 03, 2020	Sep. 02, 2022
ANTENNA	SCHWARZBECK	VULB9168	D69250	Jan. 08, 2020	Jan. 07, 2023
Test software	Tonscend	JS32-RE (Ver.2.5)	N/A	N/A	N/A



Page 15 of 105

7. OUTPUT POWER


7.1. MEASUREMENT PROCEDURE

For average power test:

- 1. Connect EUT RF output port to power sensor through an RF attenuator.
- 2. Connect the power sensor to the PC.
- 3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 4. Record the maximum power from the software.

Note: The EUT was tested according to ANSI C63.10 (2013) for compliance to FCC 47CFR 15.247 requirements.

7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)





Page 16 of 105

7.3. LIMITS AND MEASUREMENT RESULT

	Test Data of Conducted Output Power						
Test Mode	Test Channel (MHz)	Average Power (dBm)	Peak Power (dBm)	Limits (dBm)	Pass or Fail		
	2412	12.27	13.13	≤30	Pass		
802.11b	2437	11.81	13.06	≤30	Pass		
	2462	12.69	13.42	≤30	Pass		
	2412	8.30	13.85	≤30	Pass		
802.11g	2437	12.81	18.33	≤30	Pass		
	2462	8.51	14.09	≤30	Pass		
	2412	8.20	13.84	≤30	Pass		
802.11n20	2437	11.73	17.15	≤30	Pass		
	2462	8.33	13.95	≤30	Pass		



Report No.: AGC02390220401FE05 Page 17 of 105

8. BANDWIDTH

8.1. MEASUREMENT PROCEDURE

6dB bandwidth:


- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 kHz, VBW≥3×RBW.
- 4. Set SPA Trace 1 Max hold, then View.

Occupied bandwidth:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hoping channel
 The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video
 bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to ANSI C63.10 for compliance to FCC PART 15.247 requirements.

8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

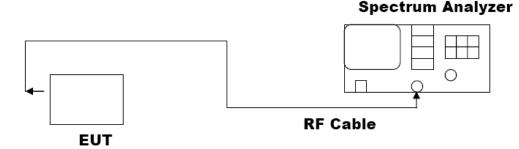




Page 18 of 105

8.3. LIMITS AND MEASUREMENT RESULTS

Test Data of Occupied Bandwidth and DTS Bandwidth						
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	-6dB Bandwidth (MHz)	Limits (MHz)	Pass or Fail	
	2412	14.008	9.538	∌.5	Pass	
802.11b	2437	14.030	9.543	∌ .5	Pass	
	2462	14.026	9.999	∌.5	Pass	
	2412	16.356	15.10	∌.5	Pass	
802.11g	2437	16.922	15.11	∌.5	Pass	
	2462	16.347	15.10	≥0.5	Pass	
	2412	17.457	15.10	∌.5	Pass	
802.11n20	2437	17.657	15.10	≥ 0.5	Pass	
	2462	17.455	15.10	∌.5	Pass	




Test Graphs of Occupied Bandwidth

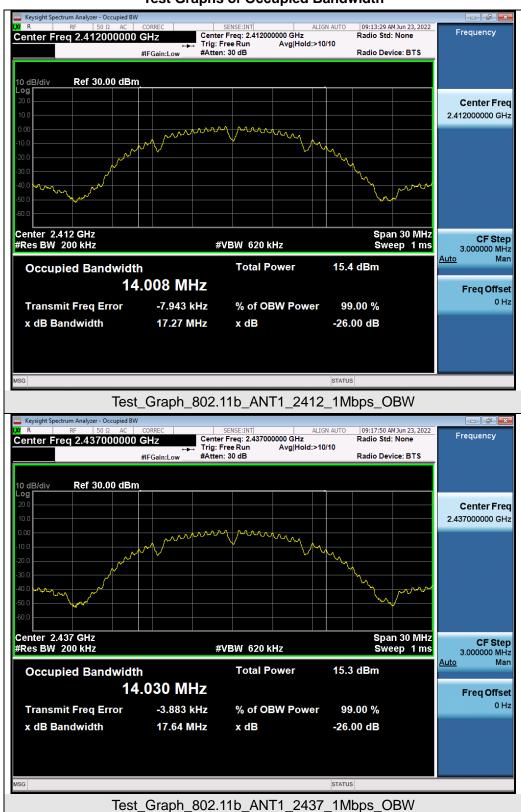


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



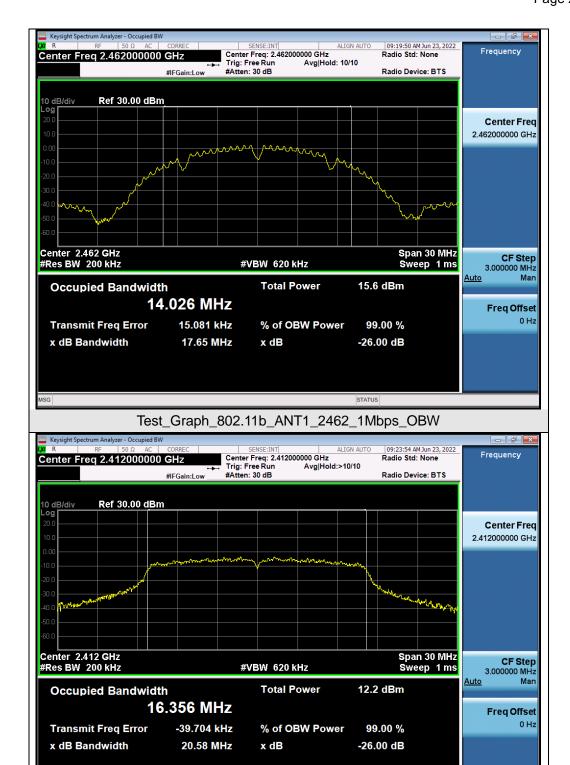


Test_Graph_802.11g_ANT1_2412_6Mbps_OBW



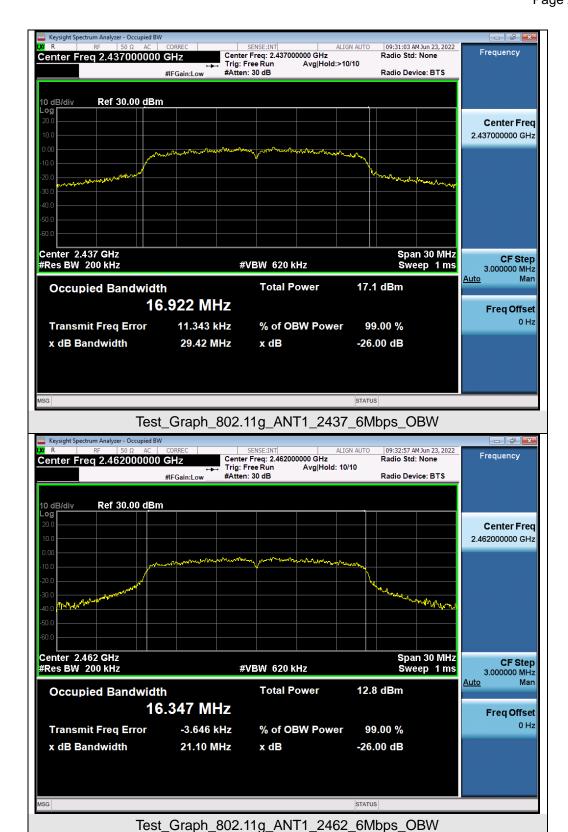




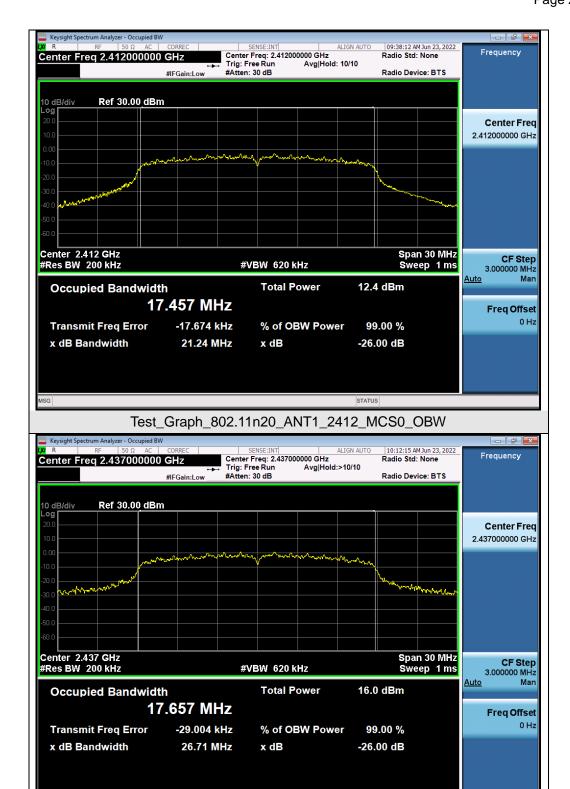


Test_Graph_802.11n20_ANT1_2437_MCS0_OBW



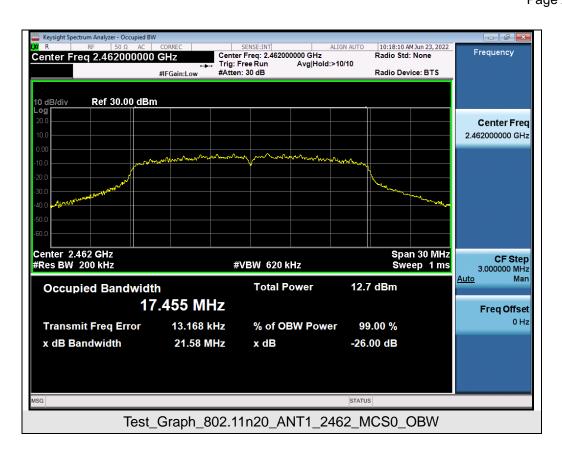



Test Graphs of DTS Bandwidth

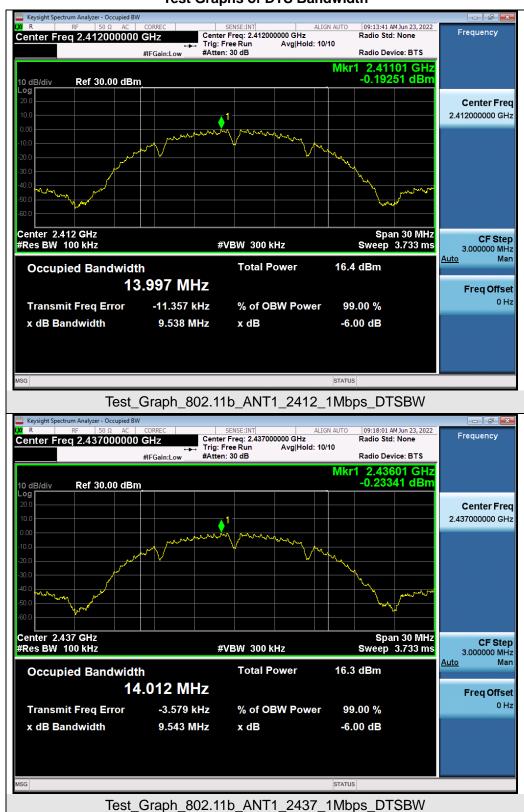


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.





Test_Graph_802.11g_ANT1_2412_6Mbps_DTSBW




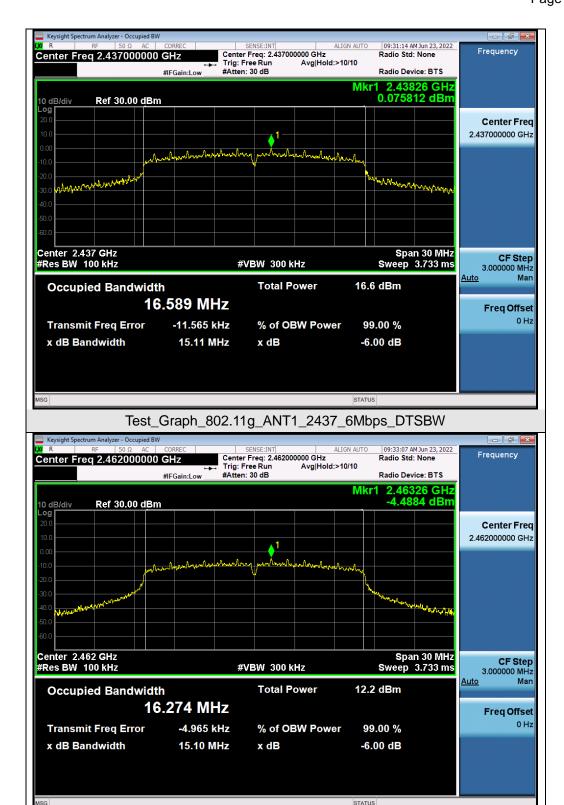

Test_Graph_802.11g_ANT1_2462_6Mbps_DTSBW

Freq Offset 0 Hz



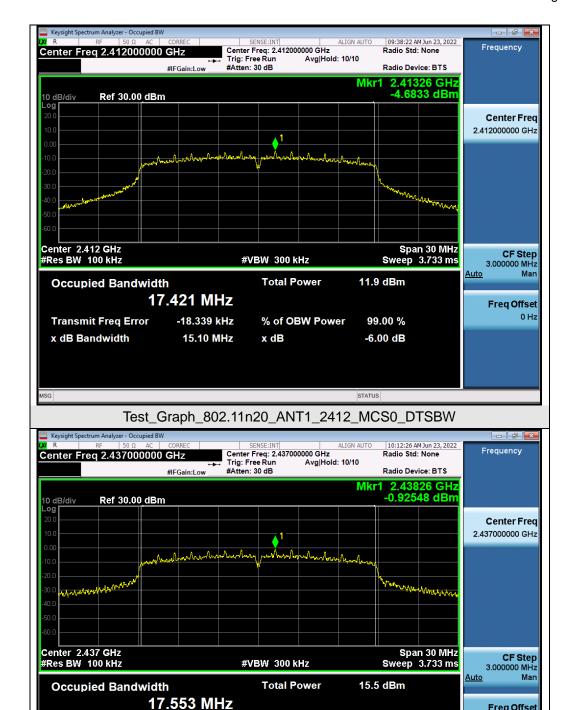

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

% of OBW Power

x dB

Test Graph 802.11n20 ANT1 2437 MCS0 DTSBW

99.00 %

-6.00 dB

-15.795 kHz


15.10 MHz

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/

Transmit Freq Error

x dB Bandwidth



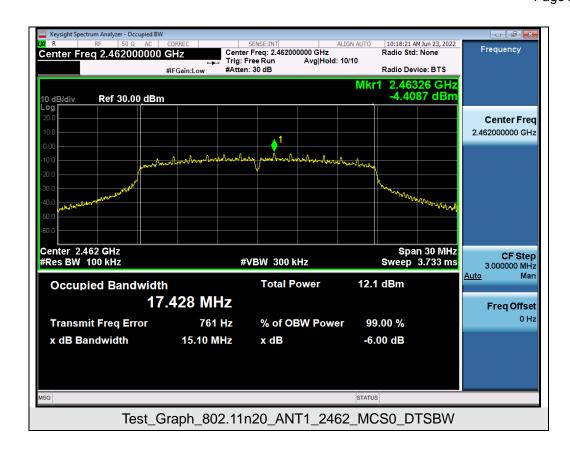



Page 29 of 105

9. CONDUCTED SPURIOUS EMISSION

9.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to ANSI C63.10 (2013) for compliance to FCC 47CFR 15.247 requirements. Owing to satisfy the requirements of the number of measurement points, we set the RBW=1MHz, VBW>RBW, scan up through 10th harmonic, and consider the tested results as the worst case, if the tested results conform to the requirement, we can deem that the real tested results(set the RBW=100KHz, VBW>RBW) are conform to the requirement.

9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 8.2.

9.3. MEASUREMENT EQUIPMENT USEDJN

The same as described in section 6.

9.4. LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT					
Applicable Limite	Measurement Result				
Applicable Limits	Test Data	Criteria			
In any 100 KHz Bandwidth Outside the	At least -20dBc than the limit				
frequency band in which the spread spectrum	Specified on the BOTTOM	PASS			
intentional radiator is operating, the radio frequency	Channel				
power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power. In addition, radiation emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in§15.209(a))	At least -20dBc than the limit Specified on the TOP Channel	PASS			

Note: The limits reference level is according to the test plot of -6dB bandwidth.

Freq Offset 0 Hz

Scale Type

<u>Lin</u>


Log

Stop 25.00 GHz

Sweep 2.152 s (30000 pts)



Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands

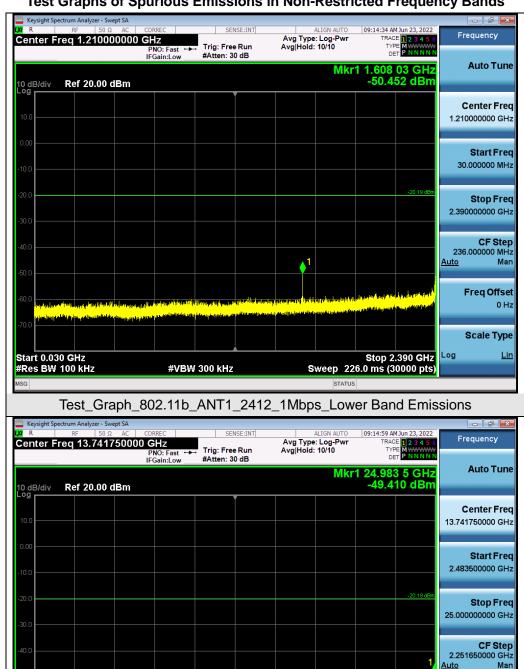

Test_Graph_802.11b_ANT1_2412_1Mbps_Higher Band Emissions


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

#VBW 300 kHz

Start 2.48 GHz

#Res BW 100 kHz



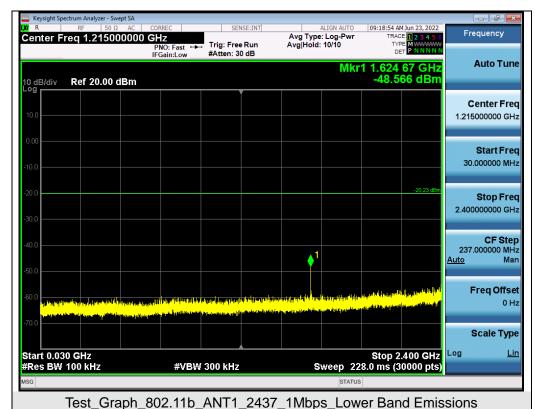


 rest_Stapri_Coo2.11b_Att11_2+01_TIMbp3_Lower Balld Ellinssions

 extrum Analyzer - Swept SA

 RF
 50 \(\Omega \) AC
 CORREC
 SENSE:INT
 ALIGN AUTO
 09:19:19 AM Jun 23, 2022






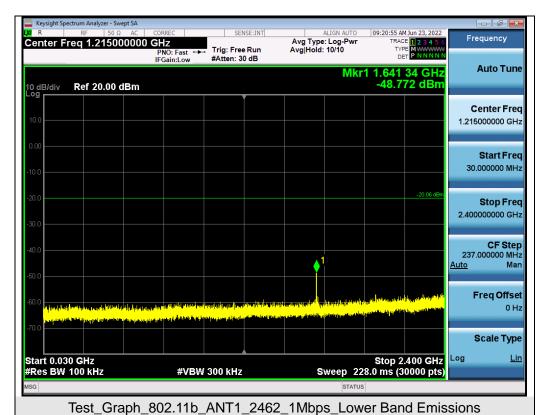

Center Freq 13.750000000 GHz
PNO: Fast →
IFGain:Low 09:21:19 AM Jun 23, 2022 Frequency Avg Type: Log-Pwr Avg|Hold: 10/10 Trig: Free Run #Atten: 30 dB **Auto Tune** Mkr1 24.978 2 GHz -48.462 dBm 10 dB/div Ref 20.00 dBm Center Freq 13.750000000 GHz Start Fred 2.500000000 GHz Stop Freq 25.000000000 GHz **CF Step** 2.250000000 GHz <u>Auto</u> Mar Freq Offset 0 Hz Scale Type Start 2.50 GHz #Res BW 100 kHz Stop 25.00 GHz Sweep 2.152 s (30000 pts) Log #VBW 300 kHz Test_Graph_802.11b_ANT1_2462_1Mbps_Higher Band Emissions



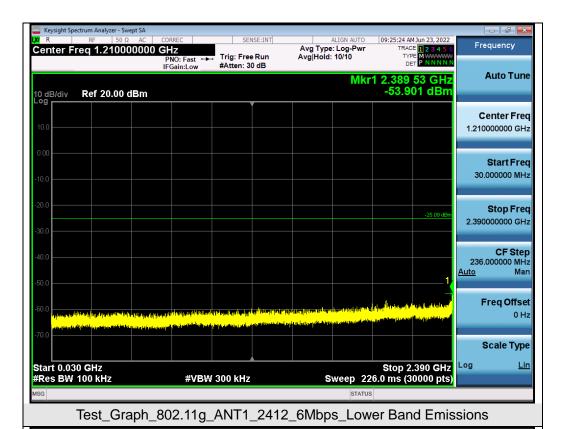




Test_Graph_802.11g_ANT1_2412_6Mbps_Higher Band Emissions


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



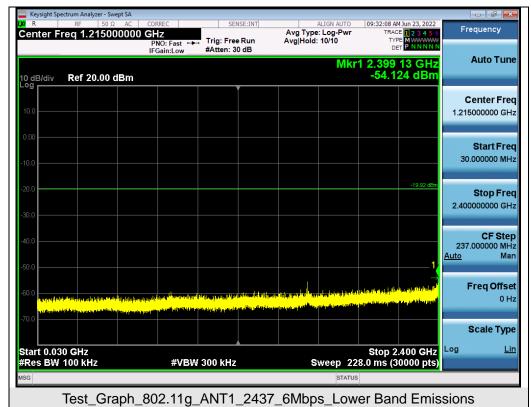






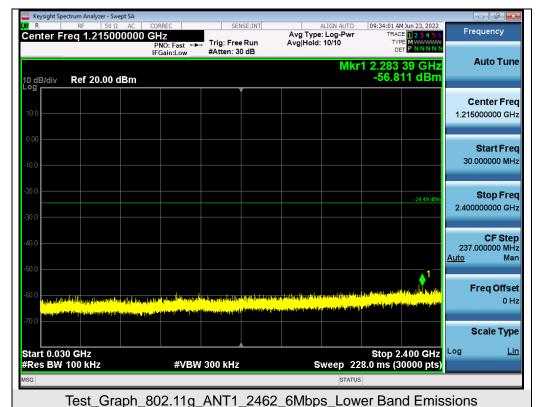






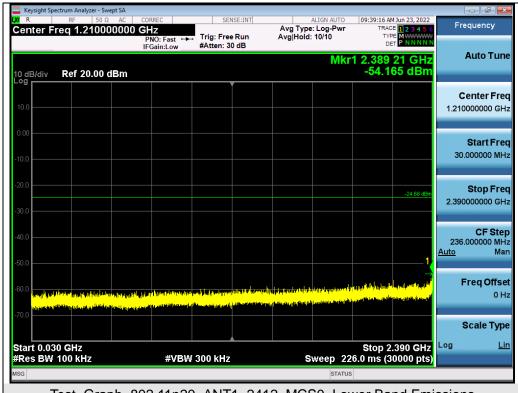

Test_Graph_802.11n20_ANT1_2412_MCS0_Lower Band Emissions






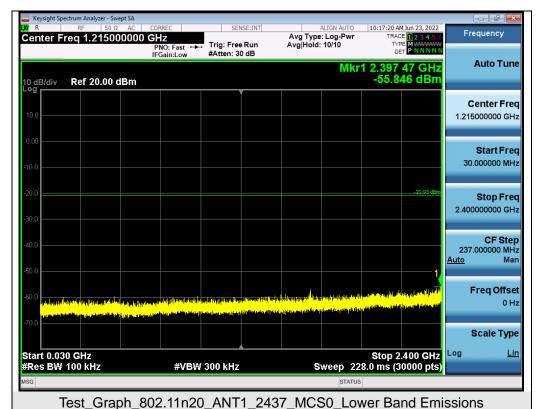





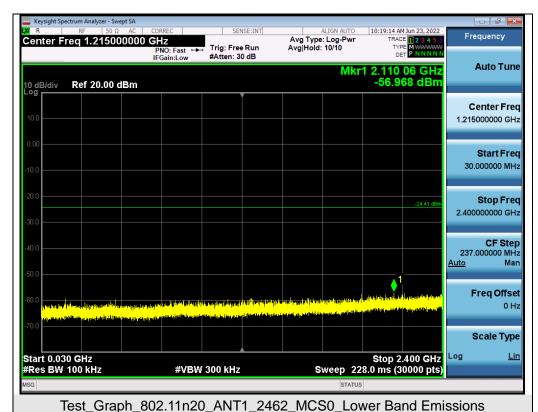

10:19:38 AM Jun 23, 2022

TRACE 1 2 3 4 5 6

TYPE M Center Freq 13.750000000 GHz
PNO: Fast
IFGain:Low Avg Type: Log-Pwr Avg|Hold: 10/10 Trig: Free Run #Atten: 30 dB **Auto Tune** Mkr1 24.970 7 GHz -49.904 dBm 10 dB/div Ref 20.00 dBm Center Freq 13.750000000 GHz Start Fred 2.500000000 GHz 25.000000000 GHz **CF Step** 2.250000000 GHz <u>Auto</u> Mar Freq Offset 0 Hz Scale Type Start 2.50 GHz #Res BW 100 kHz Stop 25.00 GHz Sweep 2.152 s (30000 pts) Log #VBW 300 kHz Test_Graph_802.11n20_ANT1_2462_MCS0_Higher Band Emissions

0 Hz

<u>Lin</u>

Scale Type

Log



Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_802.11g_ANT1_2412_6Mbps_Lower Band Edge Emissions





Note: Emissions from 2483.5-2500MHz which fall in the restricted bands had been considered with the radiated emission limits specified.



Page 41 of 105

10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY

10.1 MEASUREMENT PROCEDURE

- (1). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (2). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (3). Set SPA Trace 1 Max hold, then View.

Note: The method of PKPSD in the ANSI C63.10 (2013) item 11.10 was used in this testing.

10.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

Refer to Section 8.2.

10.3 MEASUREMENT EQUIPMENT USED

Refer to Section 6.

10.4 LIMITS AND MEASUREMENT RESULT

	10.4 EIMITO AND MEAGONEMENT NEGGET										
	Test Data of Conducted Output Power Spectral Density										
Test Mode	Test Channel (MHz)	Power density (dBm/20kHz)	Power density (dBm/3kHz)	Limit (dBm/3kHz)	Pass or Fail						
	2412	-4.881	-13.120		Pass						
802.11b	2437	-4.956	-13.195	- \$8	Pass						
	2462	-4.672	-12.911		Pass						
	2412	-10.509	-18.748	- \$8	Pass						
802.11g	2437	-6.021	-14.26		Pass						
	2462	-10.397	-18.636	- \$8	Pass						
	2412	-10.426	-18.665		Pass						
802.11n20	2437	-6.632	-14.871	- \$8	Pass						
	2462	-10.455	-18.694		Pass						

Note: Power density(dBm/3kHz) = Power density(dBm/20kHz) – 10*log(20/3).




Test Graphs of Conducted Output Power Spectral Density




Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.





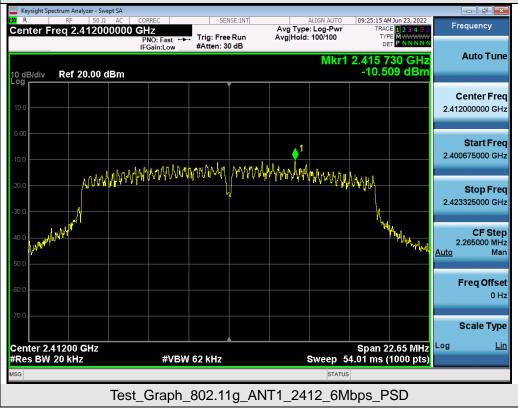





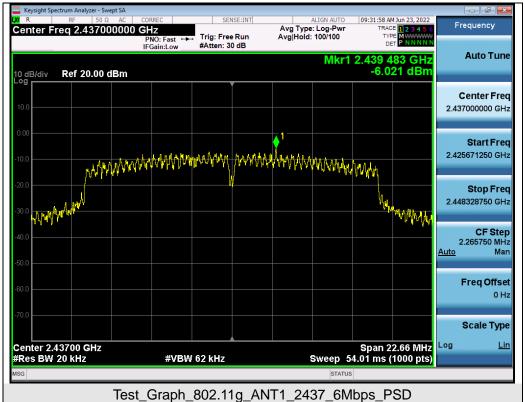






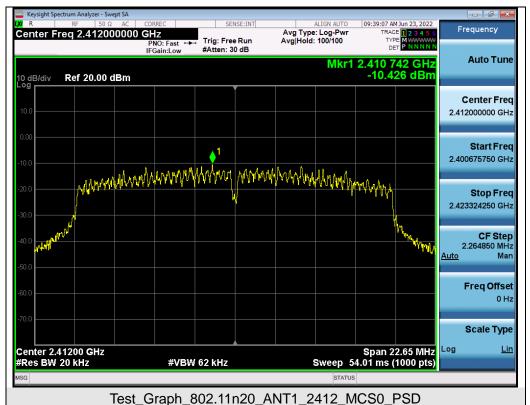

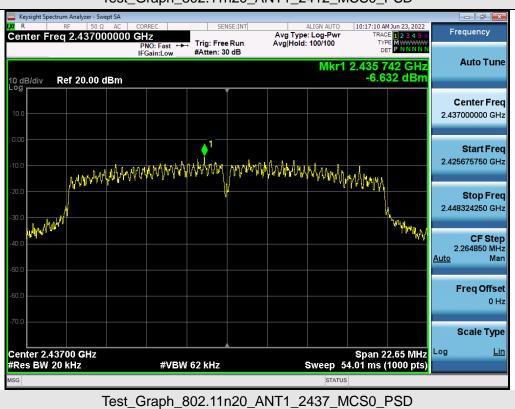



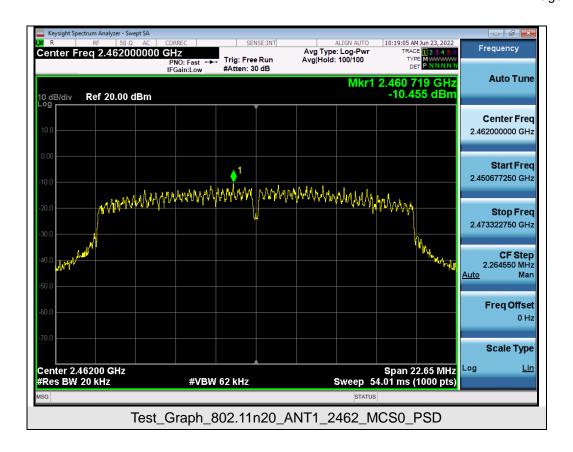



Report No.: AGC02390220401FE05 Page 47 of 105

11. RADIATED EMISSION


11.1. MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.




11.2. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

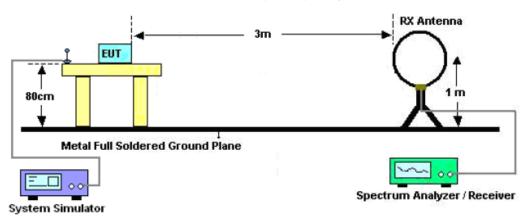

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

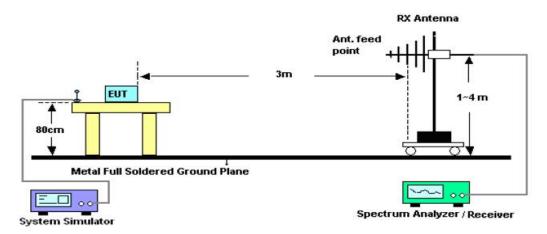

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

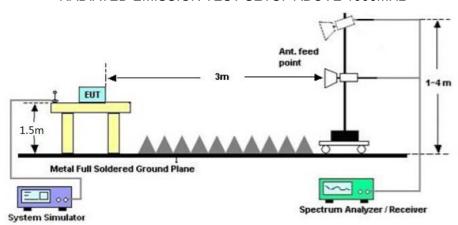



Page 49 of 105

11.3. LIMITS AND MEASUREMENT RESULT

15.209(a) Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission.

the test records reported below are the worst result compared to other modes.

11.4. TEST RESULT

Radiated emission below 30MHz


The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.



Radiated emission from 30MHz to 1000MHz

Antenna 1: PCB antenna:

EUT	BDE Dual-Band WiFi MCU Module	Model Name	BDE-WF3235SFA32
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with date rate 1 2437MHz	Antenna	Horizontal

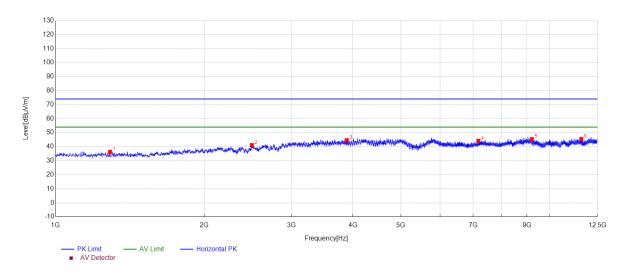


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1288.6789	36.33	-19.89	74.00	37.67	150	58	Horizontal
2	2496.2996	41.16	-13.14	74.00	32.84	150	1	Horizontal
3	3884.4884	44.59	-8.47	74.00	29.41	150	356	Horizontal
4	7176.1176	44.13	-3.57	74.00	29.87	150	302	Horizontal
5	9204.9205	45.38	0.01	74.00	28.62	150	192	Horizontal
6	11587.9588	45.45	0.23	74.00	28.55	150	353	Horizontal

RESULT: PASS



EUT	BDE Dual-Band WiFi MCU Module	Model Name	BDE-WF3235SFA32
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with date rate 1 2437MHz	Antenna	Vertical

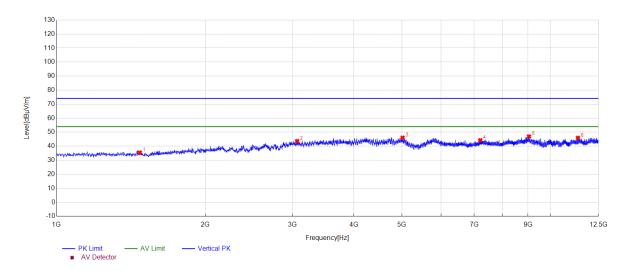


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1473.8474	35.40	-19.93	74.00	38.60	150	173	Vertical
2	3067.9068	43.58	-11.02	74.00	30.42	150	360	Vertical
3	5017.3517	46.04	-6.33	74.00	27.96	150	4	Vertical
4	7204.8705	44.16	-3.55	74.00	29.84	150	1	Vertical
5	9038.1538	46.87	0.51	74.00	27.13	150	70	Vertical
6	11356.785	45.92	0.36	74.00	28.08	150	142	Vertical

RESULT: PASS



Antenna 2: Whip antenna:

EUT	BDE Dual-Band WiFi MCU Module	Model Name	BDE-WF3235SFAU32
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with date rate 1 2437MHz	Antenna	Horizontal

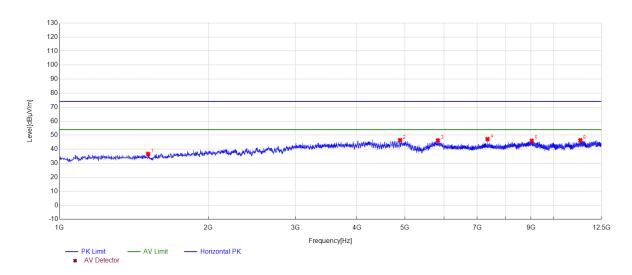


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1510.6511	36.64	-19.85	74.00	37.36	150	21	Horizontal
2	4887.3887	46.47	-6.59	74.00	27.53	150	45	Horizontal
3	5829.3329	46.27	-5.47	74.00	27.73	150	356	Horizontal
4	7347.4847	47.20	-3.49	74.00	26.80	150	218	Horizontal
5	9030.103	46.00	0.54	74.00	28.00	150	357	Horizontal
6	11325.732	46.35	0.38	74.00	27.65	150	297	Horizontal

RESULT: PASS



EUT	BDE Dual-Band WiFi MCU Module	Model Name	BDE-WF3235SFAU32
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with date rate 1 2437MHz	Antenna	Vertical

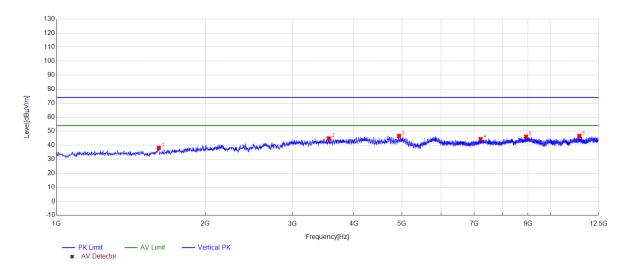


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1610.7111	38.13	-19.06	74.00	35.87	150	63	Vertical
2	3556.7057	44.82	-9.52	74.00	29.18	150	127	Vertical
3	4933.3933	46.59	-6.48	74.00	27.41	150	118	Vertical
4	7215.2215	44.32	-3.55	74.00	29.68	150	2	Vertical
5	8915.0915	46.08	0.06	74.00	27.92	150	174	Vertical
6	11432.693	46.62	0.32	74.00	27.38	150	358	Vertical

RESULT: PASS



Antenna 3: Ceramic Antenna:

EUT	BDE Dual-Band WiFi MCU Module	Model Name	BDE-WF3235SFN32
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with date rate 1 2437MHz	Antenna	Horizontal

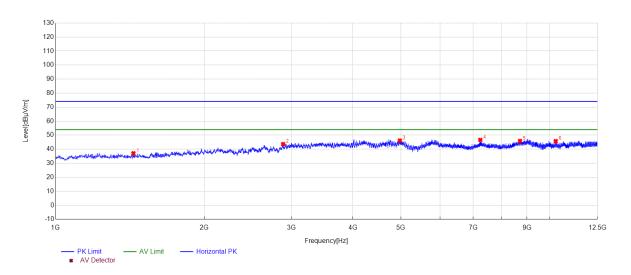


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1437.0437	37.06	-19.92	74.00	36.94	150	182	Horizontal
2	2887.3387	43.64	-11.66	74.00	30.36	150	1	Horizontal
3	4975.9476	46.13	-6.38	74.00	27.87	150	318	Horizontal
4	7238.2238	46.60	-3.54	74.00	27.40	150	248	Horizontal
5	8709.2209	45.88	-1.31	74.00	28.12	150	358	Horizontal
6	10288.328	45.74	-0.16	74.00	28.26	150	52	Horizontal

RESULT: PASS



EUT	BDE Dual-Band WiFi MCU Module	Model Name	BDE-WF3235SFN32
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with date rate 1 2437MHz	Antenna	Vertical

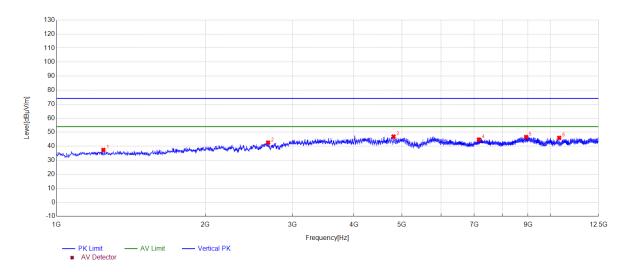

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1243.8244	37.35	-19.88	74.00	36.65	150	187	Vertical
2	2680.318	42.57	-12.44	74.00	31.43	150	253	Vertical
3	4808.0308	46.86	-6.77	74.00	27.14	150	198	Vertical
4	7157.7158	44.76	-3.57	74.00	29.24	150	28	Vertical
5	8917.3917	46.57	0.08	74.00	27.43	150	288	Vertical
6	10407.940	45.97	-0.14	74.00	28.03	150	103	Vertical

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Limit-Level.

- 2. The "Factor" value can be calculated automatically by software of measurement system.
- 3. All test modes had been pre-tested. The 802.11g at middle channel is the worst case and recorded in the report.



Page 56 of 105

Radiated emission above 1GHz

Antenna 1: PCB antenna:

EUT	BDE Dual-Band WiFi MCU Module	Model Name	BDE-WF3235SFA32
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with date rate 1 2412MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4824.000	56.31	0.08	56.39	74	-17.61	peak
4824.000	46.28	0.08	46.36	54	-7.64	AVG
7236.000	50.12	2.21	52.33	74	-21.67	peak
7236.000	41.34	2.21	43.55	54	-10.45	AVG
emark:	•		•	•		•


Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT	BDE Dual-Band WiFi MCU Module	Model Name	BDE-WF3235SFA32
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with date rate 1 2412MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4824.000	56.37	0.08	56.45	74	-17.55	peak
4824.000	46.98	0.08	47.06	54	-6.94	AVG
7236.000	51.04	2.21	53.25	74	-20.75	peak
7236.000	41.25	2.21	43.46	54	-10.54	AVG

Remark

Factor = Antenna Factor + Cable Loss - Pre-amplifier.





EUT	BDE Dual-Band WiFi MCU Module	Model Name	BDE-WF3235SFA32
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with date rate 1 2437MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4874.000	56.36	0.14	56.5	74	-17.5	peak
4874.000	47.35	0.14	47.49	54	-6.51	AVG
7311.000	51.06	2.36	53.42	74	-20.58	peak
7311.000	41.5	2.36	43.86	54	-10.14	AVG
Remark:						
actor = Anter	na Factor + Cabl	e Loss – Pre-	amplifier.			

EUT	BDE Dual-Band WiFi MCU Module	Model Name	BDE-WF3235SFA32
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with date rate 1 2437MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4874.000	55.49	0.14	55.63	74	-18.37	peak
4874.000	46.37	0.14	46.51	54	-7.49	AVG
7311.000	50.18	2.36	52.54	74	-21.46	peak
7311.000	40.54	2.36	42.9	54	-11.1	AVG
Remark:						
Remark:						
actor = Anter	nna Factor + Cabl	e Loss – Pre-	amplifier.			



Page 58 of 105

EUT	BDE Dual-Band WiFi MCU Module	Model Name	BDE-WF3235SFA32
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with date rate 1 2462MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type			
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type			
4924.000	55.19	0.22	55.41	74	-18.59	peak			
4924.000	44.57	0.22	44.79	54	-9.21	AVG			
7386.000	49.64	2.64	52.28	74	-21.72	peak			
7386.000	40.25	2.64	42.89	54	-11.11	AVG			
Remark:									
Factor = Anten	na Factor + Cabl	e Loss – Pre-a	amplifier.						

EUT	BDE Dual-Band WiFi MCU Module	Model Name	BDE-WF3235SFA32
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with date rate 1 2462MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4924.000	56.94	0.22	57.16	74	-16.84	peak
4924.000	45.28	0.22	45.5	54	-8.5	AVG
7386.000	51.28	2.64	53.92	74	-20.08	peak
7386.000	42.37	2.64	45.01	54	-8.99	AVG
Remark:						
Factor = Anter	nna Factor + Cabl	e Loss – Pre-	amplifier.			

RESULT: PASS



Page 59 of 105

Antenna 2: Whip antenna:

EUT	BDE Dual-Band WiFi MCU Module	Model Name	BDE-WF3235SFAU32
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with date rate 1 2412MHz	Antenna	Horizontal


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
4824.000	54.28	0.08	54.36	74	-19.64	peak
4824.000	46.37	0.08	46.45	54	-7.55	AVG
7236.000	49.52	2.21	51.73	74	-22.27	peak
7236.000	40.25	2.21	42.46	54	-11.54	AVG
Remark:			•	1		
actor = Δnter	na Factor + Cab	e I oss _ Pre-a	mnlifier			

EUT	BDE Dual-Band WiFi MCU Module	Model Name	BDE-WF3235SFAU32
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with date rate 1 2412MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4824.000	55.29	0.08	55.37	74	-18.63	peak
4824.000	46.35	0.08	46.43	54	-7.57	AVG
7236.000	51.27	2.21	53.48	74	-20.52	peak
7236.000	40.26	2.21	42.47	54	-11.53	AVG
temark:					!	

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.





EUT	BDE Dual-Band WiFi MCU Module	Model Name	BDE-WF3235SFAU32
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with date rate 1 2437MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4874.000	55.97	0.14	56.11	74	-17.89	peak
4874.000	46.38	0.14	46.52	54	-7.48	AVG
7311.000	41.26	2.36	43.62	74	-30.38	peak
7311.000	32.57	2.36	34.93	54	-19.07	AVG
						1
Remark:						
actor = Anter	na Factor + Cabl	e Loss – Pre-a	amplifier.			

EUT	BDE Dual-Band WiFi MCU Module	Model Name	BDE-WF3235SFAU32
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with date rate 1 2437MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4874.000	56.38	0.14	56.52	74	-17.48	peak
4874.000	46.38	0.14	46.52	54	-7.48	AVG
7311.000	50.27	2.36	52.63	74	-21.37	peak
7311.000	41.06	2.36	43.42	54	-10.58	AVG
Remark:			1			1
Factor = Anter	nna Factor + Cabl	e Loss – Pre-a	amplifier.			



Page 61 of 105

EUT	BDE Dual-Band WiFi MCU Module	Model Name	BDE-WF3235SFAU32
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with date rate 1 2462MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type		
4924.000	56.34	0.22	56.56	74	-17.44	peak		
4924.000	43.25	0.22	43.47	54	-10.53	AVG		
7386.000	49.64	2.64	52.28	74	-21.72	peak		
7386.000	40.25	2.64	42.89	54	-11.11	AVG		
Remark:			ı		I	1		
Factor = Anter	na Factor + Cabl	e Loss – Pre-	amplifier.					

EUT	BDE Dual-Band WiFi MCU Module	Model Name	BDE-WF3235SFAU32
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with date rate 1 2462MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4924.000	56.37	0.22	56.59	74	-17.41	peak
4924.000	45.28	0.22	45.5	54	-8.5	AVG
7386.000	51.26	2.64	53.9	74	-20.1	peak
7386.000	42.16	2.64	44.8	54	-9.2	AVG
Remark:			•			•
Factor = Anter	nna Factor + Cabl	e Loss – Pre-	amplifier.			

RESULT: PASS



Page 62 of 105

Antenna 3: Ceramic Antenna:

EUT	BDE Dual-Band WiFi MCU Module	Model Name	BDE-WF3235SFN32
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with date rate 1 2412MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Tree
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4824.000	55.26	0.08	55.34	74	-18.66	peak
4824.000	36.97	0.08	37.05	54	-16.95	AVG
7236.000	49.58	2.21	51.79	74	-22.21	peak
7236.000	40.12	2.21	42.33	54	-11.67	AVG
1						
emark:						

ĮΕ	actor = .	Antenna	Factor ·	+ Cable	Loss –	Pre-amplifier.	
				-		•	-


EUT	BDE Dual-Band WiFi MCU Module	Model Name	BDE-WF3235SFN32
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with date rate 1 2412MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4824.000	55.98	0.08	56.06	74	-17.94	peak
4824.000	46.35	0.08	46.43	54	-7.57	AVG
7236.000	51.07	2.21	53.28	74	-20.72	peak
7236.000	40.56	2.21	42.77	54	-11.23	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.





EUT	BDE Dual-Band WiFi MCU Module Mode		BDE-WF3235SFN32
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with date rate 1 2437MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4874.000	55.31	0.14	55.45	74	-18.55	peak
4874.000	46.87	0.14	47.01	54	-6.99	AVG
7311.000	40.26	2.36	42.62	74	-31.38	peak
7311.000	31.57	2.36	33.93	54	-20.07	AVG
Remark:			•		•	•
actor = Anter	na Factor + Cabl	e Loss – Pre-a	mplifier.			

Factor = Antenna Factor + Cable Loss – Pre-amplifier.	

EUT	BDE Dual-Band WiFi MCU Module	Model Name	BDE-WF3235SFN32
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with date rate 1 2437MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type		
4874.000	56.91	0.14	57.05	74	-16.95	peak		
4874.000	47.15	0.14	47.29	54	-6.71	AVG		
7311.000	52.17	2.36	54.53	74	-19.47	peak		
7311.000	41.37	2.36	43.73	54	-10.27	AVG		
Remark:	Remark:							
Factor = Anter	Factor = Antenna Factor + Cable Loss – Pre-amplifier.							



Report No.: AGC02390220401FE05 Page 64 of 105

EUT	BDE Dual-Band WiFi MCU Module	Model Name	BDE-WF3235SFN32
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with date rate 1 2462MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4924.000	56.97	0.22	57.19	74	-16.81	peak
4924.000	43.25	0.22	43.47	54	-10.53	AVG
7386.000	49.67	2.64	52.31	74	-21.69	peak
7386.000	40.23	2.64	42.87	54	-11.13	AVG
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

EUT	BDE Dual-Band WiFi MCU Module	Model Name	BDE-WF3235SFN32
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with date rate 1 2462MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4924.000	56.37	0.22	56.59	74	-17.41	peak
4924.000	45.18	0.22	45.4	54	-8.6	AVG
7386.000	51.34	2.64	53.98	74	-20.02	peak
7386.000	42.18	2.64	44.82	54	-9.18	AVG
emark:						

RESULT: PASS

Note:

The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

All test modes had been pre-tested. The 802.11g mode is the worst case and recorded in the report.



Test result for band edge emission at restricted bands


Antenna 1: PCB antenna:

EUT	BDE Dual-Band WiFi MCU Module	Model Name	BDE-WF3235SFA32
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2412MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

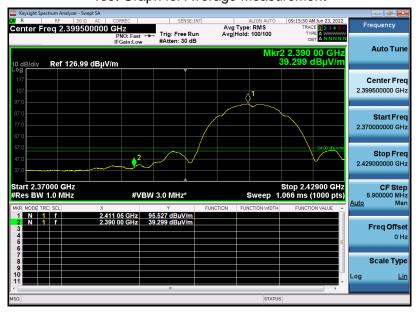




EUT	BDE Dual-Band WiFi MCU Module	Model Name	BDE-WF3235SFA32
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2412MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

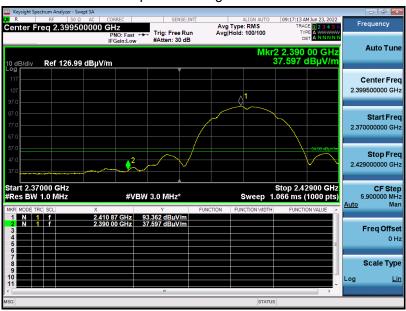

RESULT: PASS



EUT	BDE Dual-Band WiFi MCU Module	Model Name	BDE-WF3235SFA32
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2462MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement



RESULT: PASS