



# TEST REPORT

Applicant Name : Rip Curl Pty Ltd.  
Address : 101 Surf Coast Hwy Torquay Vic Australia  
Report Number : RA230515-26533E-RF-00  
FCC ID: 2ABSO010MTI

## Test Standard (s)

FCC PART 15.247

## Sample Description

Product Type: Rip Curl Search GPS 3  
Model No.: 010MTI  
Multiple Model(s) No.: N/A  
Trade Mark: RIP CURL  
Date Received: 2023/05/15  
Report Date: 2023/05/25

Test Result:	Pass*
--------------	-------

\* In the configuration tested, the EUT complied with the standards above.

## Prepared and Checked By:

Dave Liang  
EMC Engineer

## Approved By:

Candy Li  
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "\*" .

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk "\*". Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

## Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China  
Tel: +86 755-26503290 Fax: +86 755-26503290 Web: www.atc-lab.com

## TABLE OF CONTENTS

<b>DOCUMENT REVISION HISTORY .....</b>	<b>4</b>
<b>GENERAL INFORMATION.....</b>	<b>5</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	5
OBJECTIVE .....	5
TEST METHODOLOGY .....	5
MEASUREMENT UNCERTAINTY .....	6
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>7</b>
DESCRIPTION OF TEST CONFIGURATION .....	7
EQUIPMENT MODIFICATIONS .....	7
EUT EXERCISE SOFTWARE .....	8
DUTY CYCLE .....	8
SUPPORT EQUIPMENT LIST AND DETAILS .....	8
EXTERNAL I/O CABLE.....	8
BLOCK DIAGRAM OF TEST SETUP .....	9
<b>SUMMARY OF TEST RESULTS .....</b>	<b>10</b>
<b>TEST EQUIPMENT LIST .....</b>	<b>11</b>
<b>FCC§15.247 (I), §1.1307 (B) (1) &amp;§2.1093 – RF EXPOSURE .....</b>	<b>13</b>
APPLICABLE STANDARD .....	13
<b>FCC §15.203 - ANTENNA REQUIREMENT.....</b>	<b>14</b>
APPLICABLE STANDARD .....	14
ANTENNA CONNECTOR CONSTRUCTION .....	14
<b>FCC §15.207 (A) – AC LINE CONDUCTED EMISSIONS .....</b>	<b>15</b>
APPLICABLE STANDARD .....	15
EUT SETUP .....	15
EMI TEST RECEIVER SETUP.....	15
TEST PROCEDURE .....	15
TRANSD FACTOR & MARGIN CALCULATION .....	16
TEST DATA .....	16
<b>FCC §15.209, §15.205 &amp; §15.247(D) - SPURIOUS EMISSIONS.....</b>	<b>19</b>
APPLICABLE STANDARD .....	19
EUT SETUP .....	19
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....	20
TEST PROCEDURE .....	20
FACTOR & MARGIN CALCULATION .....	20
TEST DATA .....	20
<b>FCC §15.247(A) (2) – 6 DB EMISSION BANDWIDTH &amp; OCCUPIED BANDWIDTH .....</b>	<b>27</b>
APPLICABLE STANDARD .....	27
TEST PROCEDURE .....	27
TEST DATA .....	27
<b>FCC §15.247(B) (3) - MAXIMUM CONDUCTED OUTPUT POWER .....</b>	<b>28</b>
APPLICABLE STANDARD .....	28
TEST PROCEDURE .....	28
TEST DATA .....	28

---

---

<b>FCC §15.247(D) – 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE .....</b>	<b>29</b>
APPLICABLE STANDARD .....	29
TEST PROCEDURE .....	29
TEST DATA .....	29
<b>FCC §15.247(E) - POWER SPECTRAL DENSITY .....</b>	<b>30</b>
APPLICABLE STANDARD .....	30
TEST PROCEDURE .....	30
TEST DATA .....	30
<b>APPENDIX .....</b>	<b>31</b>
APPENDIX A: DTS BANDWIDTH .....	31
APPENDIX B: OCCUPIED CHANNEL BANDWIDTH .....	35
APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER .....	39
APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY .....	43
APPENDIX E: BAND EDGE MEASUREMENTS.....	47
APPENDIX F: DUTY CYCLE .....	49

---

## DOCUMENT REVISION HISTORY

---

Revision Number	Report Number	Description of Revision	Date of Revision
0	RA230515-26533E-RF-00	Original Report	2023/05/25

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

Frequency Range	BLE: 2402-2480MHz
Maximum Conducted Peak Output Power	BLE: -0.71 dBm
Modulation Technique	BLE: GFSK
Antenna Specification*	0 dBi (provided by the applicant)
Voltage Range	DC 3.7V from battery or DC5V from adapter
Sample serial number	25SG-3 for Radiated Emissions Test 25SG-7 for RF Conducted Test (Assigned by ATC)
Sample/EUT Status	Good condition

### Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

And KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

## Measurement Uncertainty

Parameter		Uncertainty
Harmonic Current		0.512%, k=2
Occupied Channel Bandwidth		5%
RF Frequency		$0.082 \times 10^{-7}$
RF output power, conducted		0.71dB
Unwanted Emission, conducted		1.6dB
AC Power Lines Conducted Emissions	9k-30MHz	2.74dB, k=2
	150kHz-30MHz	2.92dB, k=2
Audio Frequency Response		0.1dB
Low Pass Filter Response		1.2dB
Modulation Limiting		1%
Emissions, Radiated	9kHz - 30MHz	2.06dB
	30MHz - 1GHz	5.08dB
	1GHz - 18GHz	4.96dB
	18GHz - 26.5GHz	5.16dB
	26.5GHz - 40GHz	4.64dB
Temperature		1°C
Humidity		6%
Supply voltages		0.4%

*Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.*

## Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the Floor 1, KuMaKe Building, Dongzhou Community, Guangming Street, Guangming District, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 429 7.01.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0016. The Registration Number is 30241.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

For BLE 1M/2M mode, 40 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452
6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

EUT was tested with Channel 0, 19 and 39.

### Equipment Modifications

No modification was made to the EUT tested.

## EUT Exercise Software

Test in the engineering mode and power level was provided by manufacturer and power level as below:

Mode	Data rate	Power Level*		
		Low Channel	Middle Channel	High Channel
BLE	1Mbps/2Mbps	default	default	default

## Duty cycle

Test Result: Compliant. Please refer to the Appendix.

## Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Govee	Adapter	BI24GL-240100-AdU	Unknown


## External I/O Cable

Cable Description	Length (m)	From Port	To
Un-shielding Detachable USB Cable	1.2	Adapter	EUT




### Block Diagram of Test Setup

For Conducted Emissions

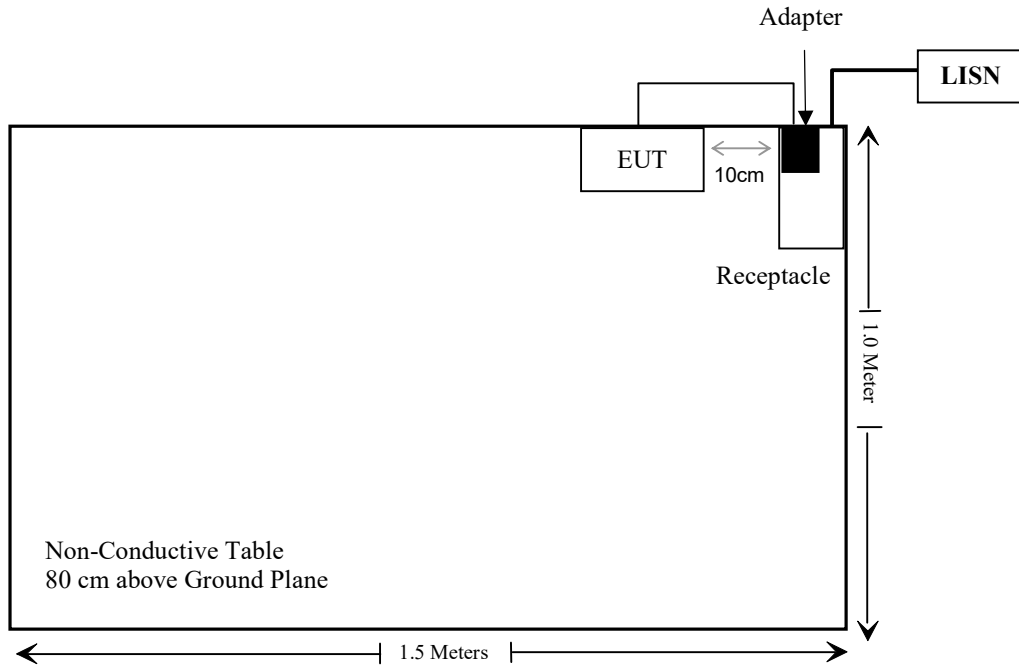

For Radiated Emissions:

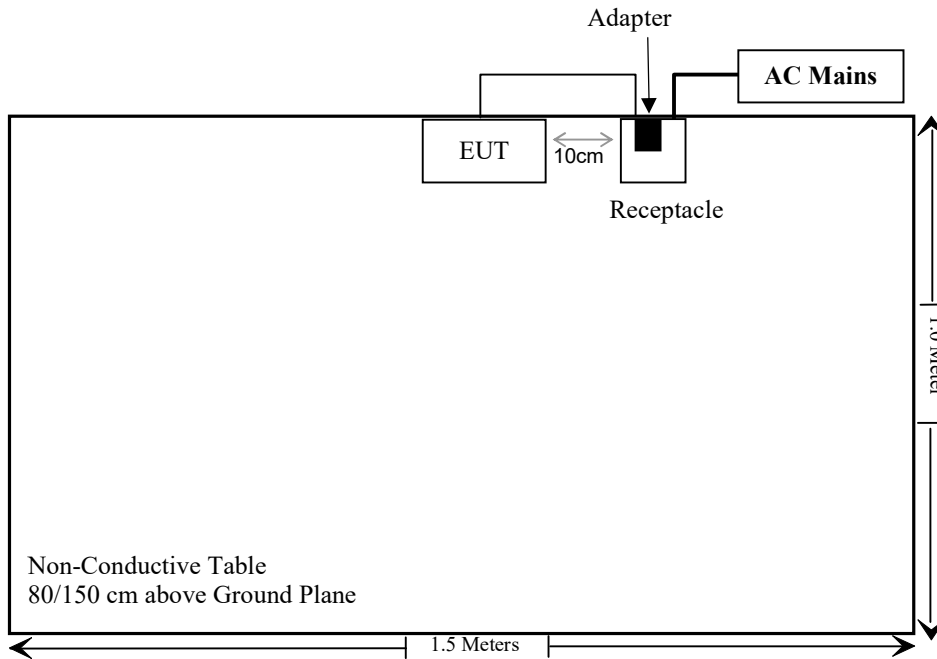

Note: the support table edge was flush with the center of turntable

**SUMMARY OF TEST RESULTS**

<b>FCC Rules</b>	<b>Description of Test</b>	<b>Result</b>
§15.247 (i), §1.1307 (b) (1) & §2.1093	RF Exposure	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth & Occupied Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant

**TEST EQUIPMENT LIST**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
<b>Conducted Emissions Test</b>					
Rohde& Schwarz	EMI Test Receiver	ESCI	100784	2022/11/25	2023/11/24
Rohde & Schwarz	L.I.S.N.	ENV216	101314	2022/11/25	2023/11/24
Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2022/12/07	2023/12/06
Unknown	RF Coaxial Cable	No.17	N0350	2022/11/25	2023/11/24
Conducted Emission Test Software: e3 19821b (V9)					
<b>Radiated emission test</b>					
Rohde& Schwarz	Test Receiver	ESR	102725	2022/11/25	2023/11/24
Rohde&Schwarz	Spectrum Analyzer	FSV40	101949	2022/11/25	2023/11/24
SONOMA INSTRUMENT	Amplifier	310 N	186131	2022/11/08	2023/11/07
A.H. Systems, inc.	Preamplifier	PAM-0118P	135	2022/11/08	2023/11/07
Quinstar	Amplifier	QLW-18405536-J0	15964001002	2022/11/08	2023/11/07
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2021/07/06	2024/07/05
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2022/11/30	2025/11/29
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2022/12/26	2025/12/25
Radiated Emission Test Software: e3 19821b (V9)					
Unknown	RF Coaxial Cable	No.10	N050	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.11	N1000	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.12	N040	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.13	N300	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.14	N800	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.15	N600	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.16	N650	2022/11/25	2023/11/24
Wainwright	High Pass Filter	WHKX3.6/18G-10SS	5	2022/11/25	2023/11/24

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
<b>RF conducted test</b>					
Rohde&Schwarz	Spectrum Analyzer	FSV-40	101948	2022/11/25	2023/11/24
Tonscend	RF Control Unit	JS0806-2	19G8060182	2022/10/24	2023/10/23
WEINSCHTEL	10dB Attenuator	5324	AU 3842	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.31	RF-01	Each time	

\* **Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## FCC§15.247 (i), §1.1307 (b) (1) &§2.1093 – RF EXPOSURE

### Applicable Standard

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission’s guideline.

According to KDB 447498 D01 General RF Exposure Guidance

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$  for 1-g SAR and  $\leq 7.5$  for 10-g extremity SAR, where

1. f(GHz) is the RF channel transmit frequency in GHz.
2. Power and distance are rounded to the nearest mW and mm before calculation.
3. The result is rounded to one decimal place for comparison.
4. When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm is applied to determine SAR test Exclusion.

### Measurement Result

For worst case:

Mode	Frequency (MHz)	Max tune-up conducted power* (dBm)	Max tune-up conducted power* (mW)	Distance (mm)	Calculated value	Threshold (1-g SAR)	SAR Test Exclusion
BLE	2402-2480	1.0	1.26	5	0.4	3.0	Yes

**Result:** Compliant.

---

## **FCC §15.203 - ANTENNA REQUIREMENT**

---

### **Applicable Standard**

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### **Antenna Connector Construction**

The EUT has one integral antenna which was permanently attached, and the maximum antenna gain is 0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


**Result:** Compliance.

## FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

### Applicable Standard

FCC§15.207

### EUT Setup

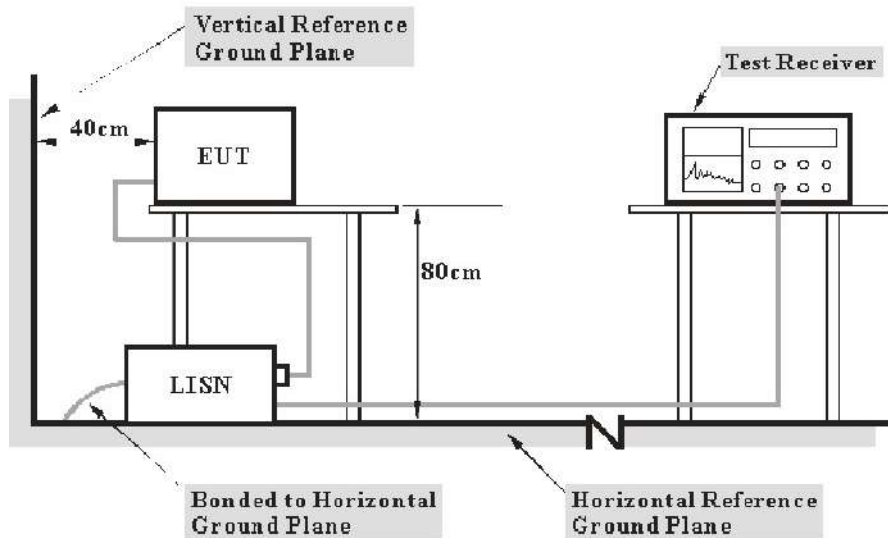

- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

### Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

## Transd Factor & Margin Calculation

The Transd factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$

## Test Data

### Environmental Conditions


<b>Temperature:</b>	23°C
<b>Relative Humidity:</b>	49 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Jerry on 2023-05-20.*

*EUT operation mode: Transmitting (Worst case is low channel)*




AC 120V/60 Hz, Line

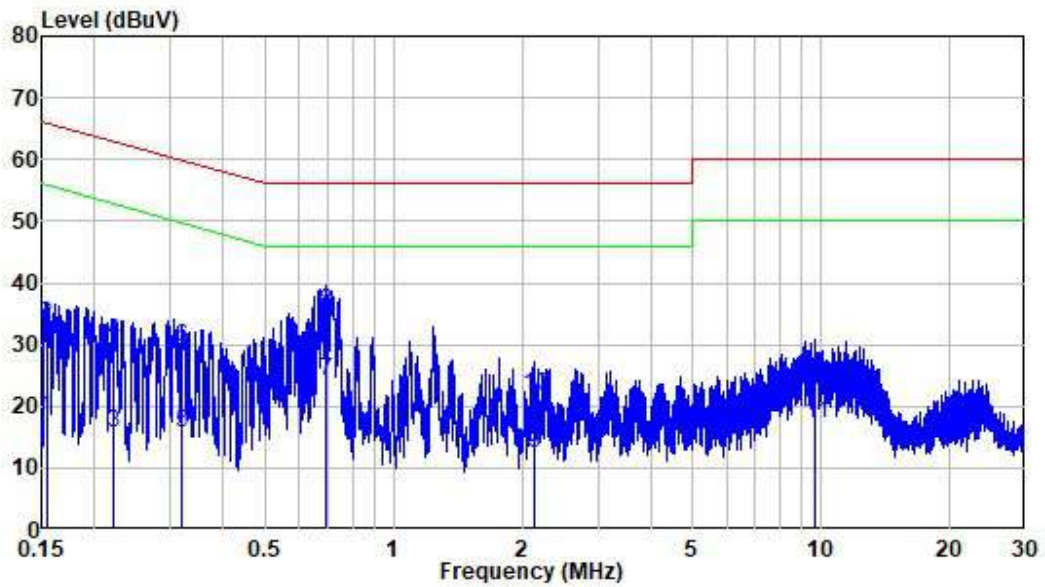

Site : Shielding Room  
 Condition: Line  
 Job No. : RA230515-26533E-RF  
 Mode : Charging+BLE Transmitting  
 Power : AC 120V 60Hz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.154	10.36	7.66	18.02	55.78	-37.76	Average
2	0.154	10.36	22.99	33.35	65.78	-32.43	QP
3	0.221	10.31	5.51	15.82	52.77	-36.95	Average
4	0.221	10.31	20.19	30.50	62.77	-32.27	QP
5	0.320	10.42	5.32	15.74	49.70	-33.96	Average
6	0.320	10.42	19.06	29.48	59.70	-30.22	QP
7	0.693	10.67	13.36	24.03	46.00	-21.97	Average
8	0.693	10.67	24.72	35.39	56.00	-20.61	QP
9	2.140	10.41	1.99	12.40	46.00	-33.60	Average
10	2.140	10.41	11.48	21.89	56.00	-34.11	QP
11	9.705	10.62	6.45	17.07	50.00	-32.93	Average
12	9.705	10.62	13.02	23.64	60.00	-36.36	QP

**AC 120V/60 Hz, Neutral**

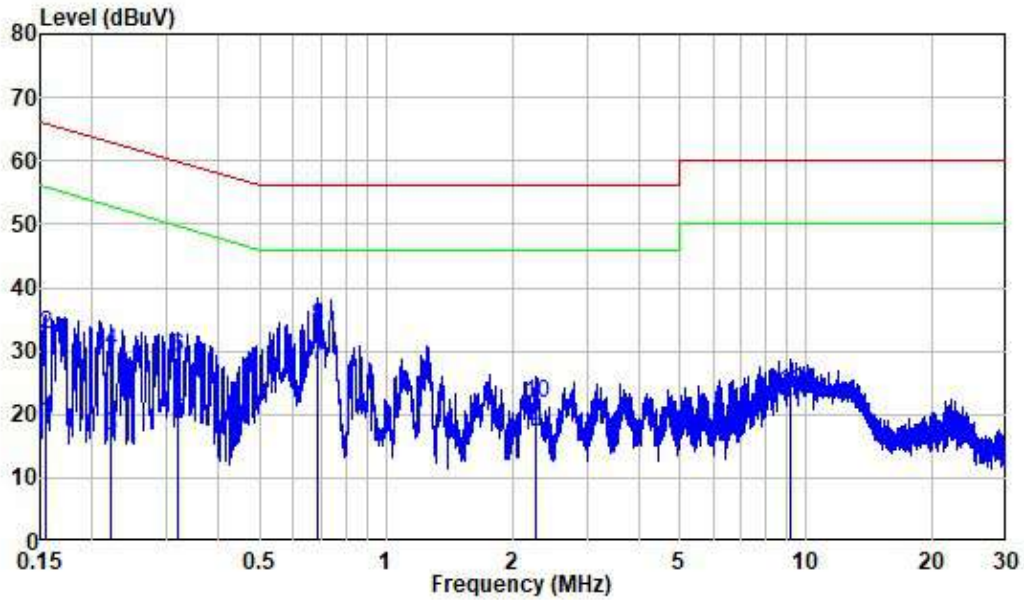

Site : Shielding Room  
 Condition: Neutral  
 Job No. : RA230515-26533E-RF  
 Mode : Charging+BLE Transmitting  
 Power : AC 120V 60Hz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.155	10.28	8.54	18.82	55.74	-36.92	Average
2	0.155	10.28	22.35	32.63	65.74	-33.11	QP
3	0.221	10.30	6.25	16.55	52.78	-36.23	Average
4	0.221	10.30	19.68	29.98	62.78	-32.80	QP
5	0.319	10.37	8.24	18.61	49.73	-31.12	Average
6	0.319	10.37	18.69	29.06	59.73	-30.67	QP
7	0.689	10.47	17.33	27.80	46.00	-18.20	Average
8	0.689	10.47	23.44	33.91	56.00	-22.09	QP
9	2.265	10.50	6.73	17.23	46.00	-28.77	Average
10	2.265	10.50	11.13	21.63	56.00	-34.37	QP
11	9.144	10.66	9.46	20.12	50.00	-29.88	Average
12	9.144	10.66	12.97	23.63	60.00	-36.37	QP


## FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

### Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

### EUT Setup

#### Below 1 GHz:

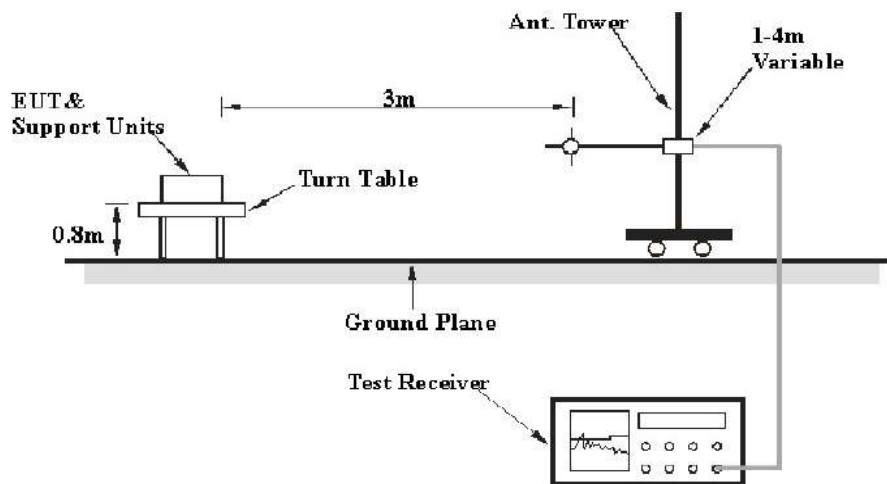

#### Above 1GHz:

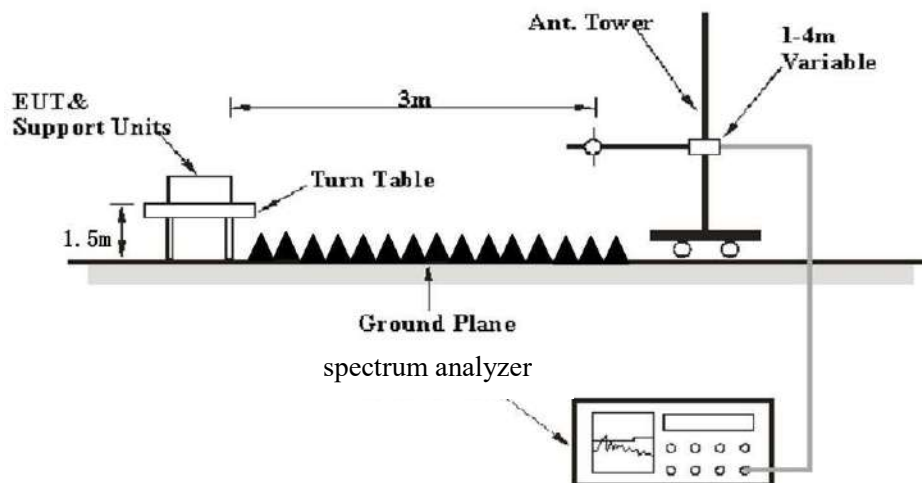

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

## EMI Test Receiver & Spectrum Analyzer Setup

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz <sup>Note 1</sup>	/	Average
	1MHz	> 1/T <sup>Note 2</sup>	/	Average

Note 1: when duty cycle is no less than 98%

Note 2: when duty cycle is less than 98%

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

## Factor & Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit/Margin} &= \text{Corrected Amplitude} / \text{Absolute Level} - \text{Limit} \\ \text{Absolute Level} / \text{Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

## Test Data

### Environmental Conditions

Temperature:	23~25 °C
Relative Humidity:	55~60 %
ATM Pressure:	101.0 kPa


The testing was performed by Jason Liu on 2023-05-19 for below 1GHz and Jimi Zheng on 2023-05-22 for above 1GHz

EUT operation mode: Transmitting (Pre-scan in the X,Y and Z axes of orientation, the worst case X-axes of orientation was recorded)

**30MHz-1GHz: (Worst case is Low channel)**

Note: When the test result of peak was less than the limit of QP more than 6dB, just peak value were recorded.


**Horizontal:**

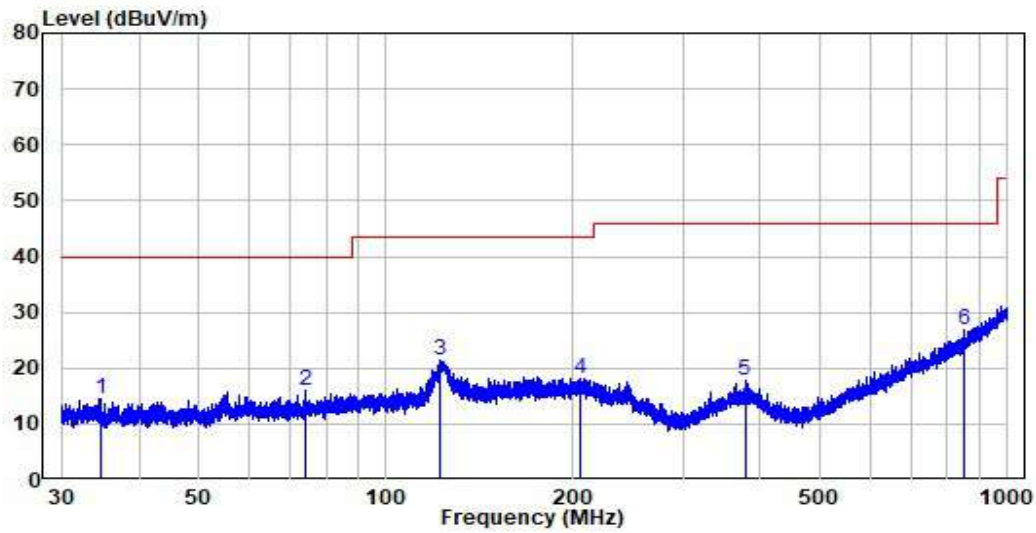

Site : chamber  
 Condition: 3m HORIZONTAL  
 Job No. : RA230515-26533E-RF  
 Test Mode: Charging+BLE Transmitting

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	34.699	-14.45	28.90	14.45	40.00	-25.55	Peak
2	74.298	-13.45	29.49	16.04	40.00	-23.96	Peak
3	122.458	-10.92	32.46	21.54	43.50	-21.96	Peak
4	205.765	-10.77	28.98	18.21	43.50	-25.29	Peak
5	377.921	-11.16	28.86	17.70	46.00	-28.30	Peak
6	850.662	-2.59	29.31	26.72	46.00	-19.28	Peak

Vertical

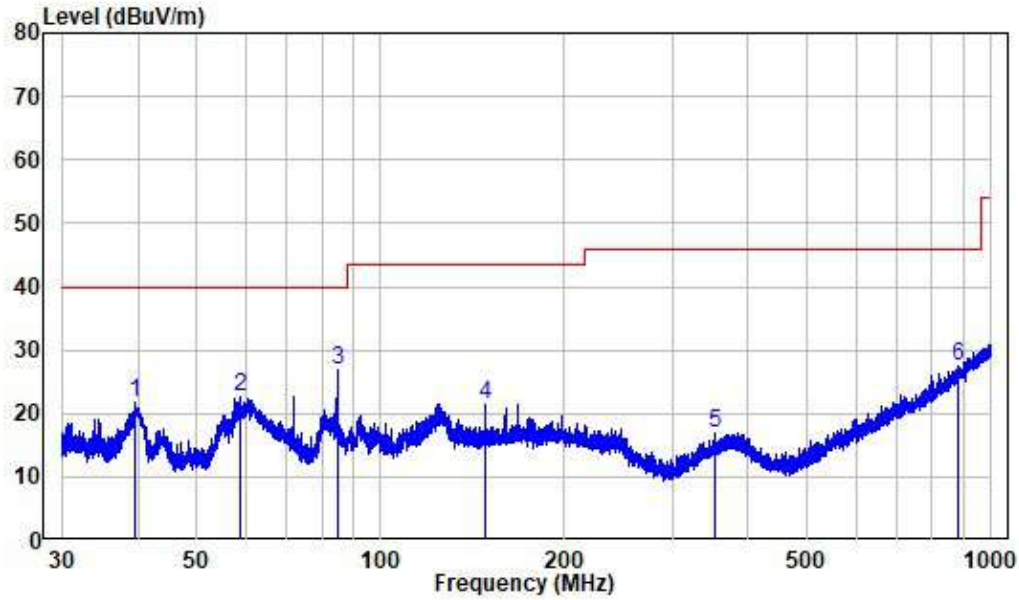

Site : chamber  
 Condition: 3m VERTICAL  
 Job No. : RA230515-26533E-RF  
 Test Mode: Charging+BLE Transmitting

	Freq	Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	39.506	-14.36	35.96	21.60	40.00	-18.40	Peak
2	58.844	-13.89	36.60	22.71	40.00	-17.29	Peak
3	84.888	-12.83	39.71	26.88	40.00	-13.12	Peak
4	148.636	-10.38	31.87	21.49	43.50	-22.01	Peak
5	351.708	-12.03	28.93	16.90	46.00	-29.10	Peak
6	884.115	-1.28	28.61	27.33	46.00	-18.67	Peak

## 1-25 GHz:

## BLE 1M

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	PK/Ave		Height (m)	Polar (H/V)				
Low Channel(2402MHz)									
2317.85	52.99	PK	323	2.4	H	-10.41	42.58	74	-31.42
2317.85	39.02	AV	323	2.4	H	-10.41	28.61	54	-25.39
2389.6	55.02	PK	249	1.5	V	-10.62	44.40	74	-29.60
2389.6	41.17	AV	249	1.5	V	-10.62	30.55	54	-23.45
2390	52.55	PK	117	2.3	H	-10.62	41.93	74	-32.07
2390	40.34	AV	117	2.3	H	-10.62	29.72	54	-24.28
2390	53.57	PK	246	2.3	V	-10.62	42.95	74	-31.05
2390	41.07	AV	246	2.3	V	-10.62	30.45	54	-23.55
4804	58.20	PK	348	1.3	H	-5.57	52.63	74	-21.37
4804	44.09	AV	348	1.3	H	-5.57	38.52	54	-15.48
4804	58.61	PK	135	2.2	V	-5.57	53.04	74	-20.96
4804	44.99	AV	135	2.2	V	-5.57	39.42	54	-14.58
Middle Channel(2440MHz)									
4880	57.28	PK	64	1.4	H	-5.24	52.04	74	-21.96
4880	44.29	AV	64	1.4	H	-5.24	39.05	54	-14.95
4880	56.16	PK	237	2.5	V	-5.24	50.92	74	-23.08
4880	43.12	AV	237	2.5	V	-5.24	37.88	54	-16.12
High Channel(2480 MHz)									
2483.5	53.63	PK	144	2	H	-10.46	43.17	74	-30.83
2483.5	41.21	AV	144	2	H	-10.46	30.75	54	-23.25
2483.5	52.56	PK	24	2.1	V	-10.46	42.1	74	-31.90
2483.5	40.53	AV	24	2.1	V	-10.46	30.07	54	-23.93
2483.56	57.11	PK	6	1.1	H	-10.46	46.65	74	-27.35
2483.56	41.57	AV	6	1.1	H	-10.46	31.11	54	-22.89
2485.68	56.15	PK	138	2	V	-10.44	45.71	74	-28.29
2485.68	41.07	AV	138	2	V	-10.44	30.63	54	-23.37
4960	57.31	PK	185	1.9	H	-4.90	52.41	74	-21.59
4960	44.46	AV	185	1.9	H	-4.90	39.56	54	-14.44
4960	56.35	PK	68	2.3	V	-4.90	51.45	74	-22.55
4960	44.05	AV	68	2.3	V	-4.90	39.15	54	-14.85

## BLE 2M

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
Low Channel(2402MHz)									
2317.56	52.87	PK	359	1.6	H	-10.40	42.47	74	-31.53
2317.56	39.42	AV	359	1.6	H	-10.40	29.02	54	-24.98
2333.9	54.14	PK	144	1.1	V	-10.58	43.56	74	-30.44
2333.9	40.18	AV	144	1.1	V	-10.58	29.60	54	-24.40
2390	52.05	PK	332	2.1	H	-10.62	41.43	74	-32.57
2390	40.44	AV	332	2.1	H	-10.62	29.82	54	-24.18
2390	52.80	PK	211	2	V	-10.62	42.18	74	-31.82
2390	40.54	AV	211	2	V	-10.62	29.92	54	-24.08
4804	57.53	PK	233	2	H	-5.57	51.96	74	-22.04
4804	43.90	AV	233	2	H	-5.57	38.33	54	-15.67
4804	58.44	PK	172	2.4	V	-5.57	52.87	74	-21.13
4804	44.36	AV	172	2.4	V	-5.57	38.79	54	-15.21
Middle Channel(2440MHz)									
4880	57.50	PK	288	1.2	H	-5.24	52.26	74	-21.74
4880	43.22	AV	288	1.2	H	-5.24	37.98	54	-16.02
4880	57.27	PK	351	2.4	V	-5.24	52.03	74	-21.97
4880	42.19	AV	351	2.4	V	-5.24	36.95	54	-17.05
High Channel(2480 MHz)									
2483.5	57.74	PK	223	2.3	H	-10.46	47.28	74	-26.72
2483.5	41.67	AV	223	2.3	H	-10.46	31.21	54	-22.79
2483.5	56.59	PK	6	2.3	V	-10.46	46.13	74	-27.87
2483.5	41.06	AV	6	2.3	V	-10.46	30.6	54	-23.40
2483.74	57.08	PK	184	1.4	H	-10.46	46.62	74	-27.38
2483.74	41.61	AV	184	1.4	H	-10.46	31.15	54	-22.85
2484.65	56.67	PK	29	1.3	V	-10.45	46.22	74	-27.78
2484.65	41.55	AV	29	1.3	V	-10.45	31.1	54	-22.90
4960	57.28	PK	78	1	H	-4.90	52.38	74	-21.62
4960	43.85	AV	78	1	H	-4.90	38.95	54	-15.05
4960	56.36	PK	241	1.9	V	-4.90	51.46	74	-22.54
4960	42.83	AV	241	1.9	V	-4.90	37.93	54	-16.07

## Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Absolute Level = Corrected Factor + Reading

Margin = Absolute Level - Limit


The other spurious emission which is in the noise floor level was not recorded.




1-18 GHz:

Pre-scan for BLE 1M, High Channel

Horizontal

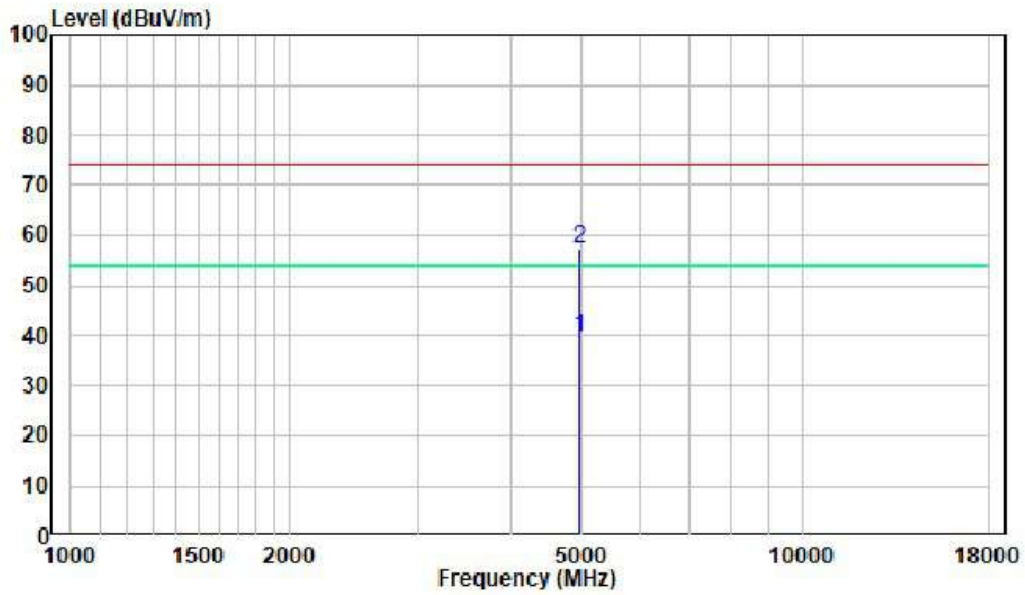


Vertical

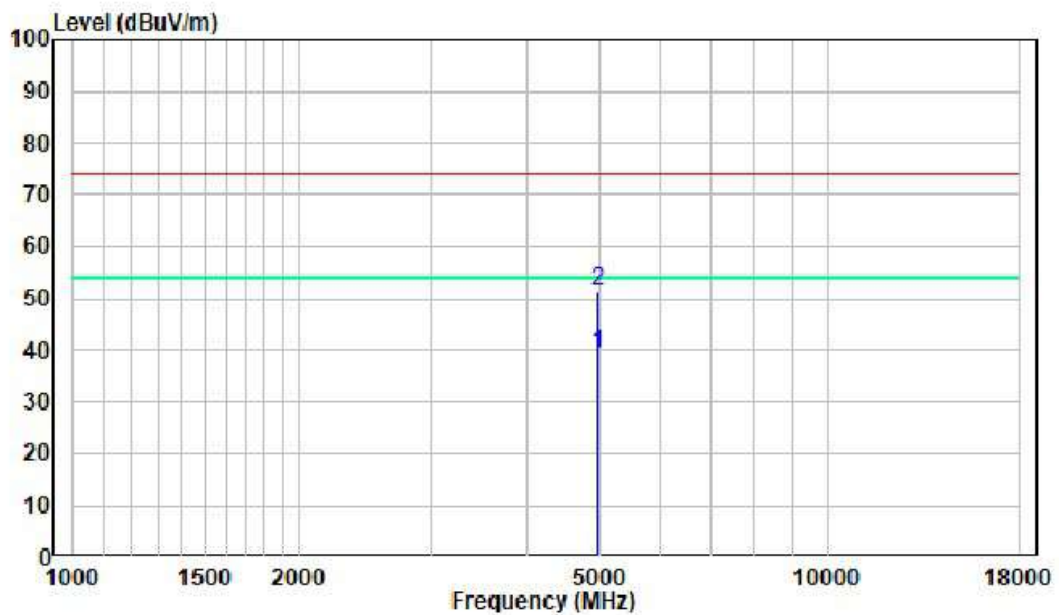


18 -25GHz:

Pre-scan for BLE 1M, High Channel

Horizontal

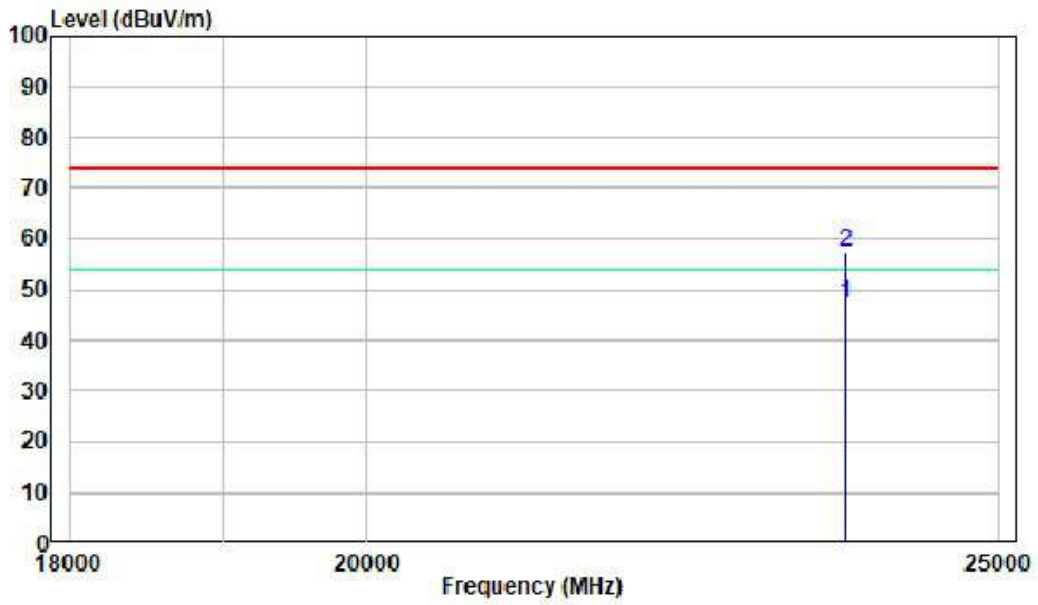

Vertical

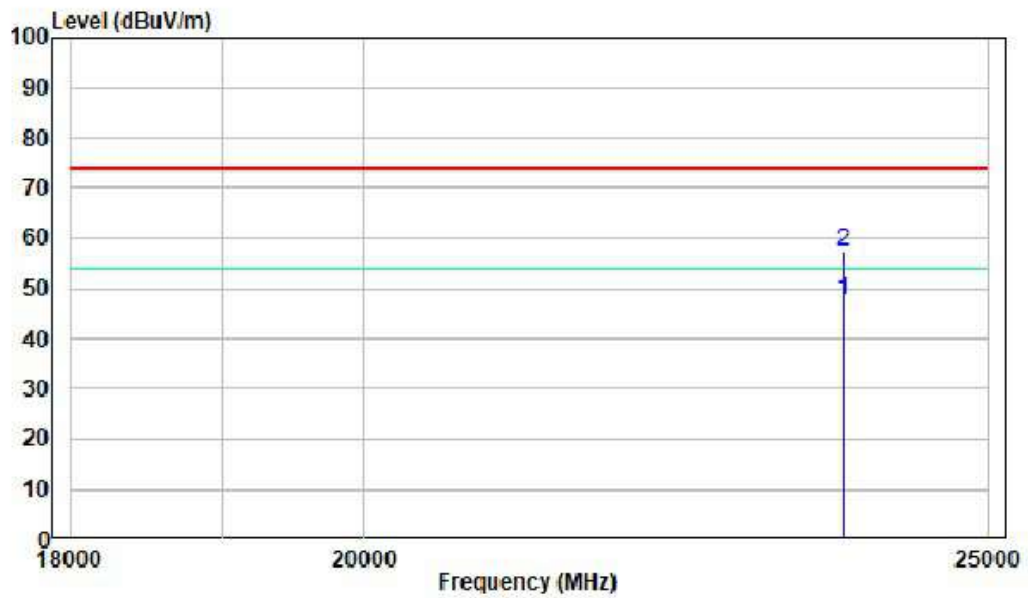

## FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH & OCCUPIED BANDWIDTH


### Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.8.1 & Clause 6.9.3

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

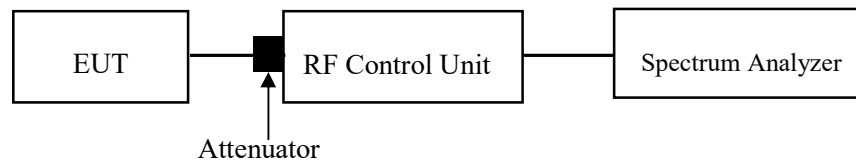

### Test Data

#### Environmental Conditions

<b>Temperature:</b>	23°C
<b>Relative Humidity:</b>	60 %
<b>ATM Pressure:</b>	101.0 kPa

The testing was performed by Roger Ling on 2023-05-18.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

## FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER


### Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

### Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.9.1.1

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

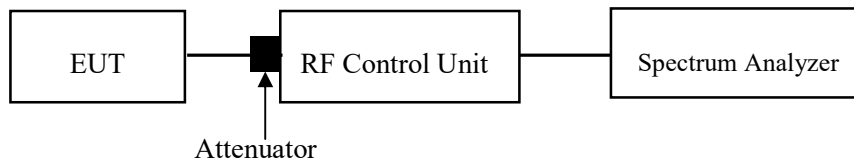

### Test Data

#### Environmental Conditions

<b>Temperature:</b>	23 °C
<b>Relative Humidity:</b>	60 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Roger Ling on 2023-05-18.*

*EUT operation mode: Transmitting*

Test Result: Compliant. Please refer to the Appendix.

## FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE


### Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.11

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

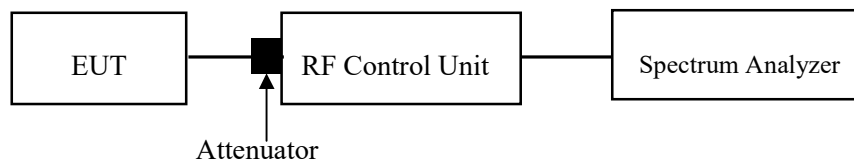

### Test Data

#### Environmental Conditions

<b>Temperature:</b>	23 °C
<b>Relative Humidity:</b>	60 %
<b>ATM Pressure:</b>	101.0 kPa

The testing was performed by Roger Ling on 2023-05-18.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

## FCC §15.247(e) - POWER SPECTRAL DENSITY


### Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.10.2

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW to:  $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$ .
3. Set the VBW  $\geq 3 \times \text{RBW}$ .
4. Set the span to 1.5 times the DTS bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

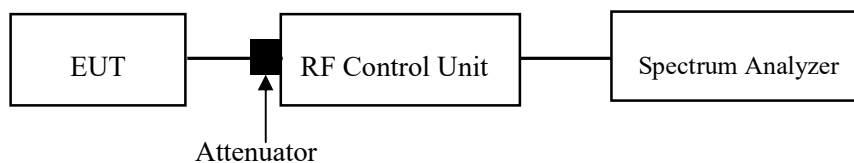

### Test Data

#### Environmental Conditions

<b>Temperature:</b>	23 °C
<b>Relative Humidity:</b>	60 %
<b>ATM Pressure:</b>	101.0 kPa

The testing was performed by Roger Ling on 2023-05-18.

*EUT operation mode: Transmitting*

Test Result: Compliant. Please refer to the Appendix.


## APPENDIX

### Appendix A: DTS Bandwidth

#### Test Result


Test Mode	Antenna	Frequency[MHz]	DTS BW [MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.71	0.5	PASS
		2440	0.71	0.5	PASS
		2480	0.72	0.5	PASS
BLE_2M	Ant1	2402	1.15	0.5	PASS
		2440	1.11	0.5	PASS
		2480	1.13	0.5	PASS

### Test Graphs

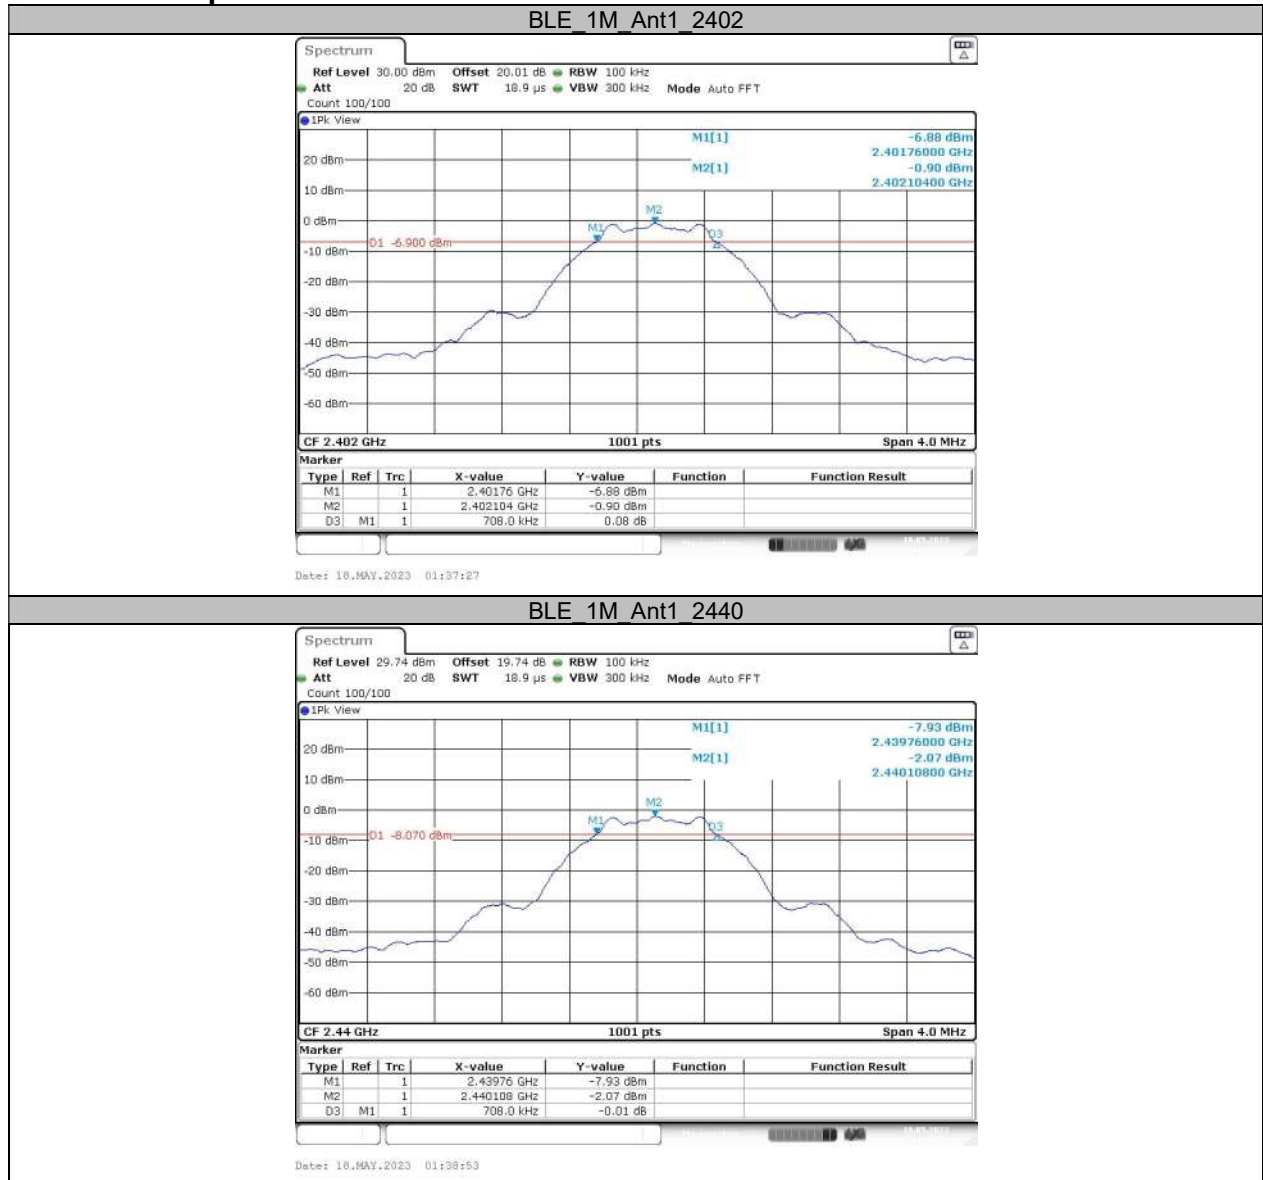




**BLE 1M Ant1 2480**

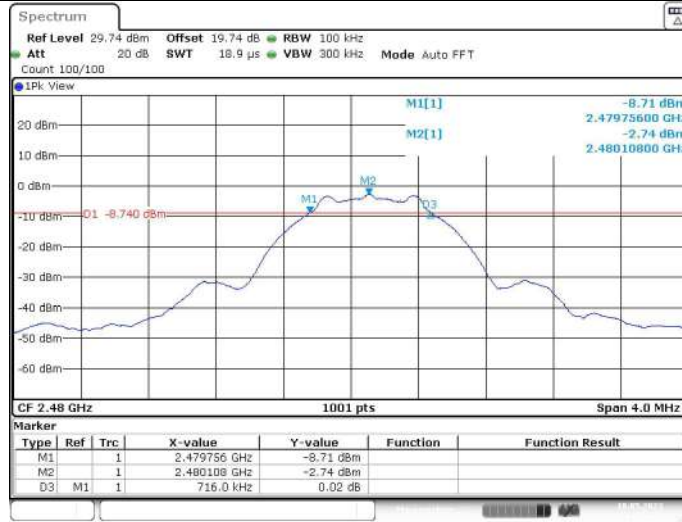


Date: 18.MAY.2023 01:40:40

**BLE 2M Ant1 2402**

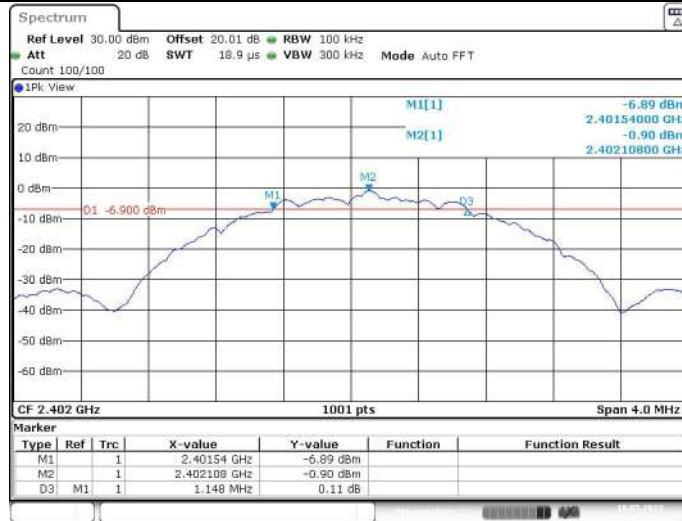


Date: 18.MAY.2023 01:41:57

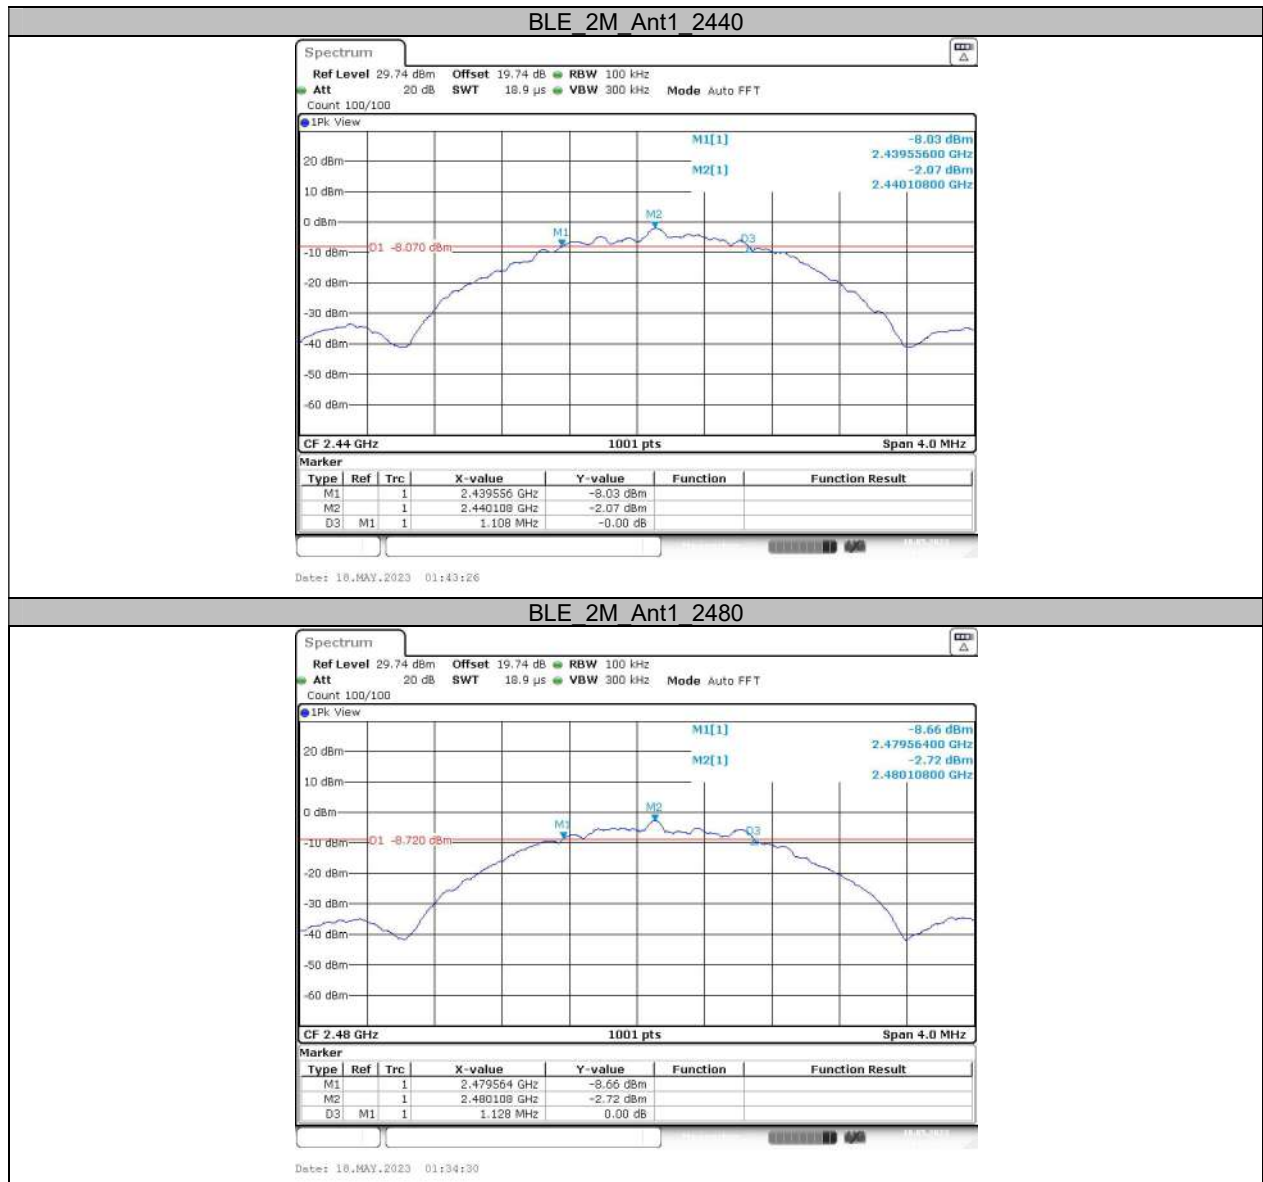


**Appendix B: Occupied Channel Bandwidth****Test Result**

Test Mode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	1.071	2401.580	2402.651	---	---
		2440	1.067	2439.580	2440.647	---	---
		2480	1.067	2479.580	2480.647	---	---
BLE_2M	Ant1	2402	2.054	2401.081	2403.135	---	---
		2440	2.062	2439.073	2441.135	---	---
		2480	2.054	2479.093	2481.147	---	---

### Test Graphs

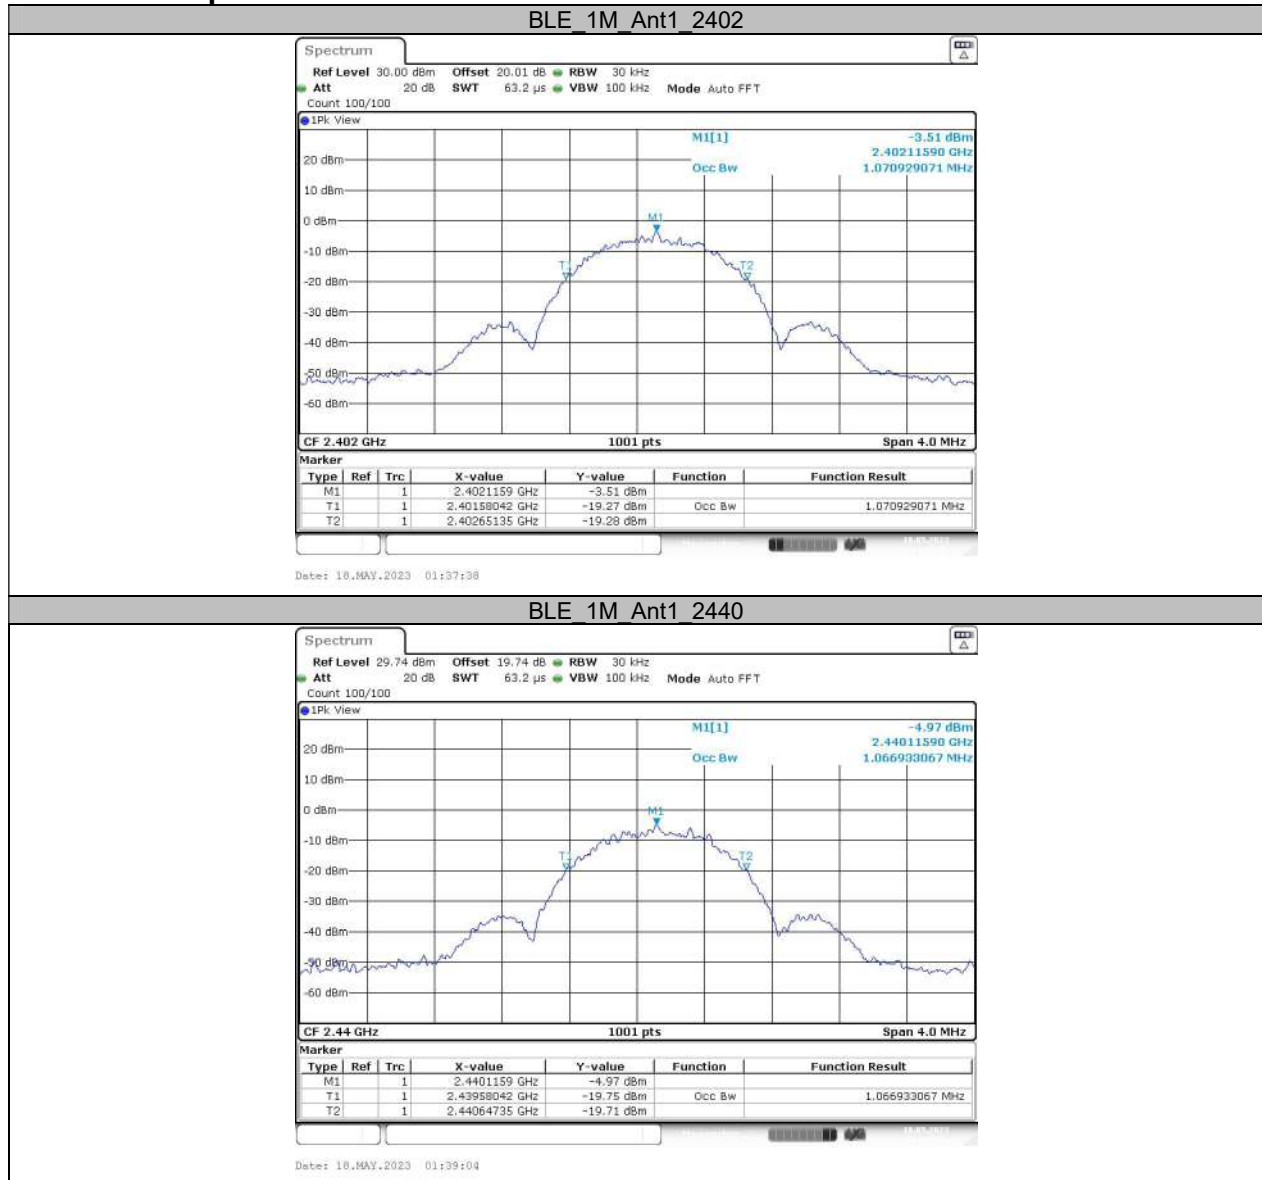


**BLE 1M Ant1 2480**

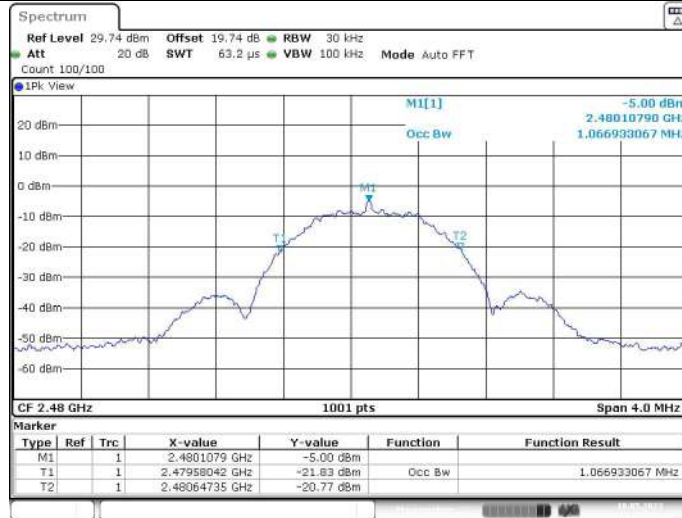


Date: 18.MAY.2023 01:40:51

**BLE 2M Ant1 2402**

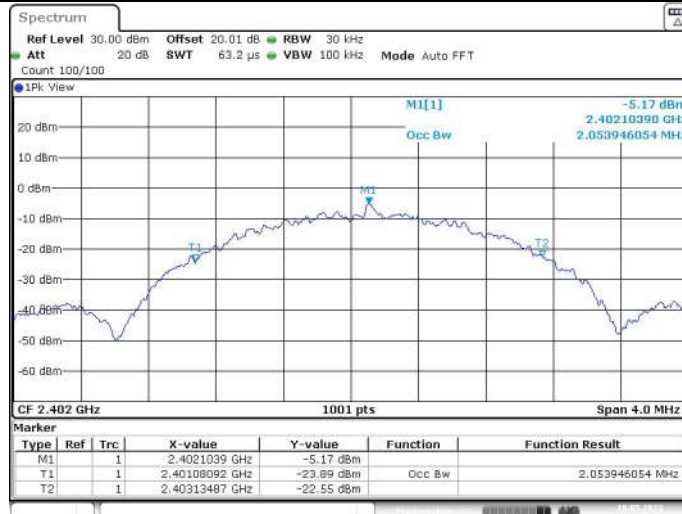

Date: 18.MAY.2023 01:42:08

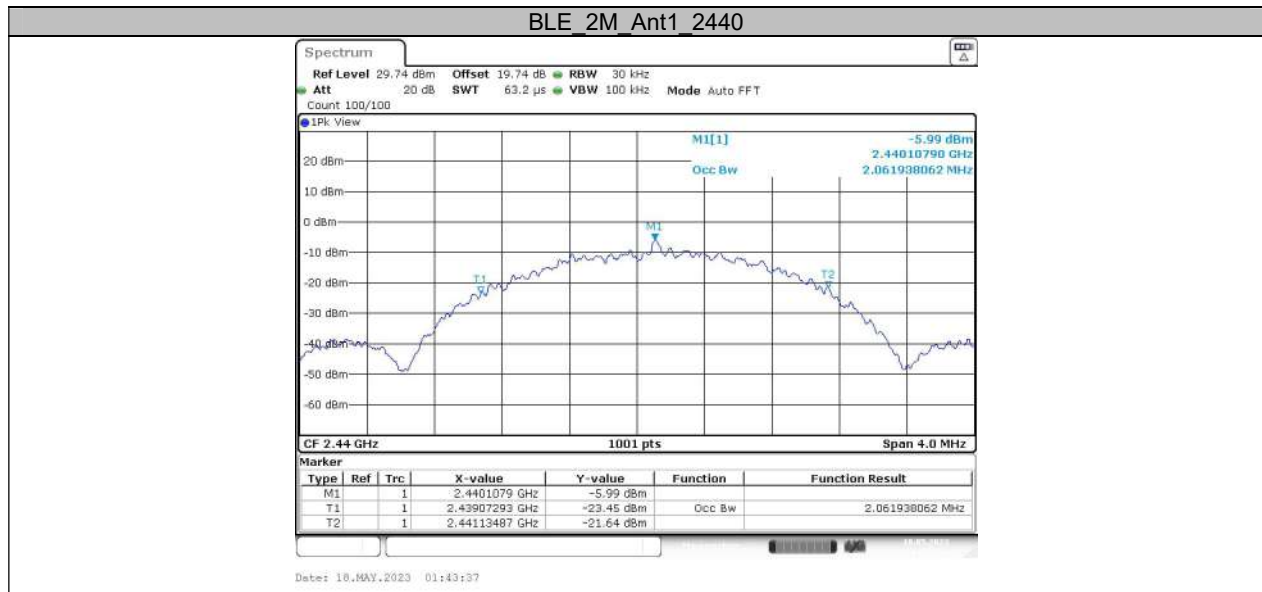

**Appendix C: Maximum conducted output power****Test Result Peak**

Test Mode	Antenna	Frequency[MHz]	Conducted Peak Power[dBm]	Conducted Limit[dBm]	Verdict
BLE_1M	Ant1	2402	-0.72	≤30	PASS
		2440	-1.84	≤30	PASS
		2480	-2.49	≤30	PASS
BLE_2M	Ant1	2402	<b>-0.71</b>	≤30	PASS
		2440	-1.8	≤30	PASS
		2480	-2.43	≤30	PASS


### Test Graphs Peak








**BLE 2M Ant1 2440**

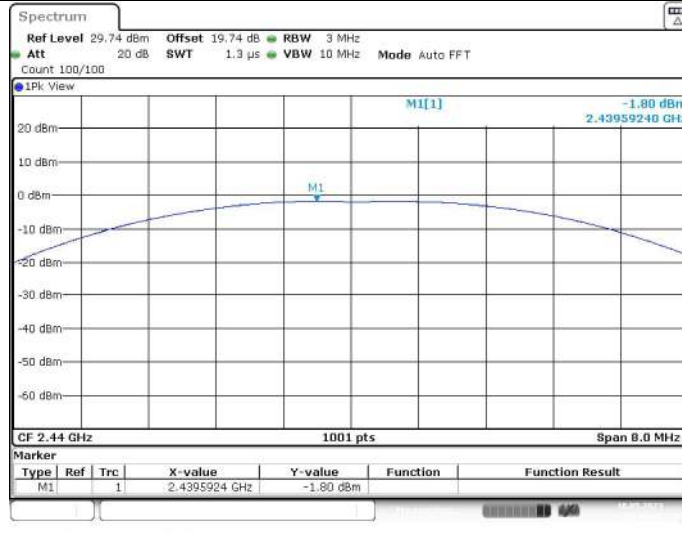

Date: 18.MAY.2023 01:43:43

**BLE 2M Ant1 2480**

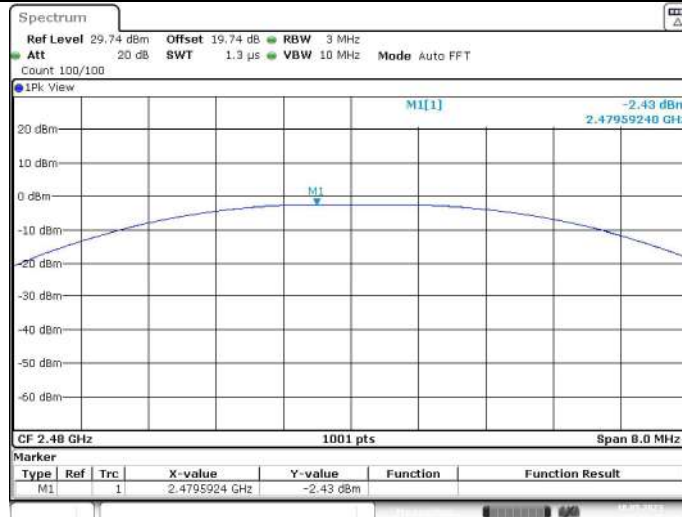


Date: 18.MAY.2023 01:38:48


**Appendix D: Maximum power spectral density****Test Result**

Test Mode	Antenna	Frequency [MHz]	Duty Cycle Factor(dB)	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	0.47	-13.18	≤8.00	PASS
		2440	0.47	-15.03	≤8.00	PASS
		2480	0.47	-15.96	≤8.00	PASS
BLE_2M	Ant1	2402	0.94	-16.97	≤8.00	PASS
		2440	0.94	-17.98	≤8.00	PASS
		2480	0.94	-18.52	≤8.00	PASS

### Test Graphs

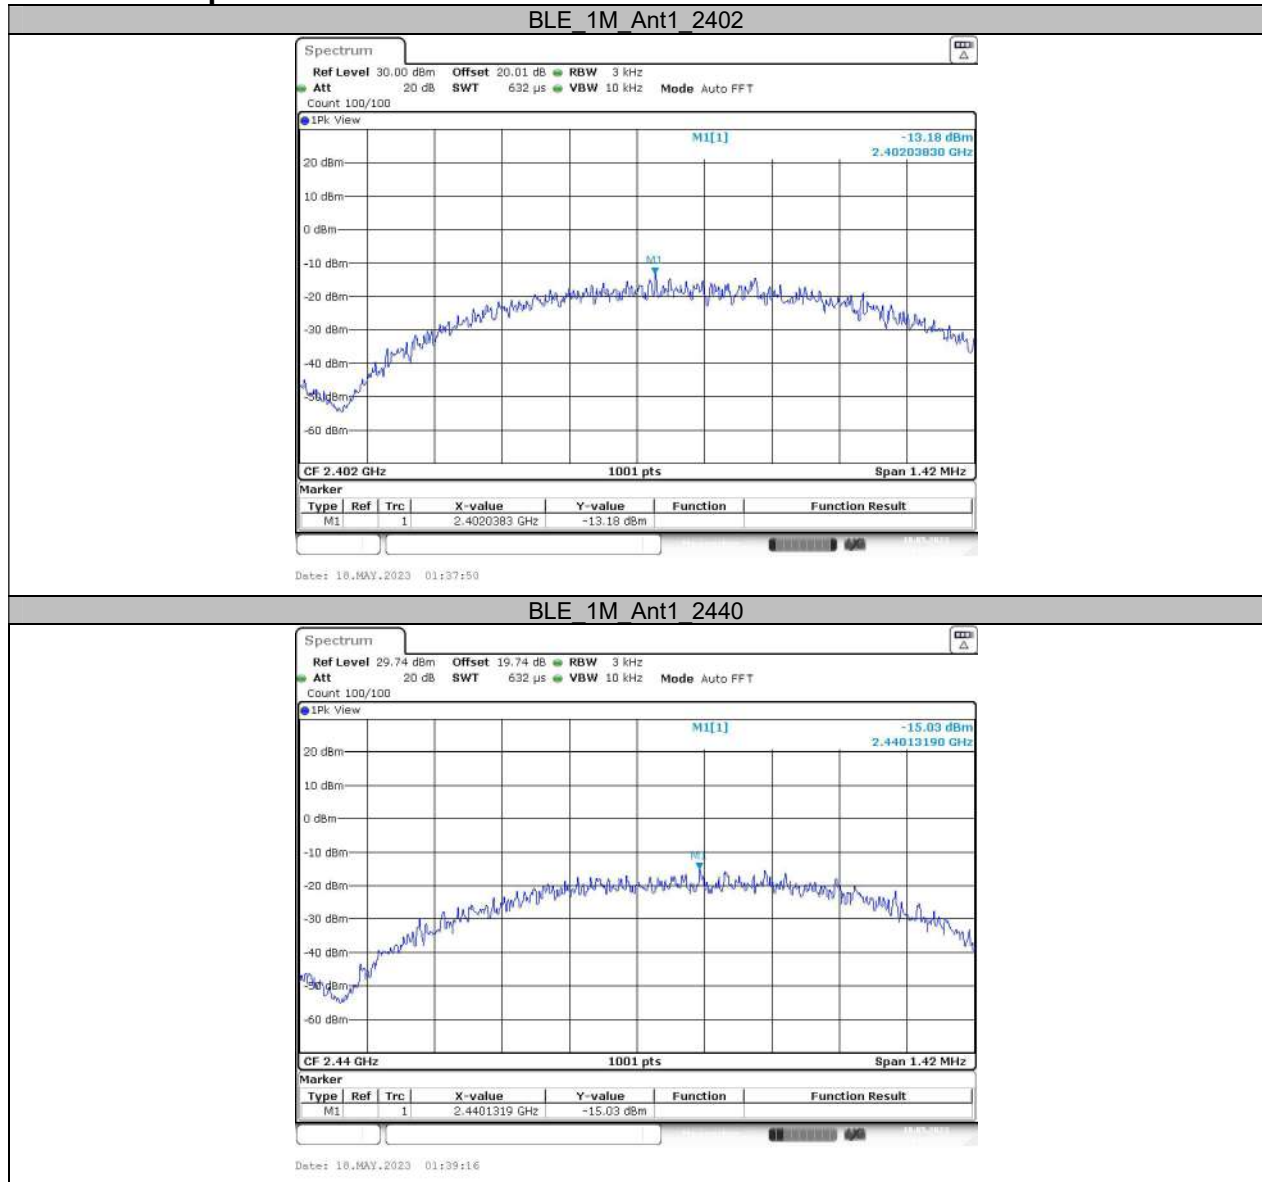


BLE 1M Ant1 2480

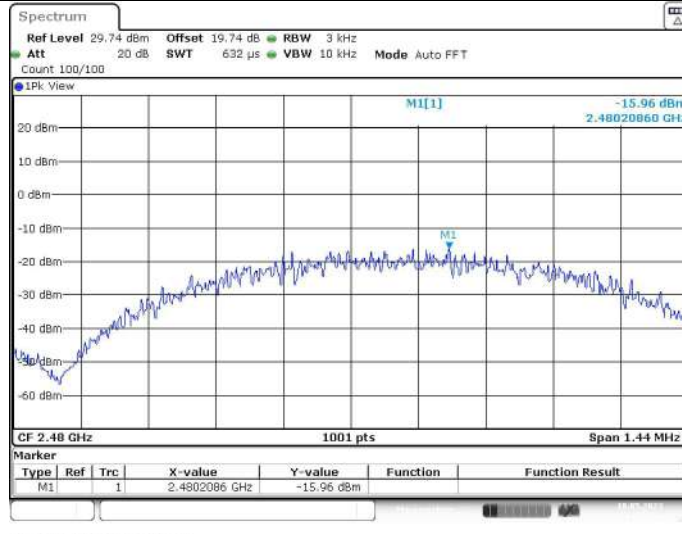


Date: 18.MAY.2023 01:41:03

BLE 2M Ant1 2402

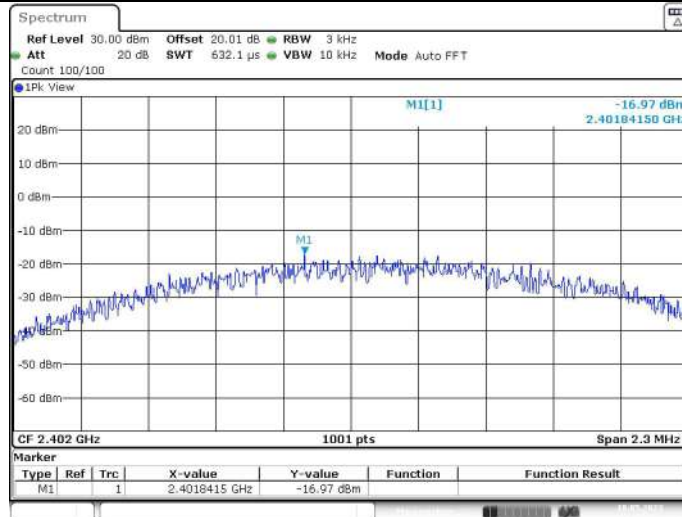


Date: 18.MAY.2023 01:42:20

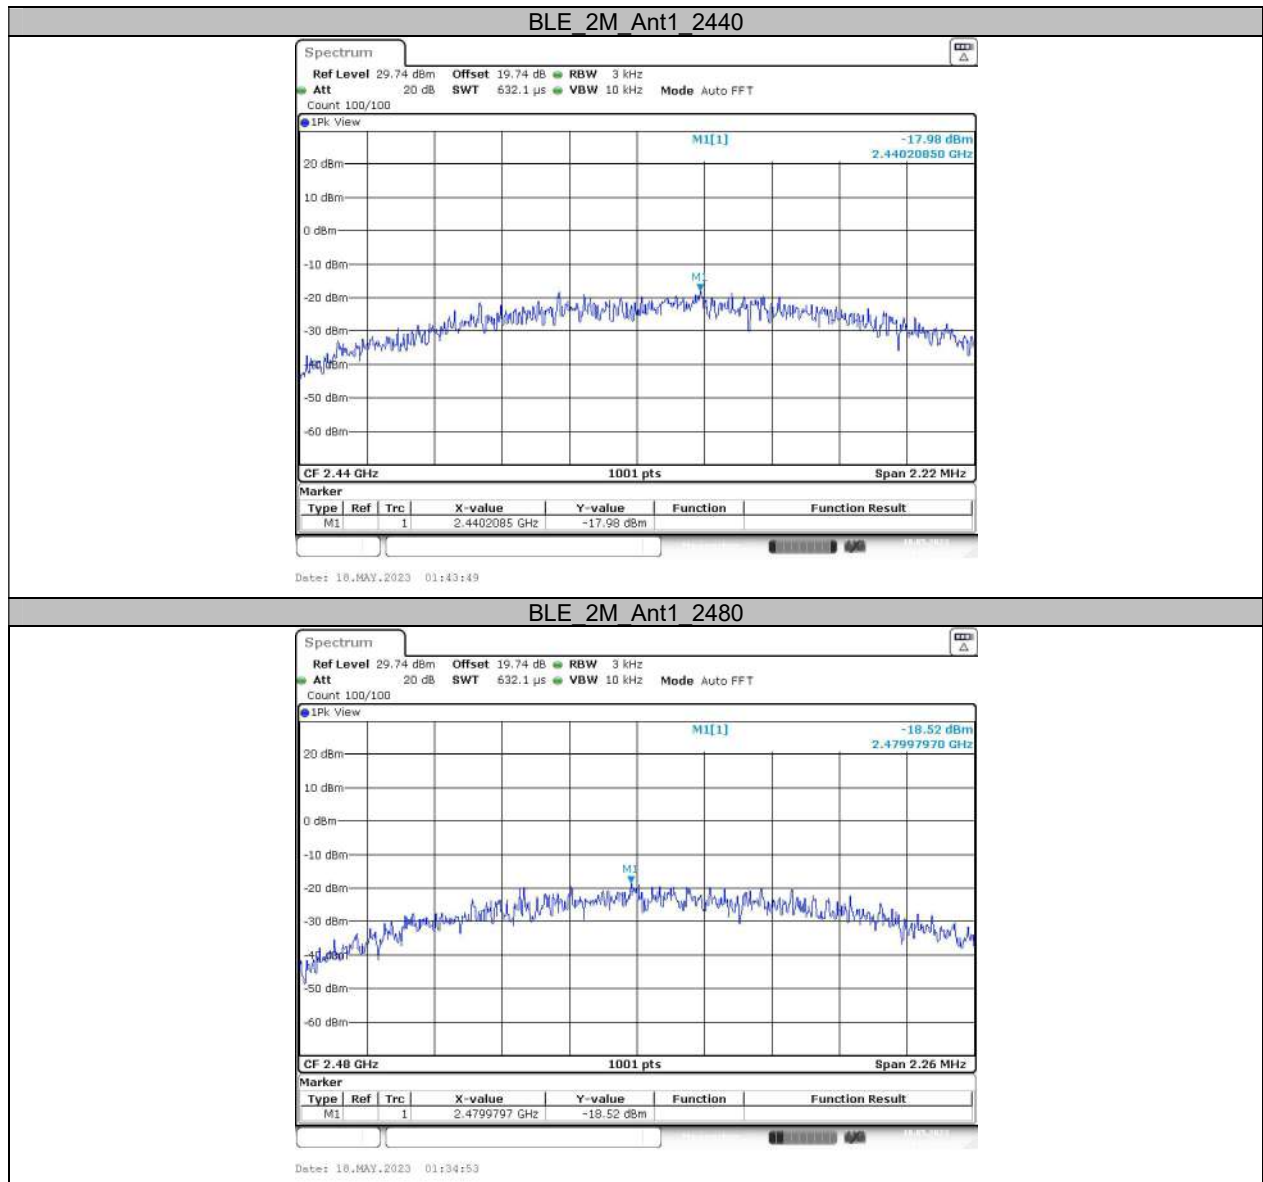

### Appendix E: Band edge measurements

#### Test Graphs



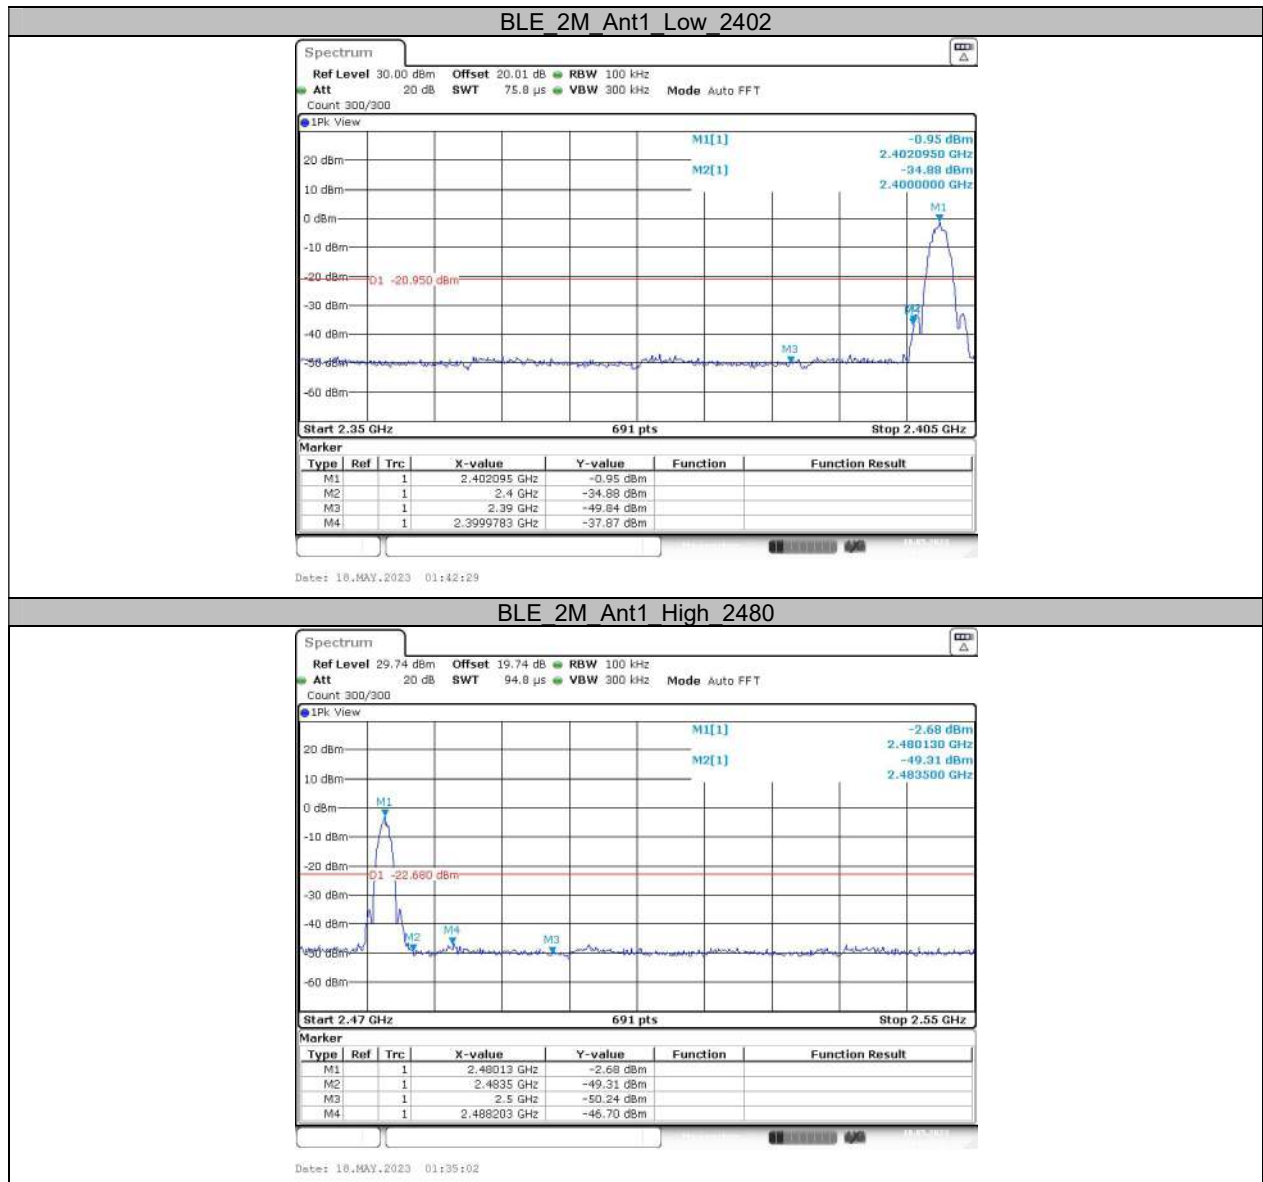



**Appendix F: Duty Cycle****Test Result**

Test Mode	Antenna	Frequency[MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	Duty Cycle Factor[dB]	1/T Minmum VBW(kHz)
BLE_1M	Ant1	2440	2.11	2.23	94.62	0.24	0.47
BLE_2M	Ant1	2440	1.06	1.18	89.83	0.47	0.94

### Test Graphs



\*\*\*\*\* END OF REPORT \*\*\*\*\*