

Health & Life Co. Ltd.

TEST REPORT

SCOPE OF WORK:

47 CFR FCC Part 15.247 – Radio Spectrum report

Model:

HL710H

REPORT NUMBER

210300160TWN-001

ISSUE DATE

May 20, 2021

PAGES

34

DOCUMENT CONTROL NUMBER

GFT-OP-10h (28-Nov-2018)

© 2020 Intertek



Radio Spectrum TEST REPORT

Applicant:	Health & Life Co. Ltd. 9F , No. 186 Jian Yi Road, Zhonghe District, New Taipei City, Taiwan
Product:	Non-Contact Infrared Thermometer
Model No.:	HL710H
FCC ID:	2ABTAHNL71H
Test Method/ Standard:	47 CFR FCC Part 15.247 & ANSI C63.10 2013 KDB 558074 D01 v05r02
Test By:	Intertek Testing Services Taiwan Ltd., Hsinchu Laboratory No. 11, Lane 275, Ko-Nan 1 Street, Chia-Tung Li, Shiang-Shan District, Hsinchu City, Taiwan



Zero Chen

Zero Chen
Engineer

Durant Wei

Durant Wei
Reviewer

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TEST REPORT**Revision History**

Report No.	Issue Date	Revision Summary
210300160TWN-001	May 20, 2021	Original report

Table of Contents

Summary of Test Data	5
1. General Information	6
1.1 Identification of the EUT	6
1.2 Antenna description	6
1.3 Operation mode	7
2. Minimum 6 dB Bandwidth	8
2.1 Instrument Setting.....	8
2.2 Test Procedure	8
2.3 Test Diagram	8
2.4 Limit.....	8
2.5 Operating Environment Condition	9
2.6 Test Results	9
3. Maximum Peak Conducted Output Power	11
3.1 Instrument Setting.....	11
3.2 Test Procedure.....	11
3.3 Test Diagram	11
3.4 Limit.....	11
3.5 Operating Environment Condition	11
3.6 Test Results	12
4. Power Spectral Density.....	13
4.1 Instrument Setting.....	13
4.2 Test Procedure	13
4.3 Test Diagram	13
4.4 Limit.....	13
4.5 Operating Environment Condition	14
4.6 Test Results	14
5. Emissions in Non-Restricted Frequency Bands	16
5.1 Instruments Setting	16
5.2 Test Procedure	16
5.3 Test Diagram	16
5.4 Limit.....	16
5.5 Test Results	17
6. Emissions in Restricted Frequency Bands (Radiated emission measurements)	21
6.1 Instrument Setting.....	21
6.2 Test setup & procedure	21
6.3 Limit.....	23
6.4 Operating Environment Condition	23
6.5 Test Result.....	24

TEST REPORT

7. Emission on Band Edge.....	28
7.1 Instrument Setting.....	28
7.2 Test Procedure	28
7.3 Operating Environment Condition	28
7.4 Test Results	29
8. AC Power Line Conducted Emission	32
Appendix A: Test equipment list.....	33
Appendix B: Measurement Uncertainty	34

Summary of Test Data

Test Requirement	Applicable Rule (Section 15.247)	Result
Minimum 6 dB Bandwidth	15.247(a)(2)	Pass
Maximum Peak Conducted Output Power	15.247(b)(3)	Pass
Power Spectral Density	15.247(e)	Pass
Emissions In Non-Restricted Frequency Bands	15.247(d)	Pass
Emissions In Restricted Frequency Bands (Radiated emission measurements)	15.247(d), 15.205, 15.209	Pass
Emission On The Band Edge	15.247(d), 15.205	Pass
AC Power Line Conducted Emission	15.207	N/A
Antenna Requirement	15.203	Pass

Note: Please note that the test results with statement of conformity, the decision rules which are based on: Safety Testing: the specification, standard or IEC Guide 115.

Other Testing: the specification, standard and not taking into account the measurement uncertainty.

1. General Information**1.1 Identification of the EUT**

Product:	Non-Contact Infrared Thermometer
Model No.:	HL710H
Operating Frequency:	2402 MHz ~ 2480 MHz
Channel Number:	40 channels
Frequency of Each Channel:	2402+2 k, k=0 ~ 39
Rated Power:	DC 3V
Power Cord:	N/A
Sample receiving date:	2021/03/18
Sample condition:	Workable
Test Date(s):	2021/05/07 ~ 2021/05/14

1.2 Antenna description

Antenna Gain : -1.61 dBi
Antenna Type : Printed Antenna
Connector Type : Fixed

1.3 Operation mode

Press button command to select different frequency and modulation.

The signal is maximized through rotation and placement in the two orthogonal axes.



X axis



Y axis



Z axis

After verifying three axes, we found the maximum electromagnetic field was occurred at X axis. The final test data was executed under this configuration.

2. Minimum 6 dB Bandwidth


2.1 Instrument Setting

Spectrum Parameter	Setting
Detector	Peak
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Sweep	Auto couple
Trace	Allow the trace to stabilize.
Span	Between two times and five times the occupied bandwidth
Attenuation	Auto

2.2 Test Procedure

Step 1	The transmitter output was connected to the spectrum analyzer.
Step 2	Test was performed accordance with ANSI C63.10.
Step 3	Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

2.3 Test Diagram

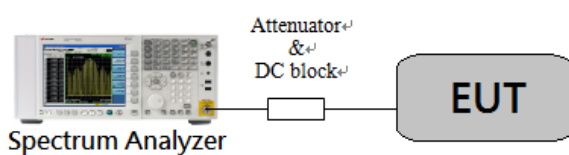

2.4 Limit

The minimum 6 dB bandwidth shall be at least 500 kHz.


TEST REPORT**2.5 Operating Environment Condition**

Temperature (°C) :	26
Relative Humidity (%) :	53
Test Date:	2021/5/14


2.6 Test Results

Mode	Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
BLE 1M	0	2402	0.707	>0.5	Pass
	19	2440	0.741	>0.5	Pass
	39	2480	0.724	>0.5	Pass


Chain0 : 6dB Bandwidth @ Lower Energy Mode Ch 0

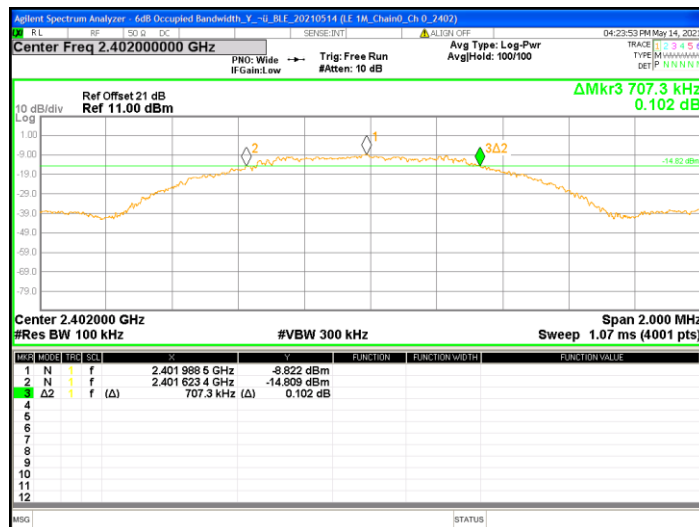

Chain0 : 6dB Bandwidth @ Lower Energy Mode Ch 19

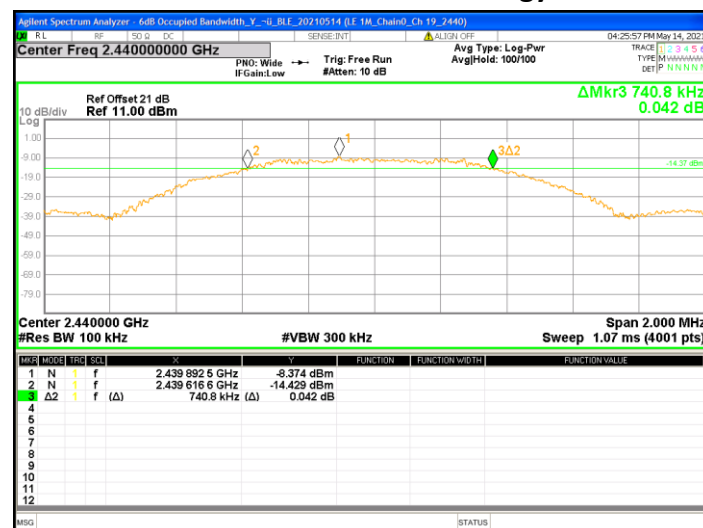

Chain0 : 6dB Bandwidth @ Lower Energy Mode Ch 39

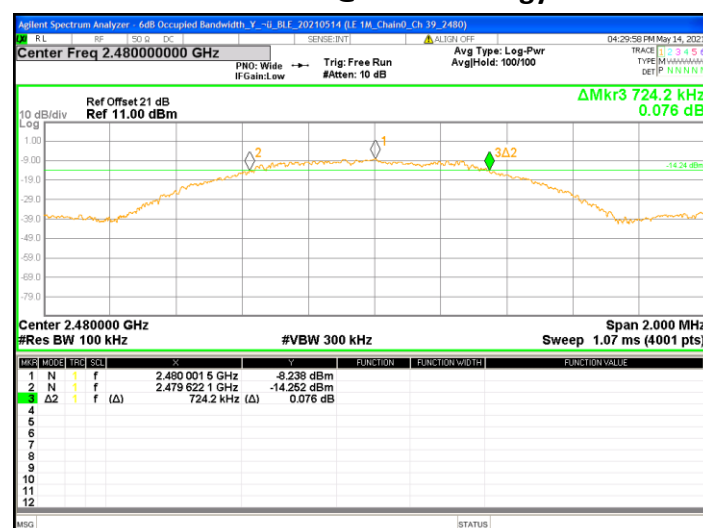

3. Maximum Peak Conducted Output Power


3.1 Instrument Setting

Power Meter Parameter	Setting
Bandwidth	65MHz bandwidth is greater than the EUT emission bandwidth
Detector	Peak & Average

3.2 Test Procedure

The preferred methodology is to use integrated average power measurements, as described in 11.9.2 and 11.13.3 of ANSI C63.10. The peak integrated band power methods of 11.9.1.2 and 11.13.3.2 of ANSI C63.10 are not applicable for FCC compliance testing purposes.

3.3 Test Diagram

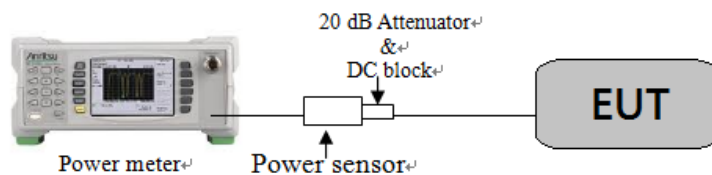

3.4 Limit

For systems using digital modulation in the 2400-2483.5 MHz: 1 Watt (30dBm)

3.5 Operating Environment Condition

Temperature (°C) :	26
Relative Humidity (%) :	53
Test Date:	2021/5/14

TEST REPORT

3.6 Test Results

Mode	Channel	Frequency (MHz)	Output Power [AV] (dBm)	Total Power [AV] (mW)	Maximum Power [PK] (dBm)	Maximum Power [PK] (mW)	Limit (dBm)	Margin (dB)
BLE 1M	0	2402	3.80	2.40	4.45	2.79	30	-25.55
	19	2440	3.22	2.10	4.03	2.53	30	-25.97
	39	2480	2.75	1.88	3.70	2.34	30	-26.30

4. Power Spectral Density


4.1 Instrument Setting

Spectrum Function	Setting
Detector	Peak
RBW	≥ 3 kHz
VBW	$\geq 3 \times$ RBW
Sweep	Auto couple
Trace	Max hold
Span	1.5 times x 6dB bandwidth
Attenuation	Auto

4.2 Test Procedure

Step 1	Test procedure refer to subclause 11.10 of ANSI C63.10.
Step 2	Using the maximum conducted output power in the fundamental emission demonstrates compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
Step 3	Use the peak marker function to determine the maximum amplitude level within the RBW.

4.3 Test Diagram



4.4 Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission

TEST REPORT

4.5 Operating Environment Condition


Temperature (°C) :	26
Relative Humidity (%) :	53
Test Date:	2021/5/14

4.6 Test Results

Mode	Channel	Frequency (MHz)	RBW factor	PSD in 10kHz	PSD in 3kHz		Limit (dBm)	Margin (dB)
					(dBm)	(mW)		
BLE 1M	0	2402	5.23	-12.12	-17.34	0.02	8	-25.34
	19	2440	5.23	-11.41	-16.63	0.02	8	-24.63
	39	2480	5.23	-11.67	-16.89	0.02	8	-24.89

Correction (RBW) Factor in 3kHz = $10\log(10\text{kHz}/3\text{kHz}) = 5.23$


Chain0 : Power Spectral Density @ Lower Energy Mode 1M Ch 0

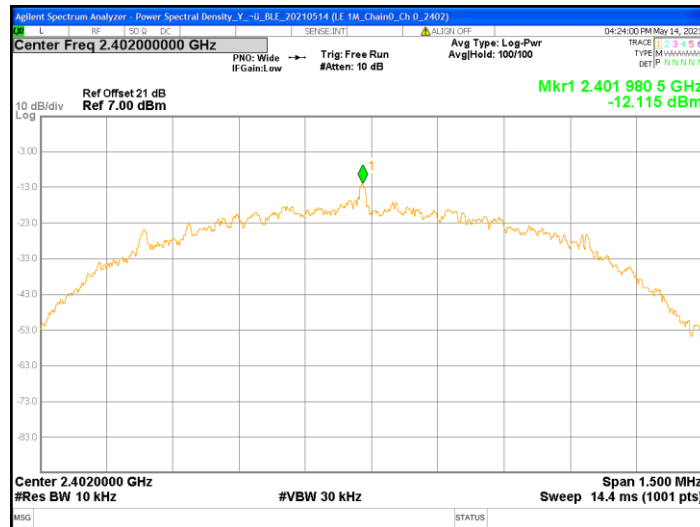

Chain0 : Power Spectral Density @ Lower Energy Mode 1M Ch 19



Chain0 : Power Spectral Density @ Lower Energy Mode 1M Ch 39

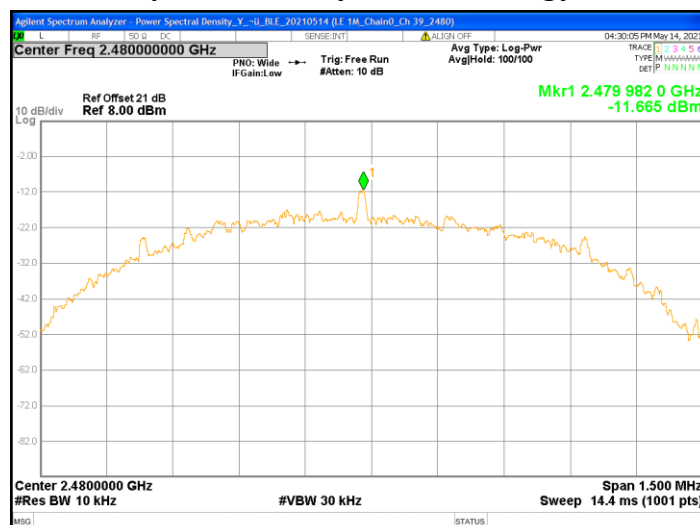

5. Emissions in Non-Restricted Frequency Bands


5.1 Instruments Setting

Spectrum Function	Setting (Reference Level)	Setting (Emission Level)
Detector	Peak	Peak
RBW	≥ 100 kHz	≥ 100 kHz
VBW	$\geq 3 \times$ RBW	$\geq 3 \times$ RBW
Sweep	Auto couple	Auto couple
Trace	Max hold	Max hold
Span	≥ 1.5 time 6dB bandwidth	
Attenuation	Auto	Auto

5.2 Test Procedure

- Step 1 The procedure was used in antenna-port conducted and connected to the spectrum analyzer.
- Step 2 Set instrument center frequency to center frequency.
- Step 3 Use the parameter configured in subclause 11.11 of ANSI C63.10 to measure.
- Step 4 Use the peak marker function to determine the maximum amplitude level.

5.3 Test Diagram

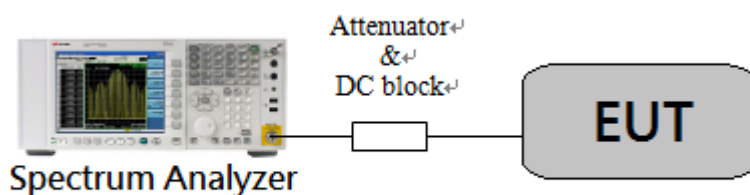


5.4 Limit

The peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz


5.5 Test Results

Temperature (°C) :	26
Relative Humidity (%) :	53
Test Date:	2021/5/14


Chain0 : Conducted Spurious @ Lower Energy Mode 1M Ch 0

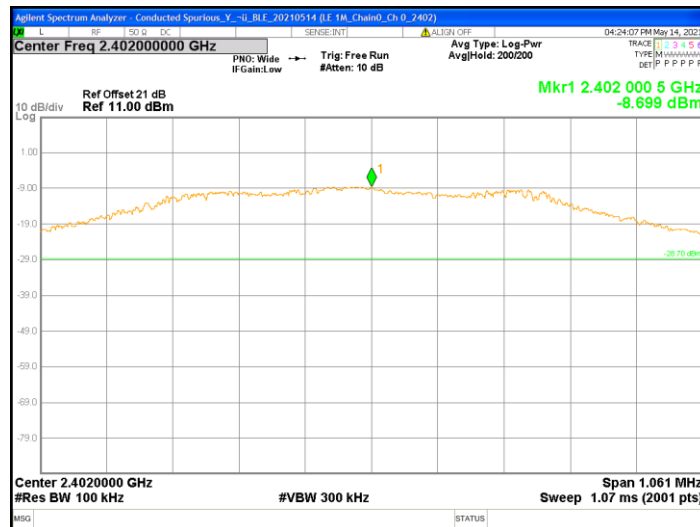


Chain0 : Conducted Spurious @ Lower Energy Mode 1M Ch 0

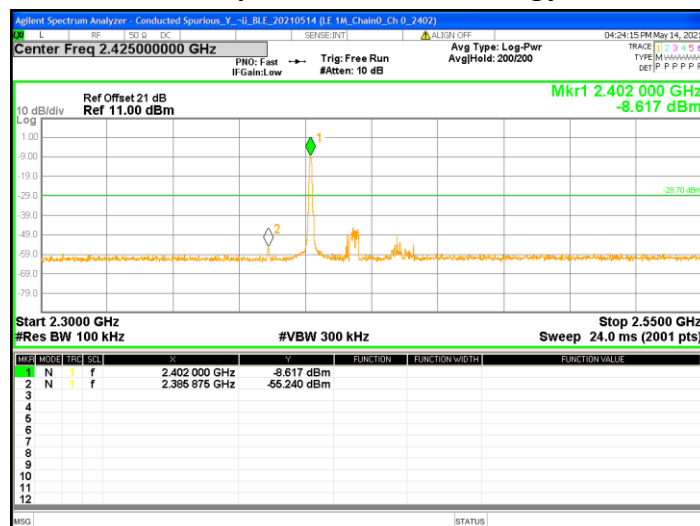


Chain0 : Conducted Spurious @ Lower Energy Mode 1M Ch 0

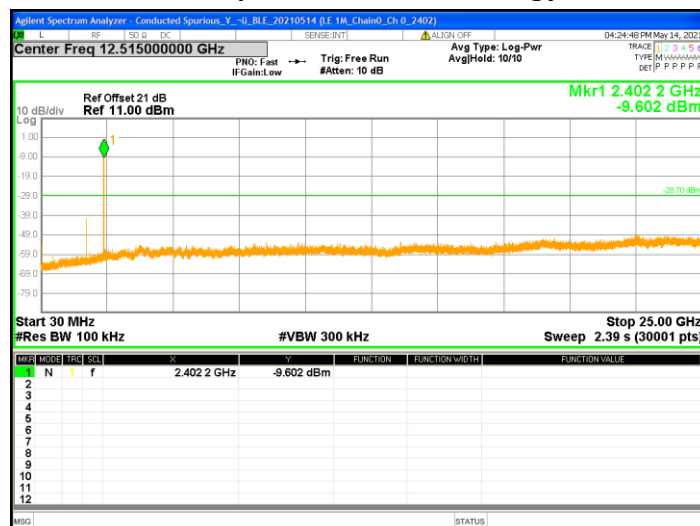


Chain0 : Conducted Spurious @ Lower Energy Mode 1M Ch 19

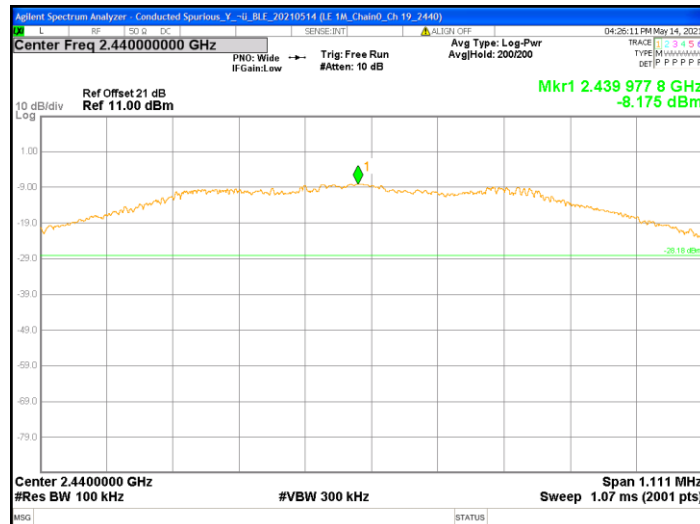


Chain0 : Conducted Spurious @ Lower Energy Mode 1M Ch 19

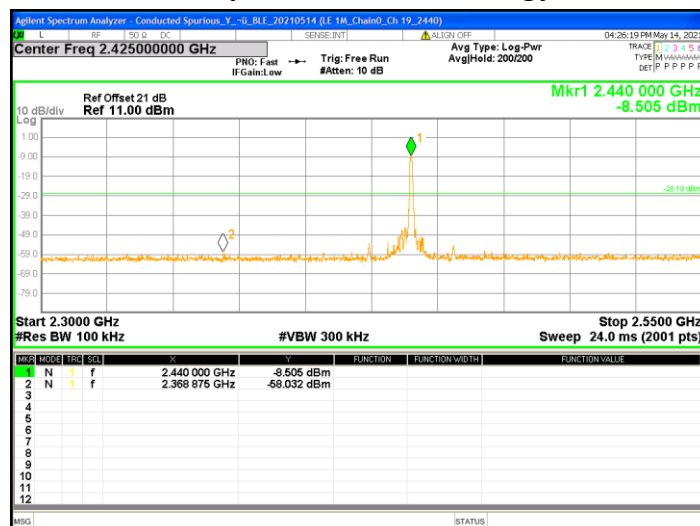


Chain0 : Conducted Spurious @ Lower Energy Mode 1M Ch 19

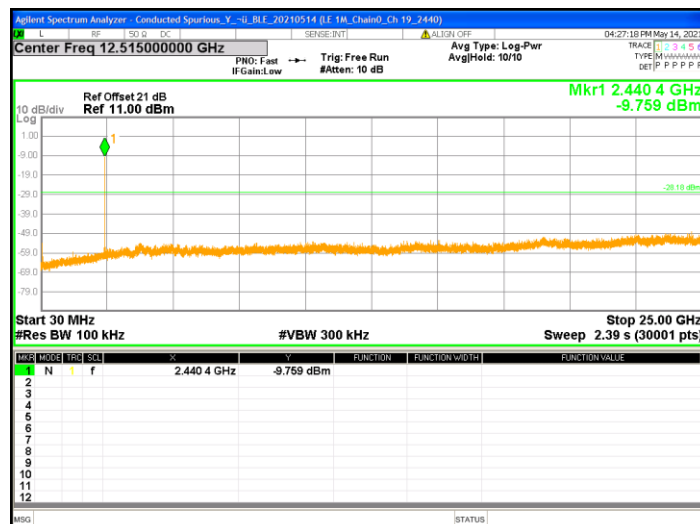


Chain0 : Conducted Spurious @ Lower Energy Mode 1M Ch 39

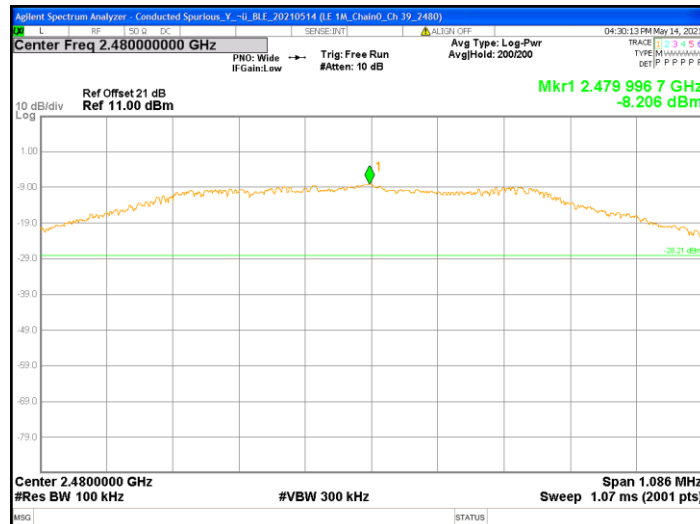

Chain0 : Conducted Spurious @ Lower Energy Mode 1M Ch 39

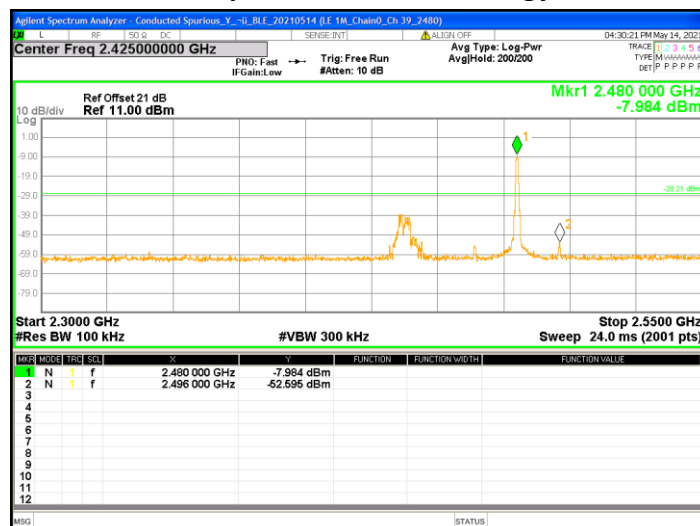

Chain0 : Conducted Spurious @ Lower Energy Mode 1M Ch 39

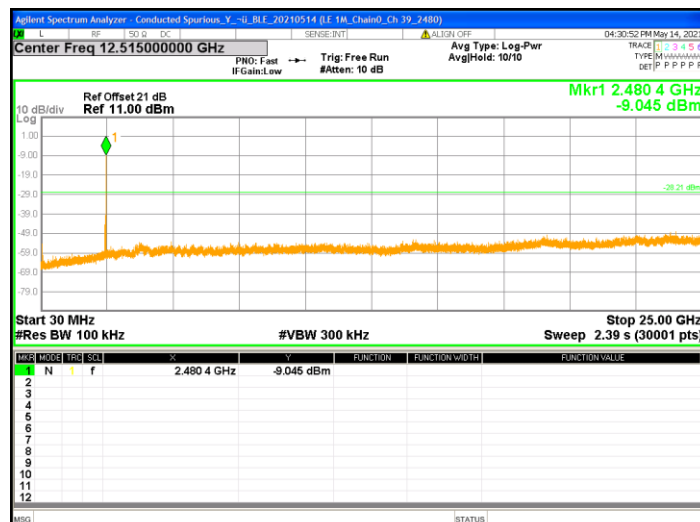


6. Emissions in Restricted Frequency Bands (Radiated emission measurements)

6.1 Instrument Setting


Receiver Function	Setting (Below 1GHz)	Setting (Above 1GHz)
Detector	QP	Peak and Average
RBW	9-150 kHz ; 200-300 Hz 0.15-30 MHz; 9-10 kHz 30-1000 MHz; 100-120 kHz	1MHz
VBW	$\geq 3 \times \text{RBW}$	3MHz & 1/T Minimum VBW
Sweep	Auto couple	Auto couple
Start Frequency	9 kHz	1GHz
Stop Frequency	1 GHz	Tenth harmonic
Attenuation	Auto	Auto

6.2 Test setup & procedure


Radiated emission from 9kHz to 30MHz uses Loop Antenna:

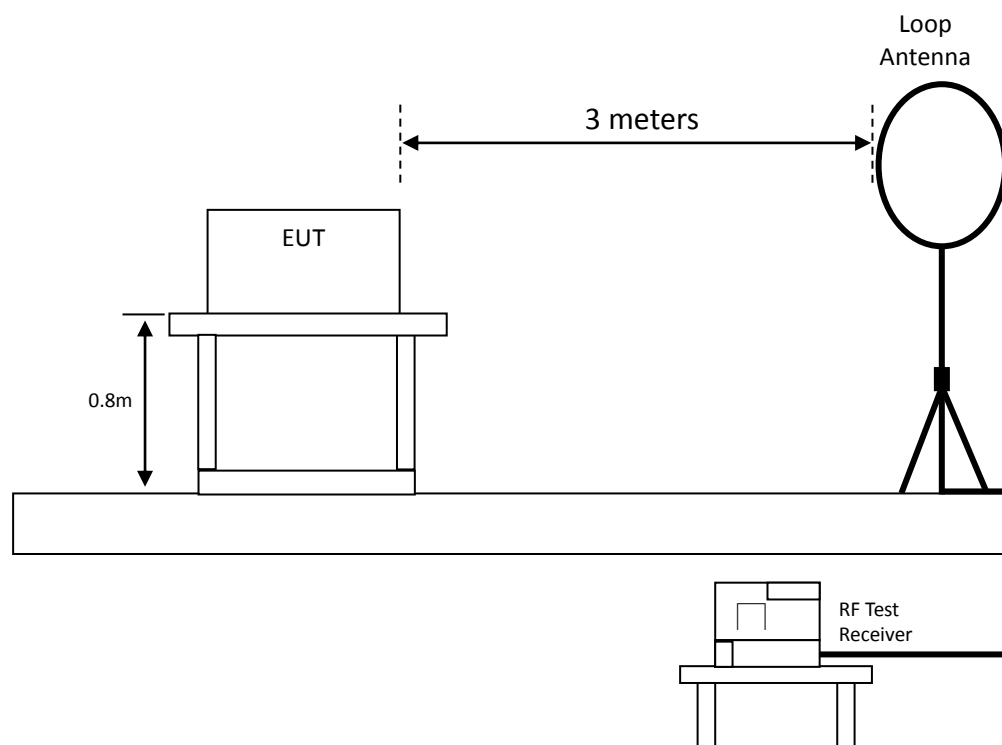

Radiated emission below 1GHz using Bilog Antenna

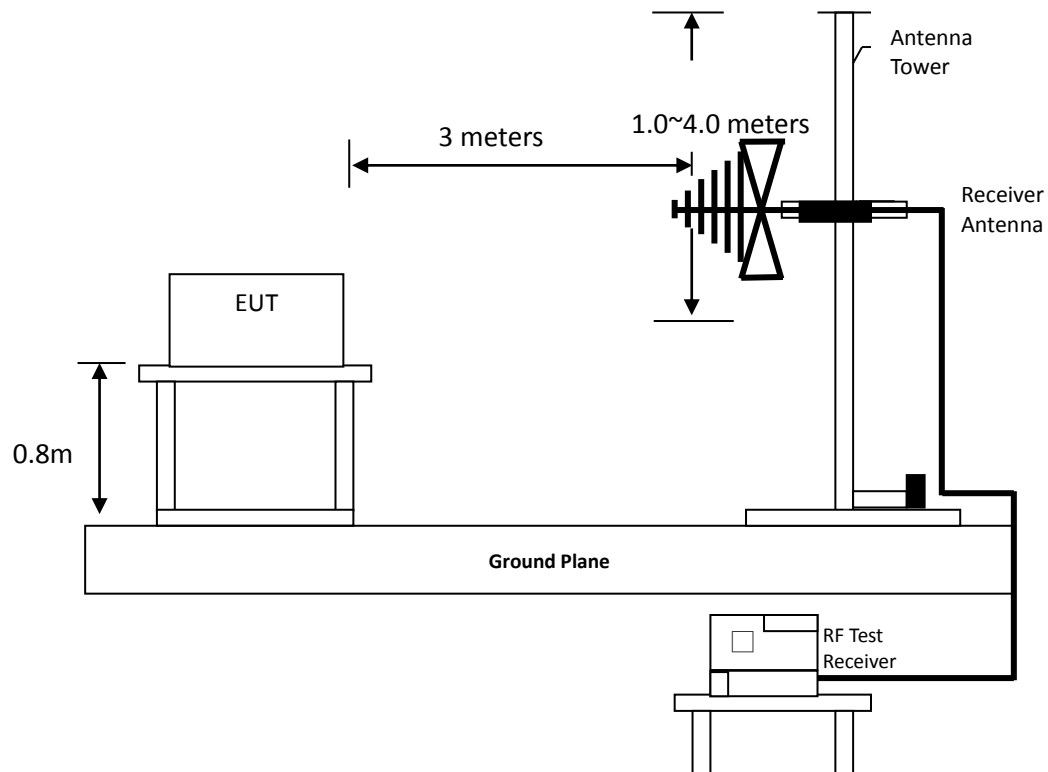

Radiated emission above 1GHz using Horn Antenna

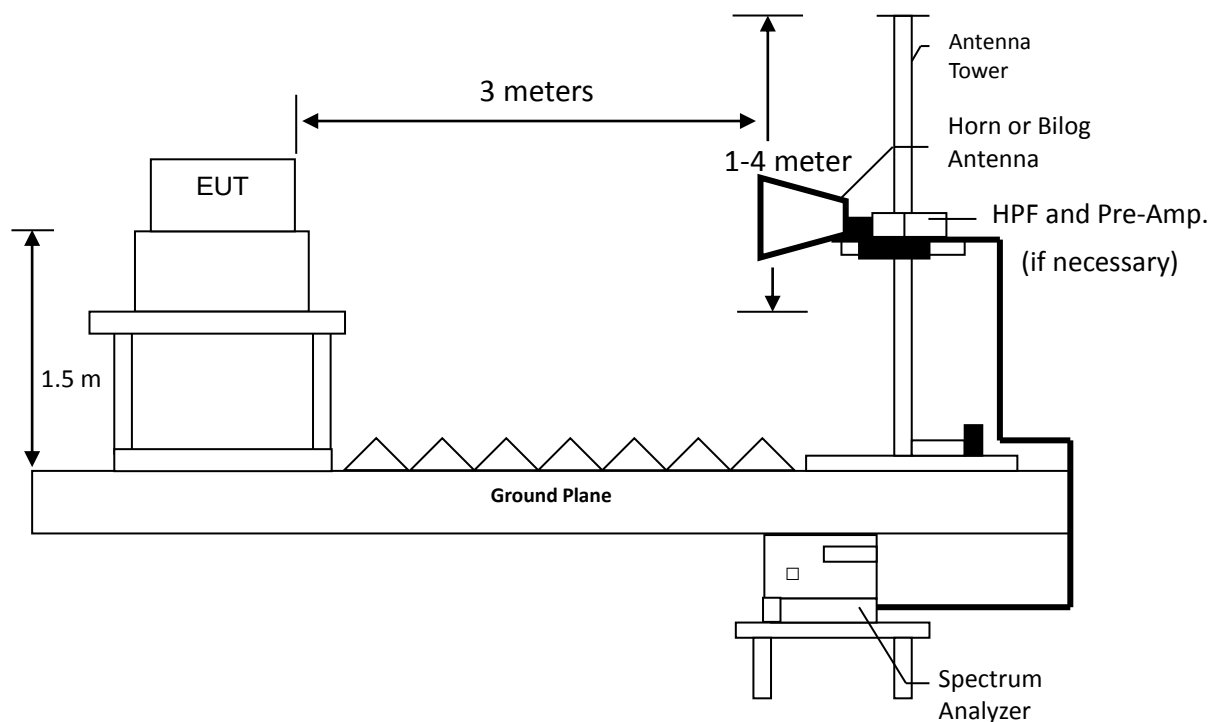

TEST REPORT

Radiated emissions were investigated cover the frequency range from 30MHz to 1000MHz using a receiver RBW of 120kHz record QP reading, and the frequency over 1GHz using a spectrum analyzer RBW of 1MHz and 10Hz VBW record Average reading. (15.209 paragraph), the Peak reading (1 MHz RBW/ 3 MHz VBW) recorded also on the report.

The EUT for testing is arranged on a turntable. If some peripherals apply to the EUT, the peripherals will be connected to EUT and the whole system. During the test, all cables were arranged to produce worst-case emissions. The signal is maximized through rotation. The height of antenna and polarization is changing constantly for exploring for maximum signal level. The height of antenna can be up to 4 meters and down to 1 meter.

The measurement for radiated emission will be done at the distance of three meters unless the signal level is too low to measure at that distance. In the case of the reading under noise floor, a pre-amplifier is used and/or the test is conducted at a closer distance. And then all readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance.

6.3 Limit

Frequency(MHz)	Field Strength(uV/m)	Measurement distance(m)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark:

1. In the above table, the tighter limit applies at the band edges.
2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system

6.4 Operating Environment Condition

Temperature (°C) :	26
Relative Humidity (%) :	53
Test Date:	2021/5/7

TEST REPORT

6.5 Test Result

6.5.1 Measurement results: frequencies 9kHz to 30MHz

The test was performed on EUT under continuously transmitting mode. The worst case occurred at BLE 1M, Ch_0, X-axis.

Antenna Polarity	Frequency (MHz)	Spectrum Analyzer Detector	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
Perpendicular	0.01	AV	18.20	54.38	72.58	128.52	-55.94
Perpendicular	0.16	AV	18.57	50.16	68.73	103.58	-34.85
Perpendicular	0.22	AV	18.75	46.18	64.93	100.80	-35.87
Perpendicular	0.49	AV	19.34	38.10	57.44	93.82	-36.38
Perpendicular	0.55	QP	19.37	37.02	56.39	72.81	-16.42
Perpendicular	0.85	QP	19.64	31.61	51.25	69.03	-17.78

Remark: Corr. Factor = Antenna Factor + Cable Loss

Antenna Polarity	Frequency (MHz)	Spectrum Analyzer Detector	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
Parallel	0.07	AV	19.08	48.88	67.96	110.83	-42.87
Parallel	0.13	AV	18.43	49.21	67.64	105.39	-37.75
Parallel	0.25	AV	18.74	42.23	60.97	99.68	-38.71
Parallel	0.31	AV	18.72	42.45	61.17	97.81	-36.64
Parallel	0.55	QP	19.37	37.02	56.39	72.81	-16.42
Parallel	0.82	QP	19.65	28.60	48.25	69.34	-21.09

Remark: Corr. Factor = Antenna Factor + Cable Loss

TEST REPORT

Antenna Polarity	Frequency (MHz)	Spectrum Analyzer Detector	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
Ground-parallel	0.01	AV	18.20	54.38	72.58	128.52	-55.94
Ground-parallel	0.31	AV	18.72	42.45	61.17	97.81	-36.64
Ground-parallel	0.55	QP	19.37	36.02	55.39	72.81	-17.42
Ground-parallel	0.79	QP	19.64	29.74	49.38	69.66	-20.28
Ground-parallel	0.88	QP	19.63	26.31	45.94	68.72	-22.78
Ground-parallel	0.97	QP	19.54	14.17	33.71	67.88	-34.17

Remark: Corr. Factor = Antenna Factor + Cable Loss

TEST REPORT

6.5.2 Measurement results: frequencies below 1 GHz

The test was performed on EUT under continuously transmitting mode. The worst case occurred at BLE 1M, Ch_0, X-axis.

Antenna Polarity (H/V)	Frequency (MHz)	Spectrum Analyzer Detector	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
Vertical	491.72	QP	26.74	8.90	35.64	46.00	-10.36
Vertical	516.94	QP	27.46	8.81	36.27	46.00	-9.73
Vertical	605.21	QP	29.50	1.46	30.96	46.00	-15.04
Vertical	699.30	QP	30.64	0.56	31.20	46.00	-14.80
Vertical	783.69	QP	32.29	1.37	33.66	46.00	-12.34
Vertical	942.77	QP	34.26	1.42	35.68	46.00	-10.32

Remark: Corr. Factor = Antenna Factor + Cable Loss

Antenna Polarity (H/V)	Frequency (MHz)	Spectrum Analyzer Detector	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
Horizontal	499.48	QP	26.99	4.13	31.12	46.00	-14.88
Horizontal	517.91	QP	27.48	9.43	36.91	46.00	-9.09
Horizontal	613.94	QP	29.72	3.13	32.85	46.00	-13.15
Horizontal	668.26	QP	30.23	2.47	32.70	46.00	-13.30
Horizontal	784.66	QP	32.30	1.59	33.89	46.00	-12.11
Horizontal	891.36	QP	33.20	1.72	34.92	46.00	-11.08

Remark: Corr. Factor = Antenna Factor + Cable Loss

6.5.3 Measurement results: frequency above 1GHz to 25GHz

Mode	Frequency (MHz)	Spectrum Analyzer Detector	Ant. Pol. (H/V)	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
BLE 1M , Ch0	4804	PK	V	8.91	37.19	46.10	74	-27.90
	4804	PK	H	8.91	38.97	47.88	74	-26.12
BLE 1M , Ch19	4880	PK	V	9.24	41.77	51.01	74	-22.99
	4880	PK	H	9.24	42.49	51.73	74	-22.27
BLE 1M , Ch39	4960	PK	V	9.61	44.86	54.47	74	-19.53
	4960	AV	V	9.61	34.14	43.75	54	-10.25
	4960	PK	H	9.61	45.36	54.97	74	-19.03
	4960	AV	H	9.61	32.92	42.53	54	-11.47

Remark: Correction Factor = Antenna Factor + Cable Loss + High Pass Filter Loss - Pre_Amplifier Gain

7. Emission on Band Edge

7.1 Instrument Setting

Spectrum Function	Setting
Detector	Peak and Average
RBW	1MHz
VBW	3MHz & 1/T Minimum VBW
Sweep	Auto couple
Restrict bands	2310 MHz ~ 2390 MHz 2483.5 MHz ~ 2500 MHz
Attenuation	Auto

7.2 Test Procedure

The test procedure is the same as Emissions in Restricted Frequency Bands (Radiated emission measurements).

7.3 Operating Environment Condition


Temperature (°C) :	26
Relative Humidity (%) :	53
Test Date:	2021/5/7

7.4 Test Results


Mode	Frequency (MHz)	Spectrum Analyzer Detector	Ant. Pol. (H/V)	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)	Restricted band (MHz)
BLE 1M	2385.91	PK	V	34.29	16.30	50.59	74	-23.41	2310~2390
	2385.95	AV	V	34.29	13.48	47.77	54	-6.23	
	2495.77	PK	V	34.78	14.44	49.22	74	-24.78	2483.5~2500
	2496.01	AV	V	34.78	9.51	44.29	54	-9.71	

Remark: Correction Factor = Antenna Factor + Cable Loss


Chain0 : Restricted Band Bandedge @ BLE 1M Mode Ch0 PK

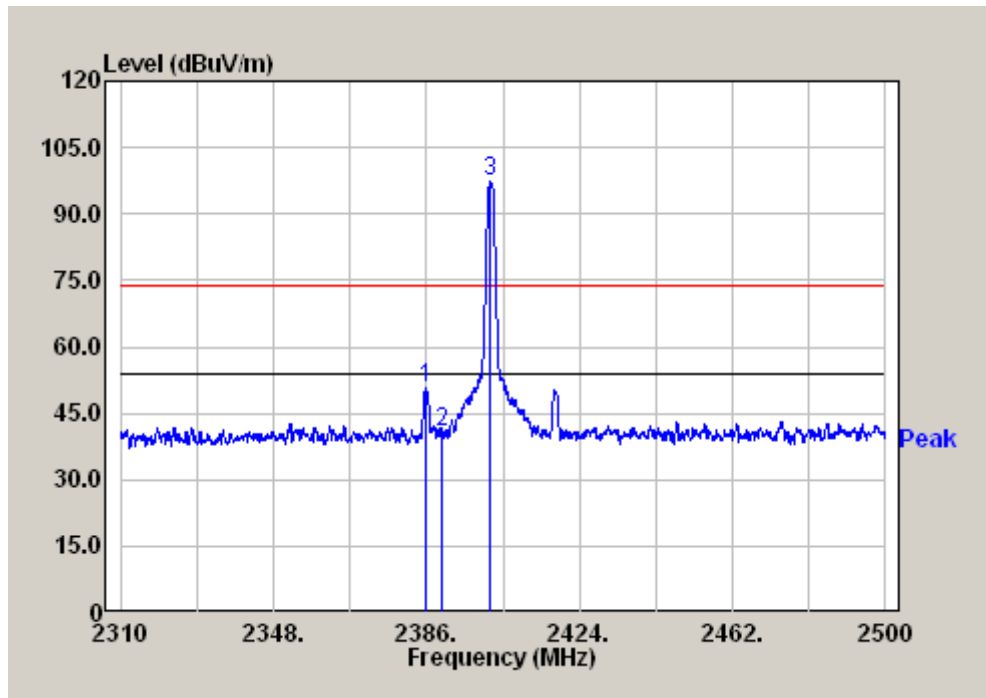


Chain0 : Restricted Band Bandedge @ BLE 1M Mode Ch0 AV

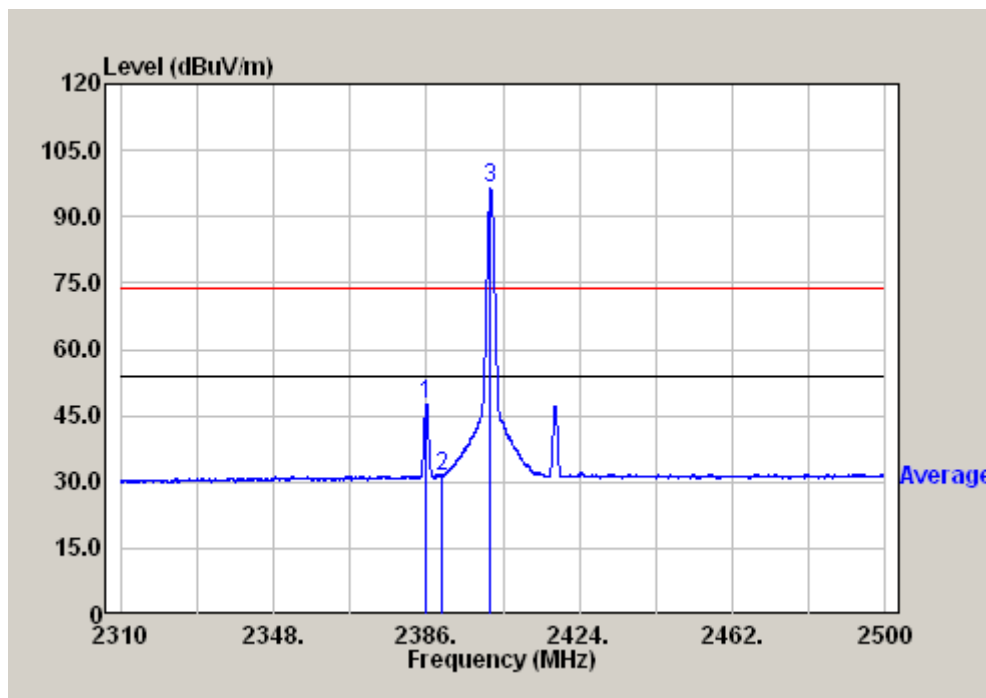

Chain0 : Restricted Band Bandedge @ BLE 1M Mode Ch39 PK

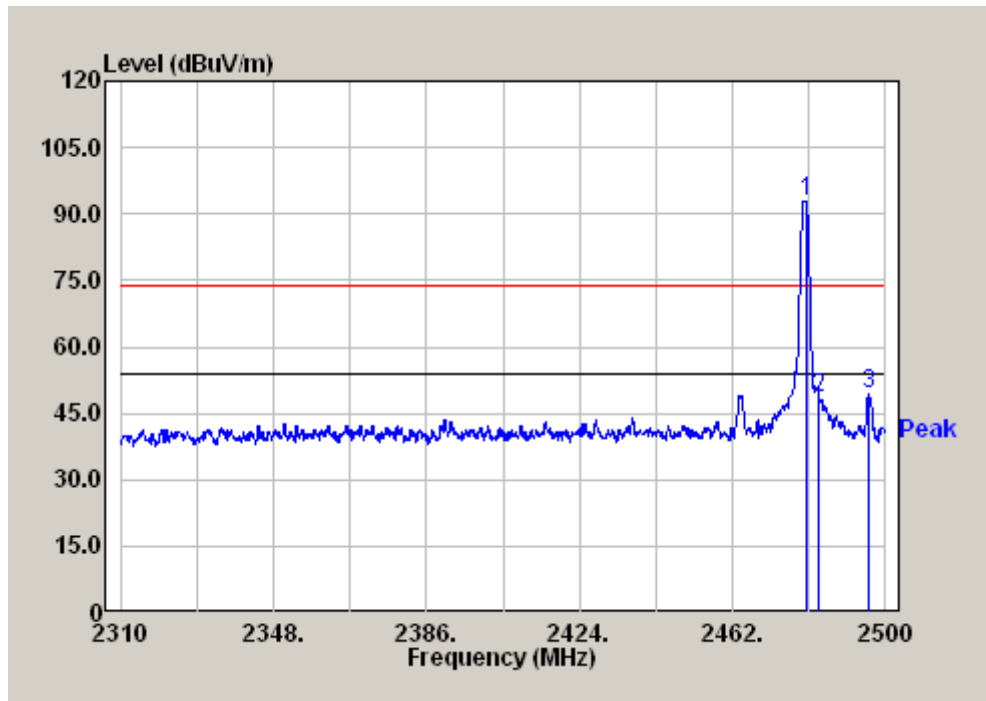

Chain0 : Restricted Band Bandedge @ BLE 1M Mode Ch39 AV

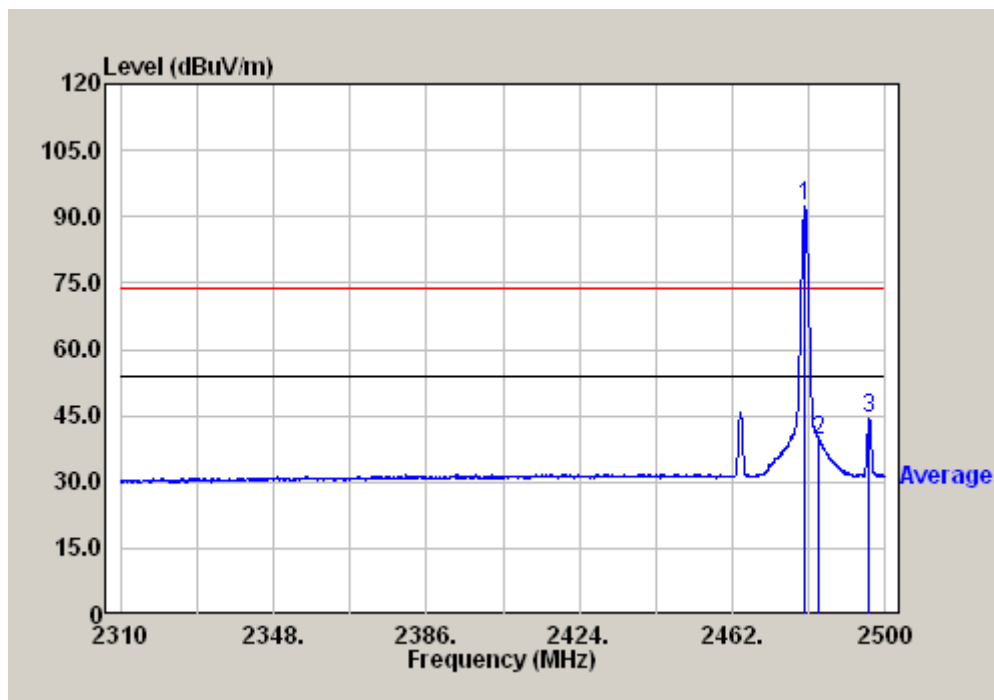

8. AC Power Line Conducted Emission

Since the EUT is not connected to AC source, therefore, the test can be waived.

Appendix A: Test equipment list

Test Equipment/ Test site	Brand	Model No.	Serial No.	Calibration Date	Next Calibration Date
EMI Test Receiver	Rohde & Schwarz	ESR7	101822	2020/08/18	2021/08/17
Spectrum Analyzer	Rohde & Schwarz	FSP30	100137	2020/08/25	2021/08/24
Signal Analyzer	Agilent	N9030A	MY51380492	2020/08/17	2021/08/16
Active Loop Antenna	SCHWARZBECK MESS-ELEKTRONIC	FMZB1519	1519-067	2021/04/14	2022/04/13
Broadband Antenna	SHWARZBECK	VULB 9168	9168-172	2020/06/02	2021/06/01
Horn Antenna	SHWARZBECK	BBHA 9120 D	9120D-456	2021/01/11	2022/01/10
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170159	2020/08/20	2023/08/19
Pre-Amplifier	EMC Co.	EMC12635SE	980205	2021/01/13	2022/01/12
Pre-amplifier	SGH	SGH184	20201124-1	2020/12/16	2021/12/15
Power Meter	Anritsu	ML2495A	0844001	2020/10/28	2021/10/27
Power Sensor	Anritsu	MA2411B	0738452	2020/10/28	2021/10/27
966-2(A) Cable	SUHNER	SUCOLEX 104	295105/4	2021/03/08	2022/03/07
966-2(B) Cable	SUHNER	SUCOFLEX 104P	CB0005	2021/03/08	2022/03/07
RF Cable	SUHNER	SUCOFLEX 102	CB0006	2021/04/29	2022/04/28
Hight Pass Filter	Reactel	7HS-3G/18G-S11	N/A	2020/05/27	2021/05/26
20dB Attenuator	Mini-Circuits	BW-S20W5+	N/A	2020/05/27	2021/05/26
966-2_3m Semi-Anechoic Chamber	966_2	CEM-966_2	N/A	2021/01/15	2022/01/14
Test software	Audix	e3	V9	NCR	NCR

Note: No Calibration Required (NCR).

Appendix B: Measurement Uncertainty

This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of k=2.

Item	Uncertainty
Vertically polarized radiated disturbances from 30MHz~1GHz in a semi-anechoic chamber at a distance of 3m	5.16 dB
Horizontally polarized radiated disturbances from 30MHz~1GHz in a semi-anechoic chamber at a distance of 3m	5.02 dB
Radiated disturbances from 1GHz~18GHz in a semi-anechoic chamber at a distance of 3m	5.17 dB
Vertically polarized Radiated disturbances from 18GHz~26.5GHz in a semi-anechoic chamber at a distance of 1m	2.39 dB
Horizontally polarized Radiated disturbances from 18GHz~26.5GHz in a semi-anechoic chamber at a distance of 1m	2.39 dB
Radiated disturbances from 9kHz~30MHz in a semi-anechoic chamber at a distance of 3m	3.70 dB
Emission on the Band Edge Test	4.32 dB
Occupied Bandwidth	7.78 %
Maximum Peak Conducted Output Power	0.44 dB
Power Spectral Density	1.27 dB
Emissions In Non-Restricted Frequency Bands	1.27 dB
AC Power Line Conducted Emission	3.08 dB