


Appendix A. Test Result of AC Power Line Conducted Emission

Site :HY-SR01
Condition :Line
Mode :TX
test by :Neko

Date: 2025-05-06

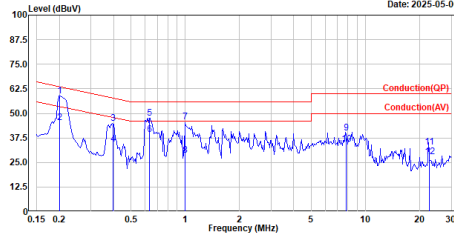


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	dBuV	dB	dBuV	dB	
1	0.200	58.99	63.60	-4.61	49.35	9.64	QP
2	0.200	45.27	53.60	-8.33	35.63	9.64	Average
3	0.398	44.86	57.89	-13.03	35.22	9.64	QP
4	0.398	34.23	47.89	-13.66	24.59	9.64	Average
5	0.635	47.70	56.00	-8.30	38.03	9.67	QP
6	0.635	39.15	46.00	-6.85	29.48	9.67	Average
7	1.001	45.64	56.00	-10.36	35.95	9.69	QP
8	1.001	28.73	46.00	-17.27	19.04	9.69	Average
9	7.797	39.94	60.00	-20.06	29.75	10.19	QP
10	7.797	34.33	50.00	-15.67	24.14	10.19	Average
11	22.596	32.85	60.00	-27.15	22.99	9.86	QP
12	22.596	27.89	50.00	-22.11	18.03	9.86	Average

Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

Site :HY-SR01
Condition :Neutral
Mode :TX
test by :Neko

Date: 2025-05-06

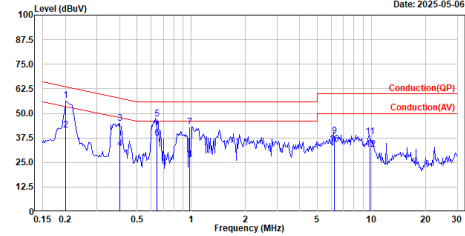


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	dBuV	dB	dBuV	dB	
1	0.200	56.42	63.60	-7.18	46.80	9.62	QP
2	0.200	41.51	53.60	-12.09	31.89	9.62	Average
3	0.402	44.79	57.82	-13.03	35.17	9.62	QP
4	0.402	32.11	47.82	-15.71	22.49	9.62	Average
5	0.648	47.00	56.00	-9.00	37.35	9.65	QP
6	0.648	37.31	46.00	-8.69	27.66	9.65	Average
7	0.983	43.03	56.00	-12.97	33.36	9.67	QP
8	0.983	26.55	46.00	-19.45	16.88	9.67	Average
9	6.198	38.44	60.00	-21.56	28.32	10.12	QP
10	6.198	34.20	50.00	-15.80	24.08	10.12	Average
11	9.794	38.25	60.00	-21.75	28.02	10.23	QP
12	9.794	31.52	50.00	-18.48	21.29	10.23	Average

Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

Appendix B. Test Result of Emission Bandwidth

Channel No.	Frequency (MHz)	Measurement Level (Hz)	Required Limit (MHz)	Result
01	13.56	103.900	--	--

Channel 01

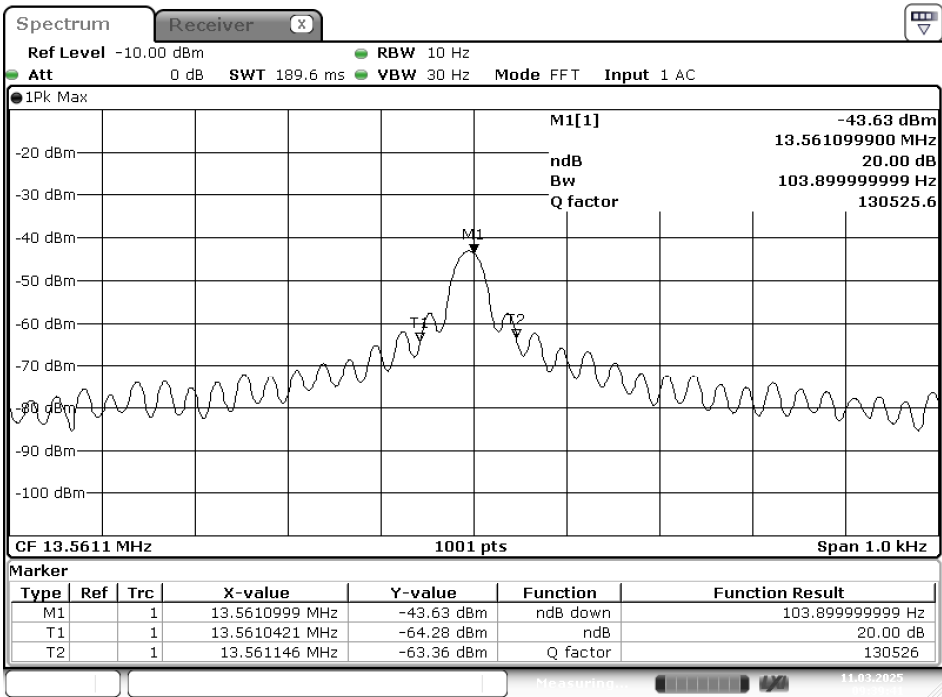

Date: 11.MAR.2025 09:39:41


Appendix C. Test Result of Frequency Stability

Temperature (°C)	Voltage (V)	Observe Time	Declared Frequency (MHz)	Read Frequency (MHz)	Tolerance (%)	Limit (%)
20	12	start	13.56	13.55921	-0.005826	± 0.01 %
		2mins	13.56	13.55966	-0.002507	
		5mins	13.56	13.55946	-0.003982	
		10mins	13.56	13.55917	-0.006121	
20	13.8	start	13.56	13.55962	-0.002802	± 0.01 %
		2mins	13.56	13.55958	-0.003097	
		5mins	13.56	13.55904	-0.007080	
		10mins	13.56	13.55966	-0.002507	
20	10.2	start	13.56	13.55926	-0.005457	± 0.01 %
		2mins	13.56	13.55960	-0.002950	
		5mins	13.56	13.55920	-0.005900	
		10mins	13.56	13.55946	-0.003982	
60	12	start	13.56	13.55970	-0.002212	± 0.01 %
		2mins	13.56	13.55935	-0.004794	
		5mins	13.56	13.55922	-0.005752	
		10mins	13.56	13.55927	-0.005383	
50	12	start	13.56	13.55957	-0.003171	± 0.01 %
		2mins	13.56	13.55954	-0.003392	
		5mins	13.56	13.55934	-0.004867	
		10mins	13.56	13.55953	-0.003466	
40	12	start	13.56	13.55945	-0.004056	± 0.01 %
		2mins	13.56	13.55923	-0.005678	
		5mins	13.56	13.55952	-0.003540	
		10mins	13.56	13.55905	-0.007006	
30	12	start	13.56	13.55918	-0.006047	± 0.01 %
		2mins	13.56	13.55971	-0.002139	
		5mins	13.56	13.55934	-0.004867	
		10mins	13.56	13.55963	-0.002729	
10	12	start	13.56	13.55927	-0.005383	± 0.01 %
		2mins	13.56	13.55915	-0.006268	
		5mins	13.56	13.55928	-0.005310	
		10mins	13.56	13.55931	-0.005088	

0	12	start	13.56	13.55948	-0.003835	± 0.01 %
		2mins	13.56	13.55926	-0.005457	
		5mins	13.56	13.55928	-0.005310	
		10mins	13.56	13.55967	-0.002434	
-10	12	start	13.56	13.55976	-0.001770	± 0.01 %
		2mins	13.56	13.55953	-0.003466	
		5mins	13.56	13.55966	-0.002507	
		10mins	13.56	13.55952	-0.003540	
-20	12	start	13.56	13.55903	-0.007153	± 0.01 %
		2mins	13.56	13.55963	-0.002729	
		5mins	13.56	13.55939	-0.004499	
		10mins	13.56	13.55952	-0.003540	

Appendix D. Test Result of Field Strength of Fundamental Emissions and Spectrum Mask


Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_Fundamental_13.56MHz_X
Test by :Caster

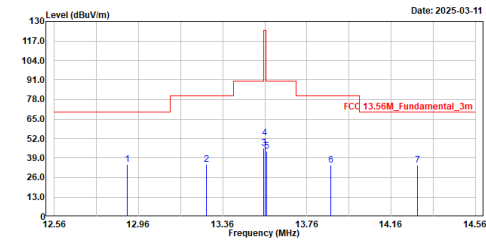

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	12.907	34.61	69.50	-34.89	12.89	21.72	QP
2	13.281	35.04	80.50	-45.46	13.40	21.64	QP
3	13.553	45.52	90.47	-44.95	23.93	21.59	QP
4	13.560	52.39	124.00	-71.61	30.80	21.59	QP
5	13.568	43.49	90.47	-46.98	21.91	21.58	QP
6	13.873	34.42	80.50	-46.08	12.89	21.53	QP
7	14.285	34.54	69.50	-34.96	13.01	21.53	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.


Site :HY-CB02
Condition :3m ,Vertical
mode :TX_Fundamental_13.56MHz_X
Test by :Caster

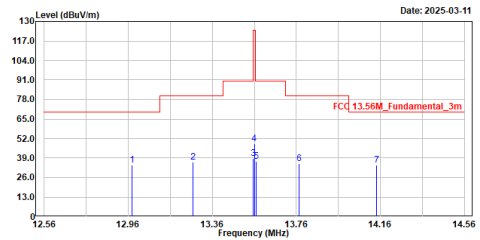

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	12.977	34.14	69.50	-35.36	12.44	21.70	QP
2	13.269	36.06	80.50	-44.44	14.41	21.65	QP
3	13.553	38.75	90.47	-51.72	17.16	21.59	QP
4	13.560	48.39	124.00	-75.61	26.80	21.59	QP
5	13.568	36.97	90.47	-53.50	15.39	21.58	QP
6	13.773	35.42	80.50	-45.08	13.87	21.55	QP
7	14.143	34.41	69.50	-35.09	12.90	21.51	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.


Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_Fundamental_13.56MHz_Y
Test by :Caster

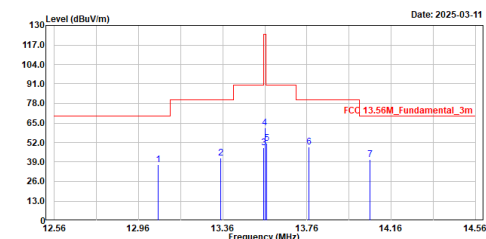

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	13.055	37.48	69.50	-32.02	15.79	21.69	QP
2	13.349	41.58	80.50	-38.92	19.95	21.63	QP
3	13.553	48.59	90.47	-41.88	27.00	21.59	QP
4	13.560	61.59	124.00	-62.41	40.00	21.59	QP
5	13.568	51.68	90.47	-38.79	30.10	21.58	QP
6	13.771	48.91	80.50	-31.59	27.36	21.55	QP
7	14.059	40.92	69.50	-28.58	19.41	21.51	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.


Site :HY-CB02
Condition :3m ,Vertical
mode :TX_Fundamental_13.56MHz_Y
Test by :Caster

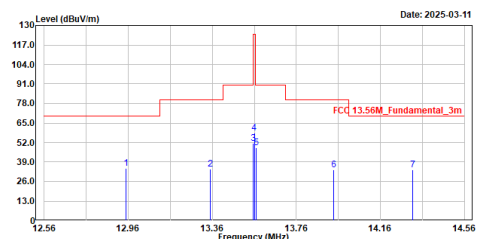

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	12.951	35.03	69.50	-34.47	13.32	21.71	QP
2	13.349	34.12	80.50	-46.38	12.49	21.63	QP
3	13.553	51.37	90.47	-39.10	29.78	21.59	QP
4	13.560	58.39	124.00	-65.61	36.80	21.59	QP
5	13.568	48.60	90.47	-41.87	27.01	21.59	QP
6	13.939	33.74	80.50	-46.76	12.23	21.51	QP
7	14.315	33.78	69.50	-35.72	12.25	21.53	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.


Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_Fundamental_13.56MHz_Z
Test by :Caster

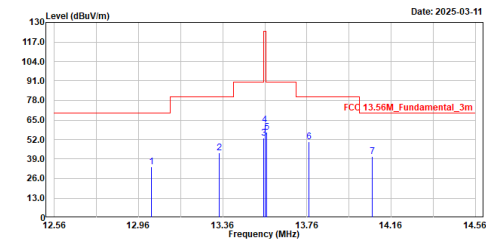

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	13.021	33.83	69.50	-35.67	12.13	21.70	QP
2	13.345	43.14	80.50	-37.36	21.51	21.63	QP
3	13.553	53.09	90.47	-37.38	31.50	21.59	QP
4	13.560	61.89	124.00	-62.11	40.30	21.59	QP
5	13.568	57.09	90.47	-33.38	35.50	21.59	QP
6	13.771	50.66	80.50	-29.84	29.11	21.55	QP
7	14.069	40.59	69.50	-28.91	19.08	21.51	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_Fundamental_13.56MHz_Z
Test by :Caster

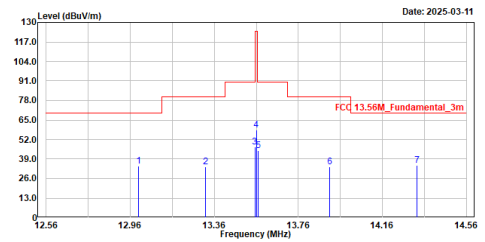


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	13.001	34.45	69.50	-35.05	12.75	21.70	QP
2	13.317	34.05	80.50	-46.45	12.41	21.64	QP
3	13.553	47.32	90.47	-43.15	25.73	21.59	QP
4	13.560	58.49	124.00	-65.51	36.90	21.59	QP
5	13.569	44.65	90.47	-45.82	23.06	21.59	QP
6	13.909	34.04	80.50	-46.46	12.52	21.52	QP
7	14.325	34.64	69.50	-34.86	13.11	21.53	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Appendix E. Test Result of Radiated Emission


Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_9k~30MHz
Test by :Caster

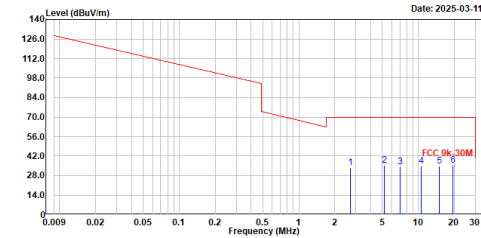

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2.697	33.73	69.50	-35.77	14.18	19.63	QP
2	5.160	35.56	69.50	-33.94	15.18	20.38	QP
3	7.080	34.56	69.50	-34.94	13.27	21.29	QP
4	10.536	34.78	69.50	-34.72	13.02	21.76	QP
5	15.055	34.87	69.50	-34.63	13.25	21.62	QP
6	19.359	35.29	69.50	-34.21	12.59	22.70	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.


Site :HY-CB02
Condition :3m ,Vertical
mode :TX_9k~30MHz
Test by :Caster

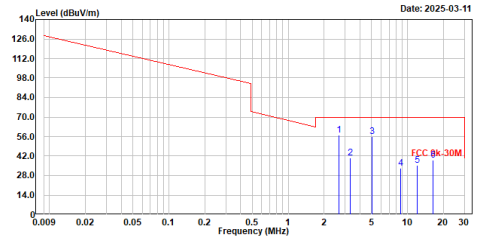

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2.675	57.21	69.50	-12.29	37.58	19.63	QP
2	3.303	40.55	69.50	-28.95	20.86	19.69	QP
3	5.077	55.89	69.50	-13.61	35.61	20.28	QP
4	8.814	33.52	69.50	-35.98	12.32	21.20	QP
5	11.996	35.37	69.50	-34.13	13.47	21.90	QP
6	16.460	39.20	69.50	-30.30	17.06	22.14	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_30M~1G
Test by :Caster

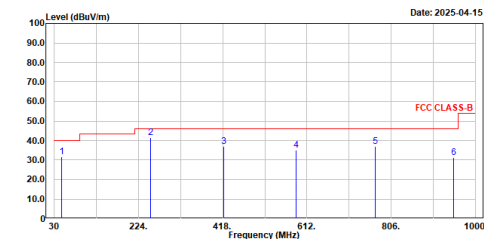

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	46.490	31.61	40.00	-8.39	55.61	-24.00	QP
2	252.130	41.41	46.00	-4.59	66.89	-25.48	QP
3	419.940	36.94	46.00	-9.06	57.54	-20.60	QP
4	587.750	35.21	46.00	-10.79	51.70	-16.49	QP
5	769.140	37.01	46.00	-8.99	50.49	-13.48	QP
6	950.530	31.36	46.00	-14.64	42.77	-11.41	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_30M~1G
Test by :Caster

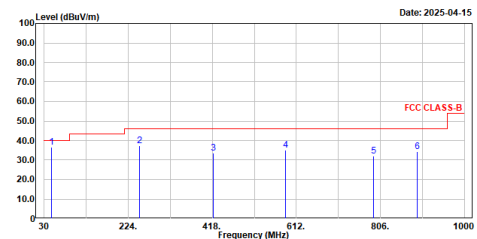


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	46.490	36.50	40.00	-3.50	60.50	-24.00	QP
2	250.190	37.43	46.00	-8.57	62.96	-25.53	QP
3	419.940	33.64	46.00	-12.36	54.24	-20.60	QP
4	587.750	35.25	46.00	-10.75	51.74	-16.49	QP
5	789.510	31.97	46.00	-14.03	45.30	-13.33	QP
6	890.390	34.45	46.00	-11.55	46.92	-12.47	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Appendix F. Test Result of Radiated Emissions Co-location


Site :HY-CB02
Condition :3m ,Horizontal
mode :NFC_TX+11G_TX_2437MHz+BLE2M_TX_2440MHz
Test by :Rock

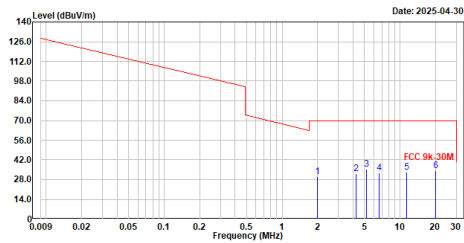

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1.981	29.95	69.50	-39.55	10.25	19.70	QP
2	4.247	32.15	69.50	-37.35	12.18	19.97	QP
3	5.160	35.56	69.50	-33.94	15.18	20.38	QP
4	6.635	32.62	69.50	-36.88	11.32	21.30	QP
5	11.334	33.40	69.50	-36.10	11.50	21.90	QP
6	20.160	34.44	69.50	-35.06	11.79	22.65	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :HY-CB02
Condition :3m ,Vertical
mode :NFC_TX+11G_TX_2437MHz+BLE2M_TX_2440MHz
Test by :Rock

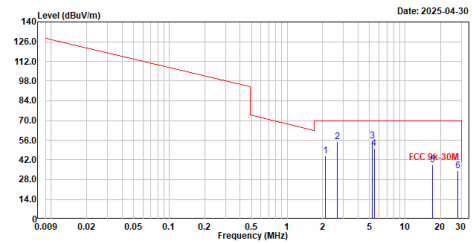

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2.114	44.81	69.50	-24.69	25.12	19.69	QP
2	2.653	55.20	69.50	-14.30	35.57	19.63	QP
3	5.244	55.37	69.50	-14.13	34.90	20.47	QP
4	5.462	50.17	69.50	-19.33	29.46	20.71	QP
5	17.003	38.47	69.50	-31.03	16.17	22.30	QP
6	27.888	34.49	69.50	-35.01	11.61	22.88	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :HY-CB02
Condition :3m ,Horizontal
mode :NFC_TX+11A_TX_5260MHz+BLE2M_TX_2440MHz
Test by :Rock

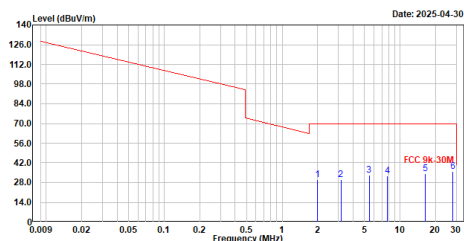

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1.981	29.95	69.50	-39.55	10.25	19.70	QP
2	3.146	30.00	69.50	-39.50	10.36	19.64	QP
3	5.462	33.18	69.50	-36.32	12.47	20.71	QP
4	7.004	32.84	69.50	-36.66	11.62	21.22	QP
5	16.327	34.13	69.50	-35.37	12.03	22.10	QP
6	27.888	35.90	69.50	-33.60	13.02	22.88	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :HY-CB02
Condition :3m ,Vertical
mode :NFC_TX+11A_TX_5260MHz+BLE2M_TX_2440MHz
Test by :Rock

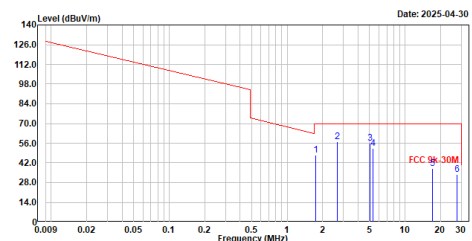

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1.754	47.58	69.50	-21.92	27.86	19.72	QP
2	2.675	57.21	69.50	-12.29	37.58	19.63	QP
3	5.077	55.89	69.50	-13.61	35.61	20.28	QP
4	5.338	52.29	69.50	-17.21	31.73	20.56	QP
5	17.141	37.90	69.50	-31.60	15.57	22.33	QP
6	27.663	33.63	69.50	-35.87	10.80	22.83	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :HY-CB02
Condition :3m ,Horizontal
mode :NFC_TX+11AC160_TX_5815MHz+ BLE2M_TX_2440MHz
Test by :Rock

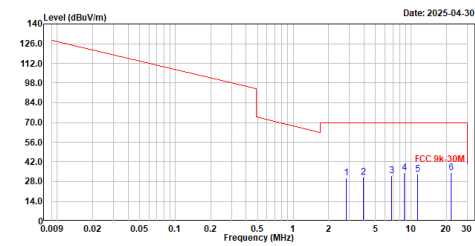


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2.888	30.79	69.50	-38.71	11.17	19.62	QP
2	3.916	31.43	69.50	-38.07	11.56	19.87	QP
3	6.854	32.32	69.50	-37.18	11.02	21.30	QP
4	8.743	34.41	69.50	-35.09	13.21	21.20	QP
5	11.334	33.48	69.50	-36.10	11.50	21.90	QP
6	21.864	34.10	69.50	-35.40	11.96	22.14	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :HY-CB02
Condition :3m ,Vertical
mode :NFC_TX+11AC160_TX_5815MHz+ BLE2M_TX_2440MHz
Test by :Rock

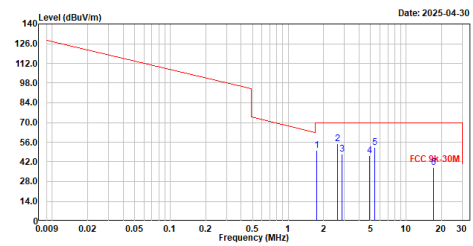


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1.740	50.09	69.50	-19.41	30.36	19.73	QP
2	2.632	54.88	69.50	-14.62	35.24	19.64	QP
3	2.877	47.64	69.50	-21.86	28.03	19.61	QP
4	4.875	46.57	69.50	-22.93	26.41	20.16	QP
5	5.417	52.06	69.50	-17.44	31.40	20.66	QP
6	17.141	37.90	69.50	-31.60	15.57	22.33	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :HY-CB02
Condition :3m ,Horizontal
mode :NFC_TX+11A_TX_6695MHz+BLE2M_TX_2440MHz
Test by :Rock

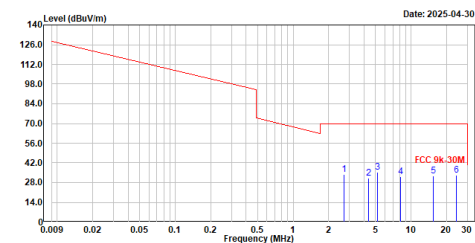


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2.697	33.73	69.50	-35.77	14.10	19.63	QP
2	4.387	31.22	69.50	-38.28	11.20	20.02	QP
3	5.160	35.56	69.50	-33.94	15.18	20.38	QP
4	8.193	32.03	69.50	-37.47	10.83	21.20	QP
5	15.426	32.92	69.50	-36.58	11.15	21.77	QP
6	24.099	33.30	69.50	-36.20	11.20	22.10	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :HY-CB02
Condition :3m ,Vertical
mode :NFC_TX+11A_TX_6695MHz+BLE2M_TX_2440MHz
Test by :Rock

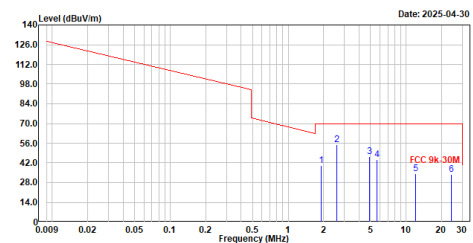


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1.903	40.26	69.50	-29.24	20.55	19.71	QP
2	2.569	55.12	69.50	-14.38	35.48	19.64	QP
3	4.875	46.57	69.50	-22.93	26.41	20.16	QP
4	5.642	44.25	69.50	-25.25	23.34	20.91	QP
5	12.994	34.56	69.50	-34.94	12.68	21.88	QP
6	24.099	33.72	69.50	-35.78	11.62	22.10	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :NFC_TX+I1G_TX_2437MHz+BLE2M_TX_2440MHz
Test by :Rock

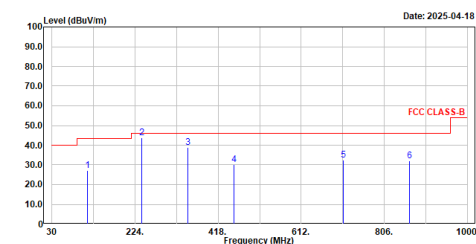


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	112.450	27.26	43.50	-16.24	54.68	-27.42	QP
2	240.490	43.94	46.00	-2.06	69.61	-25.67	QP
3	348.160	38.95	46.00	-7.05	61.52	-22.57	QP
4	455.830	30.14	46.00	-15.86	49.47	-19.33	QP
5	709.970	32.54	46.00	-13.46	47.12	-14.58	QP
6	864.200	31.89	46.00	-14.11	44.65	-12.76	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :HY-CB02
Condition :3m ,VERTICAL
mode :NFC_TX+I1G_TX_2437MHz+BLE2M_TX_2440MHz
Test by :Rock

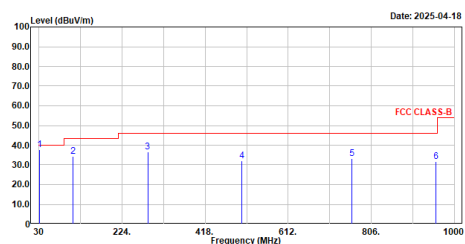


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	30.970	37.57	40.00	-2.43	63.11	-25.54	QP
2	109.540	34.28	43.50	-9.22	61.91	-27.63	QP
3	284.140	36.58	46.00	-9.42	60.61	-24.03	QP
4	504.330	31.94	46.00	-14.06	50.52	-18.58	QP
5	761.308	33.30	46.00	-12.70	46.94	-13.64	QP
6	957.320	31.53	46.00	-14.47	43.01	-11.48	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :NFC_TX+I1A_TX_5260MHz+BLE2M_TX_2440MHz
Test by :Rock

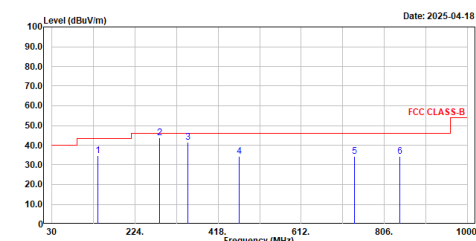


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	136.700	34.86	43.50	-8.64	60.22	-25.36	QP
2	282.200	43.68	46.00	-2.32	67.79	-24.11	QP
3	347.190	41.46	46.00	-4.54	64.03	-22.57	QP
4	466.500	34.42	46.00	-11.58	53.56	-19.14	QP
5	737.130	34.28	46.00	-11.72	48.26	-13.90	QP
6	841.090	34.46	46.00	-11.54	47.30	-12.84	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :HY-CB02
Condition :3m ,VERTICAL
mode :NFC_TX+I1A_TX_5260MHz+BLE2M_TX_2440MHz
Test by :Rock

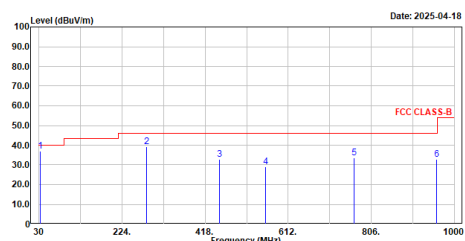


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	32.910	36.90	40.00	-3.10	62.54	-25.64	QP
2	282.200	39.17	46.00	-6.83	63.28	-24.11	QP
3	450.980	32.80	46.00	-13.20	52.23	-19.43	QP
4	558.650	29.03	46.00	-16.97	46.52	-17.49	QP
5	766.230	33.66	46.00	-12.34	47.21	-13.55	QP
6	958.290	32.68	46.00	-13.32	44.18	-11.50	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :HY-CB02
Condition :3m ,VERTICAL
mode :NFC_TX+11AC160_TX_5815MHz+ BLE2M_TX_2440MHz
Test by :Rock

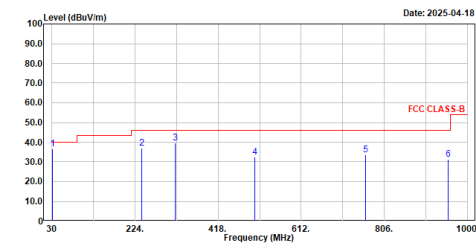


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	30.970	36.79	40.00	-3.21	62.33	-25.54	QP
2	240.490	36.98	46.00	-9.02	62.65	-25.67	QP
3	318.090	39.79	46.00	-6.21	62.89	-23.10	QP
4	504.330	32.58	46.00	-13.42	51.16	-18.58	QP
5	762.350	33.73	46.00	-12.27	47.35	-13.62	QP
6	954.410	31.45	46.00	-14.55	42.88	-11.43	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :NFC_TX+11AC160_TX_5815MHz+ BLE2M_TX_2440MHz
Test by :Rock

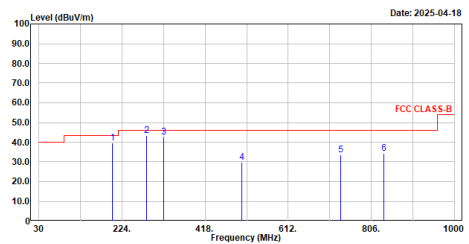


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	201.690	39.57	43.50	-3.93	66.97	-27.40	QP
2	282.200	43.24	46.00	-2.76	67.35	-24.11	QP
3	321.970	42.80	46.00	-3.20	65.75	-22.95	QP
4	504.330	29.72	46.00	-16.28	48.30	-18.58	QP
5	734.220	33.71	46.00	-12.29	47.74	-14.03	QP
6	836.070	34.33	46.00	-11.67	47.30	-12.97	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :NFC_TX+11A_TX_6695MHz+BLE2M_TX_2440MHz
Test by :Rock

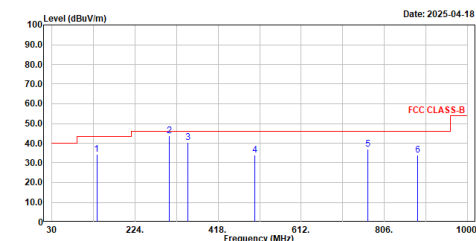


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	134.760	34.37	43.50	-9.13	59.82	-25.45	QP
2	304.510	43.74	46.00	-2.26	67.36	-23.62	QP
3	347.190	40.24	46.00	-5.76	62.81	-22.57	QP
4	504.330	34.07	46.00	-11.93	52.65	-18.58	QP
5	767.120	37.09	46.00	-8.91	50.62	-13.53	QP
6	884.570	33.87	46.00	-12.13	46.48	-12.61	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :HY-CB02
Condition :3m ,VERTICAL
mode :NFC_TX+11A_TX_6695MHz+BLE2M_TX_2440MHz
Test by :Rock

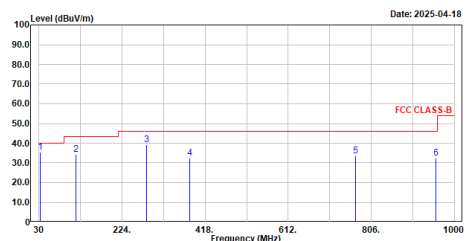


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	33.880	35.55	40.00	-4.45	60.88	-25.33	QP
2	116.330	34.40	43.50	-9.10	61.61	-27.21	QP
3	282.200	39.38	46.00	-6.62	63.49	-24.11	QP
4	382.110	32.64	46.00	-13.36	53.97	-21.33	QP
5	769.140	33.50	46.00	-12.50	46.98	-13.48	QP
6	957.320	32.44	46.00	-13.56	43.92	-11.48	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :NFC_TX+11G_TX_2437MHz+8LE2M_TX_2440MHz
Test by :Rock

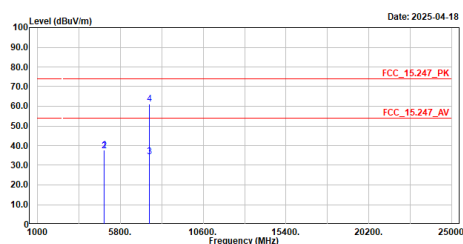


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4874.000	37.89	74.00	-36.11	44.84	-6.95	Peak
2	4880.000	37.28	74.00	-36.72	44.18	-6.90	Peak
3	7494.000	34.29	54.00	-19.71	34.48	-0.19	Average
4	7494.000	60.94	74.00	-13.06	61.13	-0.19	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :NFC_TX+11G_TX_2437MHz+8LE2M_TX_2440MHz
Test by :Rock

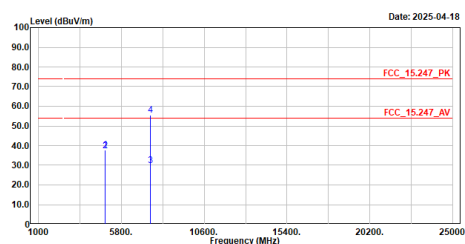


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4874.000	37.79	74.00	-36.21	44.74	-6.95	Peak
2	4880.000	37.35	74.00	-36.65	44.25	-6.90	Peak
3	7482.100	29.97	54.00	-24.03	30.12	-0.15	Average
4	7482.100	55.40	74.00	-18.60	55.55	-0.15	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :NFC_TX+11A_TX_5260MHz+8LE2M_TX_2440MHz
Test by :Rock

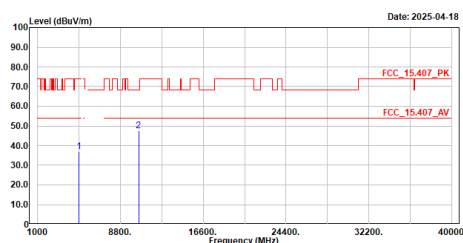


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4880.000	36.99	74.00	-37.01	43.89	-6.90	Peak
2	10520.000	47.57	68.22	-20.65	44.72	2.85	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :NFC_TX+11A_TX_5260MHz+8LE2M_TX_2440MHz
Test by :Rock

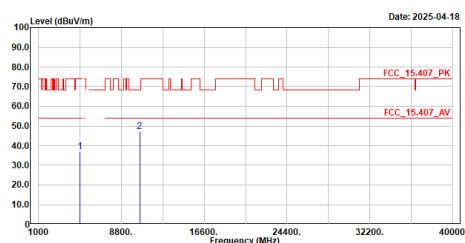


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4880.000	36.87	74.00	-37.13	43.77	-6.90	Peak
2	10520.000	47.03	68.22	-21.19	44.18	2.85	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :NFC_TX+11AC160_TX_5815MHz+ BLE2M_TX_2440MHz
Test by :Rock

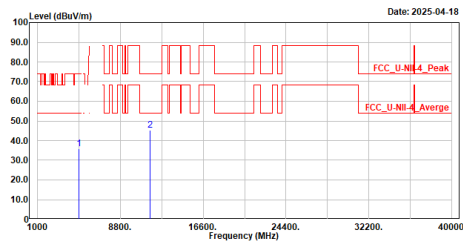

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4880.000	35.78	74.00	-38.22	42.68	-6.90	Peak
2	11630.000	45.10	74.00	-28.90	40.59	4.51	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :NFC_TX+11AC160_TX_5815MHz+ BLE2M_TX_2440MHz
Test by :Rock

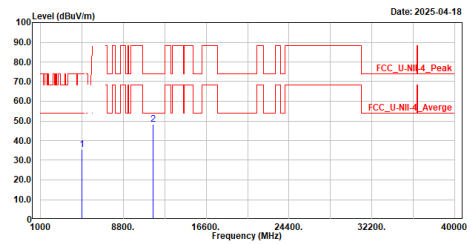

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4880.000	35.37	74.00	-38.63	42.27	-6.90	Peak
2	11630.000	48.32	74.00	-25.68	43.81	4.51	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :NFC_TX+11A_TX_6695MHz+BLE2M_TX_2440MHz
Test by :Rock

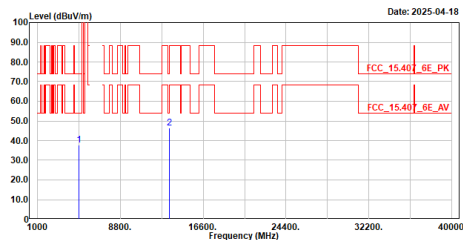

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4880.000	37.60	74.00	-36.40	44.50	-6.90	Peak
2	13390.000	46.35	74.00	-27.65	40.01	6.34	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :NFC_TX+11A_TX_6695MHz+BLE2M_TX_2440MHz
Test by :Rock

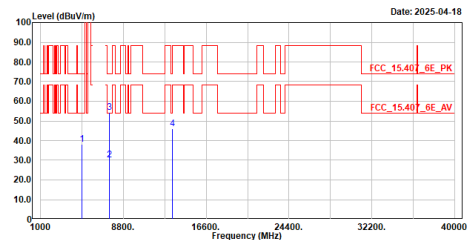

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4880.000	37.94	74.00	-36.06	44.84	-6.90	Peak
2	7473.600	30.03	54.00	-23.97	30.13	-0.10	Average
3	7473.600	54.29	74.00	-19.71	54.39	-0.10	Peak
4	13390.000	45.98	74.00	-28.02	39.64	6.34	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.