



# element

**Nuvectra Corporation**  
**Bluetooth Pocket Programmer**

**FCC 95I:2018**  
**MedRadio**

**Report # NUVE0019.1**



**NVLAP<sup>®</sup>**  
TESTING



NVLAP LAB CODE: 200881-0

*This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government. This Report shall not be reproduced, except in full without written approval of the laboratory.*

# CERTIFICATE OF TEST



Last Date of Test: November 7, 2018  
Nuvectra Corporation  
Model: Bluetooth Pocket Programmer

## Radio Equipment Testing

### Standards

Specification	Method
FCC 95I:2018	ANSI C63.26:2015

### Results

Method Clause	Test Description	Applied	Results	Comments
ANSI C63.26 5.2.3.3	Conducted Output Power	Yes	Pass	
ANSI C63.26 5.2.3.3, 5.2.7	Radiated Power (EIRP)	Yes	Pass	
ANSI C63.26 5.4.3	Emission Bandwidth	Yes	Pass	
ANSI C63.26 5.5.4	Spurious Radiated Emissions	Yes	Pass	
ANSI C63.26 5.6	Frequency Stability	Yes	Pass	
ANSI C63.26 5.7	Spurious Conducted Emissions	Yes	Pass	
FCC 95.2579(a)(1)	Emission Mask	Yes	Pass	

### Deviations From Test Standards

None

### Approved By:

Matt Nuernberg, Operations Manager

Product compliance is the responsibility of the client; therefore, the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. The results of this test pertain only to the sample(s) tested. The specific description is noted in each of the individual sections of the test report supporting this certificate of test. This report reflects only those tests from the referenced standards shown in the certificate of test. It does not include inspection or verification of labels, identification, marking or user information. As indicated in the Statement of Work sent with the quotation, Element's standard process is to always use the latest published version of the test methods even when earlier versions are cited in the test specification. Issuance of a purchase order was de facto acceptance of this approach. Otherwise, the client would have advised Element in writing of the specific version of the test methods they wanted applied to the subject testing.

# REVISION HISTORY



Revision Number	Description	Date (yyyy-mm-dd)	Page Number
00	None		

# ACCREDITATIONS AND AUTHORIZATIONS



## United States

**FCC** - Designated by the FCC as a Telecommunications Certification Body (TCB). Certification chambers, Open Area Test Sites, and conducted measurement facilities are listed with the FCC.

**A2LA** - Accredited by A2LA to ISO / IEC 17065 as a product certifier. This allows Element to certify transmitters to FCC and IC specifications.

**NVLAP** - Each laboratory is accredited by NVLAP to ISO 17025

## Canada

**ISED** - Recognized by Innovation, Science and Economic Development Canada as a Certification Body (CB). Certification chambers and Open Area Test Sites are filed with ISED.

## European Union

**European Commission** – Within Element, we have a EU Notified Body validated for the EMCD and RED Directives.

## Australia/New Zealand

**ACMA** - Recognized by ACMA as a CAB for the acceptance of test data.

## Korea

**MSIT / RRA** - Recognized by KCC's RRA as a CAB for the acceptance of test data.

## Japan

**VCCI** - Associate Member of the VCCI. Conducted and radiated measurement facilities are registered.

## Taiwan

**BSMI** – Recognized by BSMI as a CAB for the acceptance of test data.

**NCC** - Recognized by NCC as a CAB for the acceptance of test data.

## Singapore

**IDA** – Recognized by IDA as a CAB for the acceptance of test data.

## Israel

**MOC** – Recognized by MOC as a CAB for the acceptance of test data.

## Hong Kong

**OFCA** – Recognized by OFCA as a CAB for the acceptance of test data.

## Vietnam

**MIC** – Recognized by MIC as a CAB for the acceptance of test data.

## SCOPE


For details on the Scopes of our Accreditations, please visit:

<https://www.nwemc.com/emc-testing-accreditations>

# FACILITIES



California	Minnesota	New York	Oregon	Texas	Washington
Labs OC01-17 41 Tesla Irvine, CA 92618 (949) 861-8918	Labs MN01-10 9349 W Broadway Ave. Brooklyn Park, MN 55445 (612) 638-5136	Labs NY01-04 4939 Jordan Rd. Elbridge, NY 13060 (315) 554-8214	Labs EV01-12 6775 NE Evergreen Pkwy #400 Hillsboro, OR 97124 (503) 844-4066	Labs TX01-09 3801 E Plano Pkwy Plano, TX 75074 (469) 304-5255	Labs NC01-05 19201 120 <sup>th</sup> Ave NE Bothell, WA 98011 (425) 984-6600
<b>NVLAP</b>					
NVLAP Lab Code: 200676-0	NVLAP Lab Code: 200881-0	NVLAP Lab Code: 200761-0	NVLAP Lab Code: 200630-0	NVLAP Lab Code: 201049-0	NVLAP Lab Code: 200629-0
<b>Innovation, Science and Economic Development Canada</b>					
2834B-1, 2834B-3	2834E-1, 2834E-3	N/A	2834D-1, 2834D-2	2834G-1	2834F-1
<b>BSMI</b>					
SL2-IN-E-1154R	SL2-IN-E-1152R	N/A	SL2-IN-E-1017	SL2-IN-E-1158R	SL2-IN-E-1153R
<b>VCCI</b>					
A-0029	A-0109	N/A	A-0108	A-0201	A-0110
<b>Recognized Phase I CAB for ACMA, BSMI, IDA, KCC/RRA, MIC, MOC, NCC, OFCA</b>					
US0158	US0175	N/A	US0017	US0191	US0157

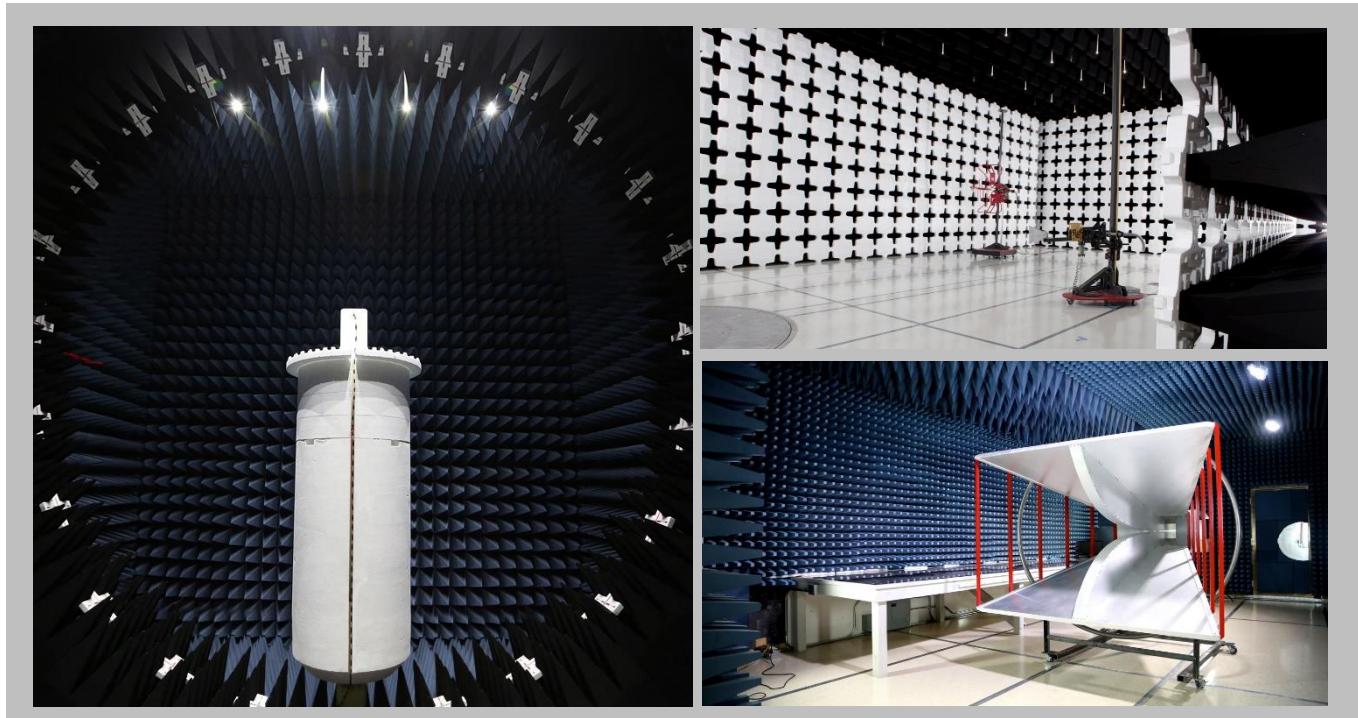

# MEASUREMENT UNCERTAINTY



## Measurement Uncertainty

When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. Measurement uncertainty is a statistical expression of measurement error qualified by a probability distribution.


A measurement uncertainty estimation has been performed for each test per our internal quality document QM205.4.6. The estimation is used to compare the measured result with its "true" or theoretically correct value. The expanded measurement uncertainty (K=2) can be found included as part of the applicable test description page. Our measurement data meets or exceeds the measurement uncertainty requirements of the applicable specification; therefore, the test data can be compared directly to the specification limit to determine compliance. The calculations for estimating measurement uncertainty are based upon ETSI TR 100 028 (or CISPR 16-4-2 as applicable), and are available upon request.

The following table represents the Measurement Uncertainty (MU) budgets for each of the tests that may be contained in this report.

Test	+ MU	- MU
Frequency Accuracy (Hz)	0.0007%	-0.0007%
Amplitude Accuracy (dB)	1.2 dB	-1.2 dB
Conducted Power (dB)	0.3 dB	-0.3 dB
Radiated Power via Substitution (dB)	0.7 dB	-0.7 dB
Temperature (degrees C)	0.7°C	-0.7°C
Humidity (% RH)	2.5% RH	-2.5% RH
Voltage (AC)	1.0%	-1.0%
Voltage (DC)	0.7%	-0.7%
Field Strength (dB)	5.2 dB	-5.2 dB
AC Powerline Conducted Emissions (dB)	2.4 dB	-2.4 dB

# Test Setup Block Diagrams


## Antenna Port Conducted Measurements

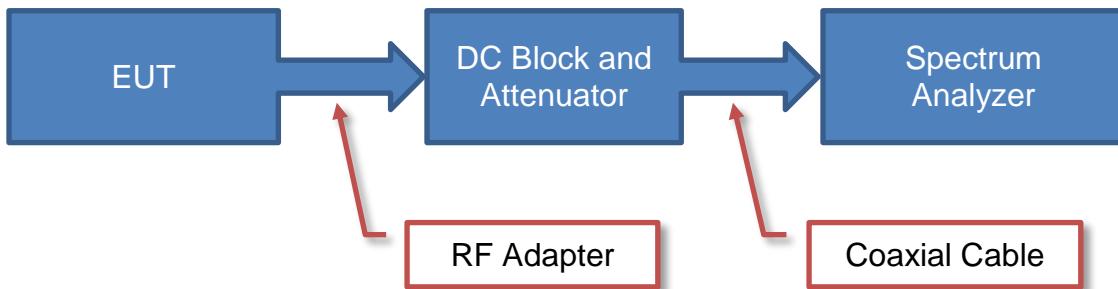

## Near Field Test Fixture Measurements



## Spurious Radiated Emissions

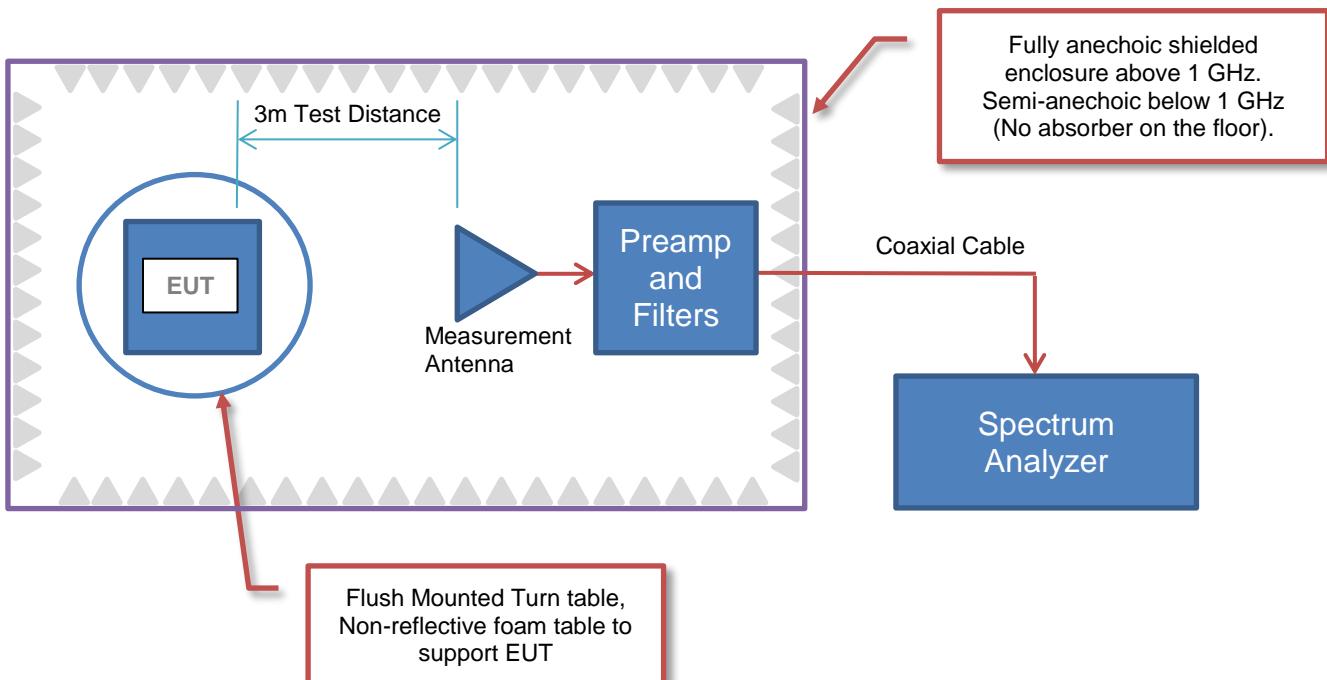

# PRODUCT DESCRIPTION



## Client and Equipment Under Test (EUT) Information

<b>Company Name:</b>	Nuvectra Corporation
<b>Address:</b>	10675 Naples St. NE
<b>City, State, Zip:</b>	Blaine, MN 55449
<b>Test Requested By:</b>	Peter Valentyik
<b>Model:</b>	Bluetooth Pocket Programmer
<b>First Date of Test:</b>	November 5, 2018
<b>Last Date of Test:</b>	November 7, 2018
<b>Receipt Date of Samples:</b>	November 5, 2018
<b>Equipment Design Stage:</b>	Production
<b>Equipment Condition:</b>	No Damage
<b>Purchase Authorization:</b>	Verified

## Information Provided by the Party Requesting the Test

### **Functional Description of the EUT:**

Communicates with Clinician Programmer using Bluetooth and MICS with IPG.

### **Client Provided Information:**

The Bluetooth Pocket Programmer Model 4110 test samples used in testing contain a new PCBA and have reused the mechanical enclosure, buttons, display, battery and labeling from the Pocket Programmer Model 4100. As a result, the label found on the test units contain the label with Model 4100.

### **Testing Objective:**

Seeking FCC authorization for the MedRadio transmitter to FCC Part 95I.

# CONFIGURATIONS

## Configuration NUVE0019- 1

Software/Firmware Running during test	
Description	Version
EMCTESTINGV2	2

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Programmer	Nuvecra Corporation	4110	101018

Peripherals in test setup boundary			
Description	Manufacturer	Model/Part Number	Serial Number
Power Supply	SL Power Electronics	ME10A0599B02	None

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
DC Cable	No	1.45 m	No	Power Supply	Programmer

## Configuration NUVE0019- 5

Software/Firmware Running during test	
Description	Version
EMCTESTINGV2	2

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Programmer	Nuvecra Corporation	4110	101016

Peripherals in test setup boundary			
Description	Manufacturer	Model/Part Number	Serial Number
Power Supply	SL Power Electronics	ME10A0599B02	None

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
DC Cable	No	1.45 m	No	Power Supply	Programmer

# MODIFICATIONS



## Equipment Modifications

Item	Date	Test	Modification	Note	Disposition of EUT
1	2018-11-05	Spurious Radiated Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
2	2018-11-05	Radiated Power (EIRP)	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
3	2018-11-07	Emission Bandwidth	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
4	2018-11-07	Spurious Conducted Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
5	2018-11-07	Frequency Stability	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
6	2018-11-07	Conducted Output Power	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
7	2018-11-07	Emission Mask	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	Scheduled testing was completed.

# CONDUCTED OUTPUT POWER



XMit 2017.12.13

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

## TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	E4422B	TGQ	15-Mar-18	15-Mar-21
Cable	ESM Cable Corp.	TTBJ141 KMKM-72	MNU	15-Mar-18	15-Mar-19
Attenuator	S.M. Electronics	SA26B-20	RFW	13-Feb-18	13-Feb-19
Block - DC	Fairview Microwave	SD3379	AMI	7-Sep-18	7-Sep-19
Analyzer - Spectrum Analyzer	Keysight	N9010A (EXA)	AFQ	19-Dec-17	19-Dec-18

## TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. Per FCC Part 2.1046, RSS-GEN, the output power shall be measured at the RF terminal. The peak output power was measured with the EUT configured in the modes listed in the datasheet. The EUT was transmitting at its maximum data rate.

FCC Part 95 and RSS-243 have no conducted output power limit. It is a requirement to characterize this information and that data is contained within this datasheet.

# CONDUCTED OUTPUT POWER



TbTx 2018.09.13

XMI 2017.12.13

EUT:	Bluetooth Pocket Programmer		Work Order:	NUVE0019	
Serial Number:	101016		Date:	7-Nov-18	
Customer:	Nuvectra Corporation		Temperature:	21.5 °C	
Attendees:	Peter Valentyik		Humidity:	28.1% RH	
Project:	None		Barometric Pres.:	1024 mbar	
Tested by:	Kyle McMullan	Power:	110VAC/60Hz	Job Site:	MN08
TEST SPECIFICATIONS			Test Method		
FCC 95i:2018			ANSI C63.26:2015		
COMMENTS					
None					
DEVIATIONS FROM TEST STANDARD					
None					
Configuration #	5	Signature			
			Value	Limit	Result
			1.168 mW	N/A	N/A

Mid Channel, 403.35 MHz


# CONDUCTED OUTPUT POWER



TbTx 2018.09.13 XM1 2017.12.13

Mid Channel, 403.35 MHz

	Value	Limit	Result
	1.168 mW	N/A	N/A

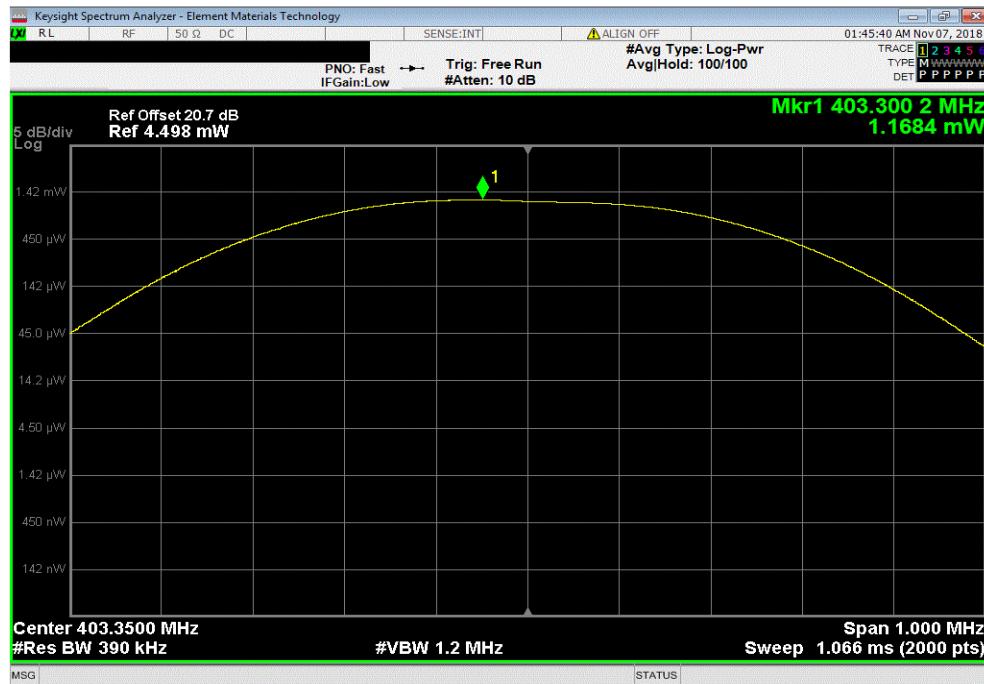

# RADIATED POWER (EIRP)

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

## MODES OF OPERATION

Transmitting MICS - mid channel (403.35 MHz), CW

## POWER SETTINGS INVESTIGATED

110VAC/60Hz

## CONFIGURATIONS INVESTIGATED

NUVE0019 - 1

## FREQUENCY RANGE INVESTIGATED

Start Frequency	30 MHz	Stop Frequency	1000 MHz
-----------------	--------	----------------	----------

## SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

## TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Cable	Element	Biconilog Cable	MNX	24-Feb-2018	12 mo
Antenna - Biconilog	ETS Lindgren	3142D	AXO	15-Dec-2017	24 mo
Analyzer - Spectrum Analyzer	Agilent	E4440A	AAX	26-Mar-2018	12 mo

## MEASUREMENT BANDWIDTHS

Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 - 0.15	1.0	0.2	0.2
0.15 - 30.0	10.0	9.0	9.0
30.0 - 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0

## TEST DESCRIPTION

Per 95.2567(a)(2), the maximum radiated field strength for a MICS transmitter is 25uW EIRP. The Field Strength of the Fundamental data was converted to EIRP with the formula based upon the Friis transmission equation with 6 dB removed due to reflections from the ground plane:  $EIRP = ((E/2)*d)^{2/30}$  where E is V/m and d = distance = 3m, and EIRP = W (Reference 95.2569(a)).

The Field Strength of the Fundamental was measured in the far-field at an FCC Listed Semi-anechoic Chamber. Spectrum analyzer and linearly polarized antennas were used to measure the radiated field strength of the fundamental.

The orientation of the EUT and measurement antenna were manipulated to maximize the level of emissions. The turntable azimuth was varied to maximize the level of radiated emissions. The height of the measurement antenna was also varied from 1 to 4 meters. The amplitude and frequency of the emissions were noted.

The EUT was configured to transmit in a fixture that simulates the human torso. The dimensions of the test fixture and the characteristics of the tissue substitute material met the requirements 95.2569(c) and FCC KDB 617965. The height of the transmitter was 1.5-meter above the reference ground plane.

# RADIATED POWER (EIRP)




EmiR5 2018.09.26

PSA-ESCI 2018.07.27

Work Order:	NUVE0019	Date:	5-Nov-2018	 <b>Tested by:</b> Dustin Sparks	
Project:	None	Temperature:	22.3 °C		
Job Site:	MN09	Humidity:	31.4% RH		
Serial Number:	101018	Barometric Pres.:	1010 mbar		
EUT:	Bluetooth Pocket Programmer				
Configuration:	1				
Customer:	Nuvectra Corporation				
Attendees:	Peter Valentyik				
EUT Power:	110VAC/60Hz				
Operating Mode:	Transmitting MICS - mid channel (403.35 MHz), CW				
Deviations:	None				
Comments:	Power setting #11 (max power). 6 dB subtracted from EIRP values to account for ground plane reflections.				

Test Specifications	Test Method
FCC 951:2018	ANSI C63.26:2015

Run #	Test Distance (m)	Antenna Height(s)	Results	Comments
6	3	1 to 4(m)	Pass	

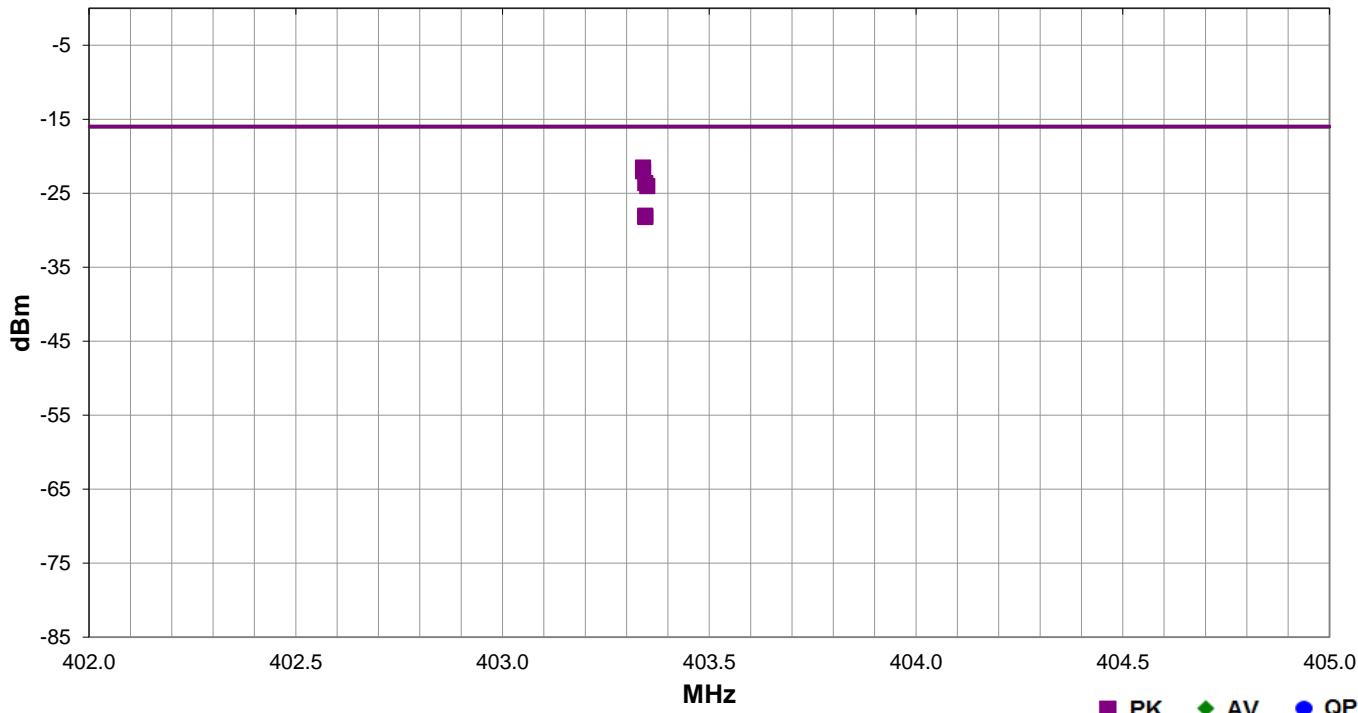

	Freq (MHz)	Antenna Height (meters)	Azimuth (degrees)	Polarity/Transducer Type	Detector	EIRP (Watts)	EIRP (dBm)	Spec. Limit (dBm)	Compared to Spec. (dB)	Comments
403.340	2.0	186.0	Horz	PK	2.80E-05	-21.5	-16.0	-5.5	Mid ch, EUT on side	
403.340	1.2	254.0	Vert	PK	2.50E-05	-22.0	-16.0	-6.0	Mid ch, EUT on side	
403.345	1.0	75.0	Horz	PK	1.73E-05	-23.6	-16.0	-7.6	Mid ch, EUT horizontal	
403.350	1.2	257.0	Vert	PK	1.57E-05	-24.0	-16.0	-8.0	Mid ch, EUT vertical	
403.345	1.0	340.0	Horz	PK	6.27E-06	-28.0	-16.0	-12.0	Mid ch, EUT vertical	
403.345	1.0	108.0	Vert	PK	5.99E-06	-28.2	-16.0	-12.2	Mid ch, EUT horizontal	

# EMISSION BANDWIDTH



XMit 2017.12.13

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

## TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	E4422B	TGQ	15-Mar-18	15-Mar-21
Cable	ESM Cable Corp.	TTBJ141 KMKM-72	MNU	15-Mar-18	15-Mar-19
Attenuator	S.M. Electronics	SA26B-20	RFW	13-Feb-18	13-Feb-19
Block - DC	Fairview Microwave	SD3379	AMI	7-Sep-18	7-Sep-19
Analyzer - Spectrum Analyzer	Keysight	N9010A (EXA)	AFQ	19-Dec-17	19-Dec-18

## TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. Per 47 CFR 95.2573(a), the emission bandwidth was determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 20 dB down relative to the maximum level of the modulated carrier. A spectrum analyzer using a peak detector with no video filtering was used with a resolution bandwidth equal to approximately 1.0 percent of the emission bandwidth of the EUT.

# EMISSION BANDWIDTH



TbTx 2018.09.13

XMI 2017.12.13

EUT:	Bluetooth Pocket Programmer		Work Order:	NUVE0019	
Serial Number:	101016		Date:	7-Nov-18	
Customer:	Nuvectra Corporation		Temperature:	21.5 °C	
Attendees:	Peter Valentyik		Humidity:	28.1% RH	
Project:	None		Barometric Pres.:	1024 mbar	
Tested by:	Kyle McMullan	Power:	110VAC/60Hz	Job Site:	MN08
TEST SPECIFICATIONS			Test Method		
FCC 95i:2018			ANSI C63.26:2015		
COMMENTS					
None					
DEVIATIONS FROM TEST STANDARD					
None					
Configuration #	5	Signature			
			Value	Limit (\$)	Result
			229.3 kHz	300 kHz	Pass
			247.79 kHz	300 kHz	Pass
			264.998 kHz	300 kHz	Pass


Low Channel, 402.15 MHz  
 Mid Channel, 403.35 MHz  
 High Channel, 404.85 MHz

# EMISSION BANDWIDTH




TbTx 2018.09.13 XMI 2017.12.13

Low Channel, 402.15 MHz			Value	Limit (≤)	Result
			229.3 kHz	300 kHz	Pass

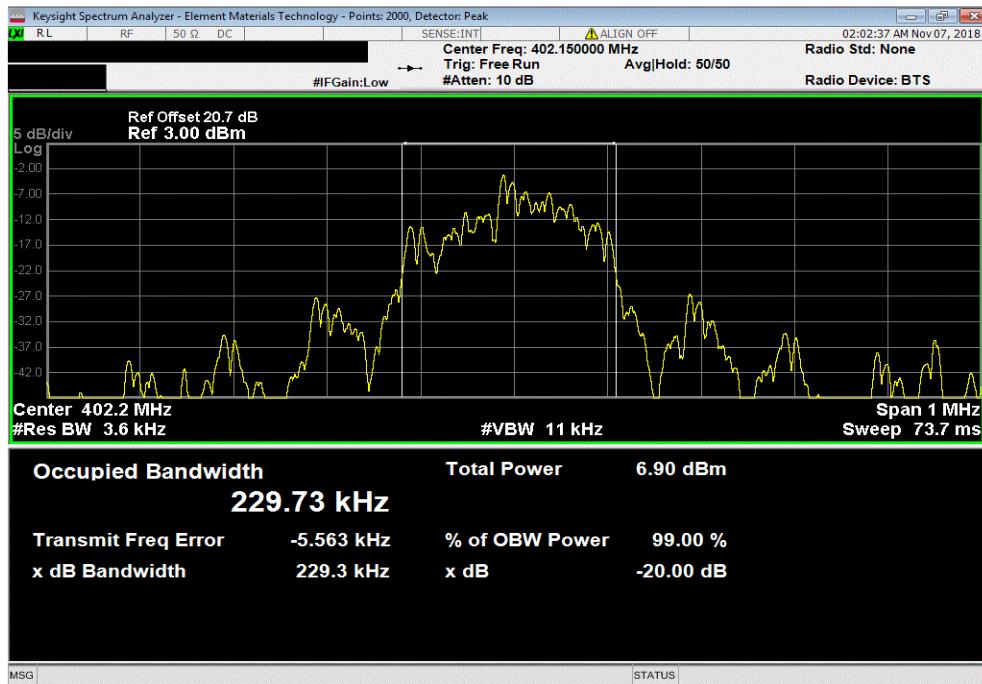


Mid Channel, 403.35 MHz			Value	Limit (≤)	Result
			247.79 kHz	300 kHz	Pass

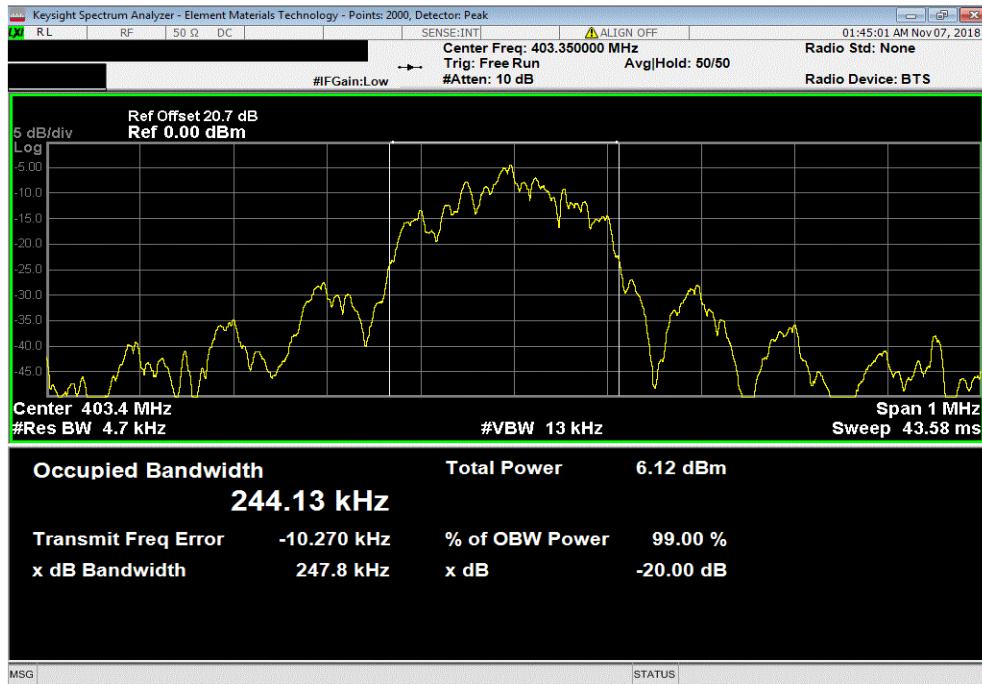

# EMISSION BANDWIDTH



TbTx 2018.09.13 XMI 2017.12.13

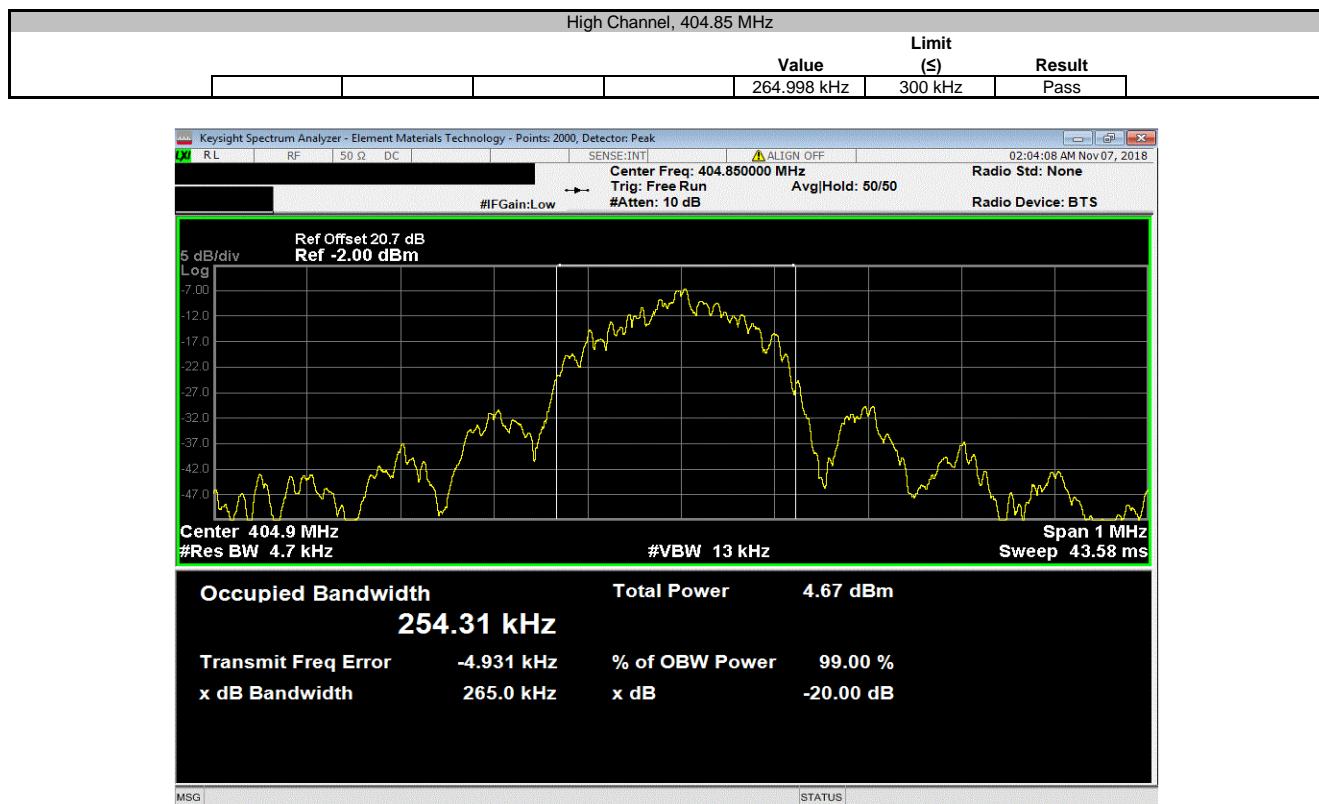

# SPURIOUS RADIATED EMISSIONS



PSA-ESCI 2018.07.27

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

## MODES OF OPERATION

Transmitting MICS - mid channel (403.35 MHz)

## POWER SETTINGS INVESTIGATED

110VAC/60Hz

## CONFIGURATIONS INVESTIGATED

NUVE0019 - 1

## FREQUENCY RANGE INVESTIGATED

Start Frequency	30 MHz	Stop Frequency	5000 MHz
-----------------	--------	----------------	----------

## SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

## TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Filter - Low Pass	Micro-Tronics	LPM50004	HGG	26-Sep-2018	12 mo
Cable	Element	Double Ridge Guide Horn Cables	MNV	24-Feb-2018	12 mo
Amplifier - Pre-Amplifier	Miteq	AMF-3D-00100800-32-13P	AVX	24-Feb-2018	12 mo
Antenna - Double Ridge	ETS-Lindgren	3115	AJQ	14-Nov-2016	24 mo
Amplifier - Pre-Amplifier	Miteq	AM-1064-9079 and SA18E-10	AOO	24-Feb-2018	12 mo
Cable	Element	Biconilog Cable	MNX	24-Feb-2018	12 mo
Antenna - Biconilog	ETS Lindgren	3142D	AXO	15-Dec-2017	24 mo
Analyzer - Spectrum Analyzer	Agilent	E4440A	AAX	26-Mar-2018	12 mo

## MEASUREMENT BANDWIDTHS

Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 - 0.15	1.0	0.2	0.2
0.15 - 30.0	10.0	9.0	9.0
30.0 - 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0

## TEST DESCRIPTION

The highest gain of each type of antenna to be used with the EUT was tested. For each configuration, the spectrum was scanned throughout the specified range. While scanning, emissions from the EUT were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and the EUT antenna in three orthogonal axis, and adjusting measurement antenna height and polarization, and manipulating the EUT antenna in 3 orthogonal planes (per ANSI C63.26). A preamp was used for this test in order to provide sufficient measurement sensitivity.

Per CFR 47 95.2579(a), field strength measurements were performed and compared to the specified limits.

# SPURIOUS RADIATED EMISSIONS




EmiR5 2018.09.26

PSA-ESCI 2018.07.27

Work Order:	NUVE0019	Date:	5-Nov-2018	
Project:	None	Temperature:	22.3 °C	
Job Site:	MN09	Humidity:	31.4% RH	
Serial Number:	101018	Barometric Pres.:	1010 mbar	
EUT:	Bluetooth Pocket Programmer	Tested by:	Dustin Sparks	
Configuration:	1			
Customer:	Nuvectra Corporation			
Attendees:	Peter Valentyik			
EUT Power:	110VAC/60Hz			
Operating Mode:	Transmitting MICS - mid channel (403.35 MHz)			
Deviations:	None			
Comments:	None			

Test Specifications	Test Method
FCC 95I:2018	ANSI C63.26:2015

Run #	7	Test Distance (m)	3	Antenna Height(s)	1 to 4(m)	Results	Pass

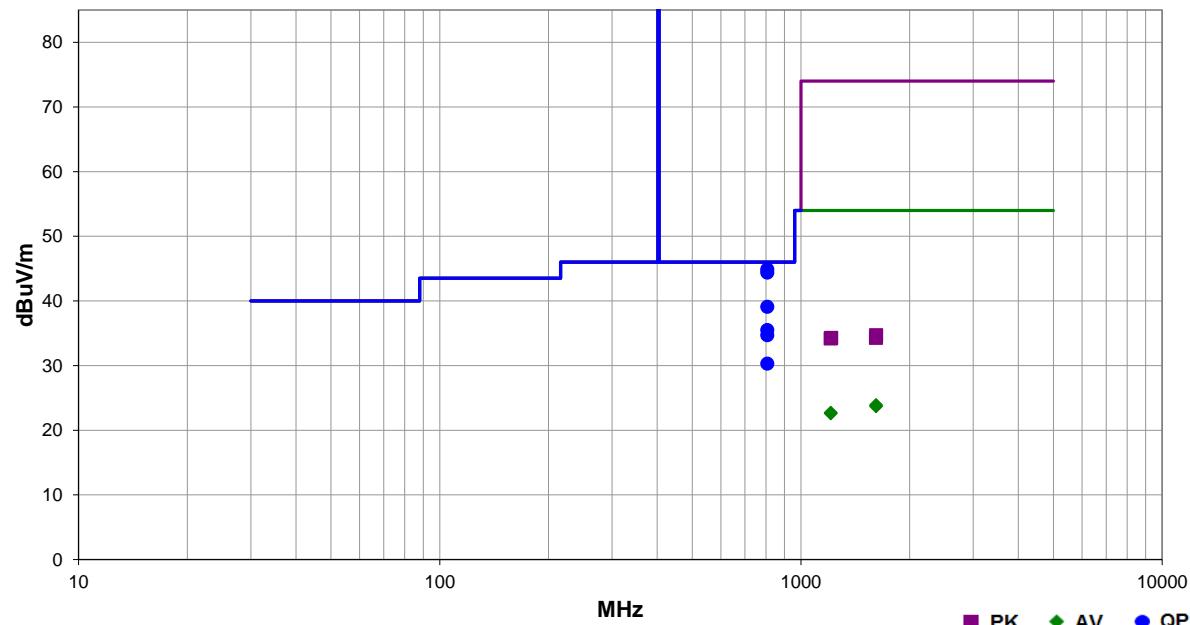

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
806.795	33.0	11.9	1.0	86.0	3.0	0.0	Horz	QP	0.0	44.9	46.0	-1.1	Mid ch, EUT horizontal
806.795	32.5	11.9	1.0	330.0	3.0	0.0	Horz	QP	0.0	44.4	46.0	-1.6	Mid ch, EUT vertical
806.795	27.2	11.9	1.2	99.0	3.0	0.0	Vert	QP	0.0	39.1	46.0	-6.9	Mid ch, EUT on side
806.795	23.6	11.9	1.2	243.0	3.0	0.0	Vert	QP	0.0	35.5	46.0	-10.5	Mid ch, EUT vertical
806.795	22.8	11.9	1.0	115.0	3.0	0.0	Vert	QP	0.0	34.7	46.0	-11.3	Mid ch, EUT horizontal
806.795	18.4	11.9	1.0	210.0	3.0	0.0	Horz	QP	0.0	30.3	46.0	-15.7	Mid ch, EUT on side
1615.208	30.7	-6.8	1.0	81.0	3.0	0.0	Vert	AV	0.0	23.9	54.0	-30.1	Mid ch, EUT on side
1615.417	30.5	-6.8	1.0	214.0	3.0	0.0	Horz	AV	0.0	23.7	54.0	-30.3	Mid ch, EUT horizontal
1210.133	31.2	-8.5	1.0	194.0	3.0	0.0	Horz	AV	0.0	22.7	54.0	-31.3	Mid ch, EUT horizontal
1210.350	31.1	-8.5	1.0	324.0	3.0	0.0	Vert	AV	0.0	22.6	54.0	-31.4	Mid ch, EUT on side
1615.550	41.5	-6.8	1.0	81.0	3.0	0.0	Vert	PK	0.0	34.7	74.0	-39.3	Mid ch, EUT on side
1212.242	42.7	-8.4	1.0	194.0	3.0	0.0	Horz	PK	0.0	34.3	74.0	-39.7	Mid ch, EUT horizontal
1613.150	41.1	-6.8	1.0	214.0	3.0	0.0	Horz	PK	0.0	34.3	74.0	-39.7	Mid ch, EUT horizontal
1208.375	42.7	-8.5	1.0	324.0	3.0	0.0	Vert	PK	0.0	34.2	74.0	-39.8	Mid ch, EUT on side

# FREQUENCY STABILITY



XMit 2017.12.13

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

## TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Chamber - Temperature/Humidity	Cincinnati Sub Zero (CSZ)	ZPH-32-3.5-SCT/AC	TBF	NCR	NCR
Meter - Multimeter	Fluke	117	MLS	23-Jan-17	23-Jan-20
Thermometer	Omega Engineering, Inc.	HH311	DUB	10-Nov-17	10-Nov-20
Generator - Signal	Agilent	E4422B	TGQ	15-Mar-18	15-Mar-21
Cable	ESM Cable Corp.	TTBJ141 KMKM-72	MNU	15-Mar-18	15-Mar-19
Attenuator	S.M. Electronics	SA26B-20	RFW	13-Feb-18	13-Feb-19
Block - DC	Fairview Microwave	SD3379	AMI	7-Sep-18	7-Sep-19
Analyzer - Spectrum Analyzer	Keysight	N9010A (EXA)	AFQ	19-Dec-17	19-Dec-18

## TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The spectrum analyzer is configured with a precision frequency reference that exceeds the stability requirement of the transmitter. The EUT was placed inside a temperature / humidity chamber.

### Variation of Supply Voltage

The primary supply voltage was varied from 85% to 115% of the nominal voltage

### Variation of Ambient Temperature

Using a temperature chamber, the transmit frequency was recorded throughout the specified temperature range (0°C to +55°C).

# FREQUENCY STABILITY



TbTx 2018.09.13

XMII 2017.12.13


EUT:	Bluetooth Pocket Programmer		Work Order:	NUVE0019			
Serial Number:	101016		Date:	7-Nov-18			
Customer:	Nuvectra Corporation		Temperature:	21.5 °C			
Attendees:	Peter Valentyik		Humidity:	27.8% RH			
Project:	None		Barometric Pres.:	1024 mbar			
Tested by:	Kyle McMullan	Power:	110VAC/60Hz		Job Site:	MN08	
TEST SPECIFICATIONS			Test Method				
FCC 95i:2018			ANSI C63.26:2015				
COMMENTS							
None							
DEVIATIONS FROM TEST STANDARD							
None							
Configuration #	5	Signature	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results
Mid Channel, 403.35 MHz							
Normal Temperature 403.3483497 403.35 4.1 100 Pass Extreme Temperature +0°C 403.3507827 403.35 1.9 100 Pass Extreme Temperature +10°C 403.3476663 403.35 5.8 100 Pass Extreme Temperature +20°C 403.3500997 403.35 0.3 100 Pass Extreme Temperature +30°C 403.3472837 403.35 6.7 100 Pass Extreme Temperature +40°C 403.3445167 403.35 13.6 100 Pass Extreme Temperature +50°C 403.3418327 403.35 20.3 100 Pass Extreme Temperature +55°C 403.3399673 403.35 24.9 100 Pass Extreme Voltage +15% 403.3500997 403.35 0.3 100 Pass Extreme Voltage -15% 403.3500997 403.35 0.3 100 Pass							

# FREQUENCY STABILITY




TbTx 2018.09.13 XM1 2017.12.13

Mid Channel, 403.35 MHz, Normal Temperature					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
403.3483497	403.35	4.1	100	Pass	

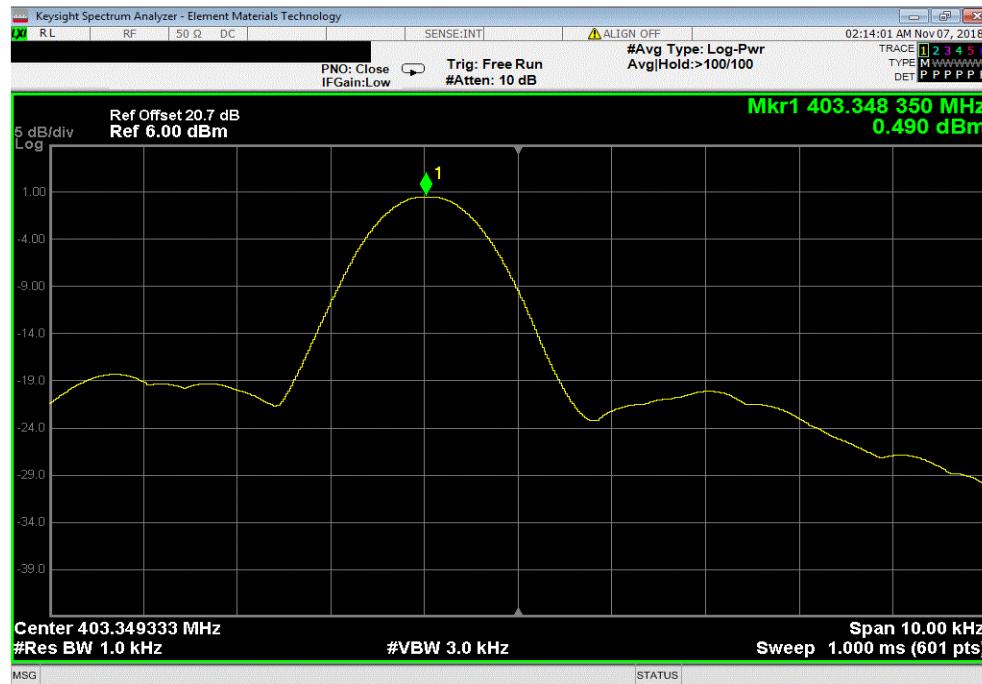

Mid Channel, 403.35 MHz, Extreme Temperature +0°C					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
403.3507827	403.35	1.9	100	Pass	

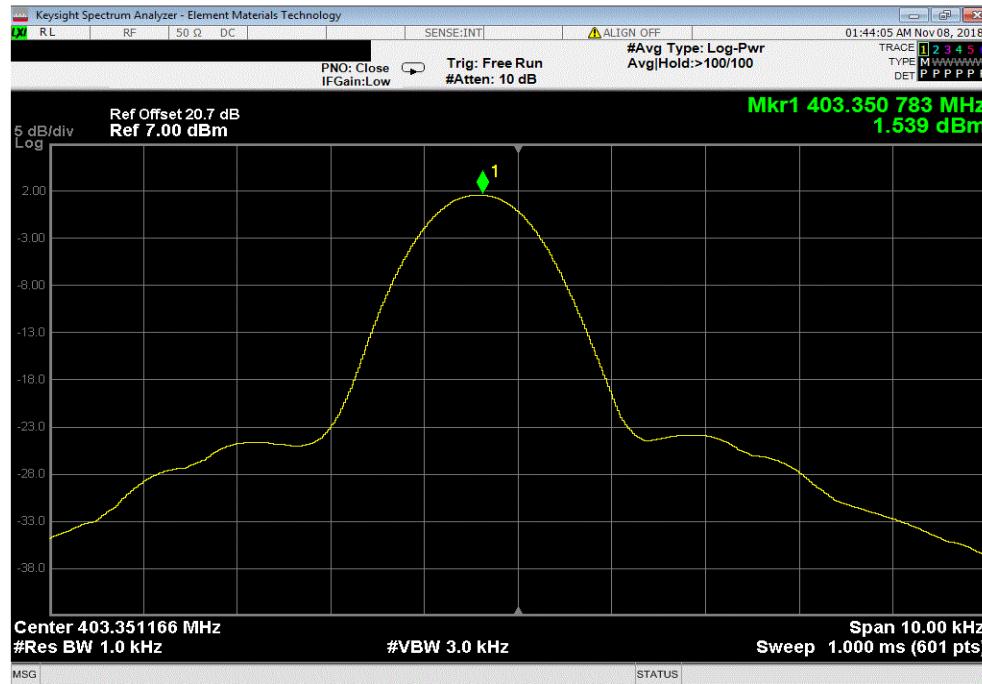


# FREQUENCY STABILITY




TbTx 2018.09.13 XMI 2017.12.13

Mid Channel, 403.35 MHz, Extreme Temperature +10°C					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
403.3476663	403.35	5.8	100	Pass	

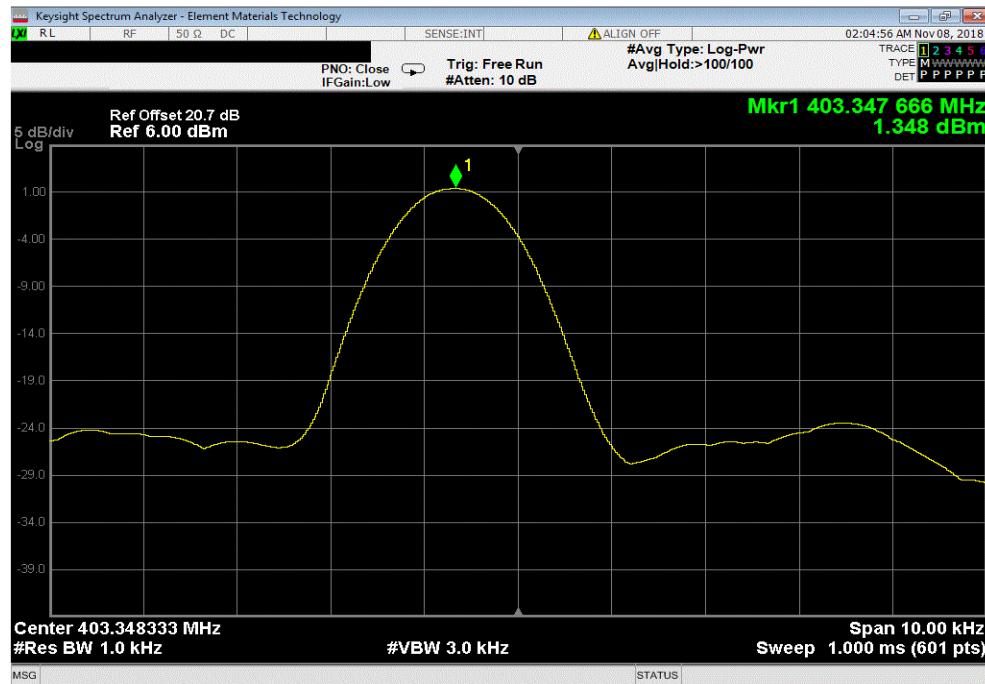

Mid Channel, 403.35 MHz, Extreme Temperature +20°C					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
403.3500997	403.35	0.3	100	Pass	

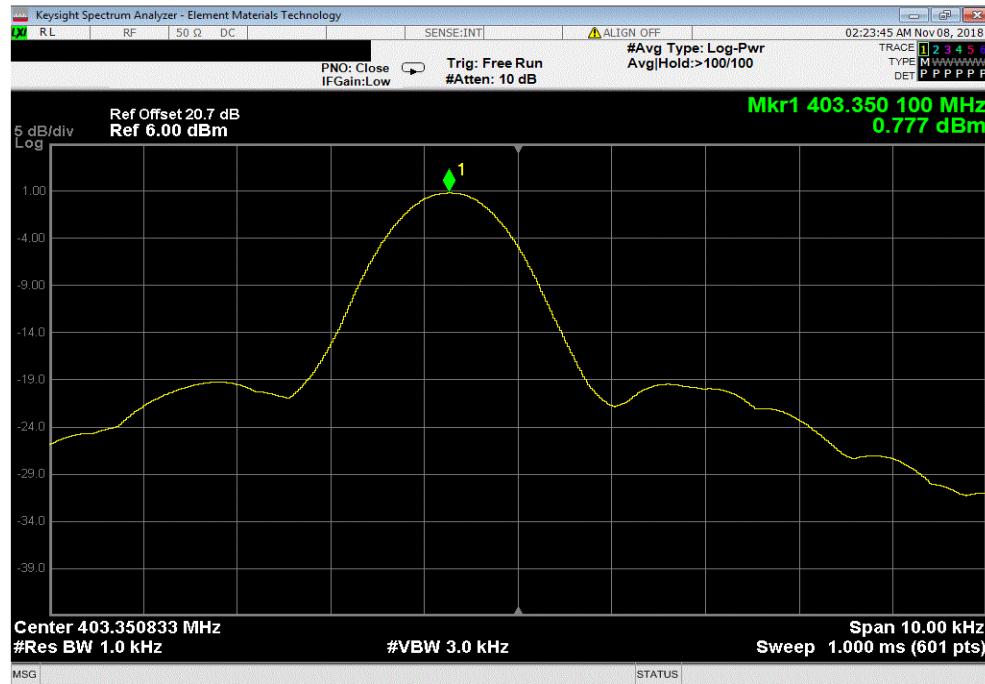


# FREQUENCY STABILITY




TbTx 2018.09.13 XMI 2017.12.13

Mid Channel, 403.35 MHz, Extreme Temperature +30°C					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
403.3472837	403.35	6.7	100	Pass	

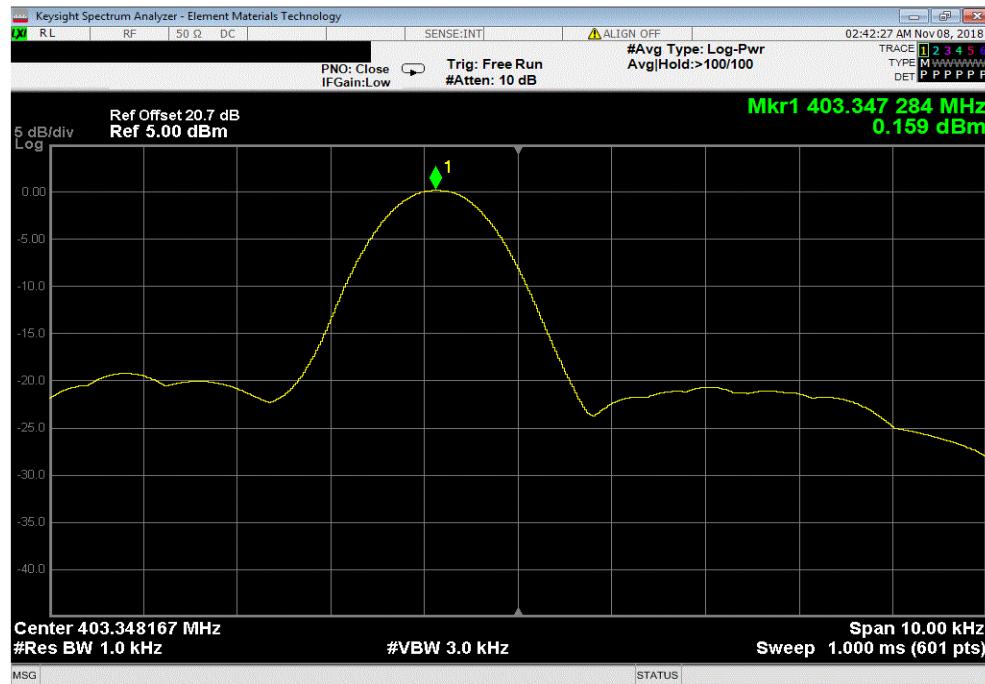

Mid Channel, 403.35 MHz, Extreme Temperature +40°C					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
403.3445167	403.35	13.6	100	Pass	

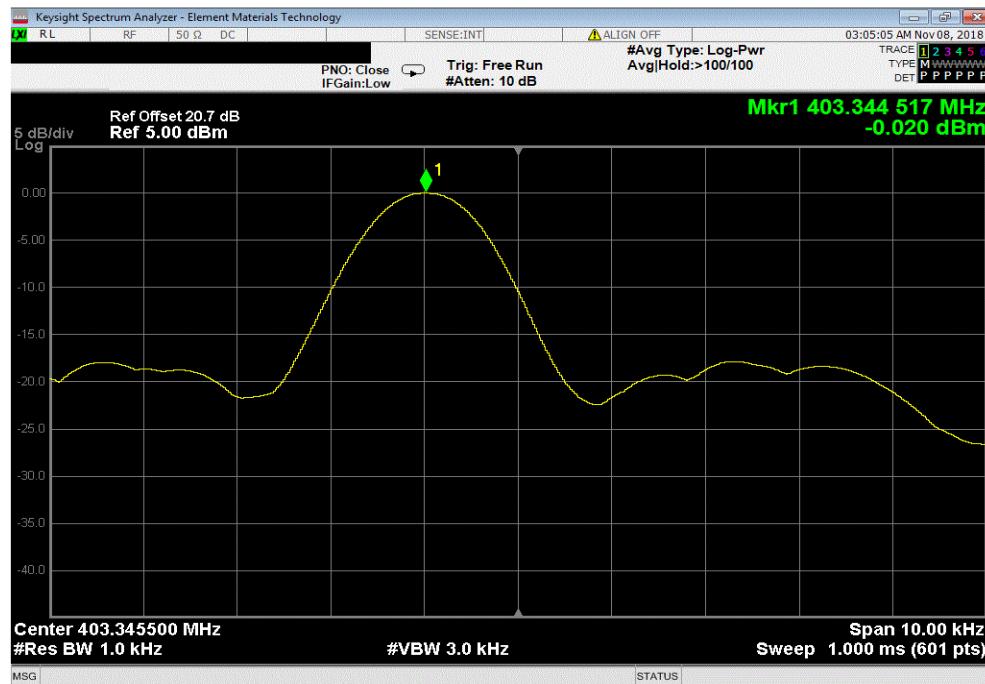


# FREQUENCY STABILITY




TbTx 2018.09.13 XMI 2017.12.13

Mid Channel, 403.35 MHz, Extreme Temperature +50°C					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
403.3418327	403.35	20.3	100	Pass	

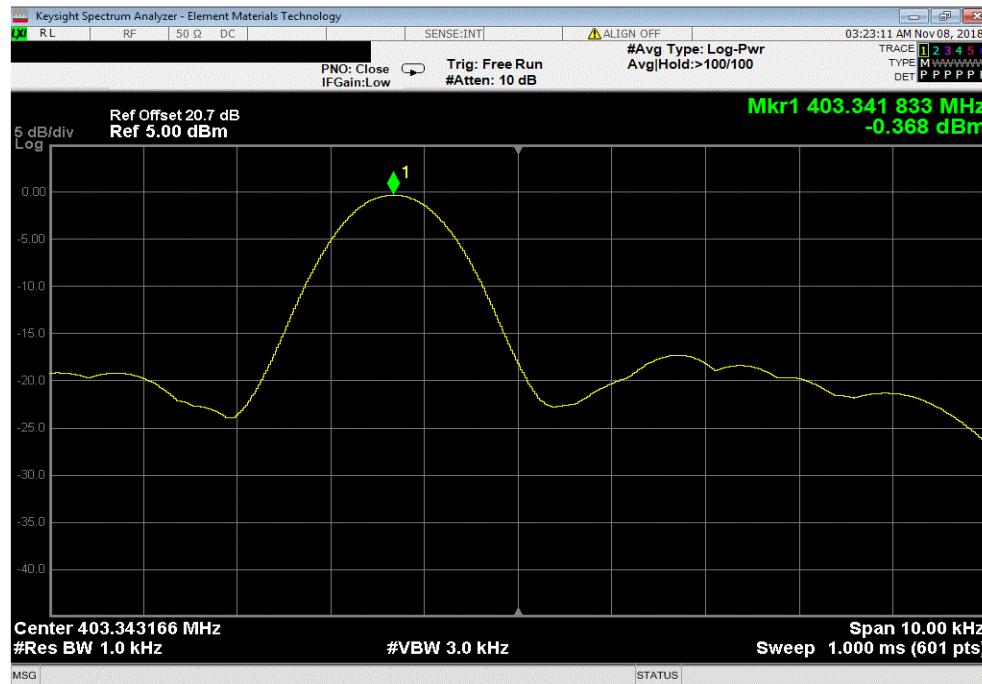

Mid Channel, 403.35 MHz, Extreme Temperature +55°C					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
403.3399673	403.35	24.9	100	Pass	

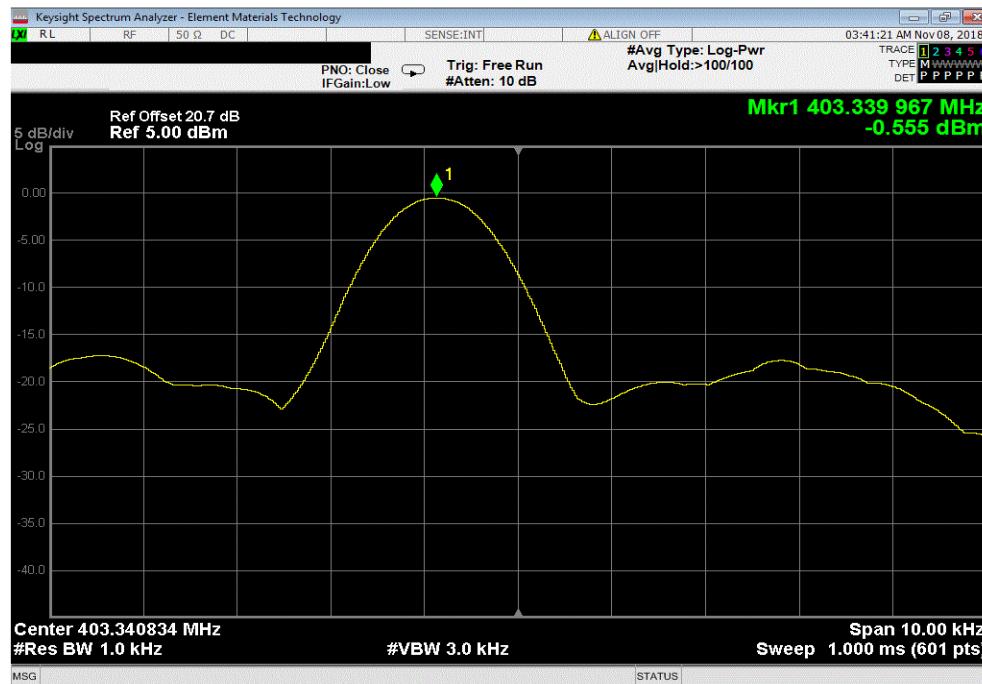


# FREQUENCY STABILITY




TbTx 2018.09.13 XMI 2017.12.13

Mid Channel, 403.35 MHz, Extreme Voltage +15%					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
403.3500997	403.35	0.3	100	Pass	

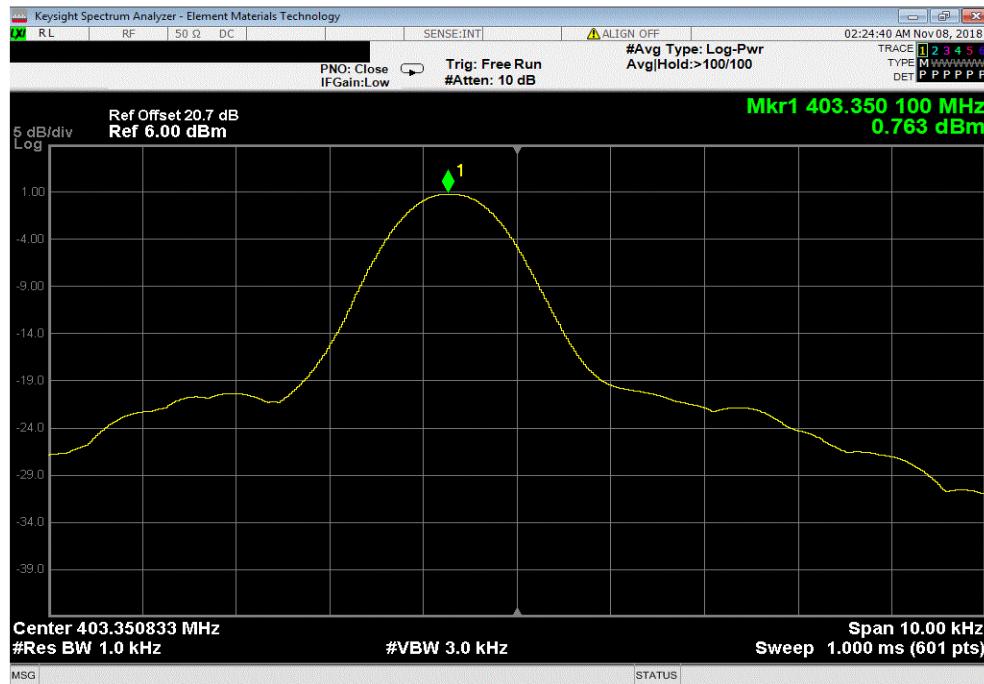

Mid Channel, 403.35 MHz, Extreme Voltage -15%					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
403.3500997	403.35	0.3	100	Pass	

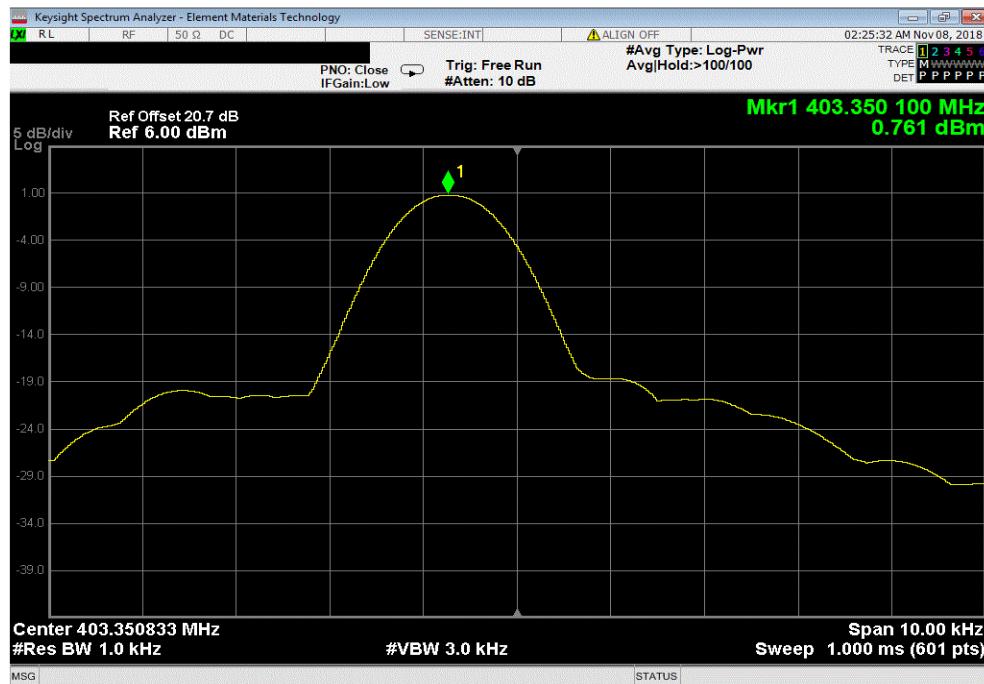

# SPURIOUS CONDUCTED EMISSIONS



XMit 2017.12.13

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

## TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	E4422B	TGQ	15-Mar-18	15-Mar-21
Cable	ESM Cable Corp.	TTBJ141 KMKM-72	MNU	15-Mar-18	15-Mar-19
Attenuator	S.M. Electronics	SA26B-20	RFW	13-Feb-18	13-Feb-19
Block - DC	Fairview Microwave	SD3379	AMI	7-Sep-18	7-Sep-19
Analyzer - Spectrum Analyzer	Keysight	N9010A (EXA)	AFQ	19-Dec-17	19-Dec-18

## TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. Per FCC Part 2.1051, the spurious emissions shall be measured at the RF terminal. The peak spurious emissions were measured with the EUT configured to the modes listed in the datasheet. The EUT was transmitting at its maximum data rate.

FCC Part 95 have no conducted spurious emissions limit. It is a requirement to characterize this information and that data is contained within this datasheet.

# SPURIOUS CONDUCTED EMISSIONS



XMI 2017.12.13


EUT:	Bluetooth Pocket Programmer		Work Order:	NUVE0019
Serial Number:	101016		Date:	7-Nov-18
Customer:	Nuvectra Corporation		Temperature:	21.3 °C
Attendees:	Peter Valentyik		Humidity:	27.6% RH
Project:	None		Barometric Pres.:	1024 mbar
Tested by:	Kyle McMullan	Power:	110VAC/60Hz	
TEST SPECIFICATIONS			Test Method	
FCC 95i:2018			ANSI C63.26:2015	
COMMENTS				
None				
DEVIATIONS FROM TEST STANDARD				
None				
Configuration #	5	Signature		
			Peak Value (dBm)	Limit
Fundamental			0.68	N/A
9 kHz - 150 kHz			-51.53	N/A
150 kHz - 30 MHz			-52.68	N/A
30 MHz - 1 GHz			-65.13	N/A
1 GHz - 5 GHz			-49.33	N/A

# SPURIOUS CONDUCTED EMISSIONS




XMT 2017.12.13

Fundamental		Peak Value (dBm)	Limit	Result
		0.68	N/A	N/A

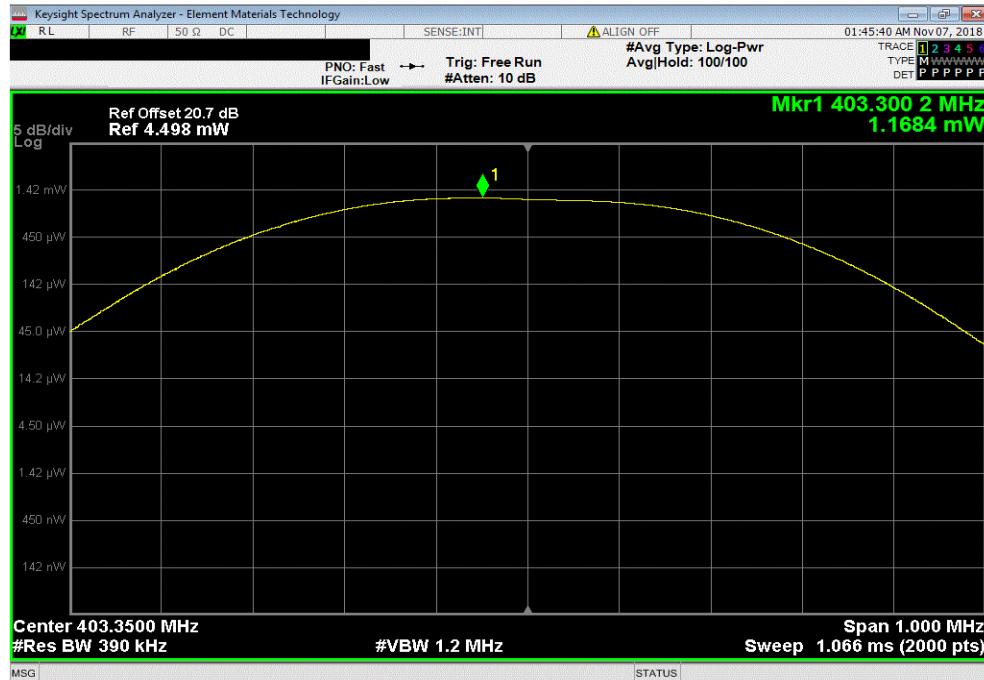

9 kHz - 150 kHz		Peak Value (dBm)	Limit	Result
		-51.53	N/A	N/A

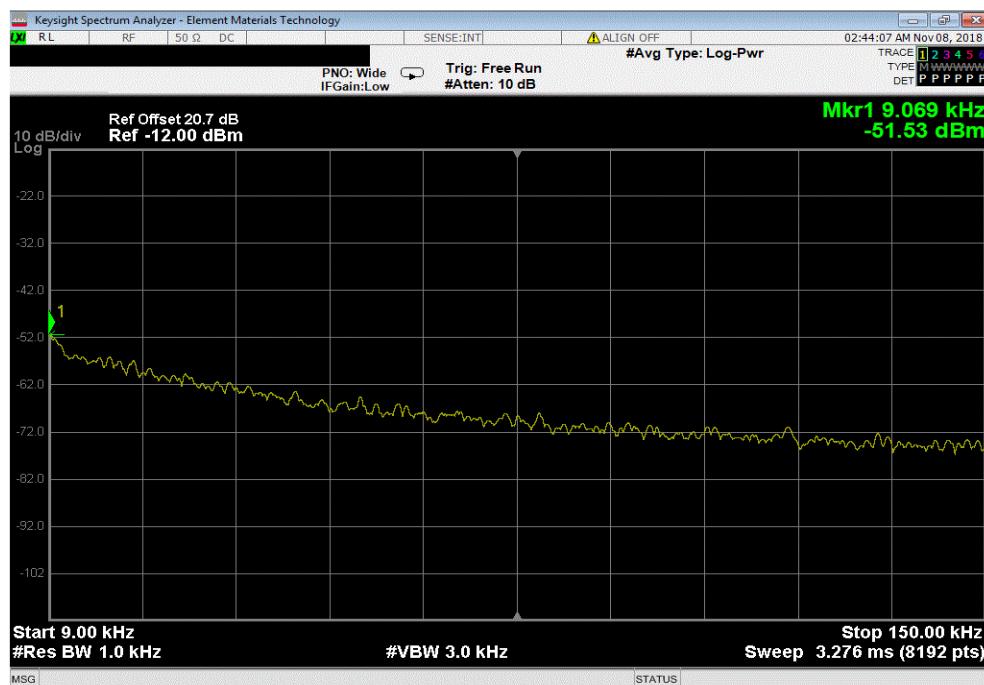


# SPURIOUS CONDUCTED EMISSIONS




XMI 2017.12.13

150 kHz - 30 MHz			
	Peak Value (dBm)	Limit	Result
	-52.68	N/A	N/A

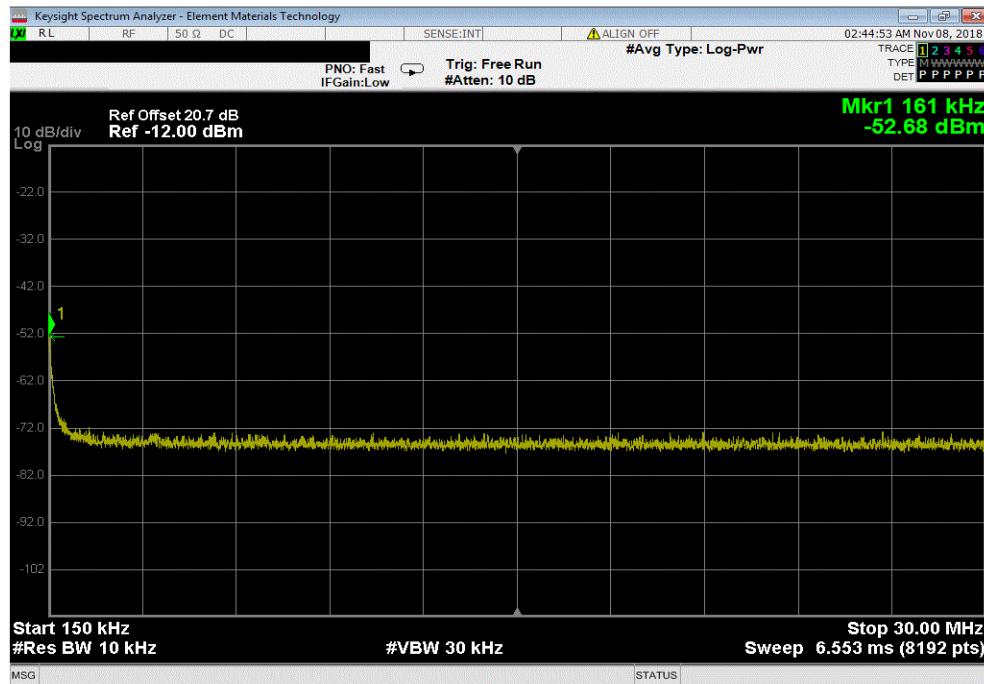

30 MHz - 1 GHz			
	Peak Value (dBm)	Limit	Result
	-65.13	N/A	N/A

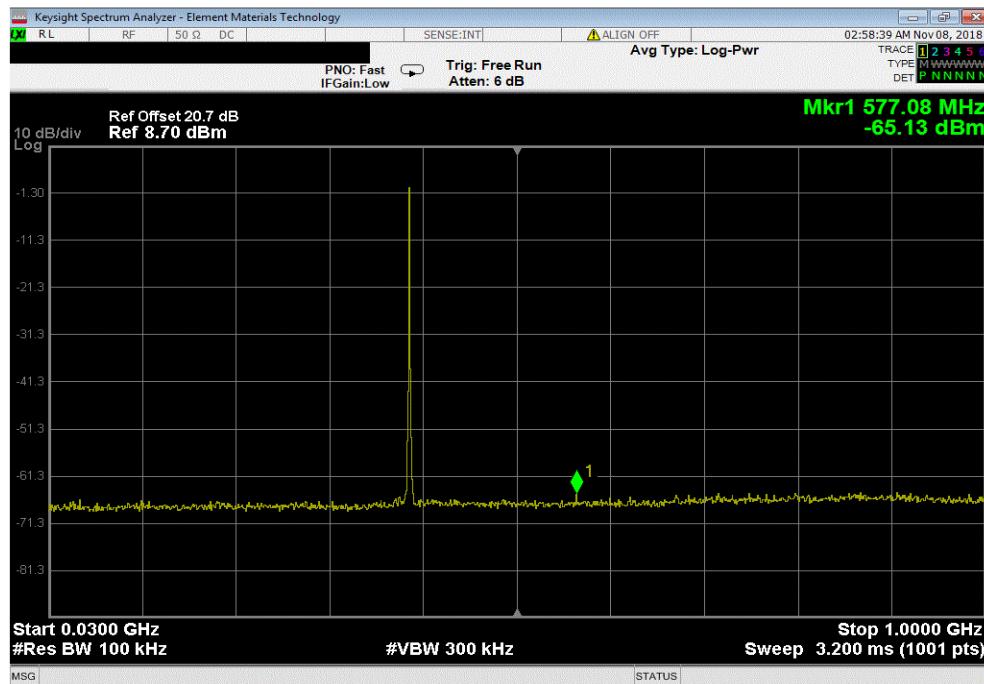


# SPURIOUS CONDUCTED EMISSIONS



XMI 2017.12.13

1 GHz - 5 GHz			
	Peak Value (dBm)	Limit	Result
	-49.33	N/A	N/A

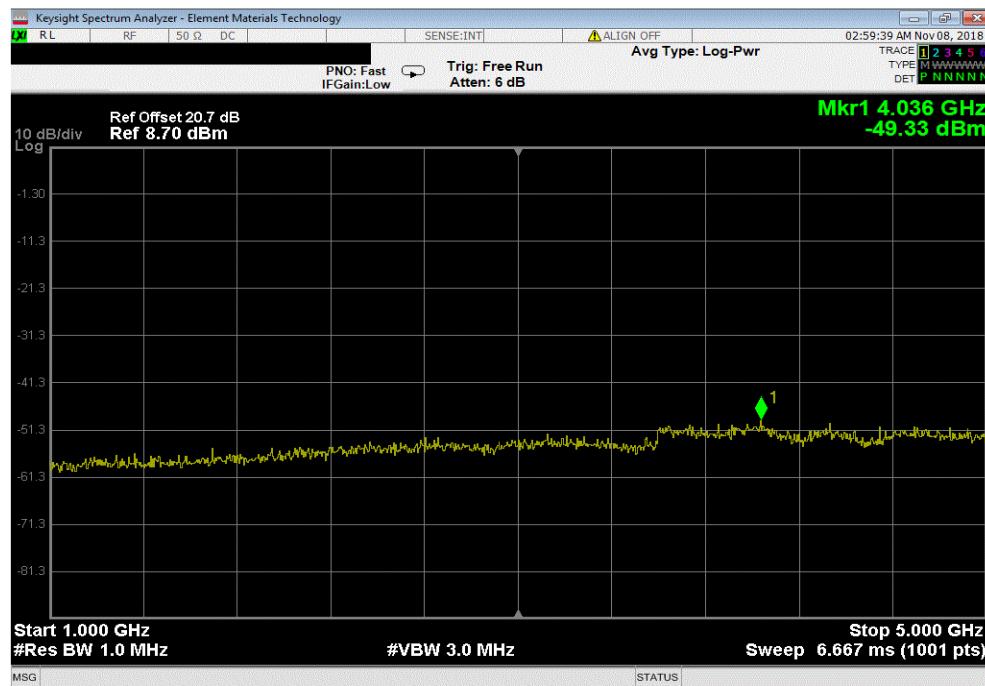

# EMISSION MASK



XMit 2017.12.13

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

## TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	E4422B	TGQ	15-Mar-18	15-Mar-21
Cable	ESM Cable Corp.	TTBJ141 KMKM-72	MNU	15-Mar-18	15-Mar-19
Attenuator	S.M. Electronics	SA26B-20	RFW	13-Feb-18	13-Feb-19
Block - DC	Fairview Microwave	SD3379	AMI	7-Sep-18	7-Sep-19
Analyzer - Spectrum Analyzer	Keysight	N9010A (EXA)	AFQ	19-Dec-17	19-Dec-18

## TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. Per 47 CFR 95.2579(a)(1) the emission mask was measured. Emissions more than 150 kHz away from the center frequency must be attenuated below the transmitter output power by at least 20 dB. This was evaluated by the Occupied Bandwidth measurement according to 47 CFR 95.2573(a). In addition, emissions 250 kHz or less above and below the MICS band (402-405 MHz) must be attenuated below the maximum permitted output power by at least 20 dB.

A spectrum analyzer was used to measure the emission mask. A spectrum analyzer using a peak detector with no video filtering was used with a resolution bandwidth equal to approximately 1.0 percent of the emission bandwidth of the EUT. However, various plots were made using different frequency spans and resolution bandwidths in an attempt to not only satisfy the measurement criteria, but to also show that all emissions outside of the occupied band are greatly attenuated.

# EMISSION MASK



TbTx 2018.09.13

XMI 2017.12.13


EUT:	Bluetooth Pocket Programmer		Work Order:	NUVE0019
Serial Number:	101016		Date:	7-Nov-18
Customer:	Nuvectra Corporation		Temperature:	21.5 °C
Attendees:	Peter Valentyik		Humidity:	28.1% RH
Project:	None		Barometric Pres.:	1024 mbar
Tested by:	Kyle McMullan	Power:	110VAC/60Hz	
TEST SPECIFICATIONS			Test Method	
FCC 95i:2018			ANSI C63.26:2015	
COMMENTS				
None				
DEVIATIONS FROM TEST STANDARD				
None				
Configuration #	5	Signature		
			Value (dBc)	Limit ≤ (dBc)
			-24.18	-20
			-22.84	-20
			Pass	
			Pass	
Low Channel, 402.15 MHz				
High Channel, 404.85 MHz				

# EMISSION MASK



TbTx 2018.09.13 XMI 2017.12.13

Low Channel, 402.15 MHz			Value (dBc)	Limit $\leq$ (dBc)	Result
			-24.18	-20	Pass

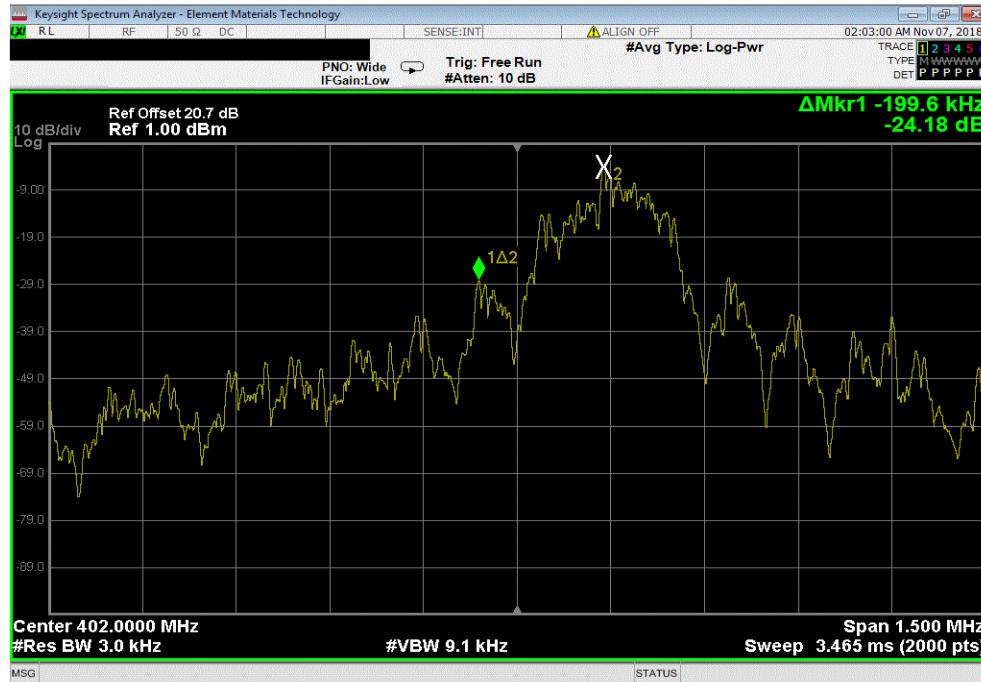

High Channel, 404.85 MHz			Value (dBc)	Limit $\leq$ (dBc)	Result
			-22.84	-20	Pass

