

廠商會檢定中心TEST REPORT

Report No. : AS0026127(7) Date : 14 May 2014

Application No. : LS014037(4)

Applicant : JY Enterprise Limited

Unit 23B, 6/F, Block A, Wah Lok Industrial Centre, 31-41 Shan Mei Street,

Fotan, Shatin, Hong Kong

Sample Description : Three (3) items of submitted sample stated to be <u>Bluetooth Speaker</u> of Model No.

JY3031BT, DD05140005-C

Sample registration No. : RS015706-001, RS018464-001 Radio Frequency : 2402MHz ~ 2480MHz Transceiver

Rating : 3.7V rechargeable battery

Date Received : 22 Apr 2014, 13 May 2014

Test Period : 25 Apr 2014 to 14 May 2014

Test Requested : FCC Part 15 Certificate

Test Method : 47 CFR Part 15 (10-1-12 Edition)

ANSI C63.4 – 2009

FCC Public Notice DA 00-705

Test Engineer : Mr. LEUNG Shu-kan, Ken

Test Result : See attached sheet(s) from page 2 to 56.

Conclusion : The submitted sample was found to comply with requirement of FCC Part 15

Subpart B and C.

 $For \ and \ on \ behalf \ of$

CMA Industrial Development Foundation Limited

Authorized Signature:

Mr. WONG Lap-pong Andrew Manager

Page 1 of 56

Electrical Division

Electrical Divi



廠商會檢定中心TEST REPORT

Report No. : AS0026127(7) Date : 14 May 2014

Table of Contents

1	Gen	eral Information	3
	1.1	General Description	3
	1.2	Location of the test site	
	1.3	List of measuring equipment.	6
	1.4	Measurement Uncertainty	. 7
2	Des	cription of the radiated emission test	
	2.1	Test Procedure	. 8
	2.2	Test Result	9
	2.3	Maximum peak output power	10
	2.4	Radiated Emission Measurement Data	11
3	Des	cription of the Line-conducted Test	14
	3.1	Test Procedure	14
	3.2	Test Result	14
	3.3	Graph and Table of Conducted Emission Measurement Data	14
4	Pho	tograph	
	4.1	Photographs of the Test Setup for Radiated Emission and Conducted Emission	
	4.2	Photographs of the External and Internal Configurations of the EUT	15
5	Sup	plementary document	16
	5.1	Bandwidth	16
	5.2	Duty cycle	17
	5.3	Transmission time	17
	5.4	Power Spectral Density	
	5.5	Hopping sequence	17
	5.6	Average on time	
6	App	pendices	19

Page 2 of 56



廠商會檢定中心TEST REPORT

Report No. : AS0026127(7) Date : 14 May 2014

1 General Information

1.1 General Description

The equipment under test (EUT) is a 2.4GHz Bluetooth speaker. The EUT is power by 3.7V rechargeable battery. It can connect to other wireless device by bluetooth and then play the music. The micro-USB port is only for battery chary charging. The mini-USB port is only the connecting port between main and auxiliary speaker. Both USB ports do not have data transfer function and do not have function when connecting computer.

For the Bluetooth mode, it supports standard Bluetooth V3.0+EDR or below revision protocol for data synchronization. After paring with other standard Bluetooth device, it can play the music.

The Bluetooth module used in the speaker has been test and approved by official Bluetooth Special Interest Group (SIG) member. All technical requirements including hopping rate, Frequency channels, Pseudo randomly order list and Bandwidth has been tested and complied with Spread Spectrum System requirements. The compliance information was listed at Bluetooth SIG with ID code is B020097 for model No CW6635.

A non standardized Bluetooth protocol or other Gaussian frequency-shift keying (GFSK) digital modulation signal was unable to synchronize the Bluetooth speaker.

A Bluetooth trademark was printed on the speaker enclosure to indicate it communicate with Bluetooth protocol only.

The USB port is unable to synchronize with personal computer, this port is for 3.7V battery charging only.

Pseudorandom frequency hopping sequence

The channel is represented by a pseudo-random hopping sequence hopping through the 79 RF channels. The hopping sequence is unique for the piconet and is determined by the Bluetooth device address of the master; the phase in the hopping sequence is determined by the Bluetooth clock of the master. The channel is divided into time slots where each slot corresponds to an RF hop frequency. Consecutive hops correspond to different RF hop frequencies. The nominal hop rate is 1600 hops/s. Example of a 79 hopping sequence in data mode: 40, 21, 44, 23, 42, 53, 46, 55, 48, 33, 52, 35, 50, 65, 54...

Equal Hopping Frequency Use

All Bluetooth units participating in the piconet are time and hop-synchronized to the channel.

System Receiver Input Bandwidth

Page 3 of 56



廠商會檢定中心TEST REPORT

Report No. : AS0026127(7) Date : 14 May 2014

The input bandwidth of the receiver is 1 MHz. In every connection one Bluetooth device is the master and the other one is slave. The aster determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally the type of connection (e.g. single multisport (packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also the slave of the connection will use these settings. Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.

Equipment Description

15.247(g): In accordance with the Bluetooth Industry Standard, the system is designed to comply With all of The regulations in Section 15.247 when the transmitter is presented with a continuous data (or information) system.

15.247(h): In accordance with the Bluetooth Industry Standard, the system does not coordinate it channels selection/hopping sequence with other frequency hopping systems for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

The brief circuit description is listed as follows:

- LED1, LED2, LED3, LED4

- MicroUSB1, D5, Q2, LED8

- SW2, R188

- U8, U7, Q1

- U6, U5

- U1

- U3, U4

Antenna type : PCB Antenna

Antenna gain : 0dBi Modulation technique : GFSK Number of channel : 79 channels and its associated circuit act as LED display and its associated circuit act as charging and its associated circuit act as switch and its associated circuit act as Bluetooth module and its associated circuit act as audio DAC and its associated circuit act as audio amplifier and its associated circuit act as motor

Page 4 of 56



廠商會檢定中心TEST REPORT

Report No. : AS0026127(7) Date : 14 May 2014

1.2 Location of the test site

FCC Registered Test Site Number: 552221

Radiated emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.4 – 2009. A Semi-Anechoic Chamber Testing Site is set up for investigation and located at:

Ground Floor, Yan Hing Centre, 9 – 13 Wong Chuk Yeung Street, Fo Tan, Shatin, New Territories, Hong Kong.

Conducted emissions measurements are investigated and also taken pursuant to the procedures of ANSI C63.4 - 2009. A shielded room is located at :

Ground Floor, Yan Hing Centre, 9 – 13 Wong Chuk Yeung Street, Fo Tan, Shatin, New Territories, Hong Kong.

Page 5 of 56



廠商會檢定中心TEST REPORT

Report No. : AS0026127(7) Date : 14 May 2014

1.3 List of measuring equipment

Equipment	Manufacturer	Model No.	Serial No.	Calibration Due Date	Calibration Period
EMI Test Receiver	R&S	ESCI	100152	08 Jul 2014	1Year
Spectrum Analyzer	R&S	FSP30	100628	15 Aug 2014	1Year
Broadband Antenna	Schaffner	CBL6112B	2718	06 Jan 2015	1Year
Loop Antenna	EMCO	6502	00056620	15 Sep 2014	1Year
Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-531	09 Oct 2014	1Year
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170442	16 May 2015	2Years
Broadband Pre-Amplifier	Schwarzbeck	BBV 9718	9718-119	09 Oct 2014	1Year
Broadband Pre-Amplifier	Schwarzbeck	BBV 9719	9719-010	16 May 2015	2Years
LISN	R&S	ESH3-Z5	100038	10 Dec 2014	1Year
Coaxial Cable	Schaffner	RG 213/U	N/A	28 May 2014	1Year
Coaxial Cable	Suhner	RG 214/U	N/A	28 May 2014	1Year
Coaxial Cable	Suhner	Sucoflex_102	N/A	09 Oct 2014	1Year

Page 6 of 56



廠商會檢定中心TEST REPORT

Report No. : AS0026127(7) Date : 14 May 2014

1.4 Measurement Uncertainty

The reported uncertainty is based on a standard uncertainty multiplied by a coverage factor k=2, providing a level of confidence of approximately 95%.

Radiated emissions

Frequency	Uncertainty (U _{lab})
30MHz ~ 200MHz (Horizontal)	4.63dB
30MHz ~ 200MHz (Vertical)	4.65dB
200MHz ~1000MHz (Horizontal)	4.45dB
200MHz ~1000MHz (Vertical)	4.41dB

Conducted emissions

Frequency	Uncertainty (U _{lab})
150kHz~30MHz	2.47dB

Page 7 of 56



廠商會檢定中心TEST REPORT

Report No. : AS0026127(7) Date : 14 May 2014

2 Description of the radiated emission test

2.1 Test Procedure

Radiated emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.4 - 2009 and DA 00-705.

The equipment under test (EUT) was placed on a non-conductive turntable with dimensions of 1.5m x 1m and 0.8m high above the ground. 3m from the EUT, a broadband antenna mounting on the mast received the signal strength. The turntable was rotated to maximize the emission level. The antenna was then moving along the mast from 1m up to 4m until no more higher value was found. Both horizontal and vertical polarization of the antenna were placed and investigated.

For below 30MHz, a loop antenna with its vertical plane is placed 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1 m above the ground.

For 30MHz to 1GHz, broadband antenna with its vertical and horizontal plane is placed 3m from the EUT and rotated about its vertical and horizontal axis for maximum response at each azimuth about the EUT. And the reference point of antenna shall be 1 m above the ground.

For above 1GHz, horn antenna with its vertical and horizontal plane is placed 3m from the EUT and rotated about its vertical and horizontal axis for maximum response at each azimuth about the EUT. Preamplifier and High Pass filter was used for measurements. The reference point of antenna shall be 1 m above the ground.

The device was rotated through three orthogonal axes to determine which attitude and configuration produce the highest emission during measurement for Radiated Emission measurement.

Page 8 of 56



廠商會檢定中心TEST REPORT

Report No. : AS0026127(7) Date : 14 May 2014

2.2 Test Result

Summary

Section in FCC part 15	Description	Result
15.205(a), 15.209, 15.247(d)	Transmitter radiated spurious field strength and other emissions	Page 10-12
15.209	Receiver emissions	Page 13
15.209	Voltage disturbance	Page 14, 34, 35
15.247 (a)(1), Part 2.1 and DA- 00705	Hopping sequence	Page 36, 37
15.247 (a)(1)	20dB bandwidth and 99% bandwidth	Page 38-40
15.247 (a)(1)	Channel Spacing (Frequency separation)	Page 41, 42
15.247 (a)(1)(iii)	Number of hopping frequency	Page 43
15.247 (d)	Band Edge	Page 44, 45
15.247 (a)(1)(iii)	Dwell Time (Bluetooth Average On Time)	Page 46-54
15.247 (b)(1)	Maximum Peak output power	Page 10, 55, 56

Subpart C:

Peak Detector and Average Detector data were measured unless otherwise stated.

"#" means emissions appear within the restricted bands shall follow the requirement of section 15.205.

The Frequencies from fundamental up to that tenth harmonics were investigated, and emission more 20dB below limited were not reported. Thu, those higher emissions were presented in next page (section 2.3).

Subpart B:

The emissions meet the requirement of section 15.109 are based on measurements employing the CISPR quasi-peak detector below 1000MHz and average detector for frequencies above 1000MHz.

The frequencies from 30MHz to 1000MHz were investigated, and emissions more 20dB below limit were not reported. Thus, those highest emissions were presented in next page (section 2.3).

It was found that the EUT meet the FCC requirement.

Page 9 of 56



廠商會檢定中心TEST REPORT

Report No. : AS0026127(7) Date : 14 May 2014

2.3 Maximum peak output power

Conductive measurements

pursuant to

the requirement of FCC Part 15 subpart C

Environmental conditions:

ParameterRecorded valueAmbient temperature:26° CRelative humidity:60%

Operation Mode: Transmission

Channel	Frequency (MHz)	Reading (dBm)	Reading (mW)	Limit (mW)	Margin (mW)
00	2402.007	- 2.62	0.547	1000.0	- 999.453

Channel	Frequency (MHz)	Reading (dBm)	Reading (mW)	Limit (mW)	Margin (mW)
39	2441.014	- 2.91	0.511	1000.0	- 999.489

Channel	Frequency (MHz)	Reading (dBm)	Reading (mW)	Limit (mW)	Margin (mW)
78	2479.985	- 3.83	0.414	1000.0	- 999.586

The plot saved in TestRpt9.pdf shows the transmission power was less than 1 watt.

Page 10 of 56



廠商會檢定中心TEST REPORT

Report No. 14 May 2014 AS0026127(7) Date:

2.4 **Radiated Emission Measurement Data**

Radiated emission

pursuant to

the requirement of FCC Part 15 subpart C

° C

Environmental conditions:

Parameter Recorded value Ambient temperature: 26

Relative humidity: 80 Detector: Peak RBW: 1MHz VBW: 3MHz

	Г	KHz to 25G	Reading	Transducer	Field Strength	I imaid at 2 mg	
Channel	Frequency	Polarity	at 3m	Factor	at 3m	Limit at 3m	Margin
	(MHz)	(H/V)	(dBµV)	(dB/m)	$(dB\mu V/m)$	(dBµV/m)	(dB)
	2402.075	V	54.0	31.6	85.6	114.0	- 28.4
00	#4803.942	Н	55.1	2.0	57.5	74.0	- 16.5
00	7205.632	V	39.9	10.2	50.7	74.0	- 23.3
	7205.965	Н	45.3	12.9	56.1	74.0	- 17.9
	2441.008	V	53.6	31.6	85.2	114.0	- 28.8
39	#4881.869	V	51.8	2.0	54.2	74.0	- 19.8
39	#7322.891	V	42.6	10.2	53.4	74.0	- 20.6
	#7323.173	Н	46.8	12.9	57.6	74.0	- 16.4
	Ţ.						
	2480.013	V	53.6	31.6	85.2	114.0	- 28.8
78	#4960.115	V	53.3	2.0	55.7	74.0	- 18.3
10	#4960.152	Н	51.3	10.2	62.1	74.0	- 11.9
	#7440.166	Н	45.4	12.9	56.2	74.0	- 17.8

Remark: Other emissions more than 20dB below the limit are not reported.

Page 11 of 56



廠商會檢定中心TEST REPORT

Report No. 14 May 2014 AS0026127(7) Date:

2.4 Radiated Emission Measurement Data (Con't)

Radiated emission

pursuant to

the requirement of FCC Part 15 subpart C

Environmental conditions:

Parameter Recorded value

° C Ambient temperature: 26 Relative humidity: 80 RBW: 1MHz VBW: 10Hz Detector: Average

Testing frequency range: 9kHz to 25GHz

Channel	Frequency (MHz)	Polarity (H/V)	Reading at 3m (dBµV)	Transducer Factor (dB/m)	Field Strength at 3m (dBµV/m)	Limit at 3m (dBµV/m)	Margin (dB)
	2402.028	V	53.0	31.6	84.6	94.0	- 9.4
00	#4804.130	Н	43.9	2.0	46.3	54.0	- 7.7
00	7206.000	V	32.6	10.2	43.4	54.0	- 10.6
	7206.081	Н	36.4	12.9	47.2	54.0	- 6.8
	2441.028	V	52.8	31.6	84.4	94.0	- 9.6
39	#4882.108	V	45.0	2.0	47.4	54.0	- 6.6
39	#7323.079	V	37.8	10.2	48.6	54.0	- 5.4
	#7323.080	Н	38.1	12.9	48.9	54.0	- 5.1
	2480.028	V	52.8	31.6	84.4	94.0	- 9.6
78	#4960.115	V	45.4	2.0	47.8	54.0	- 6.2
/8	#4960.094	Н	42.7	10.2	53.5	54.0	- 0.5

12.9

49.5

Remark: Other emissions more than 20dB below the limit are not reported.

38.7

Η

Page 12 of 56

- 4.5

54.0

FCC ID: 2ABVAJY3031BT

#7440.007



廠商會檢定中心TEST REPORT

Report No. : AS0026127(7) Date : 14 May 2014

2.4 Radiated Emission Measurement Data (Con't)

Radiated emission

pursuant to

the requirement of FCC Part 15 subpart B

Environmental conditions:

ParameterRecorded valueAmbient temperature:25° CRelative humidity:70%

Detector: Quasi-peak (Below 1GHz), Peak (Above 1GHz)

RBW: 120kHz VBW: 300kHz (Below 1GHz) RBW: 1MHz VBW: 3MHz (Above 1GHz)

Operation Mode: Receiving mode

Testing frequency range: 9kHz to 25GHz

Frequency (MHz)	Polarity (H/V)	Reading at 3m (dBµV)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dBµV/m)	Limit at 3m (dBµV/m)	Margin (dB)
384.009	V	12.2	16.8	29.0	46.0	- 17.0
598.014	V	10.7	22.2	32.9	46.0	- 13.1
608.014	V	10.5	22.8	33.3	46.0	- 12.7
640.015	V	10.7	22.8	33.5	46.0	- 12.5
4800.112	Н	49.4	2.0	51.4	54.0	- 2.6
4800.123	V	44.7	2.0	46.7	54.0	- 7.3
4878.126	V	45.3	2.0	47.3	54.0	- 6.7
4878.128	Н	49.8	2.0	51.8	54.0	- 2.2
4956.124	Н	49.9	2.0	51.9	54.0	- 2.1
4956.125	V	46.2	2.0	48.2	54.0	- 5.8

Remark: Other emissions more than 20dB below the limit are not reported.

Peak measurement over 1GHz are lower than average limit, therefore average measurement is not necessary

Page 13 of 56



廠商會檢定中心TEST REPORT

Report No. : AS0026127(7) Date : 14 May 2014

3 Description of the Line-conducted Test

3.1 Test Procedure

Conducted emissions measurements are investigated and also taken pursuant to the procedures of ANSI C63.4 - 2009. The EUT was setup as described in the procedures, and both lines were measured.

3.2 Test Result

The EUT is connected to adaptor.

It was found that the EUT met the FCC requirement.

3.3 Graph and Table of Conducted Emission Measurement Data

For electronic filling, the document is saved with filename TestRpt2.pdf.

Page 14 of 56



廠商會檢定中心TEST REPORT

Report No. : AS0026127(7) Date : 14 May 2014

- 4 Photograph
- 4.1 Photographs of the Test Setup for Radiated Emission and Conducted Emission

For electronic filing, the photos are saved with filename TSup1.jpg to TSup9.jpg.

4.2 Photographs of the External and Internal Configurations of the EUT

For electronic filing, the photos are saved with filename ExPho1.jpg to ExPho7.jpg and InPho1.jpg to InPho6.jpg.

Page 15 of 56



廠商會檢定中心TEST REPORT

Report No. : AS0026127(7) Date : 14 May 2014

5 Supplementary document

The following document were submitted by applicant, and for electronic filing, the document are saved with the following filenames:

Document	Filename		
ID Label/Location	LabelSmp.jpg		
Block Diagram	BlkDia.pdf		
Schematic Diagram	Schem.pdf		
Users Manual	UserMan.pdf		
Operational Description	OpDes.pdf		

5.1 Bandwidth

Bluetooth:

The plot saved in TestRpt4.pdf shows the 20dB bandwidth and 99% bandwidth:

The plot but to in Testifet input shows the 2002 cane with the 3570 cane with the			
Frequency Channel	20dB bandwidth	99% bandwidth	
(MHz)	(kHz)	(kHz)	
2402	1114.3	998.5	
2441	1128.8	1005.7	
2480	1114.3	1005.7	

The plot saved in TestRpt5.pdf shows the channel spacing has minimum 25 kHz or two-third of 20dB bandwidth of hopping channel.

Frequency	Channel spacing	Two-third of 20dB	Minimum bandwidth
(MHz)	(kHz)	bandwidth (kHz)	(kHz)
2402	1005.8	665.7	25
2441	1005.8	670.5	25
2480	1013.0	670.5	25

The plot saved in TestRpt6.pdf shows the frequency hopping channel over 75 hopping frequency.

The plot saved in TestRpt7.pdf shows the fundamental emission is confined in the specified band. It shows the 20dB bandwidth and band edge meet the 15.247(d) and 15.205 requirement.

Page 16 of 56



廠商會檢定中心TEST REPORT

14 May 2014 Report No. AS0026127(7) Date:

5.2 **Duty cycle**

Not Applicable

5.3 Transmission time

Not Applicable

5.4 **Power Spectral Density**

Not Applicable

5.5 **Hopping sequence**

> The plot saved in TestRpt3.pdf shows the hopping sequence is pseudorandom randomly distributed. Four example of continuous fundamental frequency hopping pattern was as below:

The 1^{st} example of fundamental frequency = 2.454080GHz

The 2^{nd} example of fundamental frequency = 2.422900 GHzThe 3^{rd} example of fundamental frequency = 2.440060 GHz

The 4^{th} example of fundamental frequency = 2.416860GHz

Result:

Fc 1 - Fc 2 = +31.18MHz

Fc 2 - Fc 3 = -17.16MHz

Fc 3 - Fc 4 = +23.20MHz

It was found the hopping pattern is pseudorandom random.

Page 17 of 56



廠商會檢定中心TEST REPORT

Report No. : AS0026127(7) Date : 14 May 2014

5.6 Average on time

The plot saved in TestRpt8.pdf shows the average on time for frequency hopping channel is within 0.4 seconds.

The calculation for average on time as below:

Average hopping channel = Number of transmitted carrier / Sweep time

Average on time = Packet on time x Average hopping channel

Dwell time = Average on time x Total frequency hopping channel x 0.4

Test result:

Frequency Channel (MHz)	Packet	Dwell Time (Seconds)	Limit (Seconds)	Margin (Seconds)
2402	DH1	0.128	0.4	- 0.272
2402	DH3	0.121	0.4	- 0.279
2402	DH5	0.121	0.4	- 0.279
2441	DH1	0.247	0.4	- 0.153
2441	DH3	0.299	0.4	- 0.101
2441	DH5	0.289	0.4	- 0.111
2480	DH1	0.346	0.4	- 0.054
2450	DH3	0.350	0.4	- 0.050
2480	DH5	0.273	0.4	- 0.127

Page 18 of 56



廠商會檢定中心TEST REPORT

Report No. : AS0026127(7) Date : 14 May 2014

6 Appendices

A1	Photos of the set-up of Radiated Emissions	3	pages
A2	Photos of the set-up of Conducted Emissions	2	pages
A3	Photos of External Configurations	4	pages
A4	Photos of Internal Configurations	3	pages
A5	ID Label/Location	2	pages
A6	Conducted Emission Measurement Data	2	pages
A7	Hopping sequence	2	pages
A8	20 dB bandwidth and 99% bandwidth	3	pages
A9	Bluetooth Channel Spacing	2	pages
A10	Bluetooth Hopping Channel	1	page
A11	Bluetooth Band Edge	2	pages
A12	Bluetooth Average on time	9	pages
A13	Transmission Power	2	pages


Page 19 of 56




廠商會檢定中心TEST REPORT

Report No. : AS0026127(7) Date : 14 May 2014

A1. Photos of the set-up of Radiated Emissions



(Front view, 30MHz – 1GHz)



(Back view, 30MHz - 1GHz)

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew


Page 20 of 56

FCC ID: 2ABVAJY3031BT




廠商會檢定中心TEST REPORT

Report No. : AS0026127(7) Date : 14 May 2014



(Front view, 9KHz – 30MHz)



(Back view, 9KHz - 30MHz)

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew


Page 21 of 56

FCC ID: 2ABVAJY3031BT



廠商會檢定中心TEST REPORT

Report No. : AS0026127(7) Date : 14 May 2014



(front view, 1GHz – 25GHz)



(rear view, 1GHz – 25GHz)

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

Page 22 of 56

FCC ID: 2ABVAJY3031BT




廠商會檢定中心TEST REPORT

Report No. : AS0026127(7) Date : 14 May 2014

A2 Photos of the set-up of Conducted Emission



(front view)



(rear view)

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

Page 23 of 56


FCC ID: 2ABVAJY3031BT



廠商會檢定中心TEST REPORT

Report No. : AS0026127(7) Date : 14 May 2014

Photos of the set-up of Conducted Emission



(side view)

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

Page 24 of 56


FCC ID: 2ABVAJY3031BT



廠商會檢定中心TEST REPORT

Report No. : AS0026127(7) Date : 14 May 2014

A3. Photos of External Configurations



External Configuration 1



External Configuration 2 (Main speaker)

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

Page 25 of 56


FCC ID: 2ABVAJY3031BT



廠商會檢定中心TEST REPORT

Report No. : AS0026127(7) Date : 14 May 2014

A3. Photos of External Configurations



External Configuration 3 (Main speaker)



External Configuration 4 (Main speaker)

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

Page 26 of 56


FCC ID: 2ABVAJY3031BT




廠商會檢定中心TEST REPORT

Report No. : AS0026127(7) Date : 14 May 2014

A3. Photos of External Configurations



External Configuration 5 (Auxiliary speaker)



External Configuration 6 (Auxiliary speaker)

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

Page 27 of 56

FCC ID: 2ABVAJY3031BT



廠商會檢定中心TEST REPORT

Report No. : AS0026127(7) Date : 14 May 2014

A3. Photos of External Configurations



External Configuration 7 (Auxiliary speaker)

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

Page 28 of 56

FCC ID: 2ABVAJY3031BT



廠商會檢定中心TEST REPORT

Report No. : AS0026127(7) Date : 14 May 2014

A4. Photos of Internal Configurations



Internal Configuration 1 (Main speaker, main board)



Internal Configuration 2 (Main speaker, main board)

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

Page 29 of 56


FCC ID: 2ABVAJY3031BT



廠商會檢定中心TEST REPORT

Report No. : AS0026127(7) Date : 14 May 2014

A4. Photos of Internal Configurations



Internal Configuration 3 (Main speaker, main board)



Internal Configuration 4 (Main speaker, module)

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

Page 30 of 56


FCC ID: 2ABVAJY3031BT




廠商會檢定中心TEST REPORT

Report No. : AS0026127(7) Date : 14 May 2014

A4. Photos of Internal Configurations



Internal Configuration 5 (Auxiliary speaker)



Internal Configuration 6 (Auxiliary speaker)

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

Page 31 of 56

FCC ID: 2ABVAJY3031BT



廠商會檢定中心TEST REPORT

Report No. : AS0026127(7) Date : 14 May 2014

A5. ID Label / Location



Label 1



Label 2

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

Page 32 of 56

FCC ID: 2ABVAJY3031BT



廠商會檢定中心TEST REPORT

Report No. : AS0026127(7) Date : 14 May 2014

A5. ID Label / Location



Label 3



Label 4

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

Page 33 of 56


FCC ID: 2ABVAJY3031BT



廠商會檢定中心TEST REPORT

Report No. : AS0026127(7) Date : 14 May 2014

A6 Conducted Emission Measurement Date

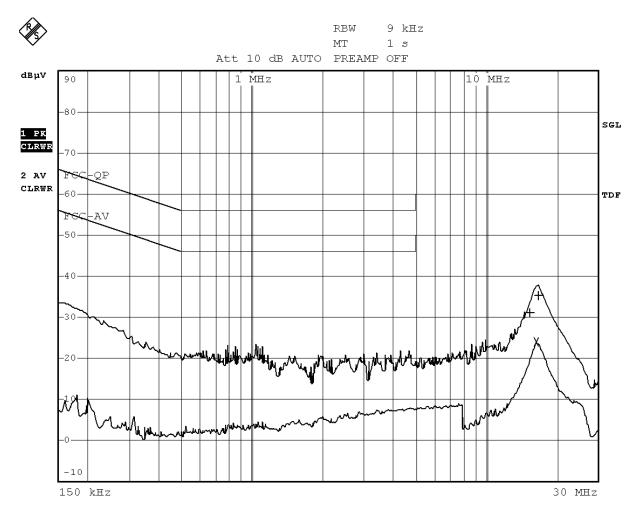

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

Page 34 of 56

FCC ID: 2ABVAJY3031BT



廠商會檢定中心TEST REPORT

Report No. : AS0026127(7) Date : 14 May 2014

A6 Conducted Emission Measurement Date

EDIT PEAK LIST (Final Measurement Results)				
Tracel: FCC-QP				
Trace2:	FCC-AV			
Trace3:				
TRACE	FREQUENCY	LEVEL dBµV	DELTA LIMIT dB	
1 Quasi Peak	15.47 MHz	31.12 N gnd	-28.87	
2 Average	16.47 MHz	23.99 N gnd	-26.00	
1 Quasi Peak	16.68 MHz	35.17 N gnd	-24.82	

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

Page 35 of 56


FCC ID: 2ABVAJY3031BT




廠商會檢定中心TEST REPORT

Report No. : AS0026127(7) Date : 14 May 2014

A7. Hopping sequence

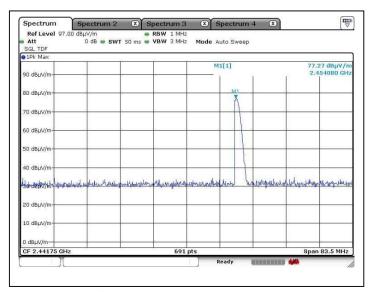

1st example of fundamental frequency

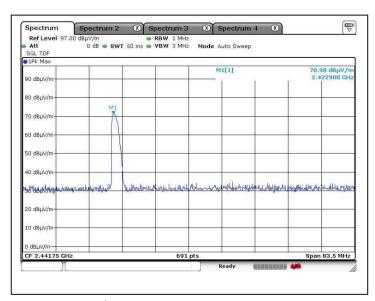

2nd example of fundamental frequency

Tested by:

Jan

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

Page 36 of 56


FCC ID: 2ABVAJY3031BT




廠商會檢定中心TEST REPORT

Report No. : AS0026127(7) Date : 14 May 2014

A7. Hopping sequence

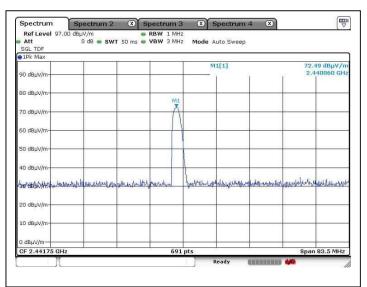

3rd example of fundamental frequency

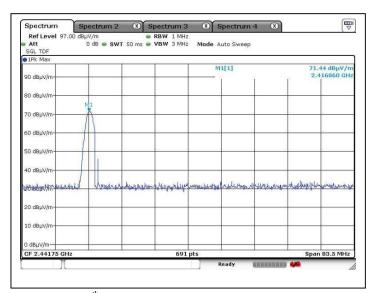

4th example of fundamental frequency

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

Page 37 of 56

FCC ID: 2ABVAJY3031BT




廠商會檢定中心TEST REPORT


Report No. : AS0026127(7) Date : 14 May 2014

A8. 20 dB bandwidth and 99% bandwidth

Channel: CH00

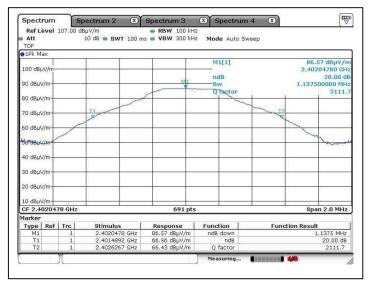

20 dB bandwidth

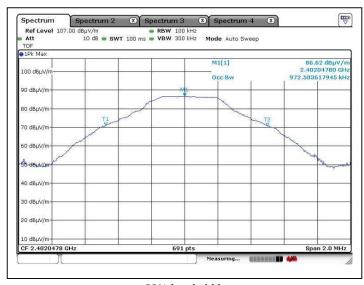

99% bandwidth

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

Page 38 of 56

FCC ID: 2ABVAJY3031BT




廠商會檢定中心TEST REPORT


Report No. : AS0026127(7) Date : 14 May 2014

A8. 20 dB bandwidth and 99% bandwidth

Channel: CH39

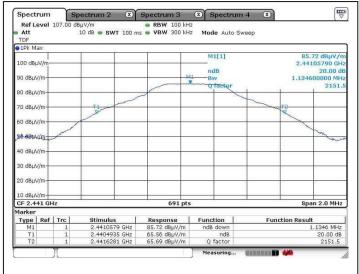

20 dB bandwidth

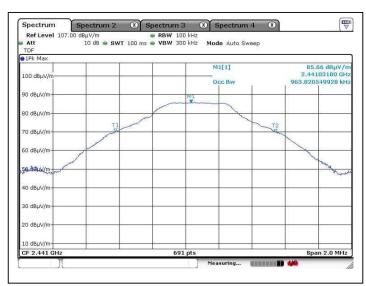

99% bandwidth

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

Page 39 of 56

FCC ID: 2ABVAJY3031BT




廠商會檢定中心TEST REPORT


Report No. : AS0026127(7) Date : 14 May 2014

A8. 20 dB bandwidth and 99% bandwidth

Channel: CH78

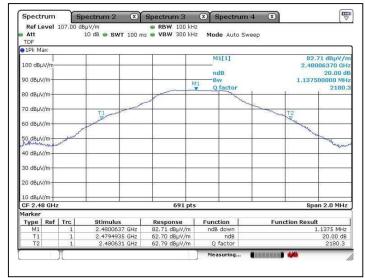

20 dB bandwidth

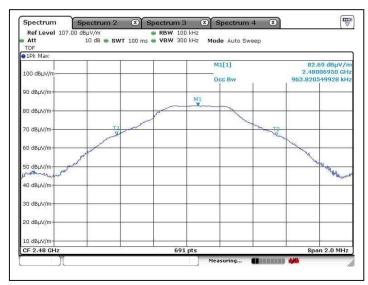

99% bandwidth

Tested by:

Jan

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

Page 40 of 56


FCC ID: 2ABVAJY3031BT




廠商會檢定中心TEST REPORT

Report No. : AS0026127(7) Date : 14 May 2014

A9. Bluetooth Channel Spacing

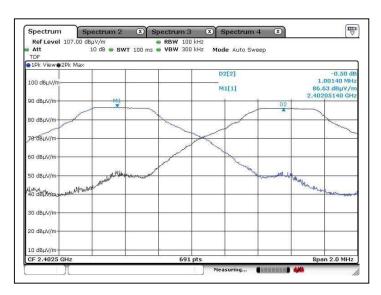

CH00-CH01

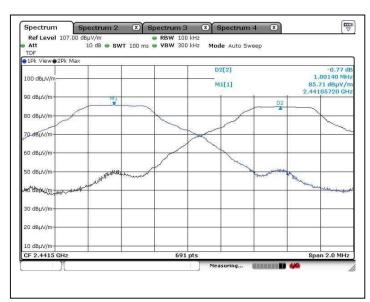

CH39-CH40

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

Page 41 of 56


FCC ID: 2ABVAJY3031BT



廠商會檢定中心TEST REPORT

Report No. : AS0026127(7) Date : 14 May 2014

A9. Bluetooth Channel Spacing

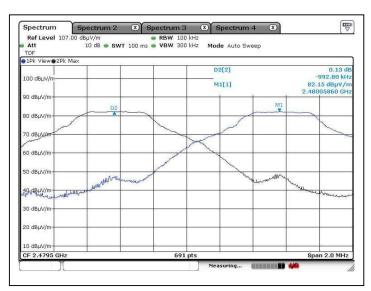

CH77-CH78

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

Page 42 of 56


FCC ID: 2ABVAJY3031BT




廠商會檢定中心TEST REPORT

Report No. : AS0026127(7) Date : 14 May 2014

A10. Bluetooth Hopping Channel

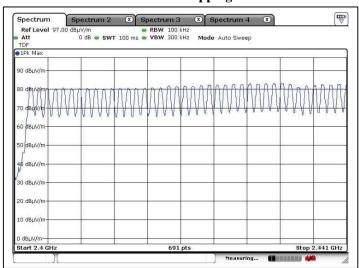

CH00-CH39

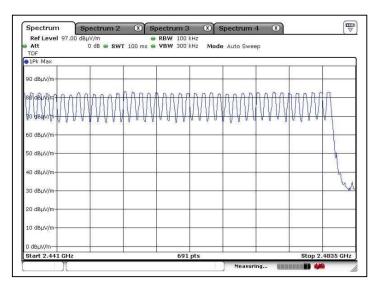

CH39-CH78

Tested by:

fan

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

Page 43 of 56


FCC ID: 2ABVAJY3031BT




廠商會檢定中心TEST REPORT

Report No. : AS0026127(7) Date : 14 May 2014

A11. Bluetooth Band Edge

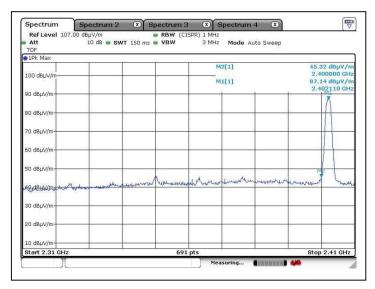

Lower edge (Peak measurement)

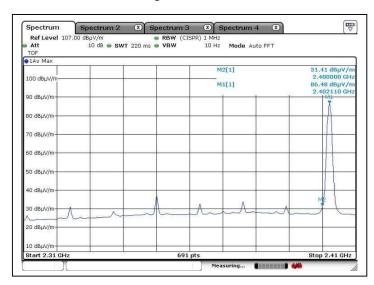

Lower edge (Average measurement)

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

Page 44 of 56


FCC ID: 2ABVAJY3031BT




廠商會檢定中心TEST REPORT

Report No. : AS0026127(7) Date : 14 May 2014

A11. Bluetooth Band Edge

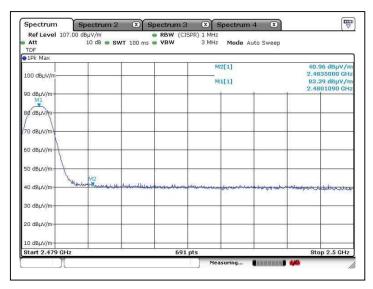

Upper edge (Peak measurement)

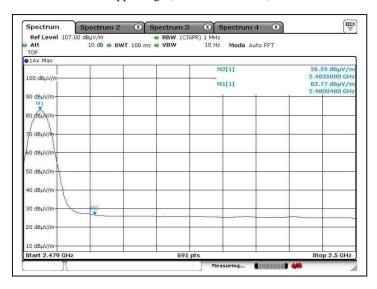

Upper edge (Average measurement)

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

Page 45 of 56

FCC ID: 2ABVAJY3031BT





廠商會檢定中心TEST REPORT

Report No. : AS0026127(7) Date : 14 May 2014

A12. Bluetooth Average On Time

Packet: DH1 Channel: CH00

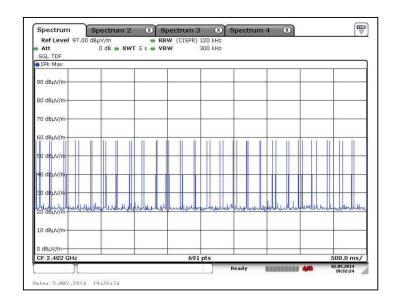

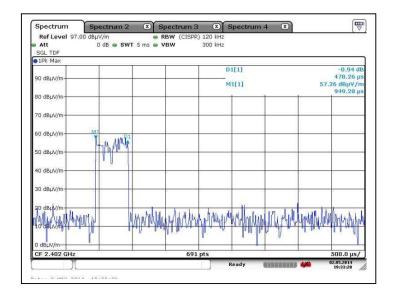

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

Page 46 of 56

FCC ID: 2ABVAJY3031BT





廠商會檢定中心TEST REPORT

Report No. : AS0026127(7) Date : 14 May 2014

A12. Bluetooth Average On Time

Packet: DH3 Channel: CH00

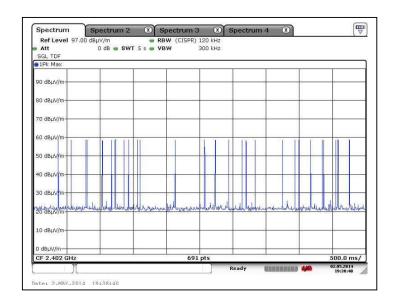

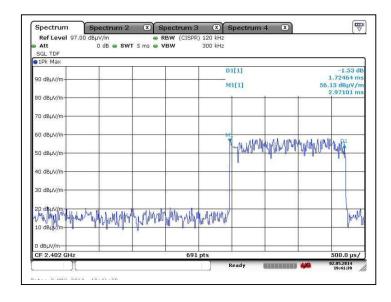

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

Page 47 of 56

FCC ID: 2ABVAJY3031BT





廠商會檢定中心TEST REPORT

Report No. : AS0026127(7) Date : 14 May 2014

A12. Bluetooth Average On Time

Packet: DH5 Channel: CH00

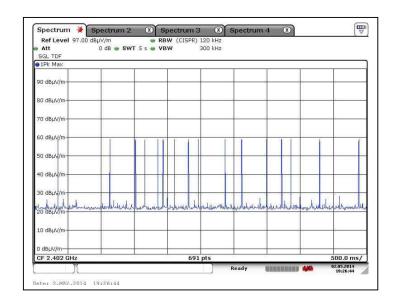

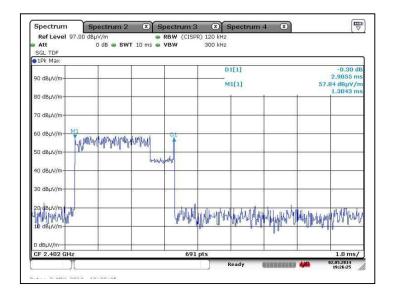

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

Page 48 of 56

FCC ID: 2ABVAJY3031BT





廠商會檢定中心TEST REPORT

Report No. : AS0026127(7) Date : 14 May 2014

A12. Bluetooth Average On Time

Packet: DH1 Channel: CH39

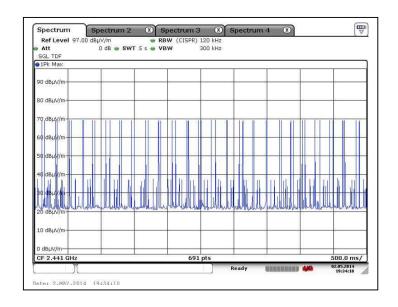

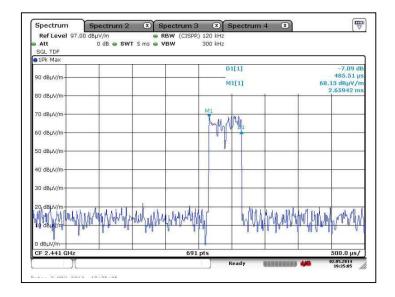

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

Page 49 of 56

FCC ID: 2ABVAJY3031BT





廠商會檢定中心TEST REPORT

Report No. : AS0026127(7) Date : 14 May 2014

A12. Bluetooth Average On Time

Packet: DH3 Channel: CH39

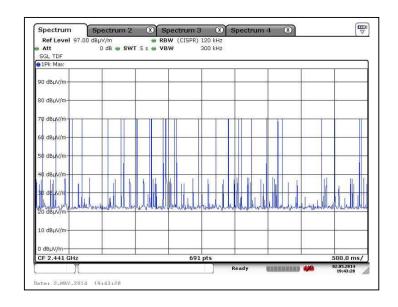

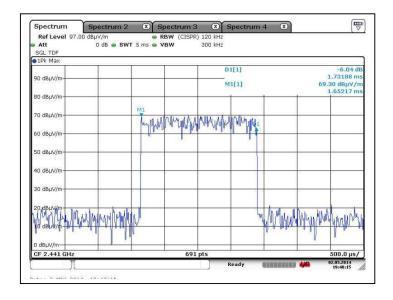

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

Page 50 of 56

FCC ID: 2ABVAJY3031BT





廠商會檢定中心TEST REPORT

Report No. : AS0026127(7) Date : 14 May 2014

A12. Bluetooth Average On Time

Packet: DH5 Channel: CH39

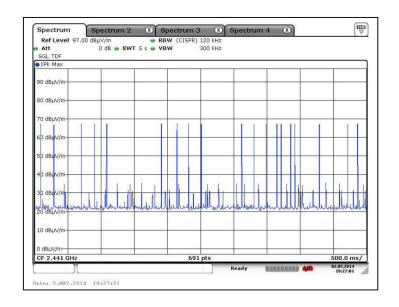

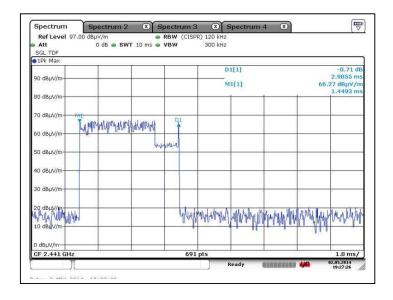

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

Page 51 of 56

FCC ID: 2ABVAJY3031BT





廠商會檢定中心TEST REPORT

Report No. : AS0026127(7) Date : 14 May 2014

A12. Bluetooth Average On Time

Packet: DH1 Channel: CH78

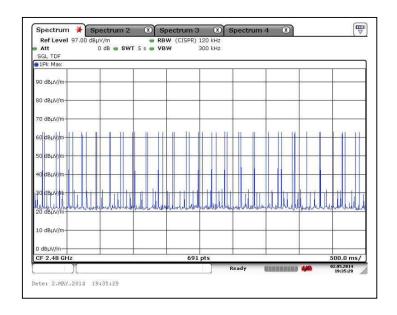

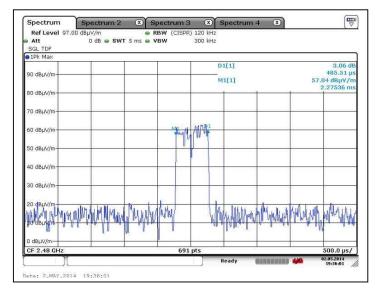

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

Page 52 of 56

FCC ID: 2ABVAJY3031BT





廠商會檢定中心TEST REPORT

Report No. : AS0026127(7) Date : 14 May 2014

A12. Bluetooth Average On Time

Packet: DH3 Channel: CH78

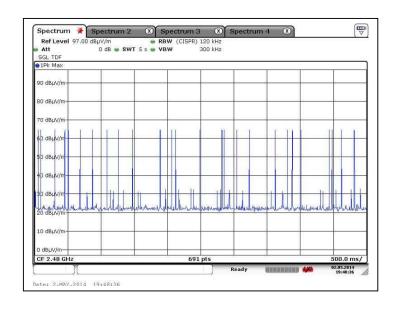

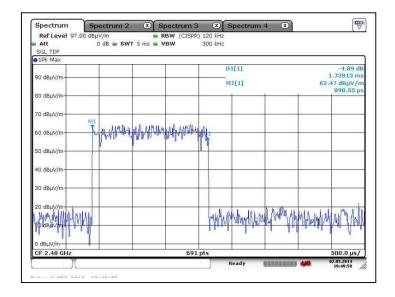

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

Page 53 of 56

FCC ID: 2ABVAJY3031BT





廠商會檢定中心TEST REPORT

Report No. : AS0026127(7) Date : 14 May 2014

A12. Bluetooth Average On Time

Packet: DH5 Channel: CH78

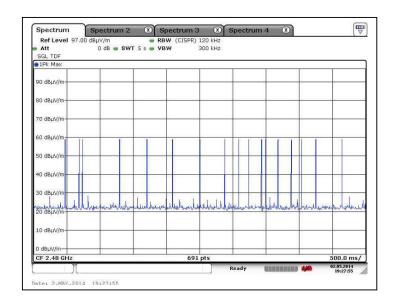

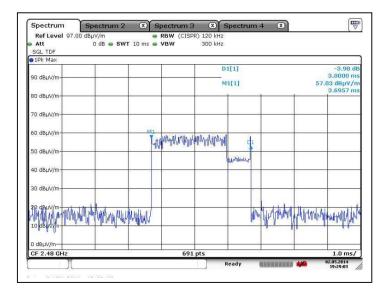

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

Page 54 of 56

FCC ID: 2ABVAJY3031BT




廠商會檢定中心TEST REPORT


Report No. : AS0026127(7) Date : 14 May 2014

A13. Transmission Power

Channel: CH00

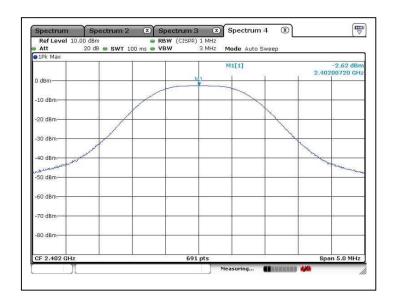

Channel: CH39

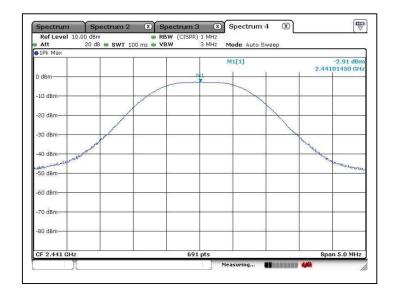

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

Page 55 of 56

FCC ID: 2ABVAJY3031BT




廠商會檢定中心TEST REPORT

Report No. : AS0026127(7) Date : 14 May 2014

A13. Transmission Power

Channel: CH78

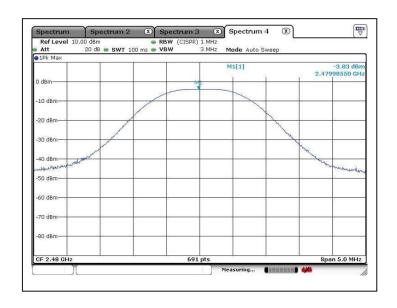

***** End of Report *****

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

Page 56 of 56

FCC ID: 2ABVAJY3031BT