

Report No.: FR960640D



FCC RADIO TEST REPORT

FCC ID : 2ABVH-INARI10B2

Equipment : Tablet Brand Name : AAVA

Model Name : INARI10B-LTG-1
Applicant : Aava Mobile Oy

NAHKATEHTAANKATU 2 90130 OULU FINLAND

Manufacturer : Aava Mobile Oy

NAHKATEHTAANKATU 2 90130 OULU FINLAND

Standard : FCC Part 15 Subpart C §15.225

The product was received on Jun. 06, 2019 and testing was started from Jun. 19, 2019 and completed on Jun. 25, 2019. We, SPORTON INTERNATIONAL INC., EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Reviewed by: Jones Tsai

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)

 TEL: 886-3-327-3456
 Page Number
 : 1 of 17

 FAX: 886-3-328-4978
 Issued Date
 : Jul. 11, 2019

 Report Template No.: BU5-FR15CNFC Version 2.4
 Report Version
 : 01

Table of Contents

Report No.: FR960640D

Histor	y of this test report	3
Summ	nary of Test Result	4
1. Gen	neral Description	5
1.1	Product Feature of Equipment Under Test	5
1.2	Product Specification of Equipment Under Test	5
1.3	Modification of EUT	5
1.4	Testing Location	6
1.5	Applicable Standards	6
2. Test	t Configuration of Equipment Under Test	7
2.1	Descriptions of Test Mode	7
2.2	Connection Diagram of Test System	7
2.3	Table for Supporting Units	7
2.4	EUT Operation Test Setup	7
3. Test	t Results	
3.1	20dB and 99% OBW Spectrum Bandwidth Measurement	8
3.2	Frequency Stability Measurement	9
3.3		
3.4		
3.5	Antenna Requirements	15
4. List	of Measuring Equipment	16
5. Unc	certainty of Evaluation	17
Appen	ndix A. Test Results of Conducted Test Items	
A1.	Test Result of 20dB Spectrum Bandwidth	
A2.	Test Result of Frequency Stability	
A 10 10 0 10	ndix P. Tast Pasults of Padiated Tast Itams	

Appendix B. Test Results of Radiated Test Items

- B1. Test Result of Field Strength of Fundamental Emissions
- B2. Results of Radiated Emissions (9 kHz~30MHz)
- B3. Results of Radiated Emissions (30MHz~1GHz)

Appendix C. Setup Photographs

Appendix D. Original Report

TEL: 886-3-327-3456 : 2 of 17 Page Number FAX: 886-3-328-4978 Issued Date : Jul. 11, 2019 Report Version : 01

Report Template No.: BU5-FR15CNFC Version 2.4

History of this test report

Report No.: FR960640D

Report No.	Version	Description	Issued Date
FR960640D	01	Initial issue of report	Jul. 11, 2019

TEL: 886-3-327-3456 Page Number : 3 of 17
FAX: 886-3-328-4978 Issued Date : Jul. 11, 2019

Summary of Test Result

Report No.: FR960640D

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
-	15.207	AC Power Line Conducted Emissions	Not Required	-
0.4	15.215(c)	20dB Spectrum Bandwidth	Pass	-
3.1	2.1049	99% OBW Spectrum Bandwidth	Reporting only	-
3.2	15.225(e)	Frequency Stability	Pass	-
3.3	15.225(a)(b)(c)	Field Strength of Fundamental Emissions	Pass	Max level 21.77 dBµV/m at 13.560 MHz
3.4	15.225(d) 15.209	Y Radiated Spurious Emissions		Under limit 6.81 dB at 40.680MHz
3.5	15.203	Antenna Requirements	Pass	-

Remark:

- 1. Not required means after assessing, test items are not necessary to carry out.
- This is a variant report by adding WWAN module. All the test cases were performed on original report which can be referred to Sporton Report Number FR912012D as appendix D. Based on the original report, the test cases were verified.

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Wii Chang
Report Producer: Ann Lee

TEL: 886-3-327-3456 Page Number : 4 of 17
FAX: 886-3-328-4978 Issued Date : Jul. 11, 2019

1. General Description

1.1 Product Feature of Equipment Under Test

Product Feature				
Equipment	Tablet			
Brand Name	AAVA			
Model Name	INARI10B-LTG-1			
FCC ID	2ABVH-INARI10B2			
EUT supports Radios application	WCDMA/HSPA/LTE/NFC/GNSS WLAN 11a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE			
HW Version	RU			
SW Version	Windows 10			
EUT Stage	Identical Prototype			

Report No.: FR960640D

Remark: The above EUT's information was declared by manufacturer.

Specification of Accessories					
AC Adapter	Brand Name	PHIHONG	Model Name	AQ18A-59CFA	
Battery	Brand Name	Etica Battery	Model Name	AMME3950	
USB Cable	Brand Name	PHIHONG	Model Name	UES-1001A160-R	

1.2 Product Specification of Equipment Under Test

Standards-related Product Specification				
Tx/Rx Frequency Range	13.553 ~ 13.567MHz			
Channel Number	1			
20dBW	2.64 KHz			
99%OBW	2.24 KHz			
Antenna Type	Ferrite-Backed Loop Antenna			
Type of Modulation	ASK			

Remark: The above EUT's information was declared by manufacturer.

1.3 Modification of EUT

No modifications are made to the EUT during all test items.

TEL: 886-3-327-3456 Page Number : 5 of 17
FAX: 886-3-328-4978 Issued Date : Jul. 11, 2019

1.4 Testing Location

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory		
Test Site Location No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978			
Test Site No.	Sporton Site No.		
rest site No.	TH03-HY		
Test Engineer	Benjamin Lin		
Temperature	22~24 ℃		
Relative Humidity 53~55%			

Report No.: FR960640D

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory		
No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855			
Test Site No.	Sporton Site No.		
rest Site No.	03CH11-HY		
Test Engineer	Hao Shu		
Temperature	21~26℃		
Relative Humidity	51~56%		

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW0007

1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.225
- FCC KDB 414788 D01 Radiated Test Site v01r01
- ANSI C63.10-2013

TEL: 886-3-327-3456 Page Number : 6 of 17
FAX: 886-3-328-4978 Issued Date : Jul. 11, 2019

2. Test Configuration of Equipment Under Test

2.1 Descriptions of Test Mode

Investigation has been done on all the possible configurations.


The following table is a list of the test modes shown in this test report.

Test Items			
20dB Spectrum Bandwidth	Field Strength of Fundamental Emissions		
Radiated Emissions 9kHz~30MHz	Frequency Stability		
Radiated Emissions 30MHz~1GHz			

Report No.: FR960640D

The EUT pre-scanned in four NFC type, A, B, F, V. The worst type (type F) was recorded in this report. Pre-scanned tests, X, Y, Z in three orthogonal panels to determine the final configuration (Y plane as worst plane) from all possible combinations.

2.2 Connection Diagram of Test System

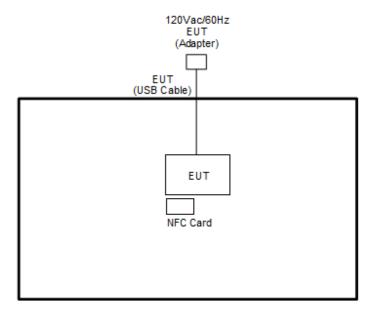

2.3 Table for Supporting Units

Ī	tem	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
	1.	NFC Card	N/A	N/A	N/A	N/A	N/A

2.4 EUT Operation Test Setup

The EUT was programmed to be in continuously transmitting mode.

The ancillary equipment, NFC card, is used to make the EUT (NFC) continuously transmit at 13.56MHz and is placed around 1 cm gap to the EUT.

TEL: 886-3-327-3456 Page Number : 7 of 17
FAX: 886-3-328-4978 Issued Date : Jul. 11, 2019

3. Test Results

3.1 20dB and 99% OBW Spectrum Bandwidth Measurement

3.1.1 Limit

Intentional radiators must be designed to ensure that the 20dB and 99% emission bandwidth in the specific band 13.553~13.567MHz.

Report No.: FR960640D


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedures

- The spectrum analyzer connected via a receive antenna placed near the EUT in peak Max hold mode.
- 2. The resolution bandwidth of 1 kHz and the video bandwidth of 3 kHz were used.
- 3. Measured the spectrum width with power higher than 20dB below carrier.
- 4. Measured the 99% OBW.

3.1.4 Test Setup



3.1.5 Test Result of Conducted Test Items

Please refer to Appendix A.

TEL: 886-3-327-3456 Page Number : 8 of 17
FAX: 886-3-328-4978 Issued Date : Jul. 11, 2019

3.2 Frequency Stability Measurement

3.2.1 Limit

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% (100ppm) of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

Report No.: FR960640D


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

- 1. The spectrum analyzer connected via a receive antenna placed near the EUT.
- 2. EUT have transmitted signal and fixed channelize.
- 3. Set the spectrum analyzer span to view the entire emissions bandwidth.
- 4. Set RBW = 1 kHz, VBW = 3 kHz with peak detector and maxhold settings.
- 5. The fc is declaring of channel frequency. Then the frequency error formula is $(fc-f)/fc \times 10^6$ ppm and the limit is less than ± 100 ppm.
- 6. Extreme temperature rule is -20°C~50°C.

3.2.4 Test Setup

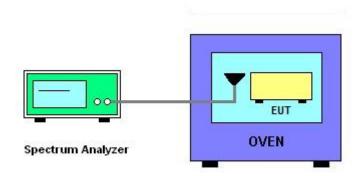

3.2.5 Test Result of Conducted Test Items

Please refer to Appendix A.

TEL: 886-3-327-3456 Page Number : 9 of 17
FAX: 886-3-328-4978 Issued Date : Jul. 11, 2019

3.3 Field Strength of Fundamental Emissions and Mask Measurement

Report No.: FR960640D

3.3.1 Limit

Rules and specifications	FCC CFR 47 Part 15 section 15.225			
Description	Compliance with the spectrum mask is tested with RBW set to 9kHz.			
From of Francisco (MIII-)	Field Strength	Field Strength	Field Strength	Field Strength
Freq. of Emission (MHz)	(µV/m) at 30m	(dBµV/m) at 30m	(dBµV/m) at 10m	(dBµV/m) at 3m
1.705~13.110	30	29.5	48.58	69.5
13.110~13.410	106	40.5	59.58	80.5
13.410~13.553	334	50.5	69.58	90.5
13.553~13.567	15848	84.0	103.08	124.0
13.567~13.710	334	50.5	69.58	90.5
13.710~14.010	106	40.5	59.58	80.5
14.010~30.000	30	29.5	48.58	69.5

3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

TEL: 886-3-327-3456 Page Number : 10 of 17
FAX: 886-3-328-4978 Issued Date : Jul. 11, 2019

3.3.3 Test Procedures


 Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the loop receiving antenna mounted antenna tower was placed 3 meters far away from the turntable.

Report No.: FR960640D

- Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the receiving antenna was fixed at one meter above ground to find the maximum emissions field strength.
- 4. For Fundamental emissions, use the receiver to measure QP reading.
- 5. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
- 6. Compliance with the spectrum mask is tested with RBW set to 9kHz. Note: Emission level ($dB\mu V/m$) = 20 log Emission level ($\mu V/m$).

3.3.4 Test Setup

For radiated emissions below 30MHz

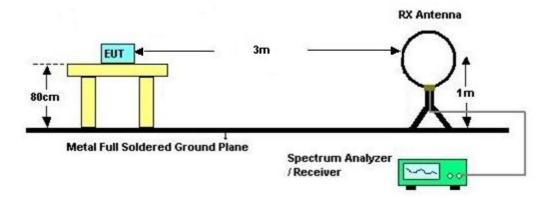

3.3.5 Test Result of Field Strength of Fundamental Emissions and Mask

Please refer to Appendix B.

TEL: 886-3-327-3456 Page Number : 11 of 17
FAX: 886-3-328-4978 Issued Date : Jul. 11, 2019

3.4 Radiated Emissions Measurement

3.4.1 Limit

The field strength of any emissions which appear outside of 13.110 ~14.010MHz band shall not exceed the general radiated emissions limits.

Report No.: FR960640D

Frequencies	Field Strength	Measurement Distance
(MHz)	(μV/m)	(meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

3.4.3 Measuring Instrument Setting

The following table is the setting of receiver:

Receiver Parameter	Setting
Attenuation	Auto
Frequency Range: 9kHz~150kHz	RBW 200Hz for QP
Frequency Range: 150kHz~30MHz	RBW 9kHz for QP
Frequency Range: 30MHz~1000MHz	RBW 120kHz for Peak

Note: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz and 110-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

TEL: 886-3-327-3456 Page Number : 12 of 17
FAX: 886-3-328-4978 Issued Date : Jul. 11, 2019

3.4.4 Test Procedures

 Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.


Report No.: FR960640D

- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
- 7. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver.

TEL: 886-3-327-3456 Page Number : 13 of 17
FAX: 886-3-328-4978 Issued Date : Jul. 11, 2019


3.4.5 Test Setup

For radiated emissions below 30MHz

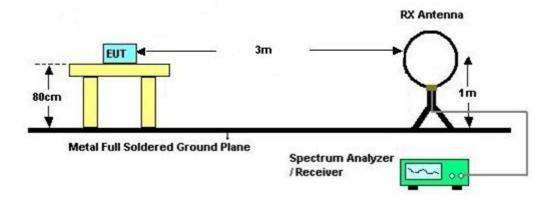

Report No.: FR960640D

For radiated emissions above 30MHz

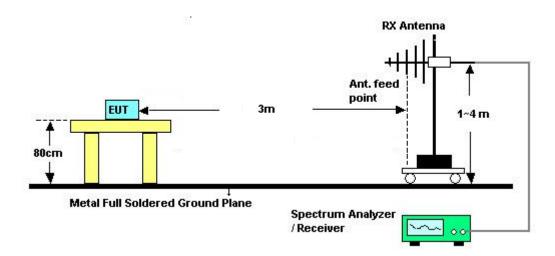

3.4.6 Test Result of Radiated Emissions Measurement

Please refer to Appendix B.

Remark: There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

TEL: 886-3-327-3456 Page Number : 14 of 17
FAX: 886-3-328-4978 Issued Date : Jul. 11, 2019

3.5 Antenna Requirements

3.5.1 Standard Applicable

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

Report No.: FR960640D

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.5.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

TEL: 886-3-327-3456 Page Number : 15 of 17
FAX: 886-3-328-4978 Issued Date : Jul. 11, 2019

4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Software	Audix	E3 6.2009-8-24	RK-00104 2	N/A	N/A	Jun. 19, 2019	N/A	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Dec. 04, 2018	Jun. 19, 2019	Dec. 03, 2019	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D&N-6-0 6	35414&AT- N0602	30MHz~1GHz	Oct. 13, 2018	Jun. 19, 2019	Oct. 12, 2019	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY542004 86	10Hz ~ 44GHz	Oct. 19, 2018	Jun. 19, 2019	Oct. 18, 2019	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500- B	N/A	1~4m	N/A	Jun. 19, 2019	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Jun. 19, 2019	N/A	Radiation (03CH11-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY532900 45	N/A	Jan. 19, 2019	Jun. 19, 2019	Jan. 18, 2020	Radiation (03CH11-HY)
Filter	Wainwright	WHK20/1000 C7/40SS	SN2	20M High Pass	Sep. 16, 2018	Jun. 19, 2019	Sep. 15, 2019	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4 PE	9kHz-30MHz	Mar. 14, 2018	Jun. 19, 2019	Mar. 12, 2020	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4 PE	30M-18G	Mar. 14, 2018	Jun. 19, 2019	Mar. 12, 2020	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2859/2	30MHz-40GHz	Mar. 14, 2018	Jun. 19, 2019	Mar. 12, 2020	Radiation (03CH11-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Jan. 07, 2019	Jun. 19, 2019	Jan. 06, 2020	Radiation (03CH11-HY)
AC Power Source	AC POWER	AFC-500W	F10407001 1	50Hz~60Hz	Apr. 12, 2019	Jun. 25 , 2019	Apr. 11, 2020	Conducted (TH03-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP30	101329	9kHz~30GHz	Jun. 29, 2018	Jun. 25 , 2019	Jun. 28, 2019	Conducted (TH03-HY)
Temperature Chamber	ESPEC	SU-641	92013721	-30℃ ~70℃	Nov. 28, 2018	Jun. 25 , 2019	Nov. 27, 2019	Conducted (TH03-HY)

Report No.: FR960640D

TEL: 886-3-327-3456 Page Number : 16 of 17
FAX: 886-3-328-4978 Issued Date : Jul. 11, 2019

5. Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (9 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence	2.45
of 95% (U = 2Uc(y))	3.45

Report No.: FR960640D


Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence	5.20
of 95% (U = 2Uc(y))	5.20

TEL: 886-3-327-3456 Page Number : 17 of 17
FAX: 886-3-328-4978 Issued Date : Jul. 11, 2019

Appendix A. Test Results of Conducted Test Items

A1. Test Result of 20dB Spectrum Bandwidth

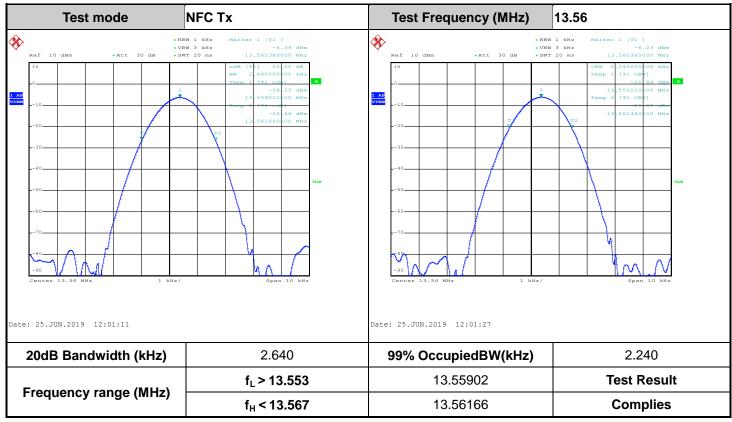

Report No.: FR960640D

Remark: Because the measured signal is CW adjusting the RBW per C63.10 would not be practical since measured bandwidth will always follow the RBW and the result will be approximately twice the RBW.

TEL: 886-3-327-3456 Page Number : A1 of A3



A2. Test Result of Frequency Stability

A3. Voltage vs. Fre	quency Stability	Tempera	ature vs. Freque	ncy Stability
Voltage (Vac)	Measurement Frequency (MHz)	Temperature (°C)	Time	Measurement Frequency (MHz)
120	13.560320	-20	0	13.560340
102	13.560330		2	13.560340
138	13.560330		5	13.560340
			10	13.560340
		-10	0	13.560340
			2	13.560340
			5	13.560340
			10	13.560340
		0	0	13.560340
			2	13.560340
			5	13.560340
			10	13.560340
		10	0	13.560340
			2	13.560340
			5	13.560340
			10	13.560340
		20	0	13.560340
			2	13.560340
			5	13.560340
			10	13.560340
		30	0	13.560340
			2	13.560340
			5	13.560340
			10	13.560340
		40	0	13.560340
			2	13.560340
			5	13.560340
			10	13.560340

Report No.: FR960640D

TEL: 886-3-327-3456 Page Number : A2 of A3


Voltage vs. Frequency Stability		Temperature vs. Frequency Stability		
Voltage (Vac)	Measurement Frequency (MHz)	Temperature (°C)	Time	Measurement Frequency (MHz)
		50	0	13.560340
			2	13.560340
			5	13.560340
			10	13.560330
Max.Deviation (MHz)	0.000330	Max.Deviati	on (MHz)	0.000340
Max.Deviation (ppm)	24.3363	Max.Deviation (ppm)		25.0737
Limit	FS < ±100 ppm	Limit		FS < ±100 ppm
Test Result	PASS	Test Result		PASS

Report No.: FR960640D

TEL: 886-3-327-3456 Page Number : A3 of A3

Appendix B. Test Results of Radiated Test Items


B1. Test Result of Field Strength of Fundamental Emissions

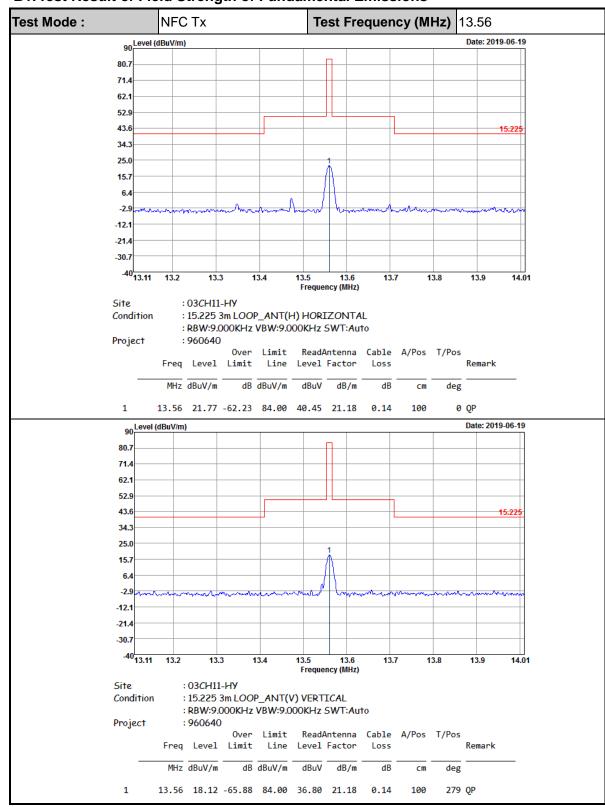

Report No.: FR960640D


TEL: 886-3-327-3456 Page Number : B1 of B5

B2. Results of Radiated Spurious Emissions (9 kHz~30MHz)

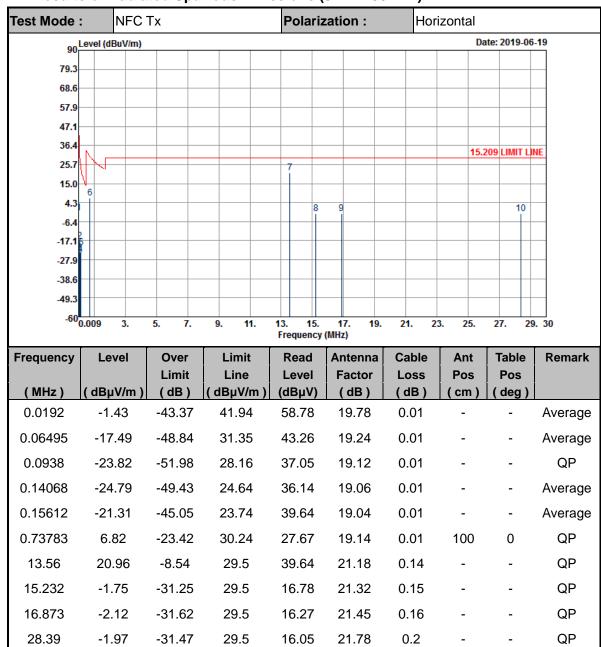

Report No.: FR960640D

TEL: 886-3-327-3456 Page Number : B2 of B5

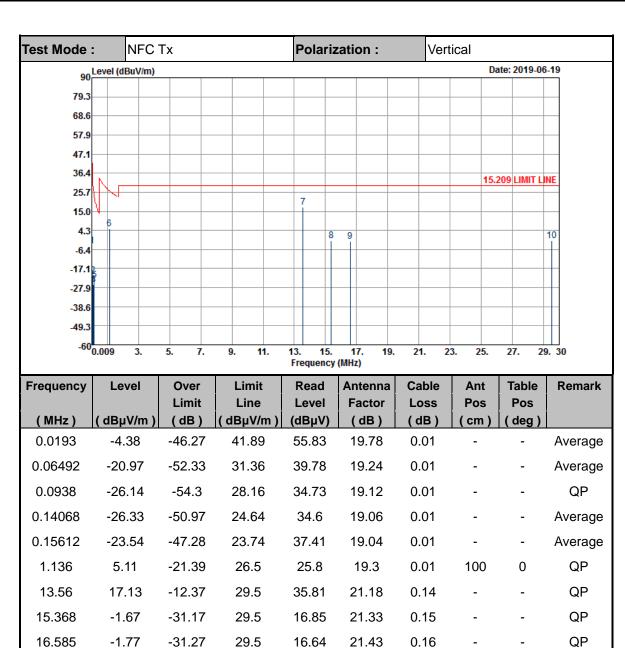

Report No.: FR960640D

Note:

29.525

-1.52

1. 13.56 MHz is fundamental signal which can be ignored.

-31.02

2. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

16.48

21.8

0.2

QΡ

3. Distance extrapolation factor = 40 log (specific distance / test distance) (dB);

29.5

Limit line = specific limits (dBμV) + distance extrapolation factor.

TEL: 886-3-327-3456 Page Number : B3 of B5


B3. Results of Radiated Spurious Emissions (30MHz~1GHz)



Report No.: FR960640D

TEL: 886-3-327-3456 Page Number : B4 of B5



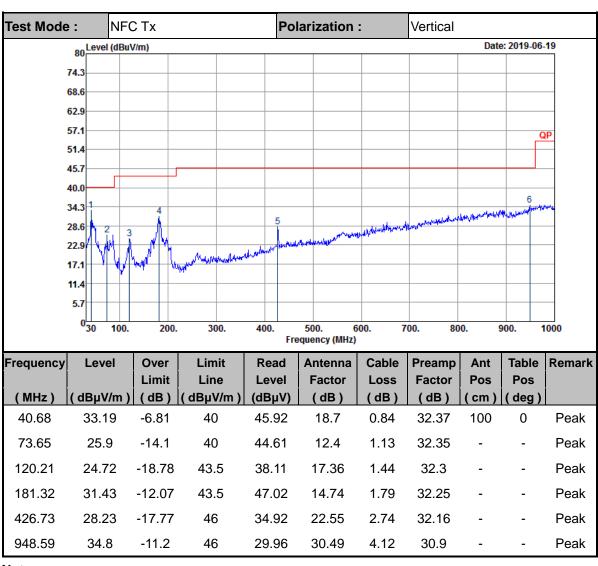

Report No.: FR960640D

Note:

- 1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
- 2. Emission level (dB μ V/m) = 20 log Emission level (μ V/m).
- 3. Corrected Reading: Antenna Factor + Cable Loss + Read Level Preamp Factor= Level.

TEL: 886-3-327-3456 Page Number: B5 of B5

Appendix D. Original Report

Please refer to Sporton report number FR910212D as below.

Report No.: FR960640D

TEL: 886-3-327-3456 Page Number : D1 of D1



Report No.: FR910212D



FCC RADIO TEST REPORT

FCC ID : 2ABVH-INARI10B1

Equipment : Tablet Brand Name : AAVA

Model Name : INARI10B-WIG-1
Applicant : Aava Mobile Oy

NAHKATEHTAANKATU 2 90130 OULU FINLAND

Manufacturer : Aava Mobile Oy

NAHKATEHTAANKATU 2 90130 OULU FINLAND

Standard : FCC Part 15 Subpart C §15.225

The product was received on Dec. 24, 2018 and testing was started from Jan. 14, 2019 and completed on Jan. 18, 2019. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Jones Tsai

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)

TEL: 886-3-327-3456 Page Number : 1 of 21 FAX: 886-3-328-4978 Issued Date : Feb. 26, 2019

Table of Contents

Report No. : FR910212D

History	of this test report	3
•	ary of Test Result	
1. Gene	eral Description	5
1.1	Product Feature of Equipment Under Test	
1.2	Product Specification of Equipment Under Test	
1.3	Modification of EUT	5
1.4	Testing Location	6
1.5	Applicable Standards	6
2. Test	Configuration of Equipment Under Test	7
2.1	Descriptions of Test Mode	7
2.2	Connection Diagram of Test System	8
2.3	Table for Supporting Units	9
2.4	EUT Operation Test Setup	9
3. Test	Results	10
3.1	AC Power Line Conducted Emissions Measurement	10
3.2	20dB and 99% OBW Spectrum Bandwidth Measurement	12
3.3	Frequency Stability Measurement	13
3.4	Field Strength of Fundamental Emissions and Mask Measurement	14
3.5	Radiated Emissions Measurement	16
3.6	Antenna Requirements	19
4. List	of Measuring Equipment	20
5. Unce	ertainty of Evaluation	21
Append	dix A. Test Results of Conducted Emission Test	
Append	dix B. Test Results of Conducted Test Items	
B1. T	Test Result of 20dB Spectrum Bandwidth	
B2. 1	Test Result of Frequency Stability	
Append	dix C. Test Results of Radiated Test Items	
C1. 7	Test Result of Field Strength of Fundamental Emissions	
C2. F	Results of Radiated Emissions (9 kHz~30MHz)	
C3. F	Results of Radiated Emissions (30MHz~1GHz)	
Append	dix D. Setup Photographs	

History of this test report

Report No.: FR910212D

Report No.	Version	Description	Issued Date
FR910212D	01	Initial issue of report	Feb. 26, 2019

TEL: 886-3-327-3456 Page Number : 3 of 21 FAX: 886-3-328-4978 Issued Date : Feb. 26, 2019

Summary of Test Result

Report No.: FR910212D

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.207	AC Power Line Conducted Emissions	Pass	Under limit 8.65 dB at 13.560MHz
2.2	15.215(c)	20dB Spectrum Bandwidth	Pass	-
3.2	2.1049	2.1049 99% OBW Spectrum Bandwidth		-
3.3	15.225(e)	Frequency Stability	Pass	-
3.4	15.225(a)(b)(c)	Field Strength of Fundamental Emissions	Pass	Max level 62.950 dBμV/m at 13.560 MHz
3.5	15.225(d) 15.209	Radiated Spurious Emissions	Pass	Under limit 3.26 dB at 184.440MHz
3.6	15.203	Antenna Requirements	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Wii Chang
Report Producer: Yimin Ho

TEL: 886-3-327-3456 Page Number : 4 of 21
FAX: 886-3-328-4978 Issued Date : Feb. 26, 2019

1. General Description

1.1 Product Feature of Equipment Under Test

Product Feature		
Equipment	Tablet	
Brand Name	AAVA	
Model Name	INARI10B-WIG-1	
FCC ID	2ABVH-INARI10B1	
EUT supports Radios application	NFC/GNSS WLAN 11a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE	
HW Version	DV1	
SW Version	Windows 10	
EUT Stage	Identical Prototype	

Report No.: FR910212D

Remark: The above EUT's information was declared by manufacturer.

Specification of Accessories				
AC Adapter	Brand Name	PHIHONG	Model Name	AQ18A-59CFA
Battery	Brand Name	Etica Battery	Model Name	AMME3950
USB Cable	Brand Name	PHIHONG	Model Name	UES-1001A160-R

1.2 Product Specification of Equipment Under Test

Standards-related Product Specification		
Tx/Rx Frequency Range	13.553 ~ 13.567MHz	
Channel Number	1	
20dBW	2.62 KHz	
99%OBW	2.24 KHz	
Antenna Type	Ferrite-backed Loop Antenna	
Type of Modulation	ASK	

Remark: The above EUT's information was declared by manufacturer.

1.3 Modification of EUT

No modifications are made to the EUT during all test items.

TEL: 886-3-327-3456 Page Number : 5 of 21
FAX: 886-3-328-4978 Issued Date : Feb. 26, 2019

1.4 Testing Location

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978		
Test Site No.	Sporton Site No.		
	TH03-HY	CO05-HY	
Test Engineer	George Chen	Rick Lin	
Temperature	22~24°C	23~24°C	
Relative Humidity	53~55% 55~56%		

Report No.: FR910212D

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855	
Test Site No.	Sporton Site No.	
	03CH11-HY	
Test Engineer	Hao Hsu and Chuan Zhu	
Temperature	21~25°C	
Relative Humidity	52~57%	

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No. TW1190 and TW0007

1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.225
- FCC KDB 414788 D01 Radiated Test Site v01r01
- ANSI C63.10-2013

TEL: 886-3-327-3456 Page Number : 6 of 21 FAX: 886-3-328-4978 Issued Date : Feb. 26, 2019

2. Test Configuration of Equipment Under Test

2.1 Descriptions of Test Mode

Investigation has been done on all the possible configurations.

The following table is a list of the test modes shown in this test report.

Test Items			
AC Power Line Conducted Emissions	Field Strength of Fundamental Emissions		
20dB Spectrum Bandwidth	Frequency Stability		
Radiated Emissions 9kHz~30MHz	Radiated Emissions 30MHz~1GHz		

Report No.: FR910212D


The EUT pre-scanned in four NFC type, A, B, F, V. The worst type (type F) was recorded in this report. Pre-scanned tests, X, Y, Z in three orthogonal panels to determine the final configuration (Z plane as worst plane) from all possible combinations.

Test Cases		
AC Conducted	Mode 1: WLAN (2.4GHz) Link + Bluetooth Link + USB Cable (Type C) +	
Emission	Adapter + GPS Rx + NFC Tx	

TEL: 886-3-327-3456 Page Number : 7 of 21
FAX: 886-3-328-4978 Issued Date : Feb. 26, 2019


2.2 Connection Diagram of Test System

<Radiated Emission Mode>

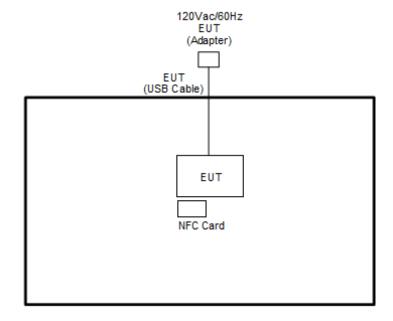

Report No.: FR910212D

<AC Conducted Emission Mode>

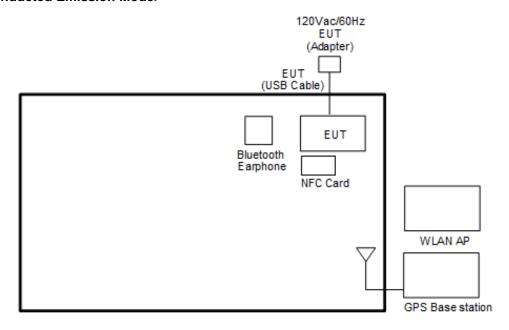

TEL: 886-3-327-3456 Page Number : 8 of 21
FAX: 886-3-328-4978 Issued Date : Feb. 26, 2019

2.3 Table for Supporting Units

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	GPS Station	Pendulum	GSG-54	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8 m
3.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
4.	SD Card	SanDisk	MicroSD HC	FCC DoC	N/A	N/A
5.	NFC Card	Metro Taipei	Easy Card	N/A	N/A	N/A

Report No.: FR910212D

2.4 EUT Operation Test Setup

The EUT was programmed to be in continuously transmitting mode.

The ancillary equipment, NFC card, is used to make the EUT (NFC) continuously transmit at 13.56MHz and is placed around 1 cm gap to the EUT.

TEL: 886-3-327-3456 Page Number : 9 of 21
FAX: 886-3-328-4978 Issued Date : Feb. 26, 2019

3. Test Results

3.1 AC Power Line Conducted Emissions Measurement

3.1.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Report No.: FR910212D

Frequency of Emission	Conducted Limit (dBμV)		
(MHz)	Quasi-Peak	Average	
0.15-0.5	66 to 56*	56 to 46*	
0.5-5	56	46	
5-30	60	50	

^{*}Decreases with the logarithm of the frequency.

3.1.2 Measuring Instruments


See list of measuring equipment of this test report.

3.1.3 Test Procedures

- 1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
- 2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- 3. All the support units are connecting to the other LISN.
- 4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- 5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
- 6. Both sides of AC line were checked for maximum conducted interference.
- 7. The frequency range from 150 kHz to 30 MHz was searched.
- 8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

TEL: 886-3-327-3456 Page Number : 10 of 21 FAX: 886-3-328-4978 Issued Date : Feb. 26, 2019

3.1.4 Test setup

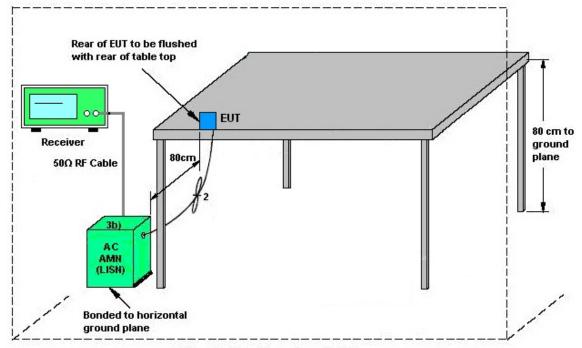

Report No.: FR910212D

AMN = Artificial mains network (LISN)

AE = Associated equipment

EUT = Equipment under test

ISN = Impedance stabilization network

3.1.5 Test Result of AC Conducted Emission

Please refer to Appendix A.

TEL: 886-3-327-3456 Page Number : 11 of 21 FAX: 886-3-328-4978 Issued Date : Feb. 26, 2019

3.2 20dB and 99% OBW Spectrum Bandwidth Measurement

3.2.1 Limit

Intentional radiators must be designed to ensure that the 20dB and 99% emission bandwidth in the specific band 13.553~13.567MHz.

Report No.: FR910212D


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

- The spectrum analyzer connected via a receive antenna placed near the EUT in peak Max hold mode.
- 2. The resolution bandwidth of 1 kHz and the video bandwidth of 3 kHz were used.
- 3. Measured the spectrum width with power higher than 20dB below carrier.
- 4. Measured the 99% OBW.

3.2.4 Test Setup



3.2.5 Test Result of Conducted Test Items

Please refer to Appendix B.

TEL: 886-3-327-3456 Page Number : 12 of 21
FAX: 886-3-328-4978 Issued Date : Feb. 26, 2019

3.3 Frequency Stability Measurement

3.3.1 Limit

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% (100ppm) of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

Report No.: FR910212D


3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

3.3.3 Test Procedures

- 1. The spectrum analyzer connected via a receive antenna placed near the EUT.
- 2. EUT have transmitted signal and fixed channelize.
- 3. Set the spectrum analyzer span to view the entire emissions bandwidth.
- 4. Set RBW = 1 kHz, VBW = 3 kHz with peak detector and maxhold settings.
- 5. The fc is declaring of channel frequency. Then the frequency error formula is $(fc-f)/fc \times 10^6$ ppm and the limit is less than ± 100 ppm.
- 6. Extreme temperature rule is -20°C~50°C.

3.3.4 Test Setup

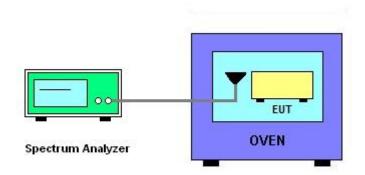

3.3.5 Test Result of Conducted Test Items

Please refer to Appendix B.

TEL: 886-3-327-3456 Page Number : 13 of 21
FAX: 886-3-328-4978 Issued Date : Feb. 26, 2019

3.4 Field Strength of Fundamental Emissions and Mask Measurement

Report No.: FR910212D

3.4.1 Limit

Rules and specifications	FCC CFR 47 Part 15 section 15.225							
Description	Compliance with th	Compliance with the spectrum mask is tested with RBW set to 9kHz.						
From of Emission (MUT)	Field Strength	Field Strength	Field Strength	Field Strength				
Freq. of Emission (MHz)	(µV/m) at 30m	(dBµV/m) at 30m	(dBµV/m) at 10m	(dBµV/m) at 3m				
1.705~13.110	30	29.5	48.58	69.5				
13.110~13.410	106	40.5	59.58	80.5				
13.410~13.553	334	50.5	69.58	90.5				
13.553~13.567	15848	84.0	103.08	124.0				
13.567~13.710	334	50.5	69.58	90.5				
13.710~14.010	106	40.5	59.58	80.5				
14.010~30.000	30	29.5	48.58	69.5				

3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

TEL: 886-3-327-3456 Page Number : 14 of 21
FAX: 886-3-328-4978 Issued Date : Feb. 26, 2019


3.4.3 Test Procedures

 Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the loop receiving antenna mounted antenna tower was placed 3 meters far away from the turntable.

Report No.: FR910212D

- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the receiving antenna was fixed at one meter above ground to find the maximum emissions field strength.
- 4. For Fundamental emissions, use the receiver to measure QP reading.
- 5. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
- Compliance with the spectrum mask is tested with RBW set to 9kHz.
 Note: Emission level (dBμV/m) = 20 log Emission level (μV/m).

3.4.4 Test Setup

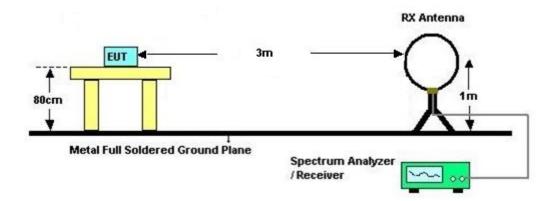

3.4.5 Test Result of Field Strength of Fundamental Emissions and Mask

Please refer to Appendix C.

TEL: 886-3-327-3456 Page Number : 15 of 21
FAX: 886-3-328-4978 Issued Date : Feb. 26, 2019

3.5 Radiated Emissions Measurement

3.5.1 Limit

The field strength of any emissions which appear outside of 13.110 ~14.010MHz band shall not exceed the general radiated emissions limits.

Report No.: FR910212D

Frequencies	Field Strength	Measurement Distance		
(MHz)	(μV/m)	(meters)		
0.009~0.490	2400/F(kHz)	300		
0.490~1.705	24000/F(kHz)	30		
1.705~30.0	30	30		
30~88	100	3		
88~216	150	3		
216~960	200	3		
Above 960	500	3		

3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Measuring Instrument Setting

The following table is the setting of receiver:

Receiver Parameter	Setting
Attenuation	Auto
Frequency Range: 9kHz~150kHz	RBW 200Hz for QP
Frequency Range: 150kHz~30MHz	RBW 9kHz for QP
Frequency Range: 30MHz~1000MHz	RBW 120kHz for Peak

Note: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz and 110-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

TEL: 886-3-327-3456 Page Number : 16 of 21
FAX: 886-3-328-4978 Issued Date : Feb. 26, 2019

3.5.4 Test Procedures

 Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.


Report No.: FR910212D

- Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
- 7. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver.

TEL: 886-3-327-3456 Page Number : 17 of 21
FAX: 886-3-328-4978 Issued Date : Feb. 26, 2019


3.5.5 Test Setup

For radiated emissions below 30MHz

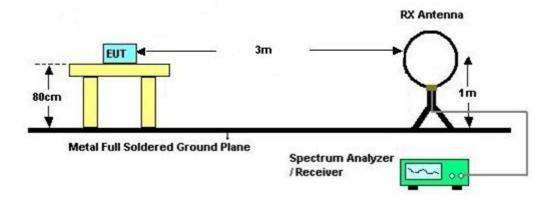

Report No.: FR910212D

For radiated emissions above 30MHz

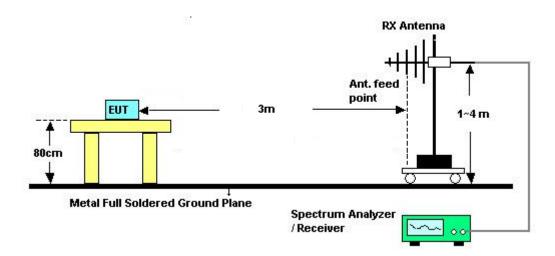

3.5.6 Test Result of Radiated Emissions Measurement

Please refer to Appendix C.

Remark: There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

TEL: 886-3-327-3456 Page Number : 18 of 21
FAX: 886-3-328-4978 Issued Date : Feb. 26, 2019

3.6 Antenna Requirements

3.6.1 Standard Applicable

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

Report No.: FR910212D

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

TEL: 886-3-327-3456 Page Number : 19 of 21
FAX: 886-3-328-4978 Issued Date : Feb. 26, 2019

4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	AC POWER	AFC-500W	F10407001	50Hz~60Hz	Mar. 21, 2018	Jan. 16, 2019	Mar. 20, 2019	Conducted (TH03-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP30	101329	9kHz~30GHz	Jun. 29, 2018	Jan. 16, 2019	Jun. 28, 2019	Conducted (TH03-HY)
Temperature Chamber	ESPEC	SU-641	92013721	-30°C ~70°C	Dec. 06, 2017	Jan. 16, 2019	Dec. 05, 2019	Conducted (TH03-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Jan. 18, 2019	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9KHz~3.6GHz	Nov. 12, 2018	Jan. 18, 2019	Nov. 11, 2019	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Nov. 14, 2018	Jan. 18, 2019	Nov. 13, 2019	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Jan. 18, 2019	N/A	Conduction (CO05-HY)
LF Cable	HUBER + SUHNER	RG-214/U	LF01	N/A	Dec. 31, 2018	Jan. 18, 2019	Dec. 30, 2019	Conduction (CO05-HY)
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100851	N/A	Dec. 31, 2018	Jan. 18, 2019	Dec. 30, 2019	Conduction (CO05-HY)
Software	Audix	E3 6.2009-8-24	RK-00104 2	N/A	N/A	Jan. 14, 2019	N/A	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Dec. 04, 2018	Jan. 14, 2019	Dec. 03, 2019	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D&N-6-0 6	35414&AT- N0602	30MHz~1GHz	Oct. 13, 2018	Jan. 14, 2019	Oct. 12, 2019	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY542004 86	10Hz ~ 44GHz	Oct. 19, 2018	Jan. 14, 2019	Oct. 18, 2019	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500- B	N/A	1~4m	N/A	Jan. 14, 2019	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Jan. 14, 2019	N/A	Radiation (03CH11-HY)
EMI Test Receiver	Keysight	N9038A (MXE)	MY554201 70	N/A	Mar. 06, 2018	Jan. 14, 2019	Mar. 05, 2019	Radiation (03CH11-HY)
Filter	Wainwright	WHK20/1000 C7/40SS	SN2	20M High Pass	Sep. 16, 2018	Jan. 14, 2019	Sep. 15, 2019	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4 PE	9kHz-30MHz	Mar. 14, 2018	Jan. 14, 2019	Mar. 13, 2019	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4 PE	30M-18G	Mar. 14, 2018	Jan. 14, 2019	Mar. 13, 2019	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2859/2	30MHz-40GHz	Mar. 14, 2018	Jan. 14, 2019	Mar. 13, 2019	Radiation (03CH11-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Jan. 07, 2019	Jan. 14, 2019	Jan. 06, 2020	Radiation (03CH11-HY)

Report No. : FR910212D

TEL: 886-3-327-3456 Page Number : 20 of 21 FAX: 886-3-328-4978 Issued Date : Feb. 26, 2019

5. Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence	2.2
of 95% (U = 2Uc(y))	2.2

Report No.: FR910212D

Uncertainty of Radiated Emission Measurement (9 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence	3.45
of 95% (U = 2Uc(y))	3.45


<u>Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)</u>

Measuring Uncertainty for a Level of Confidence	5.2
of 95% (U = 2Uc(y))	3.2

TEL: 886-3-327-3456 Page Number : 21 of 21 FAX: 886-3-328-4978 Issued Date : Feb. 26, 2019

Appendix A. Test Results of Conducted Emission Test

Report No.: FR910212D

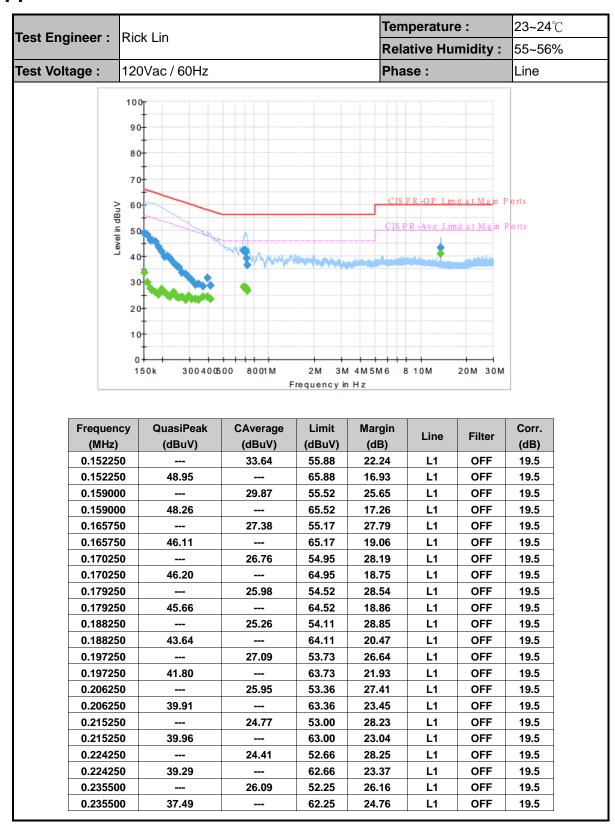


TEL: 886-3-327-3456 Page Number : A1 of A6

CC RADIO TEST REPORT Report No. : FR910212D

 Test Engineer :
 Rick Lin
 Temperature :
 23~24°C

 Relative Humidity :
 55~56%

 Test Voltage :
 120Vac / 60Hz
 Phase :
 Line

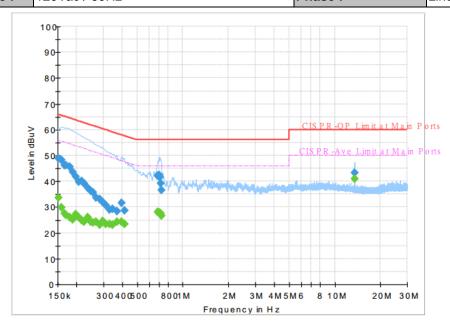

Frequency	QuasiPeak	CAverage	Limit	Margin		F:11	Corr.
(MHz)	(dBuV)	(dBuV)	(dBuV)	(dB)	Line	Filter	(dB)
0.246750		24.13	51.87	27.74	L1	OFF	19.5
0.246750	36.26		61.87	25.61	L1	OFF	19.5
0.255750	1	24.02	51.57	27.55	L1	OFF	19.5
0.255750	35.64		61.57	25.93	L1	OFF	19.5
0.269250		24.24	51.14	26.90	L1	OFF	19.5
0.269250	33.69		61.14	27.45	L1	OFF	19.5
0.285000		23.21	50.67	27.46	L1	OFF	19.5
0.285000	32.91		60.67	27.76	L1	OFF	19.5
0.298500	1	24.59	50.28	25.69	L1	OFF	19.5
0.298500	31.88		60.28	28.40	L1	OFF	19.5
0.309750		23.47	49.98	26.51	L1	OFF	19.5
0.309750	30.83		59.98	29.15	L1	OFF	19.5
0.327750		23.27	49.51	26.24	L1	OFF	19.5
0.327750	28.96		59.51	30.55	L1	OFF	19.5
0.345750		23.24	49.06	25.82	L1	OFF	19.5
0.345750	29.38		59.06	29.68	L1	OFF	19.5
0.368250		24.14	48.54	24.40	L1	OFF	19.5
0.368250	28.44		58.54	30.10	L1	OFF	19.5
0.393000		24.23	48.00	23.77	L1	OFF	19.5
0.393000	31.48		58.00	26.52	L1	OFF	19.5
0.413250		23.43	47.58	24.15	L1	OFF	19.5
0.413250	28.73		57.58	28.85	L1	OFF	19.5
0.685500		27.96	46.00	18.04	L1	OFF	19.6
0.685500	42.15		56.00	13.85	L1	OFF	19.6


TEL: 886-3-327-3456 Page Number : A2 of A6

CC RADIO TEST REPORT Report No. : FR910212D

 Test Engineer :
 Rick Lin
 Temperature :
 23~24°C

 Relative Humidity :
 55~56%

 Test Voltage :
 120Vac / 60Hz
 Phase :
 Line

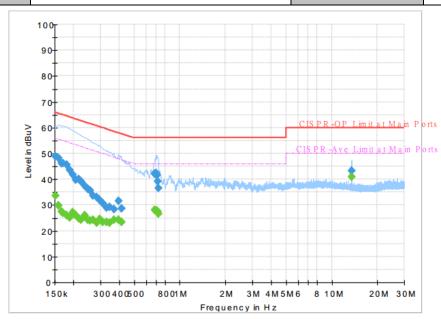

Frequency	QuasiPeak	CAverage	Limit	Margin	Line	Filter	Corr.
(MHz)	(dBuV)	(dBuV)	(dBuV)	(dB)			(dB)
0.694500		27.87	46.00	18.13	L1	OFF	19.6
0.694500	42.43		56.00	13.57	L1	OFF	19.6
0.703500		27.87	46.00	18.13	L1	OFF	19.6
0.703500	41.66		56.00	14.34	L1	OFF	19.6
0.717000		27.38	46.00	18.62	L1	OFF	19.6
0.717000	39.31		56.00	16.69	L1	OFF	19.6
0.721500		26.50	46.00	19.50	L1	OFF	19.6
0.721500	36.63		56.00	19.37	L1	OFF	19.6
13.560000		40.85	50.00	9.15	L1	OFF	20.0
13.560000	43.41		60.00	16.59	L1	OFF	20.0

TEL: 886-3-327-3456 Page Number : A3 of A6

Rick Lin

Test Engineer:


Temperature :

Report No.: FR910212D

23~24℃

Relative Humidity: 55~56%

Test Voltage: 120Vac / 60Hz Phase: Neutral

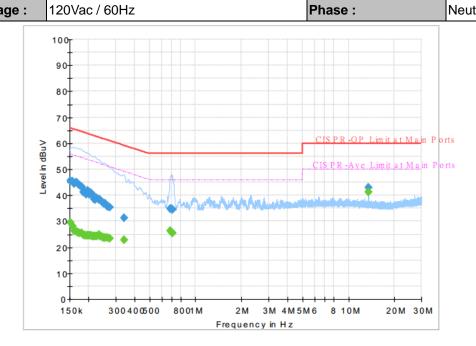

Frequency	QuasiPeak	CAverage	Limit	Margin	Line	Filter	Corr.
(MHz)	(dBuV)	(dBuV)	(dBuV)	(dB)	Line	Filter	(dB)
0.152250		29.65	55.88	26.23	N	OFF	19.5
0.152250	45.51		65.88	20.37	N	OFF	19.5
0.156750	I	28.08	55.63	27.55	N	OFF	19.5
0.156750	45.29		65.63	20.34	N	OFF	19.5
0.161250		26.19	55.40	29.21	N	OFF	19.5
0.161250	44.46		65.40	20.94	N	OFF	19.5
0.165750	-	26.16	55.17	29.01	N	OFF	19.5
0.165750	44.92		65.17	20.25	N	OFF	19.5
0.170250	I	25.71	54.95	29.24	N	OFF	19.5
0.170250	44.31		64.95	20.64	N	OFF	19.5
0.174750		25.39	54.73	29.34	N	OFF	19.5
0.174750	43.90		64.73	20.83	N	OFF	19.5
0.179250		25.32	54.52	29.20	N	OFF	19.5
0.179250	43.20		64.52	21.32	N	OFF	19.5
0.183750		24.76	54.31	29.55	N	OFF	19.5
0.183750	41.31		64.31	23.00	N	OFF	19.5
0.188250		24.66	54.11	29.45	N	OFF	19.5
0.188250	41.59		64.11	22.52	N	OFF	19.5
0.192750	1	24.70	53.92	29.22	N	OFF	19.5
0.192750	40.41		63.92	23.51	N	OFF	19.5
0.197250		24.68	53.73	29.05	N	OFF	19.5
0.197250	41.83		63.73	21.90	N	OFF	19.5


TEL: 886-3-327-3456 Page Number : A4 of A6

 Test Engineer :
 Rick Lin
 Temperature :
 23~24℃

 Relative Humidity :
 55~56%

 Test Voltage :
 120Vac / 60Hz
 Phase :
 Neutral

Report No.: FR910212D

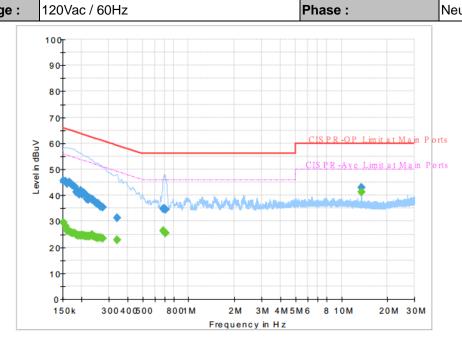

Frequency	QuasiPeak	CAverage	Limit	Margin		F:11	Corr.
(MHz)	(dBuV)	(dBuV)	(dBuV)	(dB)	Line	Filter	(dB)
0.201750		24.59	53.54	28.95	N	OFF	19.5
0.201750	40.36		63.54	23.18	N	OFF	19.5
0.206250		24.53	53.36	28.83	N	OFF	19.5
0.206250	40.81		63.36	22.55	N	OFF	19.5
0.210750		24.25	53.18	28.93	N	OFF	19.5
0.210750	40.39		63.18	22.79	N	OFF	19.5
0.215250		24.38	53.00	28.62	N	OFF	19.5
0.215250	38.54		63.00	24.46	N	OFF	19.5
0.222000		24.17	52.74	28.57	N	OFF	19.5
0.222000	38.30		62.74	24.44	N	OFF	19.5
0.226500		24.22	52.58	28.36	N	OFF	19.5
0.226500	38.90		62.58	23.68	N	OFF	19.5
0.233250		24.72	52.33	27.61	N	OFF	19.5
0.233250	38.29		62.33	24.04	N	OFF	19.5
0.237750		24.13	52.17	28.04	N	OFF	19.5
0.237750	38.16		62.17	24.01	N	OFF	19.5
0.244500		23.87	51.94	28.07	N	OFF	19.5
0.244500	37.46		61.94	24.48	N	OFF	19.5
0.251250		23.71	51.72	28.01	N	OFF	19.5
0.251250	36.85		61.72	24.87	N	OFF	19.5
0.255750		23.78	51.57	27.79	N	OFF	19.5
0.255750	36.77		61.57	24.80	N	OFF	19.5
0.264750		23.65	51.28	27.63	N	OFF	19.5
0.264750	35.77		61.28	25.51	N	OFF	19.5


TEL: 886-3-327-3456 Page Number : A5 of A6

 Test Engineer :
 Rick Lin
 Temperature :
 23~24°C

 Relative Humidity :
 55~56%

 Test Voltage :
 120Vac / 60Hz
 Phase :
 Neutral

Report No.: FR910212D

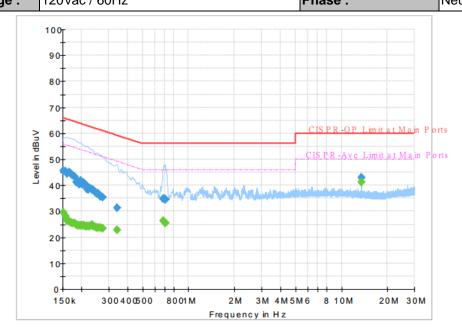


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.273750		23.53	51.00	27.47	N	OFF	19.5
0.273750	35.25		61.00	25.75	N	OFF	19.5
0.339000		22.75	49.23	26.48	N	OFF	19.5
0.339000	31.20		59.23	28.03	N	OFF	19.5
0.685500		26.31	46.00	19.69	N	OFF	19.6
0.685500	34.91		56.00	21.09	N	OFF	19.6
0.696750		25.78	46.00	20.22	N	OFF	19.6
0.696750	34.83		56.00	21.17	N	OFF	19.6
0.703500		25.50	46.00	20.50	N	OFF	19.6
0.703500	34.61		56.00	21.39	N	OFF	19.6
13.560000		41.35	50.00	8.65	N	OFF	20.1
13.560000	42.85		60.00	17.15	N	OFF	20.1

TEL: 886-3-327-3456 Page Number : A6 of A6

Appendix B. Test Results of Conducted Test Items

B1. Test Result of 20dB Spectrum Bandwidth

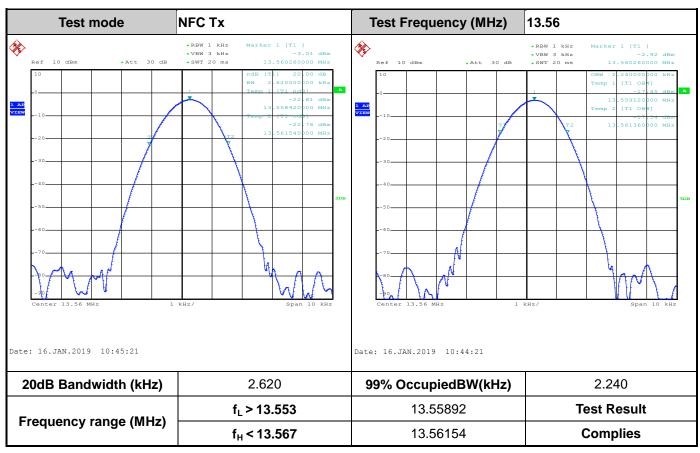

Report No.: FR910212D

Remark: Because the measured signal is CW adjusting the RBW per C63.10 would not be practical since measured bandwidth will always follow the RBW and the result will be approximately twice the RBW.

TEL: 886-3-327-3456 Page Number: B1 of B3



B2.Test Result of Frequency Stability

B3. Voltage vs. Frequency Stability		Temperature vs. Frequency Stability		
Voltage (Vac)	Measurement Frequency (MHz)	Temperature (℃)	Time	Measurement Frequency (MHz)
120	13.560240	-20	0	13.560250
102	13.560220		2	13.560240
138	13.560240		5	13.560250
			10	13.560250
		-10	0	13.560250
			2	13.560250
			5	13.560260
			10	13.560250
		0	0	13.560260
			2	13.560250
			5	13.560260
			10	13.560260
		10	0	13.560300
			2	13.560260
			5	13.560260
			10	13.560260
		20	0	13.560230
			2	13.560240
			5	13.560220
			10	13.560240
		30	0	13.560220
			2	13.560220
			5	13.560220
			10	13.560220
		40	0	13.560220
			2	13.560220
			5	13.560220
			10	13.560220

Report No. : FR910212D

TEL: 886-3-327-3456 Page Number : B2 of B3


Voltage vs. Frequency Stability		Temperature vs. Frequency Stability		
Voltage (Vac)	Measurement Frequency (MHz)	Temperature (°C)	Time	Measurement Frequency (MHz)
		50	0	13.560200
			2	13.560200
			5	13.560200
			10	13.560210
Max.Deviation (MHz)	0.000240	Max.Deviation (MHz)		0.000300
Max.Deviation (ppm)	17.6991	Max.Deviation (ppm)		22.1239
Limit	FS < ±100 ppm	Limit		FS < ±100 ppm
Test Result	PASS	Test Result		PASS

Report No. : FR910212D

TEL: 886-3-327-3456 Page Number : B3 of B3

Appendix C. Test Results of Radiated Test Items


C1. Test Result of Field Strength of Fundamental Emissions

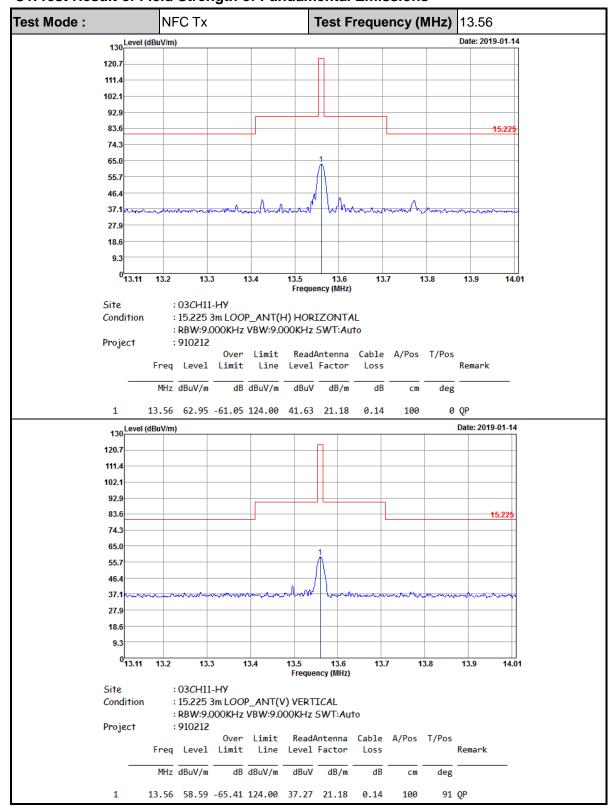

Report No.: FR910212D

TEL: 886-3-327-3456 Page Number : C1 of C5


C2. Results of Radiated Spurious Emissions (9 kHz~30MHz)

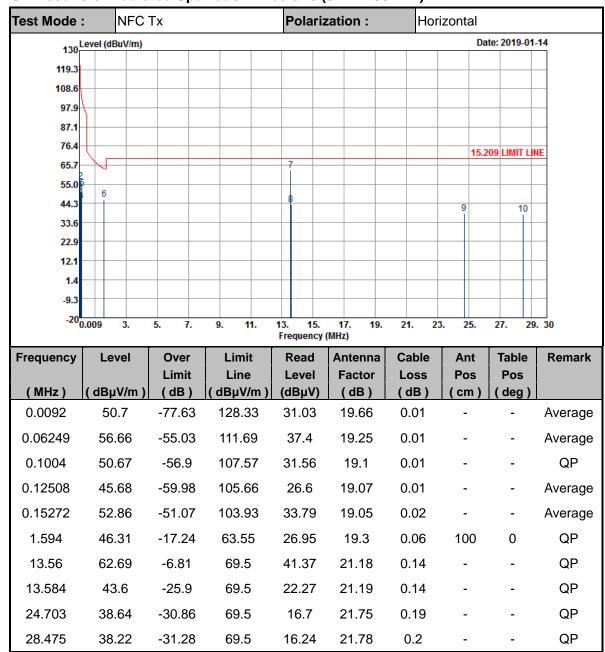

Report No.: FR910212D

TEL: 886-3-327-3456 Page Number : C2 of C5



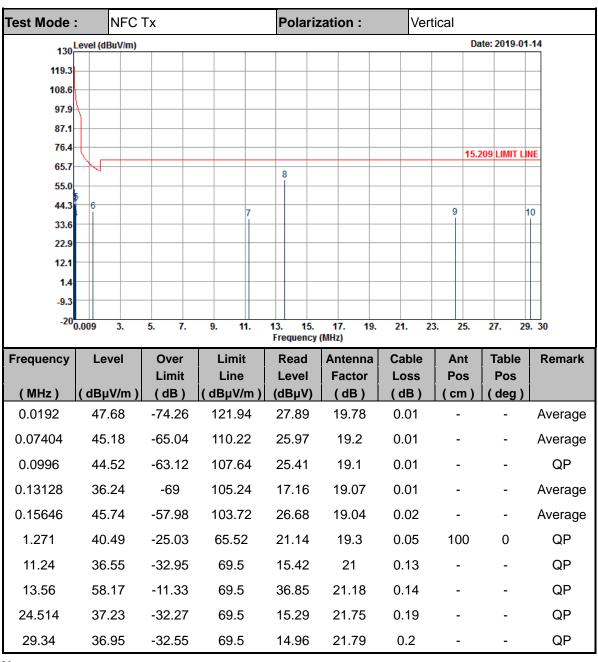


Report No.: FR910212D

Note:

- 1. 13.56 MHz is fundamental signal which can be ignored.
- 2. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
- 3. Distance extrapolation factor = 40 log (specific distance / test distance) (dB);
- Limit line = specific limits (dBμV) + distance extrapolation factor.

TEL: 886-3-327-3456 Page Number : C3 of C5


C3. Results of Radiated Spurious Emissions (30MHz~1GHz)

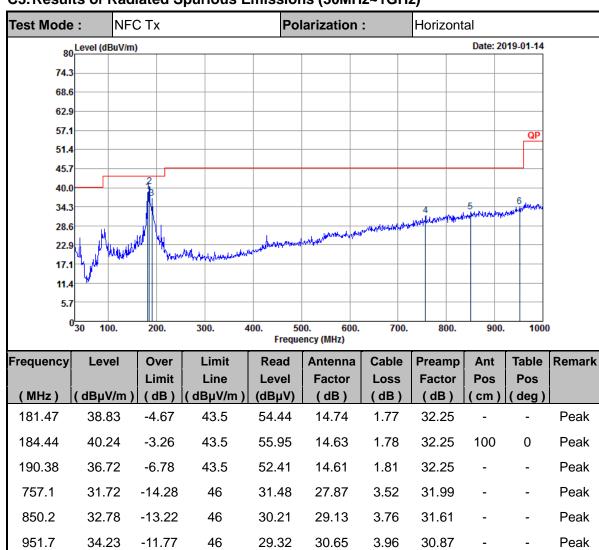

Report No.: FR910212D

TEL: 886-3-327-3456 Page Number : C4 of C5



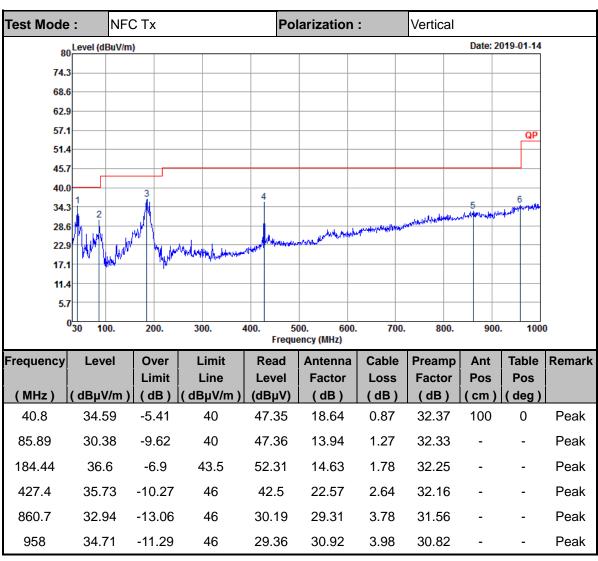

Report No.: FR910212D

Note:

- 1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
- 2. Emission level (dB μ V/m) = 20 log Emission level (μ V/m).
- 3. Corrected Reading: Antenna Factor + Cable Loss + Read Level Preamp Factor= Level.

TEL: 886-3-327-3456 Page Number : C5 of C5