



Shenzhen CTL Testing Technology Co., Ltd.
Tel: +86-755-89486194 Fax: +86-755-26636041

MPE TEST REPORT

FCC Per 47 CFR 2.1091(b)

Report Reference No. CTL1402240233-WM

FCC ID 2ABXOWXA-131

IC 11867A-WXA131

Compiled by

(position+printed name+signature) ..: File administrators Jennifer NI

Jennifer NI

Name of the organization performing
the tests

Test Engineer Jacky Chen

Jacky Chen

(position+printed name+signature) ..:

Approved by

(position+printed name+signature) ..: Manager Tracy Qi

Tracy Qi

Date of issue Mar. 20, 2014

Test Laboratory Name **Shenzhen CTL Testing Technology Co., Ltd.**

Address Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road,
Nanshan District, Shenzhen, China 518055

Applicant's name **Global Marine Networks, LLC**

Address 2668 Jericho Rd, Maryville, TN, USA 37803

Test specification:

Standard **FCC Per 47 CFR 2.1091(b)**

TRF Originator Shenzhen CTL Testing Technology Co., Ltd.

Master TRF Dated 2011-01

Shenzhen CTL Testing Technology Co., Ltd.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description **RedPort Satellite Optimizer**

Trade Mark N/A

Model/Type reference M4

Listed Models WXA-131

Power Supply DC3.7V from battery, charged by DC 5V from USB

Result **Positive**

Test Report

Test Report No. :	CTL1402240233-WM	Mar. 20, 2014
		Date of issue

Equipment under Test : RedPort Satellite Optimizer

Model /Type : M4

Listed Modes : WXA-131

Applicant : **Global Marine Networks, LLC**

Address : 2668 Jericho Rd, Maryville, TN, USA 37803

Manufacturer : **Shenzhen Poray Communication Co.,Ltd**

Address : 4F, Bldg D, FuSeng Industrial Park, HangCheng Ave, Bao'an District. Shenzhen City, China

Test Result according to the standards on page 4:


Positive

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Content

<u>1. SUMMARY</u>	4
1.1. EUT configuration	4
1.2. Equipment Under Test	4
1.3. Description of the test mode	4
1.4. NOTE	4
<u>2. TEST ENVIRONMENT</u>	5
2.1. Address of the test laboratory	5
2.2. Environmental conditions	5
2.3. Statement of the measurement uncertainty	5
<u>3. METHOD OF MEASUREMENT</u>	6
<u>4. CONCLUSION</u>	7

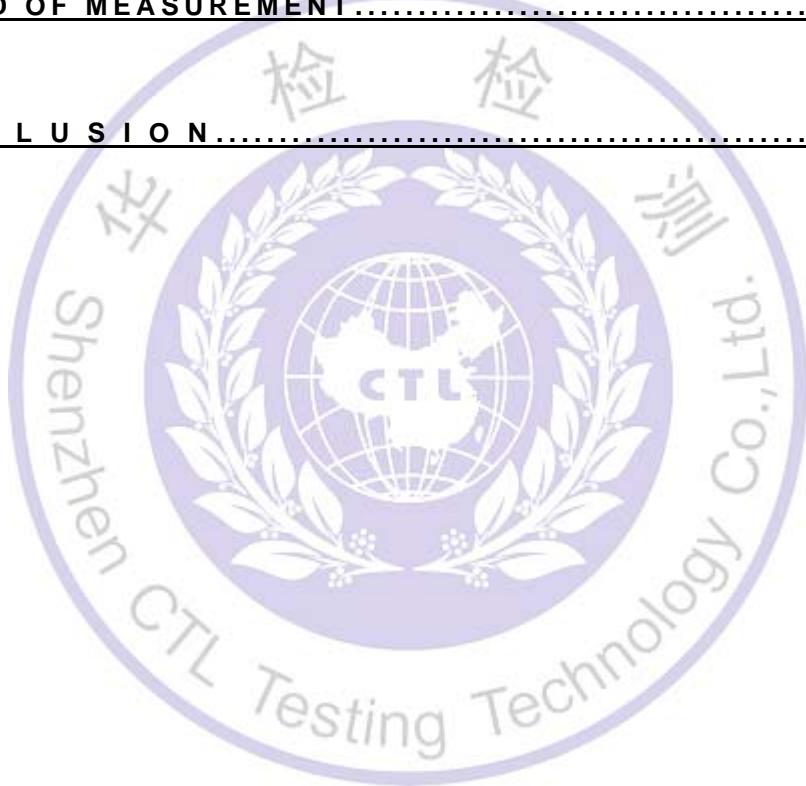

1. SUMMARY

1.1. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

1.2. Equipment Under Test

Power supply system utilised

Power supply voltage : 120V / 60 Hz 115V / 60Hz
 12 V DC 24 V DC
 Other (specified in blank below)

DC3.7V from battery, charged by DC 5V from USB

1.3. Description of the test mode

IEEE 802.11b/g/n: Thirteen channels are provided to the EUT, but only eleventh channels used for USA.

Channel	Frequency(MHz)	Channel	Frequency(MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432		
6	2437		
7	2442		

1.4. NOTE

The EUT is an 802.11b/g/n RedPort Satellite Optimizer, The functions of the EUT listed as below:

	Test Standards	Reference Report
WLAN 802.11b/g, 802.11n	FCC Part 15 Subpart C (Section15.247)	CTL1402240233-WF
WLAN 802.11b/g, 802.11n	FCC Per 47 CFR 2.1091(b)	CTL1402240233-WM

The frequency bands used in this EUT are listed as follows

Frequency Band(MHz)	2400-2483.5	5150-5350	5470-5725	5725-5850
802.11b	✓	-	-	-
802.11g	✓	-	-	-
802.11n(20MHz)	✓	-	-	-
802.11n(40MHz)	✓	-	-	-

Modulation Mode	TX Function
802.11b	1 TX
802.11g	1 TX
802.11n(20MHz)	1 TX
802.11n(40MHz)	1 TX

2. TEST ENVIRONMENT

2.1. Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.
Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road, Nanshan District, Shenzhen, China 518055

The sites are constructed in conformance with the requirements of ANSI C6230, ANSI C63.4 (2003) and CISPR Publication 22.

2.2. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

2.3. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10dB	(1)
Radiated Emission	1~12.75GHz	4.32dB	(1)
Conducted Disturbance	0.15~30MHz	3.22dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3. Method of measurement

3.1. Applicable Standard

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

According to §1.1310 and §2.1091 RF exposure is calculated.

3.2. Limit

Limits for Maximum Permissible Exposure (MPE)/Controlled Exposure

Frequency Range(MHz)	Electric Field Strength(V/m)	Magnetic Field Strength(A/m)	Power Density (mW/cm ²)	Averaging Time (minute)
Limits for Occupational/Controlled Exposure				
0.3 – 3.0	614	1.63	(100) *	6
3.0 – 30	1842/f	4.89/f	(900/f)*	6
30 – 300	61.4	0.163	1.0	6
300 – 1500	/	/	f/300	6
1500 – 100,000	/	/	5	6

Limits for Maximum Permissible Exposure (MPE)/Uncontrolled Exposure

Frequency Range(MHz)	Electric Field Strength(V/m)	Magnetic Field Strength(A/m)	Power Density (mW/cm ²)	Averaging Time (minute)
Limits for Occupational/Controlled Exposure				
0.3 – 3.0	614	1.63	(100) *	30
3.0 – 30	824/f	2.19/f	(180/f)*	30
30 – 300	27.5	0.073	0.2	30
300 – 1500	/	/	f/1500	30
1500 – 100,000	/	/	1.0	30

F=frequency in MHz

*=Plane-wave equivalent power density

3.3. MPE Calculation Method

Predication of MPE limit at a given distance

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

Where: S=power density

P=power input to antenna

G=power gain of the antenna in the direction of interest relative to an isotropic radiator

R=distance to the center of radiation of the antenna

From the peak EUT RF output power, the minimum mobile separation distance, d=0.2m, as well as the gain of the used antenna is -0.5 dBi, the RF power density can be obtained.

TEST RESULTS

For 802.11 b

Test Frequency (MHz)	Minimum Separation Distance (cm)	Output Power (dBm)	Output Power (mW)	Antenna Gain (Nemeric)	Power Density Limit (mW/cm ²)	Power Density At 20 cm (mW/cm ²)	Test Results
2412	20.00	9.91	9.7949	0.8913	1.000	0.0017	Pass
2437	20.00	9.87	9.7051	0.8913	1.000	0.0017	Pass
2462	20.00	9.89	9.7499	0.8913	1.000	0.0017	Pass

For 802.11 g

Test Frequency (MHz)	Minimum Separation Distance (cm)	Output Power (dBm)	Output Power (mW)	Antenna Gain (Nemeric)	Power Density Limit (mW/cm ²)	Power Density At 20 cm (mW/cm ²)	Test Results
2412	20.00	9.75	9.4406	0.8913	1.000	0.0017	Pass
2437	20.00	9.79	9.5280	0.8913	1.000	0.0017	Pass
2462	20.00	9.80	9.5499	0.8913	1.000	0.0017	Pass

For 802.11 n (20MHz)

Test Frequency (MHz)	Minimum Separation Distance (cm)	Output Power (dBm)	Output Power (mW)	Antenna Gain (Nemeric)	Power Density Limit (mW/cm ²)	Power Density At 20 cm (mW/cm ²)	Test Results
2412	20.00	9.77	9.4842	0.8913	1.000	0.0017	Pass
2437	20.00	9.73	9.3972	0.8913	1.000	0.0017	Pass
2462	20.00	9.69	9.3111	0.8913	1.000	0.0017	Pass

For 802.11 n (40MHz)

Test Frequency (MHz)	Minimum Separation Distance (cm)	Output Power (dBm)	Output Power (mW)	Antenna Gain (Nemeric)	Power Density Limit (mW/cm ²)	Power Density At 20 cm (mW/cm ²)	Test Results
2422	20.00	9.56	9.0365	0.8913	1.000	0.0016	Pass
2437	20.00	9.59	9.0991	0.8913	1.000	0.0016	Pass
2452	20.00	9.64	9.2045	0.8913	1.000	0.0016	Pass

4. Conclusion

The measurement results comply with the FCC Limit per 47 CFR 2.1091 (b) for the controlled RF Exposure.

.....End of Report.....