



FCC PART 15 B

TEST REPORT

For

ROAM Data Inc.

280 Summer St, Boston MA, USA

FCC ID: 2ABY6-RP457

Report Type: Original Report	Product Type: Mobile Payment Terminal
Test Engineer: <u>Allen Qiao</u> <i>Allen Qiao</i>	
Report Number: <u>RXM160104051-00D</u>	
Report Date: <u>2016-01-15</u>	
Reviewed By: <u>RF Leader</u> <i>Sula Huang</i> <i>Sula Huang</i>	
Test Laboratory: Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY	3
TEST FACILITY.....	3
SYSTEM TEST CONFIGURATION.....	4
DESCRIPTION OF TEST CONFIGURATION	4
EUT EXERCISE SOFTWARE	4
EQUIPMENT MODIFICATIONS	4
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	4
SUPPORT CABLE LIST AND DETAILS	4
CONFIGURATION OF TEST SETUP	5
SUMMARY OF TEST RESULTS	6
FCC§15.107 - CONDUCTED EMISSIONS.....	7
MEASUREMENT UNCERTAINTY	7
EUT SETUP	7
EMI TEST RECEIVER SETUP.....	8
TEST EQUIPMENT LIST AND DETAILS.....	8
TEST PROCEDURE	8
CORRECTED AMPLITUDE & MARGIN CALCULATION	8
TEST RESULTS SUMMARY.....	9
TEST DATA	9
FCC §15.109 - RADIATED SPURIOUS EMISSIONS.....	12
MEASUREMENT UNCERTAINTY	12
EUT SETUP	12
EMI TEST RECEIVER SETUP	13
TEST PROCEDURE	13
TEST EQUIPMENT LIST AND DETAILS.....	14
CORRECTED AMPLITUDE & MARGIN CALCULATION	14
TEST RESULTS SUMMARY	14
TEST DATA	14
ENVIRONMENTAL CONDITIONS	14
DECLARATION LETTER.....	19

GENERAL INFORMATION

Product Description for Equipment Under Test (EUT)

The *ROAM Data Inc.*'s product, model number: *RP457 (FCC ID: 2ABY6-RP457)* (the "EUT") in this report was a *Mobile Payment Terminal*, which was measured approximately: 6.3 cm (L) x 6.7cm (W) x 2.3 cm (H), rated input voltage: DC3.7V rechargeable Li-ion battery or DC5V charging from USB port. The highest operating frequency is 2480 MHz.

Note: The series product, model RP457, RP456 are electrically identical, the difference between them please refer declaration letter, we selected RP457 for testing, the details difference was explained in the attached declaration letter.

All measurement and test data in this report was gathered from production sample serial number: 160104051 (Assigned by BACL, Dongguan). The EUT was received on 2016-01-04.

Objective

This test report is prepared on behalf of *ROAM Data Inc.* in accordance with Part 2, Subpart J, and Part 15-Subparts A and B of the Federal Communications Commission's rules.

The objective of the manufacturer is to determine the compliance of EUT with FCC Part 15 B Class B.

Related Submittal(s)/Grant(s)

FCC Part 15C DTS submissions with FCC ID: 2ABY6-RP457.

FCC Part 15C DSS submissions with FCC ID: 2ABY6-RP457.

FCC Part 15C DXX submissions with FCC ID: 2ABY6-RP457.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Dongguan).

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communications Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 06, 2015.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a typical fashion (as normally used by a typical user).

EUT Exercise Software

The software "FactoryTool V2.28" was used during test.

Equipment Modifications

No modification was made to the EUT tested.


Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
DELL	Laptop	PP11L	QDS-BRCM1017
HP	Printer	C3941A	JPTVOB2337
DELL	Keyboard	L100	CNORH656658907BL05DC
SAST	Modem	AEM-2100	0293

Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Serial Cable	yes	no	1.2	Serial Port of Laptop	Modem
Parallel Cable	yes	no	1.2	Parallel Port of Laptop	Printer
Keyboard Cable	yes	no	1.8	USB Port of Laptop	Keyboard
USB Cable	no	no	0.56	USB Port of Laptop	EUT

Configuration of Test Setup

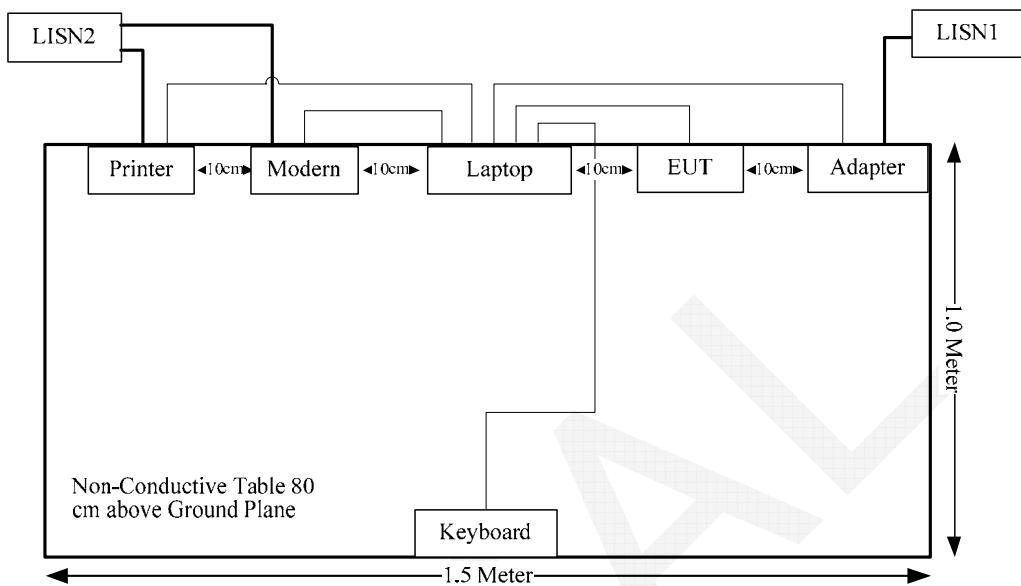

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§15.107	Conducted Emissions	Compliance
§15.109	Radiated Emissions	Compliance

FINAL

FCC§15.107 - CONDUCTED EMISSIONS

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are Receiver, cable loss, and LISN.

Compliance or non- compliance with a disturbance limit shall be determined in the following manner :

If U_{lab} is less than or equal to U_{cisp} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non - compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cisp} of Table 1, then:


- compliance is deemed to occur if no measured disturbance level, increased by $(U_{\text{lab}} - U_{\text{cisp}})$, exceeds the disturbance limit;
- non - compliance is deemed to occur if any measured disturbance level, increased by $(U_{\text{lab}} - U_{\text{cisp}})$, exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Dongguan) is 3.12 dB (150 kHz to 30 MHz).

Table 1 – Values of U_{cisp}

Measurement	U_{cisp}
Conducted disturbance at mains port using AMN (150 kHz to 30 MHz)	3.4 dB

EUT Setup

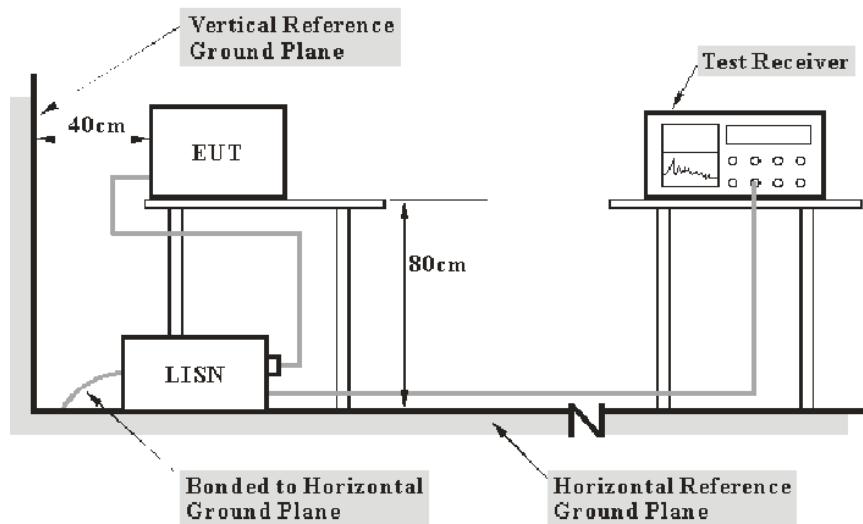

Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15 B Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The adapter of laptop was connected to a 120V/60Hz AC power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2015-10-20	2016-10-20
R&S	L.I.S.N	ESH2-Z5	892107/021	2015-07-16	2016-07-15
R&S	Two-line V-network	ENV 216	3560.6550.12	2015-11-26	2016-11-25
N/A	Coaxial Cable	1.8m	N/A	2015-05-06	2016-05-06
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

During the conducted emission test, the adapter of laptop was connected to the outlet of the first LISN and the other support equipments were connected to the outlet of the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

Herein,

V_C : corrected voltage amplitude

V_R : reading voltage amplitude

A_c : attenuation caused by cable loss

VDF: voltage division factor of AMN or ISN

The “Margin” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15 B Class B, with the worst margin reading of:

9.50 dB at 0.270502 MHz in the Line conducted mode

Test Data


Environmental Conditions

Temperature:	23.9°C
Relative Humidity:	52 %
ATM Pressure:	100.4 kPa

The testing was performed by Allen Qiao on 2016-01-05.

Test Mode: Operating (USB data transmission)


AC120V, 60Hz, Line:

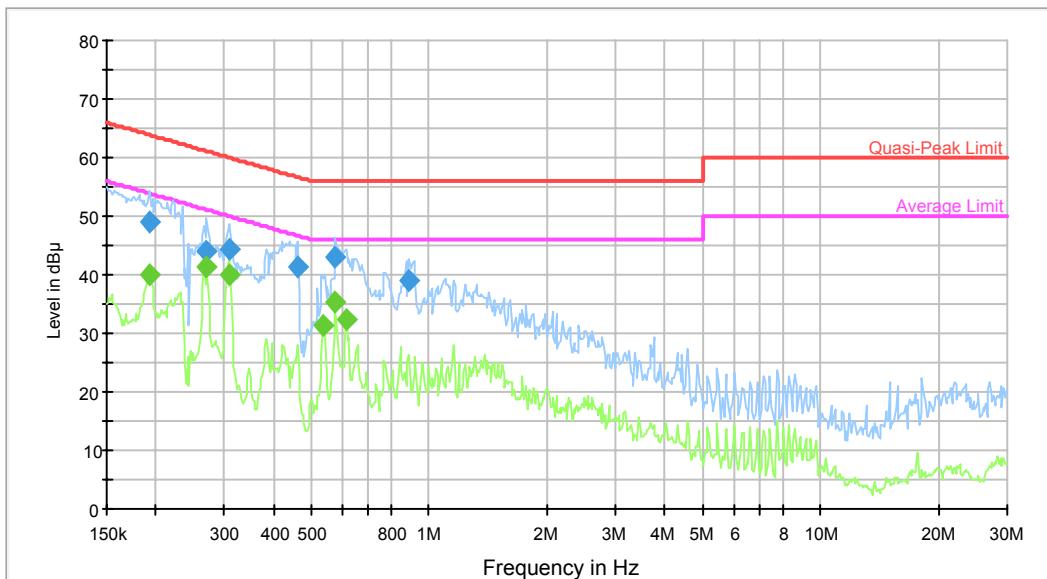

Frequency (MHz)	Quasi Peak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.193566	49.1	9.000	L1	9.7	14.8	63.9	Compliance
0.270502	44.0	9.000	L1	9.7	17.1	61.1	Compliance
0.307284	44.4	9.000	L1	9.7	15.6	60.0	Compliance
0.461346	41.3	9.000	L1	9.8	15.4	56.7	Compliance
0.576662	43.0	9.000	L1	9.8	13.0	56.0	Compliance
0.886728	39.1	9.000	L1	9.8	16.9	56.0	Compliance

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.192030	40.1	9.000	L1	9.7	13.8	53.9	Compliance
0.270502	41.6	9.000	L1	9.7	9.5	51.1	Compliance
0.307284	39.9	9.000	L1	9.7	10.1	50.0	Compliance
0.536756	31.3	9.000	L1	9.8	14.7	46.0	Compliance
0.576662	35.2	9.000	L1	9.8	10.8	46.0	Compliance
0.614619	32.4	9.000	L1	9.8	13.6	46.0	Compliance

AC120V, 60Hz, Neutral:

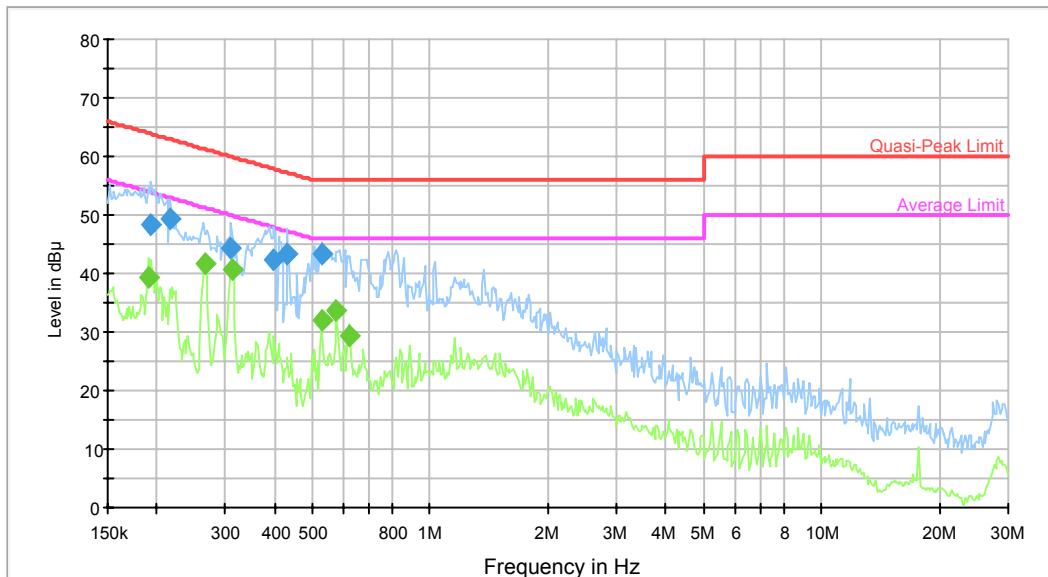

Frequency (MHz)	Quasi Peak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.193566	48.4	9.000	N	9.7	15.5	63.9	Compliance
0.216409	49.4	9.000	N	9.7	13.6	63.0	Compliance
0.309742	44.5	9.000	N	9.7	15.5	60.0	Compliance
0.399703	42.3	9.000	N	9.7	15.6	57.9	Compliance
0.432855	43.3	9.000	N	9.7	13.9	57.2	Compliance
0.528270	43.5	9.000	N	9.7	12.5	56.0	Compliance

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.193566	48.4	9.000	N	9.7	15.5	63.9	Compliance
0.216409	49.4	9.000	N	9.7	13.6	63.0	Compliance
0.309742	44.5	9.000	N	9.7	15.5	60.0	Compliance
0.399703	42.3	9.000	N	9.7	15.6	57.9	Compliance
0.432855	43.3	9.000	N	9.7	13.9	57.2	Compliance
0.528270	43.5	9.000	N	9.7	12.5	56.0	Compliance

FCC §15.109 - RADIATED SPURIOUS EMISSIONS

Measurement Uncertainty

Compliance or non- compliance with a disturbance limit shall be determined in the following manner :

If U_{lab} is less than or equal to U_{cisp} of Table 1, then:

—compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;

—non - compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cisp} of Table 1, then:

—compliance is deemed to occur if no measured disturbance level, increased by $(U_{\text{lab}} - U_{\text{cisp}})$, exceeds the disturbance limit;

—non - compliance is deemed to occur if any measured disturbance level, increased by $(U_{\text{lab}} - U_{\text{cisp}})$, exceeds the disturbance limit.


Based on CISPR 16-4-2: 2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is: 30M~200MHz: 4.58 dB for Horizontal, 4.59 dB for Vertical; 200M~1GHz: 4.83 dB for Horizontal, 5.85 dB for Vertical; 1G~6GHz: 4.45 dB, 6G~18GHz: 5.23 dB.

Table 1 – Values of U_{cisp}


Measurement		U_{cisp}
Radiated disturbance (electric field strength at an OATS or in a SAC)	(30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR)	(1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR)	(6 GHz to 18 GHz)	5.5 dB

EUT Setup

Below 1GHz:

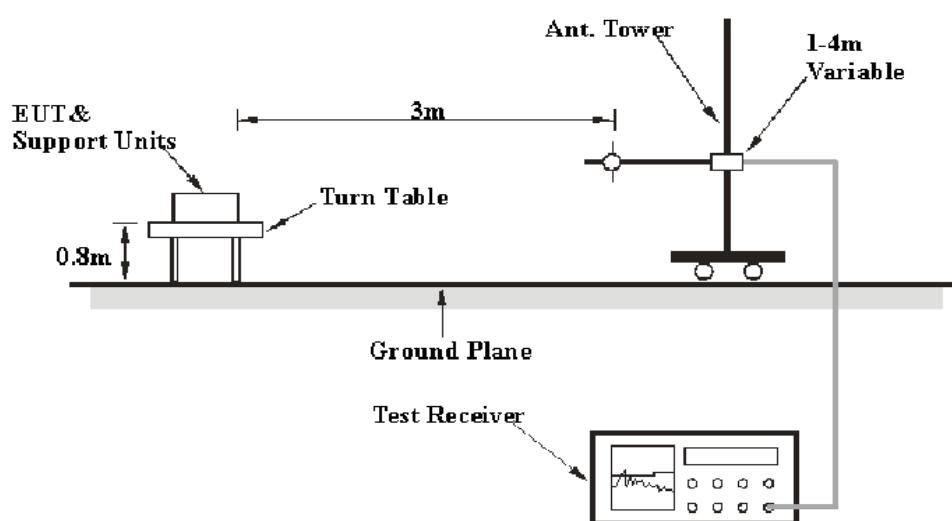

Above 1GHz:

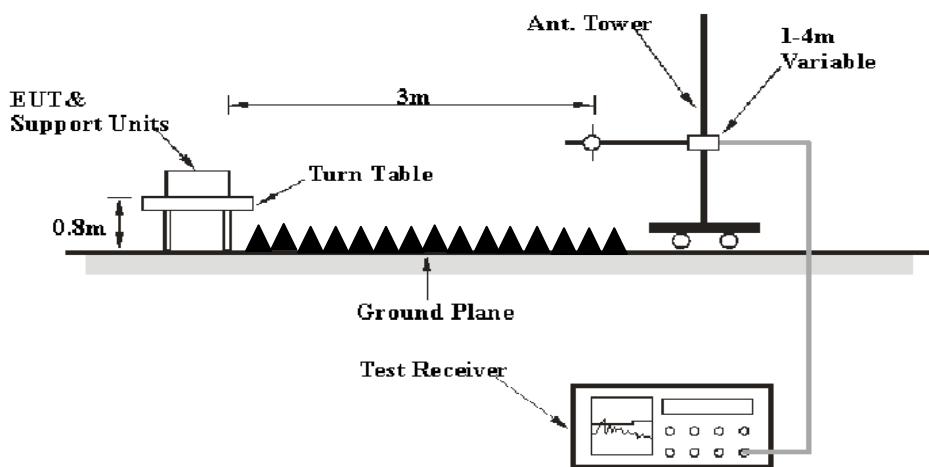

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2014. The specification used was the FCC Part 15.109 Class B limits.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 13 GHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	Peak
	1 MHz	10 Hz	/	Ave.

Test Procedure

During the radiated emissions, the adapter of laptop was connected to the first AC floor outlet and the other support equipments were connected to the second AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The data was recorded in the Quasi-peak detection mode for below 1 GHz, peak and average detection mode above 1 GHz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2015-08-03	2016-08-02
Sunol Sciences	Antenna	JB3	A060611-3	2014-11-06	2017-11-05
HP	Amplifier	8447E	2434A02181	2015-09-01	2016-09-01
Agilent	Spectrum Analyzer	E4440A	SG43360054	2015-11-23	2016-11-22
ETS-Lindgren	Horn Antenna	3115	9808-5557	2015-09-06	2018-09-06
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2015-02-19	2016-02-19
N/A	Coaxial Cable	14m	N/A	2015-05-06	2016-05-06
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the data in the following table, the EUT complied with the FCC Part 15 B Class B, with the worst margin reading of:

12.30 dB at 40.6700 MHz in the Horizontal polarization

Test Data

Environmental Conditions

Temperature:	23.6 °C
Relative Humidity:	54 %
ATM Pressure:	100.8 kPa


* The testing was performed by Allen Qiao on 2016-01-07.

Test Result: Compliance


Test Mode: Operating (USB data transmission)

1) Below 1GHz:


Horizontal

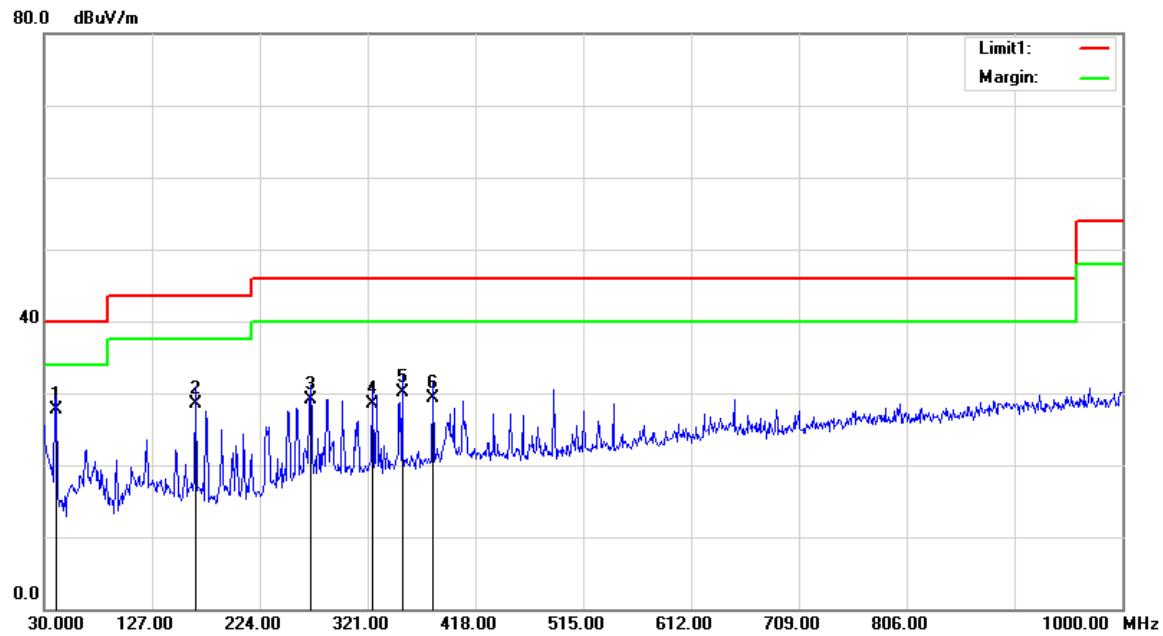

Frequency (MHz)	Receiver Reading (dB μ V)	Detector	Correction Factor (dB/m)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
40.6700	34.96	QP	-7.26	27.70	40.00	12.30
165.8000	36.38	QP	-7.88	28.50	43.50	15.00
269.5900	35.53	QP	-6.43	29.10	46.00	16.90
324.8800	34.12	QP	-5.52	28.60	46.00	17.40
352.0400	35.05	QP	-4.95	30.10	46.00	15.90
380.1700	33.77	QP	-4.37	29.40	46.00	16.60

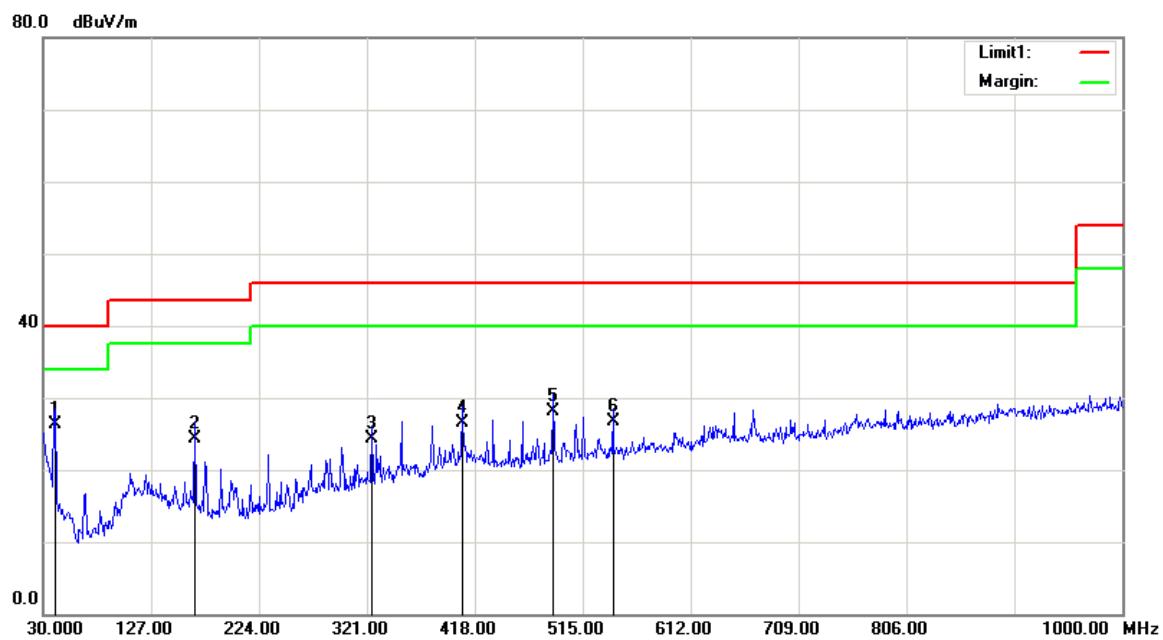
Vertical

Frequency (MHz)	Receiver Reading (dB μ V)	Detector	Correction Factor (dB/m)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
40.6700	33.56	QP	-7.26	26.30	40.00	13.70
165.8000	32.28	QP	-7.88	24.40	43.50	19.10
324.8800	29.82	QP	-5.52	24.30	46.00	21.70
406.3600	30.09	QP	-3.59	26.50	46.00	19.50
488.8100	29.99	QP	-1.79	28.20	46.00	17.80
542.1600	27.92	QP	-1.22	26.70	46.00	19.30

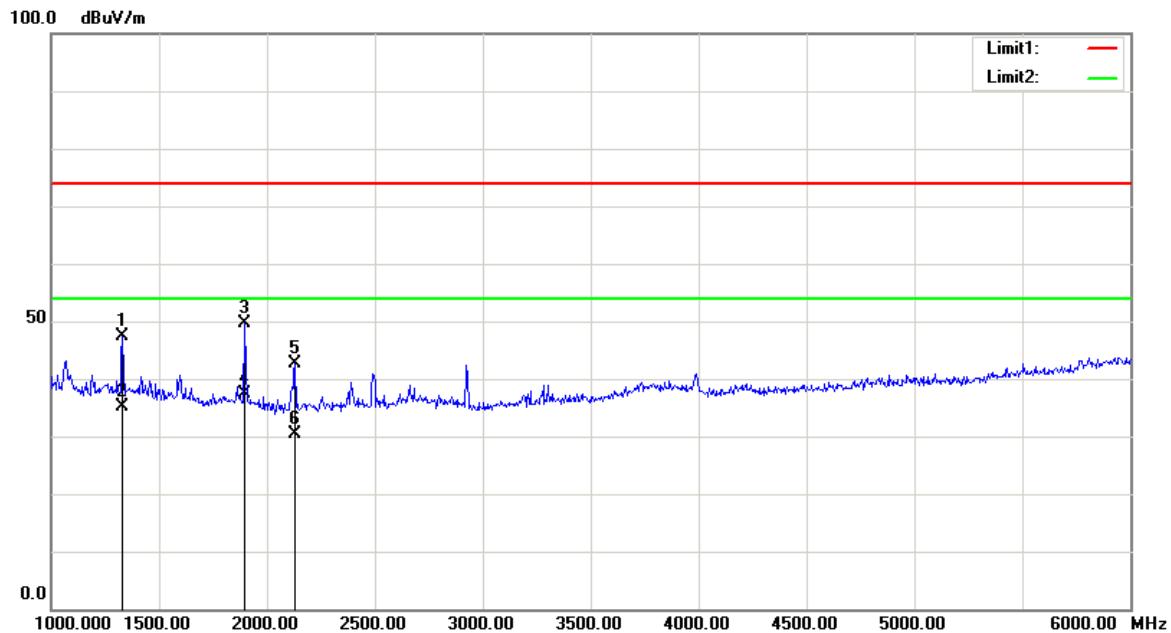2) Above 1GHz:**Horizontal**

Frequency (MHz)	Receiver Reading (dB μ V)	Detector	Correction Factor (dB/m)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1332.500	42.90	peak	4.54	47.44	74.00	26.56
1332.500	30.48	Ave	4.54	35.02	54.00	18.98
1895.000	46.21	peak	3.54	49.75	74.00	24.25
1895.000	33.72	Ave	3.54	37.26	54.00	16.74
2132.500	39.39	peak	3.32	42.71	74.00	31.29
2132.500	27.02	Ave	3.32	30.34	54.00	23.66

Note: For above 6GHz, no emissions were detected.

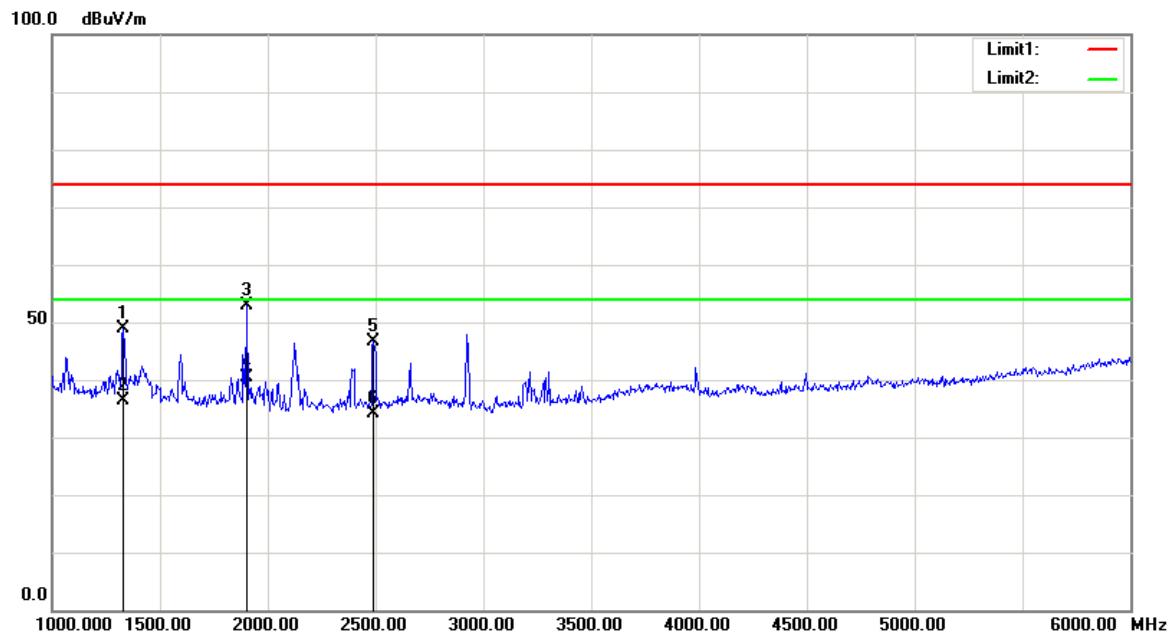Vertical

Frequency (MHz)	Receiver Reading (dB μ V)	Detector	Correction Factor (dB/m)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1330.000	44.36	peak	4.57	48.93	74.00	25.07
1330.000	31.88	Ave	4.57	36.45	54.00	17.55
1905.000	49.37	peak	3.52	52.89	74.00	21.11
1905.000	36.81	Ave	3.52	40.33	54.00	13.67
2492.500	41.88	peak	4.68	46.56	74.00	27.44
2492.500	29.53	Ave	4.68	34.21	54.00	19.79

Note: For above 6GHz, no emissions were detected.

DECLARATION LETTER

ROAM Data Inc.

Product Similarity Declaration

Date: 2016-1-19

To Whom It May Concern,


We, ROAM Data Inc., hereby declare that our product Mobile Payment Terminal, Series Model Number: RP456 are electrically identical with the same electromagnetic emissions and electromagnetic compatibility characteristics as model name: RP457 that was tested by BACL, the results of which are featured in BACL project.

A description of the differences between the tested model and those that are declared similar areas follows:

RP457 have the function of MFi, but RP456 do not have this function.

Please contact me if you have any question.

Signature:



Sriram Seetharam
(Ingenico Mobile Solution)

Sriram Seetharam
Title: Devices Product manager

***** END OF REPORT *****