



FCC PART 15.247

TEST REPORT

For

ROAM Data Inc.

280 Summer St, Boston MA, USA

FCC ID: 2ABY6-RP457

Report Type: Original Report	Product Type: Mobile Payment Terminal
Test Engineer: <u>Allen Qiao</u> <i>Allen Qiao</i>	
Report Number: <u>RXM160104051-00B</u>	
Report Date: <u>2016-01-14</u>	
Reviewed By: Sula Huang RF Leader	<i>Sula Huang</i>
Test Laboratory: Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	5
DESCRIPTION OF TEST CONFIGURATION	5
EQUIPMENT MODIFICATIONS	5
EUT EXERCISE SOFTWARE	5
SUPPORT EQUIPMENT LIST AND DETAILS	5
EXTERNAL CABLE.....	5
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	8
FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE.....	9
APPLICABLE STANDARD	9
FCC §15.203 - ANTENNA REQUIREMENT.....	10
APPLICABLE STANDARD	10
ANTENNA CONNECTOR CONSTRUCTION	10
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	11
APPLICABLE STANDARD	11
MEASUREMENT UNCERTAINTY	11
EUT SETUP	11
EMI TEST RECEIVER SETUP.....	12
TEST PROCEDURE	12
CORRECTED AMPLITUDE & MARGIN CALCULATION	12
TEST EQUIPMENT LIST AND DETAILS.....	13
TEST RESULTS SUMMARY	13
TEST DATA	13
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	16
APPLICABLE STANDARD	16
MEASUREMENT UNCERTAINTY	16
EUT SETUP	16
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	17
TEST PROCEDURE	17
CORRECTED AMPLITUDE & MARGIN CALCULATION	18
TEST EQUIPMENT LIST AND DETAILS.....	18
TEST RESULTS SUMMARY	18
TEST DATA	18
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....	22
APPLICABLE STANDARD	22
TEST PROCEDURE	22
TEST EQUIPMENT LIST AND DETAILS.....	22
TEST DATA	22
FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....	25

APPLICABLE STANDARD	25
TEST PROCEDURE	25
TEST EQUIPMENT LIST AND DETAILS.....	25
TEST DATA	25
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	28
APPLICABLE STANDARD	28
TEST PROCEDURE	28
TEST EQUIPMENT LIST AND DETAILS.....	28
TEST DATA	28
FCC §15.247(e) - POWER SPECTRAL DENSITY	30
APPLICABLE STANDARD	30
TEST PROCEDURE	30
TEST EQUIPMENT LIST AND DETAILS.....	30
TEST DATA	30
DECLARATION LETTER	33

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *ROAM Data Inc.*'s product, model number: *RP457 (FCC ID: 2ABY6-RP457)* (the "EUT") in this report was a *Mobile Payment Terminal*, which was measured approximately: 6.3 cm (L) x 6.7cm (W) x 2.3 cm (H), rated input voltage: DC3.7V rechargeable Li-ion battery or DC5V charging from USB port.

Note: The series product, model RP457, RP456 are electrically identical, the difference between them please refer declaration letter , we selected RP457 for testing, the details difference was explained in the attached declaration letter.

All measurement and test data in this report was gathered from production sample serial number: 160104051 (Assigned by BACL, Dongguan). The EUT was received on 2016-01-04.

Objective

This report is prepared on behalf of *ROAM Data Inc.* in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communications Commission's rules

The tests were performed in order to determine the compliance of the EUT with FCC Part 15-Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15B JBP submissions with FCC ID: 2ABY6-RP457

FCC Part 15C DSS submissions with FCC ID: 2ABY6-RP457

FCC Part 15C DXX submissions with FCC ID: 2ABY6-RP457

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communications Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 06, 2015.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in testing mode, which was provided by manufacturer.

For Bluetooth LE mode, 40 channels are provided for testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404
...
...
..	...	38	2478
19	2440	39	2480

EUT was tested with channel 0, 19 and 39.

The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates bandwidths, and modulations.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

The worst condition (maximum power with 100% duty cycle) was setting by the software as following table:


Test Mode	Test Software Version	Broadcom Bluetool		
		2402 MHz	2440 MHz	2480 MHz
BLE	Test Frequency			
	BLE	N/A	N/A	N/A

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
KEYU	AC/DC Adapter	KA25-0501000US	N/A

External Cable


Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
USB Cable	no	no	0.56	USB Port of Adapter	EUT

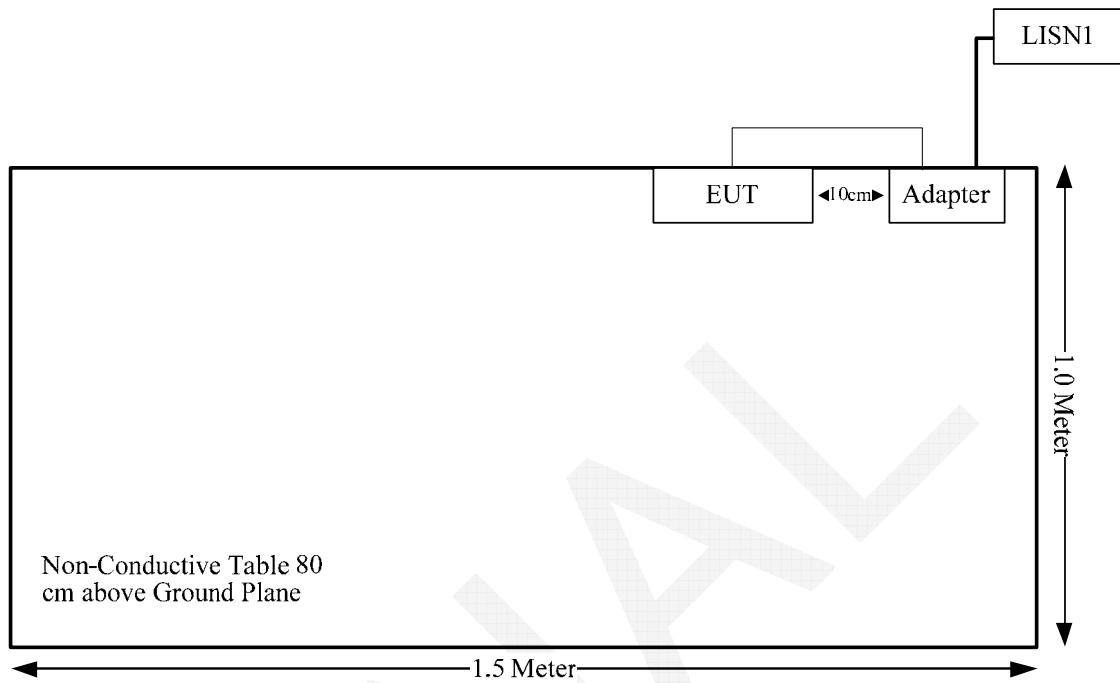Block Diagram of Test Setup**AC power-line conducted emissions:****Radiated Emissions:**

Below 1GHz:

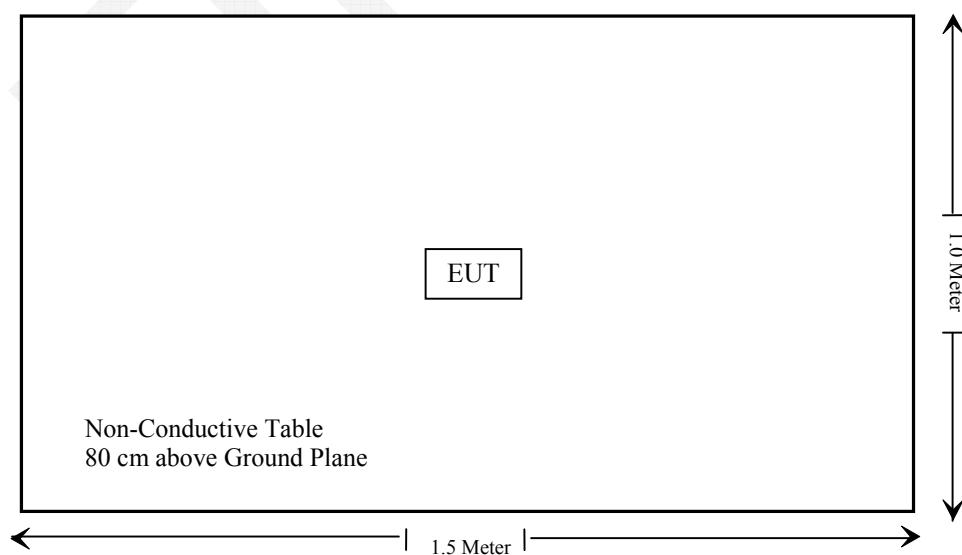

Above 1GHz:

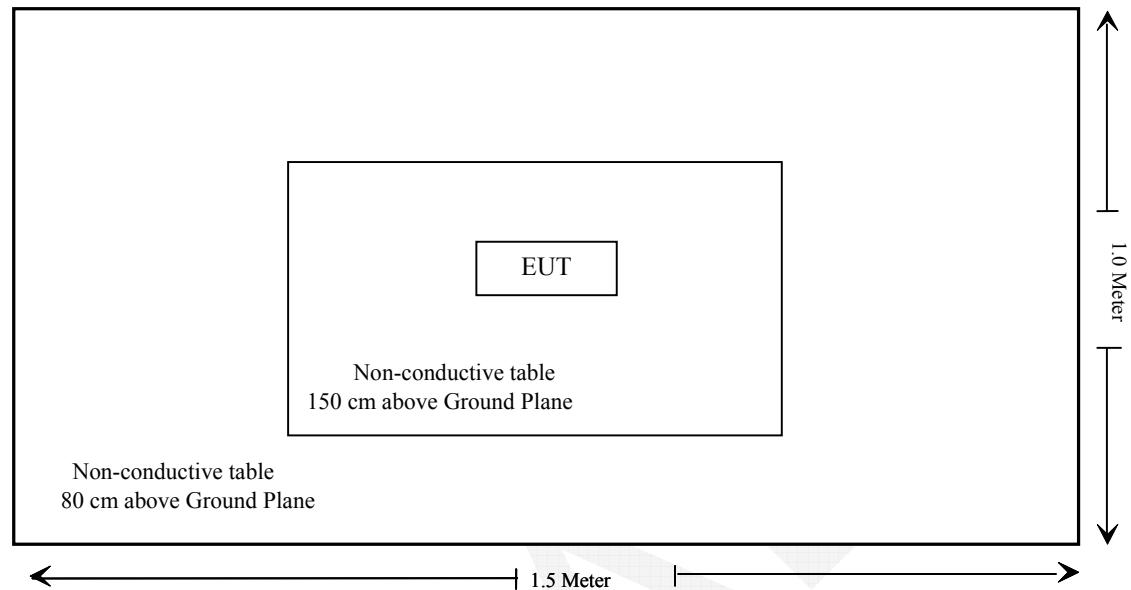

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.247 (i) & §1.1310 & §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.247(d)	Spurious Emissions at Antenna Port	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum conducted output power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE

Applicable Standard

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v06:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

Measurement Result

The max tune-up conducted power is 5.8 dBm (3.80 mW).

$[(\text{max. power of channel, mW}) / (\text{min. test separation distance, mm})] [\sqrt{f(\text{GHz})}]$
 $= 3.80 / 5 * (\sqrt{2.480}) = 1.2 < 3.0$

So the stand-alone SAR evaluation is not necessary.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Antenna Connector Construction

The EUT has one integral antenna arrangement, which was permanently attached and the antenna gain is 0.5dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

Measurement Uncertainty

Compliance or non- compliance with a disturbance limit shall be determined in the following manner :

If U_{lab} is less than or equal to $U_{\text{cisp}}_{\text{r}}$ of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non - compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than $U_{\text{cisp}}_{\text{r}}$ of Table 1, then:


- compliance is deemed to occur if no measured disturbance level, increased by $(U_{\text{lab}} - U_{\text{cisp}}_{\text{r}})$, exceeds the disturbance limit;
- non - compliance is deemed to occur if any measured disturbance level, increased by $(U_{\text{lab}} - U_{\text{cisp}}_{\text{r}})$, exceeds the disturbance limit.

Based on CISPR 16-4-2-2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Dongguan) is 3.12 dB (150 kHz to 30 MHz).

Table 1 – Values of $U_{\text{cisp}}_{\text{r}}$

Measurement	$U_{\text{cisp}}_{\text{r}}$
Conducted disturbance at mains port using AMN (150 kHz to 30 MHz)	3.4 dB

EUT Setup

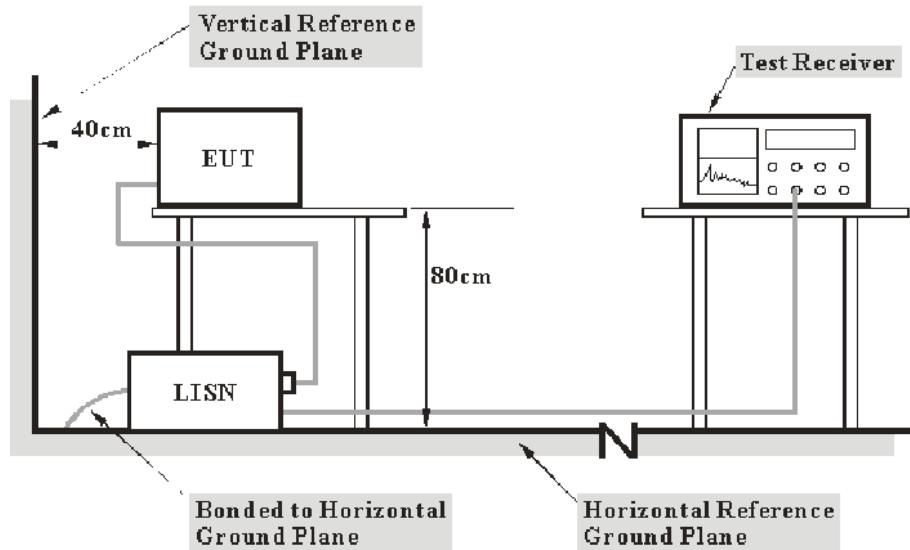

Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

V_C (cord. Reading): corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF: voltage division factor of AMN

C_f : Correction Factor

The “Margin” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2015-10-20	2016-10-20
R&S	L.I.S.N	ESH2-Z5	892107/021	2015-07-16	2016-07-15
R&S	Two-line V-network	ENV 216	3560.6550.12	2015-11-26	2016-11-25
N/A	Coaxial Cable	1.8m	N/A	2015-05-06	2016-05-06
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

13.9 dB at 0.519918 MHz in the Line conducted mode

Test Data


Environmental Conditions

Temperature:	22.9°C
Relative Humidity:	56 %
ATM Pressure:	101 kPa

The testing was performed by Allen Qiao on 2016-01-05.


Test Mode: Transmitting

AC120 V, 60 Hz, Line:

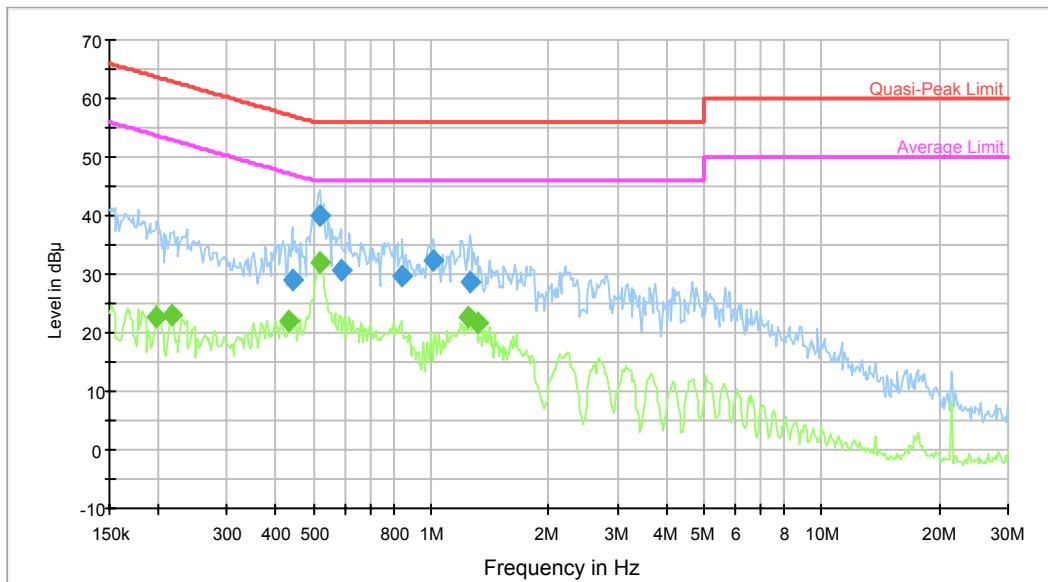

Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.439808	28.9	9.000	L1	9.8	28.2	57.1	Compliance
0.519918	40.0	9.000	L1	9.8	16.0	56.0	Compliance
0.585926	30.7	9.000	L1	9.8	25.3	56.0	Compliance
0.845331	29.7	9.000	L1	9.8	26.3	56.0	Compliance
1.015358	32.2	9.000	L1	9.8	23.8	56.0	Compliance
1.259081	28.7	9.000	L1	9.8	27.3	56.0	Compliance

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.198249	22.8	9.000	L1	9.7	30.9	53.7	Compliance
0.216409	23.0	9.000	L1	9.7	30.0	53.0	Compliance
0.429420	22.0	9.000	L1	9.8	25.3	47.3	Compliance
0.519918	32.1	9.000	L1	9.8	13.9	46.0	Compliance
1.239175	22.5	9.000	L1	9.8	23.5	46.0	Compliance
1.310256	21.5	9.000	L1	9.8	24.5	46.0	Compliance

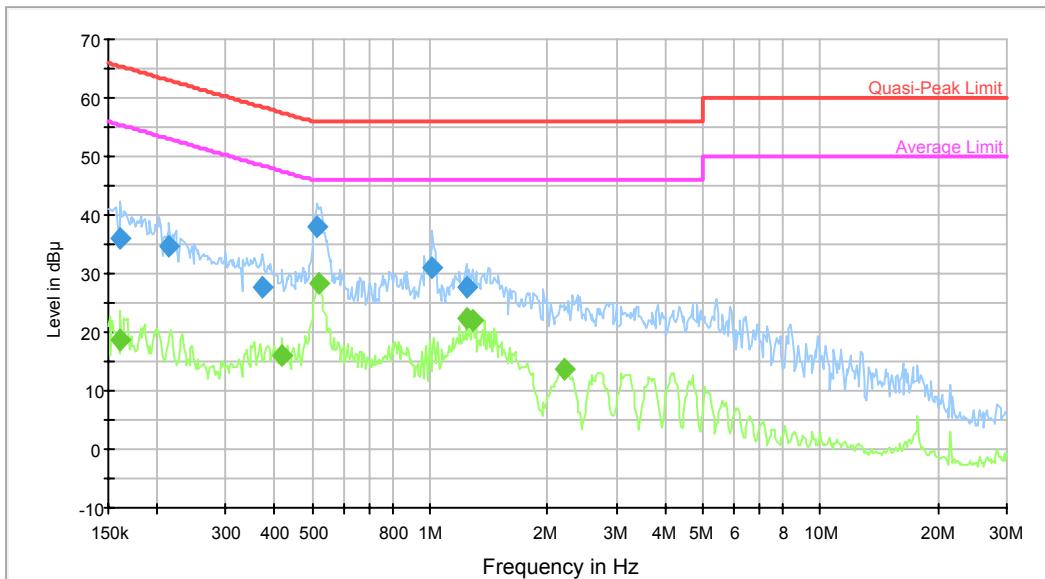AC120 V, 60 Hz, Neutral:

Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.161152	36.2	9.000	N	9.7	29.2	65.4	Compliance
0.214692	34.8	9.000	N	9.7	28.2	63.0	Compliance
0.372042	27.8	9.000	N	9.7	30.7	58.5	Compliance
0.515791	38.0	9.000	N	9.7	18.0	56.0	Compliance
1.015358	30.9	9.000	N	9.8	25.1	56.0	Compliance
1.239175	27.7	9.000	N	9.8	28.3	56.0	Compliance

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.161152	18.7	9.000	N	9.7	36.7	55.4	Compliance
0.419276	16.2	9.000	N	9.7	31.3	47.5	Compliance
0.519918	28.3	9.000	N	9.7	17.7	46.0	Compliance
1.239175	22.4	9.000	N	9.8	23.6	46.0	Compliance
1.289541	21.9	9.000	N	9.8	24.1	46.0	Compliance
2.216927	13.6	9.000	N	9.8	32.4	46.0	Compliance

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard

FCC §15.247 (d); §15.209; §15.205;

Measurement Uncertainty

Compliance or non- compliance with a disturbance limit shall be determined in the following manner :

If U_{lab} is less than or equal to U_{cisp} of Table 2, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non - compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cisp} of Table 2, then:

- compliance is deemed to occur if no measured disturbance level, increased by $(U_{\text{lab}} - U_{\text{cisp}})$, exceeds the disturbance limit;
- non - compliance is deemed to occur if any measured disturbance level, increased by $(U_{\text{lab}} - U_{\text{cisp}})$, exceeds the disturbance limit.


Based on CISPR 16-4-2: 2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is:30M~200MHz: 4.58 dB for Horizontal, 4.59 dB for Vertical; 200M~1GHz: 4.83 dB for Horizontal, 5.85 dB for Vertical; 1G~6GHz: 4.45 dB, 6G~18GHz: 5.23 dB.


Table 2 – Values of U_{cisp}

Measurement	U_{cisp}
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB

EUT Setup

Below 1GHz:

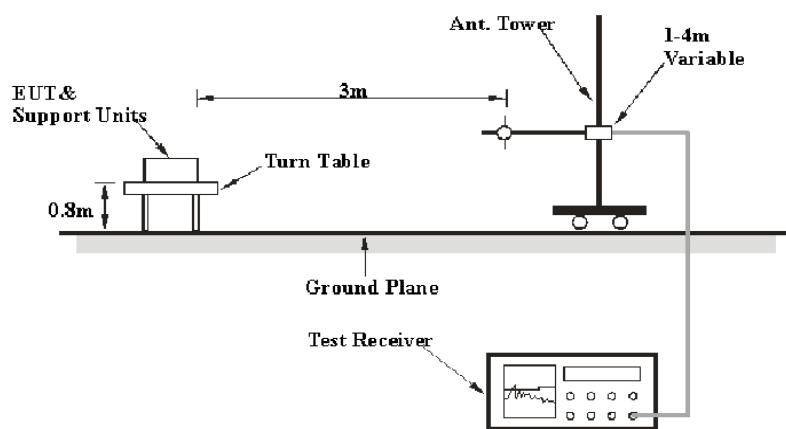

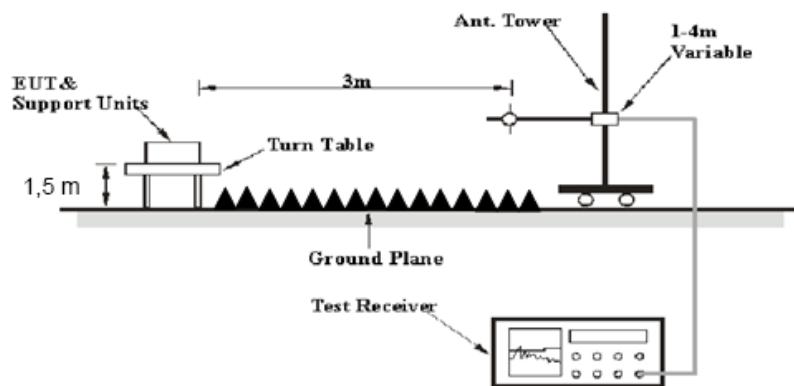Above 1GHz:

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits. The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2015-08-03	2016-08-02
Sunol Sciences	Antenna	JB3	A060611-3	2014-11-06	2017-11-05
HP	Amplifier	8447E	2434A02181	2015-09-01	2016-09-01
Agilent	Spectrum Analyzer	E4440A	SG43360054	2015-11-23	2016-11-22
ETS-Lindgren	Horn Antenna	3115	9808-5557	2015-09-06	2018-09-06
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2015-02-19	2016-02-19
R&S	Spectrum Analyzer	FSEM	DE31388	2015-11-23	2016-11-22
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2014-06-16	2017-06-15
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2015-09-06	2016-09-06
N/A	Coaxial Cable	14m	N/A	2015-05-06	2016-05-06
N/A	Coaxial Cable	8m	N/A	2015-05-06	2016-05-06
N/A	Coaxial Cable	0.1m	N/A	2015-05-06	2016-05-06
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2015-05-06	2016-05-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Section 15.205, 15.209 and 15.247, with the worst margin reading of:

11.85 dB at 2483.5 MHz in the Horizontal polarization

Test Data

Environmental Conditions


Temperature:	21.9 °C
Relative Humidity:	50 %
ATM Pressure:	101.7 kPa

* The testing was performed by Allen Qiao on 2016-01-07.


Test Mode: Transmitting

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
Low Channel: 2402 MHz									
2402	67.01	PK	H	24.82	3.66	0.00	95.49	N/A	N/A
2402	50.13	AV	H	24.82	3.66	0.00	78.61	N/A	N/A
2402	65.58	PK	V	24.82	3.66	0.00	94.06	N/A	N/A
2402	48.74	AV	V	24.82	3.66	0.00	77.22	N/A	N/A
2390	25.97	PK	H	24.80	3.63	0.00	54.40	74.00	19.60
2390	12.97	AV	H	24.80	3.63	0.00	41.40	54.00	12.60
4804	36.51	PK	H	29.71	5.06	27.41	43.87	74.00	30.13
4804	21.32	AV	H	29.71	5.06	27.41	28.68	54.00	25.32
7206	33.07	PK	H	33.93	6.61	25.91	47.70	74.00	26.30
7206	19.81	AV	H	33.93	6.61	25.91	34.44	54.00	19.56
9608	30.43	PK	H	36.36	8.53	27.55	47.77	74.00	26.23
9608	17.16	AV	H	36.36	8.53	27.55	34.50	54.00	19.50
3310	36.37	PK	H	26.63	5.07	27.28	40.79	74.00	33.21
3310	23.28	AV	H	26.63	5.07	27.28	27.70	54.00	26.30
352.04	35.4	QP	H	15.28	2.26	21.65	31.29	46.00	14.71
Middle Channel: 2440 MHz									
2440	67.49	PK	H	24.89	3.76	0.00	96.14	N/A	N/A
2440	50.54	AV	H	24.89	3.76	0.00	79.19	N/A	N/A
2440	65.82	PK	V	24.89	3.76	0.00	94.47	N/A	N/A
2440	48.94	AV	V	24.89	3.76	0.00	77.59	N/A	N/A
4880	36.62	PK	H	29.86	5.18	27.42	44.24	74.00	29.76
4880	21.4	AV	H	29.86	5.18	27.42	29.02	54.00	24.98
7320	33.02	PK	H	34.11	6.75	25.88	48.00	74.00	26.00
7320	19.84	AV	H	34.11	6.75	25.88	34.82	54.00	19.18
9760	30.3	PK	H	36.46	8.62	27.21	48.17	74.00	25.83
9760	17.18	AV	H	36.46	8.62	27.21	35.05	54.00	18.95
3310	36.33	PK	H	26.63	5.07	27.28	40.75	74.00	33.25
3310	23.41	AV	H	26.63	5.07	27.28	27.83	54.00	26.17
3985	32.75	PK	H	28.17	4.85	27.21	38.56	74.00	35.44
3985	19.86	AV	H	28.17	4.85	27.21	25.67	54.00	28.33
352.04	35.3	QP	H	15.28	2.26	21.65	31.19	46.00	14.81
High Channel: 2480 MHz									
2480	67.73	PK	H	24.96	3.68	0.00	96.37	N/A	N/A
2480	50.74	AV	H	24.96	3.68	0.00	79.38	N/A	N/A
2480	66.26	PK	V	24.96	3.68	0.00	94.90	N/A	N/A
2480	49.37	AV	V	24.96	3.68	0.00	78.01	N/A	N/A
2483.5	27.41	PK	H	24.97	3.67	0.00	56.05	74.00	17.95
2483.5	13.51	AV	H	24.97	3.67	0.00	42.15	54.00	11.85
4960	36.16	PK	H	30.02	5.34	27.43	44.09	74.00	29.91
4960	21.24	AV	H	30.02	5.34	27.43	29.17	54.00	24.83
7440	32.91	PK	H	34.30	6.89	25.97	48.13	74.00	25.87
7440	19.69	AV	H	34.30	6.89	25.97	34.91	54.00	19.09
9920	30.2	PK	H	36.55	8.71	26.66	48.80	74.00	25.20
9920	16.93	AV	H	36.55	8.71	26.66	35.53	54.00	18.47
3310	36.1	PK	H	26.63	5.07	27.28	40.52	74.00	33.48
3310	23.15	AV	H	26.63	5.07	27.28	27.57	54.00	26.43
352.04	35.2	QP	H	15.28	2.26	21.65	31.09	46.00	14.91


Conducted Spurious Emissions at Antenna Port

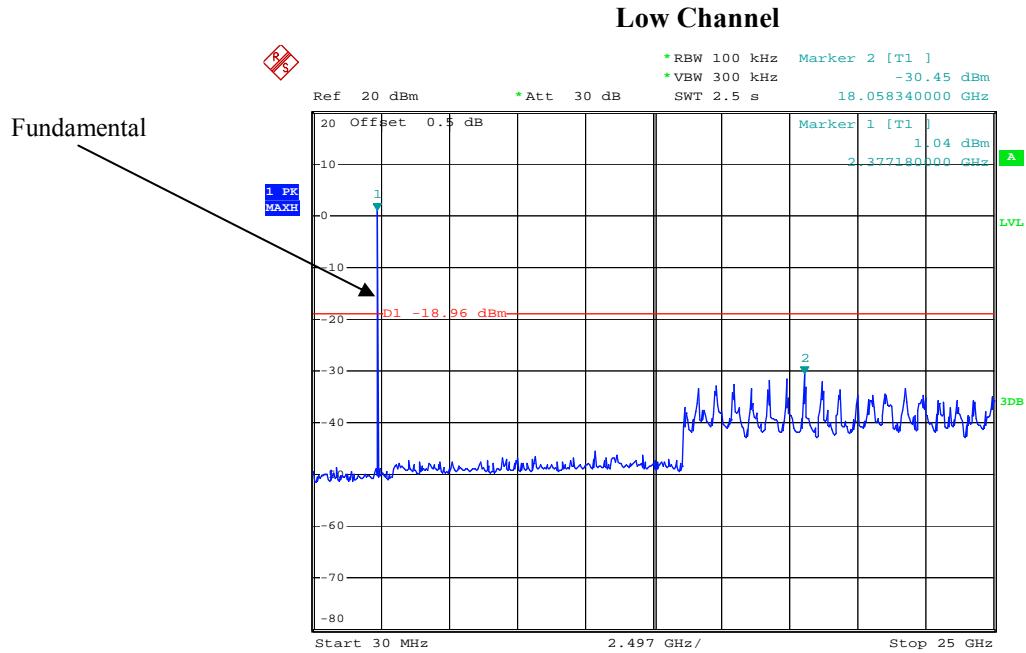

Date: 7.JAN.2016 16:53:02

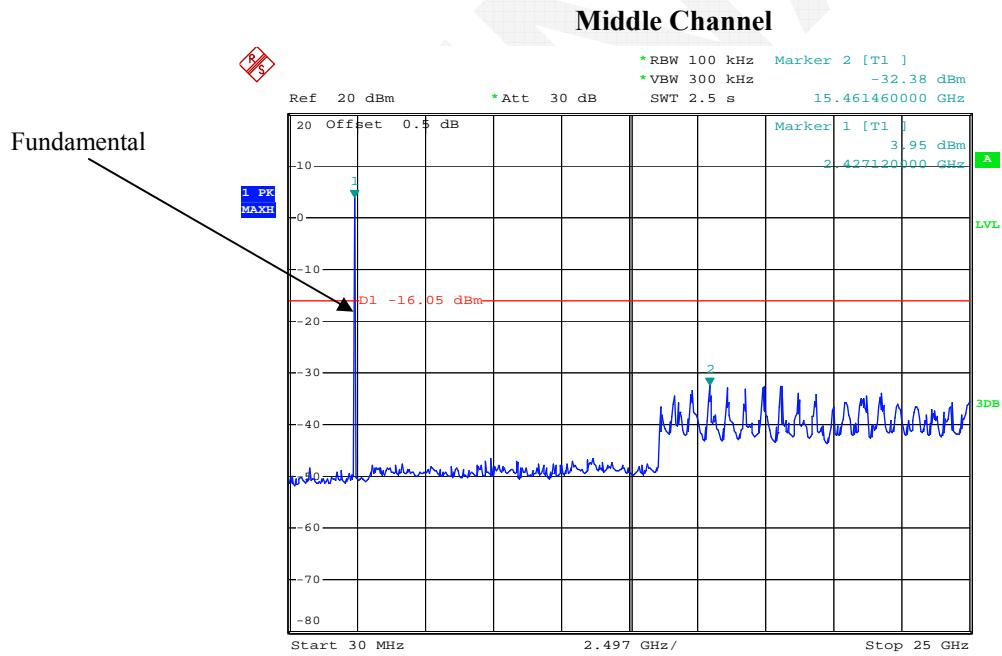

Date: 7.JAN.2016 16:57:12

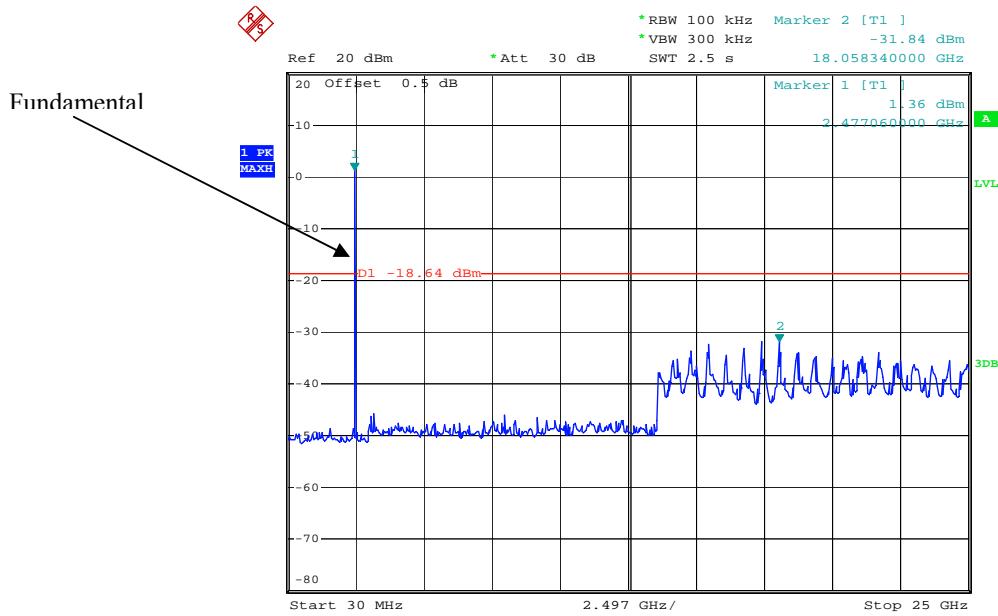High Channel

Date: 7.JAN.2016 17:00:23

FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH

Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r04

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $3 \times$ RBW
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	DE31388	2015-11-23	2016-11-22
N/A	Coaxial Cable	0.1m	N/A	2015-05-06	2016-05-06
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2015-05-06	2016-05-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Temperature:	22.48 °C
Relative Humidity:	50 %
ATM Pressure:	101.7 kPa

* The testing was performed by Allen Qiao on 2016-01-07.

Test Mode: Transmitting


Test Result: Compliant. Please refer to the following table and plots.

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)
Low	2402	0.512	0.5
Middle	2440	0.508	0.5
High	2480	0.512	0.5

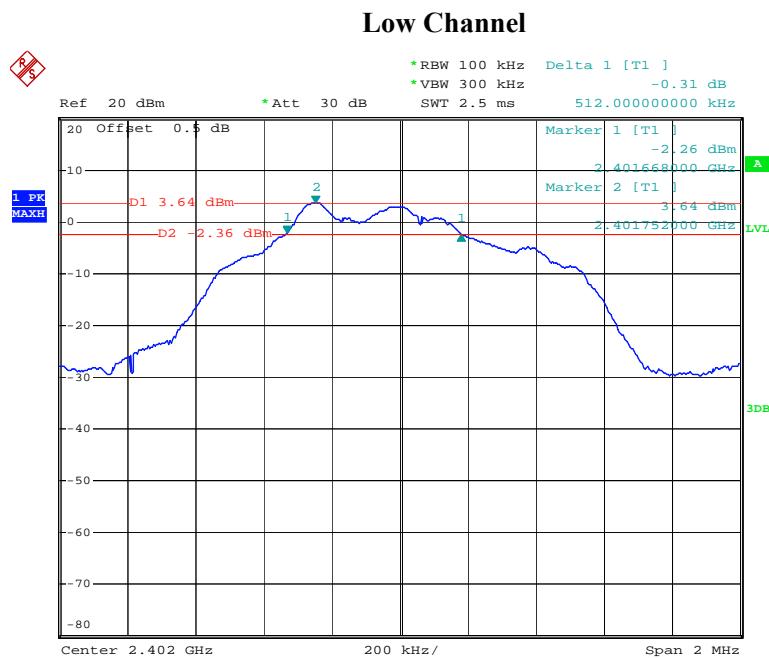


Date: 7.JAN.2016 16:51:47

Middle Channel

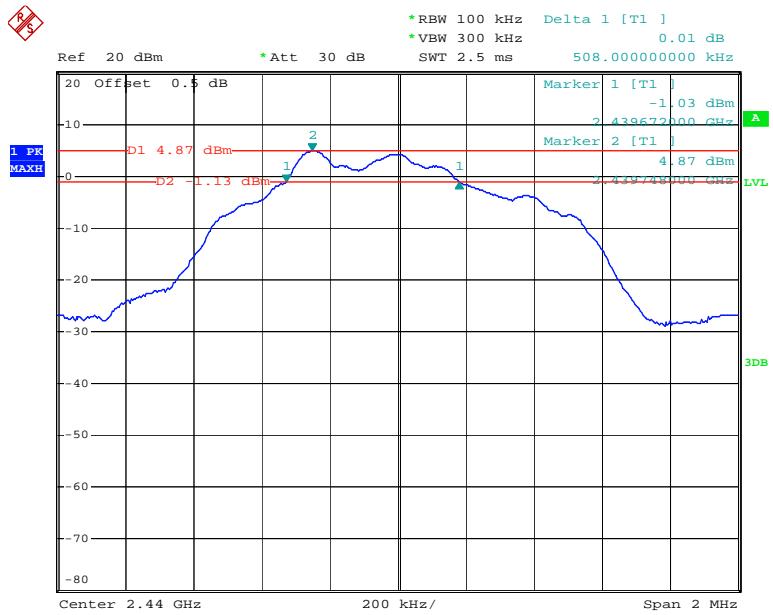

Date: 7.JAN.2016 16:56:15

High Channel

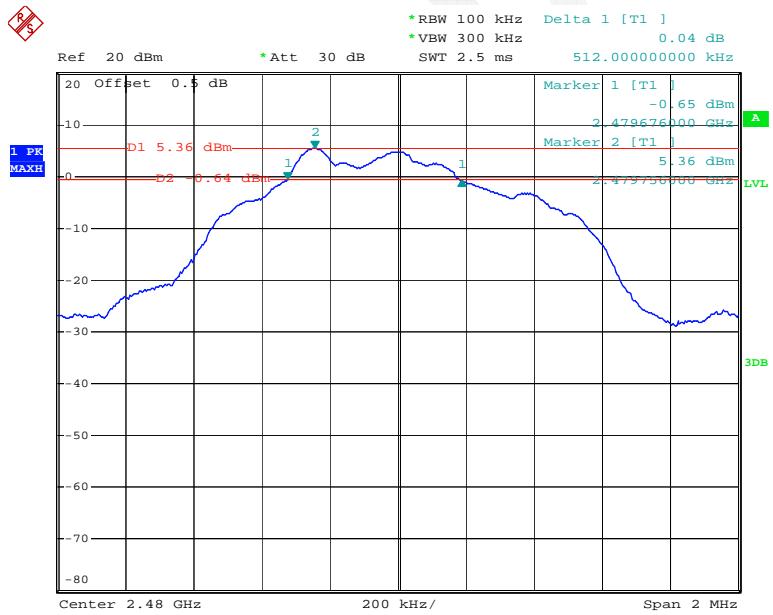

Date: 7.JAN.2016 16:59:24

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r04

- a) Set the RBW DTS bandwidth.
- b) Set VBW $3 \times$ RBW.
- c) Set span $3 \times$ RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	DE31388	2015-11-23	2016-11-22
N/A	Coaxial Cable	0.1m	N/A	2015-05-06	2016-05-06
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2015-05-06	2016-05-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	22.6 °C
Relative Humidity:	49 %
ATM Pressure:	101.7 kPa


* The testing was performed by Allen Qiao on 2016-01-07.

Test Mode: Transmitting


Test Result: Compliant. Please refer to the following table.

Channel	Frequency	Max Peak Conducted Output Power	Limit
	(MHz)	(dBm)	(dBm)
Low	2402	3.85	30
Middle	2440	5.11	30
High	2480	5.62	30


Low Channel

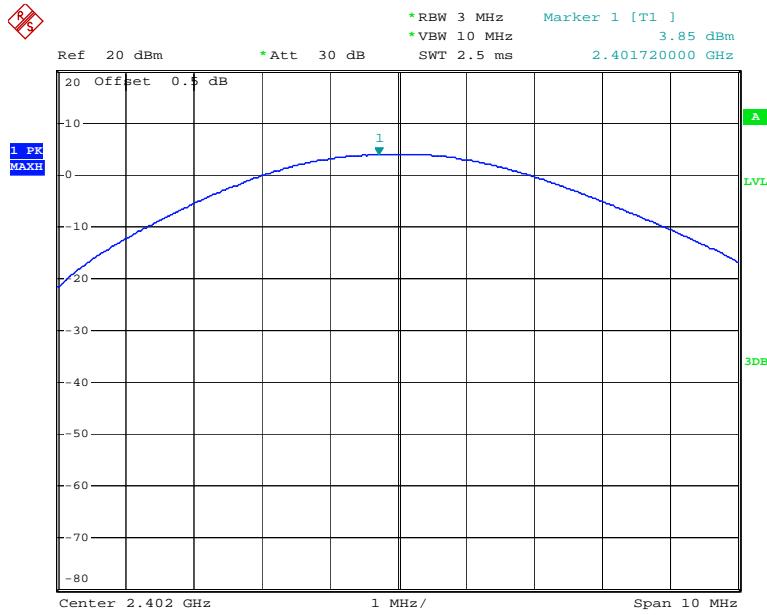

Date: 7.JAN.2016 16:52:14

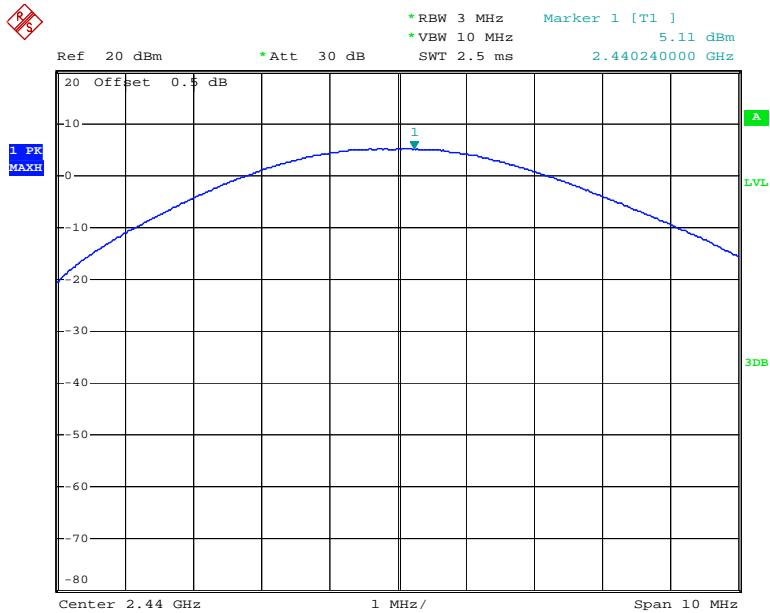Middle Channel

Date: 7.JAN.2016 16:56:41

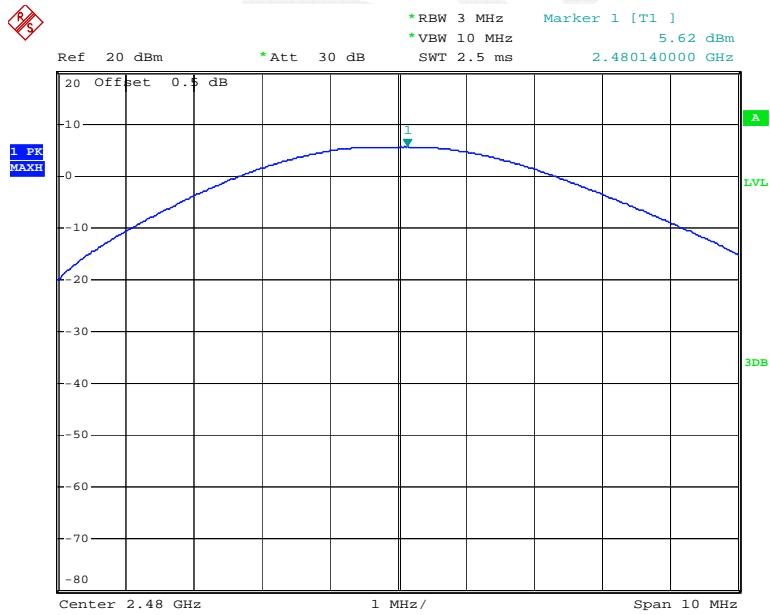High Channel

Date: 7.JAN.2016 16:59:50

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	DE31388	2015-11-23	2016-11-22
N/A	Coaxial Cable	0.1m	N/A	2015-05-06	2016-05-06
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2015-05-06	2016-05-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Temperature:	22.8 °C
Relative Humidity:	50 %
ATM Pressure:	101.7 kPa

* The testing was performed by Allen Qiao on 2016-01-07.

Test mode: Transmitting


Test Result: Compliant. Please refer to following plots.

Band Edge , Left Side

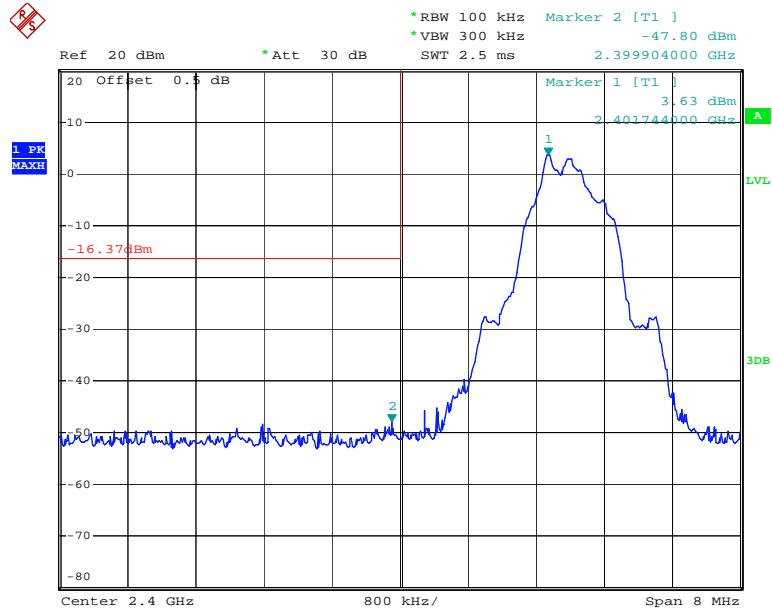

Date: 7.JAN.2016 16:53:20

Band Edge, Right Side

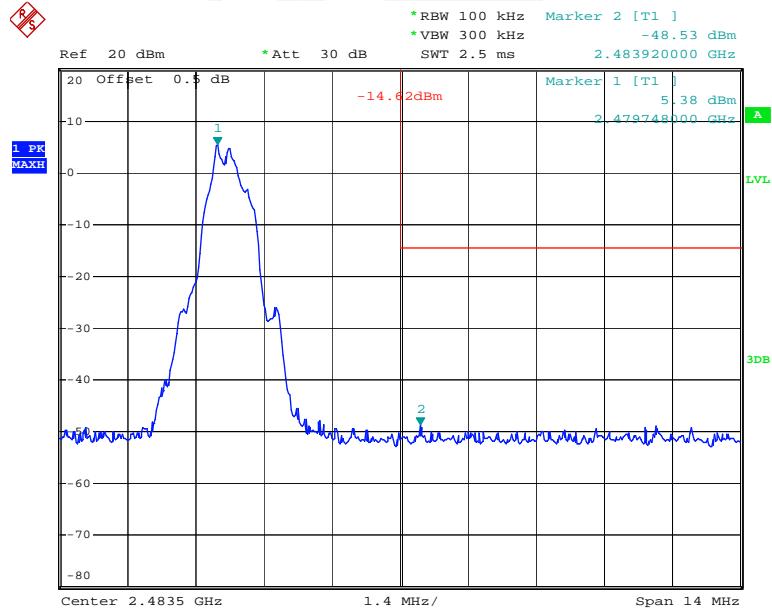

Date: 7.JAN.2016 17:00:41

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r04

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq 3 \times \text{RBW}$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	DE31388	2015-11-23	2016-11-22
N/A	Coaxial Cable	0.1m	N/A	2015-05-06	2016-05-06
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2015-05-06	2016-05-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	22.8 °C
Relative Humidity:	51 %
ATM Pressure:	101.7 kPa


* The testing was performed by Allen Qiao on 2016-01-07.

Test Mode: Transmitting


Test Result: Compliant. Please refer to the following table and plots

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
Low	2402	-13.53	8
Middle	2440	-12.26	8
High	2480	-11.93	8


Power Spectral Density, Low Channel

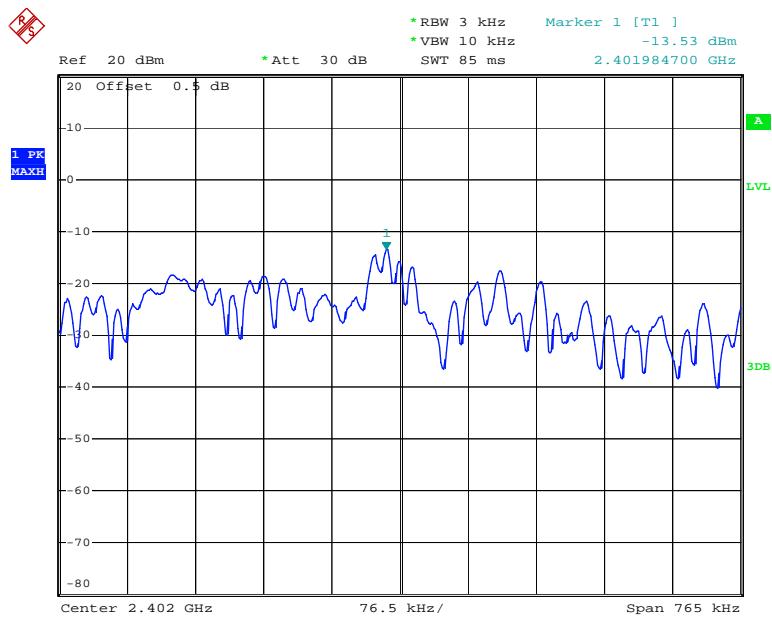

Date: 7.JAN.2016 16:52:24

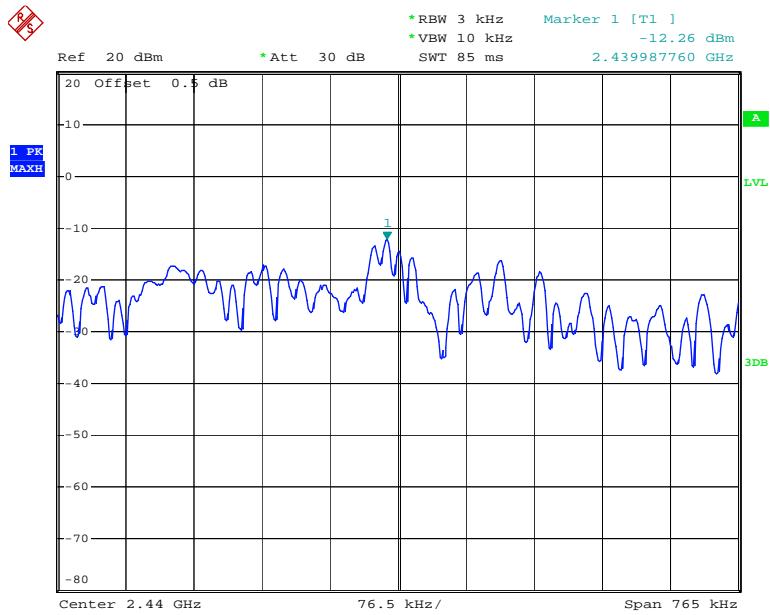Power Spectral Density, Middle Channel

Date: 7.JAN.2016 16:56:50

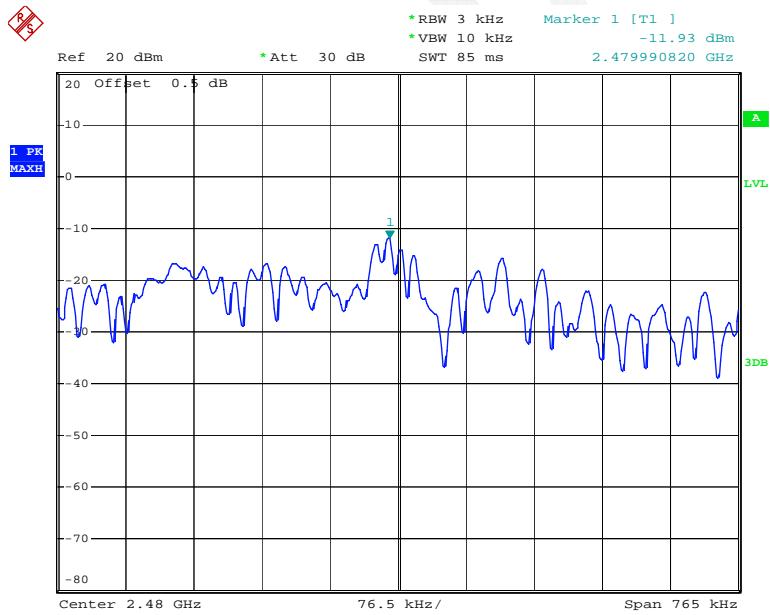Power Spectral Density, High Channel

Date: 7.JAN.2016 16:59:59

DECLARATION LETTER

ROAM Data Inc.

Product Similarity Declaration

Date: 2016-1-19

To Whom It May Concern,

We, ROAM Data Inc., hereby declare that our product Mobile Payment Terminal, Series Model Number: RP456 are electrically identical with the same electromagnetic emissions and electromagnetic compatibility characteristics as model name: RP457 that was tested by BACL, the results of which are featured in BACL project.

A description of the differences between the tested model and those that are declared similar areas follows:

RP457 have the function of MFi, but RP456 do not have this function.

Please contact me if you have any question.

Signature:



Sriram Seetharam
(Ingenico Mobile Solution)

Sriram Seetharam
Title: Devices Product manager

***** END OF REPORT *****