



Company:Shenzhen Shenguang Electronic Technology Co.,LTD

Address: Floor 401, Factory No. 1165, Guanhua Community, Guanlan Street,
Longhua District, Shenzhen, China

客户/Client

名称/TYPE

Magnetic chip/G43.5-0.8/single coil/0.08-24-2p-11TS/6.5uH/wire length 36MM

产品型号

Model NO

17.5-39mm-0.08*24*2p-11ts-6.5uh-036mm

产品编号

Part numbering systey

客户料号

Client p/NO

工程编号

Enginrer NO

TQE 1003

日期/Date

2025-3-31

本公司工程部/For Enginer Departner Only	
修改内容/Rvised Content	认可日期/APPproved Date

编制/Prepared

XieYanQi

审核/Checked

DuanJiaWang

认可/Approved

XieXiaoZai

客户认可回签/Authorixed Signaturure Company Chop		
工程/ Enginrer	认可/QC APPproved	认可日期/APPproved

一、 线圈工艺/Winding Procese:



Company:Shenzhen Shenguang Electronic Technology Co.,LTD

Address: Floor 401, Factory No. 1165, Guanhua Community, Guanlan Street,
Longhua District, Shenzhen, China

NO	winding	wire gauge	number of turns	winding direction	notes
1	N1	2UEW-B-0.08*24P*2	11TS	CCW	
2					

二. 电气性能/FEATURES:

1.测试条件 (Test conditions) : 25°C,65%RH@100KHz/1V

1.1 电感量 (Inductance)

1.11 L0A (Individual coil) =3.8uH±20%

1.12 L0A(Coil+Magnetic Disc)=6.5uH±10%

1.2 Q 值=30MIN

1.3 直流电阻 (DCR) : 120mΩ MAX


1.4 工作温度(Operating Temperature): -25°C~85°C

2.测试仪器(Test instrument): L:1068+1310;DCR:502BC;SIZE:Callipers

3.材料清单(Bill of Material)



NO	Project	materials
1	WIRE	¢ 0.08*24p*2 2UEW
2	FERRITE	43.5*5.3*0.8 L Double slot ferrite hard magnet
3	GLUE	White glue
4	SOLDER	XCD-907B
5	Adhesive	Double sided adhesive tape
6	High temperature adhesive	8MM (ref) high-temperature adhesive tape
7		

三. 电路图/CIRCUIT DIAGRAM



Unit: MM

四. 外形图/OUTSIDE DIAGRA

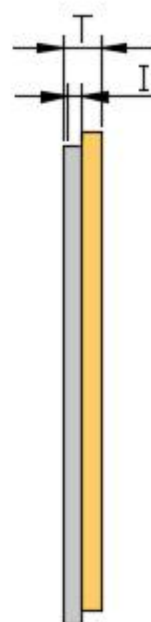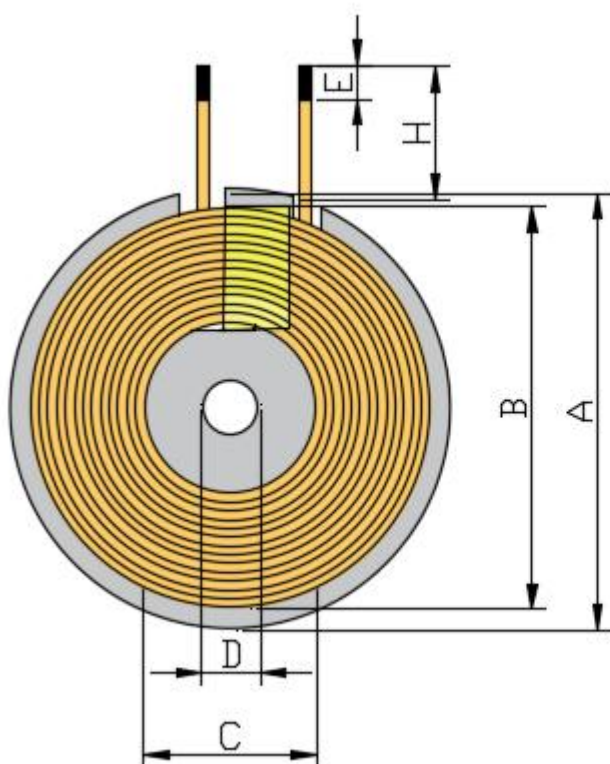


Note: Wrap 8MM (ref) high-temperature adhesive tape around the coil outlet position

stan dard	A	B	C	D	E	I	T	H
STD	43.5±0.5	39±1	17.5±0.5	5.3±0.5	3±1	0.8±0.1	1.8Max	36±2

单位: MM

五. 包装/PACKAGE

5.1 包装图片 Packing pictures:

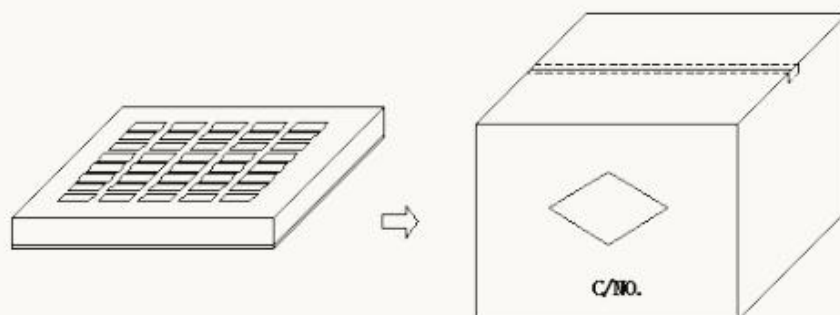

5.2 包装数量及规格 Packing Quantity:

项目 Item	数量 Quantity	材料规格 Material
盒 Box	350 Pcs	345*330*50 mm
箱 Big Carton	1400 Pcs	360*340*280 mm

5.3 包装以现有包装盘为参照标准，以实际出货包装为准，如有特要求可以定制。

The packaging shall be based on the exusting packing plate and the actual delivery package shall prevail .If there is any requirement,we can customize it.



Company:Shenzhen Shenguang Electronic Technology Co.,LTD

Address: Floor 401, Factory No. 1165, Guanhua Community, Guanlan Street,
Longhua District, Shenzhen, China

六、贮存和使用条件 Storage and Use condition

6.1 贮存条件 Storage condition

6.1.1 建议贮存条件：温度 $-25^{\circ}\text{C} \sim 85^{\circ}\text{C}$ ，湿度 70% (Max.)

Recommended keeping conditions: $-25^{\circ}\text{C} \sim 85^{\circ}\text{C}$, 70%RH (Max.)

6.1.2 贮存期限：自生产之日起六个月内

Storage life : Within the limits of six months from being produced.

6.2 使用条件 Use condition

使用条件限制：温度 $-25^{\circ}\text{C} \sim 85^{\circ}\text{C}$ ，湿度 $\leq 90\%$

Use condition limit: $T=-25^{\circ}\text{C} \sim 85^{\circ}\text{C}$, $\text{RH} \leq 90\%$.