
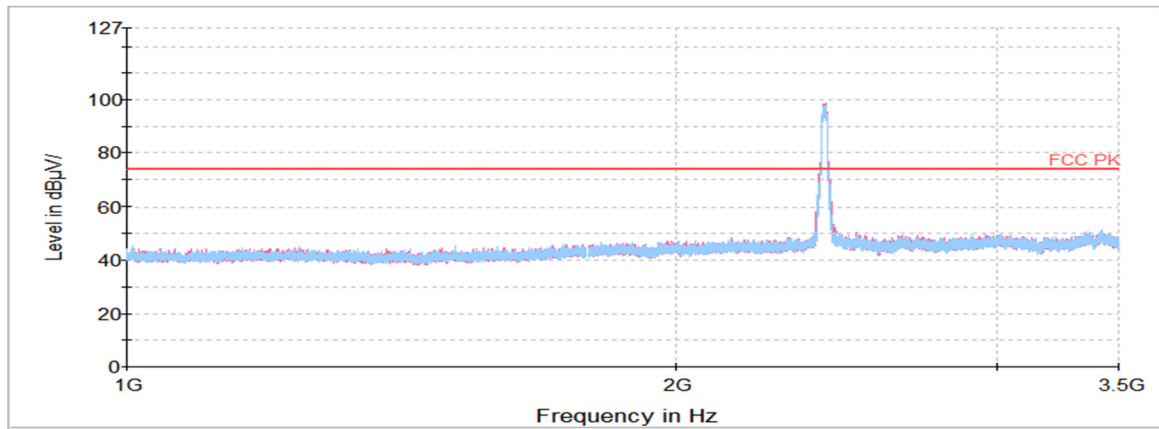
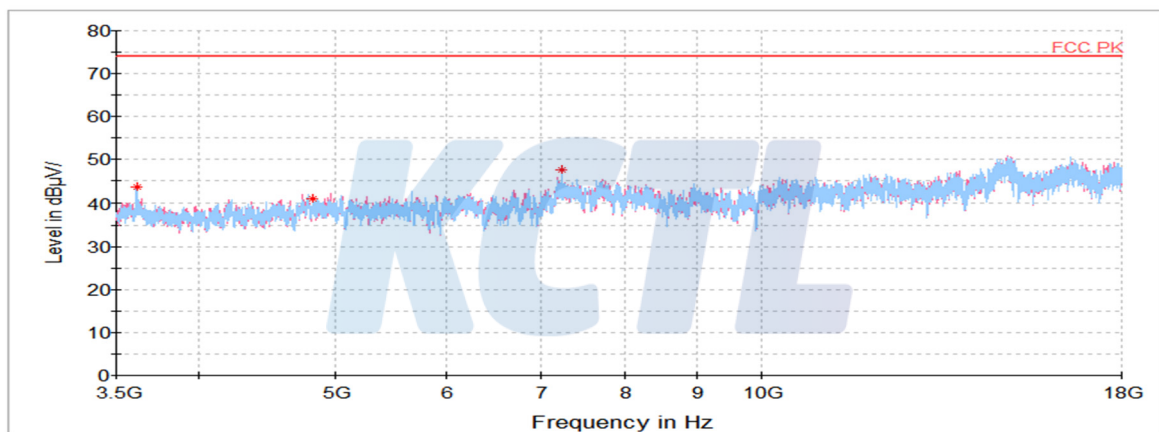
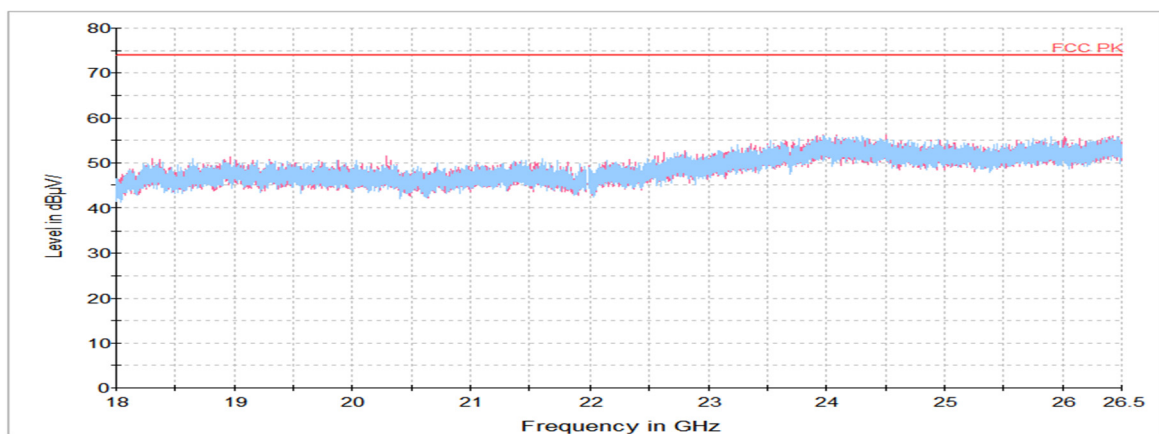
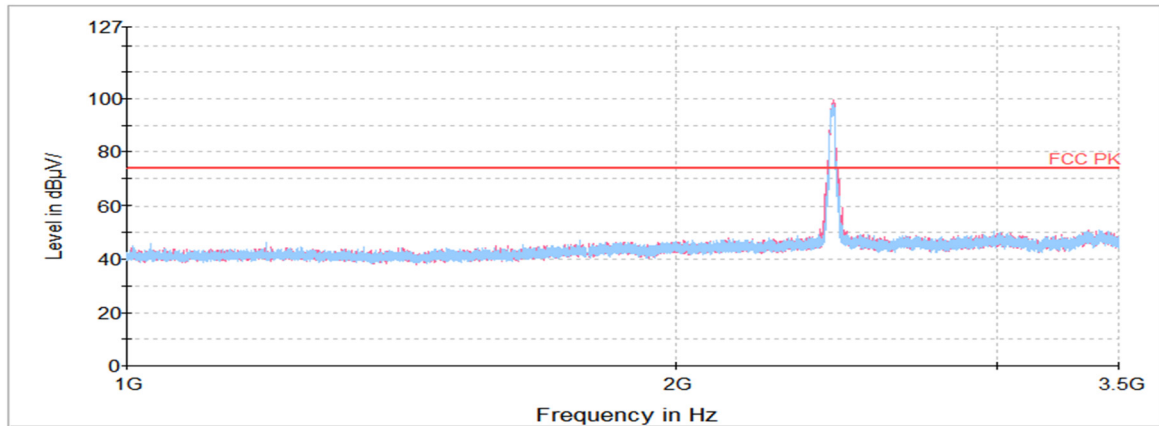
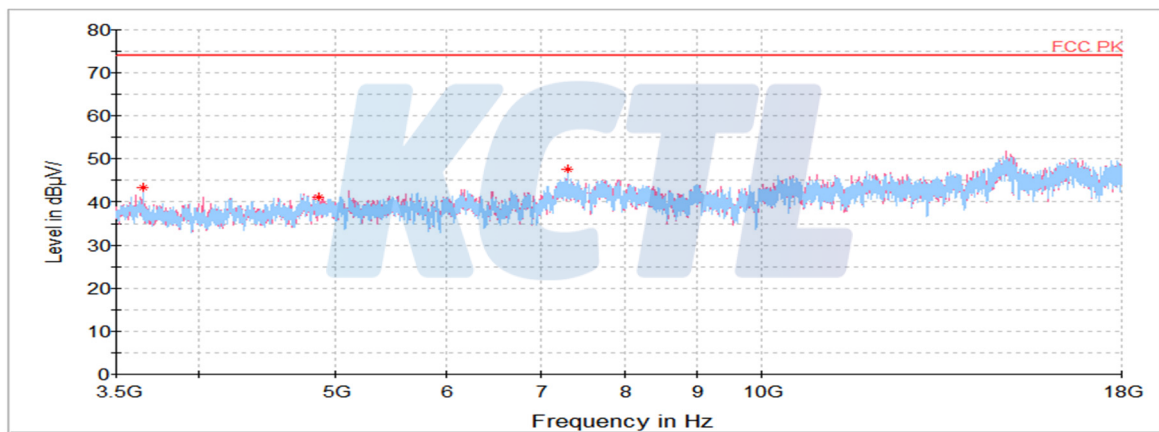


Horizontal/Vertical for 1 GHz ~ 3.5 GHz**Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

Middle Channel


Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB($\mu V/m$))	(dB($\mu V/m$))	(dB)
Peak data								
4 874.78 ¹⁾	H	61.27	33.95	-54.23	-	40.99	74.00	33.01
7 311.23 ¹⁾	H	63.57	35.40	-51.50	-	47.47	74.00	26.53
Average Data								
No spurious emissions were detected within 20 dB of the limit.								



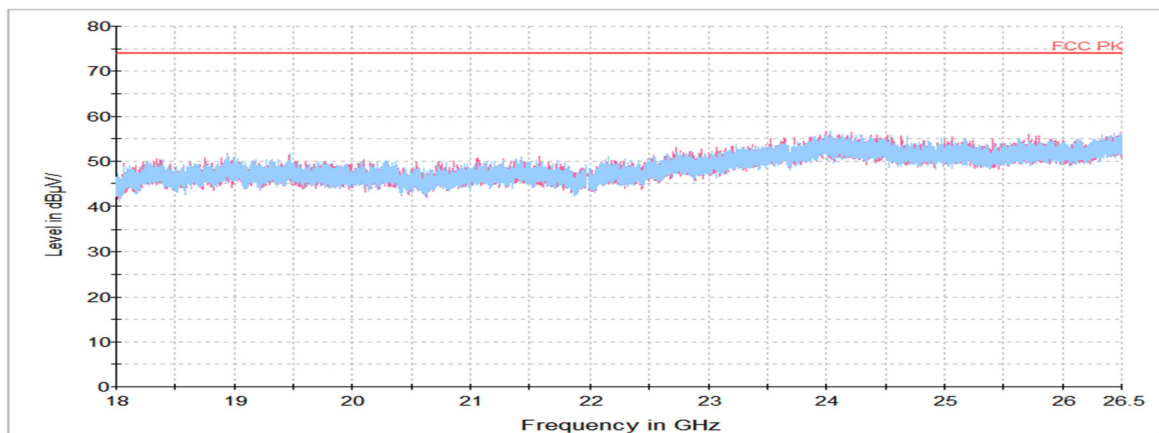


Horizontal/Vertical for 1 GHz ~ 3.5 GHz**Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

Highest Channel


Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μ V))	(dB)	(dB)	(dB)	(dB(μ V/m))	(dB(μ V/m))	(dB)
Peak data								
2 483.73 ¹⁾	V	50.89	32.07	-29.21	-	53.75	74.00	20.25
4 925.53 ¹⁾	H	60.14	33.97	-54.87	-	39.24	74.00	34.76
7 386.45 ¹⁾	V	63.57	35.40	-51.13	-	47.84	74.00	26.16
Average Data								
No spurious emissions were detected within 20 dB of the limit.								



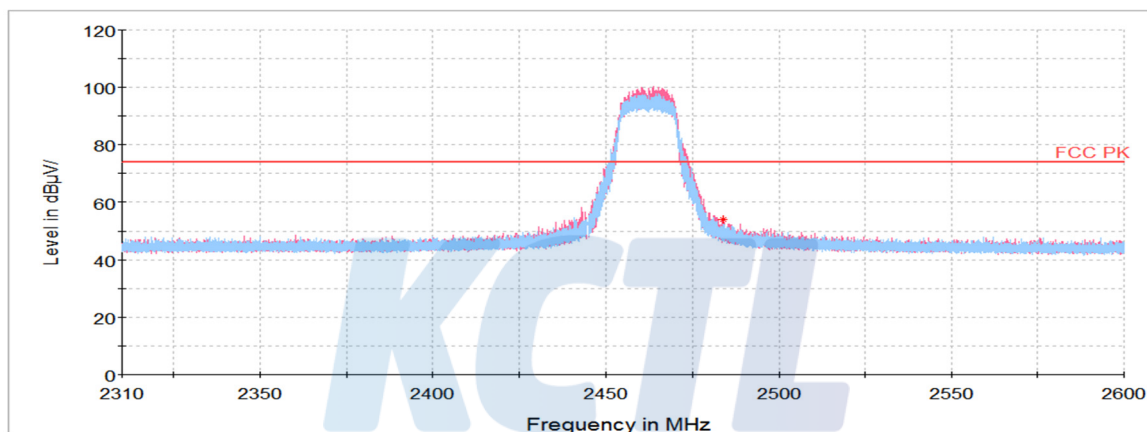
Horizontal/Vertical for Band-edge

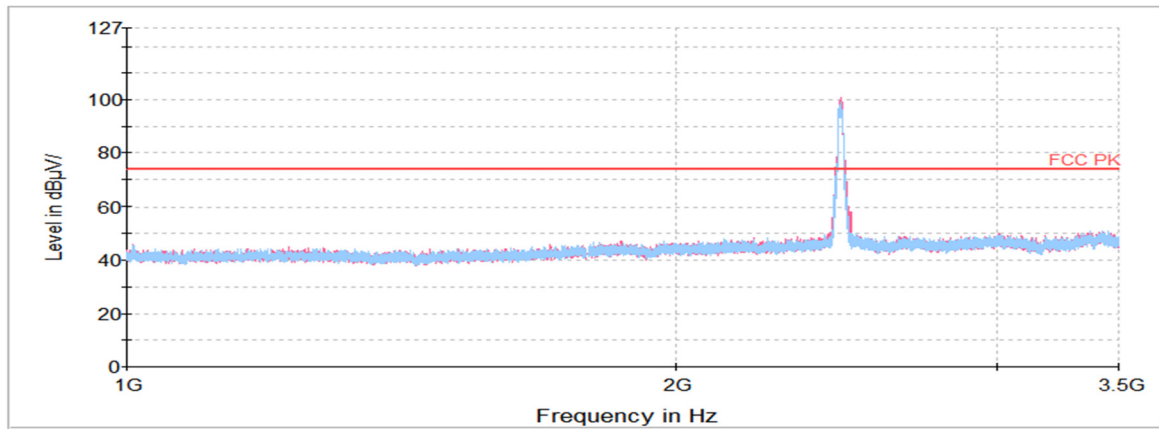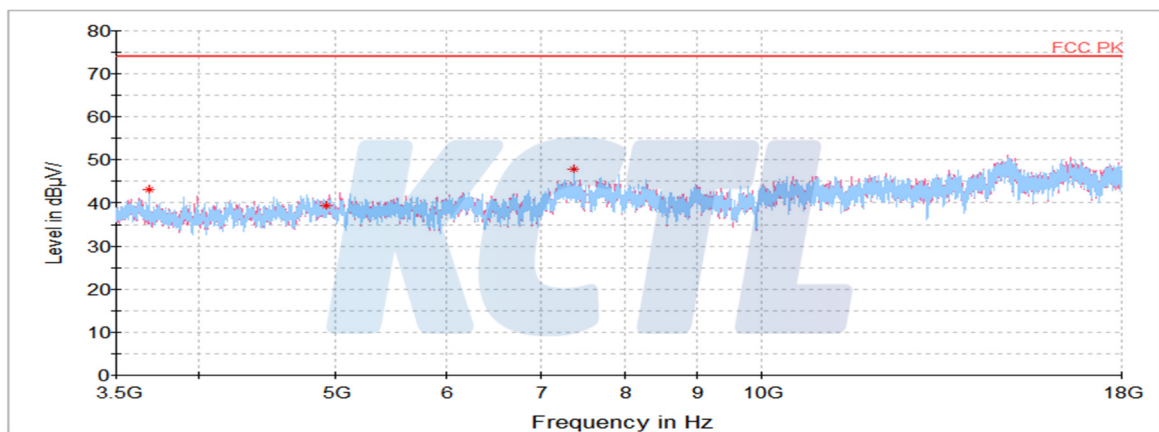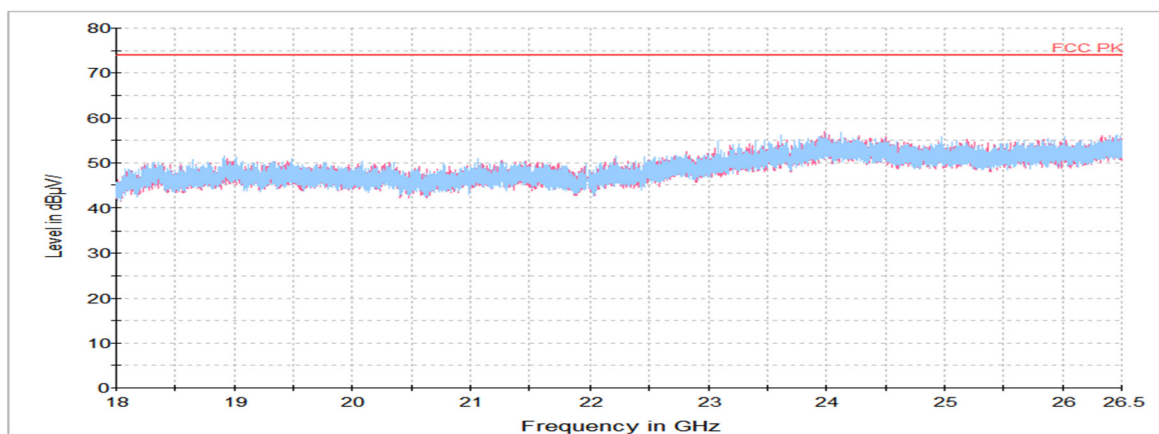Horizontal/Vertical for 1 GHz ~ 3.5 GHz**Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

802.11n HT20**Lowest Channel**

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μ V))	(dB)	(dB)	(dB)	(dB(μ V/m))	(dB(μ V/m))	(dB)
Peak data								
2 388.87 ¹⁾	V	48.94	31.88	-29.04	-	51.78	74.00	22.22
4 824.03 ¹⁾	V	59.95	33.93	-52.83	-	41.05	74.00	32.95
7 236.02	H	63.60	35.40	-51.87	-	47.13	74.00	26.87
Average Data								
No spurious emissions were detected within 20 dB of the limit.								



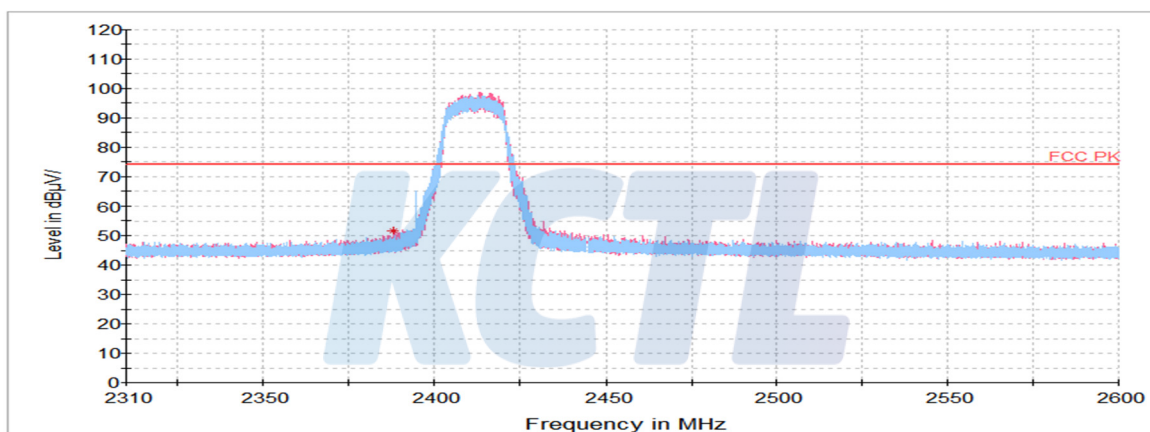
Horizontal/Vertical for Band-edge

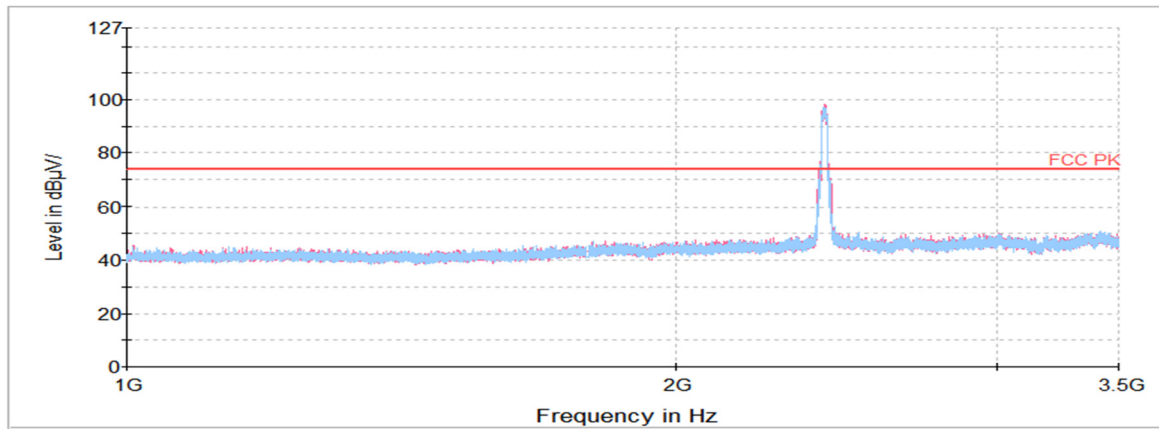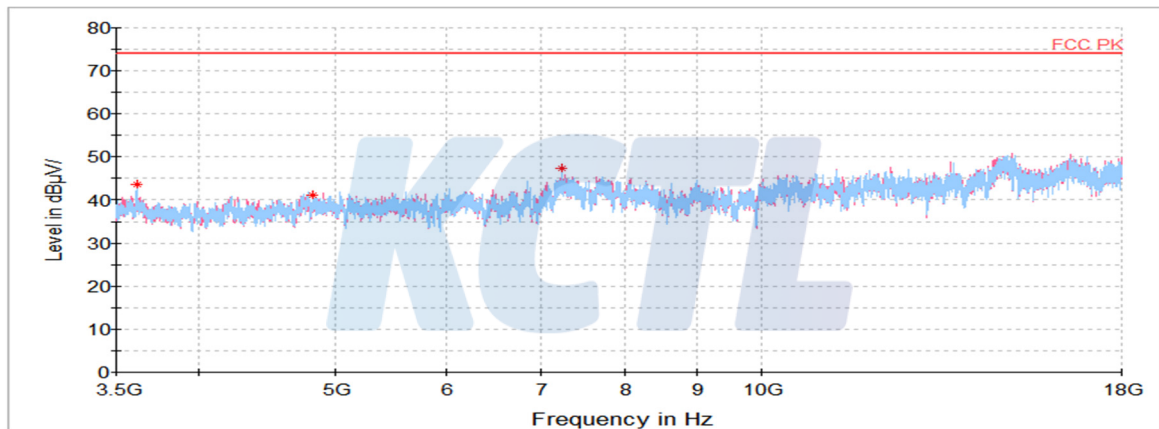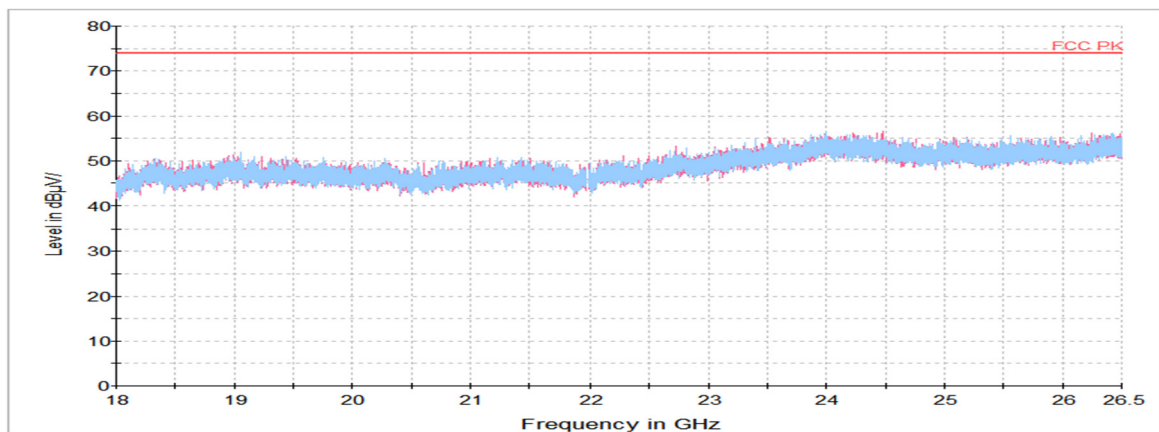Horizontal/Vertical for 1 GHz ~ 3.5 GHz**Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

Middle Channel


Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB($\mu V/m$))	(dB($\mu V/m$))	(dB)
Peak data								
4 875.69 ¹⁾	V	60.03	33.95	-54.25	-	39.73	74.00	34.27
7 310.78 ¹⁾	H	63.89	35.40	-51.50	-	47.79	74.00	26.21
Average Data								
No spurious emissions were detected within 20 dB of the limit.								




KCTL

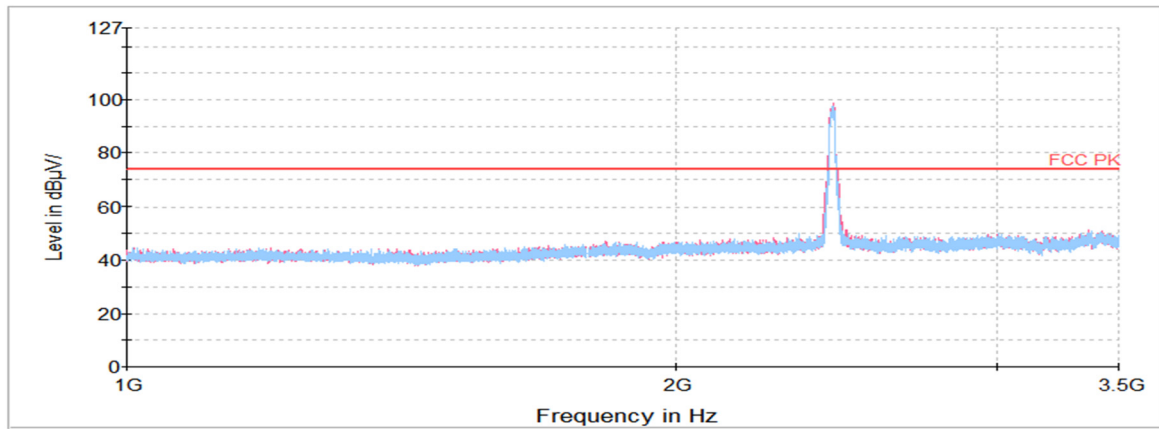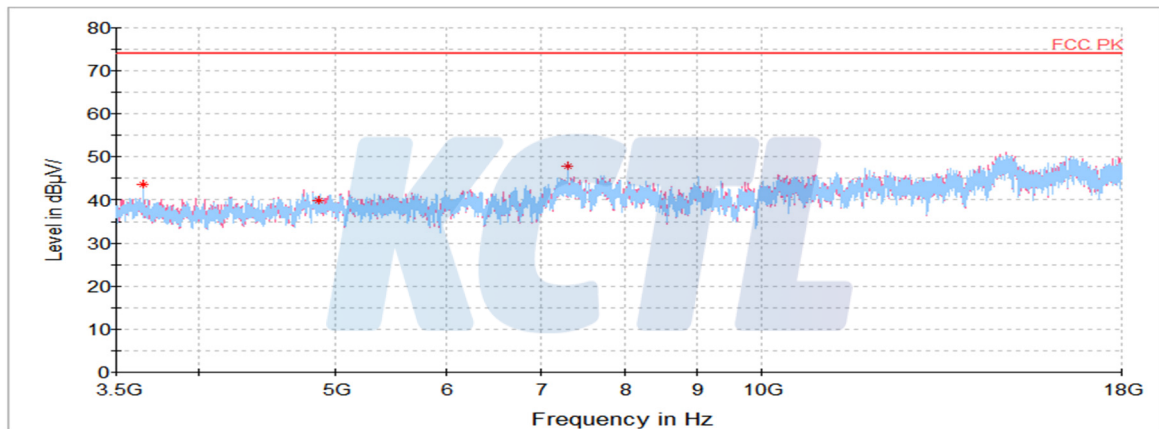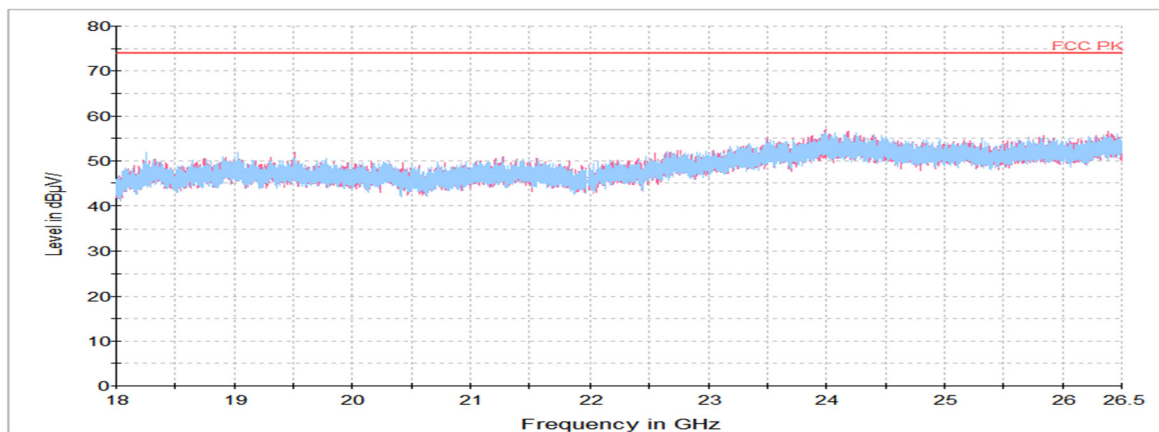Horizontal/Vertical for 1 GHz ~ 3.5 GHz**Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

Highest Channel


Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μ V))	(dB)	(dB)	(dB)	(dB(μ V/m))	(dB(μ V/m))	(dB)
Peak data								
2 483.81 ¹⁾	V	50.88	32.07	-29.21	-	53.74	74.00	20.26
4 984.89 ¹⁾	V	65.11	33.99	-54.76	-	44.34	74.00	29.66
7 386.00 ¹⁾	V	63.47	35.40	-51.13	-	47.74	74.00	26.26
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

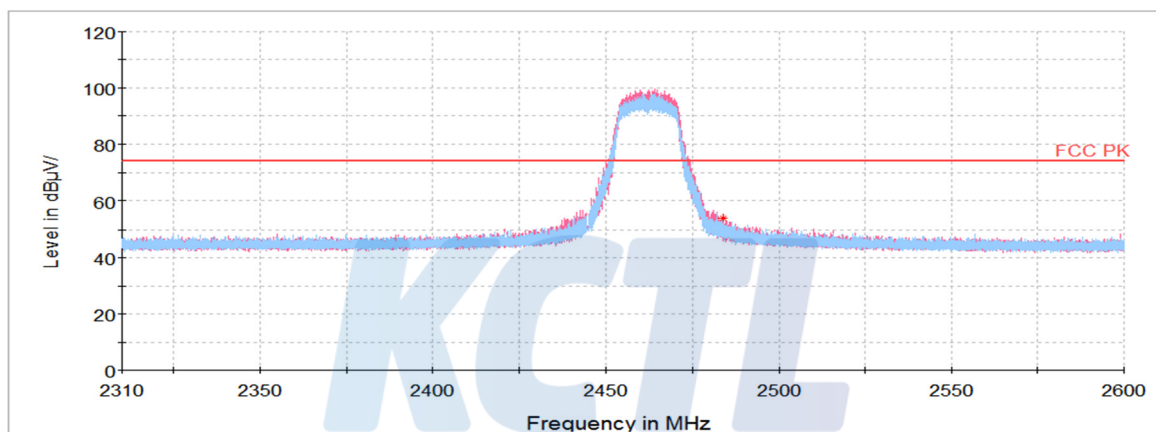Horizontal/Vertical for Band-edge

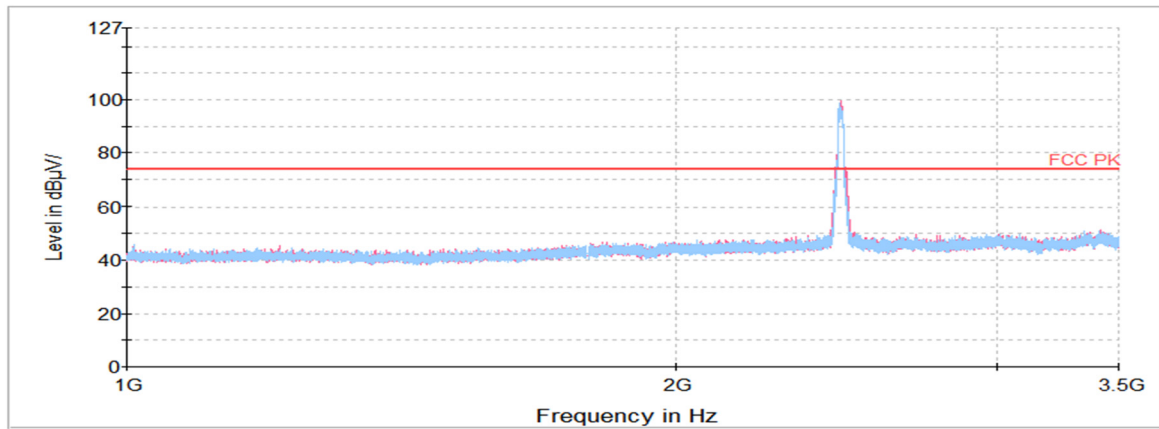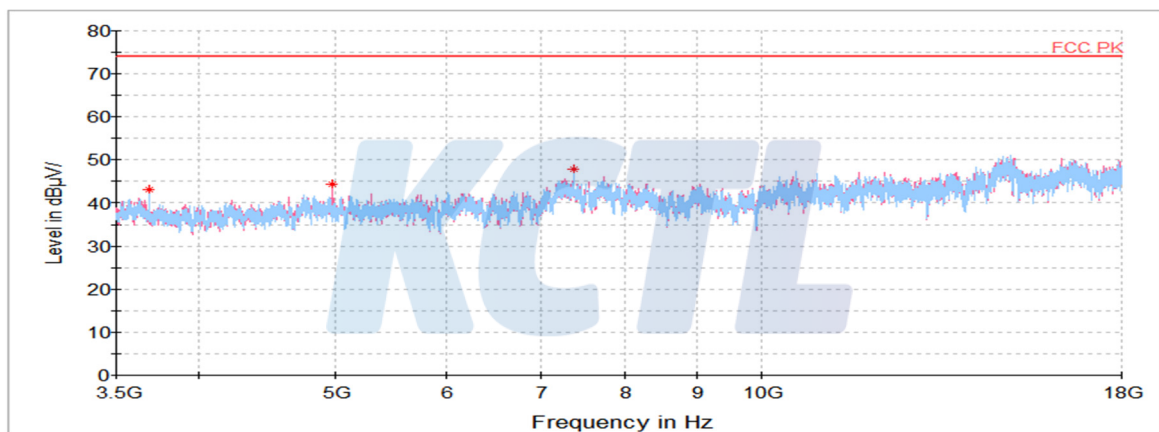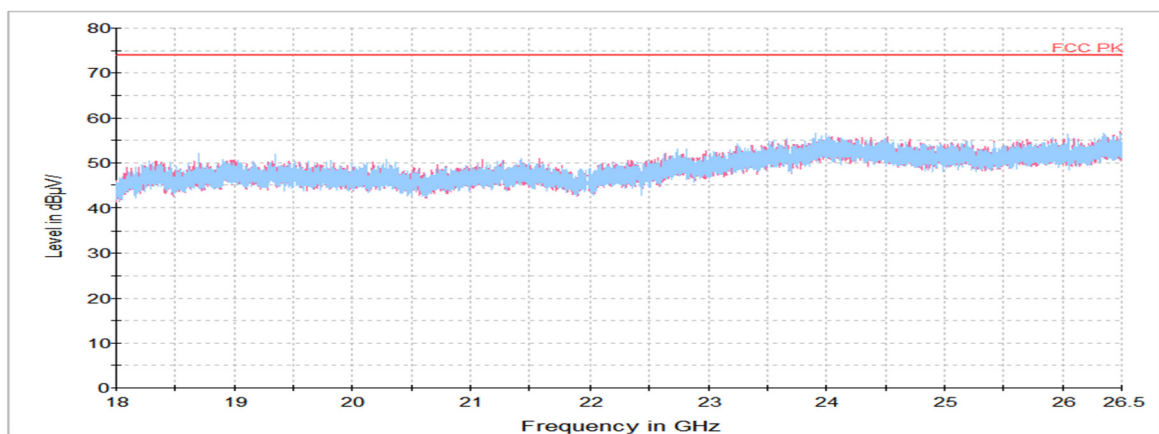Horizontal/Vertical for 1 GHz ~ 3.5 GHz**Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

7.5. Conducted Spurious Emission

Test setup



Limit

According to §15.247(d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operation, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation specified in §15.209(a) is not required. In addition, radiated emission limits specified in §15.209(a) (see §15.205(c)).

Limit : 20 dBc

Test procedure

ANSI C63.10-2013 - Section 11.11.3

Test settings

Set the spectrum analyzer as follows:

- 1) Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic.
Typically, several plots are required to cover this entire span.
- 2) RBW = 100 kHz
- 3) VBW ≥ RBW
- 4) Sweep = auto
- 5) Detector function = peak
- 6) Trace = max hold
- 7) Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded.
- 8) Each frequency found during preliminary measurements was re-examined and investigated. The test-receiver system was set up to average, peak, and quasi-peak detector function with specified bandwidth.

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SRF0077


Page (49) of (54)

KCTL


Test results

802.11b


Conducted band-edge / Low ch.

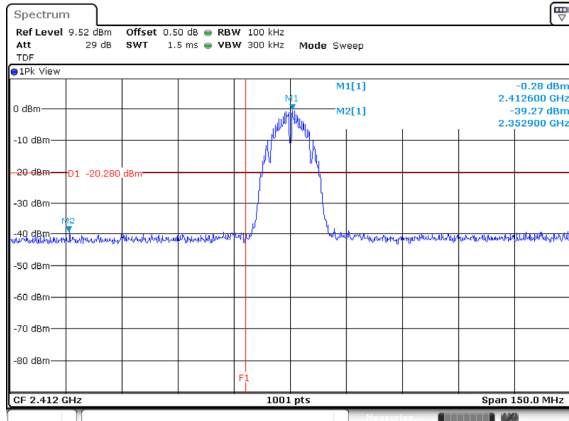

Conducted spurious / Low ch.

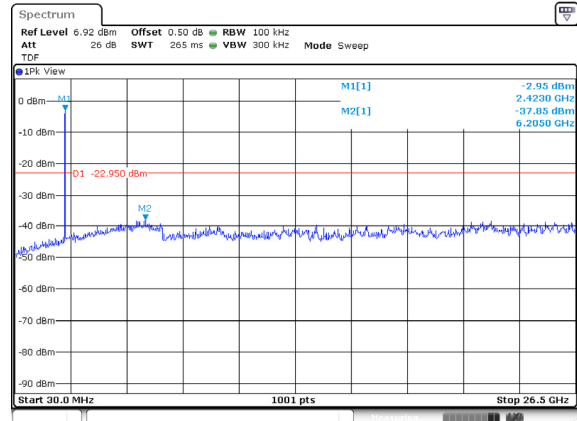


Conducted spurious / Mid ch.

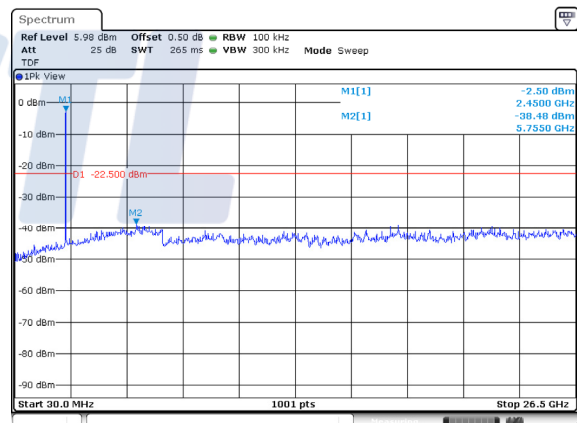


Blank

Conducted band-edge / High ch.

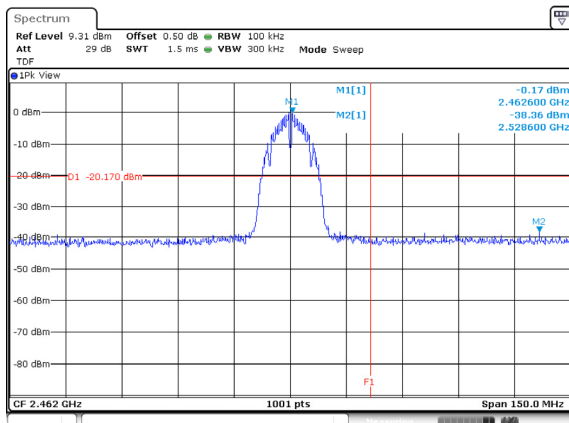

Conducted spurious / High ch.

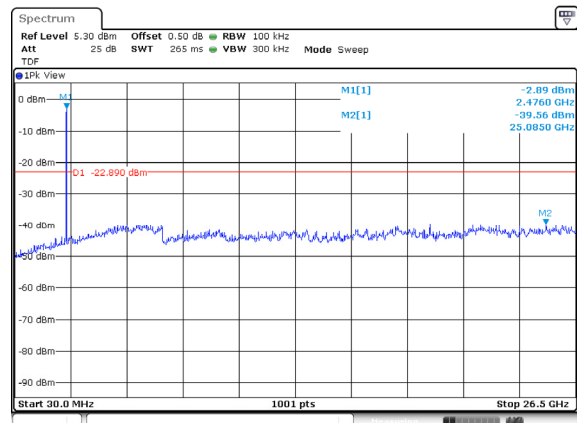

This test report shall not be reproduced, except in full, without the written approval

KCTL-TIR001-003/2

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR20-SRF0077

Page (50) of (54)


KCTL

802.11g


Conducted band-edge / Low ch.

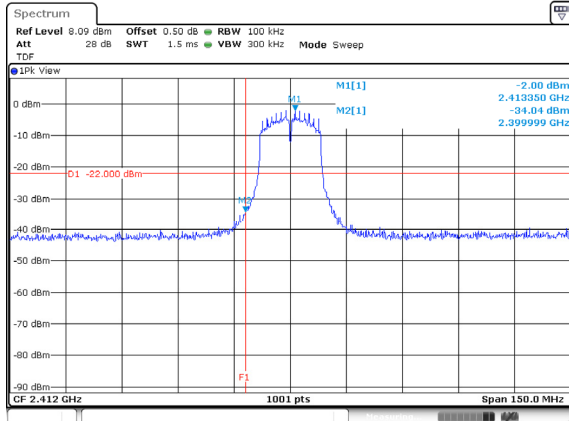

Conducted spurious / Low ch.

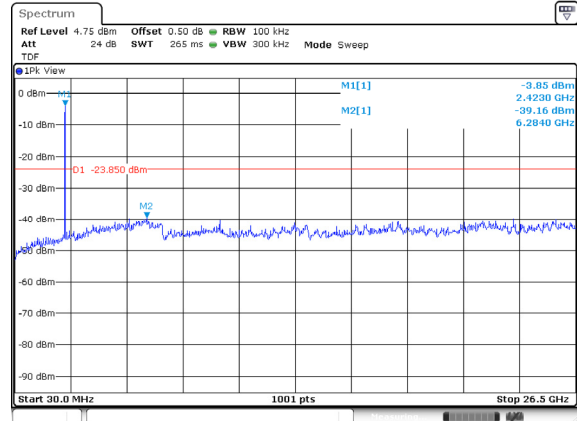


Conducted spurious / Mid ch.

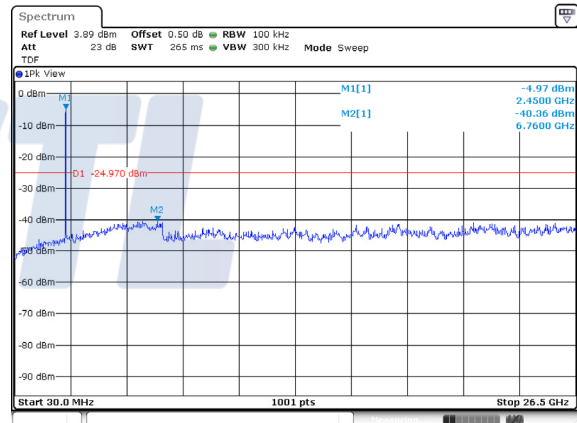

Blank

Conducted band-edge / High ch.

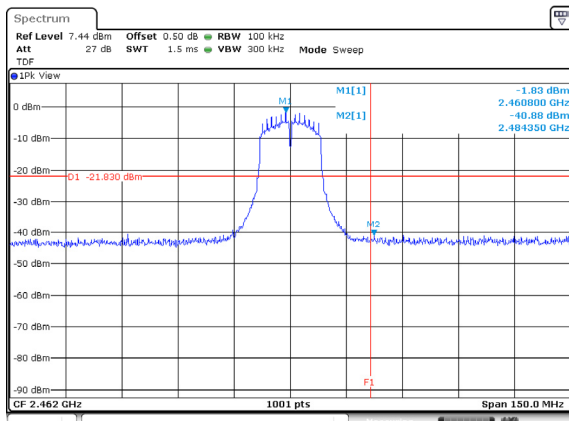

Conducted spurious / High ch.

