

FCC Test Report

APPLICANT : OnePlus Technology (shenzhen) Co., Ltd
EQUIPMENT : Smart Phone
BRAND NAME : ONEPLUS
MODEL NAME : ONEPLUS A6013
FCC ID : 2ABZ2-A6013
STANDARD : FCC CFR Title 47 Part 15 Subpart B
CLASSIFICATION : Certification

The product was received on Jul. 10, 2018 and testing was completed on Aug. 15, 2018. We, Sporton International (Shenzhen) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Shenzhen) Inc., the test report shall not be reproduced except in full.



Approved by: Eric Shih / Manager



Sporton International (Shenzhen) Inc.

**1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan Shenzhen City
Guangdong Province 518055 China**



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1. GENERAL DESCRIPTION	5
1.1. Applicant.....	5
1.2. Manufacturer	5
1.3. Product Feature of Equipment Under Test	5
1.4. Product Specification of Equipment Under Test	6
1.5. Modification of EUT	7
1.6. Test Location	8
1.7. Applicable Standards	8
2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1. Test Mode	9
2.2. Connection Diagram of Test System	10
2.3. Support Unit used in test configuration and system	11
2.4. EUT Operation Test Setup	12
3. TEST RESULT	13
3.1. Test of AC Conducted Emission Measurement	13
3.2. Test of Radiated Emission Measurement	18
4. LIST OF MEASURING EQUIPMENT	24
5. UNCERTAINTY OF EVALUATION	25
APPENDIX A. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FC871004-01	Rev. 01	Initial issue of report	Sep. 05, 2018



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 13.44 dB at 13.560 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 6.88 dB at 57.160 MHz for Quasi-Peak

1. General Description

1.1. Applicant

OnePlus Technology (shenzhen) Co., LTD

18C02, 18C03, 18C04 and 18C05, Shum Yip Terra Building, Binhe Avenue North, Futian District, Shenzhen

1.2. Manufacturer

OnePlus Technology (shenzhen) Co., Ltd

18C02, 18C03, 18C04 and 18C05, Shum Yip Terra Building, Binhe Avenue North, Futian District, Shenzhen

1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	Smart Phone
Brand Name	ONEPLUS
Model Name	ONEPLUS A6013
FCC ID	2ABZ2-A6013
EUT supports Radios application	CDMA/EV-DO/GSM/GPRS/EGPRS/WCDMA/HSPA/ DC-HSDPA/HSPA+/LTE/NFC WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 2.4GHz 802.11ac VHT20/VHT40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE
IMEI Code	Conduction: 865208040070206 Radiation: 865208040070271
HW Version	34
SW Version	ONEPLUS A6013_34_180810
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4. Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band IV : 1712.4 MHz ~ 1752.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz LTE Band 2 : 1850.7 MHz ~ 1909.3 MHz LTE Band 4 : 1710.7 MHz ~ 1754.3 MHz LTE Band 5 : 824.7 MHz ~ 848.3 MHz LTE Band 7 : 2502.5 MHz ~ 2567.5 MHz LTE Band 12 : 699.7 MHz ~ 715.3 MHz LTE Band 13 : 779.5 MHz ~ 784.5 MHz LTE Band 17 : 706.5 MHz ~ 713.5 MHz LTE Band 25 : 1850.7 MHz ~ 1914.3 MHz LTE Band 26 : 814.7 MHz ~ 848.3 MHz LTE Band 30 : 2307.5 MHz ~ 2312.5 MHz LTE Band 38 : 2572.5 MHz ~ 2617.5 MHz LTE Band 41 : 2498.5 MHz ~ 2687.5 MHz LTE Band 66 : 1710.7 MHz ~ 1779.3 MHz LTE Band 71: 665.5 MHz ~ 695.5MHz CDMA2000 BC0: 824.70 MHz ~ 848.31 MHz CDMA2000 BC1: 1851.25 MHz ~ 1908.75 MHz 802.11b/g/n/ac: 2412 MHz ~ 2462 MHz 802.11a/n/ac: 5180 MHz ~ 5240 MHz; 5260 MHz ~ 5320 MHz; 5500 MHz ~ 5720 MHz 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC : 13.56 MHz
Rx Frequency	GSM850: 869.2 MHz ~ 893.8 MHz GSM1900: 1930.2 MHz ~ 1989.8 MHz WCDMA Band V: 871.4 MHz ~ 891.6 MHz WCDMA Band IV : 2112.4 MHz ~ 2152.6 MHz WCDMA Band II: 1932.4 MHz ~ 1987.6 MHz LTE Band 2 : 1930.7 MHz ~ 1989.3 MHz LTE Band 4 : 2110.7 MHz ~ 2154.3 MHz LTE Band 5 : 869.7 MHz ~ 893.3 MHz LTE Band 7 : 2622.5 MHz ~ 2687.5 MHz LTE Band 12 : 729.7 MHz ~ 745.3 MHz LTE Band 13 : 748.5 MHz ~ 753.5 MHz LTE Band 17 : 736.5 MHz ~ 743.5 MHz LTE Band 25 : 1930.7 MHz ~ 1994.3 MHz LTE Band 26 : 859.7 MHz ~ 893.3 MHz LTE Band 29 : 718.5 MHz ~ 726.5 MHz LTE Band 30 : 2352.5 MHz ~ 2357.5 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz LTE Band 41 : 2498.5 MHz ~ 2687.5 MHz LTE Band 46 : 5160 MHz ~ 5915 MHz LTE Band 66 : 2110.7 MHz~ 2199.3 MHz LTE Band 71: 619.5 MHz ~ 649.5MHz CDMA2000 BC0: 869.70 MHz ~ 893.31 MHz CDMA2000 BC1: 1931.25 MHz ~ 1988.75 MHz

	802.11b/g/n/ac: 2412 MHz ~ 2462 MHz 802.11a/n/ac: 5180 MHz ~ 5240 MHz; 5260 MHz ~ 5320 MHz; 5500 MHz ~ 5720 MHz 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz GNSS : 1559 MHz ~ 1610 MHz NFC : 13.56 MHz
Antenna Type	WWAN : PIFA Antenna WLAN : PIFA Antenna Bluetooth : PIFA Antenna GNSS: PIFA Antenna NFC : LOOP Antenna
Type of Modulation	GSM: GMSK GPRS: GMSK EDGE(MCS 0-4): GMSK / (MCS 5-9): 8PSK WCDMA : BPSK (Uplink) HSDPA/DC-HSDPA : QPSK (Uplink) HSUPA : QPSK (Uplink) HSPA+ : 16QAM DC-HSDPA : 64QAM LTE: QPSK / 16QAM / 64QAM CDMA2000 1xRTT: QPSK CDMA2000 1xEV-DO: QPSK/8PSK 802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11a/g/n/ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) Bluetooth LE : GFSK Bluetooth (1Mbps) : GFSK Bluetooth (2Mbps) : $\pi/4$ -DQPSK Bluetooth (3Mbps) : 8-DPSK GNSS : BPSK NFC: ASK

1.5. Modification of EUT

No modifications are made to the EUT during all test items.

1.6. Test Location

Sporton International (Shenzhen) Inc. is accredited to ISO 17025 by National Voluntary Laboratory Accreditation Program (NVLAP code: 600156-0) and the FCC designation No. are CN5018 and CN5019.

Test Site	Sporton International (Shenzhen) Inc.	
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan Shenzhen City Guangdong Province 518055 China TEL: +86-755-8637-9589 FAX: +86-755-8637-9595	
Test Site No.	Sporton Site No.	FCC Test Firm Registration No.
	CO01-SZ	337463

Test Site	Sporton International (Shenzhen) Inc.	
Test Site Location	No. 3 Bldg the third floor of south, Shahe River west, Fengzeyuan Warehouse, Nanshan District Shenzhen City Guangdong Province 518055 China TEL: +86-755-3320-2398	
Test Site No.	Sporton Site No.	FCC Test Firm Registration No.
	03CH04-SZ	577730

1.7. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC CFR Title 47 Part 15 Subpart B
- ♦ ANSI C63.4-2014

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

2. Test Configuration of Equipment Under Test


2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

Test Items	Function Type
AC Conducted Emission	Mode 1: GSM850 Idle + Bluetooth Idle + WLAN (2.4G) Idle + Camera(Rear) + USB Cable (Charging from Adapter)
	Mode 2: GSM1900 Idle + Bluetooth Idle + WLAN (5G) Idle + Camera(Front) + USB Cable (Charging from Adapter)
	Mode 3: WCDMA Band V Idle + Bluetooth Idle + WLAN (2.4G) Idle + MPEG4(Colur bar) + USB Cable (Charging from Adapter)
	Mode 4: LTE Band 2 Idle + Bluetooth Idle + WLAN (5G) Idle + NFC ON + USB Cable(Charging from Adapter)
	Mode 5: LTE Band 4 Idle + Bluetooth Idle + WLAN (2.4G) Idle + GNSS RX + USB Cable (Charging from Adapter1)
	Mode 6: USB Cable (Data Link with Notebook) + Bluetooth Idle + WLAN (5G) Idle
Radiated Emissions	Mode 1: GSM850 Idle + Bluetooth Idle + WLAN (2.4G) Idle + Camera(Rear) + USB Cable (Charging from Adapter)
	Mode 2: GSM1900 Idle + Bluetooth Idle + WLAN (5G) Idle + Camera(Front) + USB Cable (Charging from Adapter)
	Mode 3: WCDMA Band V Idle + Bluetooth Idle + WLAN (2.4G) Idle + MPEG4(Colur bar) + USB Cable (Charging from Adapter)
	Mode 4: LTE Band 2 Idle + Bluetooth Idle + WLAN (5G) Idle + NFC ON + USB Cable(Charging from Adapter)
	Mode 5: LTE Band 4 Idle + Bluetooth Idle + WLAN (2.4G) Idle + GNSS RX + USB Cable (Charging from Adapter1)
	Mode 6: USB Cable (Data Link with Notebook) + Bluetooth Idle + WLAN (5G) Idle
	Mode 7: GSM1900 Idle + Bluetooth Idle + WLAN (5G) Idle + type C to earphone cable + Battery + Earphone
Remark: 1. The worst case of AC is mode 4; only the test data of this mode is reported. 2. The worst case of RE is mode 2; only the test data of this mode is reported. 3. Data Link with Notebook means data application transferred mode between EUT and Notebook.	

2.2.Connection Diagram of Test System

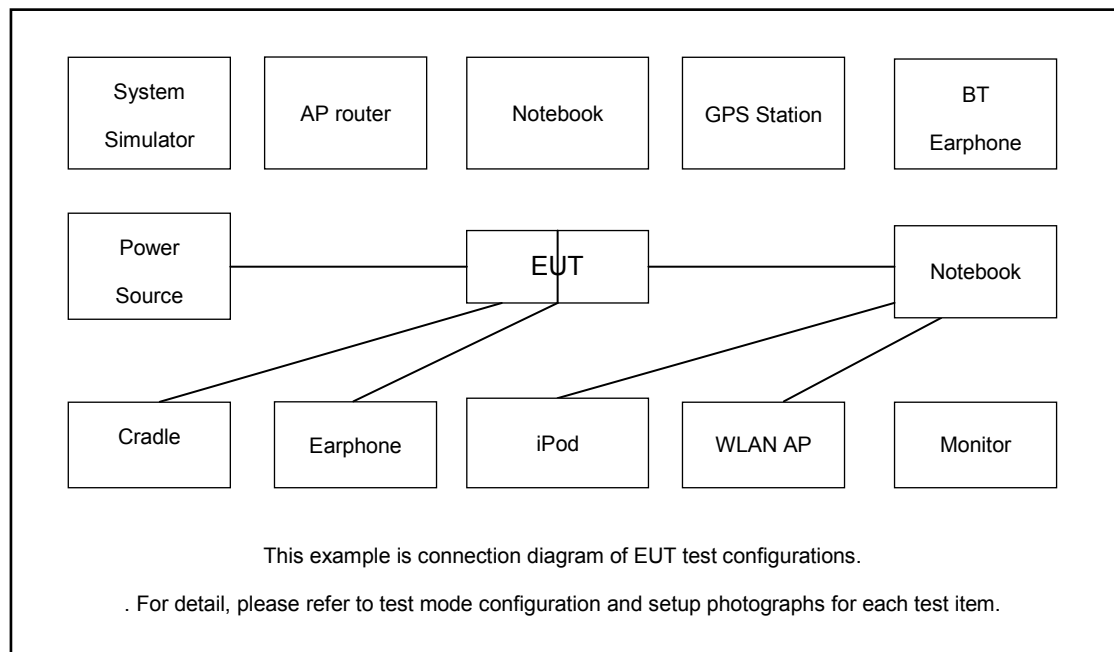

2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8m
2.	GNSS Station	RACELOGIC	18645	N/A	N/A	Unshielded, 1.8m
3.	GNSS Station r	RACELOGIC	RLLS03-2P	Fcc DoC	N/A	Unshielded, 1.8m
4.	WLAN AP	D-Link	DIR-820L	KA2IR820LA1	N/A	Unshielded, 1.8m
5.	WLAN AP	Netcore	NW616	N/A	N/A	Unshielded, 1.8m with Core
6.	Bluetooth Earphone	Samsung	EO-MG900	N/A	N/A	N/A
7.	Bluetooth Earphone	Samsung	HS3000	A3LHS3000	N/A	N/A
8.	Notebook	Lenovo	E540	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
9.	Notebook	DELL	VOSTRO 1440	Fcc DoC	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
10.	SD Card	N/A	MicroSD HC	FCC DoC	N/A	N/A
11.	iPod	Apple	MC69029/A	N/A	Shielded, 1.0m	N/A
12.	iPod	Apple	MC525 ZP/A	N/A	Shielded, 1.0m	N/A

2.4. EUT Operation Test Setup

The EUT was in GSM or WCDMA or LTE idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Data application is transferred between notebook and EUT via USB cable.
2. Turn on GNSS function to make the EUT receive continuous signals from GNSS station.
3. Turn on camera to capture images.
4. Turn on MPEG4 function.
5. Turn on NFC function.

3. Test Result

3.1. Test of AC Conducted Emission Measurement

3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

<Class B Limit>

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

3.1.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.1.4 Test Setup


For Mode 1~5:

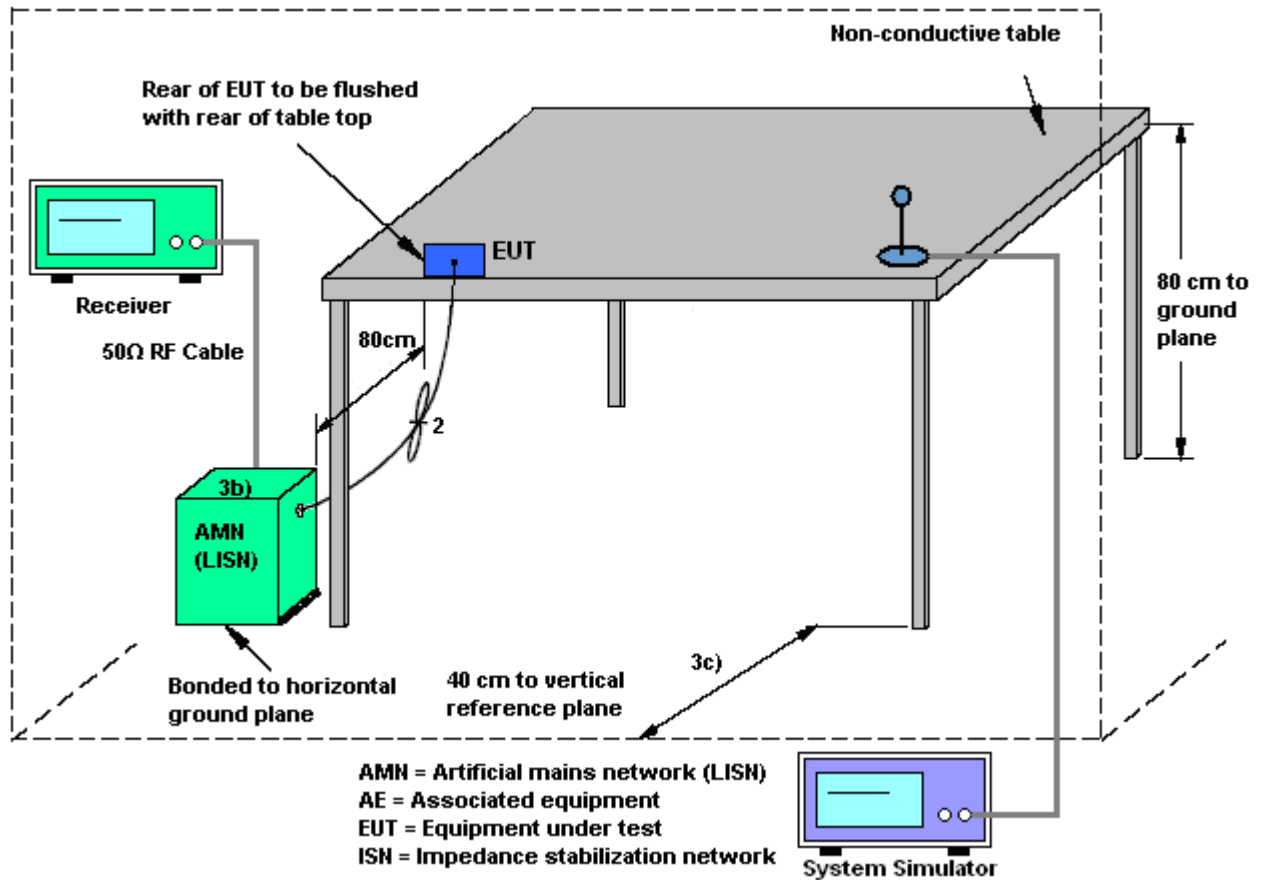

For Mode 6

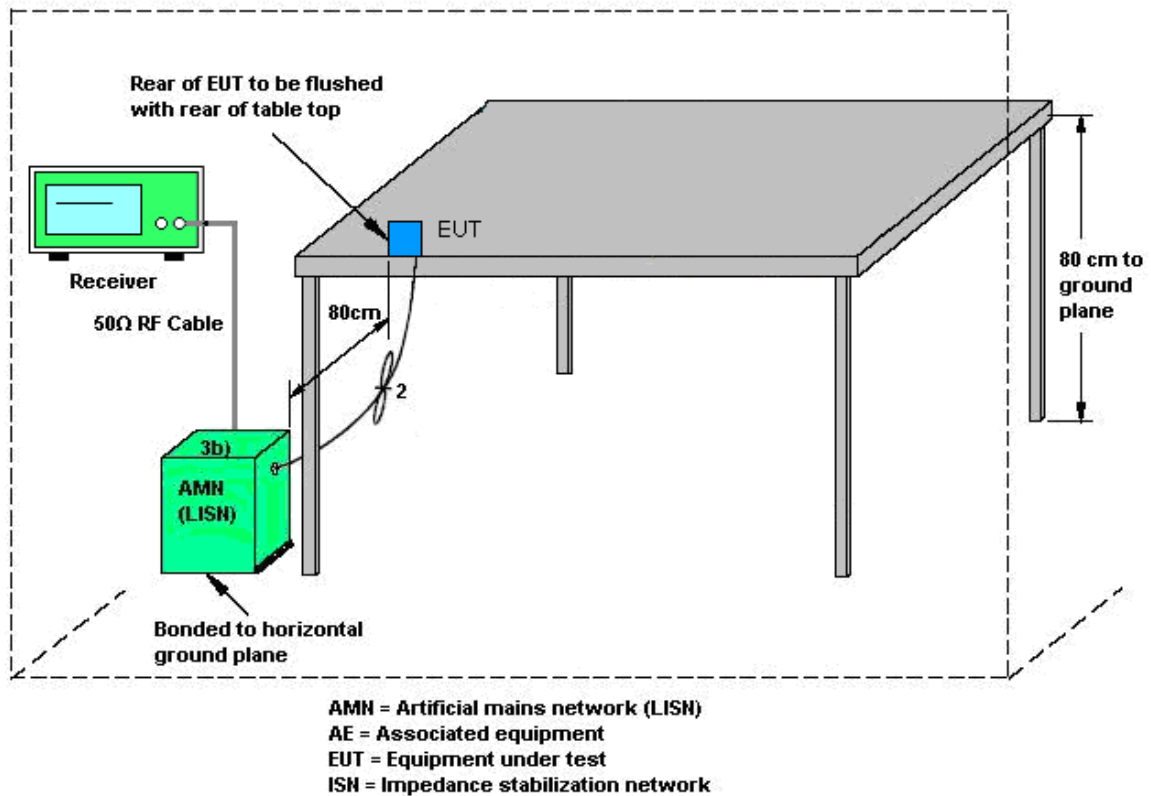


3.1.5 Test Result of AC Conducted Emission

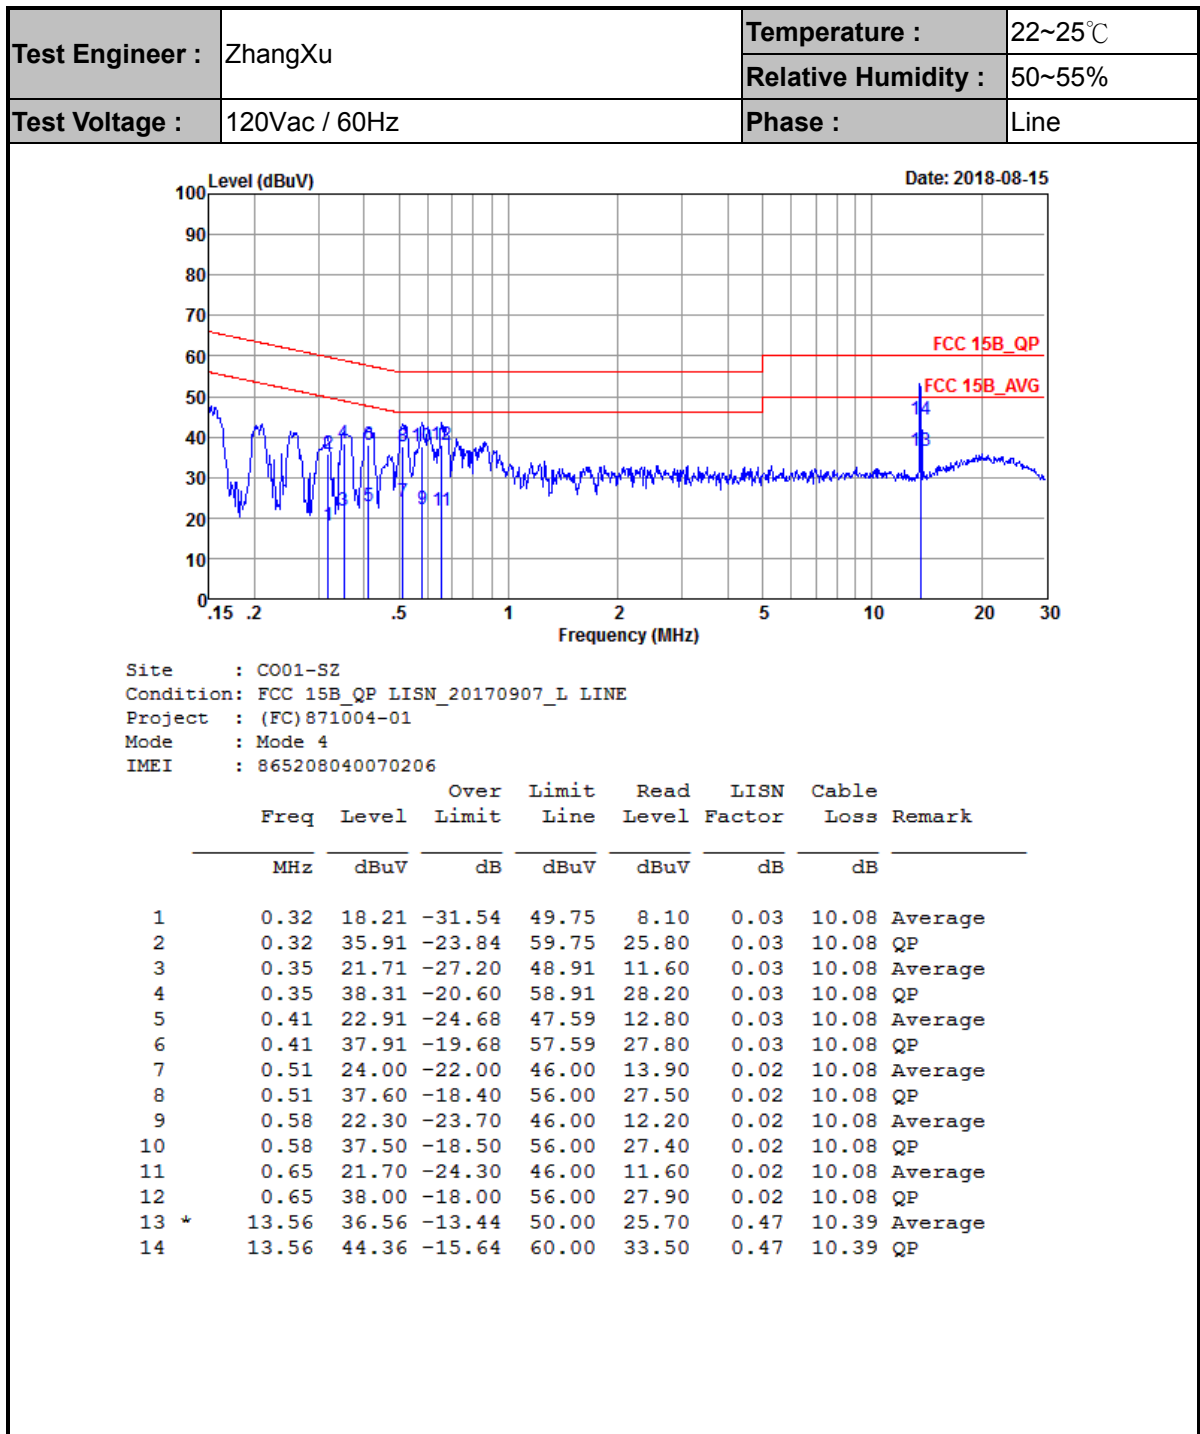



Test Engineer :	ZhangXu	Temperature :	22~25℃
		Relative Humidity :	50~55%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral

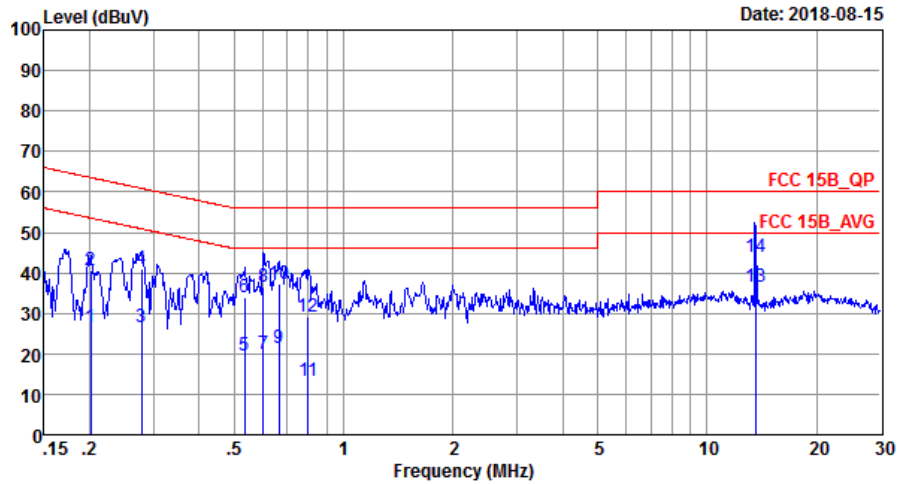

Site : C001-SZ
Condition: FCC 15B_QP LISN_20170907_N NEUTRAL
Project : (FC)871004-01
Mode : Mode 4
IMEI : 865208040070206

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.20	26.60	-26.94	53.54	16.50	0.03	10.07	Average
2	0.20	40.60	-22.94	63.54	30.50	0.03	10.07	QP
3	0.28	26.71	-24.19	50.90	16.60	0.03	10.08	Average
4	0.28	41.01	-19.89	60.90	30.90	0.03	10.08	QP
5	0.53	19.70	-26.30	46.00	9.60	0.02	10.08	Average
6	0.53	34.00	-22.00	56.00	23.90	0.02	10.08	QP
7	0.60	20.10	-25.90	46.00	10.00	0.02	10.08	Average
8	0.60	36.40	-19.60	56.00	26.30	0.02	10.08	QP
9	0.66	21.50	-24.50	46.00	11.40	0.02	10.08	Average
10	0.66	37.30	-18.70	56.00	27.20	0.02	10.08	QP
11	0.80	13.11	-32.89	46.00	3.00	0.03	10.08	Average
12	0.80	29.21	-26.79	56.00	19.10	0.03	10.08	QP
13 *	13.56	36.38	-13.62	50.00	25.70	0.29	10.39	Average
14	13.56	43.98	-16.02	60.00	33.30	0.29	10.39	QP

3.2. Test of Radiated Emission Measurement

3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

<Class B Limit>

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2. Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.2.3. Test Procedures

1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dB μ V/m) = 20 log Emission level (μ V/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level


3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

For Mode 1~5, 7

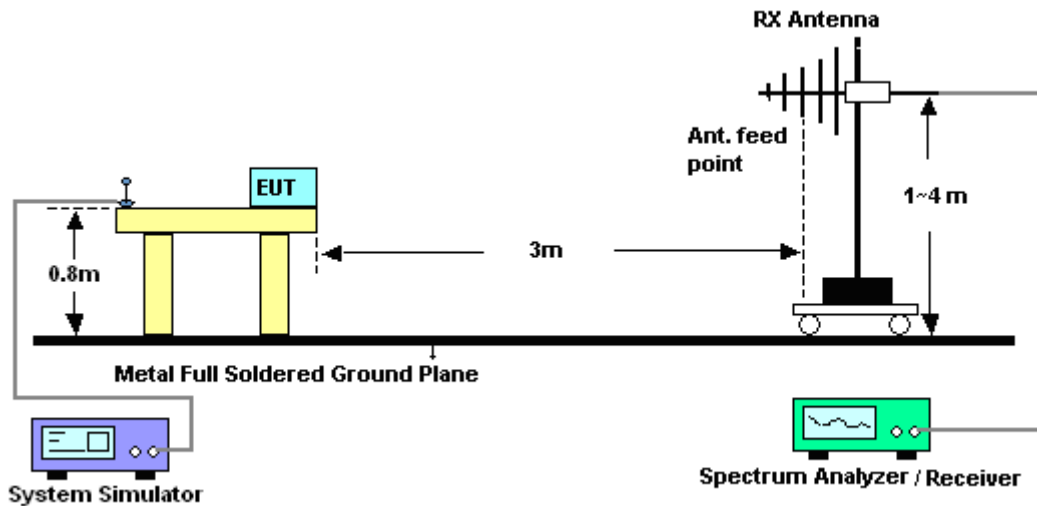


For Mode 6

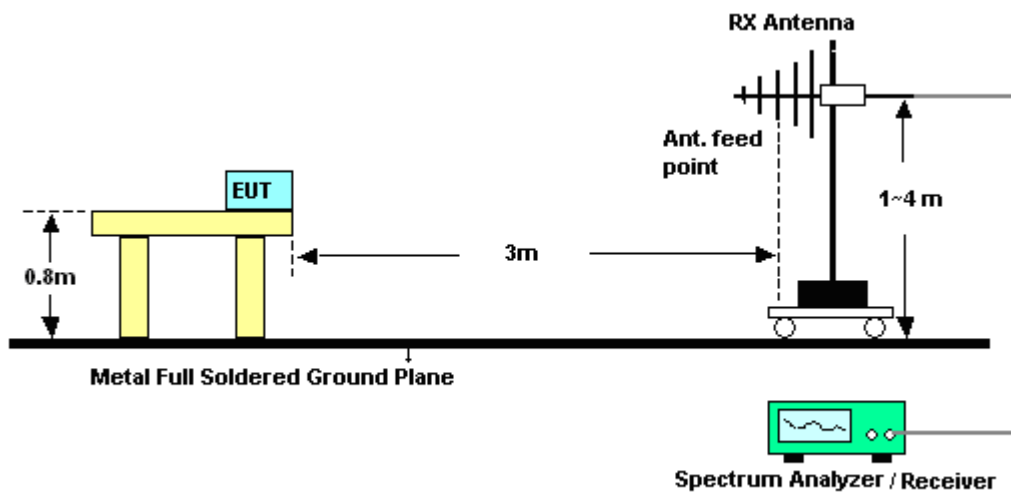


For radiated emissions above 1GHz

For Mode 1~5, 7

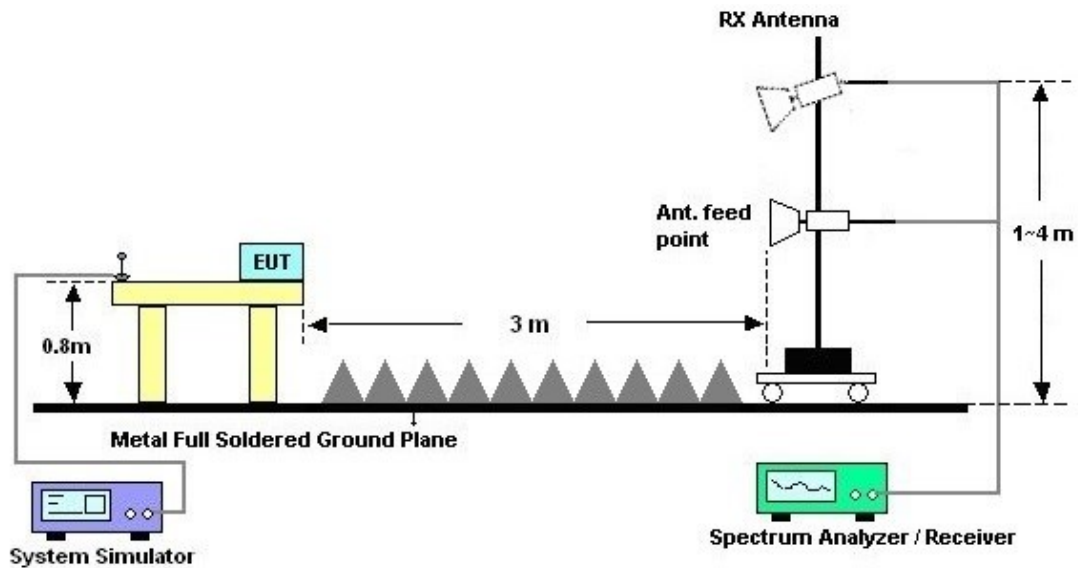


For Mode 6

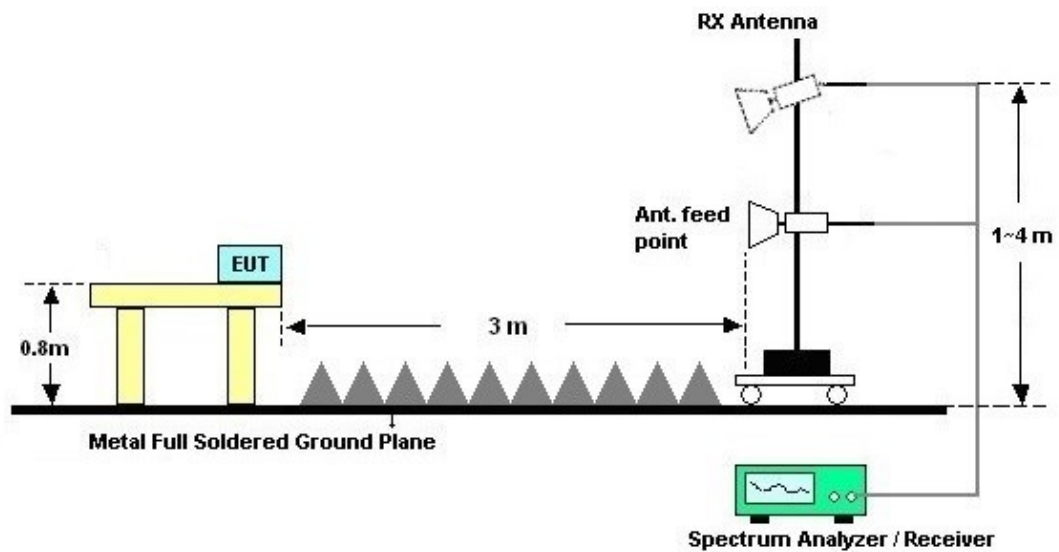



3.2.5. Test Result of Radiated Emission

Test Engineer :	Fuquan	Temperature :	24~25°C
		Relative Humidity :	48~49%
Test Distance :	3m	Polarization :	Horizontal
Remark :	#8 is system simulator signal which can be ignored.		

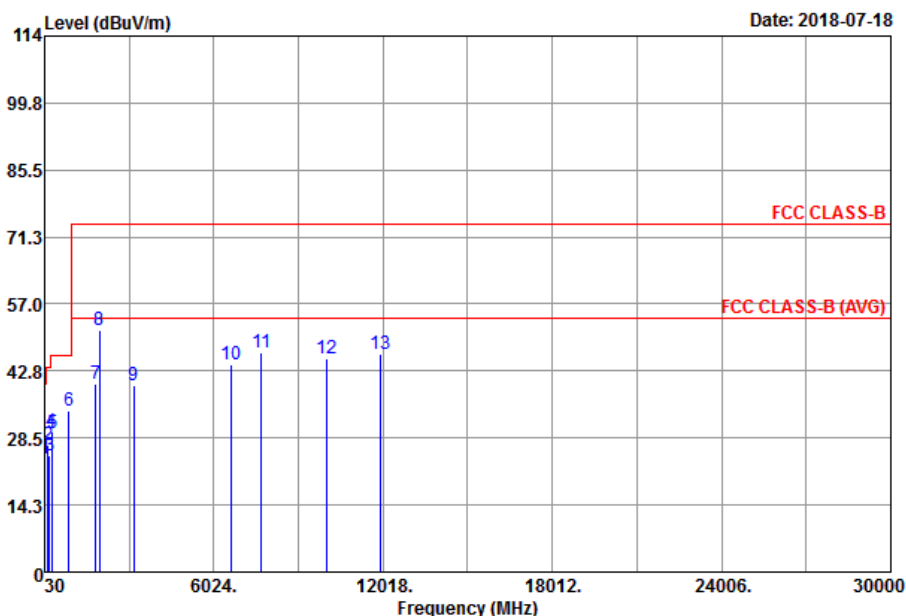


Site : 03Ch04-SZ
Condition : FCC CLASS-B 3m LF_ANT41909_6 HORIZONTAL

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	cm	deg	
			dB	dBuV/m	dBuV	dB/m	dB	dB		
1	30.00	23.99	-16.01	40.00	30.81	24.90	0.25	31.97	---	Peak
2	160.95	26.94	-16.56	43.50	40.80	16.33	1.31	31.50	---	Peak
3	190.05	24.87	-18.63	43.50	39.58	15.15	1.51	31.37	---	Peak
4	270.56	29.89	-16.11	46.00	39.68	19.67	1.77	31.23	---	Peak
5	317.12	29.44	-16.56	46.00	38.88	19.84	1.94	31.22	---	Peak
6	894.27	34.40	-11.60	46.00	32.94	29.25	3.37	31.16	214	122 Peak
7	1830.00	39.92	-34.08	74.00	68.84	25.40	4.12	58.44	---	Peak
8	1960.00	51.57			79.80	25.80	4.31	58.34	---	Peak
9	3188.00	39.61	-34.39	74.00	63.69	29.10	4.56	57.74	---	Peak
10	6630.00	44.23	-29.77	74.00	61.42	34.44	6.64	58.27	---	Peak
11	7702.00	46.69	-27.31	74.00	58.73	37.44	7.20	56.68	100	74 Peak
12	10046.00	45.52	-28.48	74.00	54.13	37.95	9.16	55.72	---	Peak
13	11936.00	46.26	-27.74	74.00	52.06	39.30	9.60	54.70	---	Peak



Test Engineer :	Fuquan	Temperature :	24~25°C
		Relative Humidity :	48~49%
Test Distance :	3m	Polarization :	Vertical
Remark :	#7 is system simulator signal which can be ignored.		

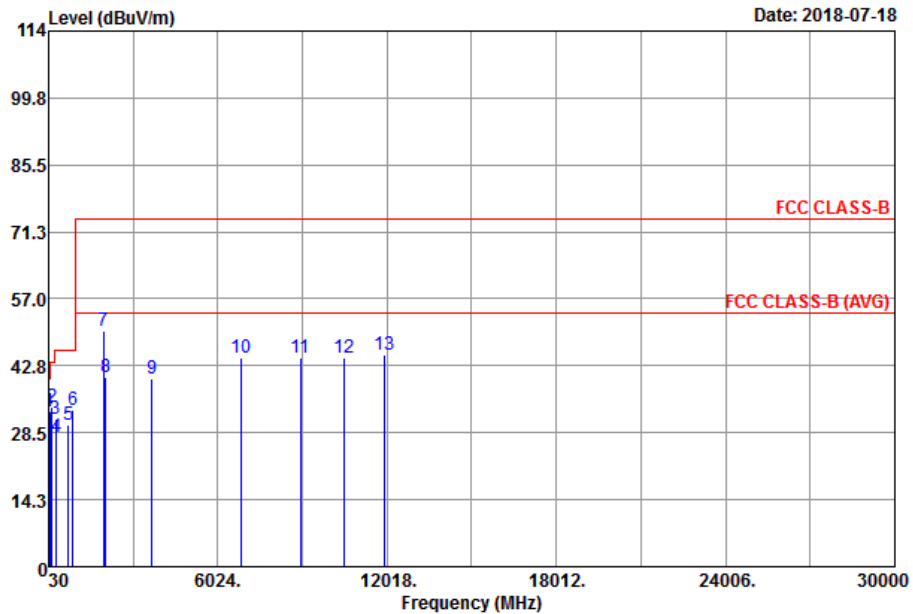

Site : 03Ch04-SZ
Condition : FCC CLASS-B 3m LF_ANT41909_6 VERTICAL

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	cm	deg	
			dB	dBuV/m	dBuV	dB/m	dB	dB		
1	57.16	33.12	-6.88	40.00	51.56	12.68	0.80	31.92	100	145 QP
2	158.04	33.85	-9.65	43.50	47.56	16.51	1.29	31.51	---	Peak
3	273.47	31.30	-14.70	46.00	41.28	19.47	1.78	31.23	---	Peak
4	319.06	27.63	-18.37	46.00	37.01	19.89	1.95	31.22	---	Peak
5	735.19	30.32	-15.68	46.00	31.22	27.33	3.00	31.23	---	Peak
6	895.24	33.40	-12.60	46.00	31.92	29.26	3.38	31.16	---	Peak
7	1960.00	50.33			78.56	25.80	4.31	58.34	---	Peak
8	2040.00	40.44	-33.56	74.00	67.92	26.40	4.39	58.27	---	Peak
9	3680.00	39.92	-34.08	74.00	64.17	29.69	4.95	58.89	---	Peak
10	6834.00	44.57	-29.43	74.00	61.12	35.09	6.97	58.61	---	Peak
11	8940.00	44.51	-29.49	74.00	53.76	37.39	8.22	54.86	---	Peak
12	10504.00	44.38	-29.62	74.00	52.64	38.37	9.27	55.90	---	Peak
13	11920.00	45.23	-28.77	74.00	51.06	39.30	9.60	54.73	100	34 Peak



4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Dec. 26, 2017	Aug. 15, 2018	Dec. 25, 2018	Conduction (CO01-SZ)
AC LISN	EMCO	3816/2SH	00103912	9kHz~30MHz	Dec. 26, 2017	Aug. 15, 2018	Dec. 25, 2018	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	MessTec	3816/2SH	00103892	9kHz~30MHz	Nov. 01, 2017	Aug. 15, 2018	Oct. 31, 2018	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000891	100Vac~250Vac	Jul. 18, 2018	Aug. 15, 2018	Jul. 17, 2019	Conduction (CO01-SZ)
Pulse Limiter	COM-POWER	LIT-153 Transient Limiter	53139	150kHz~30MHz	Oct. 18, 2017	Aug. 15, 2018	Oct. 17, 2018	Conduction (CO01-SZ)
EMI Test Receiver	R&S	ESR7	101404	9kHz~7GHz	Apr. 19, 2018	Jul. 18, 2018	Apr. 18, 2019	Radiation (03CH04-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Apr. 19, 2018	Jul. 18, 2018	Apr. 18, 2019	Radiation (03CH04-SZ)
Bilog Antenna	TeseQ	CBL6111D	41909	30MHz~1GHz	Aug. 29, 2017	Jul. 18, 2018	Aug. 28, 2018	Radiation (03CH04-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1285	1GHz~18GHz	Dec. 13, 2017	Jul. 18, 2018	Dec. 12, 2018	Radiation (03CH04-SZ)
Horn Antenna	SCHWARZBECK	BBHA9170	9170#679	15GHz~40GHz	Apr. 20, 2018	Jul. 18, 2018	Apr. 19, 2019	Radiation (03CH04-SZ)
Amplifier	Burgeon	BPA-530	102211	0.01Hz~3000MHz	Oct. 19, 2017	Jul. 18, 2018	Oct. 18, 2018	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1988315	18GHz~40GHz	Jul. 27, 2017	Jul. 18, 2018	Jul. 26, 2018	Radiation (03CH04-SZ)
Amplifier	Agilent Technologies	83017A	MY53270156	500MHz~26.5GHz	Apr. 19, 2018	Jul. 18, 2018	Apr. 18, 2019	Radiation (03CH04-SZ)
AC Power Source	Chroma	61601	N/A	N/A	NCR	Jul. 18, 2018	NCR	Radiation (03CH04-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Jul. 18, 2018	NCR	Radiation (03CH04-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Jul. 18, 2018	NCR	Radiation (03CH04-SZ)

NCR: No Calibration Required

5. Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.6 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1 dB
---	--------

Uncertainty of Radiated Emission Measurement (1GHz ~ 18GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.8 dB
---	--------

Uncertainty of Radiated Emission Measurement (18GHz ~ 40GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1 dB
---	--------