




B2_N71(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH_chp_P
ASS

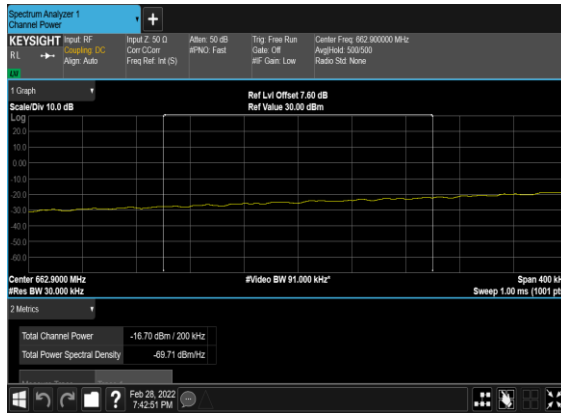


B2_N71(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

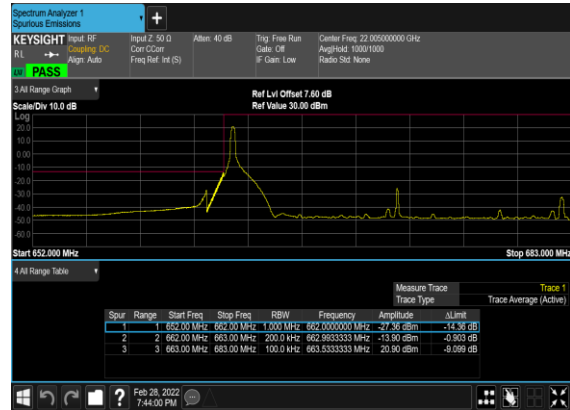


B2_N71(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH_chp_P
ASS

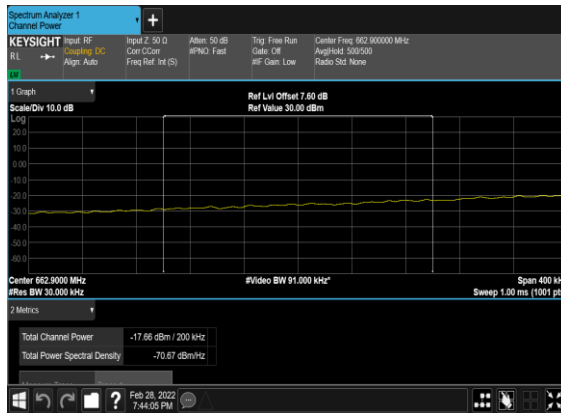


B2_N71(20M)_DFT-s-
OFDM_BPSK_Outer_Full_Low_CH

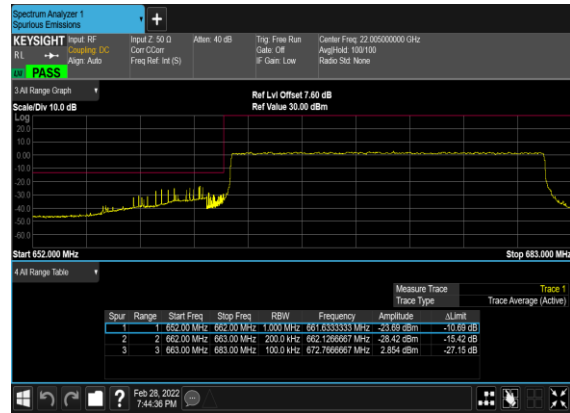

B2_N71(20M)_DFT-s-
OFDM_QPSK_Outer_Full_Low_CH

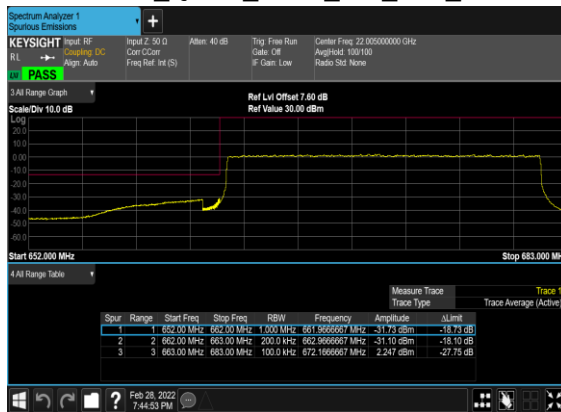

B2_N71(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Right_High_CH

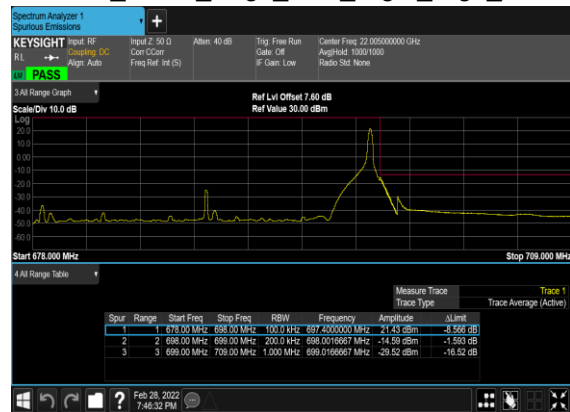

B2_N71(20M)_DFT-s- OFDM_BPSK_Edge_1RB_Right_High_CH_chp _PASS




B2_N71(20M)_DFT-s- OFDM_QPSK_Edge_1RB_Right_High_CH



B2_N71(20M)_DFT-s- OFDM_BPSK_Outer_Full_High_CH



B2_N71(20M)_DFT-s- OFDM_QPSK_Outer_Full_High_CH

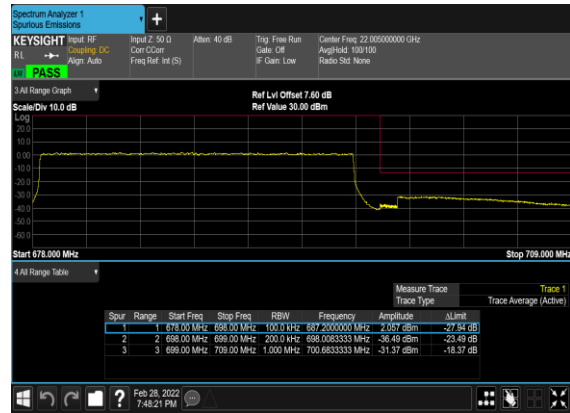



Appendix B. Test Results of Radiated Test

Radiated Spurious Emission

Test Engineer :	Zhao hui Liang	Temperature :	22~25°C
		Relative Humidity :	48~52%

SA n25 / NR 40MHz / QPSK / Ant. 0									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3701.5	-57.16	-13	-44.16	-80.16	-63.92	5.82	12.58	H
	5552.25	-57.17	-13	-44.17	-81.58	-62.89	7.28	13.00	H
	7403	-55.12	-13	-42.12	-81.87	-58.28	8.32	11.48	H
	3701.5	-54.51	-13	-41.51	-79.2	-61.27	5.82	12.58	V
	5552.25	-56.45	-13	-43.45	-81.29	-62.17	7.28	13.00	V
	7403	-55.16	-13	-42.16	-81.88	-58.32	8.32	11.48	V
Middle	3746.5	-57.43	-13	-44.43	-79.77	-64.18	5.85	12.60	H
	5619.75	-56.93	-13	-43.93	-81.13	-62.73	7.30	13.10	H
	7493	-55.36	-13	-42.36	-81.76	-58.51	8.35	11.50	H
	3746.5	-54.80	-13	-41.80	-80.3	-61.55	5.85	12.60	V
	5619.75	-56.24	-13	-43.24	-80.94	-62.04	7.30	13.10	V
	7493	-55.18	-13	-42.18	-81.57	-58.33	8.35	11.50	V
Highest	3791.36	-57.24	-13	-44.24	-80.47	-63.98	5.88	12.62	H
	5687.04	-56.99	-13	-43.99	-81.41	-62.80	7.32	13.13	H
	7582.72	-56.07	-13	-43.07	-82.15	-59.23	8.38	11.54	H
	3791.36	-55.62	-13	-42.62	-80.34	-62.36	5.88	12.62	V
	5687.04	-56.76	-13	-43.76	-81.53	-62.57	7.32	13.13	V
	7582.72	-56.03	-13	-43.03	-82.11	-59.19	8.38	11.54	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



EN-DC_66A_n25A / LTE 20MHz + NR 40MHz / QPSK / ANT1(LTE) & AN0(NR)									
Channel	Frequency (MHz)	ERP/EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
NR n25 Lowest	3701.5	-57.31	-13	-44.31	-80.31	-64.07	5.82	12.58	H
	5552.25	-57.11	-13	-44.11	-81.52	-62.83	7.28	13.00	H
	7403	-54.71	-13	-41.71	-81.46	-57.87	8.32	11.48	H
	3701.5	-55.02	-13	-42.02	-79.71	-61.78	5.82	12.58	V
	5552.25	-56.78	-13	-43.78	-81.62	-62.50	7.28	13.00	V
	7403	-54.99	-13	-41.99	-81.71	-58.15	8.32	11.48	V
LTE Band66 Lowest	3472	-57.93	-13	-44.93	-79.88	-64.78	5.65	12.50	H
	5208	-57.03	-13	-44.03	-81.25	-62.70	7.13	12.80	H
	6944	-55.73	-13	-42.73	-81.44	-59.13	8.40	11.80	H
	3472	-57.53	-13	-44.53	-79.28	-64.38	5.65	12.50	V
	5208	-57.15	-13	-44.15	-81.54	-62.82	7.13	12.80	V
	6944	-55.38	-13	-42.38	-81.82	-58.78	8.40	11.80	V
NR n25 Middle	3746.5	-56.84	-13	-43.84	-79.18	-63.59	5.85	12.60	H
	5619.75	-56.48	-13	-43.48	-80.68	-62.28	7.30	13.10	H
	7493	-54.83	-13	-41.83	-81.23	-57.98	8.35	11.50	H
	3746.5	-54.70	-13	-41.70	-80.2	-61.45	5.85	12.60	V
	5619.75	-56.09	-13	-43.09	-80.79	-61.89	7.30	13.10	V
	7493	-55.11	-13	-42.11	-81.5	-58.26	8.35	11.50	V
LTE Band66 Middle	3472	-57.98	-13	-44.98	-79.93	-64.83	5.65	12.50	H
	5208	-56.67	-13	-43.67	-80.89	-62.34	7.13	12.80	H
	6944	-55.34	-13	-42.34	-81.05	-58.74	8.40	11.80	H
	3472	-57.47	-13	-44.47	-79.22	-64.32	5.65	12.50	V
	5208	-56.48	-13	-43.48	-80.87	-62.15	7.13	12.80	V
	6944	-54.88	-13	-41.88	-81.32	-58.28	8.40	11.80	V
NR n25 Highest	3791.36	-56.94	-13	-43.94	-80.47	-80.17	5.88	12.62	H
	5687.04	-56.65	-13	-43.65	-81.41	-81.07	7.32	13.13	H
	7582.72	-55.54	-13	-42.54	-82.15	-81.62	8.38	11.54	H
	3791.36	-55.80	-13	-42.80	-80.34	-80.52	5.88	12.62	V
	5687.04	-56.40	-13	-43.40	-81.53	-81.17	7.32	13.13	V
	7582.72	-55.53	-13	-42.53	-82.11	-81.61	8.38	11.54	V
LTE Band66 Highest	3472	-58.09	-13	-45.09	-80.04	-64.94	5.65	12.50	H
	5208	-57.06	-13	-44.06	-81.28	-62.73	7.13	12.80	H
	6944	-55.69	-13	-42.69	-81.40	-59.09	8.40	11.80	H
	3472	-57.58	-13	-44.58	-79.33	-64.43	5.65	12.50	V
	5208	-56.70	-13	-43.70	-81.09	-62.37	7.13	12.80	V
	6944	-55.06	-13	-42.06	-81.5	-58.46	8.40	11.80	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



SA n66 / NR 40MHz / QPSK / Ant. 0									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3460	-59.69	-13	-46.69	-81.64	-66.57	5.60	12.48	H
	5190	-57.09	-13	-44.09	-81.13	-62.77	7.10	12.78	H
	6920	-55.98	-13	-42.98	-81.64	-59.37	8.38	11.77	H
	3460	-60.00	-13	-47.00	-81.75	-66.88	5.60	12.48	V
	5190	-56.98	-13	-43.98	-81.41	-62.66	7.10	12.78	V
	6920	-55.12	-13	-42.12	-81.88	-58.51	8.38	11.77	V
Middle	3471	-59.50	-13	-46.50	-81.45	-66.35	5.65	12.50	H
	5206.5	-57.13	-13	-44.13	-81.29	-62.80	7.13	12.80	H
	6942	-55.76	-13	-42.76	-81.47	-59.16	8.40	11.80	H
	3471	-59.03	-13	-46.03	-80.78	-65.88	5.65	12.50	V
	5206.5	-56.91	-13	-43.91	-81.34	-62.58	7.13	12.80	V
	6942	-54.68	-13	-41.68	-81.12	-58.08	8.40	11.80	V
Highest	3521	-58.77	-13	-45.77	-81.10	-65.61	5.68	12.52	H
	5281.5	-57.20	-13	-44.20	-81.64	-62.87	7.15	12.82	H
	7042	-55.92	-13	-42.92	-81.80	-59.35	8.42	11.85	H
	3521	-58.16	-13	-45.16	-80.89	-65.00	5.68	12.52	V
	5281.5	-57.62	-13	-44.62	-81.85	-63.29	7.15	12.82	V
	7042	-54.83	-13	-41.83	-81.22	-58.26	8.42	11.85	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



EN-DC_2A_n66A / LTE 20MHz + NR 40MHz / QPSK / ANT1(LTE) & AN0(NR)									
Channel	Frequency (MHz)	ERP/EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
NR n66 Lowest	3421	-59.27	-13	-46.27	-79.85	-66.15	5.60	12.48	H
	5131.5	-57.54	-13	-44.54	-81.23	-63.22	7.10	12.78	H
	6842	-55.52	-13	-42.52	-81.13	-58.91	8.38	11.77	H
	3421	-58.40	-13	-45.40	-80.18	-65.28	5.60	12.48	V
	5131.5	-56.97	-13	-43.97	-81.4	-62.65	7.10	12.78	V
	6842	-54.17	-13	-41.17	-81.61	-57.56	8.38	11.77	V
LTE Band2 Lowest	3742.18	-57.65	-13	-44.65	-80.54	-64.40	5.85	12.60	H
	5613.27	-57.19	-13	-44.19	-81.47	-62.99	7.30	13.10	H
	7484.36	-55.71	-13	-42.71	-82.17	-58.86	8.35	11.50	H
	3742.18	-55.14	-13	-42.14	-80.04	-61.89	5.85	12.60	V
	5613.27	-56.64	-13	-43.64	-81.77	-62.44	7.30	13.10	V
	7484.36	-55.84	-13	-42.84	-82.28	-58.99	8.35	11.50	V
NR n66 Middle	3471	-58.34	-13	-45.34	-80.29	-65.19	5.65	12.50	H
	5206.5	-57.16	-13	-44.16	-81.32	-62.83	7.13	12.80	H
	6942	-55.93	-13	-42.93	-81.64	-59.33	8.40	11.80	H
	3471	-57.54	-13	-44.54	-79.29	-64.39	5.65	12.50	V
	5206.5	-57.49	-13	-44.49	-81.92	-63.16	7.13	12.80	V
	6942	-55.48	-13	-42.48	-81.92	-58.88	8.40	11.80	V
LTE Band2 Middle	3742.18	-57.29	-13	-44.29	-80.18	-64.04	5.85	12.60	H
	5613.27	-57.08	-13	-44.08	-81.36	-62.88	7.30	13.10	H
	7484.36	-55.83	-13	-42.83	-82.29	-58.98	8.35	11.50	H
	3742.18	-55.12	-13	-42.12	-80.02	-61.87	5.85	12.60	V
	5613.27	-56.62	-13	-43.62	-81.75	-62.42	7.30	13.10	V
	7484.36	-55.47	-13	-42.47	-81.91	-58.62	8.35	11.50	V
NR n66 Highest	3521	-58.04	-13	-45.04	-80.37	-64.88	5.68	12.52	H
	5281.5	-57.45	-13	-44.45	-81.89	-63.12	7.15	12.82	H
	7042	-55.60	-13	-42.60	-81.48	-59.03	8.42	11.85	H
	3521	-56.67	-13	-43.67	-79.4	-63.51	5.68	12.52	V
	5281.5	-57.78	-13	-44.78	-82.01	-63.45	7.15	12.82	V
	7042	-55.09	-13	-42.09	-81.48	-58.52	8.42	11.85	V
LTE Band2 Highest	3742.18	-57.70	-13	-44.70	-80.59	-64.45	5.85	12.60	H
	5613.27	-57.38	-13	-44.38	-81.66	-63.18	7.30	13.10	H
	7484.36	-55.60	-13	-42.60	-82.06	-58.75	8.35	11.50	H
	3742.18	-55.13	-13	-42.13	-80.03	-61.88	5.85	12.60	V
	5613.27	-56.64	-13	-43.64	-81.77	-62.44	7.30	13.10	V
	7484.36	-55.63	-13	-42.63	-82.07	-58.78	8.35	11.50	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



SA n71 / NR 20MHz / QPSK / Ant. 0									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1327	-48.33	-13	-35.33	-58.83	-51.56	3.98	9.36	H
	1990.5	-55.31	-13	-42.31	-71.96	-58.86	4.85	10.55	H
	2654	-60.10	-13	-47.10	-79.32	-65.03	5.50	12.58	H
	1327	-53.20	-13	-40.20	-64.63	-56.43	3.98	9.36	V
	1990.5	-60.81	-13	-47.81	-77.41	-64.36	4.85	10.55	V
	2654	-59.69	-13	-46.69	-79.29	-64.62	5.50	12.58	V
Middle	1342	-53.15	-13	-40.15	-63.64	-56.40	4.00	9.40	H
	2013	-61.65	-13	-48.65	-78.67	-65.22	4.88	10.60	H
	2684	-59.85	-13	-46.85	-79.03	-64.78	5.52	12.60	H
	1342	-64.10	-13	-51.10	-75.54	-67.35	4.00	9.40	V
	2013	-61.11	-13	-48.11	-78.02	-64.68	4.88	10.60	V
	2684	-59.00	-13	-46.00	-78.64	-63.93	5.52	12.60	V
Highest	1357	-62.27	-13	-49.27	-72.86	-65.44	4.10	9.42	H
	2035.5	-58.71	-13	-45.71	-75.82	-62.29	4.90	10.63	H
	2714	-59.72	-13	-46.72	-78.85	-64.64	5.55	12.62	H
	1357	-64.50	-13	-51.50	-76.07	-67.67	4.10	9.42	V
	2035.5	-61.87	-13	-48.87	-78.85	-65.45	4.90	10.63	V
	2714	-59.03	-13	-46.03	-78.71	-63.95	5.55	12.62	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



EN-DC_2A_n71A / LTE 20MHz + NR 20MHz / QPSK / ANT1(LTE) & AN0(NR)									
Channel	Frequency (MHz)	ERP/EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
NR n71 Lowest	1327	-65.93	-13	-52.93	-76.43	-69.16	3.98	9.36	H
	1990.5	-61.51	-13	-48.51	-78.16	-65.06	4.85	10.55	H
	2654	-59.92	-13	-46.92	-79.14	-64.85	5.50	12.58	H
	1327	-64.88	-13	-51.88	-76.31	-68.11	3.98	9.36	V
	1990.5	-61.75	-13	-48.75	-78.35	-65.30	4.85	10.55	V
	2654	-59.68	-13	-46.68	-79.28	-64.61	5.50	12.58	V
LTE Band2 Lowest	3742.18	-57.40	-13	-44.40	-80.29	-64.15	5.85	12.60	H
	5613.27	-56.90	-13	-43.90	-81.18	-62.70	7.30	13.10	H
	7484.36	-52.93	-13	-39.93	-79.39	-56.08	8.35	11.50	H
	3742.18	-55.14	-13	-42.14	-80.04	-61.89	5.85	12.60	V
	5613.27	-56.28	-13	-43.28	-81.41	-62.08	7.30	13.10	V
	7484.36	-50.15	-13	-37.15	-76.59	-53.30	8.35	11.50	V
NR n71 Middle	1342	-66.14	-13	-53.14	-76.63	-69.39	4.00	9.40	H
	2013	-61.51	-13	-48.51	-78.53	-65.08	4.88	10.60	H
	2684	-59.61	-13	-46.61	-78.79	-64.54	5.52	12.60	H
	1342	-64.96	-13	-51.96	-76.40	-68.21	4.00	9.40	V
	2013	-61.72	-13	-48.72	-78.63	-65.29	4.88	10.60	V
	2684	-59.43	-13	-46.43	-79.07	-64.36	5.52	12.60	V
LTE Band2 Middle	3742.18	-56.25	-13	-43.25	-79.14	-63.00	5.85	12.60	H
	5613.27	-56.24	-13	-43.24	-80.52	-62.04	7.30	13.10	H
	7484.36	-51.29	-13	-38.29	-77.75	-54.44	8.35	11.50	H
	3742.18	-54.54	-13	-41.54	-79.44	-61.29	5.85	12.60	V
	5613.27	-55.93	-13	-42.93	-81.06	-61.73	7.30	13.10	V
	7484.36	-49.12	-13	-36.12	-75.56	-52.27	8.35	11.50	V
NR n71 Highest	1357	-66.03	-13	-53.03	-76.62	-69.20	4.10	9.42	H
	2035.5	-61.41	-13	-48.41	-78.52	-64.99	4.90	10.63	H
	2714	-59.90	-13	-46.90	-79.03	-64.82	5.55	12.62	H
	1357	-64.99	-13	-51.99	-76.56	-68.16	4.10	9.42	V
	2035.5	-61.76	-13	-48.76	-78.74	-65.34	4.90	10.63	V
	2714	-59.39	-13	-46.39	-79.07	-64.31	5.55	12.62	V
LTE Band2 Highest	3742.18	-57.34	-13	-44.34	-80.23	-64.09	5.85	12.60	H
	5613.27	-56.63	-13	-43.63	-80.91	-62.43	7.30	13.10	H
	7484.36	-53.16	-13	-40.16	-79.62	-56.31	8.35	11.50	H
	3742.18	-54.83	-13	-41.83	-79.73	-61.58	5.85	12.60	V
	5613.27	-56.45	-13	-43.45	-81.58	-62.25	7.30	13.10	V
	7484.36	-51.13	-13	-38.13	-77.57	-54.28	8.35	11.50	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



SA n41 / NR 100MHz / QPSK / Ant. 0									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	4994.80	-58.28	-25	-33.28	-81.03	-63.84	7.12	12.68	H
	7492.20	-55.18	-25	-30.18	-81.58	-58.51	8.26	11.59	H
	9989.60	-53.23	-25	-28.23	-83.22	-54.76	10.45	11.98	H
	4994.80	-56.74	-25	-31.74	-81.17	-62.30	7.12	12.68	V
	7492.20	-55.44	-25	-30.44	-81.83	-58.77	8.26	11.59	V
	9989.60	-52.48	-25	-27.48	-83.05	-54.01	10.45	11.98	V
Middle	5089.00	-57.91	-25	-32.91	-81.36	-63.47	7.14	12.70	H
	7633.50	-56.06	-25	-31.06	-81.98	-59.36	8.30	11.60	H
	10178.00	-53.01	-25	-28.01	-83.33	-54.53	10.48	12.00	H
	5089.00	-57.02	-25	-32.02	-81.45	-62.58	7.14	12.70	V
	7633.50	-55.43	-25	-30.43	-82.03	-58.73	8.30	11.60	V
	10178.00	-51.47	-25	-26.47	-83.01	-52.99	10.48	12.00	V
Highest	5182.80	-56.97	-25	-31.97	-81.01	-62.53	7.16	12.72	H
	7774.20	-55.76	-25	-30.76	-81.28	-59.06	8.33	11.63	H
	10365.60	-52.41	-25	-27.41	-83.06	-54.01	10.50	12.10	H
	5182.80	-57.06	-25	-32.06	-81.49	-62.62	7.16	12.72	V
	7774.20	-52.35	-25	-27.35	-81.3	-55.65	8.33	11.63	V
	10365.60	-50.33	-25	-25.33	-82.84	-51.93	10.50	12.10	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



EN-DC_2A_n41A / LTE 20MHz + NR 100MHz / QPSK / ANT1(LTE) & AN0(NR)									
Channel	Frequency (MHz)	ERP/EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
NR n41 Lowest	4994.80	-58.91	-25	-33.91	-81.66	-64.47	7.12	12.68	H
	7492.20	-54.59	-25	-29.59	-80.99	-57.92	8.26	11.59	H
	9989.60	-53.62	-25	-28.62	-83.61	-55.15	10.45	11.98	H
	3742.18	-55.08	-25	-30.08	-81.79	-60.64	7.12	12.68	V
	7492.20	-55.33	-25	-30.33	-81.72	-58.66	8.26	11.59	V
	9989.60	-53.29	-25	-28.29	-83.86	-54.82	10.45	11.98	V
LTE Band2 Lowest	3742.18	-57.31	-13	-44.31	-80.20	-64.06	5.85	12.60	H
	5613.27	-57.17	-13	-44.17	-81.45	-62.97	7.30	13.10	H
	7484.36	-50.26	-13	-37.26	-76.72	-53.41	8.35	11.50	H
	3742.18	-55.08	-13	-42.08	-79.98	-61.83	5.85	12.60	V
	5613.27	-56.65	-13	-43.65	-81.78	-62.45	7.30	13.10	V
	7484.36	-48.07	-13	-35.07	-74.51	-51.22	8.35	11.50	V
NR n41 Middle	5089.00	-57.61	-25	-32.61	-81.06	-63.17	7.14	12.70	H
	7633.50	-55.75	-25	-30.75	-81.67	-59.05	8.30	11.60	H
	10178.00	-52.69	-25	-27.69	-83.01	-54.21	10.48	12.00	H
	5089.00	-56.66	-25	-31.66	-81.09	-62.22	7.14	12.70	V
	7633.50	-55.10	-25	-30.10	-81.7	-58.40	8.30	11.60	V
	10178.00	-51.71	-25	-26.71	-83.25	-53.23	10.48	12.00	V
LTE Band2 Middle	3742.18	-57.16	-13	-44.16	-80.05	-63.91	5.85	12.60	H
	5613.27	-56.80	-13	-43.80	-81.08	-62.60	7.30	13.10	H
	7484.36	-49.51	-13	-36.51	-75.97	-52.66	8.35	11.50	H
	3742.18	-54.59	-13	-41.59	-79.49	-61.34	5.85	12.60	V
	5613.27	-56.50	-13	-43.50	-81.63	-62.30	7.30	13.10	V
	7484.36	-47.87	-13	-34.87	-74.31	-51.02	8.35	11.50	V
NR n41 Highest	5182.80	-57.22	-25	-32.22	-81.26	-62.78	7.16	12.72	H
	7774.20	-55.98	-25	-30.98	-81.50	-59.28	8.33	11.63	H
	10365.60	-52.84	-25	-27.84	-83.49	-54.44	10.50	12.10	H
	3742.18	-54.99	-25	-29.99	-81.59	-60.55	7.16	12.72	V
	7774.20	-52.24	-25	-27.24	-81.19	-55.54	8.33	11.63	V
	10365.60	-50.57	-25	-25.57	-83.08	-52.17	10.50	12.10	V
LTE Band2 Highest	3742.18	-57.47	-13	-44.47	-80.36	-64.22	5.85	12.60	H
	5613.27	-57.00	-13	-44.00	-81.28	-62.80	7.30	13.10	H
	7484.36	-49.46	-13	-36.46	-75.92	-52.61	8.35	11.50	H
	3742.18	-54.99	-13	-41.99	-79.89	-61.74	5.85	12.60	V
	5613.27	-56.37	-13	-43.37	-81.5	-62.17	7.30	13.10	V
	7484.36	-47.86	-13	-34.86	-74.3	-51.01	8.35	11.50	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.