

RF Exposure Report

(Part 0: SAR and PD Char Evaluation)

FCC ID : 2ABZ2-EF14A
Equipment : Smart Phone
Brand Name : ONEPLUS
Model Name : LE2127
Applicant : OnePlus Technology (Shenzhen) Co., Ltd.
18C02, 18C03, 18C04 and 18C05, Shum Yip
Terra Building, Binhe Avenue North,
Futian District, Shenzhen
Standard : FCC 47 CFR Part 2 (2.1093)

We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Approved by: Cona Huang / Deputy Manager

Sporton International Inc.

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan

Table of Contents

1. Introduction	4
2. Product Description	5
3. SAR Characterization.....	6
3.1 SAR design target and uncertainty.....	6
3.2 SAR Char Table	9
4. Power Density Characterization	13
4.1 PD Char Table.....	13
4.2 Codebook for all beams	14
4.3 PD_design_target determination.....	23
4.4 Exposure positions for PD evaluation	24
4.5 Simulation and modeling validation.....	25
4.6 PD Char	26
4.6.1 Simulated input power limit for single beams	26
4.6.2 Simulated input power limit for beam pairs	27
4.6.3 Worst-case housing influence determination.....	28
4.7 PD Char	40
4.7.1 PD char generation	40
4.7.2 PD char Table.....	41
5. PD Test Setup.....	50
5.1 PD Test – System Setup	50
5.2 EUmmWave Probe / E-Field 5G Probe	51
5.3 Data Acquisition Electronics (DAE)	52
5.4 Scan configuration	52
5.5 System Verification Source	52
5.6 Power Density System Verification.....	53
5.7 System Verification Results.....	53
6. Uncertainty Assessment	54

History of this test report

Report No.	Version	Description	Issued Date
FA0O2623-02A	01	Initial issue of report	Jan. 19, 2021

1. Introduction

The FCC RF exposure limit is defined based on time-averaged RF exposure. The product implements Qualcomm Smart Transmit feature which controls the instantaneous transmitting power for WWAN transmitter to ensure the product in compliance with FCC RF exposure limit over a defined time window, for SAR (transmit frequency $\leq 6\text{GHz}$) and power density (transmit frequency $> 6\text{GHz}$). to control and manage transmitting power in real time and to ensure at all times the time-averaged RF exposure is compliant to the regulation requirement. Cannot operate without SAR and PD characterization at the device level, beforehand.

This report describes the procedures for the SAR char and PD char generation, and the parameters obtained from SAR and PD characterization (referred to as SAR char and PD char, respectively) will be used as input for Smart Transmit. Both SAR char and PD char will be entered via the Embedded File System (EFS) to enable the Smart Transmit Feature.

Terminologies in this report

P_{limit}	The time-averaged RF power which corresponds to SAR_design_target.
P_{max}	Maximum target power level
SAR_design_target:	The design target for SAR compliance. It should be less than regulatory power density limit to account for all device design related uncertainties.
SAR char	P_{limit} for all the technologies/bands for all applicable DSI
PD_design_target:	The design target for PD compliance. It should be less than regulatory power density limit to account for all device design related uncertainties.
input.power.limit	For a PD characterized wireless device, the input power level at antenna port(s) for each beam corresponding to PD_design_target.
PD char	The table that contains input.power.limit fed to antenna port(s) for all supported beams.



2. Product Description

Product Feature & Specification	
Equipment Name	Smart Phone
FCC ID	2ABZ2-EF14A
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz CDMA2000 BC0: 824.7 MHz ~ 848.31 MHz CDMA 2000 BC1: 1851.25 MHz ~ 1908.75 MHz CDMA 2000 BC10: 817.9 MHz ~ 823.1 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 30: 2305 MHz ~ 2315 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 48: 3550 MHz ~ 3700 MHz LTE Band 66: 1710 MHz ~ 1780 MHz LTE Band 71: 663 MHz ~ 698 MHz 5G NR n2 : 1850 MHz ~ 1910 MHz 5G NR n5 : 824 MHz ~ 849 MHz 5G NR n7 : 2500 MHz ~ 2570 MHz 5G NR n25 : 1850 MHz ~ 1915 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz 5G NR n66 : 1710 MHz ~ 1780 MHz 5G NR n71 : 663 MHz ~ 698 MHz 5G NR n77 : 3700 MHz ~ 3980 MHz 5G NR n258a: 24.25GHz ~24.45GHz 5G NR n258b: 24.75GHz ~25.25GHz 5G NR n260 : 37 GHz~40 GHz 5G NR n261 : 27.5 GHz~28.35 GHz WLAN 2.4GHz Band: 2400 MHz ~ 2483.5 MHz WLAN 5.2GHz Band: 5150 MHz ~ 5250 MHz WLAN 5.3GHz Band: 5250 MHz ~ 5350 MHz WLAN 5.6GHz Band: 5470 MHz ~ 5725 MHz WLAN 5.8GHz Band: 5725 MHz ~ 5825 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz ANT+: 2402 MHz ~ 2480 MHz NFC: 13.56 MHz WPT: 100 KHz ~ 205KHz
Mode	GSM/GPRS/EGPRS RMC/AMR 12.2Kbps HSDPA HSUPA DC-HSDPA HSPA+ (16QAM uplink) CDMA2000 : 1xRTT/1xEv-Do(Rev.0)/1xEv-Do(Rev.A)/1xEv-Do(Rev.B) LTE: QPSK, 16QAM, 64QAM, 256QAM 5G NR: DFT-s-OFDM/CP-OFDM, Pi/2 BPSK/QPSK/16QAM/64QAM/256QAM WLAN: 802.11a/b/g/n/ac/ax HT20/HT40/VHT20/VHT40/VHT80/VHT160/HE20/HE40/HE80/HE160 Bluetooth BR/EDR/LE ANT+: GFSK NFC: ASK WPT: ASK

3. SAR Characterization

SAR char must be generated to cover all radio configurations and usage scenarios that the wireless device supports for operating at 6 GHz or below. It will then be used as input for Smart Transmit to control and manage RF exposure for $f < 6$ GHz.

3.1 SAR design target and uncertainty

Trigger condition

Exposure conditions	Trigger Conditions	DSI	Antenna
Body Worn(2G/3G/4G/NR)	-	0	UAT
Body Worn(2G/3G/4G/NR)	-	0	LAT
Extremity(2G/3G/4G/NR)	sensor on	7	UAT
Extremity(2G/3G/4G/NR)	sensor on	8	LAT
Hotspot(2G/3G/4G/NR)	Hotspot On	5	UAT
Hotspot(2G/3G/4G/NR)	Hotspot On	5	LAT
Head(2G/3G/4G/NR)	Receiver on	1	UAT
Head(2.4G On)(2G/3G/4G/NR)	Receiver on with Wifi/Hotspot on	2	UAT
Head(5G On)(2G/3G/4G/NR)	Receiver on with Wifi/Hotspot on	3	UAT
Head(2.4G+5G On)(2G/3G/4G/NR)	Receiver on with Wifi/Hotspot on	4	UAT
Head(2G/3G/4G/NR)	Receiver on	1	LAT
Head(2.4G On)(2G/3G/4G/NR)	Receiver on with Wifi/Hotspot on	2	LAT
Head(5G On)(2G/3G/4G/NR)	Receiver on with Wifi/Hotspot on	3	LAT
Head(2.4G+5G On)(2G/3G/4G/NR)	Receiver on with Wifi/Hotspot on	4	LAT

UAT Antenna

Band	Antenna	Head	Head	Head	Head	Body Worn	Hotspot	Extremity
		DSI 1	DSI 2	DSI 3	DSI 4	DSI 0	DSI 5	DSI 7
		1g SAR	1g SAR	1g SAR	1g SAR	1g SAR	1g SAR	10g SAR
GSM850_SAR design target	0	0.95	0.65	0.65	0.65	0.95	0.35	2.22
GSM1900_SAR design target	2	0.72	0.60	0.60	0.60	0.95	0.95	2.22
WCDMA II_SAR design target	2	0.95	0.70	0.70	0.70	0.95	0.95	2.22
WCDMA IV_SAR design target	2	0.80	0.55	0.55	0.55	0.95	0.95	2.22
WCDMA V_SAR design target	0	0.75	0.40	0.40	0.40	0.95	0.95	2.22
CDMA BC0_SAR design target	0	0.80	0.55	0.55	0.55	0.95	0.95	2.22
CDMA BC1_SAR design target	2	0.95	0.67	0.67	0.67	0.95	0.95	2.22
CDMA BC10_SAR design target	0	0.95	0.55	0.55	0.55	0.95	0.95	2.22
LTE B2/25_SAR design target	2	0.78	0.55	0.55	0.55	0.95	0.60	2.22
LTE B6/4_SAR design target	2	0.76	0.55	0.55	0.55	0.95	0.95	2.22
LTE B6/4_SAR design target	0	0.63	0.48	0.48	0.48	0.95	0.58	2.22
LTE B7_SAR design target	0	0.95	0.67	0.67	0.67	0.95	0.60	2.22
LTE B5_SAR design target	0	0.70	0.40	0.40	0.40	0.95	0.95	2.22
LTE B7_SAR design target	2	0.75	0.55	0.55	0.55	0.95	0.95	2.22
LTE B12/B17_SAR design target	0	0.95	0.60	0.60	0.60	0.95	0.95	2.22
LTE B13_SAR design target	0	0.95	0.60	0.60	0.60	0.95	0.95	2.22
LTE B26_SAR design target	0	0.95	0.65	0.65	0.65	0.95	0.95	2.22
LTE B30_SAR design target	2	0.70	0.70	0.70	0.70	0.95	0.95	2.22
LTE B41_SAR design target	2	0.95	0.95	0.95	0.95	0.95	0.95	2.22
LTE B48_SAR design target	9	0.95	0.65	0.65	0.65	0.95	0.95	2.22
LTE B71_SAR design target	0	0.95	0.60	0.60	0.60	0.95	0.95	2.22
NR_n71_SAR design target	0	0.95	0.45	0.45	0.45	0.95	0.95	2.22
NR_n5_SAR design target	0	0.80	0.65	0.65	0.65	0.95	0.95	2.22
NR_n66_SAR design target	2	0.75	0.60	0.60	0.60	0.95	0.95	2.22
NR_n66_SAR design target	0	0.79	0.63	0.63	0.63	0.95	0.50	2.22
NR_n2_SAR design target	2	0.95	0.70	0.70	0.70	0.95	0.95	2.22
NR_n25_SAR design target	2	0.95	0.70	0.70	0.70	0.95	0.95	2.22
NR_n7_SAR design target	2	0.95	0.75	0.75	0.75	0.95	0.95	2.22
NR_n41_SAR design target	0	0.95	0.75	0.75	0.75	0.95	0.60	2.22
NR_n41_SAR design target	2	0.84	0.68	0.68	0.68	0.95	0.95	2.22
NR_n48_SAR design target	9	0.80	0.60	0.60	0.60	0.95	0.72	2.22
NR_n77_SAR design target	9	0.85	0.60	0.60	0.60	0.95	0.95	2.22

LAT Antenna

Band	Antenna	Head	Head	Head	Head	Body Worn	Hotspot	Extremity
		DSI 1	DSI 2	DSI 3	DSI 4	DSI 0	DSI 5	DSI 8
		1g SAR	1g SAR	1g SAR	1g SAR	1g SAR	1g SAR	10g SAR
GSM850_SAR design target	1	0.95	0.95	0.95	0.95	0.95	0.95	2.22
GSM1900_SAR design target	3	0.95	0.95	0.95	0.95	0.95	0.95	2.22
WCDMA II_SAR design target	3	0.95	0.95	0.95	0.95	0.95	0.80	2.22
WCDMA IV_SAR design target	3	0.95	0.95	0.95	0.95	0.95	0.95	2.22
WCDMA V_SAR design target	1	0.95	0.95	0.95	0.95	0.95	0.95	2.22
CDMA BC0_SAR design target	1	0.95	0.95	0.95	0.95	0.95	0.95	2.22
CDMA BC1_SAR design target	3	0.95	0.95	0.95	0.95	0.95	0.80	2.22
CDMA BC10_SAR design target	1	0.95	0.95	0.95	0.95	0.95	0.95	2.22
LTE B2/25_SAR design target	3	0.95	0.95	0.95	0.95	0.95	0.65	2.22
LTE B66/4_SAR design target	3	0.95	0.95	0.95	0.95	0.95	0.85	2.22
LTE B66/4_SAR design target	1	0.95	0.95	0.95	0.95	0.95	0.95	2.22
LTE B5_SAR design target	1	0.95	0.95	0.95	0.95	0.95	0.95	2.22
LTE B7_SAR design target	3	0.95	0.95	0.95	0.95	0.95	0.75	2.22
LTE B7_SAR design target	1	0.95	0.95	0.95	0.95	0.95	0.95	2.22
LTE B12/B17_SAR design target	1	0.95	0.95	0.95	0.95	0.95	0.95	2.22
LTE B13_SAR design target	1	0.95	0.95	0.95	0.95	0.95	0.95	2.22
LTE B26_SAR design target	1	0.95	0.95	0.95	0.95	0.95	0.95	2.22
LTE B30_SAR design target	3	0.95	0.95	0.95	0.95	0.95	0.65	1.60
LTE B41_SAR design target	3	0.95	0.95	0.95	0.95	0.95	0.95	2.22
LTE B71_SAR design target	1	0.95	0.95	0.95	0.95	0.95	0.95	2.22
NR_n71_SAR design target	1	0.95	0.95	0.95	0.95	0.95	0.95	2.22
NR_n5_SAR design target	1	0.95	0.95	0.95	0.95	0.95	0.95	2.22
NR_n66_SAR design target	3	0.95	0.95	0.95	0.95	0.95	0.70	2.22
NR_n66_SAR design target	1	0.95	0.95	0.95	0.95	0.95	0.95	2.22
NR_n2_SAR design target	3	0.95	0.95	0.95	0.95	0.95	0.80	2.00
NR_n25_SAR design target	3	0.95	0.95	0.95	0.95	0.95	0.80	2.00
NR_n7_SAR design target	3	0.95	0.95	0.95	0.95	0.95	0.65	1.40
NR_n41_SAR design target	1	0.95	0.95	0.95	0.95	0.95	0.95	2.22
NR_n41_SAR design target	3	0.95	0.95	0.95	0.95	0.95	0.85	2.22

Total uncertainty	Uncertainty dB (k=2)
	1.0

To account for total uncertainty, SAR_design_target should be determined as:

$$SAR_{design_target} < SAR_{regulatory_limit} \times 10^{\frac{-total_uncertainty}{10}}$$

3.2 SAR Char Table

SAR char must be generated to cover all radio configurations and usage scenarios that the wireless device supports for operating at 6 GHz or below. It will then be used as input for Smart Transmit to control and manage RF exposure for $f < 6$ GHz

Plimit Table for UAT transmit antenna

Band	Antenna	Head	Head Sim-2Tx(2.4G)	Head Sim-2Tx(5G)	Head Sim-3Tx(2.4G+5G)	Body Worn	Hotspot	Extremity	Pmax*
		DSI 1	DSI 2	DSI 3	DSI 4	DSI 0	DSI 5	DSI 7	
GSM850(4 Tx slots)	0	21.6	20.1	20.1	20.1	28.8	21.6	24.0	24.0
GSM1900(2 Tx slots)	2	18.3	17.8	17.8	17.8	30.6	22.5	19.8	19.8
WCDMA II	2	19.0	17.5	17.5	17.5	27.1	22.7	22.3	22.3
WCDMA IV	2	18.3	16.8	16.8	16.8	26.9	22.8	22.3	22.3
WCDMA V	0	21.4	18.9	18.9	18.9	30.2	27.2	23.3	23.3
CDMA BC0	0	21.2	19.7	19.7	19.7	29.9	28.0	22.8	22.8
CDMA BC1	2	19.2	17.7	17.7	17.7	26.6	23.2	21.8	21.8
CDMA BC10	0	21.8	19.3	19.3	19.3	29.2	26.2	22.8	22.8
LTE B2/25	2	18.4	16.9	16.9	16.9	26.9	21.0	22.3	22.3
LTE B66/4	2	18.9	17.4	17.4	17.4	29.3	23.5	22.3	22.3
LTE B66/4 ^{1,2}	0	17.7	16.6	16.6	16.6	26.8	18.7	23.5	23.5
LTE B7 ²	0	15.6	14.1	14.1	14.1	24.3	18.6	24.0	24.0
LTE B5	0	21.5	19.0	19.0	19.0	29.7	27.4	23.3	23.3
LTE B7	2	17.6	16.1	16.1	16.1	29.8	24.1	22.1	22.1
LTE B12/B17	0	22.4	20.4	20.4	20.4	29.3	26.4	23.3	23.3
LTE B13	0	22.5	20.5	20.5	20.5	29.0	25.8	23.3	23.3
LTE B26	0	20.8	19.3	19.3	19.3	30.9	29.2	23.3	23.3
LTE B30	2	21.1	21.1	21.1	21.1	29.9	24.2	21.6	21.6
LTE B41/38 PC3	2	20.8	20.8	20.8	20.8	29.5	23.3	19.2	18.8
LTE B41 PC2	2	20.8	20.8	20.8	20.8	29.5	23.3	19.2	19.2
LTE B48	9	18.5	17.0	17.0	17.0	24.9	20.1	21.8	21.8
LTE B71	0	21.9	19.9	19.9	19.9	30.3	28.0	23.3	23.3
NR_n71	0	23.8	20.5	20.5	20.5	30.6	27.4	22.5	22.5
NR_n5	0	21.5	20.5	20.5	20.5	29.1	25.8	22.5	22.5
NR_n66	2	17.8	16.8	16.8	16.8	28.9	22.6	20.8	20.8
NR_n66 ²	0	16.8	15.8	15.8	15.8	25.5	19.3	23.8	23.8
NR_n2	2	17.8	16.8	16.8	16.8	28.7	22.5	20.8	20.8
NR_n25	2	17.8	16.8	16.8	16.8	28.7	22.5	20.8	20.8
NR_n7	2	18.3	17.3	17.3	17.3	28.0	21.6	20.8	20.8
NR_n41 PC3 ²	0	15.8	14.8	14.8	14.8	25.8	18.8	25.8	22.8
NR_n41 PC2 ²	0	15.8	14.8	14.8	14.8	25.8	18.8	25.8	25.8
NR_n41 PC3	2	20.3	19.3	19.3	19.3	29.6	24.1	22.8	20.8
NR_n41 PC2	2	20.3	19.3	19.3	19.3	29.6	24.1	22.8	22.8
NR_n48	9	17.3	16.3	16.3	16.3	25.8	19.8	23.8	23.8
NR_n77	9	19.8	18.3	18.3	18.3	29.4	24.8	23.8	23.8

Note1: LTE Band 66/4 ant 0 only for LTE inter-band uplink CA

Note2: LTE Band 66/7 and NR 41/66 ant 0 only for EN-DC combination

Plimit Table for LAT transmit antenna

Band	Antenna	Head	Head	Head	Head	Body Worn	Hotspot	Extremity	Pmax*
		DSI 1	DSI 2	DSI 3	DSI 4				
GSM850(4 Tx slots)	1	31.8	31.8	31.8	31.8	29.4	27.1	25.3	25.3
GSM1900(2 Tx slots)	3	28.7	28.7	28.7	28.7	28.3	23.1	21.8	21.8
WCDMA II	3	28.3	28.3	28.3	28.3	26.7	21.2	21.2	23.8
WCDMA IV	3	29.0	29.0	29.0	29.0	26.2	21.6	21.6	23.8
WCDMA V	1	31.1	31.1	31.1	31.1	31.2	27.7	23.8	23.8
CDMA BC0	1	31.1	31.1	31.1	31.1	30.9	27.1	23.8	23.8
CDMA BC1	3	28.1	28.1	28.1	28.1	25.8	21.7	21.7	23.8
CDMA BC10	1	30.7	30.7	30.7	30.7	30.2	27.1	23.8	23.8
LTE B2/25	3	28.9	28.9	28.9	28.9	26.7	21.0	21.0	23.8
LTE B66/4	3	29.0	29.0	29.0	29.0	26.1	20.8	20.8	23.8
LTE B66/4 ^{1,2}	1	30.2	30.2	30.2	30.2	29.3	24.8	21.0	21.0
LTE B5	1	31.2	31.2	31.2	31.2	31.5	27.5	23.8	23.8
LTE B7	3	27.5	27.5	27.5	27.5	25.2	20.8	20.8	23.8
LTE B7 ²	1	29.2	29.2	29.2	29.2	28.5	22.3	20.5	20.5
LTE B12/B17	1	30.5	30.5	30.5	30.5	30.6	26.9	23.8	23.8
LTE B13	1	30.0	30.0	30.0	30.0	30.3	26.6	23.8	23.8
LTE B26	1	31.5	31.5	31.5	31.5	31.2	28.4	23.8	23.8
LTE B30	3	28.1	28.1	28.1	28.1	25.1	20.0	20.0	23.8
**LTE B41/38 PC3	3	27.9	27.9	27.9	27.9	25.9	20.6	22.2	21.8
**LTE B41 PC2	3	27.9	27.9	27.9	27.9	25.9	20.6	22.2	22.2
LTE B71	1	31.3	31.3	31.3	31.3	31.1	28.4	23.8	23.8
NR_n71	1	32.3	32.3	32.3	32.3	32.3	28.1	23.8	23.8
NR_n5	1	32.0	32.0	32.0	32.0	32.3	27.7	23.8	23.8
NR_n66	3	30.9	30.9	30.9	30.9	27.9	22.3	24.3	23.8
NR_n66 ²	1	30.0	30.0	30.0	30.0	30.3	26.2	20.8	20.8
NR_n2	3	29.5	29.5	29.5	29.5	26.9	21.8	21.8	23.8
NR_n25	3	29.5	29.5	29.5	29.5	26.9	21.8	21.8	23.8
NR_n7	3	29.3	29.3	29.3	29.3	27.2	20.8	20.8	23.8
NR_n41 PC3 ²	1	30.5	30.5	30.5	30.5	27.9	23.2	22.3	19.3
NR_n41 PC2 ²	1	30.5	30.5	30.5	30.5	27.9	23.2	22.3	22.3
NR_n41 PC3	3	28.4	28.4	28.4	28.4	27.8	20.8	20.8	23.8
NR_n41 PC2	3	28.4	28.4	28.4	28.4	27.8	20.8	20.8	25.8
Remark:									
Note1: LTE Band 66/4 ant 1 only for LTE inter-band uplink CA									
Note2: LTE Band 66/7 and NR 41/66 ant 1 only for EN-DC combination									

*Pmax is used for RF tune up procedure. The maximum allowed output power is equal to Pmax + device uncertainty.

**All Plimit power levels entered in the Table correspond to average power levels after accounting for duty cycle in the case TDD modulation schemes (for e.g., GSM & LTE TDD & NR TDD).

The Plimit values, corresponding to SAR_design_target.

Maximum target power, P_{max} , is configured in NV settings in EUT to limit maximum transmitting power. This power is converted into peak power in NV settings for TDD schemes. The EUT maximum allowed output power is equal to $P_{max} + 1.0\text{dB}$ device uncertainty.

5GNR FR1 SA mode

Antenna configuration	5G FR1 SA mode
Ant 0	n71
Ant 1	n71
Ant 2	n2/7/25/66/41
Ant 3	n2/7/25/66/41

LTE Inter-band Uplink CA combination

ULCA	PCC		SCC	
	Band	ANT port	Band	ANT port
2A-4A	2	3	4	0
2A-4A	2	3	4	1
2A-4A	2	2	4	0
2A-4A	2	2	4	1
4A-2A	4	0	2	3
4A-2A	4	0	2	2
4A-2A	4	1	2	3
4A-2A	4	1	2	2
2A-66A	2	3	66	0
2A-66A	2	3	66	1
2A-66A	2	2	66	0
2A-66A	2	2	66	1
66A-2A	66	0	2	3
66A-2A	66	0	2	2
66A-2A	66	1	2	3
66A-2A	66	1	2	2
2A-12A	2	3	12	1
2A-12A	2	3	12	0
2A-12A	2	2	12	1
2A-12A	2	2	12	0
12A-2A	12	1	2	3
12A-2A	12	1	2	2
12A-2A	12	0	2	3
12A-2A	12	0	2	2
4A-12A	4	3	12	1
4A-12A	4	3	12	0



4A-12A	4	2	12	1
4A-12A	4	2	12	0
12A-4A	12	0	4	3
12A-4A	12	0	4	2
12A-4A	12	1	4	3
12A-4A	12	1	4	2
12A-66A	12	0	66	3
12A-66A	12	0	66	2
12A-66A	12	1	66	3
12A-66A	12	1	66	2
66A-12A	66	3	12	1
66A-12A	66	3	12	0
66A-12A	66	2	12	1
66A-12A	66	2	12	0

4. Power Density Characterization

The device with 5G mmW NR typically supports many beams and contains multiple mmW antenna arrays installed at different locations to achieve good coverage in the field. The power density (PD) measurement is a time-consuming test, and it is not practical to measure the power density for all the beams on all the surfaces of the device, thus a hybrid approach using electromagnetic (EM) simulation in combination with measurement is recommended for PD char generation

4.1 PD Char Table

The mmW device supports total N beams, where M out of N are single beams and the rest of (N-M) are beam pairs (where 2 single beams are excited at the same time).

The following figure outlines the PD char process.

Simulation modeling and validation

- Correlate the simulated PD distributions with measured PD distribution for the selected beams to validate simulation model



Uncertainty Budget

- Calculate the total device design uncertainty to include worst case RF tune-up accuracy and device-to-device variation



PD_design_target

Specify a power density design target, which should be less than power density regulatory limit to account for the total device design uncertainties



Worst-case housing material Influence Quantification

- Determine

$$\Delta_{\min} = \min\{\text{simulated PD@8dBm} - \text{measured PD@8dBm}\}$$
to quantify the worst-case housing influence



PD Char Generation

- Use validated simulation approach to determine input power limit for all the beams after accounting for the worst-case housing influence

4.2 Codebook for all beams

All the beams that the device supports are specified in the pre-defined codebook, and the codebook is device design specific and generated after evaluating radiation coverage from this particular device. In the field, a smartphone manages the beam selection and utilization based on this pre-defined codebook that is loaded and stored in the device.

Antenna Module 0_n258

Band	Module	Type	Beam ID_1	Beam ID_2	Feed No.
n258	0	Patch	0		1
			1		1
			6		2
			7		2
			8		2
			15		2
			16		2
			21		4
			22		4
			23		4
			24		4
			25		4
			34		4
			35		4
			36		4
			37		4
				128	1
				129	1
				134	2
				135	2
				136	2
				143	2
				144	2
				149	4
				150	4
				151	4
				152	4
				153	4
				162	4
				163	4
				164	4
				165	4
			0	128	2
			1	129	2
			15	143	4
			16	144	4
			21	149	8
			22	150	8
			23	151	8
			24	152	8
			25	153	8
			34	162	8
			35	163	8
			36	164	8
			37	165	8
			6	134	4
			7	135	4
			8	136	4

**Antenna Module 0_n261**

Band	Module	Type	Beam ID_1	Beam ID_2	Feed No.
n261	0	Patch	0		1
			1		1
			6		2
			7		2
			8		2
			15		2
			16		2
			21		4
			22		4
			23		4
			24		4
			25		4
			36		4
			37		4
			38		4
			39		4
				128	1
				129	1
				134	2
				135	2
				136	2
				143	2
				144	2
				149	4
				150	4
				151	4
				152	4
				153	4
				164	4
				165	4
				166	4
				167	4
			0	128	2
			1	129	2
			15	143	4
			16	144	4
			21	149	8
			22	150	8
			23	151	8
			24	152	8
			25	153	8
			36	164	8
			37	165	8
			38	166	8
			39	167	8
			6	134	4
			7	135	4
			8	136	4

**Antenna Module 0_n260**

Band	Module	Type	Beam ID_1	Beam ID_2	Feed No.
n260	0	Patch	0		1
			1		1
			6		2
			7		2
			8		2
			15		2
			16		2
			21		4
			22		4
			23		4
			24		4
			25		4
			36		4
			37		4
			38		4
			39		4
				128	1
				129	1
				134	2
				135	2
				136	2
				143	2
				144	2
				149	4
				150	4
				151	4
				152	4
				153	4
				164	4
				165	4
				166	4
				167	4
			0	128	2
			1	129	2
			15	143	4
			16	144	4
			21	149	8
			22	150	8
			23	151	8
			24	152	8
			25	153	8
			36	164	8
			37	165	8
			38	166	8
			39	167	8
			6	134	4
			7	135	4
			8	136	4

**Antenna Module 1_n258**

Band	Module	Type	Beam ID_1	Beam ID_2	Feed No.
n258	1	Patch	2		1
			3		1
			9		2
			10		2
			11		2
			17		2
			18		2
			26		4
			27		4
			28		4
			29		4
			38		4
			39		4
			40		4
				130	1
				131	1
				137	2
				138	2
				139	2
				145	2
				146	2
				154	4
				155	4
				156	4
				157	4
				166	4
				167	4
				168	4
			10	138	4
			11	139	4
			17	145	4
			18	146	4
			2	130	2
			26	154	8
			27	155	8
			28	156	8
			29	157	8
			3	131	2
			38	166	8
			39	167	8
			40	168	8
			9	137	4

**Antenna Module 1_n261**

Band	Module	Type	Beam ID_1	Beam ID_2	Feed No.
n261	1	Patch	2		1
			3		1
			9		2
			10		2
			11		2
			17		2
			18		2
			26		4
			27		4
			28		4
			29		4
			30		4
			40		4
			41		4
			42		4
			43		4
				130	1
				131	1
				137	2
				138	2
				139	2
				145	2
				146	2
				154	4
				155	4
				156	4
				157	4
				158	4
				168	4
				169	4
				170	4
				171	4
			10	138	4
			11	138	4
			17	145	4
			18	146	4
			2	130	2
			26	154	8
			27	155	8
			28	156	8
			29	157	8
			3	131	2
			30	158	8
			40	168	8
			41	169	8
			42	170	8
			43	171	8
			9	137	4

**Antenna Module 1_n260**

Band	Module	Type	Beam ID_1	Beam ID_2	Feed No.
n260	1	Patch	2		1
			3		1
			9		2
			10		2
			11		2
			17		2
			18		2
			26		4
			27		4
			28		4
			29		4
			30		4
			40		4
			41		4
			42		4
			43		4
				130	1
				131	1
				137	2
				138	2
				139	2
				145	2
				146	2
				154	4
				155	4
				156	4
				157	4
				158	4
				168	4
				169	4
				170	4
				171	4
			10	138	4
			11	139	4
			17	145	4
			18	146	4
			2	130	2
			26	154	8
			27	155	8
			28	156	8
			29	157	8
			3	131	2
			30	158	8
			40	168	8
			41	169	8
			42	170	8
			43	171	8
			9	137	4

**Antenna Module 2_n258**

Band	Module	Type	Beam ID_1	Beam ID_2	Feed No.
n258	2	Patch	4		1
			5		1
			12		2
			13		2
			14		2
			19		2
			20		2
			30		4
			31		4
			32		4
			33		4
			41		4
			42		4
			43		4
				132	1
				133	1
				140	2
				141	2
				142	2
				147	2
				148	2
				158	4
				159	4
				160	4
				161	4
				169	4
				170	4
				171	4
			12	140	4
			13	141	4
			14	142	4
			19	147	4
			20	148	4
			30	158	8
			31	159	8
			32	160	8
			33	161	8
			4	132	2
			41	169	8
			42	170	8
			43	171	8
			5	133	2

**Antenna Module 2_n261**

Band	Module	Type	Beam ID_1	Beam ID_2	Feed No.
n261	2	Patch	4		1
			5		1
			12		2
			13		2
			14		2
			19		2
			20		2
			31		4
			32		4
			33		4
			34		4
			35		4
			44		4
			45		4
			46		4
			47		4
				132	1
				133	1
				140	2
				141	2
				142	2
				147	2
				148	2
				159	4
				160	4
				161	4
				162	4
				163	4
				172	4
				173	4
				174	4
				175	4
			12	140	4
			13	141	4
			14	142	4
			19	147	4
			20	148	4
			31	159	8
			32	160	8
			33	161	8
			34	162	8
			35	163	8
			4	132	2
			44	172	8
			45	173	8
			46	174	8
			47	175	8
			5	133	2

**Antenna Module 2_n260**

Band	Module	Type	Beam ID_1	Beam ID_2	Feed No.
n260	2	Patch	4		1
			5		1
			12		2
			13		2
			14		2
			19		2
			20		2
			31		4
			32		4
			33		4
			34		4
			35		4
			44		4
			45		4
			46		4
			47		4
				132	1
				133	1
				140	2
				141	2
				142	2
				147	2
				148	2
				159	4
				160	4
				161	4
				162	4
				163	4
				172	4
				173	4
				174	4
				175	4
			12	140	4
			13	141	4
			14	142	4
			19	147	4
			20	148	4
			31	159	8
			32	160	8
			33	161	8
			34	162	8
			35	163	8
			4	132	2
			44	172	8
			45	173	8
			46	174	8
			47	175	8
			5	133	2

4.3 PD design target determination

To account for total uncertainty, PD_design_target should meet the criteria:


$$PD_design_target < PD_{regulatory_limit} \times 10^{\frac{-totaluncertainty}{10}}$$

For this EUT, the PD design target and the uncertainty value are listed below

n258/260/261	PD design target	Antenna Module	W/m ²
		Antenna Module 0/1/2	4.62

Item	Uncertainty dB (k=2)
Total uncertainty	2.1

4.4 Exposure positions for PD evaluation

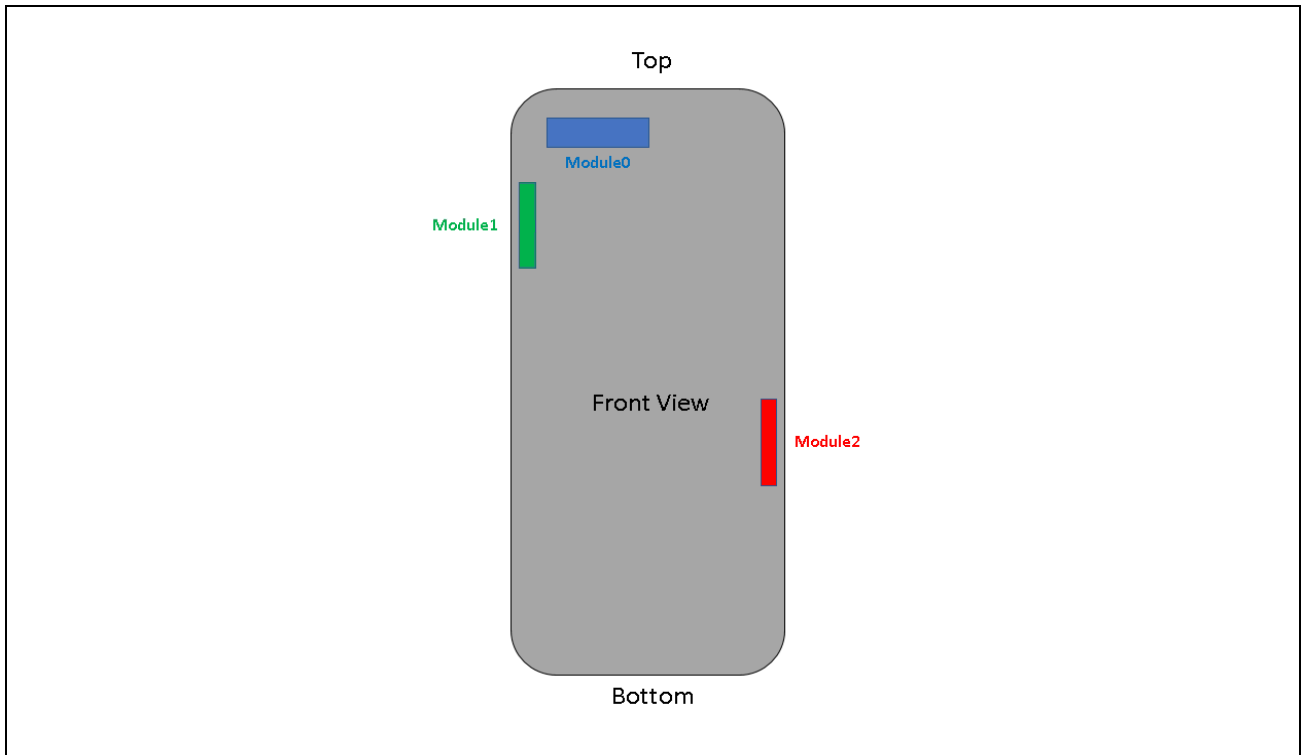

Evaluation positions

Antenna Module	Front	Back	Left	Right	Top	Bottom
	S1	S2	S3	S4	S5	S6
Module 0	v	v	v	x	v	x
Module 1	v	v	v	x	x	x
Module 2	v	v	x	v	x	x

Remark:

1. Referring to the PD simulation report for the reason of selecting surfaces/edges.
2. The exposure positions selection is based on the all edges and surfaces of the device with a transmitting antenna located within 25 mm from that surface or edge.

4.5 Simulation and modeling validation

Power density simulations of all beams and surfaces were performed by the manufacturer. Details of these simulations and modeling validation can be found in the Power Density Simulation Report. Following Table includes a summary of the validation results to support worst-case housing influence quantification in power density characterization for this model With an input power of 6 dBm for n261 and n260 band, PD measurements are conducted for at least one single beam per antenna type and per antenna module (0,1) on worst-surface(s) . PD measurements are performed at mid channel of each mmW band and with CW modulation.
PD value will be used to determine worst-case housing influence for conservative assessment

n258

antenna module	Beam ID 1	Beam ID 2	Band	Channel	Exposure Surface	Input Power Level	Measured results Savg tot 4cm ² (W/m ²)	Simulated Pd (W/m ²), averaged over 4 cm ²	Delta=Sim-Meas (dB)
Module0	24	-	n258	Middle	S2(Back)	6	9.86	15.3903	1.93
Module0	-	149	n258	Middle	S2(Back)	6	7.47	12.3762	2.19
Module1	39	-	n258	Middle	S3(Left Side)	6	6.71	11.842	2.47
Module1	-	166	n258	Middle	S3(Left Side)	6	6.68	11.8514	2.49
Module2	42	-	n258	Middle	S4(Right Side)	6	10.3	12.4387	0.82
Module2	-	161	n258	Middle	S2(Back)	6	8.17	12.8303	1.96

n260

antenna module	Beam ID 1	Beam ID 2	Band	Channel	Exposure Surface	Input Power Level	Measured results Savg tot 4cm ² (W/m ²)	Simulated Pd (W/m ²), averaged over 4 cm ²	Delta=Sim-Meas (dB)
Module0	36	-	n260	Middle	S2(Back)	6	4.88	10.2926	3.24
Module0	-	164	n260	Middle	S2(Back)	6	5.15	13.0865	4.05
Module1	27	-	n260	Middle	S3(Left Side)	6	6.47	9.07802	1.47
Module1	-	168	n260	Middle	S3(Left Side)	6	6.02	7.79917	1.12
Module2	44	-	n260	Middle	S4(Right Side)	6	7.99	9.06177	0.55
Module2	-	161	n260	Middle	S4(Right Side)	6	5.75	8.85054	1.87

n261

antenna module	Beam ID 1	Beam ID 2	Band	Channel	Exposure Surface	Input Power Level	Measured results Savg tot 4cm ² (W/m ²)	Simulated Pd (W/m ²), averaged over 4 cm ²	Delta=Sim-Meas (dB)
Module0	23	-	n261	Middle	S2(Back)	6	9.29	14.4516	1.92
Module0	-	165	n261	Middle	S2(Back)	6	7.77	9.4786	0.86
Module1	28	-	n261	Middle	S3(Left Side)	6	5.2	5.93166	0.57
Module1	-	156	n261	Middle	S3(Left Side)	6	5.58	10.0614	2.56
Module2	34	-	n261	Middle	S4(Right Side)	6	7.5	12.641	2.27
Module2	-	175	n261	Middle	S2(Back)	6	6.27	11.2236	2.53

4.6 PD Char

4.6.1 Simulated input power limit for single beams

Perform simulation at low, mid and high channel for each mmW band supported, with a given input power per active port, *sim.input.power.per.active.port* (6 dBm for this product):

1. Obtain $PD_{surface}$ value (the worst PD among all identified surfaces of the device) at all three channels for all single beams (1~M) specified in *codebook_sim*.
2. Adjust input power to determine a scaling factor at all three channels by:

$$s(i)_{low_or_mid_high} = \frac{PD\ design\ target}{sim.PD_{surface}(i)}, i = 1, 2, \dots M \quad (4)$$

3. Determine the worst-case scaling factor among low, mid and high channels:

$$s(i) = \min\{s_{low}(i), s_{mid}(i), s_{high}(i)\}, i = 1, 2, \dots M \quad (5)$$

Note: This scaling factor applies to the input power at each antenna port

4. Determine the simulated input power limit, *sim.powerlimit*, for single beam *i* by:

$$sim.\ power_{limit}(i)dBm = 10 * \log(s(i)) + sim.input.power.per.active.port, i = 1, 2, \dots M \quad (6)$$

4.6.2 Simulated input power limit for beam pairs

The relative phase between single beams of a beam pair is swepted to find the worst case PD for beam-pairs operation, and PD simulation data has taken this into consideration for beam-pair operations take consideration of the variation relative phase was reported

For beam pair, extract the E-fields and H-fields from the corresponding single beams at and high channel for each supported band and for all identified surfaces of the device.

For a given beam pair containing *beam_a* and *beam_b* with relative phase ϕ and for a given channel, determine the worst-case $\phi_{worstcase}$ which results in the highest total PD (ϕ) among all identified surfaces for this beam pair at this channel. When $\phi_{worstcase}$ is determined for all three channels, obtain the scaling factor given by the below equation for low, mid and high channels:

$$s(i)_{low_or_mid_high} = \frac{PD\ design\ target}{total.PD(\phi(i)_{worstcase})}, i = M+1, M+2, \dots N \quad (8)$$

The $\phi_{worstcase}$ varies with channel and beam pair, the lowest scaling factor among all three channels, $s(i)$, is determined for the beam pair i :

$$s(i) = \min\{s_{low}(i), s_{mid}(i), s_{high}(i)\}, i = M+1, M+2, \dots N \quad (9)$$

The simulated input power limit, $sim.power_{limit}$, for beam pair i can be determined by

$$sim.power_{limit}(i)dBm = 10 * \log(s(i)) + sim.input.power.per.active.port, i = M+1, M+2, \dots N \quad (10)$$

4.6.3 Worst-case housing influence determination

Referring to the PD simulation report for PD simulation data for all beams. For non-metal material, the material property cannot be accurately characterized at mmW frequencies. The estimated material property for the device housing is used in the simulation model, which could impact the accuracy in simulation for PD amplitude quantification. Since the housing influence on PD could vary from surface to surface where the EM field propagates through, the most underestimated surface is used to quantify the worst-case housing influence for conservative assessment.

Referring to the PD simulation report for PD simulation data for all beams, and the worst beams are selected to be tested Power density simulation for all

The mmW antenna modules are placed at different locations and only surrounding material/housing has impact on EM field propagation and in turn power density, and depending on the type of antenna array the nature of EM field propagation in the near field is different. Therefore, the worst-case housing influence is determined per antenna module and per antenna type.

For this DUT, the procedure to determine worst-case housing influence, denoted as Δ_{min} :

1. Based on PD simulation, determine one or more worst-surface(s) that contains all the highest 4cm^2 -averaged PD for each of the beams, per antenna module and per antenna type in the mid channel of each band.
2. For identified worst surface(s) per antenna module and per antenna type group,
 - a. First determine Δ_{min} based on identified worst surface(s) in Step 1, and then follow the procedures described in Section 4.6 to derive *input.power.limit* corresponding to *PD_design_target* for all the beams
 - b. Then prove all other surface(s) near-by the mmW module, i.e., surface(s) not selected in Step 1, is not required for housing material loss quantification (in other words, these nonevaluated surfaces have no influence on the determined *input.power.limit*) by:
 - i. Scale the simulated 4cm^2 -averaged PD values for all single beams to correspond to their *sim.power.limit*, and identify the worst-PD beam per each non-selected surface.
 - ii. Measure 4cm^2 -averaged PD at *input.power.limit* for the identified worst-PD beam at each non-selected surface
 - iii. Demonstrate all measured 4cm^2 -averaged PD values are below *PD_design_target*.
3. If any of the above surface(s) in Step (2.b.iii) have measured 4cm^2 -averaged PD $\geq$ *PD_design_target*, then those surfaces must be included in the Δ_{min} determination in Step (2.a), and follow the procedures in Section 4.6 to re-evaluate *input.power.limit* with these added surfaces.

Therefore, when comparing a simulated 4cm^2 -averaged PD and measured 4cm^2 -averaged PD for the above identified surfaces, the worst errors introduced when using the estimated material property in the simulation per module and per antenna type (worst out of both polarizations) is highlighted in bolded numbers in section 4.5. Thus, the worst-case housing influence, denoted as Δ_{min} (= minimum of (sim.PD – meas.PD) for the same antenna type of each module), is determined as:

Band	Antenna Module	$\Delta_{min}(dB)$	
		V Polarization	H Polarization
n258	0	1.93	2.19
	1	2.47	2.49
	2	0.82	1.96
n260	0	3.24	4.05
	1	1.47	1.12
	2	0.55	1.87
n261	0	1.92	0.86
	1	0.57	2.56
	2	2.27	2.53

Δ_{min} represents the worst case where RF exposure is underestimated the most by simulation upon using the estimated material property for glass/plastics of the housing. For conservative assessment, the Δ_{min} is used as the worst case correction and applied to each corresponding beam group to determine power limits in PD char for compliance. To ensure that condition described in Step (2.b.iii) is met, apply the correct input.power.limit to derive the PD simulated results for all beams, and select the worst beams (yellow highlighted in the PD table) for each of non-selected applicable surface(s).

The PD test results for non-selected surfaces are less than PD_design_target, and meets condition in Step (2.b.iii), thus performing Step (3) is not needed

Simulated 4cm²-averaged PD at input.power.limit
Determine the worst beam for each of non-selected surface(s)

Antenna Module 0_n258

Band	Module	Type	Beam ID_1	Beam ID_2	Feed No.	Simulated 4cm 2 SAPD (W/m 2) corresponding to PD design target			
						S1	S2	S3	S5
n258	0	Patch	0		1	0.05	4.25	0.29	0.65
			1		1	0.08	4.43	0.18	0.74
			6		2	0.15	4.30	0.20	0.81
			7		2	0.05	4.62	0.34	0.72
			8		2	0.06	4.40	0.51	0.71
			15		2	0.04	4.62	0.24	0.67
			16		2	0.11	4.40	0.26	0.79
			21		4	0.16	4.62	0.23	0.76
			22		4	0.08	4.62	0.10	1.38
			23		4	0.07	4.23	0.19	1.13
			24		4	0.04	4.59	0.20	1.03
			25		4	0.09	4.62	0.81	0.84
			34		4	0.12	4.62	0.15	1.19
			35		4	0.08	4.56	0.15	1.39
			36		4	0.04	4.44	0.14	1.05
			37		4	0.06	4.62	0.57	0.94
				128	1	0.06	4.43	0.25	0.72
				129	1	0.29	4.43	0.20	0.80
				134	2	0.26	4.30	0.16	1.01
				135	2	0.06	4.52	0.30	0.76
				136	2	0.08	4.62	0.43	0.77
				143	2	0.05	4.37	0.29	0.73
				144	2	0.08	4.60	0.44	0.67
				149	4	0.22	4.62	0.20	1.24
				150	4	0.11	4.16	0.22	1.21
				151	4	0.09	4.11	0.19	1.17
				152	4	0.10	4.62	0.48	1.18
				153	4	0.09	4.62	0.78	0.88
				162	4	0.16	4.37	0.22	1.25
				163	4	0.10	4.10	0.21	1.20
				164	4	0.09	4.29	0.18	1.22
				165	4	0.09	4.62	0.71	1.01

Antenna Module 0_n261

Band	Module	Type	Beam ID_1	Beam ID_2	Feed No.	Simulated 4cm 2 SAPD (W/m 2) corresponding to PD_design_target			
						S1	S2	S3	S5
n261	0	Patch	0		1	0.06	4.41	0.35	0.52
			1		1	0.09	4.40	0.16	0.69
			6		2	0.15	4.30	0.27	0.61
			7		2	0.05	4.37	0.18	0.61
			8		2	0.09	4.46	0.59	0.59
			15		2	0.06	4.41	0.19	0.64
			16		2	0.04	4.39	0.38	0.59
			21		4	0.19	4.62	0.30	0.94
			22		4	0.12	4.35	0.26	1.12
			23		4	0.04	4.44	0.07	0.98
			24		4	0.06	4.36	0.10	0.92
			25		4	0.09	4.28	0.81	1.03
			36		4	0.18	4.48	0.24	0.94
			37		4	0.05	4.45	0.11	1.07
			38		4	0.04	4.37	0.09	0.91
			39		4	0.07	4.21	0.50	0.75
				128	1	0.08	4.60	0.32	0.56
				129	1	0.16	4.50	0.19	0.75
				134	2	0.14	4.40	0.27	0.66
				135	2	0.05	4.46	0.25	0.58
				136	2	0.07	4.47	0.47	0.64
				143	2	0.06	4.43	0.24	0.59
				144	2	0.11	4.62	0.41	0.91
				149	4	0.12	4.17	0.29	0.83
				150	4	0.10	4.47	0.25	0.92
				151	4	0.09	4.53	0.12	0.98
				152	4	0.07	4.57	0.17	1.05
				153	4	0.15	4.62	0.46	0.74
				164	4	0.12	4.24	0.36	0.86
				165	4	0.08	4.53	0.19	0.97
				166	4	0.08	4.58	0.13	0.97
				167	4	0.06	4.62	0.61	1.09

Antenna Module 0_n260

Band	Module	Type	Beam ID_1	Beam ID_2	Feed No.	Simulated 4cm 2 SAPD (W/m 2) corresponding to PD_design_target			
						S1	S2	S3	S5
n260	0	Patch	0		1	0.02	4.53	0.34	0.75
			1		1	0.02	4.62	0.24	0.44
			6		2	0.02	4.62	0.46	0.40
			7		2	0.04	3.96	0.28	0.92
			8		2	0.01	4.62	0.40	0.53
			15		2	0.02	4.62	0.46	0.49
			16		2	0.02	4.51	0.43	0.50
			21		4	0.02	4.62	0.46	0.48
			22		4	0.02	4.62	0.53	0.72
			23		4	0.05	4.51	0.38	0.70
			24		4	0.02	4.62	0.38	0.64
			25		4	0.02	4.54	0.55	0.53
			36		4	0.02	4.62	0.54	0.57
			37		4	0.03	4.62	0.29	0.63
			38		4	0.03	4.29	0.28	0.72
			39		4	0.02	4.62	0.46	0.49
				128	1	0.04	4.62	0.33	0.66
				129	1	0.02	4.62	0.28	0.45
				134	2	0.03	4.44	0.45	0.46
				135	2	0.02	4.62	0.20	0.50
				136	2	0.02	4.45	0.50	0.50
				143	2	0.02	4.55	0.48	0.42
				144	2	0.02	4.62	0.39	0.42
				149	4	0.02	4.62	0.66	0.52
				150	4	0.03	4.50	0.33	0.63
				151	4	0.04	4.54	0.38	0.80
				152	4	0.02	4.62	0.43	0.70
				153	4	0.02	4.62	0.71	0.68
				164	4	0.02	4.62	0.85	0.56
				165	4	0.03	4.62	0.30	0.58
				166	4	0.02	4.62	0.23	0.87
				167	4	0.02	4.62	0.68	0.52

**Antenna Module 1_n258**

Band	Module	Type	Beam ID_1	Beam ID_2	Feed No.	Simulated 4cm 2 SAPD (W/m 2) corresponding to PD_design_target		
						S1	S2	S3
n258	1	Patch	2		1	0.74	4.62	4.32
			3		1	0.82	4.29	4.62
			9		2	0.70	4.62	4.38
			10		2	1.11	4.55	4.62
			11		2	1.10	4.56	4.62
			17		2	1.16	4.62	4.56
			18		2	1.21	4.62	4.59
			26		4	0.81	4.62	3.79
			27		4	0.95	4.60	4.62
			28		4	1.17	4.32	4.62
			29		4	1.34	4.62	4.59
			38		4	0.89	4.62	4.31
			39		4	0.99	4.41	4.62
			40		4	1.30	4.39	4.62
				130	1	1.13	4.20	4.50
				131	1	1.11	4.62	4.39
				137	2	1.14	4.62	4.57
				138	2	0.84	4.26	4.62
				139	2	0.89	3.91	3.92
				145	2	1.02	4.28	4.62
				146	2	0.68	4.31	4.43
				154	4	1.17	4.37	4.62
				155	4	1.01	4.29	4.62
				156	4	0.85	4.62	4.40
				157	4	1.03	4.40	3.72
				166	4	1.07	4.38	4.62
				167	4	0.94	4.38	4.62
				168	4	0.85	4.62	3.98

Antenna Module 1_n261

Band	Module	Type	Beam ID_1	Beam ID_2	Feed No.	Simulated 4cm 2 SAPD (W/m 2) corresponding to PD_design_target		
						S1	S2	S3
n261	1	Patch	2		1	0.88	4.45	4.60
			3		1	0.99	4.08	4.46
			9		2	1.06	4.30	4.51
			10		2	0.93	4.29	4.62
			11		2	1.16	4.56	4.54
			17		2	0.99	4.32	4.45
			18		2	1.28	3.81	4.44
			26		4	1.47	4.36	4.57
			27		4	0.88	4.04	4.48
			28		4	1.13	3.95	4.51
			29		4	1.08	4.18	4.54
			30		4	1.44	3.89	4.62
			40		4	0.91	4.43	4.12
			41		4	0.97	3.96	4.54
			42		4	1.09	4.02	4.49
			43		4	1.22	4.15	4.61
				130	1	1.11	3.55	4.46
				131	1	0.73	4.38	4.52
				137	2	1.14	3.62	4.56
				138	2	1.01	3.95	4.45
				139	2	0.94	3.94	4.46
				145	2	1.13	3.73	4.48
				146	2	0.94	4.06	4.51
				154	4	1.16	3.96	4.49
				155	4	1.08	3.88	4.42
				156	4	1.02	3.85	4.41
				157	4	0.80	4.20	4.54
				158	4	1.14	4.62	4.60
				168	4	1.19	4.10	4.54
				169	4	1.05	3.86	4.41
				170	4	0.84	3.88	4.38
				171	4	0.69	4.54	4.58

Antenna Module 1_n260

Band	Module	Type	Beam ID_1	Beam ID_2	Feed No.	Simulated 4cm 2 SAPD (W/m 2) corresponding to PD_design_target		
						S1	S2	S3
n260	1	Patch	2		1	1.04	3.56	4.59
			3		1	1.18	3.08	4.62
			9		2	1.06	3.81	4.62
			10		2	1.51	3.87	4.35
			11		2	0.65	3.47	4.62
			17		2	1.00	3.66	4.62
			18		2	1.09	3.27	4.62
			26		4	1.06	4.02	4.62
			27		4	0.99	3.00	4.62
			28		4	1.31	3.28	4.11
			29		4	1.46	3.96	4.60
			30		4	1.04	3.21	4.62
			40		4	1.10	3.99	4.62
			41		4	1.11	3.16	4.06
			42		4	1.51	3.47	4.35
			43		4	1.12	3.80	4.55
				130	1	1.02	3.15	4.11
				131	1	0.77	3.86	3.86
				137	2	1.03	2.86	4.55
				138	2	1.01	4.05	4.44
				139	2	1.15	3.49	4.49
				145	2	1.00	3.25	4.42
				146	2	1.03	2.89	4.58
				154	4	1.19	3.20	4.53
				155	4	1.12	3.86	4.13
				156	4	1.22	3.63	4.20
				157	4	0.85	3.35	4.24
				158	4	0.98	3.72	4.02
				168	4	1.32	3.39	4.62
				169	4	1.08	3.92	4.21
				170	4	1.01	3.28	3.84
				171	4	1.17	3.50	4.41

Antenna Module 2_n258

Band	Module	Type	Beam ID_1	Beam ID_2	Feed No.	Simulated 4cm 2 SAPD (W/m 2) corresponding to PD_design target		
						S1	S2	S4
n258	2	Patch	4		1	1.72	2.60	3.99
			5		1	1.71	2.50	4.26
			12		2	1.67	3.05	4.33
			13		2	2.19	2.73	4.48
			14		2	2.28	2.61	4.46
			19		2	2.00	2.93	4.47
			20		2	1.98	2.42	4.04
			30		4	1.95	2.96	4.47
			31		4	2.14	2.68	4.31
			32		4	2.26	2.37	4.17
			33		4	1.92	2.53	4.12
			41		4	2.07	2.80	4.44
			42		4	2.32	2.49	4.29
			43		4	2.03	2.58	4.37
				132	1	0.22	3.88	3.42
				133	1	0.28	4.14	3.64
				140	2	0.30	3.88	3.49
				141	2	0.31	4.28	4.02
				142	2	0.39	4.32	3.76
				147	2	0.34	4.62	4.24
				148	2	0.38	4.62	4.47
				158	4	0.42	4.62	4.00
				159	4	0.38	4.36	4.24
				160	4	0.44	4.62	4.56
				161	4	0.46	4.62	4.15
				169	4	0.42	4.62	4.46
				170	4	0.42	4.47	4.39
				171	4	0.46	4.62	4.43

**Antenna Module 2_n261**

Band	Module	Type	Beam ID_1	Beam ID_2	Feed No.	Simulated 4cm 2 SAPD (W/m 2) corresponding to PD_design target		
						S1	S2	S4
n261	2	Patch	4		1	1.70	2.21	4.50
			5		1	1.63	2.36	4.47
			12		2	1.87	2.27	4.60
			13		2	2.20	2.60	4.62
			14		2	1.99	2.49	4.57
			19		2	2.27	2.52	4.62
			20		2	2.12	2.65	4.62
			31		4	2.20	2.22	4.60
			32		4	2.20	2.56	4.48
			33		4	2.04	2.72	4.42
			34		4	2.04	2.76	4.57
			35		4	2.06	2.04	4.31
			44		4	2.19	2.33	4.62
			45		4	2.08	2.67	4.42
			46		4	2.04	2.73	4.48
			47		4	2.04	2.67	4.62
				132	1	0.27	4.43	4.08
				133	1	0.25	4.62	4.22
				140	2	0.33	4.51	4.13
				141	2	0.38	4.58	4.47
				142	2	0.38	4.56	4.23
				147	2	0.34	4.62	4.45
				148	2	0.41	4.49	4.43
				159	4	0.40	4.62	4.18
				160	4	0.41	4.62	4.54
				161	4	0.42	4.53	4.62
				162	4	0.46	4.61	4.62
				163	4	0.45	4.52	4.28
				172	4	0.42	4.59	4.24
				173	4	0.41	4.57	4.62
				174	4	0.41	4.57	4.62
				175	4	0.47	4.60	4.50

Antenna Module 2_n260

Band	Module	Type	Beam ID_1	Beam ID_2	Feed No.	Simulated 4cm 2 SAPD (W/m 2) corresponding to PD_design target		
						S1	S2	S4
n260	2	Patch	4		1	1.22	3.21	4.62
			5		1	1.24	3.14	4.56
			12		2	0.92	2.56	4.41
			13		2	1.55	3.68	4.50
			14		2	1.35	2.30	4.48
			19		2	1.32	2.53	4.62
			20		2	1.02	2.41	4.44
			31		4	1.22	2.38	4.56
			32		4	1.49	2.67	4.49
			33		4	1.72	3.78	4.62
			34		4	1.43	2.62	4.28
			35		4	1.36	2.29	4.44
			44		4	1.31	2.21	4.62
			45		4	1.77	3.84	4.62
			46		4	1.80	3.69	4.62
			47		4	1.26	2.01	4.43
				132	1	0.36	4.58	4.23
				133	1	0.41	4.25	4.02
				140	2	0.40	4.62	3.96
				141	2	0.37	4.04	3.99
				142	2	0.29	4.17	3.67
				147	2	0.44	4.38	3.95
				148	2	0.31	4.12	3.68
				159	4	0.40	4.39	3.83
				160	4	0.44	3.82	3.75
				161	4	0.41	4.10	4.12
				162	4	0.37	4.32	3.87
				163	4	0.41	4.25	3.47
				172	4	0.38	4.62	3.99
				173	4	0.45	3.88	4.09
				174	4	0.38	3.99	3.80
				175	4	0.31	4.62	3.88

4cm²-averaged PD for the selected beams on non-selected surfaces for Δ_{min} determination
n258

antenna module	Beam ID 1	Beam ID 2	Band	Channel	Exposure Surface	Input Power limit	Test separation	modulation	Measured results Savg tot 4cm ² (W/m2)
Module0	-	129	n258	Middle	S1(Front)	9.24	2mm	CW	0.097
Module0	25	-	n258	Middle	S3(Left Side)	2.79	2mm	CW	0.987
Module0	35	-	n258	Middle	S5(Top Side)	2.62	2mm	CW	0.894
Module1	29	-	n258	Middle	S1(Front)	5.03	2mm	CW	1.24
Module1	-	131	n258	Middle	S2(Back)	12.22	2mm	CW	3.11
Module2	42	-	n258	Middle	S1(Front)	1.7	2mm	CW	0.859
Module2	-	158	n258	Middle	S2(Back)	4.32	2mm	CW	3.25

n261

antenna module	Beam ID 1	Beam ID 2	Band	Channel	Exposure Surface	Input Power limit	Test separation	modulation	Measured results Savg tot 4cm ² (W/m2)
Module0	23	-	n260	Middle	S1(Front)	5.51	2mm	CW	0.025
Module0	-	164	n260	Middle	S3(Left Side)	3.24	2mm	CW	0.464
Module0	7	-	n260	Middle	S5(Top Side)	7.76	2mm	CW	0.682
Module1	42	-	n260	Middle	S1(Front)	4.77	2mm	CW	0.522
Module1	-	138	n260	Middle	S2(Back)	9.01	2mm	CW	3.03
Module2	46	-	n260	Middle	S1(Front)	7.27	2mm	CW	1.57
Module2	-	172	n260	Middle	S2(Back)	5.37	2mm	CW	3.35

n260

antenna module	Beam ID 1	Beam ID 2	Band	Channel	Exposure Surface	Input Power limit	Test separation	modulation	Measured results Savg tot 4cm ² (W/m2)
Module0	21	-	n261	Middle	S1(Front)	5.69	2mm	CW	0.114
Module0	25	-	n261	Middle	S3(Left Side)	5.91	2mm	CW	1.06
Module0	22	-	n261	Middle	S5(Top Side)	4.91	2mm	CW	1.17
Module1	26	-	n261	Middle	S1(Front)	5.98	2mm	CW	0.539
Module1	-	158	n261	Middle	S2(Back)	5.91	2mm	CW	2.47
Module2	19	-	n261	Middle	S1(Front)	5.98	2mm	CW	0.383
Module2	-	133	n261	Middle	S2(Back)	9.31	2mm	CW	2.72

4.7 PD Char

This section describes the PD char generation that complies with the *PD_design_target* and is in compliance with the regulatory power density limit.

4.7.1 PD char generation

Ideally, if there is no uncertainty associated with hardware as described in Section 4.4, after accounting for the housing influence (Δ_{min}), *input.power.limit(i)*, for beam *i* can be obtained:

$$input.power.limit(i) = 6 \text{ dBm} + 10 * \log(s(i)) + \Delta_{min}, i \text{ in all beams (11)}$$

If simulation overestimates the housing influence, then Δ_{min} (= minimum {simulated PD – measured PD}) is negative, which means that the measured PD would be higher than the simulated PD. The input power to antenna elements determined via simulation must be decreased for compliance.

Similarly, if simulation underestimates loss, then Δ_{min} is positive (measured PD would be lower than the simulated value). Input power to antenna elements determined via simulation can be increased and still be PD compliant.

In reality, the hardware design has uncertainty which must be properly considered in equation (11). In Section 4.7, the TxAGC uncertainty at reference power level (6dBm in report) is embedded in the process of Δ_{min} determination and should be removed to avoid double counting this uncertainty.

If -TxAGC uncertainty at reference power level < Δ_{min} < TxAGC uncertainty at reference power level,

$$Input.power.limit(i) = sim.power_{limit}(i), i = 1, 2, \dots, N \quad (12)$$

else if Δ_{min} < -TxAGC uncertainty at reference power level,

$$Input.power.limit(i) = sim.power_{limit}(i) + (\Delta_{min} + TxAGC \text{ uncertainty}), i = 1, 2, \dots, N \quad (13)$$

else if Δ_{min} > TxAGC uncertainty at reference power level,

$$Input.power.limit(i) = sim.power_{limit}(i) + (\Delta_{min} - TxAGC \text{ uncertainty}), i = 1, 2, \dots, N \quad (14)$$

The input power limit is derived and listed in the table below

V Polarization				
Band	Antenna Module	Δ_{min} (dB)	TxAGC uncertainty (dB)	Input.power.limit (dBm)
n258	0	1.93	0.5	$6 + 10 * \log(s(i)) + 1.43$
	1	2.47	0.5	$6 + 10 * \log(s(i)) + 1.97$
	2	0.82	0.5	$6 + 10 * \log(s(i)) + 0.32$
n260	0	3.24	0.5	$6 + 10 * \log(s(i)) + 2.74$
	1	1.47	0.5	$6 + 10 * \log(s(i)) + 0.62$
	2	0.55	0.5	$6 + 10 * \log(s(i)) + 0.05$
n261	0	1.92	0.5	$6 + 10 * \log(s(i)) + 0.36$
	1	0.57	0.5	$6 + 10 * \log(s(i)) + 0.07$
	2	2.27	0.5	$6 + 10 * \log(s(i)) + 1.77$

H Polarization				
Band	Antenna Module	Δ_{min} (dB)	TxAGC uncertainty (dB)	Input.power.limit (dBm)
n258	0	2.19	0.5	$6 + 10 * \log(s(i)) + 1.69$
	1	2.49	0.5	$6 + 10 * \log(s(i)) + 1.99$
	2	1.96	0.5	$6 + 10 * \log(s(i)) + 1.46$
n260	0	4.05	0.5	$6 + 10 * \log(s(i)) + 3.55$
	1	1.12	0.5	$6 + 10 * \log(s(i)) + 0.62$
	2	1.87	0.5	$6 + 10 * \log(s(i)) + 1.37$
n261	0	0.86	0.5	$6 + 10 * \log(s(i)) + 0.36$
	1	2.56	0.5	$6 + 10 * \log(s(i)) + 2.06$
	2	2.53	0.5	$6 + 10 * \log(s(i)) + 2.03$

4.7.2 PD char Table

Combining the information in previous sections, PD char is derived and listed below

Antenna Module 0_n258

Band	Module	Type	Beam ID_1	Beam ID_2	Feed No.	Input power limit(dBm)
n258	0	Patch	0		1	8.14
			1		1	8.22
			6		2	6.05
			7		2	5.50
			8		2	5.72
			15		2	5.68
			16		2	5.01
			21		4	3.78
			22		4	2.77
			23		4	2.22
			24		4	2.18
			25		4	2.79
			34		4	3.10
			35		4	2.62
			36		4	2.35
			37		4	2.33
				128	1	8.90
				129	1	9.24
				134	2	5.88
				135	2	5.61
				136	2	5.80
				143	2	5.55
				144	2	6.67
				149	4	3.41
				150	4	3.08
				151	4	3.06
				152	4	3.64
				153	4	4.33
				162	4	3.24
				163	4	3.01
				164	4	3.23
				165	4	3.90
			0	128	2	4.90
			1	129	2	5.23
			15	143	4	2.09
			16	144	4	2.43
			21	149	8	-0.34
			22	150	8	-0.33
			23	151	8	-0.78
			24	152	8	-0.61
			25	153	8	-0.34
			34	162	8	-0.53
			35	163	8	-0.58
			36	164	8	-0.58
			37	165	8	-0.61
			6	134	4	2.42
			7	135	4	1.83
			8	136	4	2.02

**Antenna Module 0_n261**

Band	Module	Type	Beam ID_1	Beam ID_2	Feed No.	Input power limit(dBm)
n261	0	Patch	0		1	9.55
			1		1	9.60
			6		2	8.02
			7		2	7.16
			8		2	7.46
			15		2	7.31
			16		2	7.01
			21		4	5.69
			22		4	4.91
			23		4	3.61
			24		4	3.77
			25		4	5.91
			36		4	5.41
			37		4	3.97
			38		4	3.64
			39		4	4.21
				128	1	10.78
				129	1	11.22
				134	2	9.00
				135	2	7.47
				136	2	8.08
				143	2	7.60
				144	2	8.55
				149	4	5.90
				150	4	5.01
				151	4	4.96
				152	4	5.30
				153	4	7.07
				164	4	5.63
				165	4	4.94
				166	4	5.01
				167	4	6.58
			0	128	2	6.29
			1	129	2	6.78
			15	143	4	3.84
			16	144	4	4.04
			21	149	8	1.58
			22	150	8	1.22
			23	151	8	0.53
			24	152	8	0.84
			25	153	8	2.63
			36	164	8	1.64
			37	165	8	0.76
			38	166	8	0.60
			39	167	8	1.74
			6	134	4	4.83
			7	135	4	3.67
			8	136	4	3.98

**Antenna Module 0_n260**

Band	Module	Type	Beam ID_1	Beam ID_2	Feed No.	Input power limit(dBm)
n260	0	Patch	0		1	10.00
			1		1	9.13
			6		2	7.06
			7		2	7.76
			8		2	6.28
			15		2	7.23
			16		2	7.18
			21		4	3.97
			22		4	4.31
			23		4	5.51
			24		4	4.35
			25		4	4.17
			36		4	3.94
			37		4	4.58
			38		4	4.87
			39		4	4.19
				128	1	8.64
				129	1	9.04
				134	2	5.68
				135	2	7.34
				136	2	6.44
				143	2	5.66
				144	2	6.54
				149	4	3.52
				150	4	3.82
				151	4	4.41
				152	4	3.63
				153	4	3.42
				164	4	3.24
				165	4	4.34
				166	4	3.77
				167	4	3.34
			0	128	2	5.27
			1	129	2	5.16
			15	143	4	2.50
			16	144	4	3.58
			21	149	8	-0.08
			22	150	8	0.21
			23	151	8	0.86
			24	152	8	0.17
			25	153	8	0.07
			36	164	8	-0.11
			37	165	8	0.34
			38	166	8	0.24
			39	167	8	-0.14
			6	134	4	2.26
			7	135	4	3.92
			8	136	4	2.21

**Antenna Module 1_n258**

Band	Module	Type	Beam ID_1	Beam ID_2	Feed No.	Input power limit(dBm)
n258	1	Patch	2		1	9.39
			3		1	10.10
			9		2	6.57
			10		2	7.76
			11		2	7.91
			17		2	8.44
			18		2	8.00
			26		4	4.81
			27		4	4.07
			28		4	4.06
			29		4	5.03
			38		4	4.37
			39		4	3.88
			40		4	4.69
				130	1	10.84
				131	1	12.22
				137	2	7.59
				138	2	6.65
				139	2	8.28
				145	2	6.89
				146	2	6.79
				154	4	4.13
				155	4	3.91
				156	4	4.22
				157	4	6.58
				166	4	3.90
				167	4	4.01
				168	4	5.04
			10	138	4	3.37
			11	139	4	4.58
			17	145	4	3.83
			18	146	4	3.17
			2	130	2	6.18
			26	154	8	0.56
			27	155	8	0.66
			28	156	8	0.56
			29	157	8	1.20
			3	131	2	7.01
			38	166	8	0.56
			39	167	8	0.57
			40	168	8	0.57
			9	137	4	4.00

**Antenna Module 1_n261**

Band	Module	Type	Beam ID_1	Beam ID_2	Feed No.	Input power limit(dBm)
n261	1	Patch	2		1	9.64
			3		1	9.43
			9		2	7.99
			10		2	7.27
			11		2	7.58
			17		2	6.92
			18		2	6.79
			26		4	5.98
			27		4	3.91
			28		4	3.60
			29		4	3.86
			30		4	5.00
			40		4	5.25
			41		4	3.74
			42		4	3.61
			43		4	4.30
				130	1	8.68
				131	1	9.57
				137	2	6.54
				138	2	5.89
				139	2	6.91
				145	2	5.93
				146	2	6.41
				154	4	4.82
				155	4	3.55
				156	4	3.04
				157	4	3.80
				158	4	5.91
				168	4	4.17
				169	4	3.32
				170	4	3.22
				171	4	4.71
			10	138	4	2.88
			11	138	4	3.28
			17	145	4	2.62
			18	146	4	3.19
			2	130	2	5.43
			26	154	8	2.11
			27	155	8	0.10
			28	156	8	-0.41
			29	157	8	0.21
			3	131	2	5.28
			30	158	8	1.34
			40	168	8	1.02
			41	169	8	-0.21
			42	170	8	-0.27
			43	171	8	0.53
			9	137	4	4.06

**Antenna Module 1_n260**

Band	Module	Type	Beam ID_1	Beam ID_2	Feed No.	Input power limit(dBm)
n260	1	Patch	2		1	9.88
			3		1	8.94
			9		2	6.26
			10		2	7.97
			11		2	6.34
			17		2	5.76
			18		2	6.09
			26		4	4.08
			27		4	3.36
			28		4	4.48
			29		4	4.99
			30		4	3.38
			40		4	3.82
			41		4	4.43
			42		4	4.77
			43		4	3.82
				130	1	10.68
				131	1	11.91
				137	2	7.83
				138	2	9.01
				139	2	8.55
				145	2	7.77
				146	2	7.93
				154	4	5.97
				155	4	6.16
				156	4	6.53
				157	4	6.40
				158	4	6.06
				168	4	5.79
				169	4	6.55
				170	4	6.45
				171	4	5.73
			10	138	4	3.69
			11	139	4	3.64
			17	145	4	2.61
			18	146	4	3.15
			2	130	2	5.70
			26	154	8	0.10
			27	155	8	0.60
			28	156	8	1.06
			29	157	8	1.05
			3	131	2	5.84
			30	158	8	0.40
			40	168	8	-0.11
			41	169	8	0.71
			42	170	8	1.20
			43	171	8	0.01
			9	137	4	2.43

**Antenna Module 2_n258**

Band	Module	Type	Beam ID_1	Beam ID_2	Feed No.	Input power limit(dBm)
n258	2	Patch	4		1	7.80
			5		1	8.45
			12		2	6.00
			13		2	6.23
			14		2	5.90
			19		2	6.64
			20		2	4.63
			30		4	3.77
			31		4	2.27
			32		4	1.84
			33		4	2.96
			41		4	2.88
			42		4	1.70
			43		4	3.16
				132	1	9.56
				133	1	10.38
				140	2	6.70
				141	2	6.16
				142	2	6.85
				147	2	6.12
				148	2	5.82
				158	4	4.32
				159	4	3.75
				160	4	3.66
				161	4	3.02
				169	4	3.94
				170	4	3.84
				171	4	3.32
			12	140	4	3.01
			13	141	4	2.67
			14	142	4	3.28
			19	147	4	2.74
			20	148	4	2.29
			30	158	8	0.33
			31	159	8	-0.58
			32	160	8	-0.81
			33	161	8	-0.61
			4	132	2	5.16
			41	169	8	-0.22
			42	170	8	-0.98
			43	171	8	-0.27
			5	133	2	5.65

**Antenna Module 2_n261**

Band	Module	Type	Beam ID_1	Beam ID_2	Feed No.	Input power limit(dBm)
n261	2	Patch	4		1	7.38
			5		1	7.59
			12		2	5.08
			13		2	5.69
			14		2	5.03
			19		2	5.98
			20		2	5.50
			31		4	4.32
			32		4	1.97
			33		4	1.52
			34		4	1.63
			35		4	3.68
			44		4	3.14
			45		4	1.51
			46		4	1.71
			47		4	2.14
				132	1	8.41
				133	1	9.31
				140	2	6.09
				141	2	6.42
				142	2	6.74
				147	2	6.53
				148	2	6.39
				159	4	4.23
				160	4	4.03
				161	4	3.65
				162	4	3.64
				163	4	3.49
				172	4	4.04
				173	4	3.87
				174	4	3.68
				175	4	3.50
			12	140	4	1.69
			13	141	4	2.14
			14	142	4	2.32
			19	147	4	2.21
			20	148	4	2.26
			31	159	8	0.09
			32	160	8	-0.76
			33	161	8	-1.23
			34	162	8	-1.22
			35	163	8	0.23
			4	132	2	4.15
			44	172	8	-0.42
			45	173	8	-1.00
			46	174	8	-1.17
			47	175	8	-0.77
			5	133	2	4.83

**Antenna Module 2_n260**


Band	Module	Type	Beam ID_1	Beam ID_2	Feed No.	Input power limit(dBm)
n260	2	Patch	4		1	10.53
			5		1	11.34
			12		2	7.09
			13		2	9.33
			14		2	8.15
			19		2	7.42
			20		2	7.50
			31		4	5.26
			32		4	5.09
			33		4	7.26
			34		4	5.73
			35		4	4.68
			44		4	4.84
			45		4	7.34
			46		4	7.27
			47		4	4.70
				132	1	10.95
				133	1	12.37
				140	2	8.76
				141	2	6.79
				142	2	6.90
				147	2	7.62
				148	2	6.96
				159	4	5.42
				160	4	4.79
				161	4	4.70
				162	4	5.30
				163	4	5.47
				172	4	5.37
				173	4	4.82
				174	4	4.88
				175	4	5.47
			12	140	4	4.48
			13	141	4	4.33
			14	142	4	3.88
			19	147	4	4.13
			20	148	4	4.06
			31	159	8	1.61
			32	160	8	1.62
			33	161	8	2.04
			34	162	8	2.16
			35	163	8	1.70
			4	132	2	7.46
			44	172	8	1.27
			45	173	8	1.91
			46	174	8	1.93
			47	175	8	1.68
			5	133	2	7.95

5. PD Test Setup

5.1 PD Test – System Setup

The system to be used for the near field power density measurement



- SPEAG DASY6 system
 - SPEAG cDASY6 5G module software
 - EUmmWVx probe
- 5G Phantom cover

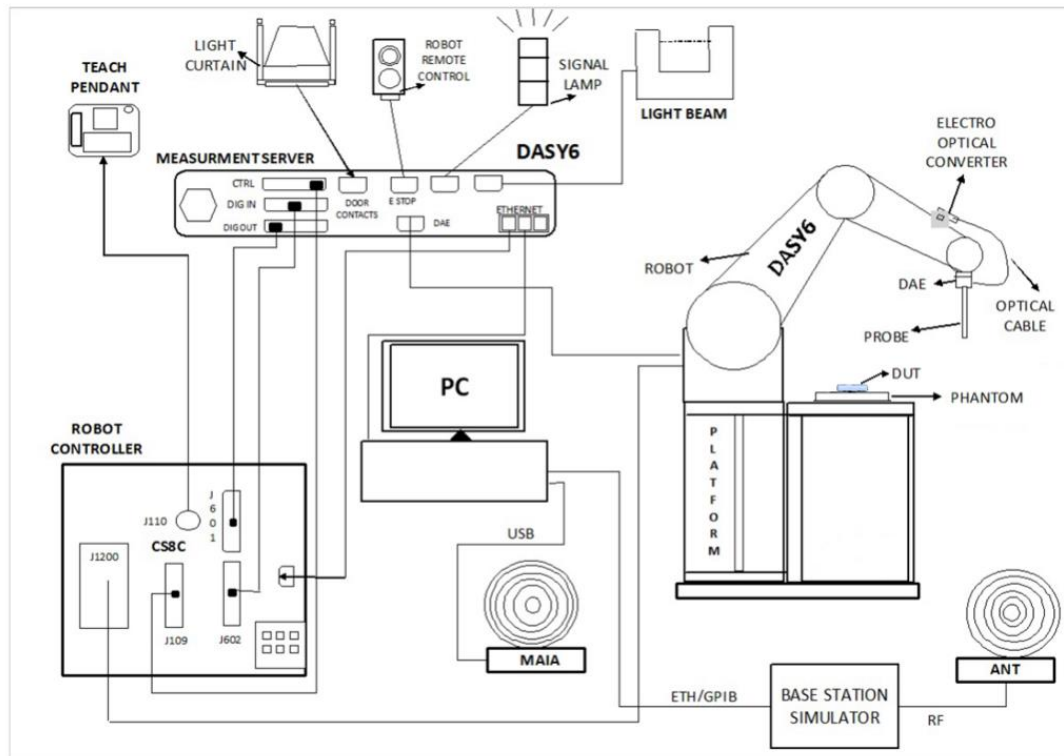

5.2 EUmmWave Probe / E-Field 5G Probe

The probe design allows measurements at distances as small as 2 mm from the sensors to the surface of the device under test (DUT). The typical sensor to probe tip distance is 1.5 mm.


Frequency	750 MHz – 110 GHz
Probe Overall Length	320 mm
Probe Body Diameter	8.0 mm
Tip Length	23.0 mm
Tip Diameter	8.0 mm
Probe's two dipoles length	0.9 mm – Diode loaded
Dynamic Range	< 20 V/m - 10000 V/m with PRE-10 (min < 50 V/m - 3000 V/m)
Position Precision	< 0.2 mm
Distance between diode sensors and probe's tip	1.5 mm
Minimum Mechanical separation between probe tip and a Surface	0.5 mm
Applications	E-field measurements of 5G devices and other mm-wave transmitters operating above 10GHz in < 2 mm distance from device (free-space) Power density, H-field and far-field analysis using total field reconstruction.
Compatibility	cDASY6 + 5G-Module SW1.0 and higher

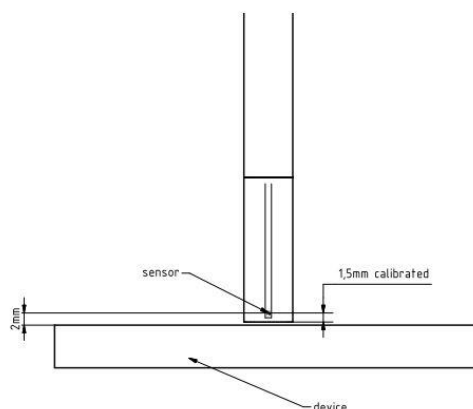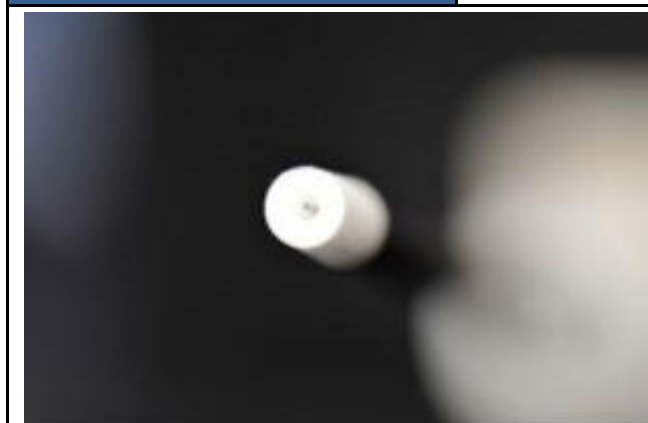

5.3 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

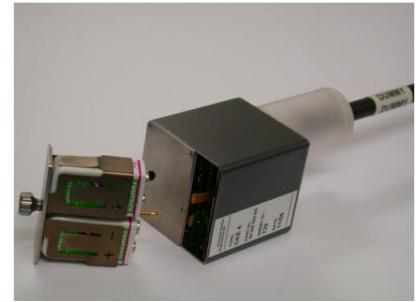

5.4 Scan configuration


Fine-resolution scans on 2 different planes are performed to reconstruct the E- and H-fields as well as the power density; the z-distance between the 2 planes is set to $\lambda/4$.

The (x, y) grid step is also set $\lambda/4$, the grid extent is set to sufficiently large to identify the field pattern and the peak.

5.5 System Verification Source

The System Verification sources at 30 GHz and above comprise horn-antennas and very stable signal generators.

Model	Ka-band horn antenna
Calibrated frequency:	30 GHz at 10mm from the case surface
Frequency accuracy	± 100 MHz
E-field polarization	linear
Harmonics	-20 dBc
Total radiated power	14 dBm
Power stability	0.05 dB
Power consumption	5 W
Size	00 x 100 x 100 mm
Weight	1 kg

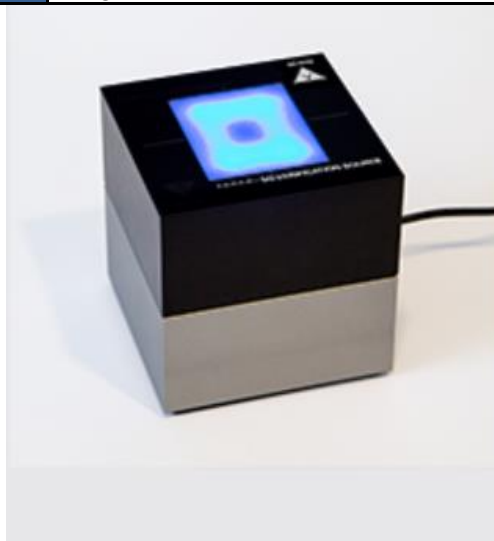



5.6 Power Density System Verification

The system performance check verifies that the system operates within its specifications.

The EUT is replaced by a calibrated source, the same spatial resolution, measurement region and the test separation used in the calibration was applied to system check. Through visual inspection into the measured power density distribution, both spatially (shape) and numerically (level) have no noticeable difference. The measured results should be within 0.66B of the calibrated targets.

Frequency [GHz]	Grid step	Grid extent X/Y [mm]	Measurement points
10	$0.25 \left(\frac{\lambda}{4}\right)$	120/120	16×16
30	$0.25 \left(\frac{\lambda}{4}\right)$	60/60	24×24
60	$0.25 \left(\frac{\lambda}{4}\right)$	32.5/32.5	26×26
90	$0.25 \left(\frac{\lambda}{4}\right)$	30/30	36×36

Settings for measurement of verification sources

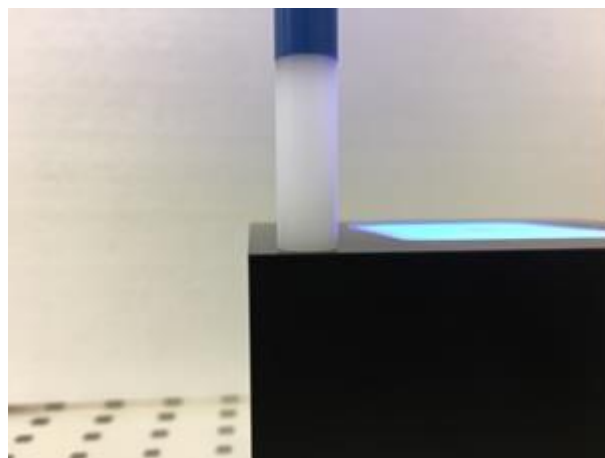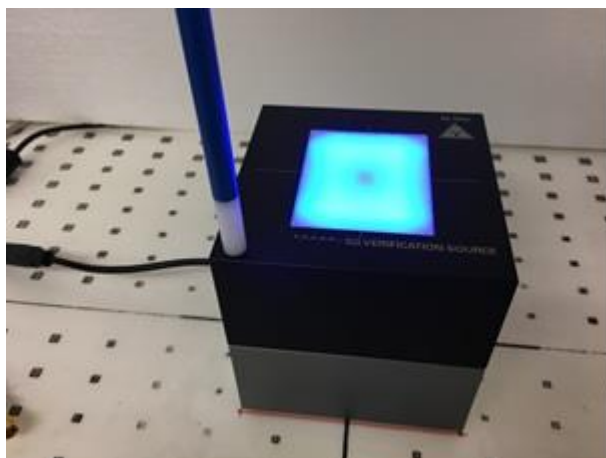

Verification Setup photo

5.7 System Verification Results

Frequency (GHz)	5G Verification Source	Probe S/N	DAE S/N	Distance (mm)	Measured 4 cm ² (W/m ²)	Targeted 4 cm ² (W/m ²)	Deviation (dB)	Date
30G	30GHz_1007	9441	577	10mm	32.3	36.3	-0.51	2020/12/12
30G	30GHz_1007	9441	376	10mm	38.8	36.3	0.29	2021/1/4
30G	30GHz_1007	9441	376	10mm	32.5	36.3	-0.48	2021/1/12

6. Uncertainty Assessment

The budget is valid for evaluation distances $> \lambda/2\pi$. For specific tests and configurations, the Uncertainty could be considerably smaller.

Preliminary Module mmWave Uncertainty Budget Evaluation Distances to the Antennas $> \lambda / 2\pi$						
Error Description	Uncertainty Value ($\pm$ dB)	Probability	Divisor	(Ci)	Standard Uncertainty ($\pm$ dB)	(Vi) Veff
Measurement System						
Probe Calibration	0.49	N	1	1	0.49	∞
Hemispherical Isotropy	0.50	R	1.732	1	0.29	∞
Linearity	0.20	R	1.732	0	0.12	∞
System Detection Limits	0.04	R	1.732	1	0.02	∞
Modulation Response	0.40	R	1.732	1	0.23	∞
Readout Electronics	0.03	N	1	1	0.03	∞
Response Time	0.00	R	1.732	1	0.00	∞
Integration Time	0.00	R	1.732	1	0.00	∞
RF Ambient Noise	0.2	R	1.732	1	0.12	∞
RF Ambient Reflections	0.21	R	1.732	1	0.12	∞
Probe Positioner	0.04	R	1.732	1	0.02	∞
Probe Positioning	0.30	R	1.732	1	0.17	∞
Savg Reconstruction	0.60	R	1.732	1	0.35	∞
Test Sample Related						
Power Drift	0.2	R	1.732	1	0.12	∞
Input Power	0	N	1	0	0.00	∞
Combined Std. Uncertainty					0.76 dB	∞
Coverage Factor for 95 %					K=2	
Expanded STD Uncertainty					1.52 dB	