



**CFR 47 FCC PART 15 SUBPART C
ISED RSS-247 ISSUE 2**

CERTIFICATION TEST REPORT

For

WIFI+BT Module

MODEL NUMBER: DCT2UM1111

FCC ID:2AC23-DCT2U

IC:12290A-DCT2U

REPORT NUMBER: 4790191813.2-2

ISSUE DATE: March 8, 2022

Prepared for

**Hui Zhou Gaoshengda Technology Co.,LTD
NO.75 Zhongkai Development Area ,Huizhou, Guangdong, China**

Prepared by

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch

Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China

**Tel: +86 769 22038881
Fax: +86 769 33244054
Website: www.ul.com**

Revision History

Rev.	Issue Date	Revisions	Revised By
V0	3/8/2022	Initial Issue	

Summary of Test Results			
Clause	Test Items	FCC/ISED Rules	Test Results
1	20dB Bandwidth and 99% Occupied Bandwidth	FCC 15.247 (a) (1) RSS-247 Clause 5.1 (a) RSS-Gen Clause 6.7	Pass
2	Conducted Output Power	FCC 15.247 (b) (1) RSS-247 Clause 5.1 (b)	Pass
3	Carrier Hopping Channel Separation	FCC 15.247 (a) (1) RSS-247 Clause 5.1 (b)	Pass
4	Number of Hopping Frequency	15.247 (a) (1) III RSS-247 Clause 5.1 (d)	Pass
5	Time of Occupancy (Dwell Time)	15.247 (a) (1) III RSS-247 Clause 5.1 (d)	Pass
6	Conducted Bandedge	FCC 15.247 (d) RSS-247 Clause 5.5	Pass
7	Radiated Bandedge and Spurious	FCC 15.247 (d) FCC 15.209 FCC 15.205 RSS-247 Clause 5.5 RSS-GEN Clause 8.9 RSS-GEN Clause 8.10	Pass
8	Conducted Emission Test for AC Power Port	FCC 15.207 RSS-GEN Clause 8.8	Pass
9	Antenna Requirement	FCC 15.203 RSS-GEN Clause 6.8	Pass

Note:

1. This test report is only published to and used by the applicant, and it is not for evidence purpose in China.

2. The measurement result for the sample received is <Pass> according to < CFR 47 FCC PART 15 SUBPART C >< ISED RSS-247 > when <Accuracy Method> decision rule is applied.

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	7
2. TEST METHODOLOGY	8
3. FACILITIES AND ACCREDITATION	8
4. CALIBRATION AND UNCERTAINTY	9
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	<i>9</i>
4.2. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>9</i>
5. EQUIPMENT UNDER TEST	10
5.1. <i>DESCRIPTION OF EUT</i>	<i>10</i>
5.2. <i>MAXIMUM PEAK OUTPUT POWER.....</i>	<i>10</i>
5.3. <i>PACKET TYPE CONFIGURATION</i>	<i>10</i>
5.4. <i>CHANNEL LIST</i>	<i>11</i>
5.5. <i>TEST CHANNEL CONFIGURATION.....</i>	<i>11</i>
5.6. <i>THE WORSE CASE POWER SETTING PARAMETER.....</i>	<i>12</i>
5.7. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	<i>12</i>
5.8. <i>WORST-CASE CONFIGURATIONS.....</i>	<i>12</i>
5.9. <i>DESCRIPTION OF TEST SETUP.....</i>	<i>13</i>
6. MEASURING INSTRUMENT AND SOFTWARE USED	14
7. ANTENNA PORT TEST RESULTS	16
7.1. <i>ON TIME AND DUTY CYCLE</i>	<i>16</i>
7.2. <i>20 dB BANDWIDTH AND 99 % OCCUPIED BANDWIDTH</i>	<i>17</i>
7.3. <i>CONDUCTED OUTPUT POWER</i>	<i>19</i>
7.4. <i>CARRIER FREQUENCY SEPARATION.....</i>	<i>20</i>
7.5. <i>NUMBER OF HOPPING FREQUENCIES</i>	<i>22</i>
7.6. <i>TIME OF OCCUPANCY (DWELL TIME).....</i>	<i>24</i>
7.7. <i>CONDUCTED BANDEDGE AND SPURIOUS EMISSION.....</i>	<i>26</i>
8. RADIATED TEST RESULTS.....	28
8.1. <i>RESTRICTED BANDEDGE</i>	<i>34</i>
8.1.1. <i>GFSK MODE FPC ANTENNA</i>	<i>34</i>
8.1.2. <i>8DPSK MODE FPC ANTENNA</i>	<i>37</i>
8.1.3. <i>GFSK MODE PIFA ANTENNA</i>	<i>40</i>
8.1.4. <i>8DPSK MODE PIFA ANTENNA.....</i>	<i>43</i>
8.1.5. <i>GFSK MODE PCB ANTENNA</i>	<i>46</i>
8.1.6. <i>8DPSK MODE PCB ANTENNA</i>	<i>48</i>
8.2. <i>SPURIOUS EMISSIONS (1 GHz ~ 3 GHz).....</i>	<i>50</i>

8.2.1. GFSK MODE FPC ANTENNA	50
8.2.2. GFSK MODE PIFA ANTENNA	56
8.2.3. GFSK MODE PCB ANTENNA	62
8.3. <i>SPURIOUS EMISSIONS (3 GHz ~ 18 GHz)</i>	68
8.3.1. GFSK MODE FPC ANTENNA	68
8.3.2. 8DPSK MODE FPC ANTENNA	74
8.3.3. GFSK MODE PIFA ANTENNA	80
8.3.4. 8DPSK MODE PIFA ANTENNA	86
8.3.5. GFSK MODE PCB ANTENNA	92
8.3.6. 8DPSK MODE PCB ANTENNA	98
8.4. <i>SPURIOUS EMISSIONS (18 GHz ~ 26 GHz)</i>	105
8.4.1. 8DPSK MODE PCB ANTENNA	105
8.5. <i>SPURIOUS EMISSIONS (30 MHz ~ 1 GHz)</i>	107
8.5.1. 8DPSK MODE PCB ANTENNA	107
8.6. <i>SPURIOUS EMISSIONS BELOW 30 MHz</i>	109
8.6.1. 8DPSK MODE PCB ANTENNA	109
9. AC POWER LINE CONDUCTED EMISSIONS	112
9.1. 8DPSK MODE PCB ANTENNA	113
10. ANTENNA REQUIREMENTS	115
11. Appendix	116
11.1. <i>Appendix A: 20dB Emission Bandwidth</i>	116
11.1.1. Test Result	116
11.1.2. Test Graphs	117
11.2. <i>Appendix B: Occupied Channel Bandwidth</i>	119
11.2.1. Test Result	119
11.2.2. Test Graphs	120
11.3. <i>Appendix C: Maximum conducted output power</i>	122
11.3.1. Test Result	122
11.4. <i>Appendix D: Carrier frequency separation</i>	123
11.4.1. Test Result	123
11.4.2. Test Graphs	124
11.5. <i>Appendix E: Time of occupancy</i>	125
11.5.1. Test Result	125
11.5.2. Test Graphs	126
11.6. <i>Appendix F: Number of hopping channels</i>	128
11.6.1. Test Result	128
11.6.2. Test Graphs	129
11.7. <i>Appendix G: Band edge measurements</i>	130
11.7.1. Test Result	130
11.7.2. Test Graphs	131
11.8. <i>Appendix H: Conducted Spurious Emission</i>	134
11.8.1. Test Result	134
11.8.2. Test Graphs	135

11.9. <i>Appendix I: Duty Cycle</i>	141
11.9.1. Test Result.....	141
11.9.2. Test Graphs	142

1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: Hui Zhou Gaoshengda Technology Co.,LTD
Address: NO.75 Zhongkai Development Area ,Huizhou, Guangdong, China

Manufacturer Information

Company Name: Hui Zhou Gaoshengda Technology Co.,LTD
Address: NO.75 Zhongkai Development Area ,Huizhou, Guangdong, China

EUT Information

EUT Name: WIFI+BT Module
Model: DCT2UM1111
Brand: GSD
Sample Received Date: December 30, 2021
Sample Status: Normal
Sample ID: 4540907
Date of Tested: December 30, 2021 ~ March 6, 2022

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C	PASS
ISED RSS-247 Issue 2	PASS
ISED RSS-GEN Issue 5	PASS

Prepared By:



Kebo Zhang
Project Engineer

Checked By:



Shawn Wen
Laboratory Leader

Approved By:



Stephen Guo
Laboratory Manager

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with KDB 558074 D01 15.247 Meas Guidance v05r02, 414788 D01 Radiated Test Site v01r01, CFR 47 FCC Part 2, CFR 47 FCC Part 15, ANSI C63.10-2013, ISED RSS-247 Issue 2 and ISED RSS-GEN Issue 5.

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p>A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p>FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules</p> <p>ISED (Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046.</p> <p>VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793.</p> <p>Facility Name: Chamber D, the VCCI registration No. is G-20019 and R-20004 Shielding Room B, the VCCI registration No. is C-20012 and T-20011</p>
---------------------------	---

Note 1: All tests measurement facilities used to collect the measurement data are located at Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China

Note 2: The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3: For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 26 GHz)	5.78 dB (1 GHz ~ 18 GHz) 5.23 dB (18 GHz ~ 26 GHz)

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of k=2.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name	WIFI+BT Module		
Model	DCT2UM1111		
Product Description (Bluetooth)	Operation Frequency	2402 MHz ~ 2480 MHz	
	Modulation Type	Data Rate	
	GFSK	1Mbps	
	$\pi/4$ -DQPSK	2Mbps	
	8DPSK	3Mbps	
Rated Input	DC 5 V		

5.2. MAXIMUM PEAK OUTPUT POWER

Test Mode	Frequency (MHz)	Channel Number	Maximum Peak Output Power (dBm)	Maximum EIRP (dBm)
GFSK	2402 ~ 2480	0-78[79]	8.41	11.41
8DPSK	2402 ~ 2480	0-78[79]	11.41	14.41

5.3. PACKET TYPE CONFIGURATION

Test Mode	Packet Type	Setting (Packet Length)
GFSK	DH1	27
	DH3	183
	DH5	339
$\pi/4$ -DQPSK	2-DH1	54
	2-DH3	367
	2-DH5	679
8DPSK	3-DH1	83
	3-DH3	552
	3-DH5	1021

5.4. CHANNEL LIST

Channel	Frequency (MHz)						
00	2402	20	2422	40	2442	60	2462
01	2403	21	2423	41	2443	61	2463
02	2404	22	2424	42	2444	62	2464
03	2405	23	2425	43	2445	63	2465
04	2406	24	2426	44	2446	64	2466
05	2407	25	2427	45	2447	65	2467
06	2408	26	2428	46	2448	66	2468
07	2409	27	2429	47	2449	67	2469
08	2410	28	2430	48	2450	68	2470
09	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461	/	/

5.5. TEST CHANNEL CONFIGURATION

Test Mode	Test Channel	Frequency
GFSK-DH5	CH 0(Low Channel), CH 39(MID Channel), CH 78(High Channel)	2402 MHz, 2441 MHz, 2480 MHz
8DPSK-3DH5	CH 0(Low Channel), CH 39(MID Channel), CH 78(High Channel)	2402 MHz, 2441 MHz, 2480 MHz
GFSK-DH5	Hopping	2402 MHz ~ 2480 MHz
8DPSK-3DH5	Hopping	2402 MHz ~ 2480 MHz

5.6. THE WORSE CASE POWER SETTING PARAMETER

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band				
FCCTest Software		WCN_Combo_Tool		
Modulation Type	Transmit Antenna Number	Test Software setting value		
		CH 00	CH 39	CH 78
GFSK	1	default	default	default
8DPSK	1	default	default	default

5.7. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna	Frequency (MHz)	Antenna Type	MAX Antenna Gain (dBi)
1	2402-2480	PCB	3

Antenna	Frequency (MHz)	Antenna Type	MAX Antenna Gain (dBi)
1	2402-2480	FPC	2.77

Antenna	Frequency (MHz)	Antenna Type	MAX Antenna Gain (dBi)
1	2402-2480	PIFA	2.88

Note: The EUT have three kinds of antennas, one is FPC antenna and the other one is PIFA antenna.

Test Mode	Transmit and Receive Mode	Description
GFSK	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.
8DPSK	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.

Note: The value of the antenna gain was declared by customer.

5.8. WORST-CASE CONFIGURATIONS

Bluetooth Mode	Modulation Technology	Modulation Type	Data Rate (Mbps)
BR	FHSS	GFSK	1Mbit/s
EDR	FHSS	8DPSK	3Mbit/s

Note: Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates.

Note:

The EUT have three kinds of antennas, they are PCB antenna, FPC antenna, and PIFA antenna.

For the conducted testing, only the maximum antenna gain data are recorded in this report.

For the radiated testing, three kinds of antenna gain data are recorded in this report.

5.9. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Remarks
1	Laptop	Lenovo	T430	/
2	UART	/	/	/

I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB	N/A	N/A	1	N/A

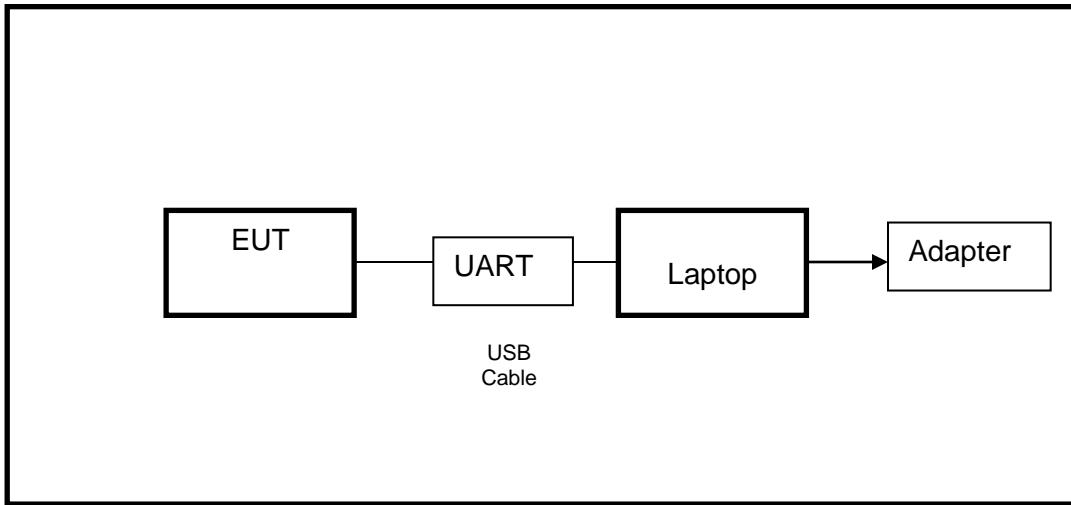
ACCESSORIES

Item	Accessory	Brand Name	Model Name	Description
/	/	/	/	/

TEST SETUP

The EUT can work in engineering mode with a software through a Laptop.

SETUP DIAGRAM FOR TESTS



Note: AC adapter only use for AC POWER LINE CONDUCTED EMISSIONS testing.

6. MEASURING INSTRUMENT AND SOFTWARE USED

R&S TS 8997 Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Power sensor, Power Meter	R&S	OSP120	100921	Mar.23,2021	Mar.22,2022
Vector Signal Generator	R&S	SMBV100A	261637	Oct.30, 2021	Oct.29, 2022
Signal Generator	R&S	SMB100A	178553	Oct.30, 2021	Oct.29, 2022
Signal Analyzer	R&S	FSV40	101118	Oct.30, 2021	Oct.29, 2022
Software					
Description	Manufacturer	Name		Version	
For R&S TS 8997 Test System	Rohde & Schwarz	EMC 32		10.60.10	
Tonsend RF Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Wideband Radio Communication Tester	R&S	CMW500	155523	Oct.30, 2021	Oct.29, 2022
Wireless Connectivity Tester	R&S	CMW270	1201.0002N75-102	Sep.29, 2021	Sep.28, 2022
PXA Signal Analyzer	Keysight	N9030A	MY55410512	Oct.30, 2021	Oct.29, 2022
MXG Vector Signal Generator	Keysight	N5182B	MY56200284	Oct.30, 2021	Oct.29, 2022
MXG Vector Signal Generator	Keysight	N5172B	MY56200301	Oct.30, 2021	Oct.29, 2022
DC power supply	Keysight	E3642A	MY55159130	Oct.30, 2021	Oct.29, 2022
Temperature & Humidity Chamber	SANMOOD	SG-80-CC-2	2088	Nov.20,2020	Nov.19,2022
Software					
Description	Manufacturer	Name		Version	
Tonsend SRD Test System	Tonsend	JS1120-3 RF Test System		2.6.77.0518	

Radiated Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Oct.30, 2021	Oct.29, 2022
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130959	Aug.02, 2021	Aug.01, 2024
Preamplifier	HP	8447D	2944A09099	Oct.30, 2021	Oct.29, 2022
EMI Measurement Receiver	R&S	ESR26	101377	Oct.30, 2021	Oct.29, 2022
Horn Antenna	TDK	HRN-0118	130940	July 20, 2021	July 19, 2024
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Oct.30, 2021	Oct.29, 2022
Horn Antenna	Schwarzbeck	BBHA9170	697	July 20, 2021	July 19, 2024
Preamplifier	TDK	PA-02-2	TRS-307-00003	Oct.31, 2021	Oct.30, 2022
Preamplifier	TDK	PA-02-3	TRS-308-00002	Oct.31, 2021	Oct.30, 2022
Loop antenna	Schwarzbeck	1519B	00008	Dec.14, 2021	Dec.13,2024
Preamplifier	TDK	PA-02-001-3000	TRS-302-00050	Oct.31, 2021	Oct.30, 2022
Preamplifier	Mini-Circuits	ZX60-83LN-S+	SUP01201941	Oct.31, 2021	Oct.30, 2022
High Pass Filter	Wi	WHKX10-2700-3000-18000-40SS	23	Oct.31, 2021	Oct.30, 2022
Band Reject Filter	Wainwright	WRCJV8-2350-2400-2483.5-2533.5-40SS	4	Oct.31, 2021	Oct.30, 2022
Software					
Description			Manufacturer	Name	Version
Test Software for Radiated Emissions			Farad	EZ-EMC	Ver. UL-3A1

7. ANTENNA PORT TEST RESULTS

7.1. ON TIME AND DUTY CYCLE

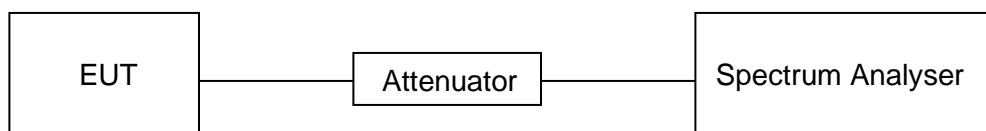
LIMITS

None; for reporting purposes only.

PROCEDURE

Refer to ANSI C63.10-2013 Zero – Span Spectrum Analyzer method.

TEST SETUP



TEST ENVIRONMENT

Temperature	24.5 °C	Relative Humidity	46 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 5 V

RESULTS

Please refer to appendix I.

7.2. 20 dB BANDWIDTH AND 99 % OCCUPIED BANDWIDTH

LIMITS

CFR 47FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247 (a) (1) RSS-247 Clause 5.1 (a)	20 dB Bandwidth	None; for reporting purposes only.	2400-2483.5
ISED RSS-Gen Clause 6.7	99 % Occupied Bandwidth	None; for reporting purposes only.	2400-2483.5

TEST PROCEDURE


Refer to ANSI C63.10-2013 clause 6.9.2.

Connect the EUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	For 20 dB Bandwidth: 1 % to 5 % of the 20 dB bandwidth For 99 % Occupied Bandwidth: 1 % to 5 % of the occupied bandwidth
VBW	For 20 dB Bandwidth: approximately 3xRBW For 99 % Occupied Bandwidth: $\geq 3 \times \text{RBW}$
Span	Approximately 2 to 3 times the 20dB bandwidth
Trace	Max hold
Sweep	Auto couple

a) Use the occupied bandwidth function of the instrument, allow the trace to stabilize and report the measured 99 % occupied bandwidth and 20 dB Bandwidth.

TEST SETUP



TEST ENVIRONMENT

Temperature	24.5 °C	Relative Humidity	46 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 5 V

RESULTS

Please refer to appendix A and B.

7.3. CONDUCTED OUTPUT POWER

LIMITS

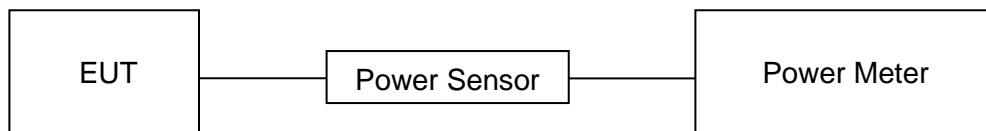
CFR 47 FCC Part15 (15.247), Subpart C ISED RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247 (b) (1) ISED RSS-247 Clause 5.4 (b)	Peak Conducted Output Power	Hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel: 1 watt or 30 dBm; Hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel: 125 mW or 21 dBm	2400-2483.5

TEST PROCEDURE

Connect the EUT to a low loss RF cable from the antenna port to the power sensor (video bandwidth is greater than the occupied bandwidth).

Measure peak emission level, the indicated level is the peak output power, after any corrections for external attenuators and cables.

TEST SETUP



TEST ENVIRONMENT

Temperature	24.5 °C	Relative Humidity	46 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 5 V

RESULTS

Please refer to appendix C.

7.4. CARRIER FREQUENCY SEPARATION

LIMITS

CFR 47 FCC Part15 (15.247), Subpart C ISED RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247 (a) (1) ISED RSS-247 Clause 5.1 (b)	Carrier Frequency Separation	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel.	2400-2483.5

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 7.8.2.

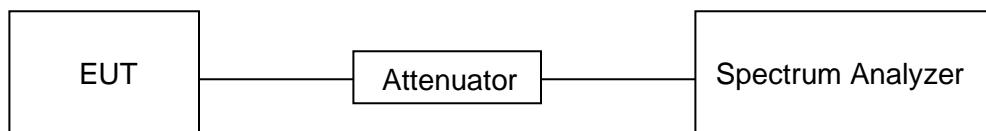
Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Span	wide enough to capture the peaks of two adjacent channels
Detector	Peak
RBW	Start with the RBW set to approximately 30 % of the channel spacing; adjust as necessary to best identify the center of each individual channel.
VBW	\geq RBW
Trace	Max hold
Sweep time	Auto couple

Allow the trace to stabilize and use the marker-delta function to determine the separation between the peaks of the adjacent channels.

Compliance of an EUT with the appropriate regulatory limit shall be determined.

TEST SETUP



TEST ENVIRONMENT

Temperature	24.5 °C	Relative Humidity	46 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 5 V

RESULTS

Please refer to Appendix D.

7.5. NUMBER OF HOPPING FREQUENCIES

LIMITS

CFR 47 FCC Part15 (15.247), Subpart C ISED RSS-247 ISSUE 2		
Section	Test Item	Limit
CFR 47 15.247 (a) (1) III ISED RSS-247 Clause 5.1 (d)	Number of Hopping Frequency	at least 15 hopping channels

TEST PROCEDURE


Refer to ANSI C63.10-2013 clause 7.8.3.

Connect the EUT to the spectrum Analyzer and use the following settings:

Detector	Peak
RBW	To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
VBW	\geq RBW
Span	The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
Trace	Max hold
Sweep time	Auto couple

Set EUT to transmit maximum output power and switch on frequency hopping function. then set enough count time (larger than 5000 times) to get all the hopping frequency channel displayed on the screen of spectrum analyzer, count the quantity of peaks to get the number of hopping channels.

TEST SETUP



TEST ENVIRONMENT

Temperature	24.5 °C	Relative Humidity	46 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 5 V

RESULTS

Please refer to appendix F.

7.6. TIME OF OCCUPANCY (DWELL TIME)

LIMITS

CFR 47 FCC Part15 (15.247), Subpart C ISED RSS-247 ISSUE 2		
Section	Test Item	Limit
CFR 47 15.247 (a) (1) III ISED RSS-247 Clause 5.1 (d)	Time of Occupancy (Dwell Time)	The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed.

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 7.8.4.

Connect the EUT to the spectrum Analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	1 MHz
VBW	\geq RBW
Span	Zero span, centered on a hopping channel
Trace	Max hold
Sweep time	As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel

Use the marker-delta function to determine the transmit time per hop (Burst Width). If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

For FHSS Mode (79 Channel):

DH1/3DH1 Dwell Time: $\text{Burst Width} * (1600/2) * 31.6 / (\text{channel number})$

DH3/3DH3 Dwell Time: $\text{Burst Width} * (1600/4) * 31.6 / (\text{channel number})$

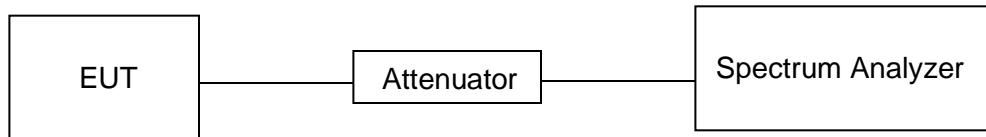
DH5/3DH5 Dwell Time: $\text{Burst Width} * (1600/6) * 31.6 / (\text{channel number})$

For AFHSS Mode (20 Channel):

DH1/3DH1 Dwell Time: $\text{Burst Width} * (800/2) * 8 / (\text{channel number})$

DH3/3DH3 Dwell Time: $\text{Burst Width} * (800/4) * 8 / (\text{channel number})$

DH5/3DH5 Dwell Time: $\text{Burst Width} * (800/6) * 8 / (\text{channel number})$

TEST SETUP**TEST ENVIRONMENT**

Temperature	24.5 °C	Relative Humidity	46 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 5 V

RESULTS

Please refer to appendix E.

7.7. CONDUCTED BANDEDGE AND SPURIOUS EMISSION

LIMITS

CFR 47 FCC Part15 (15.247), Subpart C ISED RSS-247 ISSUE 2		
Section	Test Item	Limit
CFR 47 FCC §15.247 (d) ISED RSS-247 5.5	Conducted Spurious Emission	at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 7.8.6 and 7.8.8.

Connect the EUT to the spectrum analyser and use the following settings for reference level measurement:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times$ RBW
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.

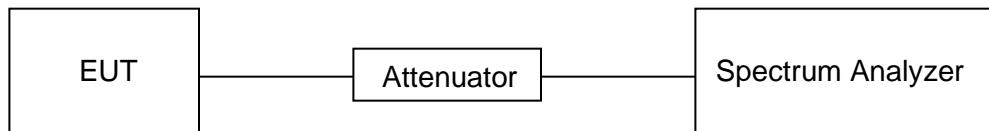
Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level.

Change the settings for emission level measurement:

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times$ RBW
measurement points	\geq span/RBW
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements.

TEST SETUP



TEST ENVIRONMENT

Temperature	24.5 °C	Relative Humidity	46 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 5 V

RESULTS

Please refer to appendix G & H.

8. RADIATED TEST RESULTS

LIMITS

Please refer to CFR 47 FCC §15.205 and §15.209.

Please refer to ISED RSS-GEN Clause 8.9 and Clause 8.10.

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz-1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

ISED General field strength limits at frequencies below 30 MHz

Table 6 – General field strength limits at frequencies below 30 MHz

Frequency	Magnetic field strength (H-Field) (μ A/m)	Measurement distance (m)
9 - 490 kHz ^{Note 1}	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

ISED Restricted bands please refer to ISED RSS-GEN Clause 8.10

Table 7 – Restricted frequency bands ^{Note 1}		
MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.028	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 - 3287	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138		

Note 1: Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

FCC Restricted bands of operation refer to FCC §15.205 (a):

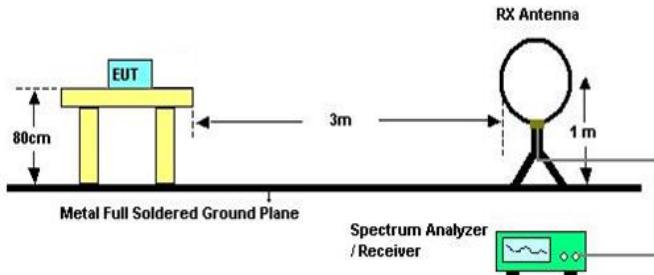
MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3287	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

 Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c

TEST SETUP AND PROCEDURE

Below 30 MHz

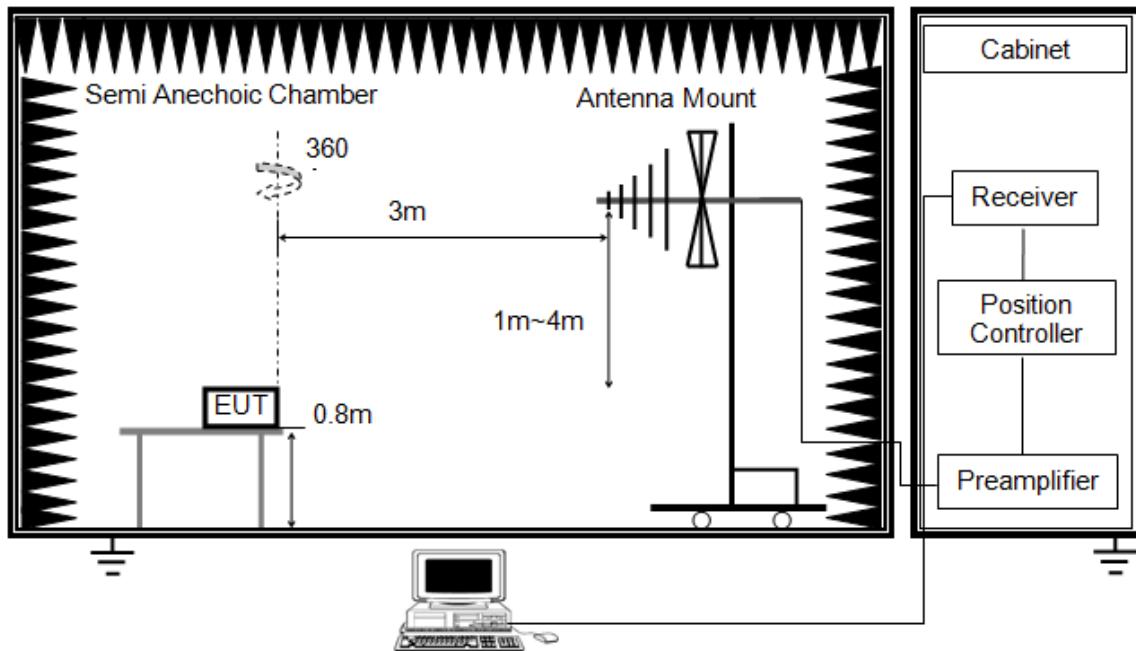


The setting of the spectrum analyser

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.
8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω . For example, the measurement frequency X KHz resulted in a level of Y dB μ V/m, which is equivalent to $Y-51.5 = Z$ dB μ A/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

Below 1 GHz and above 30 MHz

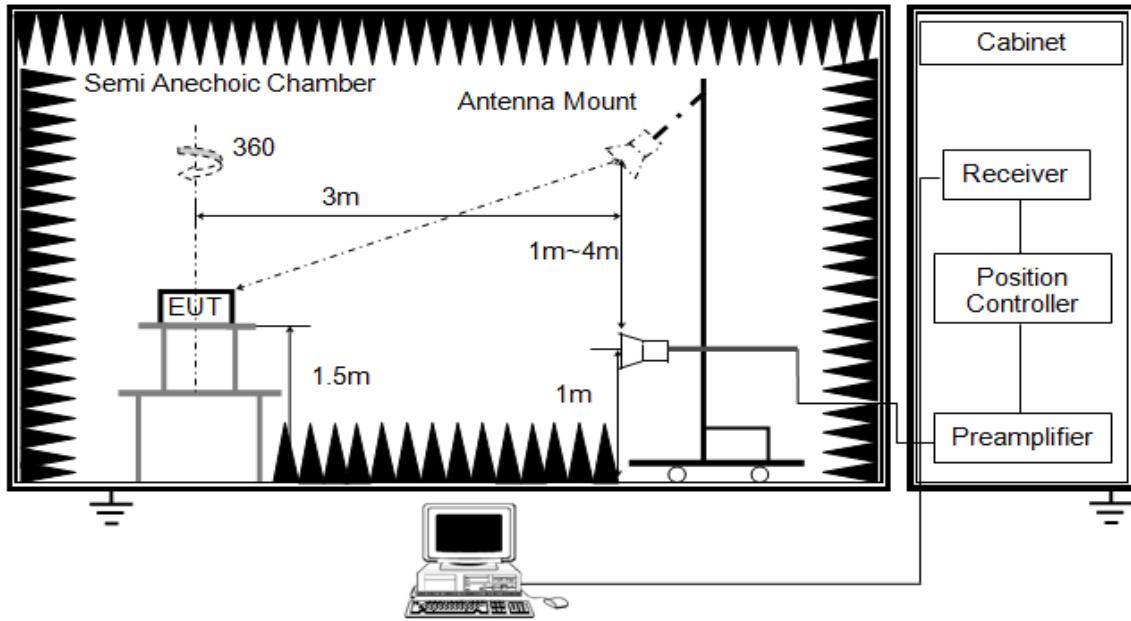


The setting of the spectrum analyser

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

Above 1 GHz

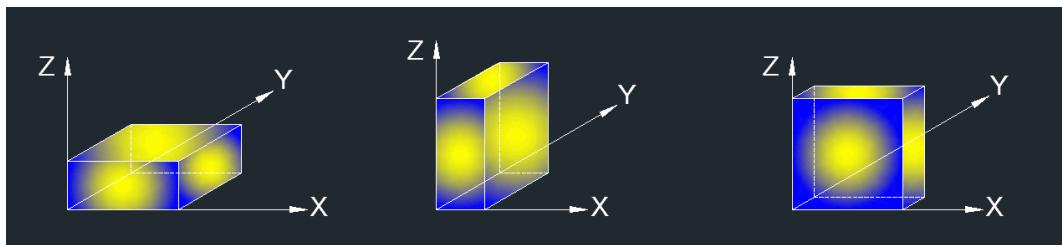


The setting of the spectrum analyser

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.1.ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:



Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

TEST ENVIRONMENT

Temperature	22.3 °C	Relative Humidity	65 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 5 V

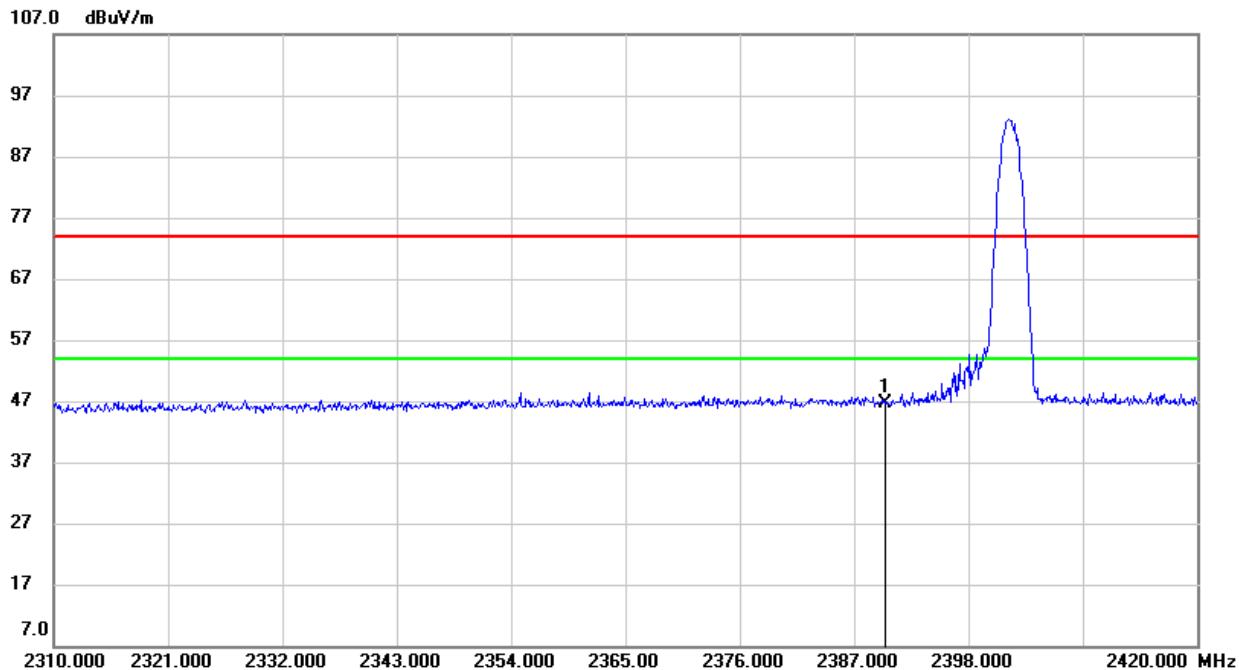
RESULTS

8.1. RESTRICTED BANDEDGE

8.1.1. GFSK MODE FPC ANTENNA

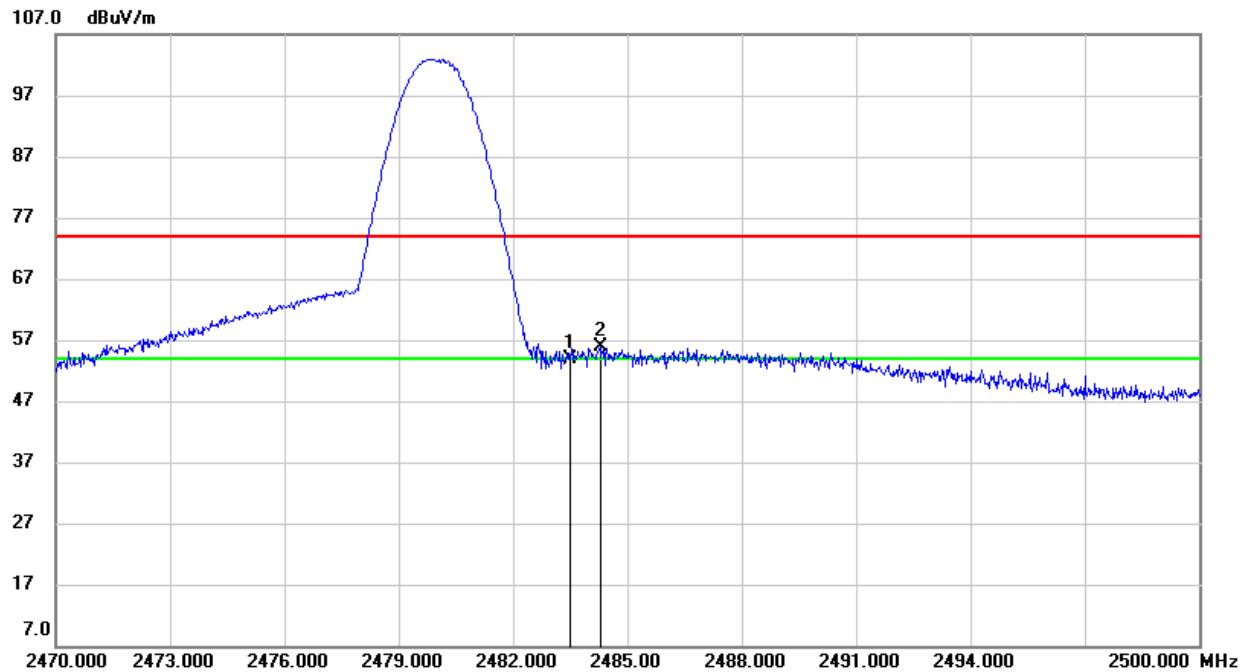
RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

PEAK



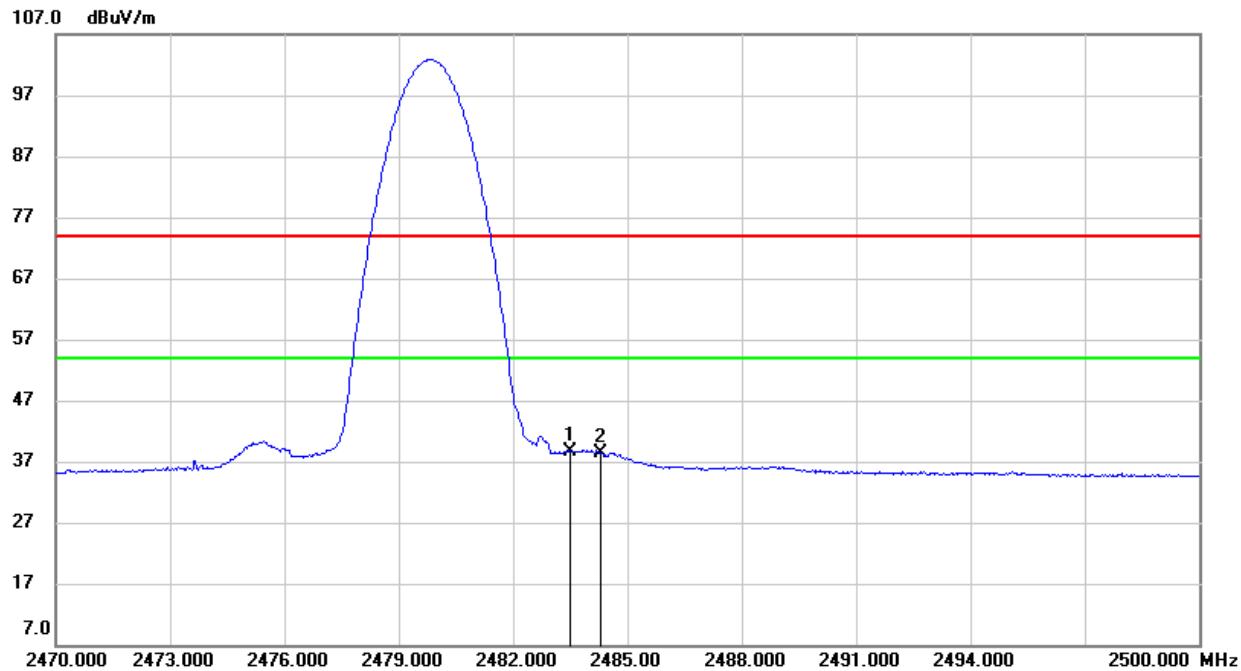
No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	13.94	32.66	46.60	74.00	-27.40	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)PEAK

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	20.84	33.10	53.94	74.00	-20.06	peak
2	2484.280	22.88	33.10	55.98	74.00	-18.02	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	5.58	33.10	38.68	54.00	-15.32	AVG
2	2484.280	5.24	33.10	38.34	54.00	-15.66	AVG

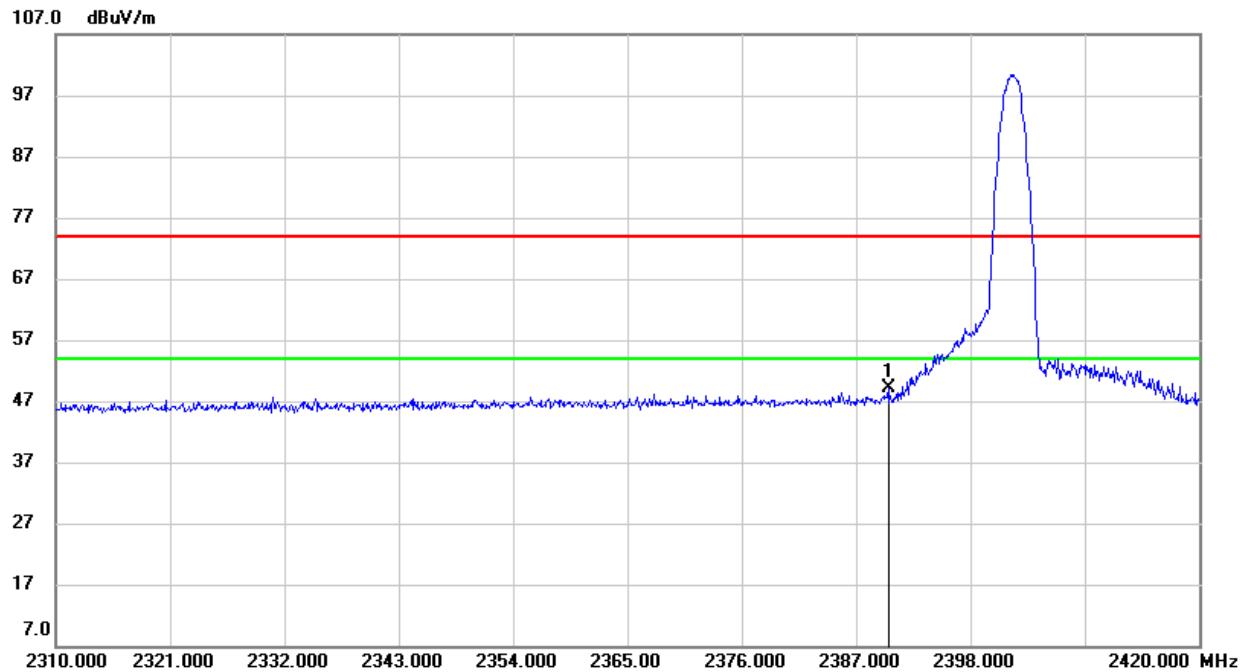
Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Note: All the polarities (Vertical & Horizontal) had been tested, only the worst data was recorded in the report.

8.1.2. 8DPSK MODE FPC ANTENNA

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

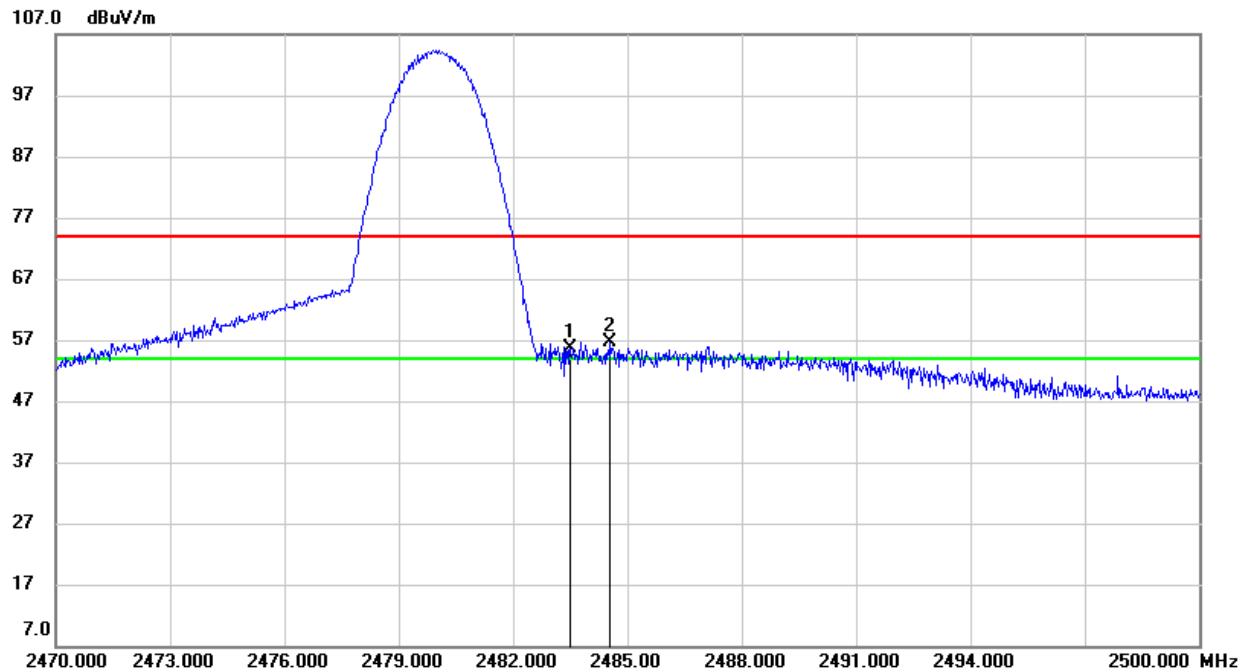
PEAK



No.	Frequency (MHz)	Reading (dB _{uV})	Correct (dB/m)	Result (dB _{uV/m})	Limit (dB _{uV/m})	Margin (dB)	Remark
1	2390.000	16.54	32.66	49.20	74.00	-24.80	peak

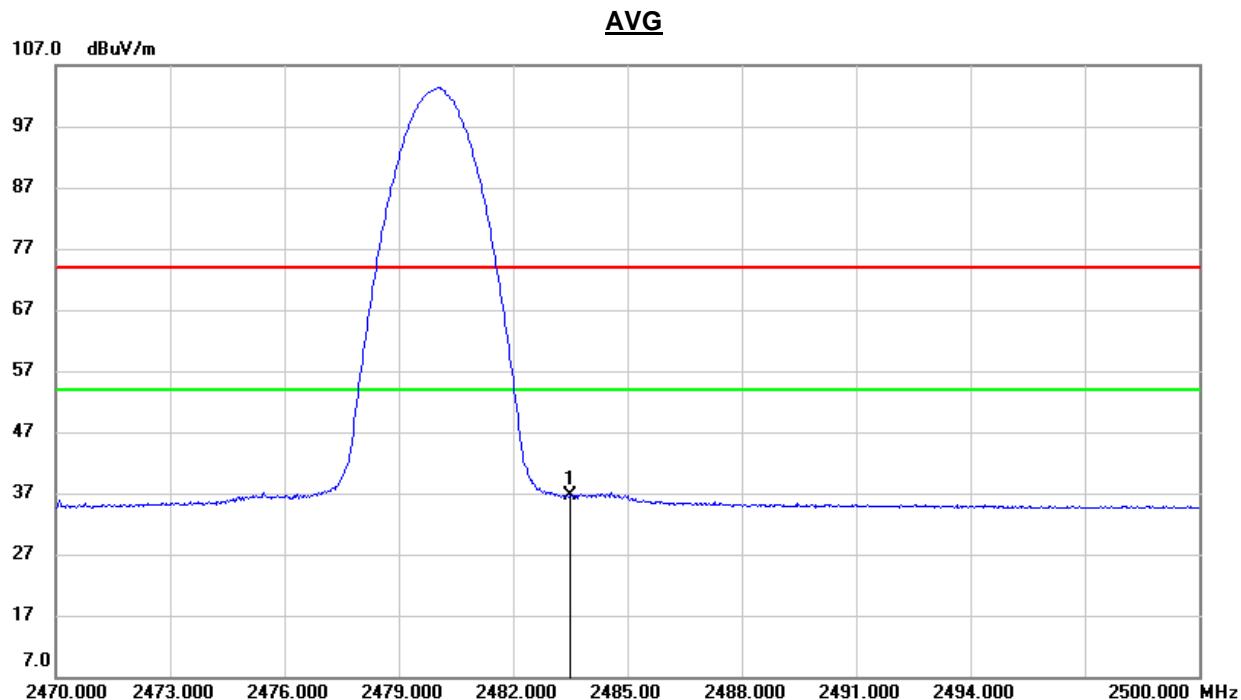
Note:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)**PEAK**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	22.54	33.10	55.64	74.00	-18.36	peak
2	2484.550	23.52	33.10	56.62	74.00	-17.38	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	3.58	33.10	36.68	54.00	-17.32	AVG

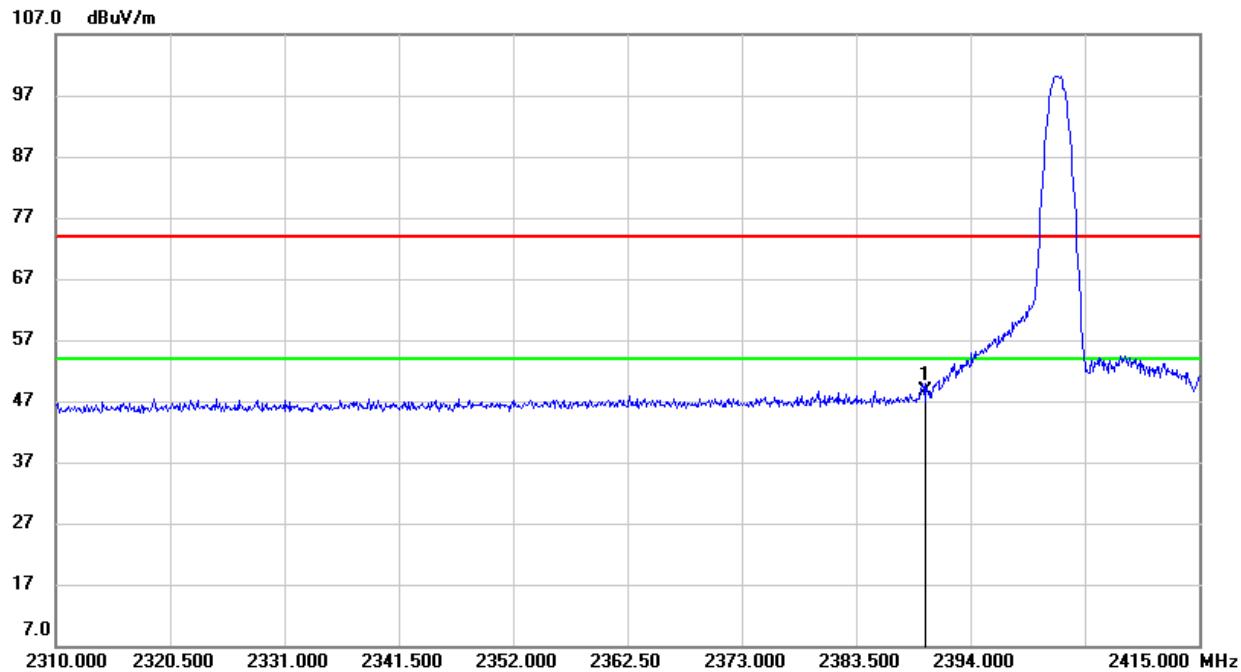
Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Note: All the polarities (Vertical & Horizontal) had been tested, only the worst data was recorded in the report.

8.1.3. GFSK MODE PIFA ANTENNA

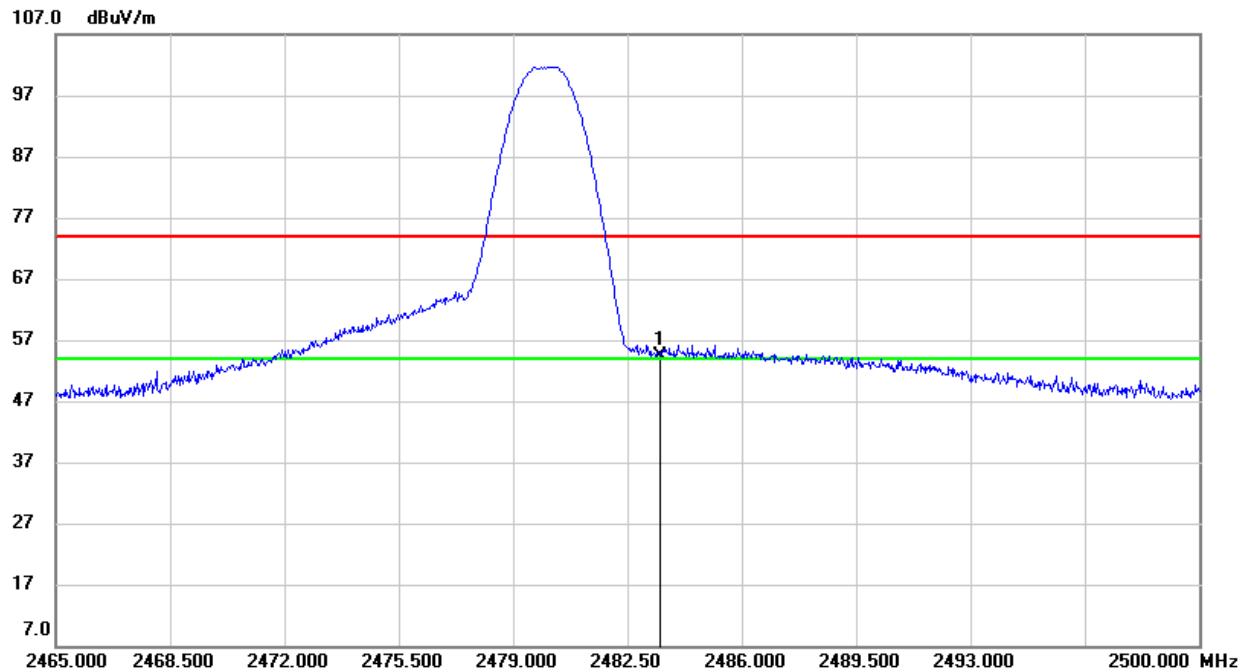
RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

PEAK



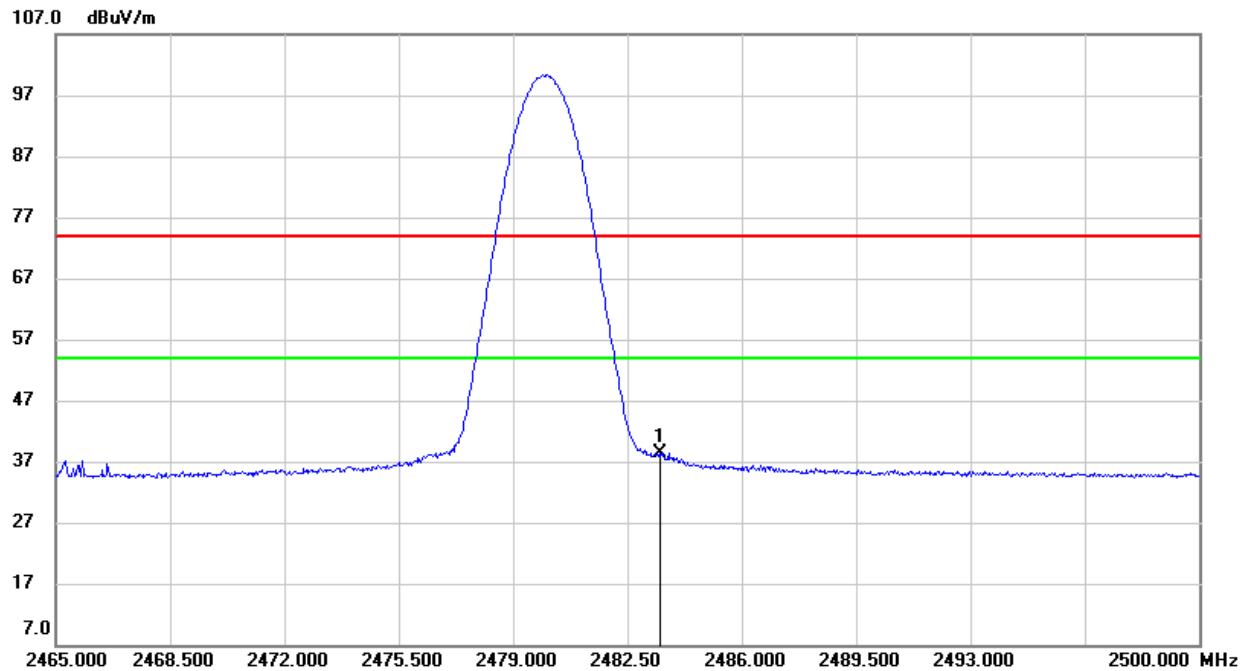
No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	15.92	32.66	48.58	74.00	-25.42	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)PEAK

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	21.32	33.10	54.42	74.00	-19.58	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	5.18	33.10	38.28	54.00	-15.72	AVG

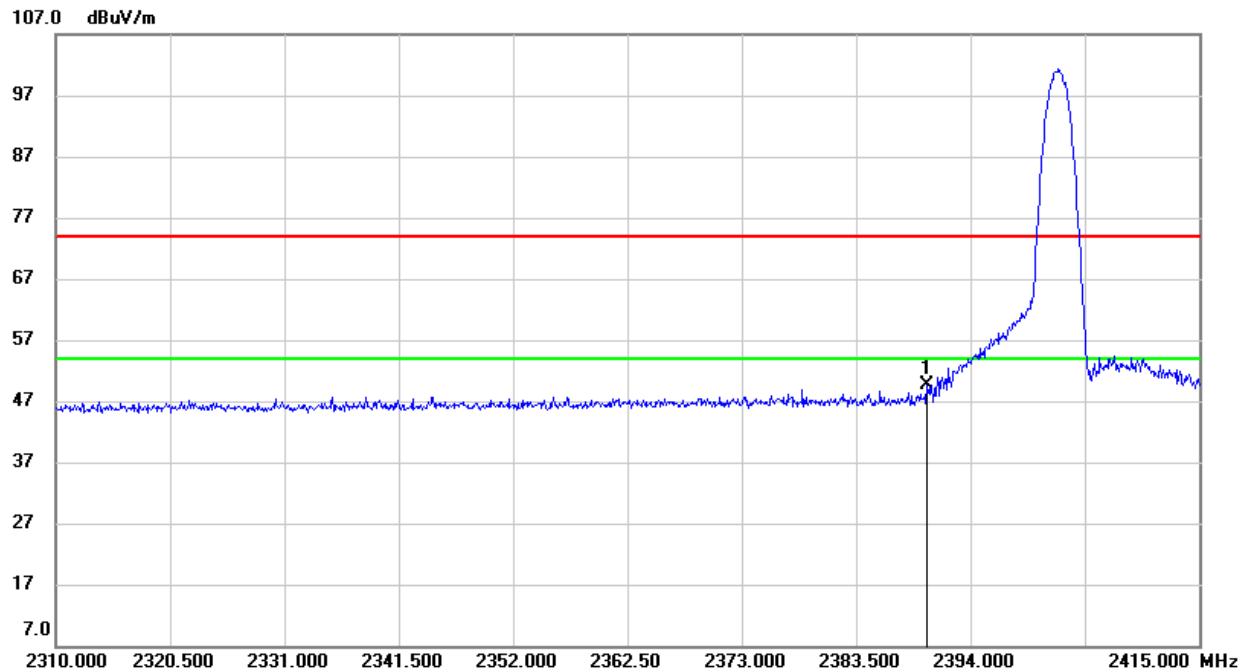
Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Note: All the polarities (Vertical & Horizontal) had been tested, only the worst data was recorded in the report.

8.1.4. 8DPSK MODE PIFA ANTENNA

RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

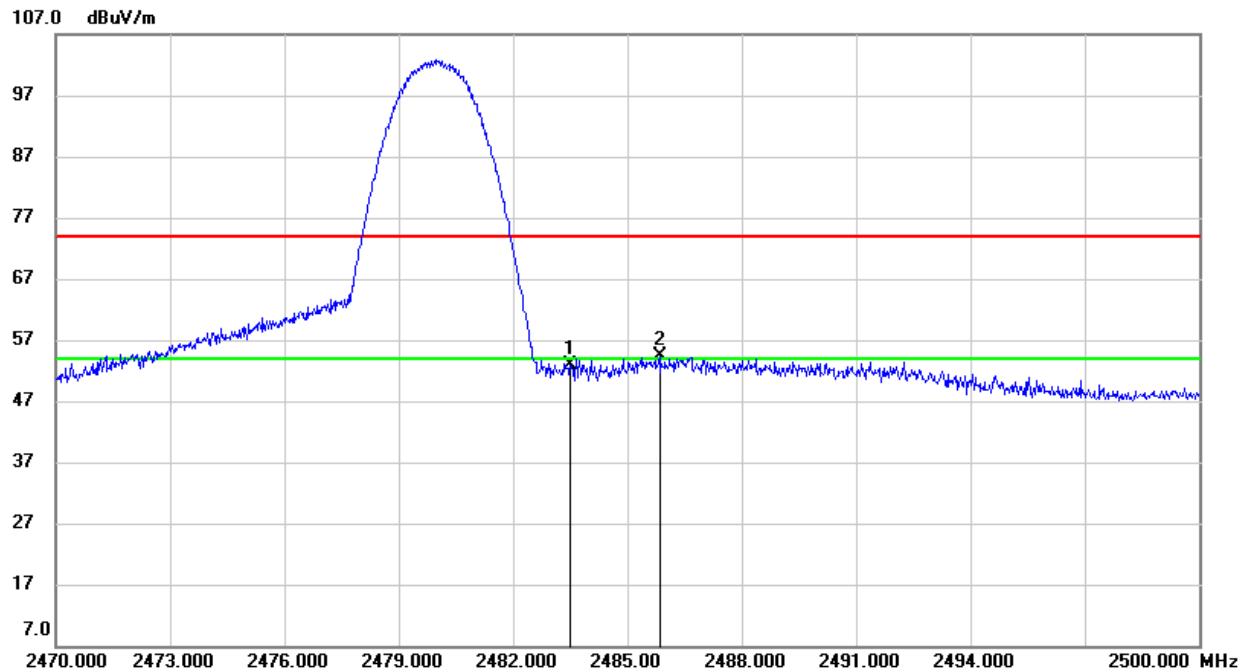
PEAK



No.	Frequency (MHz)	Reading (dB _{uV})	Correct (dB/m)	Result (dB _{uV/m})	Limit (dB _{uV/m})	Margin (dB)	Remark
1	2390.000	16.92	32.66	49.58	74.00	-24.42	peak

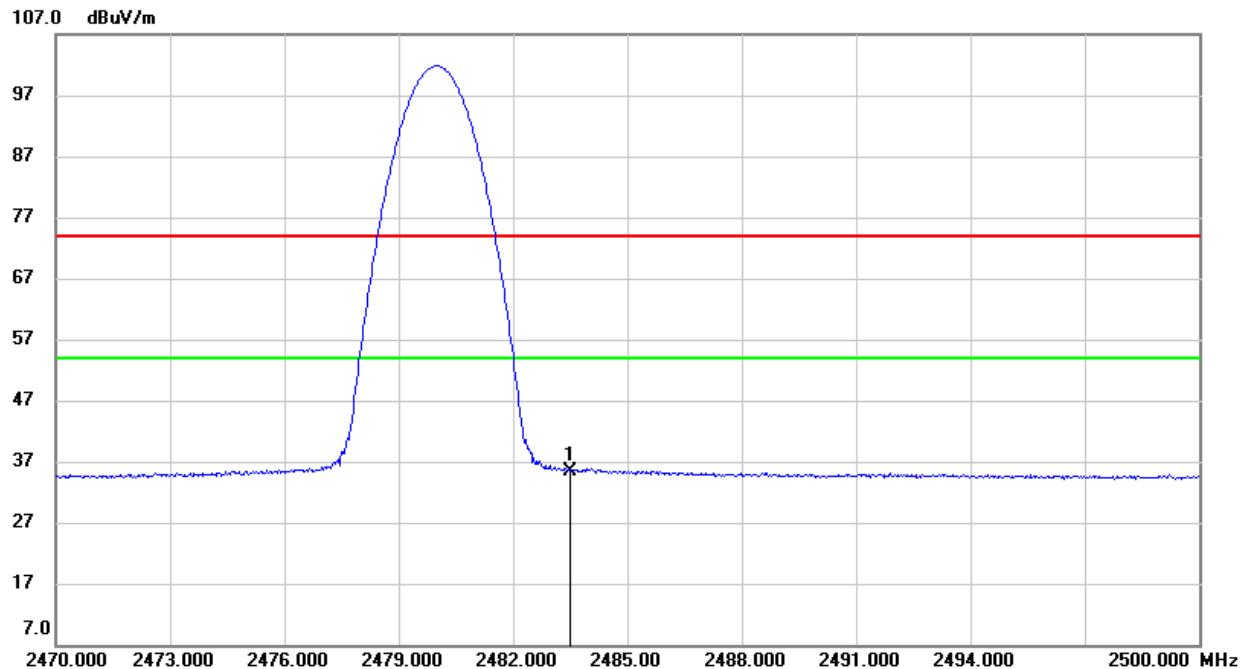
Note:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

RESTRICTED BANDEdge (HIGH CHANNEL, VERTICAL)**PEAK**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	19.70	33.10	52.80	74.00	-21.20	peak
2	2485.840	21.23	33.10	54.33	74.00	-19.67	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	2.38	33.10	35.48	54.00	-18.52	AVG

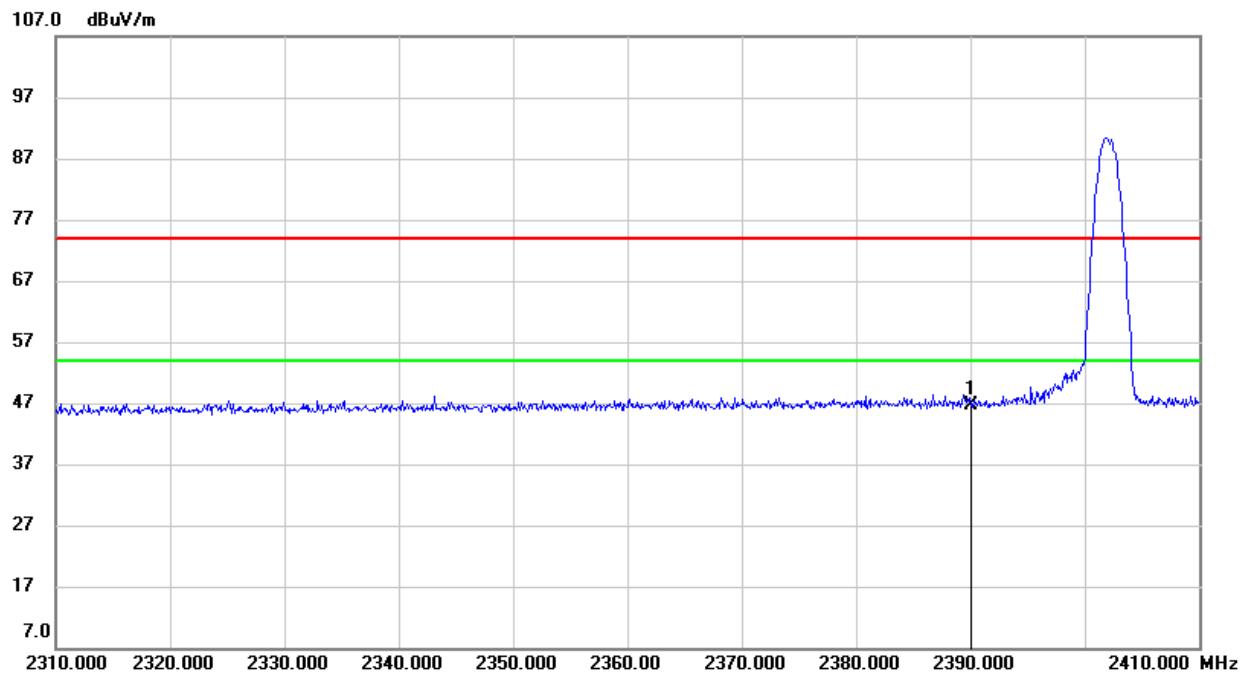
Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Note: All the polarities (Vertical & Horizontal) had been tested, only the worst data was recorded in the report.

8.1.5. GFSK MODE PCB ANTENNA

RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

PEAK

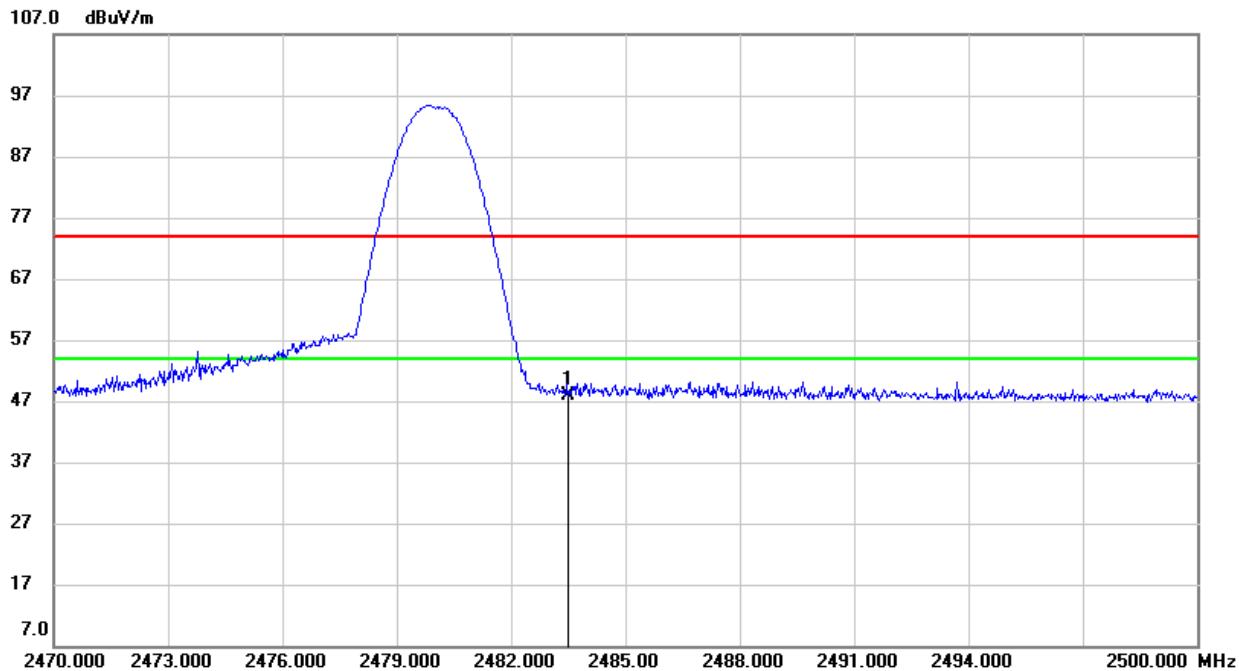


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	13.98	32.66	46.64	74.00	-27.36	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

RESTRICTED BANDEDGE (HIGHT CHANNEL, VERTICAL)

PEAK



No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	14.79	33.10	47.89	74.00	-26.11	peak

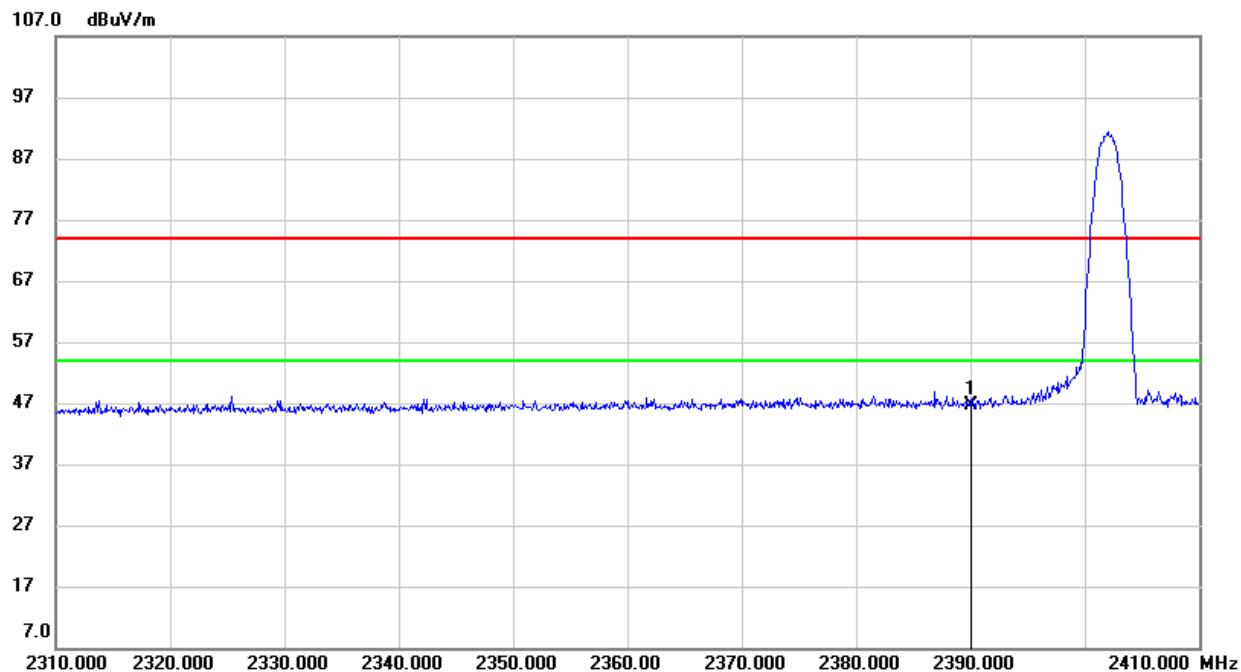
Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Note: All the polarities (Vertical & Horizontal) had been tested, only the worst data was recorded in the report.

8.1.6. 8DPSK MODE PCB ANTENNA

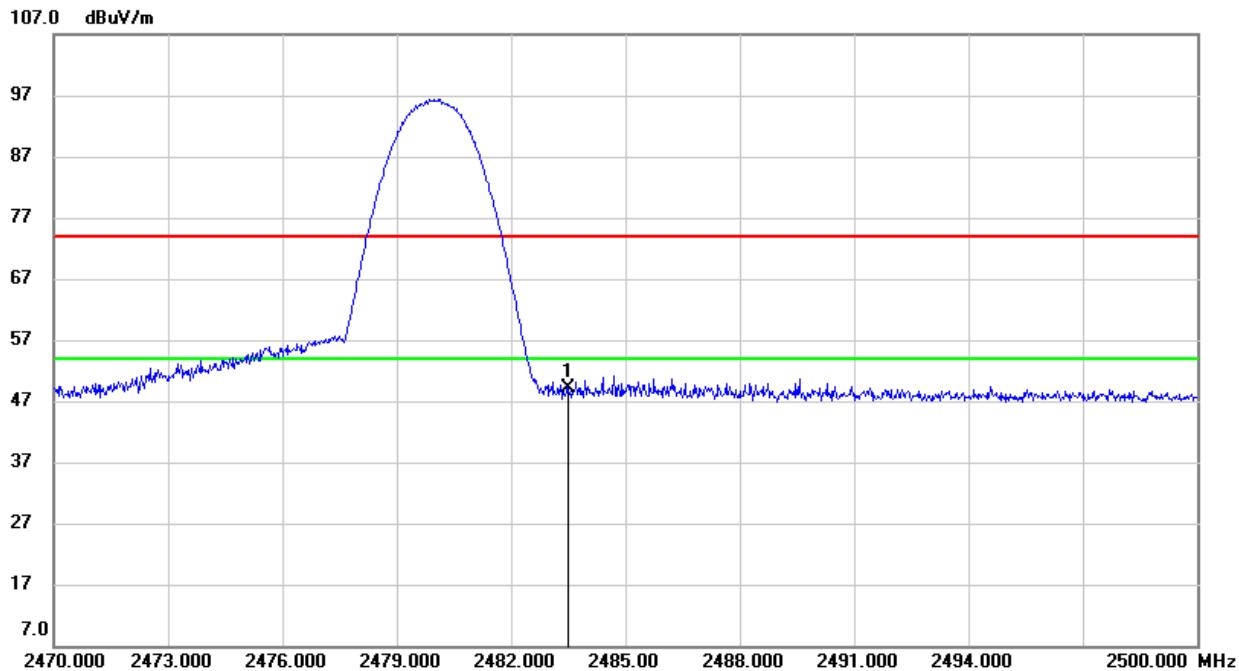
RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

PEAK



No.	Frequency (MHz)	Reading (dB _{uV})	Correct (dB/m)	Result (dB _{uV/m})	Limit (dB _{uV/m})	Margin (dB)	Remark
1	2390.000	14.03	32.66	46.69	74.00	-27.31	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

RESTRICTED BANDEDGE (HIGHT CHANNEL, VERTICAL)**PEAK**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	16.03	33.10	49.13	74.00	-24.87	peak

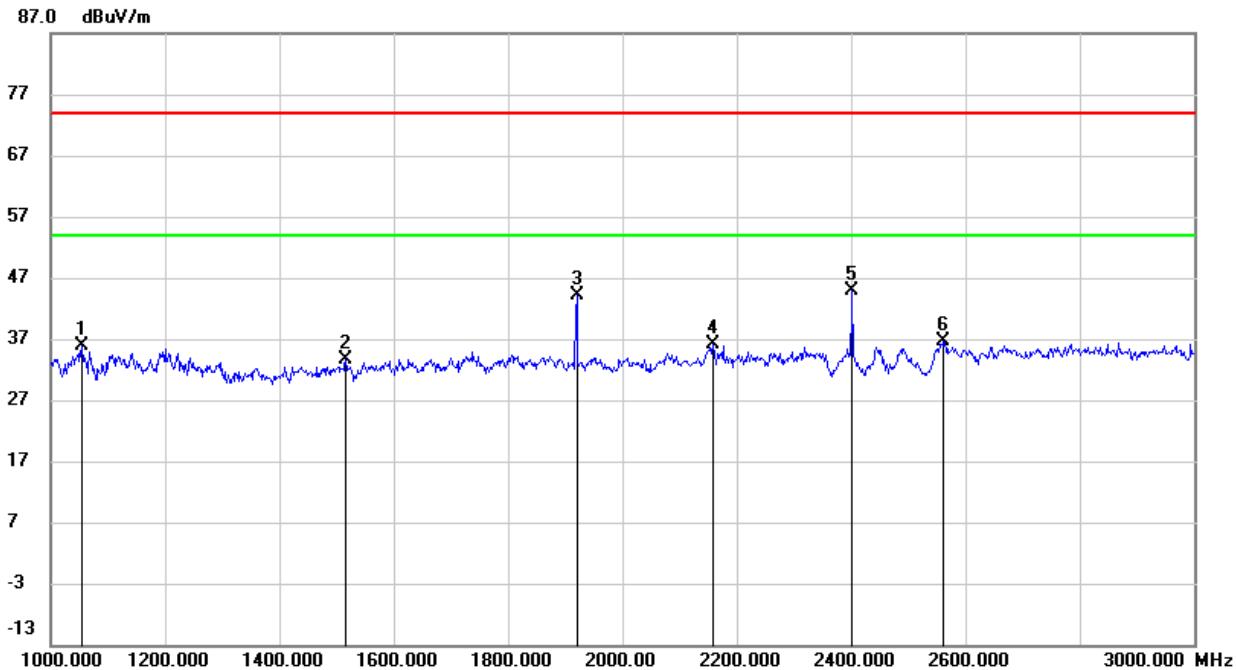
Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Note: All the polarities (Vertical & Horizontal) had been tested, only the worst data was recorded in the report.

8.2. SPURIOUS EMISSIONS (1 GHz ~ 3 GHz)

8.2.1. GFSK MODE FPC ANTENNA

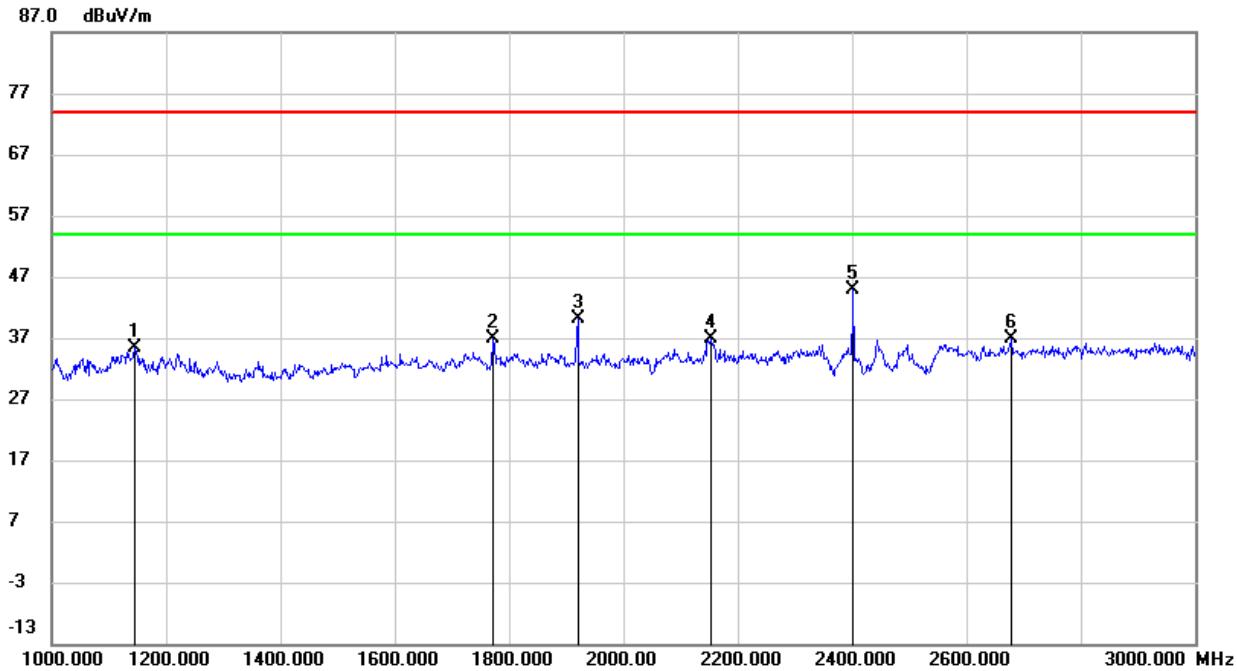
HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)



No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1055.000	50.63	-14.69	35.94	74.00	-38.06	peak
2	1516.000	45.90	-12.31	33.59	74.00	-40.41	peak
3	1920.000	54.95	-10.81	44.14	74.00	-29.86	peak
4	2158.000	46.21	-9.97	36.24	74.00	-37.76	peak
5	2402.000	53.88	-8.94	44.94	/	/	Fundamental
6	2563.000	45.26	-8.63	36.63	74.00	-37.37	peak

Note:

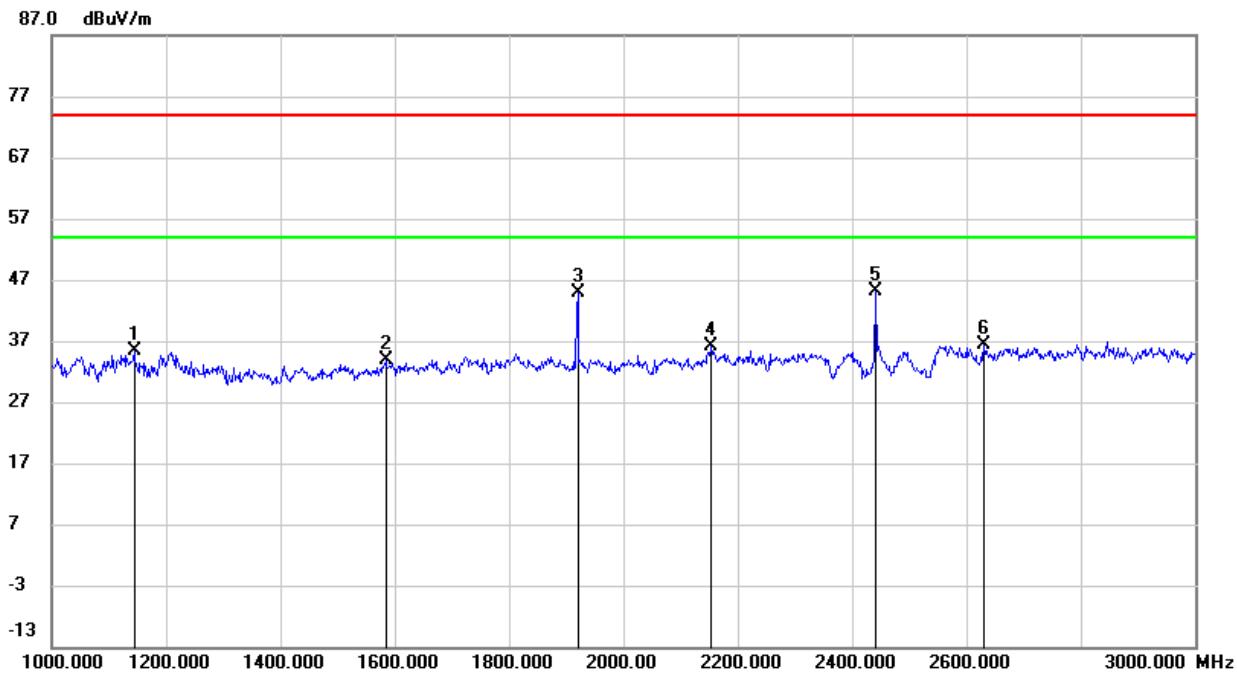
1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1144.000	49.42	-14.09	35.33	74.00	-38.67	peak
2	1773.000	47.54	-10.75	36.79	74.00	-37.21	peak
3	1920.000	51.04	-10.81	40.23	74.00	-33.77	peak
4	2152.000	46.89	-10.00	36.89	74.00	-37.11	peak
5	2402.000	53.75	-8.94	44.81	/	/	Fundamental
6	2679.000	45.06	-8.21	36.85	74.00	-37.15	peak

Note:

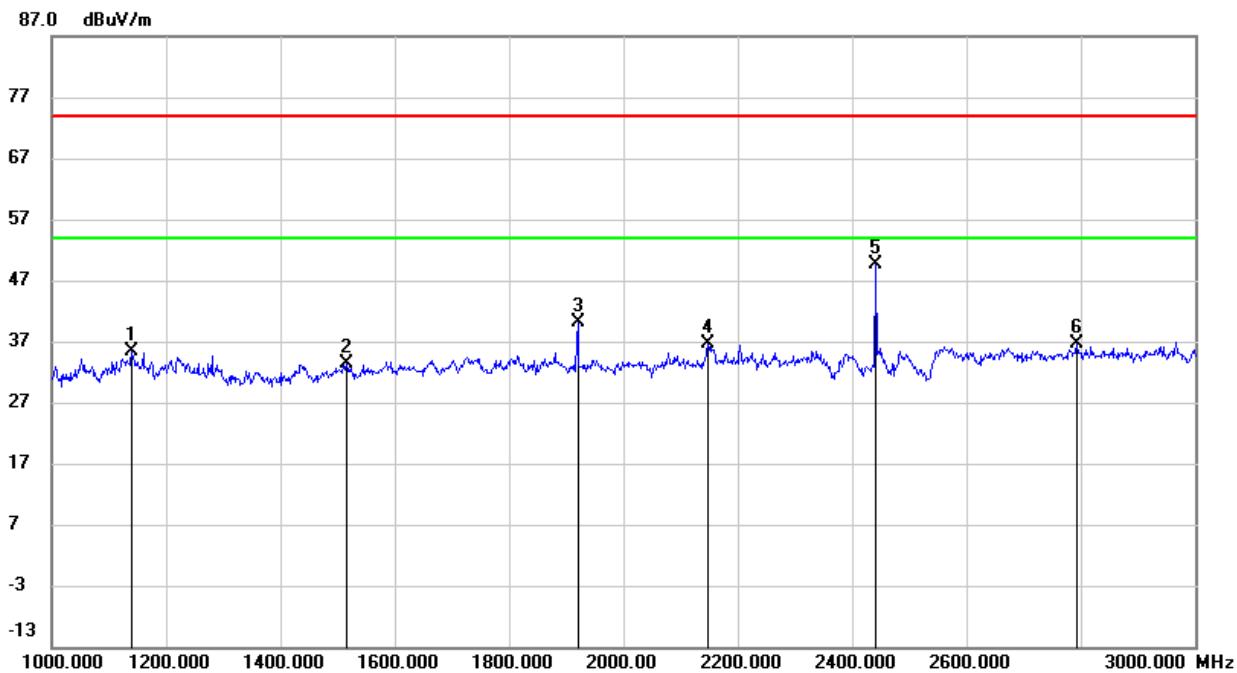
1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1145.000	49.52	-14.08	35.44	74.00	-38.56	peak
2	1585.000	45.79	-11.94	33.85	74.00	-40.15	peak
3	1920.000	55.66	-10.81	44.85	74.00	-29.15	peak
4	2155.000	46.09	-9.99	36.10	74.00	-37.90	peak
5	2441.000	53.93	-8.85	45.08	/	/	Fundamental
6	2631.000	44.80	-8.43	36.37	74.00	-37.63	peak

Note:

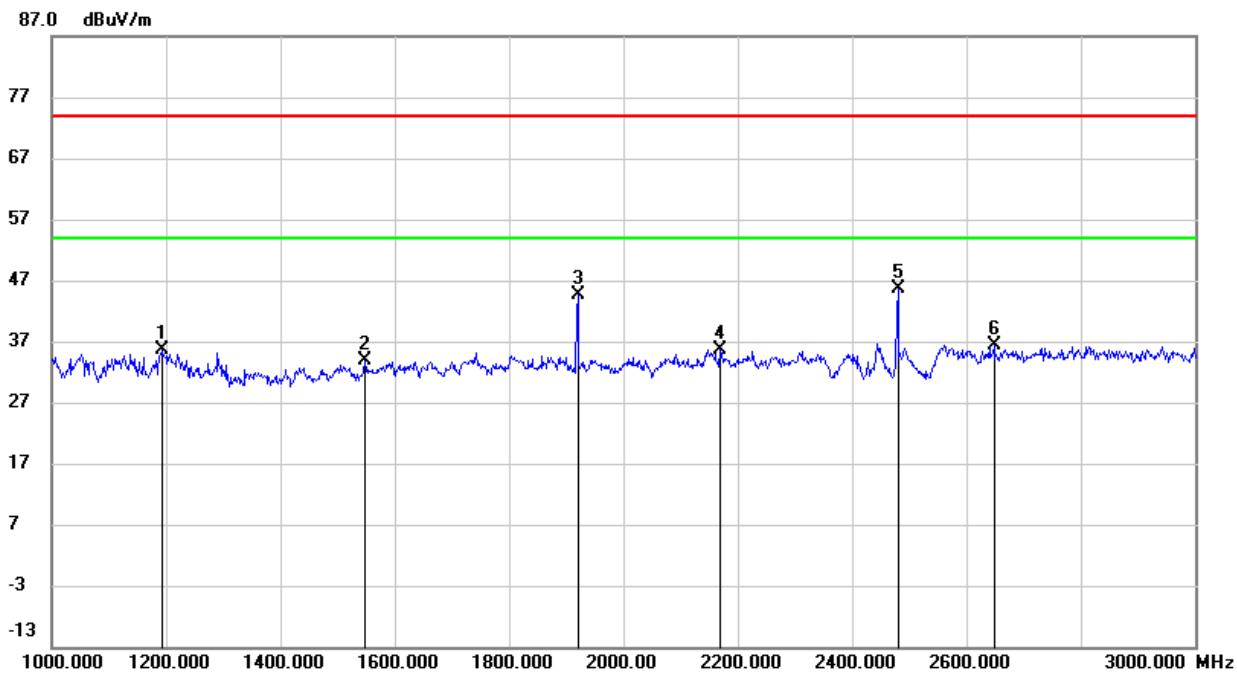
1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1141.000	49.51	-14.11	35.40	74.00	-38.60	peak
2	1517.000	45.68	-12.31	33.37	74.00	-40.63	peak
3	1920.000	51.04	-10.81	40.23	74.00	-33.77	peak
4	2149.000	46.54	-10.03	36.51	74.00	-37.49	peak
5	2441.000	58.40	-8.85	49.55	/	/	Fundamental
6	2793.000	44.21	-7.69	36.52	74.00	-37.48	peak

Note:

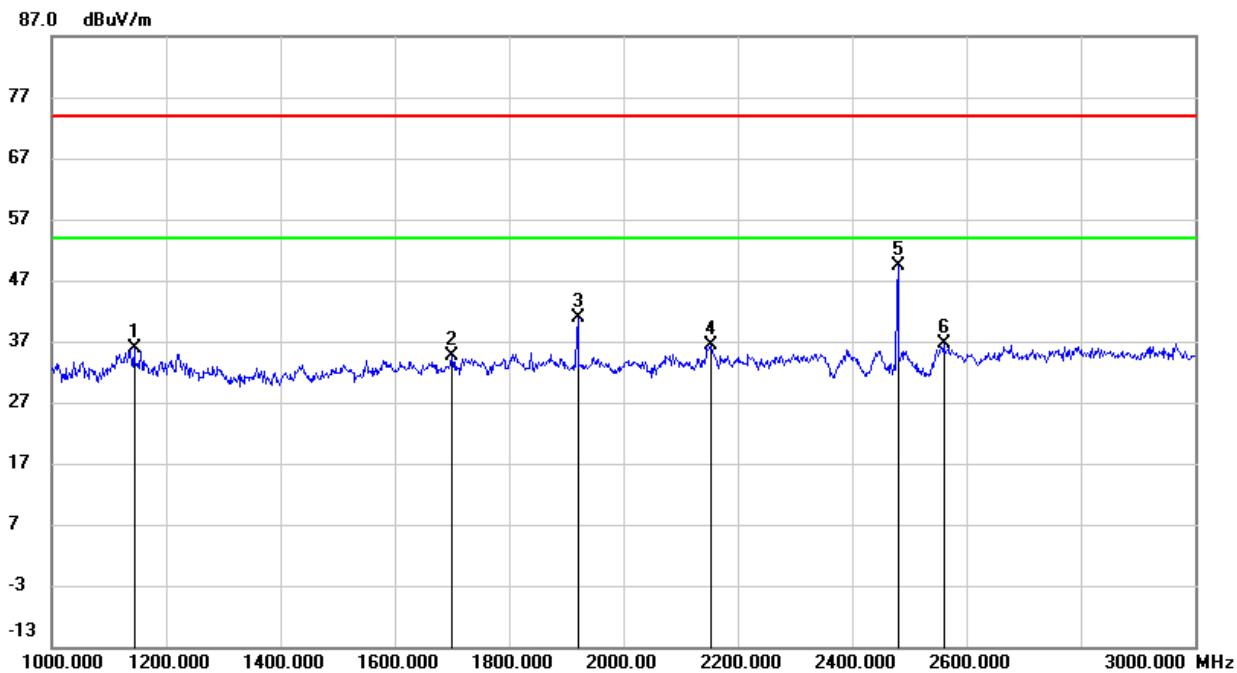
1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1192.000	49.46	-13.77	35.69	74.00	-38.31	peak
2	1549.000	46.03	-12.13	33.90	74.00	-40.10	peak
3	1920.000	55.56	-10.81	44.75	74.00	-29.25	peak
4	2169.000	45.60	-9.90	35.70	74.00	-38.30	peak
5	2480.000	54.51	-8.76	45.75	/	/	Fundamental
6	2648.000	44.81	-8.35	36.46	74.00	-37.54	peak

Note:

1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1144.000	49.97	-14.09	35.88	74.00	-38.12	peak
2	1700.000	45.82	-11.21	34.61	74.00	-39.39	peak
3	1920.000	51.66	-10.81	40.85	74.00	-33.15	peak
4	2153.000	46.41	-10.00	36.41	74.00	-37.59	peak
5	2480.000	58.10	-8.76	49.34	/	/	Fundamental
6	2560.000	45.14	-8.63	36.51	74.00	-37.49	peak

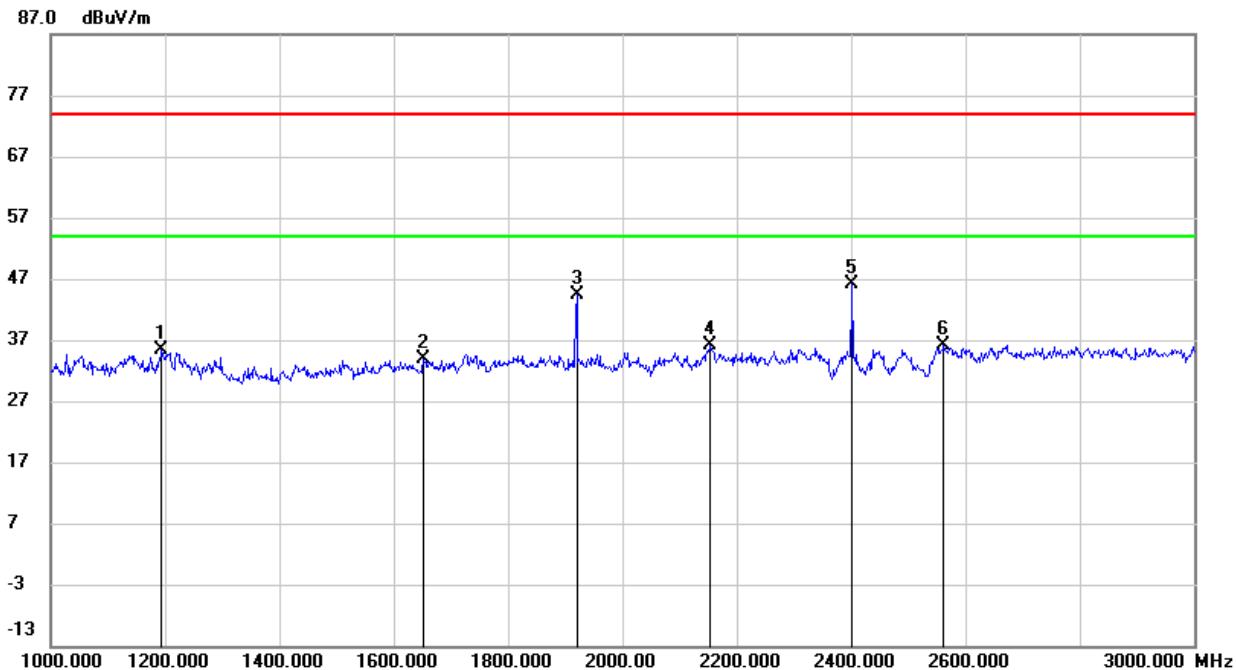
Note:

1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

Note: All the modes and channels had been tested, but only the worst data was recorded in the report.

8.2.2. GFSK MODE PIFA ANTENNA

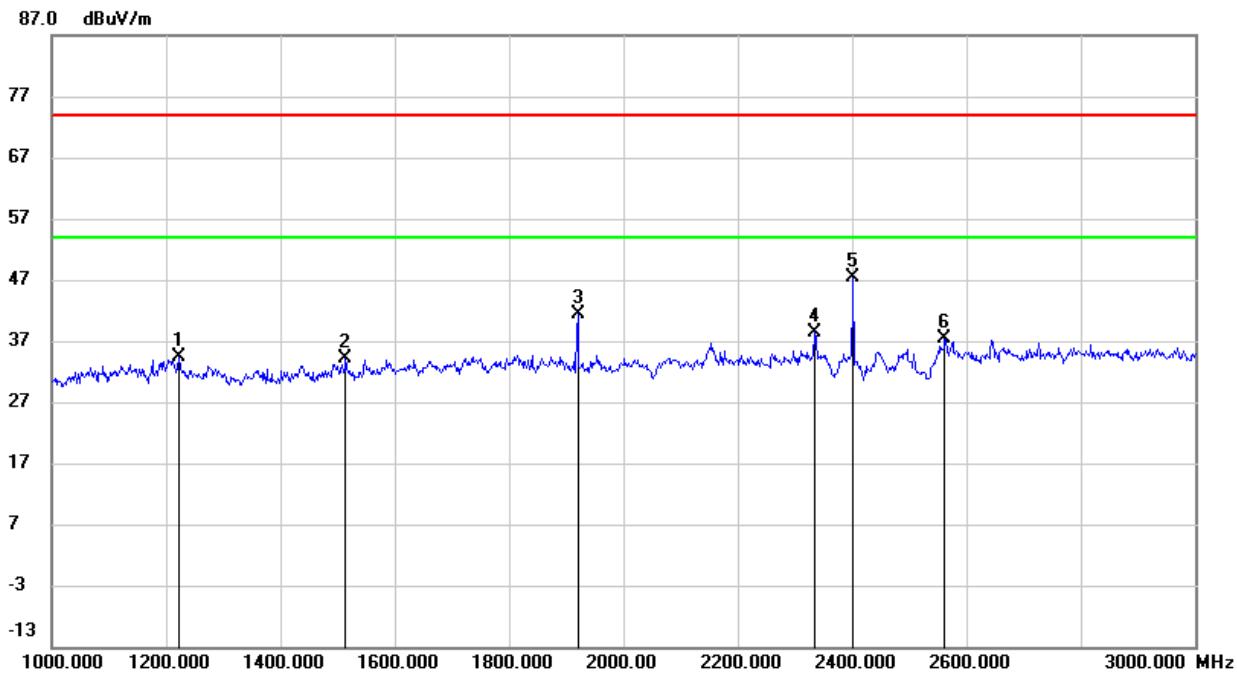
HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)



No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1194.000	49.06	-13.75	35.31	74.00	-38.69	peak
2	1652.000	45.42	-11.52	33.90	74.00	-40.10	peak
3	1920.000	55.28	-10.81	44.47	74.00	-29.53	peak
4	2154.000	46.11	-10.00	36.11	74.00	-37.89	peak
5	2402.000	54.99	-8.94	46.05	/	/	Fundamental
6	2562.000	44.74	-8.63	36.11	74.00	-37.89	peak

Note:

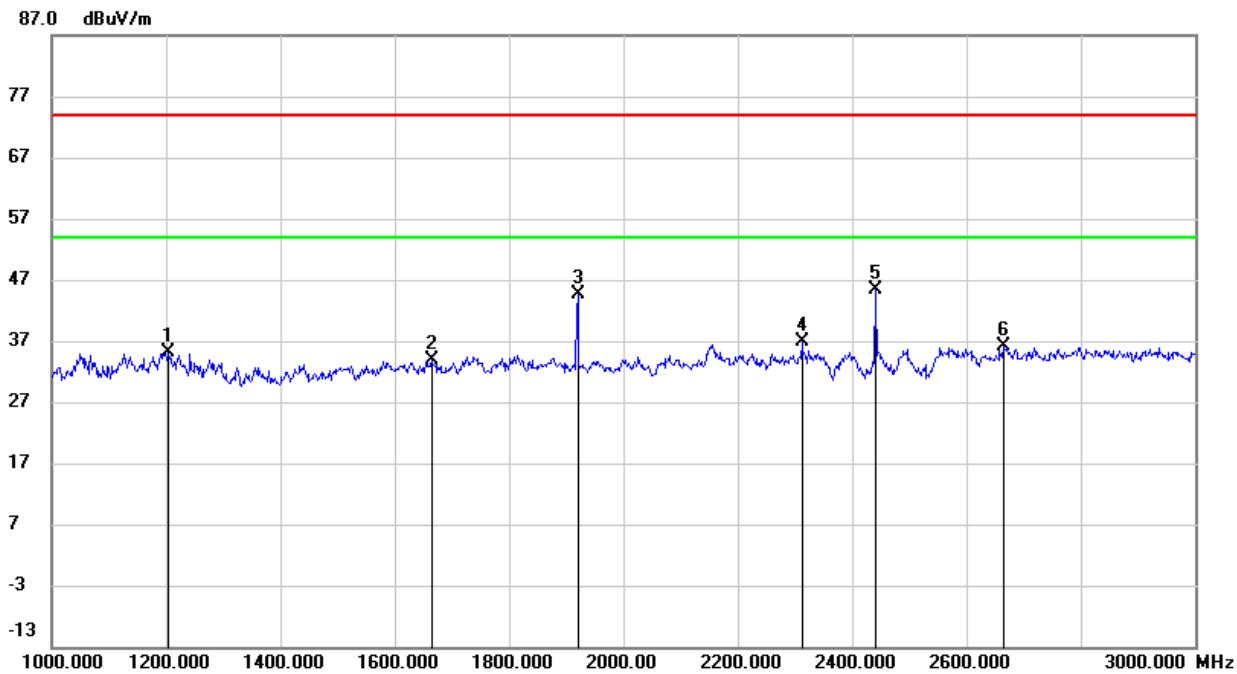
1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1223.000	47.92	-13.63	34.29	74.00	-39.71	peak
2	1515.000	46.33	-12.32	34.01	74.00	-39.99	peak
3	1920.000	52.20	-10.81	41.39	74.00	-32.61	peak
4	2334.000	47.62	-9.20	38.42	74.00	-35.58	peak
5	2402.000	56.23	-8.94	47.29	/	/	Fundamental
6	2562.000	45.98	-8.63	37.35	74.00	-36.65	peak

Note:

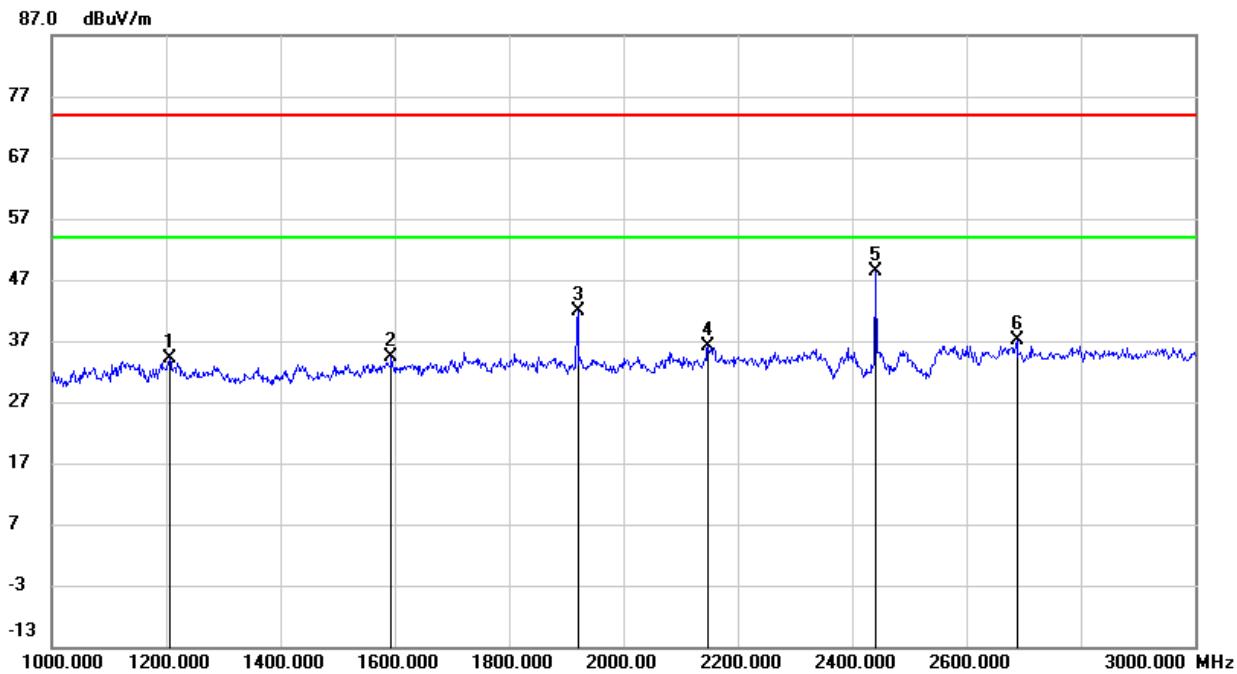
1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1205.000	48.86	-13.69	35.17	74.00	-38.83	peak
2	1665.000	45.31	-11.43	33.88	74.00	-40.12	peak
3	1920.000	55.32	-10.81	44.51	74.00	-29.49	peak
4	2313.000	46.25	-9.28	36.97	74.00	-37.03	peak
5	2441.000	54.35	-8.85	45.50	/	/	Fundamental
6	2664.000	44.32	-8.28	36.04	74.00	-37.96	peak

Note:

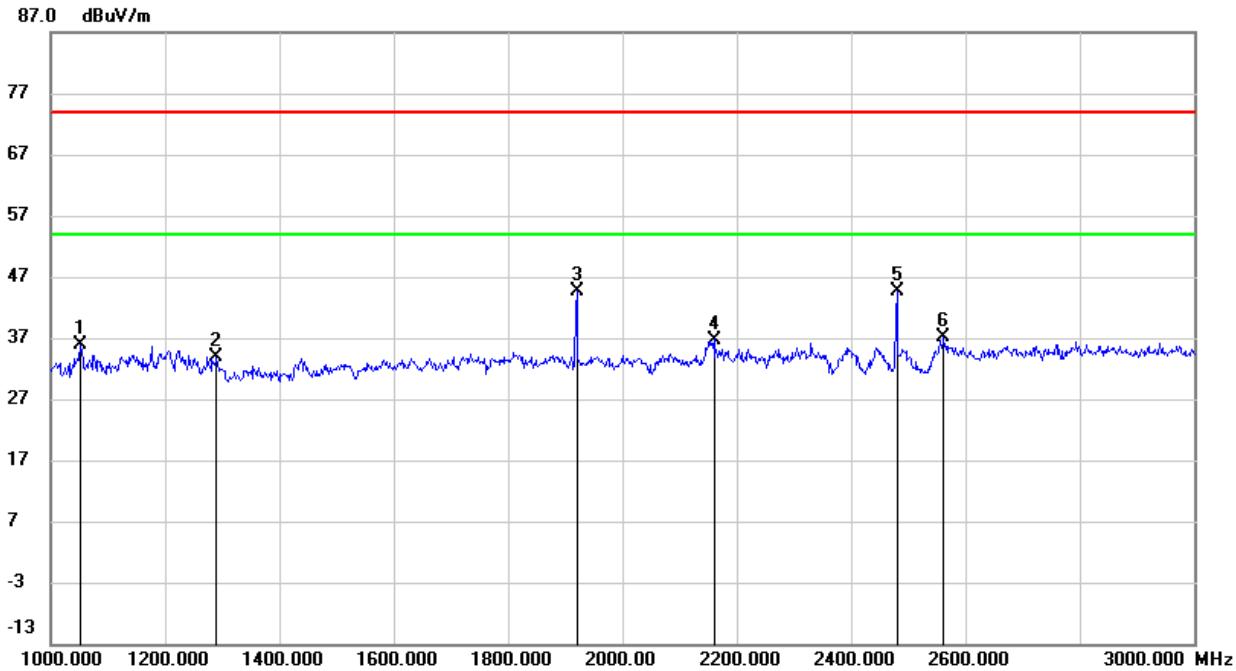
1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1207.000	47.71	-13.69	34.02	74.00	-39.98	peak
2	1595.000	46.23	-11.88	34.35	74.00	-39.65	peak
3	1920.000	52.65	-10.81	41.84	74.00	-32.16	peak
4	2148.000	46.19	-10.04	36.15	74.00	-37.85	peak
5	2441.000	57.25	-8.85	48.40	/	/	Fundamental
6	2689.000	45.30	-8.17	37.13	74.00	-36.87	peak

Note:

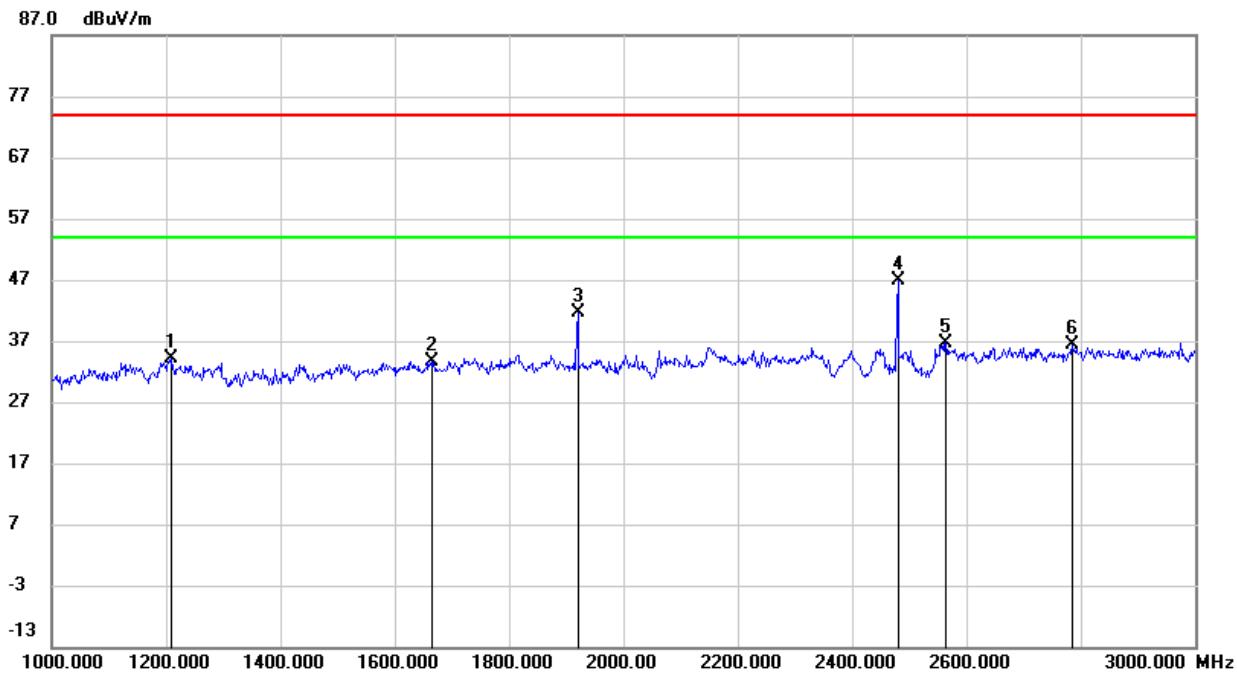
1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1053.000	50.64	-14.70	35.94	74.00	-38.06	peak
2	1291.000	47.40	-13.41	33.99	74.00	-40.01	peak
3	1920.000	55.32	-10.81	44.51	74.00	-29.49	peak
4	2160.000	46.71	-9.96	36.75	74.00	-37.25	peak
5	2480.000	53.33	-8.76	44.57	/	/	Fundamental
6	2562.000	45.78	-8.63	37.15	74.00	-36.85	peak

Note:

1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1209.000	47.79	-13.68	34.11	74.00	-39.89	peak
2	1664.000	45.19	-11.45	33.74	74.00	-40.26	peak
3	1920.000	52.47	-10.81	41.66	74.00	-32.34	peak
4	2480.000	55.68	-8.76	46.92	/	/	Fundamental
5	2564.000	45.23	-8.62	36.61	74.00	-37.39	peak
6	2785.000	44.14	-7.74	36.40	74.00	-37.60	peak

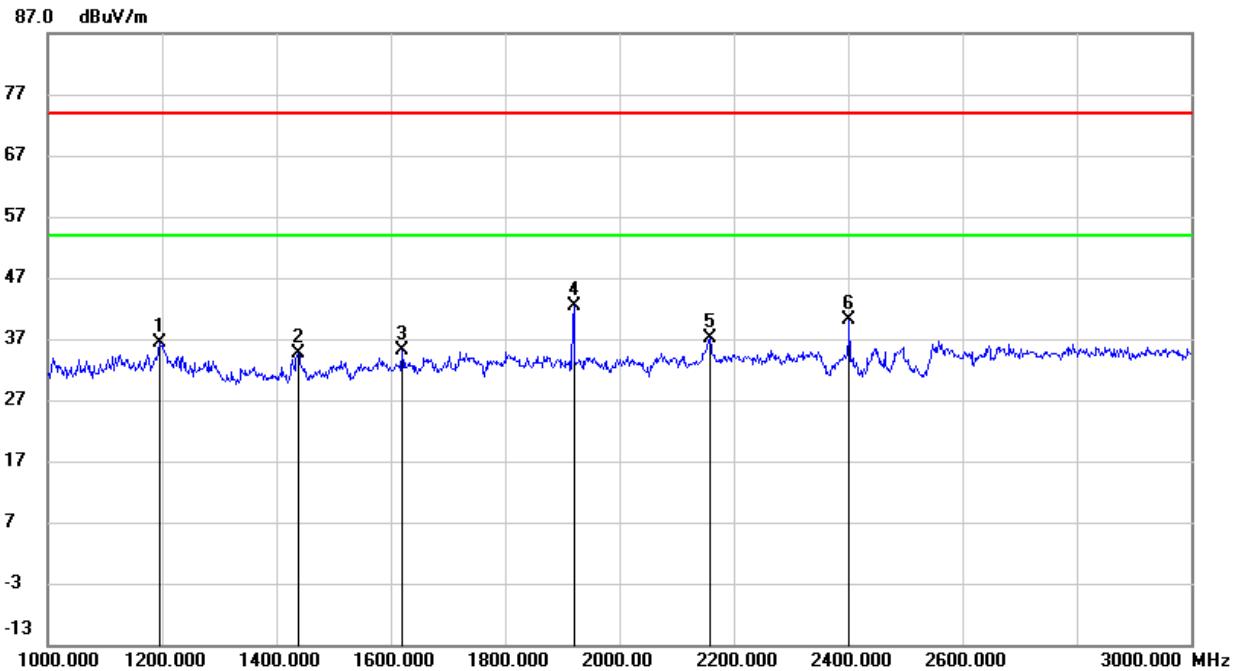
Note:

1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

Note: All the modes, channels and antenna had been tested, but only the worst data was recorded in the report.

8.2.3. GFSK MODE PCB ANTENNA

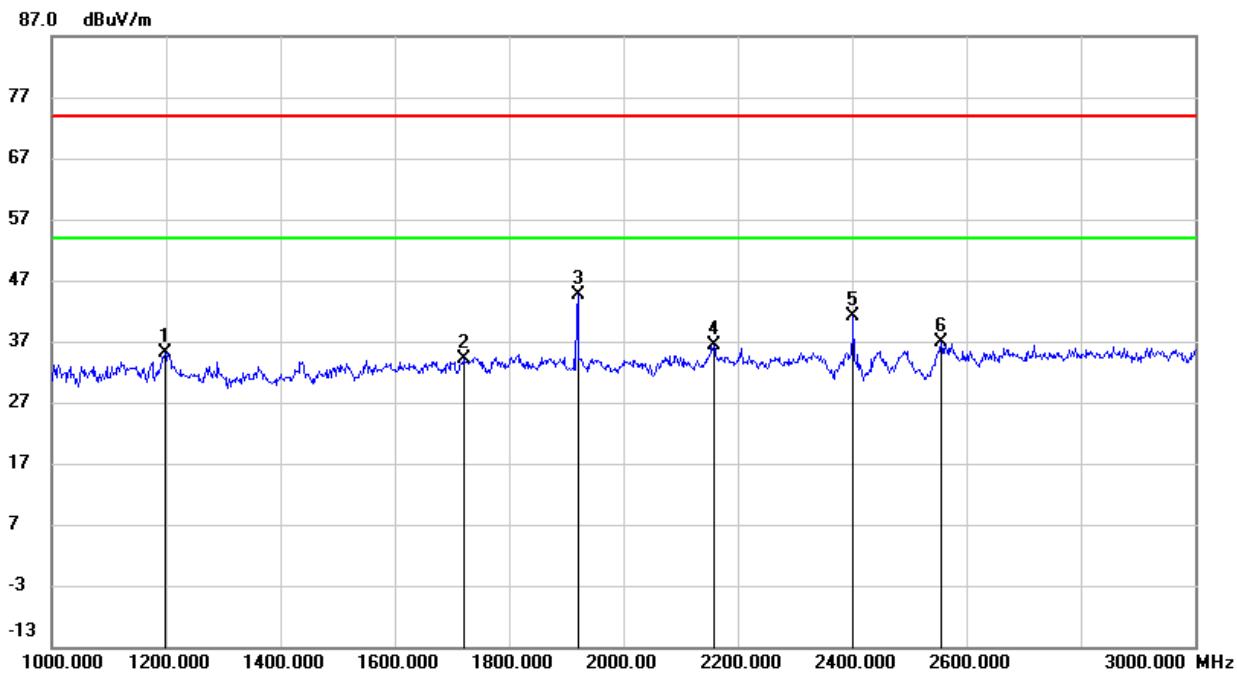
HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)



No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1196.000	50.07	-13.73	36.34	74.00	-37.66	peak
2	1438.000	47.33	-12.81	34.52	74.00	-39.48	peak
3	1621.000	46.75	-11.72	35.03	74.00	-38.97	peak
4	1920.000	53.24	-10.81	42.43	74.00	-31.57	peak
5	2158.000	46.98	-9.97	37.01	74.00	-36.99	peak
6	2402.000	49.04	-8.94	40.10	/	/	Fundamental

Note:

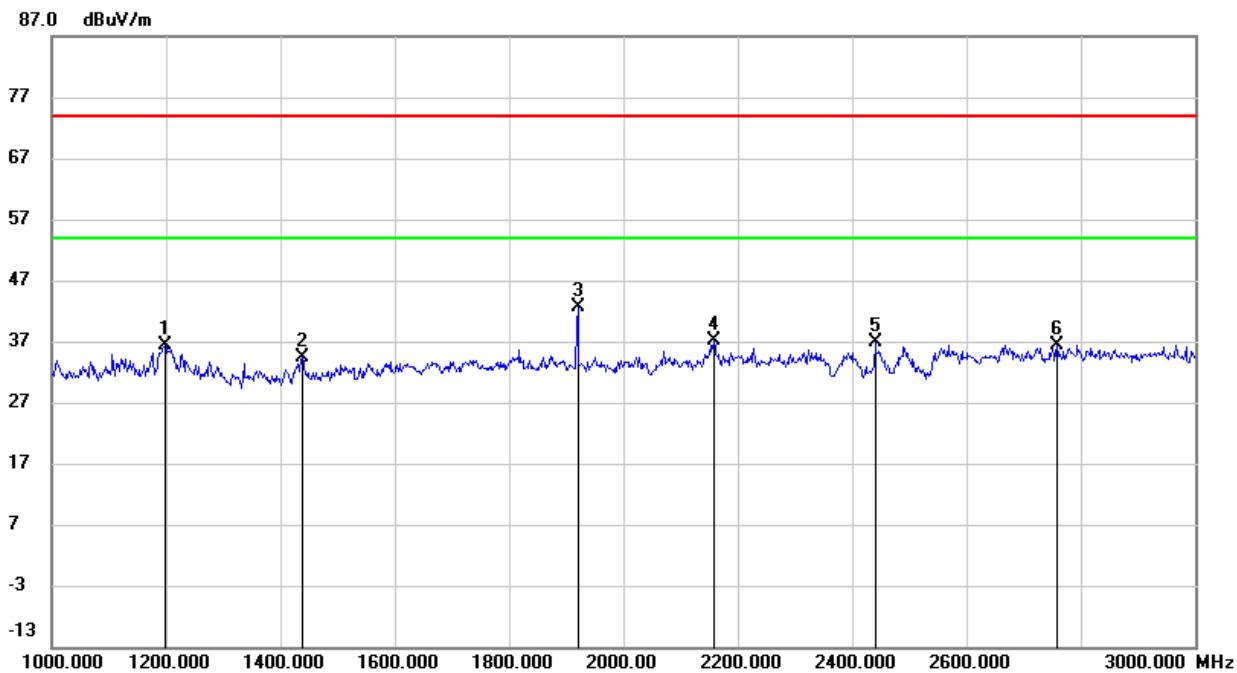
1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

No.	Frequency (MHz)	Reading (dB _{UV})	Correct (dB/m)	Result (dB _{UV} /m)	Limit (dB _{UV} /m)	Margin (dB)	Remark
1	1199.000	48.91	-13.71	35.20	74.00	-38.80	peak
2	1721.000	45.11	-11.08	34.03	74.00	-39.97	peak
3	1920.000	55.34	-10.81	44.53	74.00	-29.47	peak
4	2159.000	46.33	-9.97	36.36	74.00	-37.64	peak
5	2402.000	49.97	-8.94	41.03	/	/	Fundamental
6	2556.000	45.63	-8.64	36.99	74.00	-37.01	peak

Note:

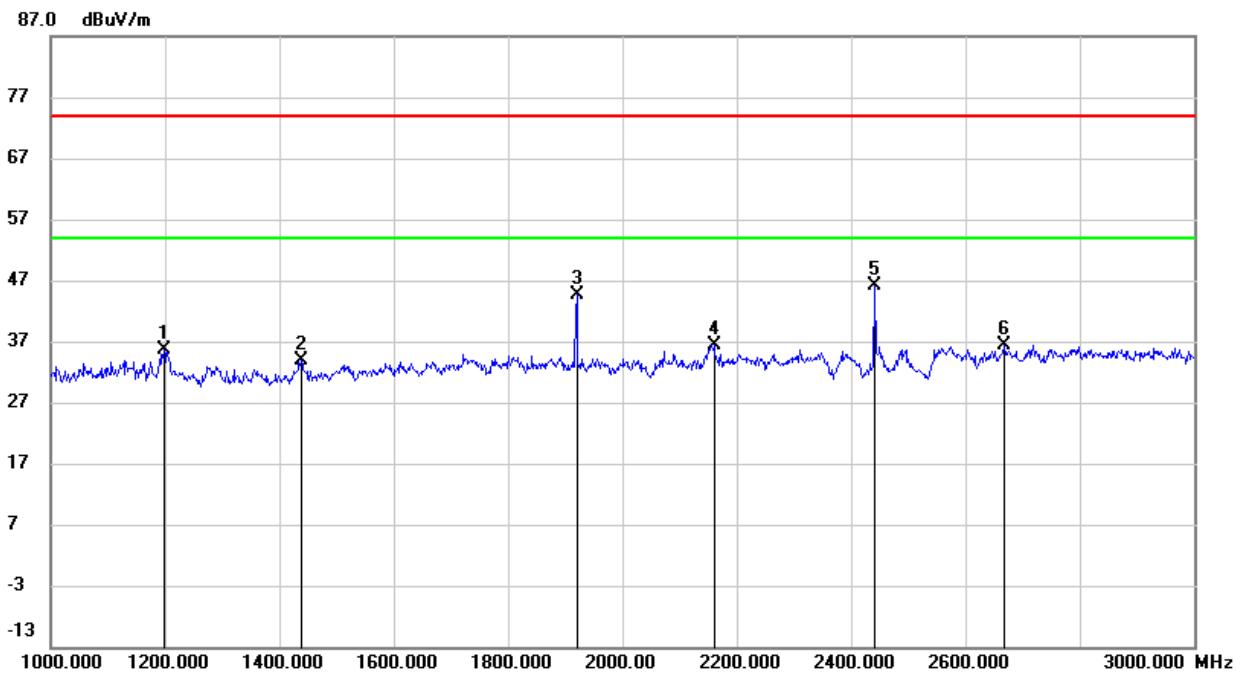
1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

No.	Frequency (MHz)	Reading (dB _{UV})	Correct (dB/m)	Result (dB _{UV} /m)	Limit (dB _{UV} /m)	Margin (dB)	Remark
1	1198.000	50.21	-13.73	36.48	74.00	-37.52	peak
2	1438.000	47.23	-12.81	34.42	74.00	-39.58	peak
3	1920.000	53.55	-10.81	42.74	74.00	-31.26	peak
4	2159.000	47.08	-9.97	37.11	74.00	-36.89	peak
5	2441.000	45.80	-8.85	36.95	/	/	Fundamental
6	2759.000	44.26	-7.85	36.41	74.00	-37.59	peak

Note:

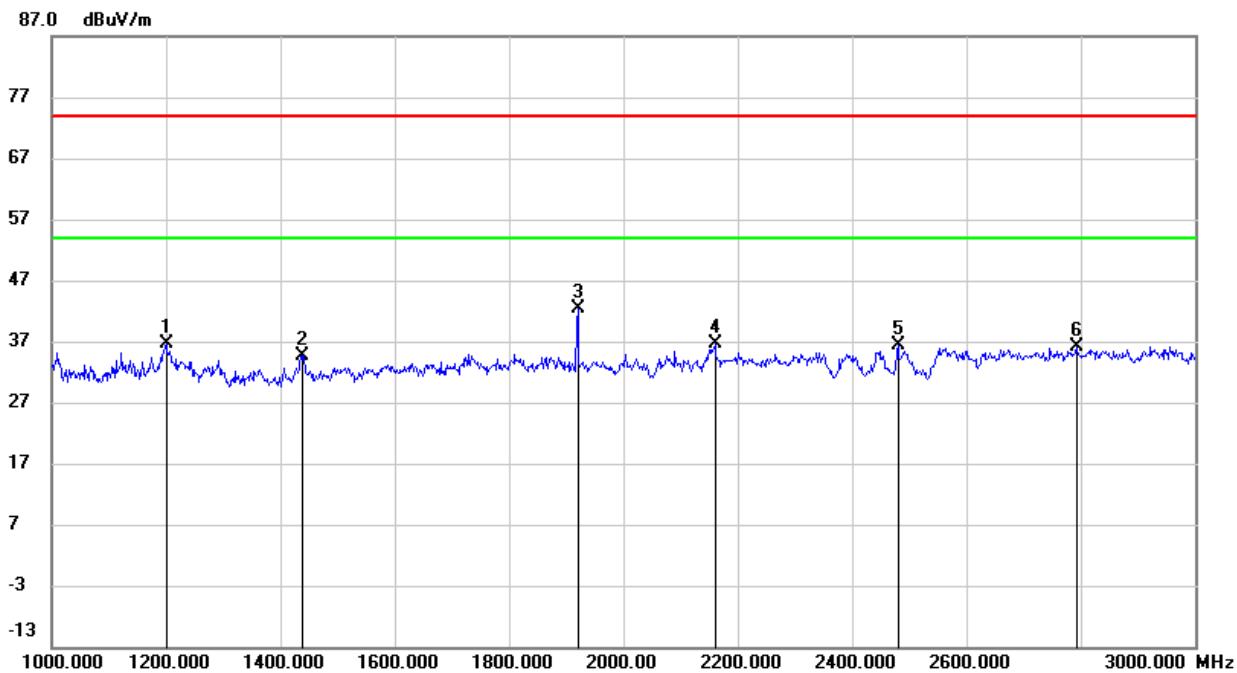
1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

No.	Frequency (MHz)	Reading (dB _{uV})	Correct (dB/m)	Result (dB _{uV/m})	Limit (dB _{uV/m})	Margin (dB)	Remark
1	1199.000	49.25	-13.71	35.54	74.00	-38.46	peak
2	1438.000	46.64	-12.81	33.83	74.00	-40.17	peak
3	1920.000	55.39	-10.81	44.58	74.00	-29.42	peak
4	2161.000	46.39	-9.96	36.43	74.00	-37.57	peak
5	2441.000	55.06	-8.85	46.21	/	/	Fundamental
6	2668.000	44.70	-8.26	36.44	74.00	-37.56	peak

Note:

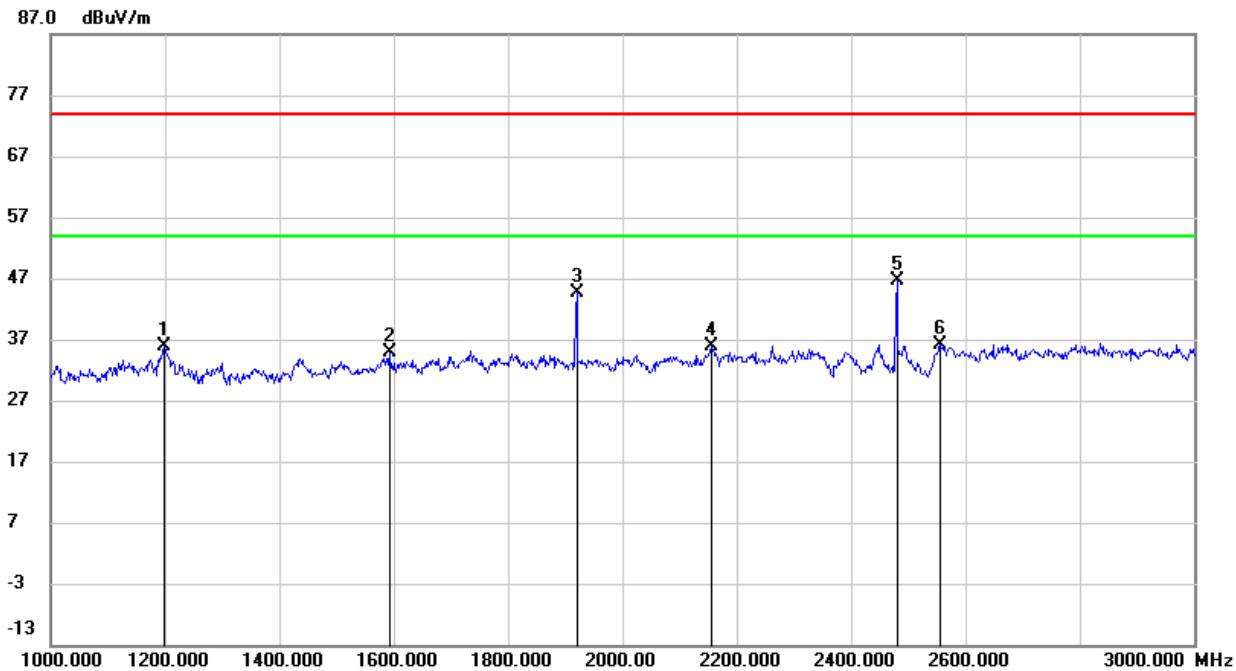
1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1200.000	50.27	-13.71	36.56	74.00	-37.44	peak
2	1438.000	47.44	-12.81	34.63	74.00	-39.37	peak
3	1920.000	53.16	-10.81	42.35	74.00	-31.65	peak
4	2160.000	46.62	-9.96	36.66	74.00	-37.34	peak
5	2480.000	45.17	-8.76	36.41	/	/	Fundamental
6	2793.000	43.85	-7.69	36.16	74.00	-37.84	peak

Note:

1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

No.	Frequency (MHz)	Reading (dB _{UV})	Correct (dB/m)	Result (dB _{UV} /m)	Limit (dB _{UV} /m)	Margin (dB)	Remark
1	1198.000	49.49	-13.73	35.76	74.00	-38.24	peak
2	1593.000	46.88	-11.89	34.99	74.00	-39.01	peak
3	1920.000	55.40	-10.81	44.59	74.00	-29.41	peak
4	2157.000	45.87	-9.98	35.89	74.00	-38.11	peak
5	2480.000	55.46	-8.76	46.70	/	/	Fundamental
6	2556.000	44.78	-8.64	36.14	74.00	-37.86	peak

Note:

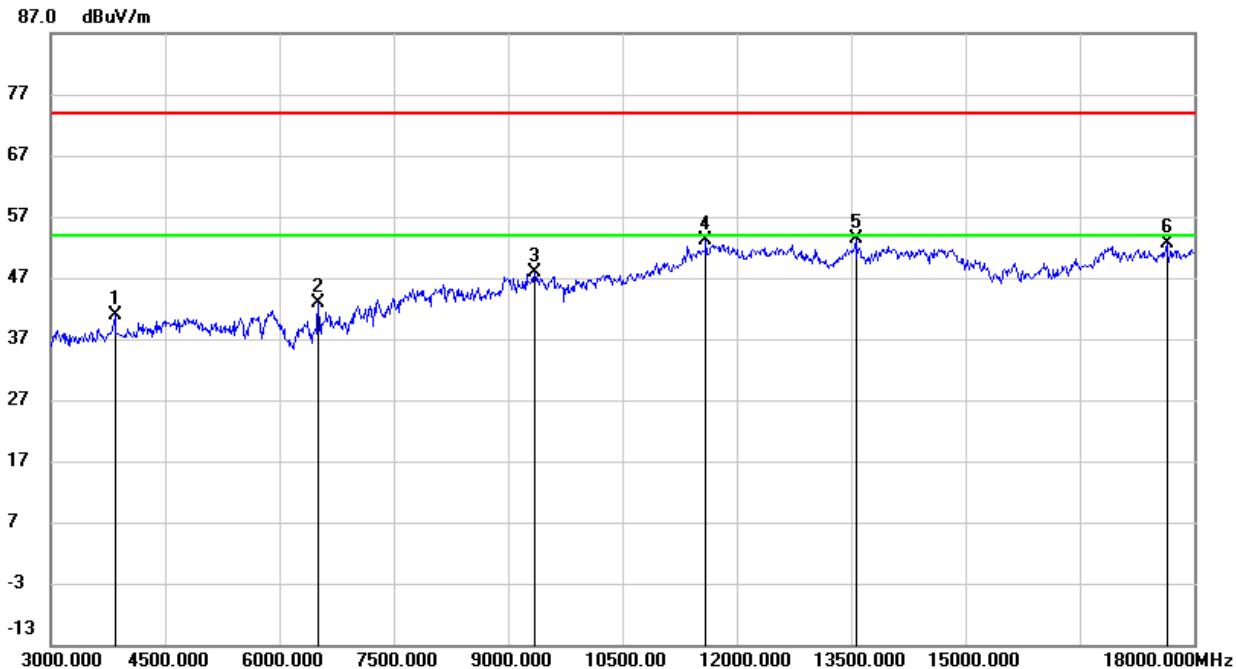
1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

Note: All the modes, channels and antenna had been tested, but only the worst data was recorded in the report.

8.3. SPURIOUS EMISSIONS (3 GHz ~ 18 GHz)

8.3.1. GFSK MODE FPC ANTENNA

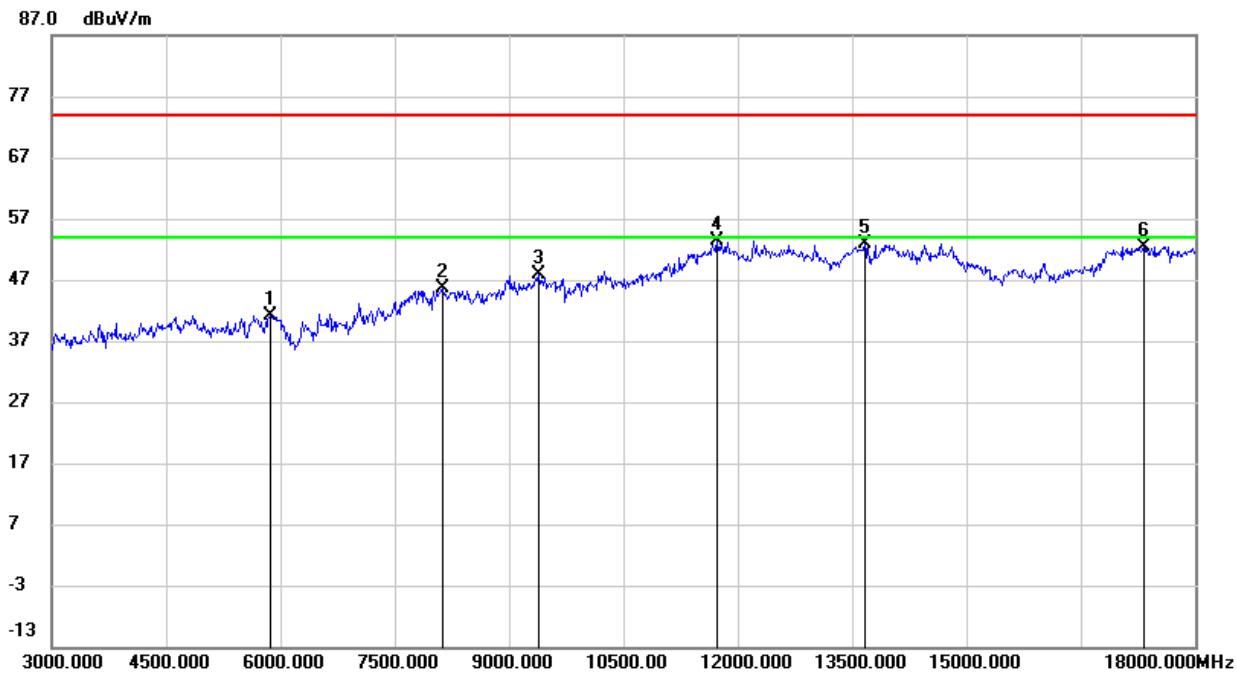
HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)



No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3840.000	44.69	-3.72	40.97	74.00	-33.03	peak
2	6510.000	38.10	4.89	42.99	74.00	-31.01	peak
3	9345.000	37.80	9.96	47.76	74.00	-26.24	peak
4	11602.500	37.03	16.17	53.20	74.00	-20.80	peak
5	13567.500	32.97	20.39	53.36	74.00	-20.64	peak
6	17647.500	29.44	23.15	52.59	74.00	-21.41	peak

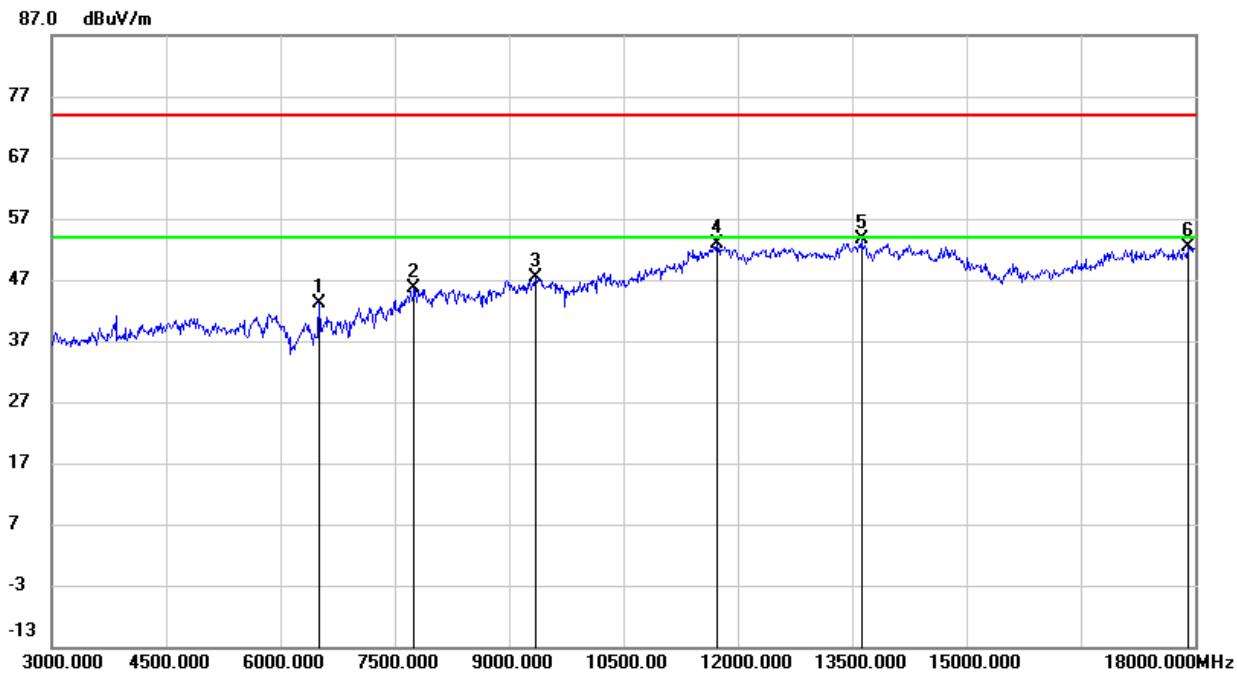
Note:

1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

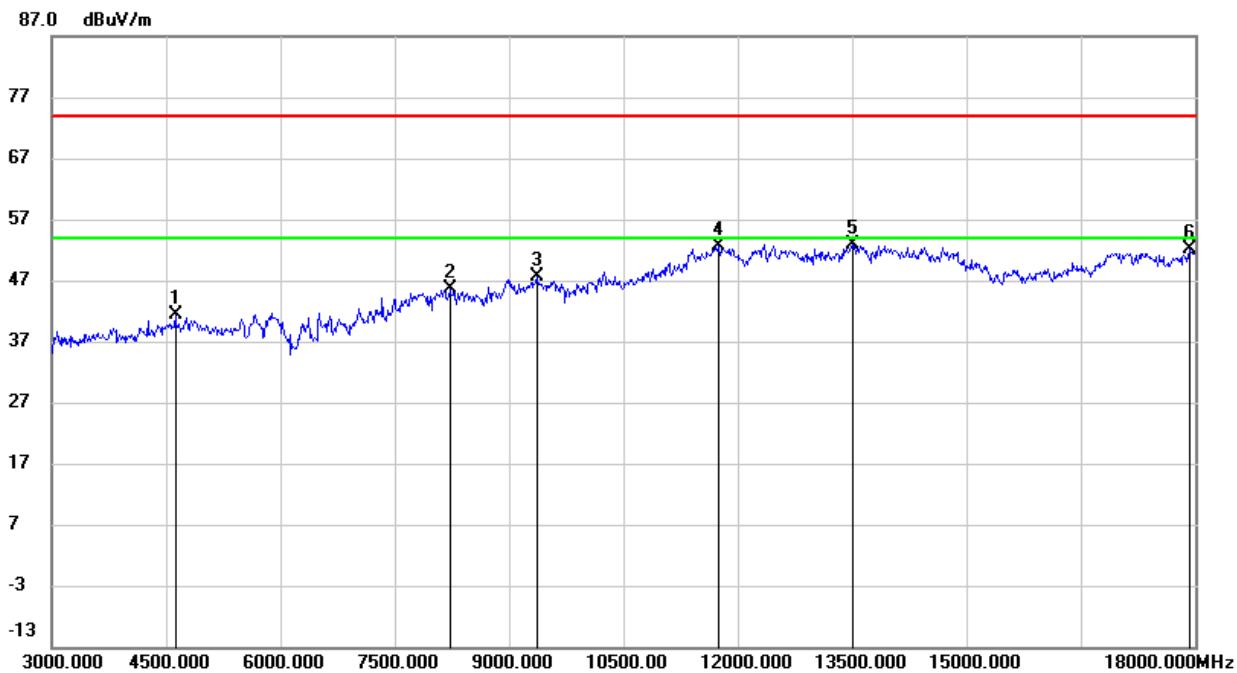
No.	Frequency (MHz)	Reading (dB _{uV})	Correct (dB/m)	Result (dB _{uV/m})	Limit (dB _{uV/m})	Margin (dB)	Remark
1	5865.000	38.91	2.29	41.20	74.00	-32.80	peak
2	8130.000	37.77	7.87	45.64	74.00	-28.36	peak
3	9397.500	37.49	10.33	47.82	74.00	-26.18	peak
4	11737.500	36.59	16.86	53.45	74.00	-20.55	peak
5	13665.000	32.02	20.81	52.83	74.00	-21.17	peak
6	17332.500	30.74	21.72	52.46	74.00	-21.54	peak

Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

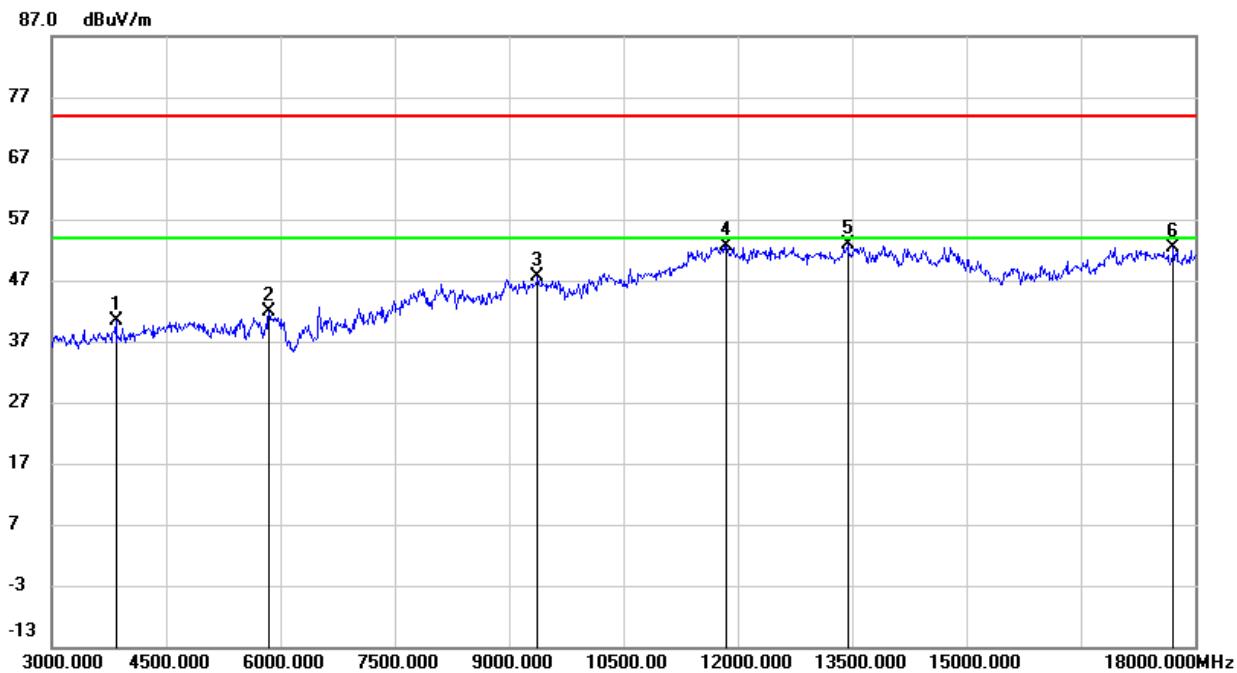
No.	Frequency (MHz)	Reading (dB _{uV})	Correct (dB/m)	Result (dB _{uV/m})	Limit (dB _{uV/m})	Margin (dB)	Remark
1	6510.000	38.12	4.89	43.01	74.00	-30.99	peak
2	7755.000	38.75	6.80	45.55	74.00	-28.45	peak
3	9345.000	37.48	9.96	47.44	74.00	-26.56	peak
4	11737.500	35.98	16.86	52.84	74.00	-21.16	peak
5	13620.000	33.00	20.51	53.51	74.00	-20.49	peak
6	17917.500	27.66	24.75	52.41	74.00	-21.59	peak

Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

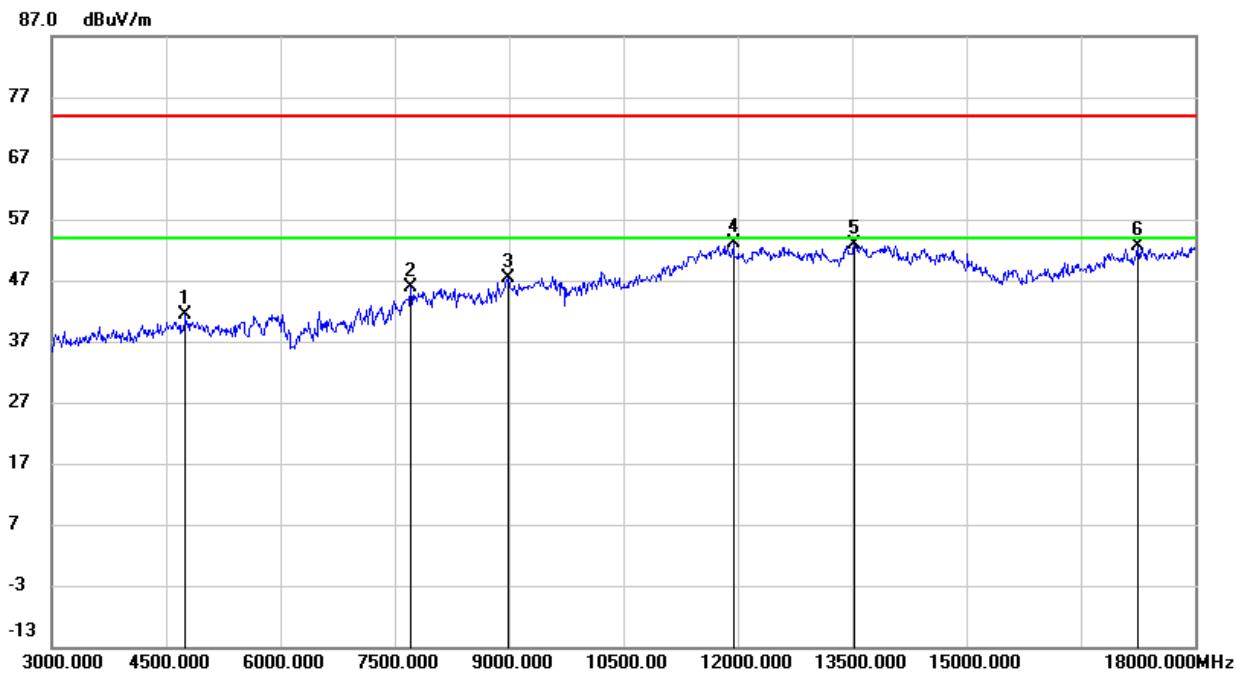
No.	Frequency (MHz)	Reading (dB _{UV})	Correct (dB/m)	Result (dB _{UV} /m)	Limit (dB _{UV} /m)	Margin (dB)	Remark
1	4627.500	42.65	-1.22	41.43	74.00	-32.57	peak
2	8227.500	37.95	7.67	45.62	74.00	-28.38	peak
3	9367.500	37.46	10.12	47.58	74.00	-26.42	peak
4	11745.000	35.76	16.87	52.63	74.00	-21.37	peak
5	13515.000	32.38	20.38	52.76	74.00	-21.24	peak
6	17932.500	27.24	24.84	52.08	74.00	-21.92	peak

Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

No.	Frequency (MHz)	Reading (dB _{UV})	Correct (dB/m)	Result (dB _{UV} /m)	Limit (dB _{UV} /m)	Margin (dB)	Remark
1	3840.000	44.14	-3.72	40.42	74.00	-33.58	peak
2	5857.500	39.75	2.22	41.97	74.00	-32.03	peak
3	9382.500	37.39	10.21	47.60	74.00	-26.40	peak
4	11857.500	35.53	17.06	52.59	74.00	-21.41	peak
5	13447.500	32.74	20.13	52.87	74.00	-21.13	peak
6	17715.000	28.65	23.81	52.46	74.00	-21.54	peak

Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

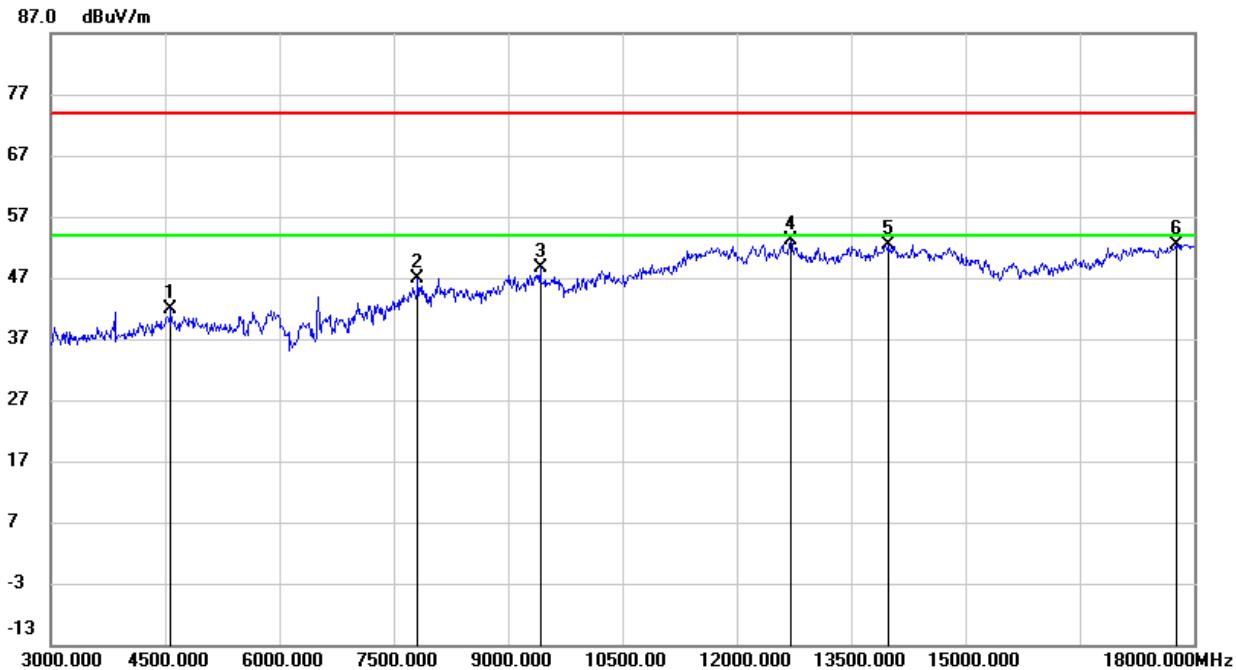
HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

No.	Frequency (MHz)	Reading (dB _{uV})	Correct (dB/m)	Result (dB _{uV/m})	Limit (dB _{uV/m})	Margin (dB)	Remark
1	4755.000	42.20	-0.77	41.43	74.00	-32.57	peak
2	7710.000	39.37	6.44	45.81	74.00	-28.19	peak
3	8985.000	37.41	9.86	47.27	74.00	-26.73	peak
4	11947.500	35.90	17.28	53.18	74.00	-20.82	peak
5	13537.500	32.41	20.39	52.80	74.00	-21.20	peak
6	17250.000	31.08	21.50	52.58	74.00	-21.42	peak

Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

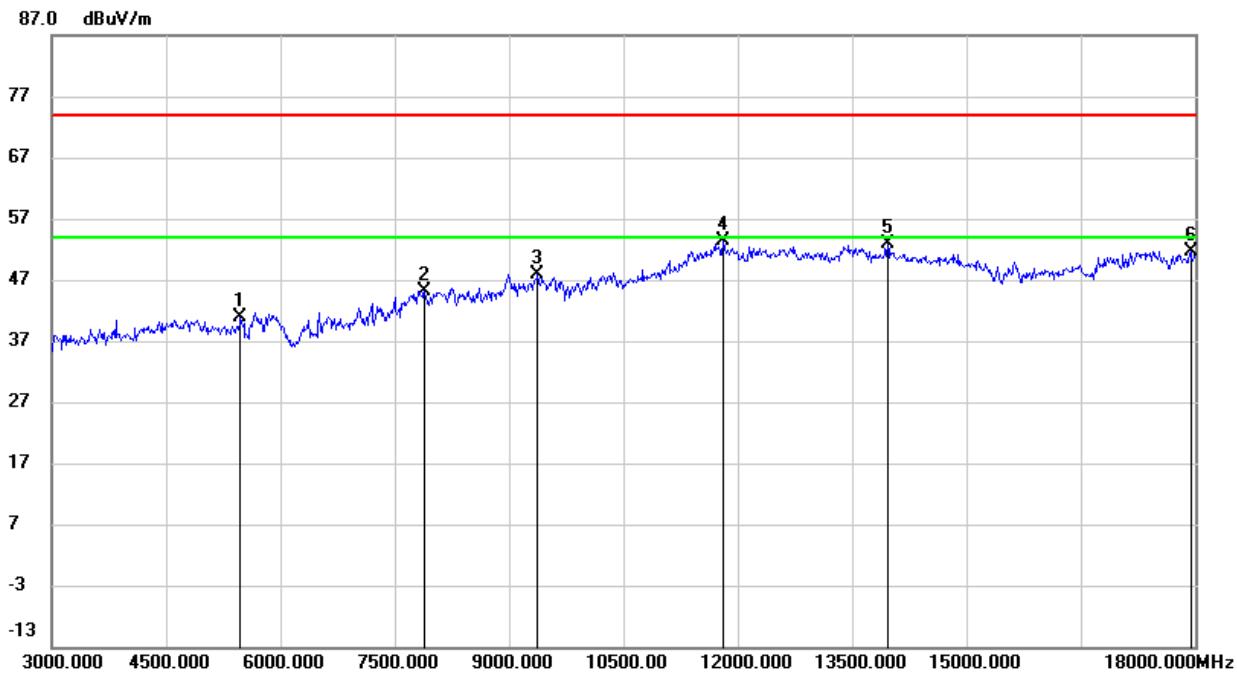
8.3.2. 8DPSK MODE FPC ANTENNA

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)



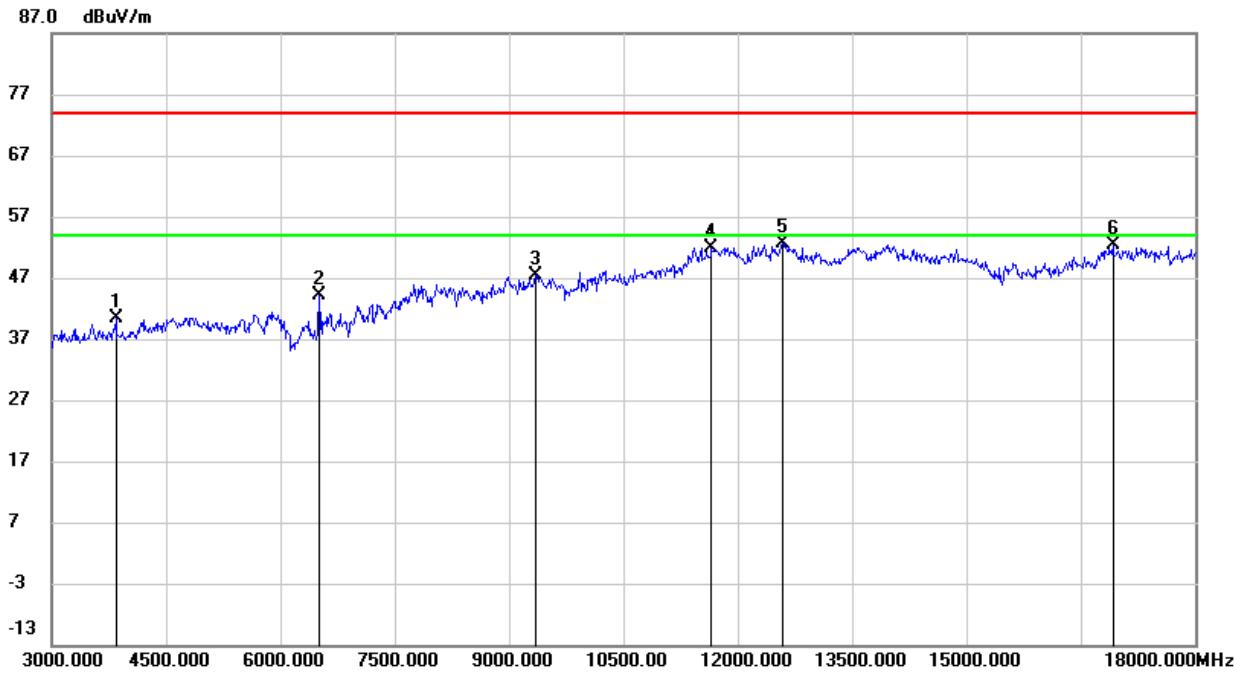
No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4582.500	43.03	-1.26	41.77	74.00	-32.23	peak
2	7822.500	39.85	7.05	46.90	74.00	-27.10	peak
3	9427.500	38.38	10.25	48.63	74.00	-25.37	peak
4	12705.000	35.96	17.23	53.19	74.00	-20.81	peak
5	13995.000	30.97	21.44	52.41	74.00	-21.59	peak
6	17767.500	28.25	24.24	52.49	74.00	-21.51	peak

Note: 1. Peak Result = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

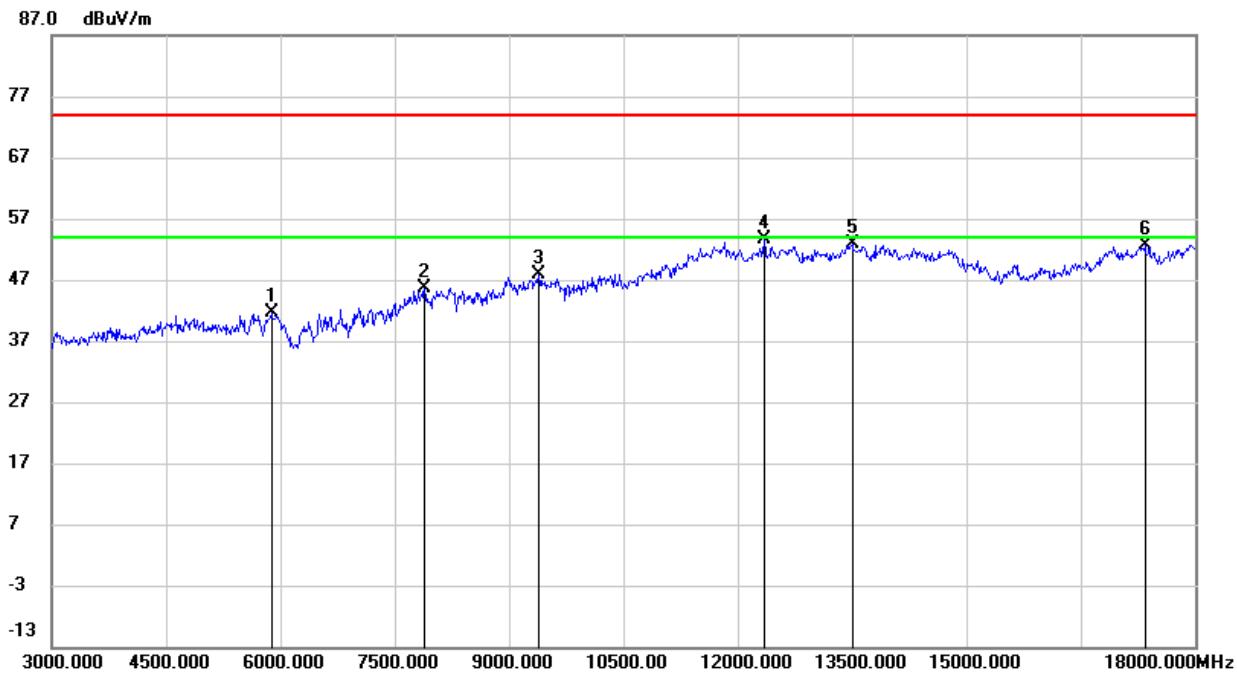
No.	Frequency (MHz)	Reading (dB _{UV})	Correct (dB/m)	Result (dB _{UV} /m)	Limit (dB _{UV} /m)	Margin (dB)	Remark
1	5482.500	39.28	1.55	40.83	74.00	-33.17	peak
2	7897.500	38.58	6.64	45.22	74.00	-28.78	peak
3	9375.000	37.77	10.17	47.94	74.00	-26.06	peak
4	11812.500	36.49	16.89	53.38	74.00	-20.62	peak
5	13965.000	31.53	21.37	52.90	74.00	-21.10	peak
6	17940.000	26.74	24.89	51.63	74.00	-22.37	peak

Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3840.000	44.14	-3.72	40.42	74.00	-33.58	peak
2	6510.000	39.13	4.89	44.02	74.00	-29.98	peak
3	9345.000	37.38	9.96	47.34	74.00	-26.66	peak
4	11662.500	35.36	16.61	51.97	74.00	-22.03	peak
5	12585.000	35.33	17.27	52.60	74.00	-21.40	peak
6	16927.500	32.22	20.13	52.35	74.00	-21.65	peak

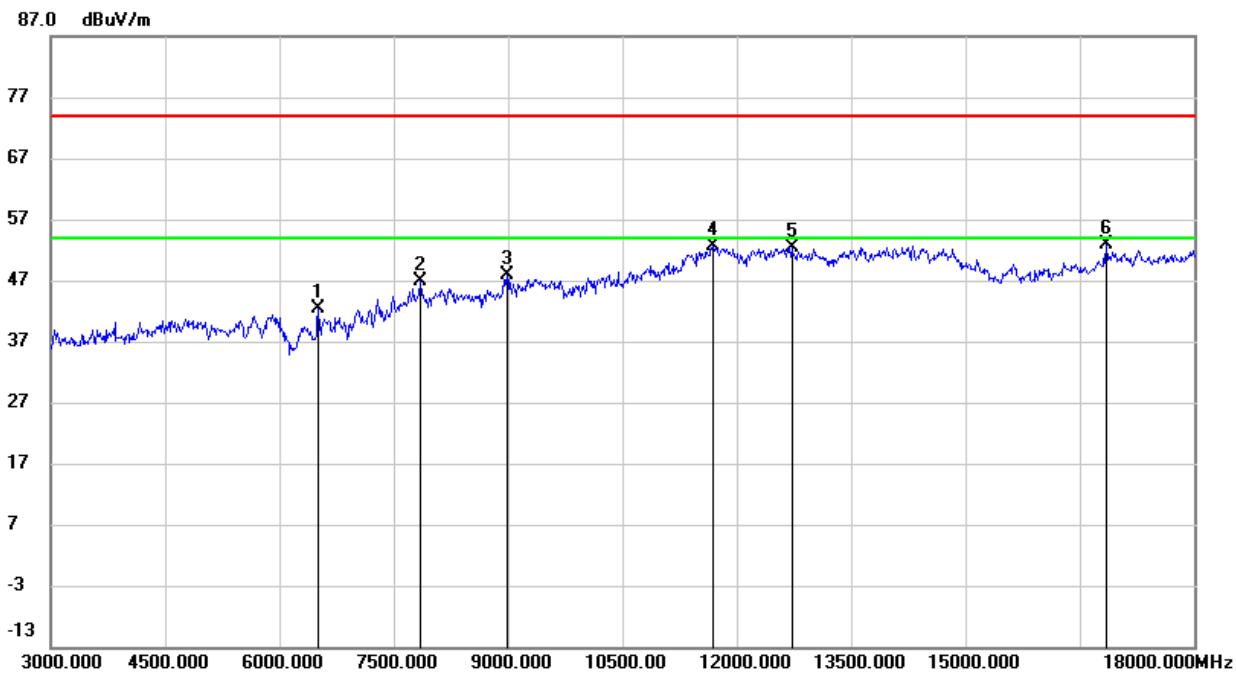
Note: 1. Peak Result = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5887.500	39.21	2.50	41.71	74.00	-32.29	peak
2	7890.000	38.89	6.67	45.56	74.00	-28.44	peak
3	9390.000	37.51	10.27	47.78	74.00	-26.22	peak
4	12345.000	36.03	17.59	53.62	74.00	-20.38	peak
5	13500.000	32.55	20.39	52.94	74.00	-21.06	peak
6	17347.500	31.07	21.64	52.71	74.00	-21.29	peak

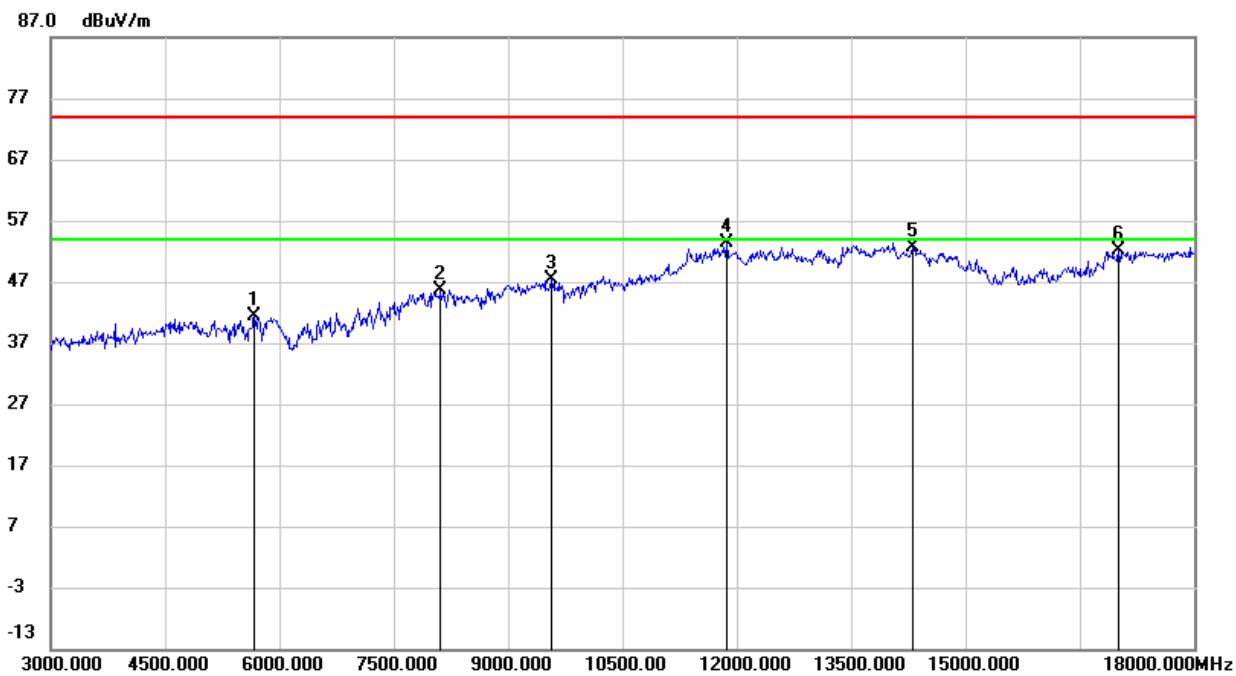
Note:

1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

No.	Frequency (MHz)	Reading (dB _{uV})	Correct (dB/m)	Result (dB _{uV/m})	Limit (dB _{uV/m})	Margin (dB)	Remark
1	6510.000	37.58	4.89	42.47	74.00	-31.53	peak
2	7845.000	39.82	6.94	46.76	74.00	-27.24	peak
3	8992.500	37.93	10.01	47.94	74.00	-26.06	peak
4	11685.000	35.87	16.76	52.63	74.00	-21.37	peak
5	12720.000	35.18	17.28	52.46	74.00	-21.54	peak
6	16845.000	33.15	19.67	52.82	74.00	-21.18	peak

Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

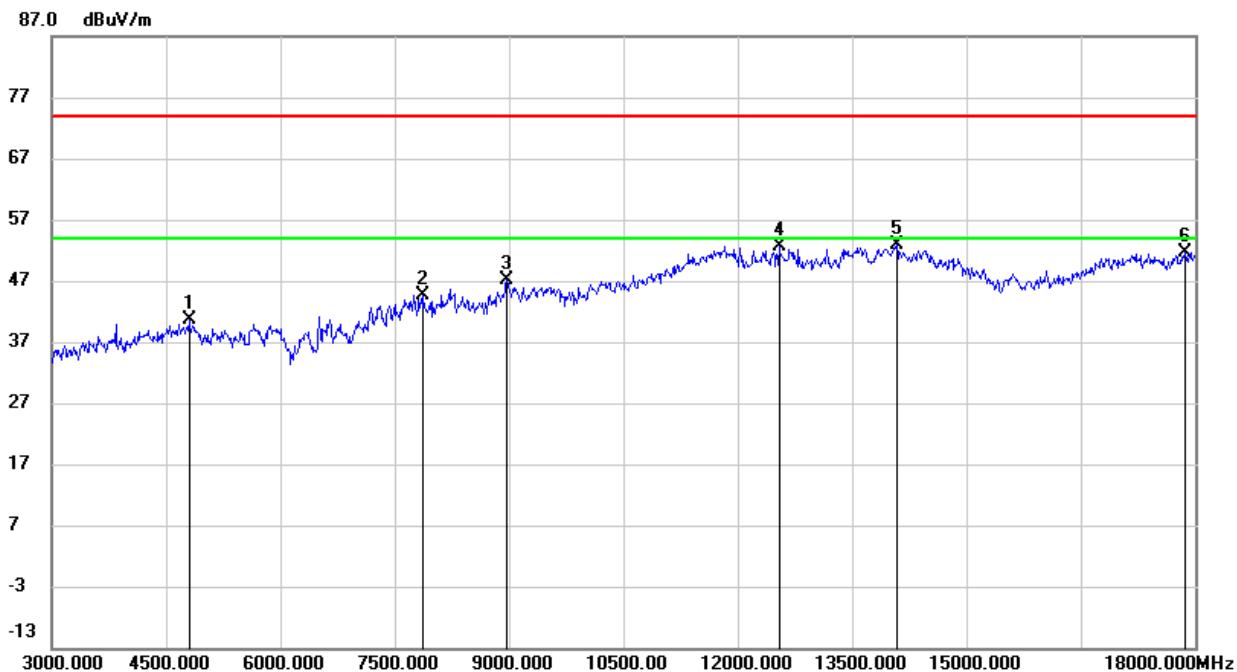
HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

No.	Frequency (MHz)	Reading (dB _{uV})	Correct (dB/m)	Result (dB _{uV/m})	Limit (dB _{uV/m})	Margin (dB)	Remark
1	5670.000	40.00	1.27	41.27	74.00	-32.73	peak
2	8122.500	37.74	7.89	45.63	74.00	-28.37	peak
3	9577.500	36.80	10.54	47.34	74.00	-26.66	peak
4	11865.000	36.23	17.08	53.31	74.00	-20.69	peak
5	14310.000	31.97	20.54	52.51	74.00	-21.49	peak
6	17010.000	32.04	20.06	52.10	74.00	-21.90	peak

Note: 1. Peak Result = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

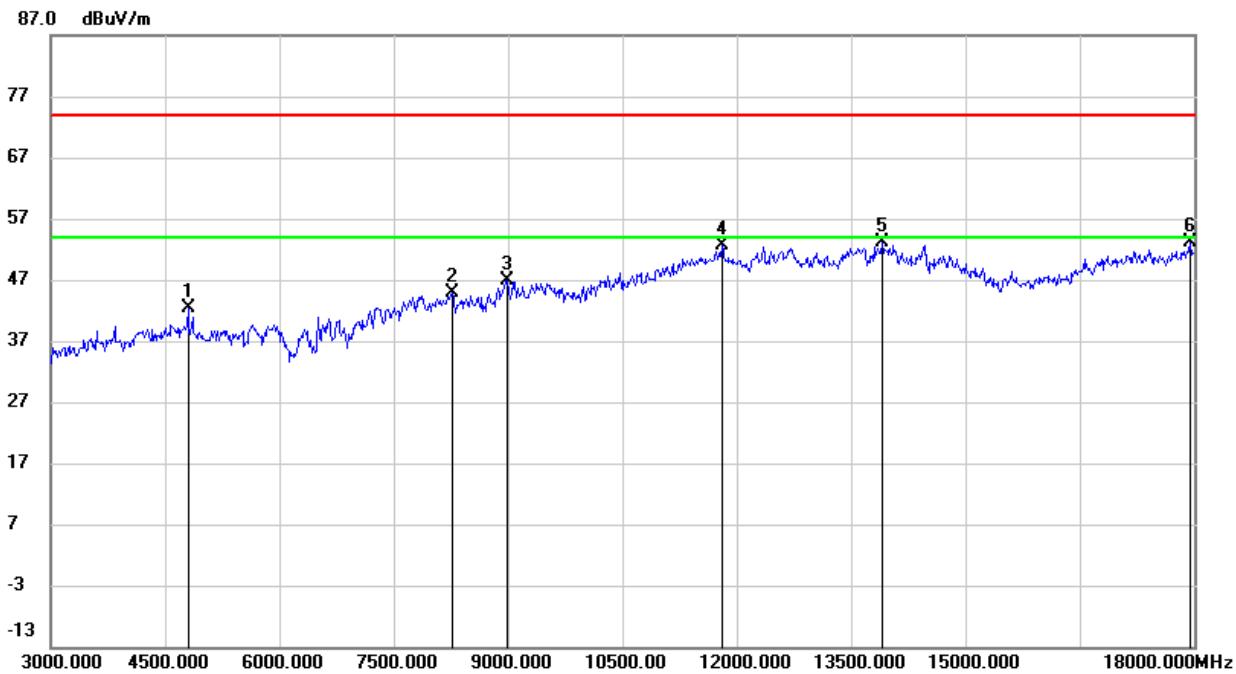
8.3.3. GFSK MODE PIFA ANTENNA

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)



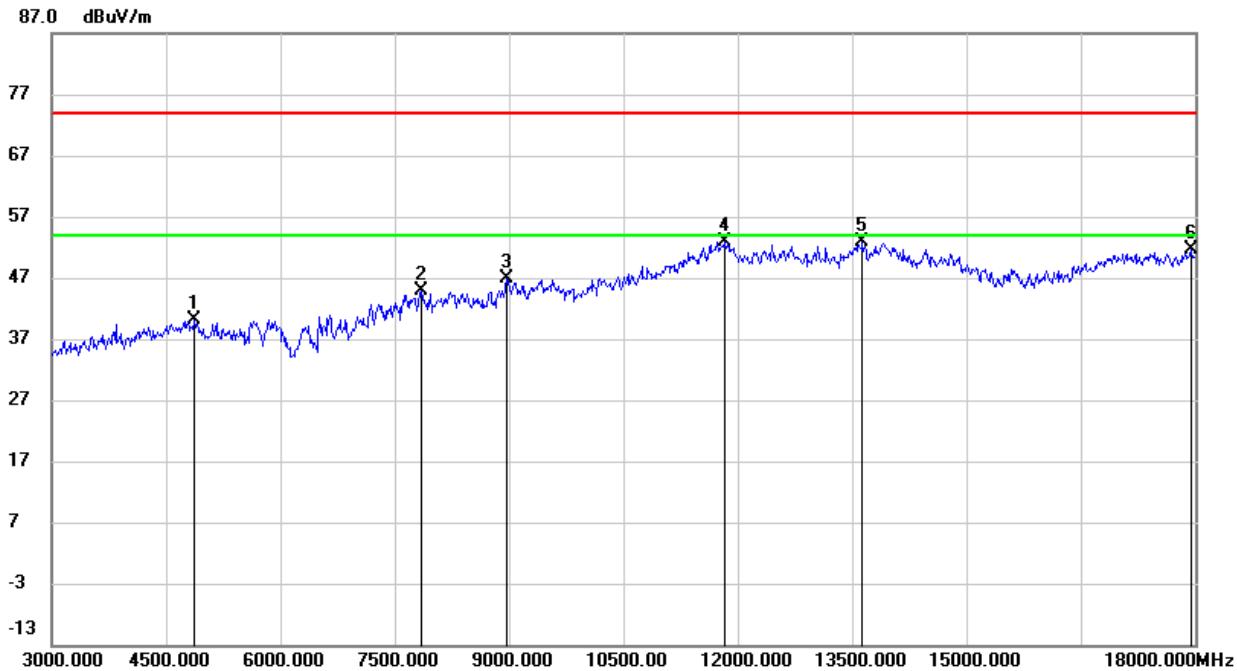
No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4800.000	41.84	-1.14	40.70	74.00	-33.30	peak
2	7882.500	38.93	5.78	44.71	74.00	-29.29	peak
3	8970.000	37.93	9.17	47.10	74.00	-26.90	peak
4	12547.500	35.79	16.83	52.62	74.00	-21.38	peak
5	14085.000	32.54	20.22	52.76	74.00	-21.24	peak
6	17872.500	28.22	23.36	51.58	74.00	-22.42	peak

Note: 1. Peak Result = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

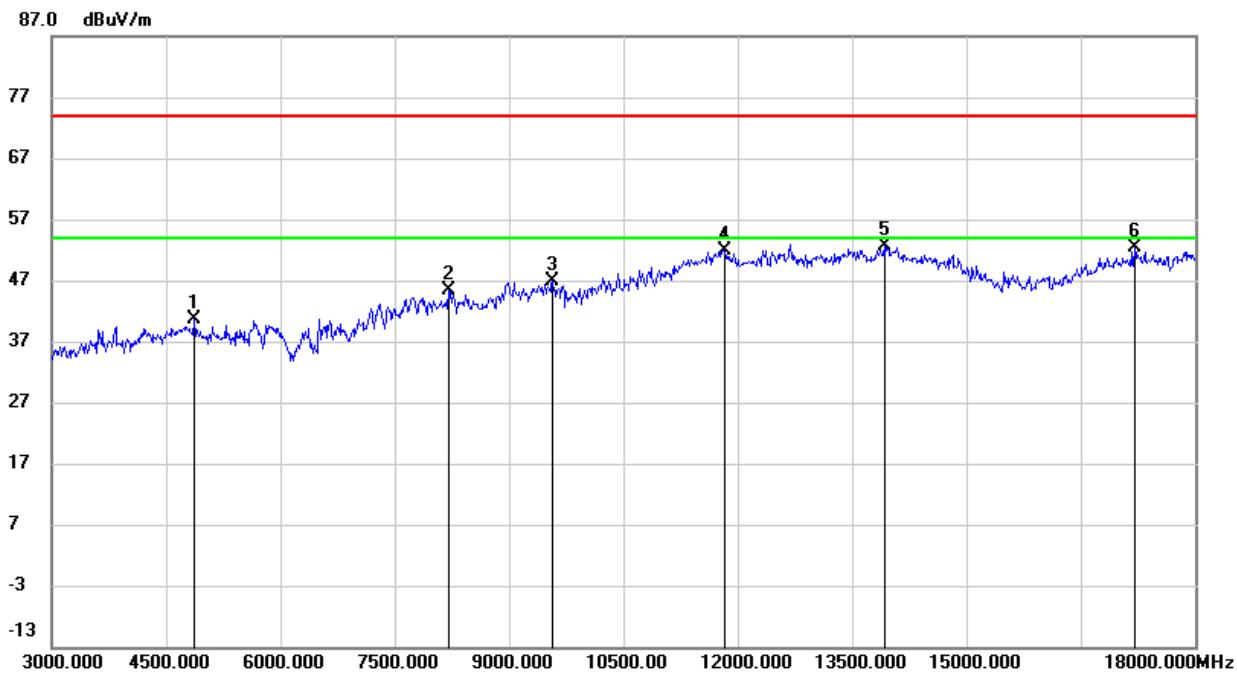
No.	Frequency (MHz)	Reading (dB _{uV})	Correct (dB/m)	Result (dB _{uV/m})	Limit (dB _{uV/m})	Margin (dB)	Remark
1	4800.000	43.45	-1.14	42.31	74.00	-31.69	peak
2	8265.000	37.82	7.03	44.85	74.00	-29.15	peak
3	8985.000	37.61	9.34	46.95	74.00	-27.05	peak
4	11812.500	35.44	17.21	52.65	74.00	-21.35	peak
5	13912.500	32.45	20.58	53.03	74.00	-20.97	peak
6	17940.000	29.58	23.54	53.12	74.00	-20.88	peak

Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

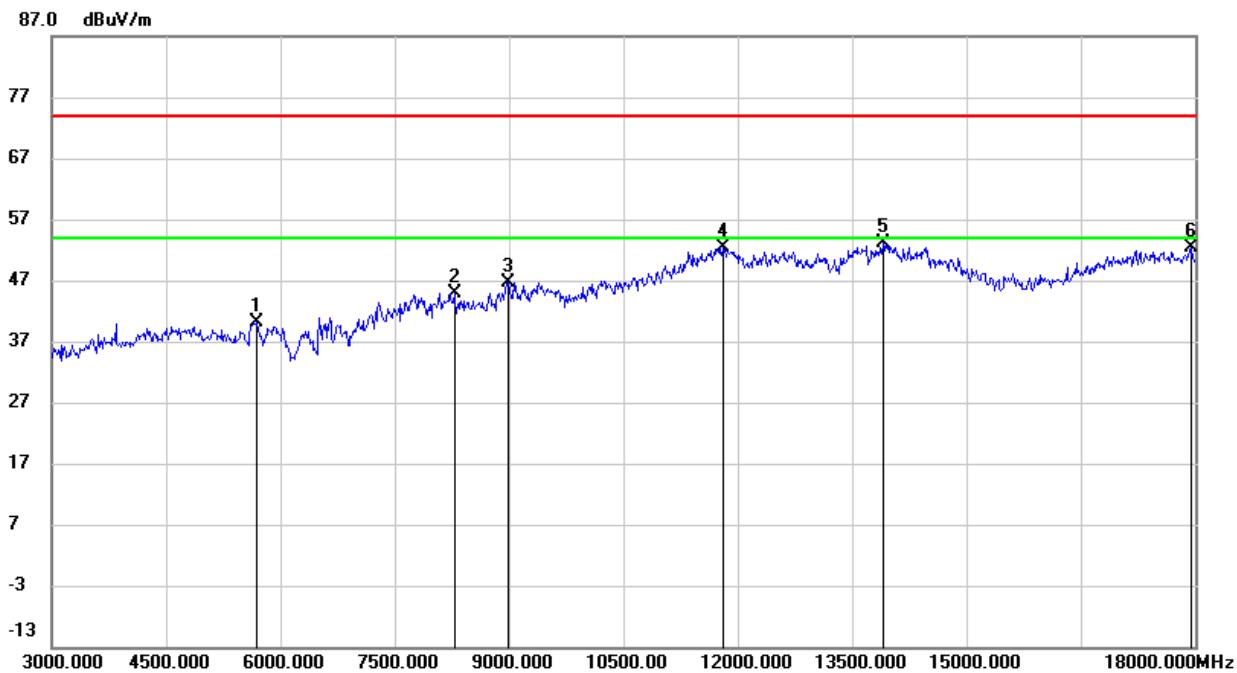
No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4882.500	41.34	-1.13	40.21	74.00	-33.79	peak
2	7845.000	38.86	5.92	44.78	74.00	-29.22	peak
3	8977.500	37.61	9.26	46.87	74.00	-27.13	peak
4	11820.000	35.70	17.21	52.91	74.00	-21.09	peak
5	13642.500	33.12	19.88	53.00	74.00	-21.00	peak
6	17940.000	28.08	23.54	51.62	74.00	-22.38	peak

Note: 1. Peak Result = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

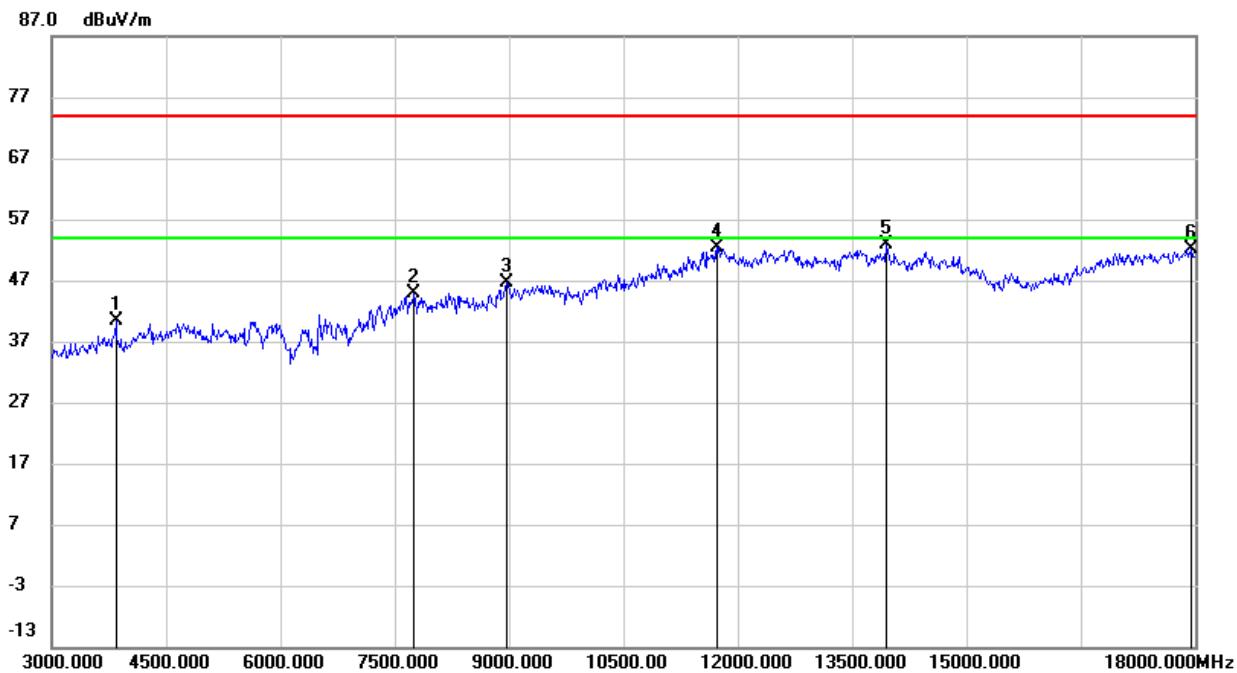
No.	Frequency (MHz)	Reading (dB _{UV})	Correct (dB/m)	Result (dB _{UV} /m)	Limit (dB _{UV} /m)	Margin (dB)	Remark
1	4882.500	41.80	-1.13	40.67	74.00	-33.33	peak
2	8212.500	38.16	7.18	45.34	74.00	-28.66	peak
3	9570.000	36.78	10.07	46.85	74.00	-27.15	peak
4	11835.000	34.78	17.20	51.98	74.00	-22.02	peak
5	13927.500	31.95	20.59	52.54	74.00	-21.46	peak
6	17212.500	32.10	20.16	52.26	74.00	-21.74	peak

Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

No.	Frequency (MHz)	Reading (dB _{UV})	Correct (dB/m)	Result (dB _{UV} /m)	Limit (dB _{UV} /m)	Margin (dB)	Remark
1	5685.000	39.42	0.68	40.10	74.00	-33.90	peak
2	8287.500	38.02	6.97	44.99	74.00	-29.01	peak
3	8992.500	37.23	9.44	46.67	74.00	-27.33	peak
4	11805.000	35.19	17.21	52.40	74.00	-21.60	peak
5	13905.000	32.49	20.57	53.06	74.00	-20.94	peak
6	17962.500	28.91	23.58	52.49	74.00	-21.51	peak

Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

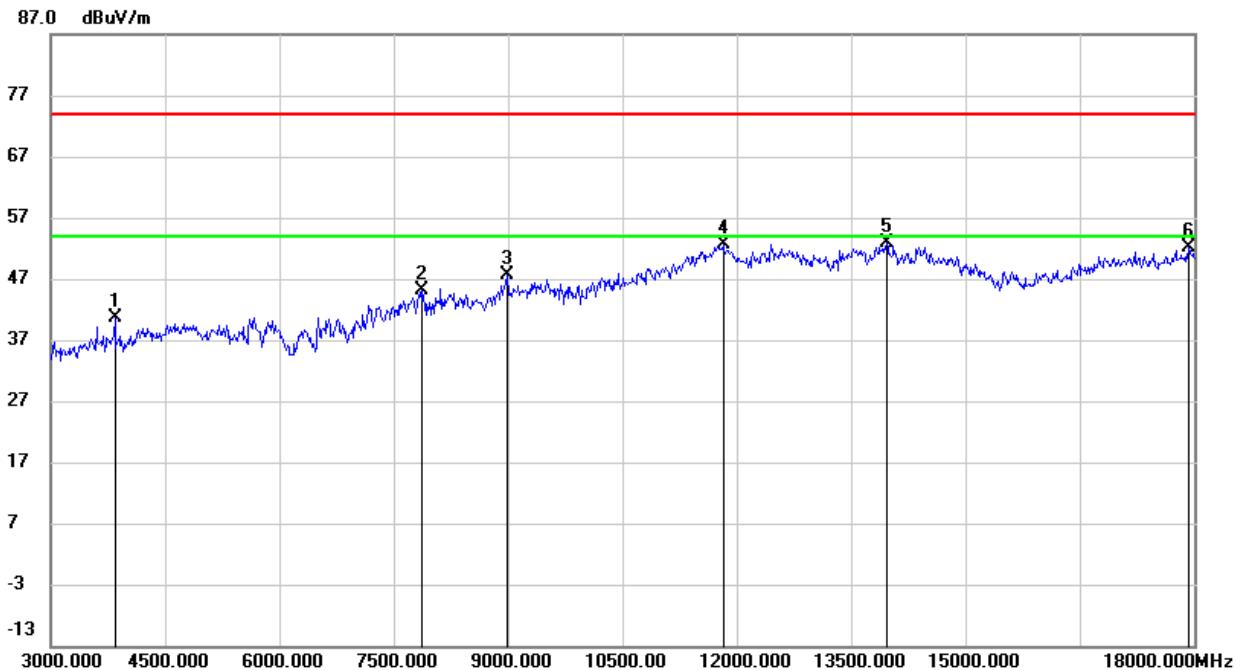
HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

No.	Frequency (MHz)	Reading (dB _{uV})	Correct (dB/m)	Result (dB _{uV/m})	Limit (dB _{uV/m})	Margin (dB)	Remark
1	3840.000	44.69	-4.40	40.29	74.00	-33.71	peak
2	7755.000	39.07	5.93	45.00	74.00	-29.00	peak
3	8970.000	37.49	9.17	46.66	74.00	-27.34	peak
4	11737.500	35.57	16.82	52.39	74.00	-21.61	peak
5	13950.000	32.16	20.61	52.77	74.00	-21.23	peak
6	17962.500	28.51	23.58	52.09	74.00	-21.91	peak

Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

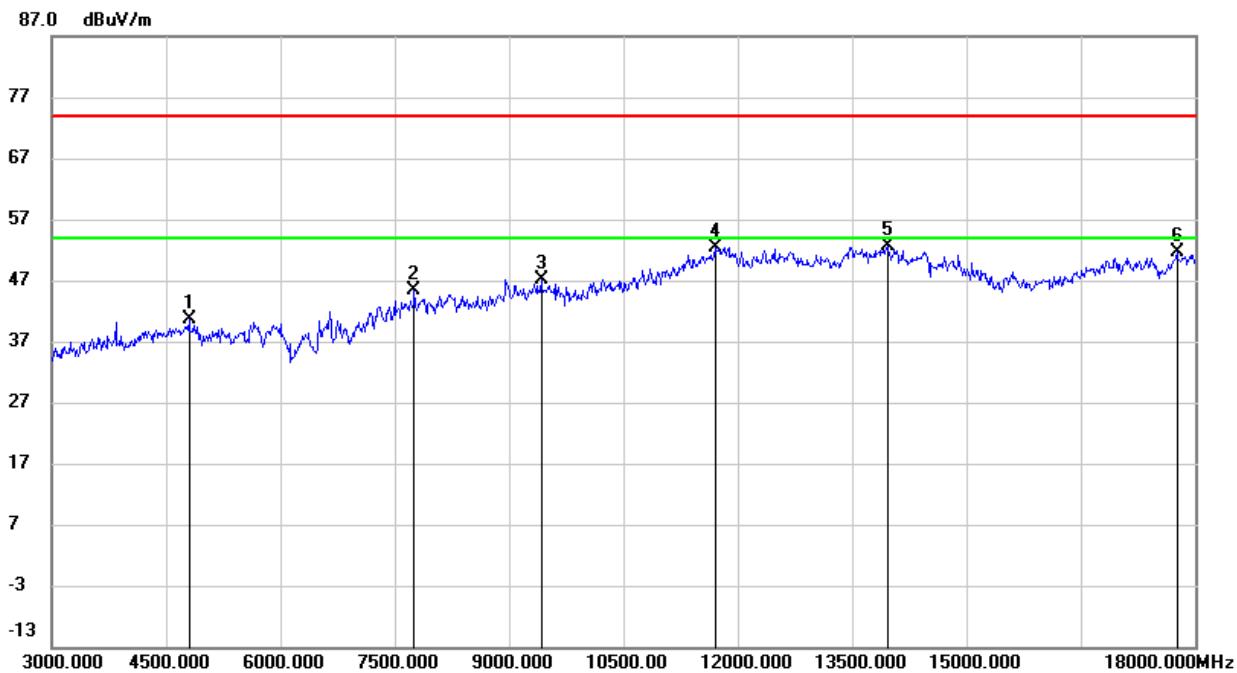
8.3.4. 8DPSK MODE PIFA ANTENNA

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)



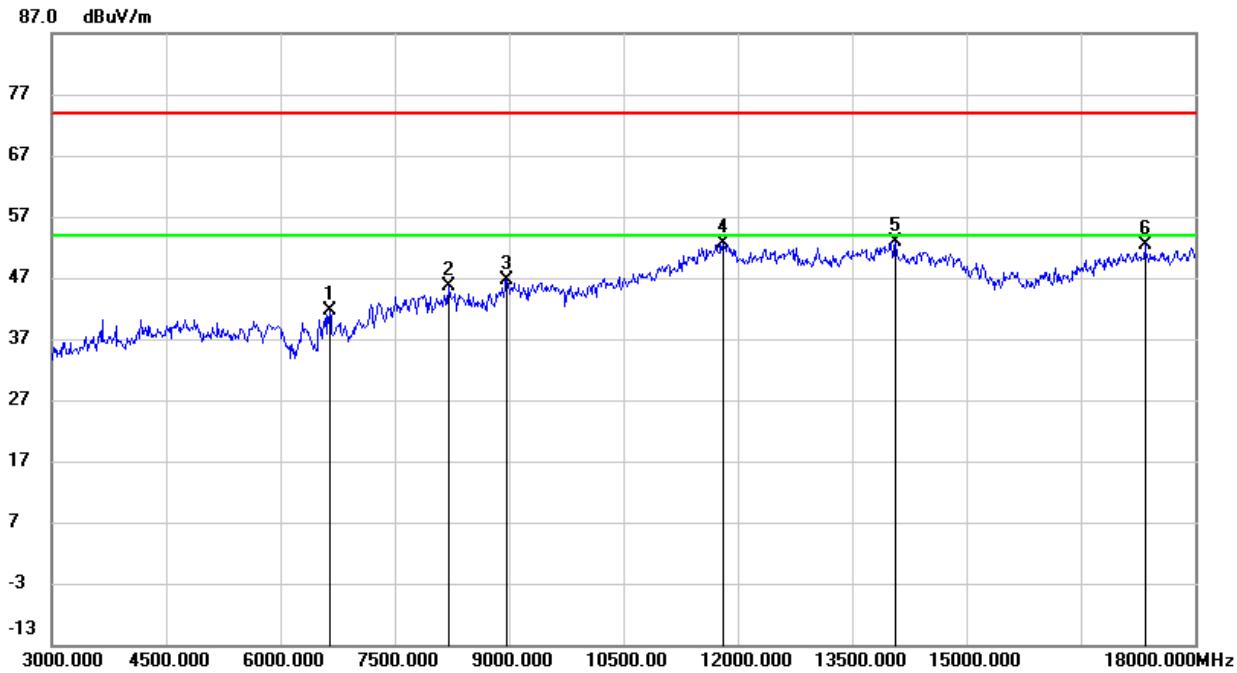
No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3840.000	45.05	-4.40	40.65	74.00	-33.35	peak
2	7882.500	39.38	5.78	45.16	74.00	-28.84	peak
3	8985.000	38.18	9.34	47.52	74.00	-26.48	peak
4	11827.500	35.42	17.20	52.62	74.00	-21.38	peak
5	13965.000	32.36	20.61	52.97	74.00	-21.03	peak
6	17932.500	28.59	23.51	52.10	74.00	-21.90	peak

Note: 1. Peak Result = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

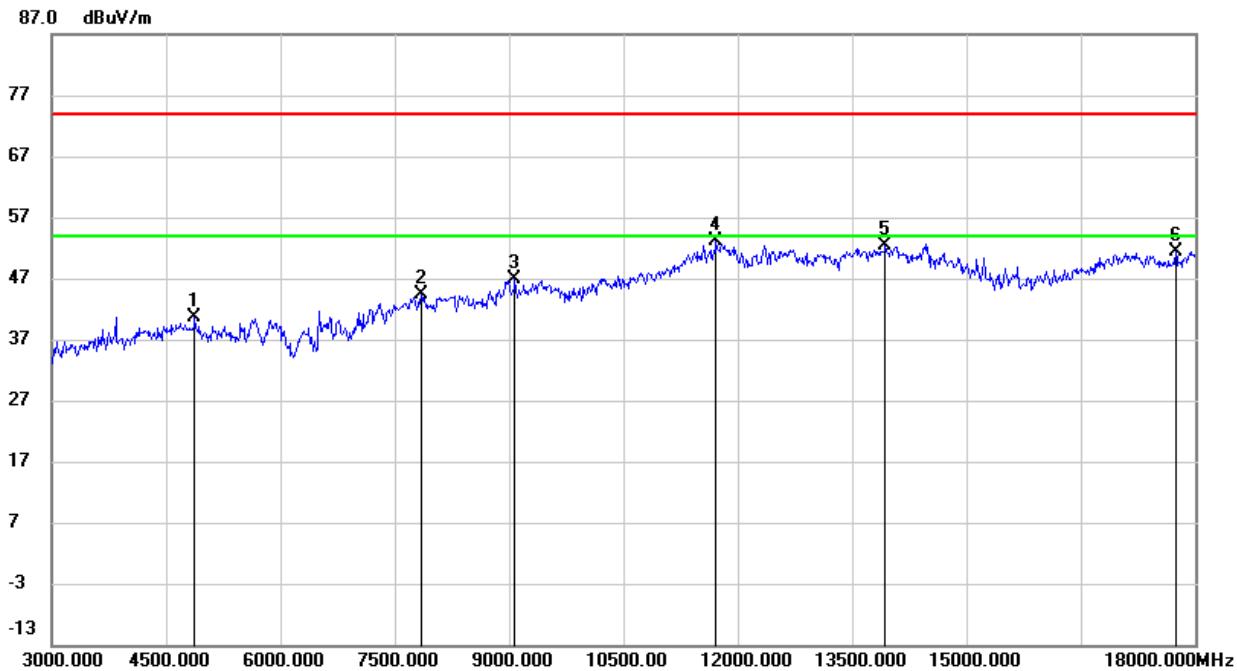
No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4800.000	41.74	-1.14	40.60	74.00	-33.40	peak
2	7755.000	39.42	5.93	45.35	74.00	-28.65	peak
3	9427.500	37.39	9.75	47.14	74.00	-26.86	peak
4	11707.500	35.87	16.63	52.50	74.00	-21.50	peak
5	13972.500	32.10	20.62	52.72	74.00	-21.28	peak
6	17760.000	28.92	22.77	51.69	74.00	-22.31	peak

Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

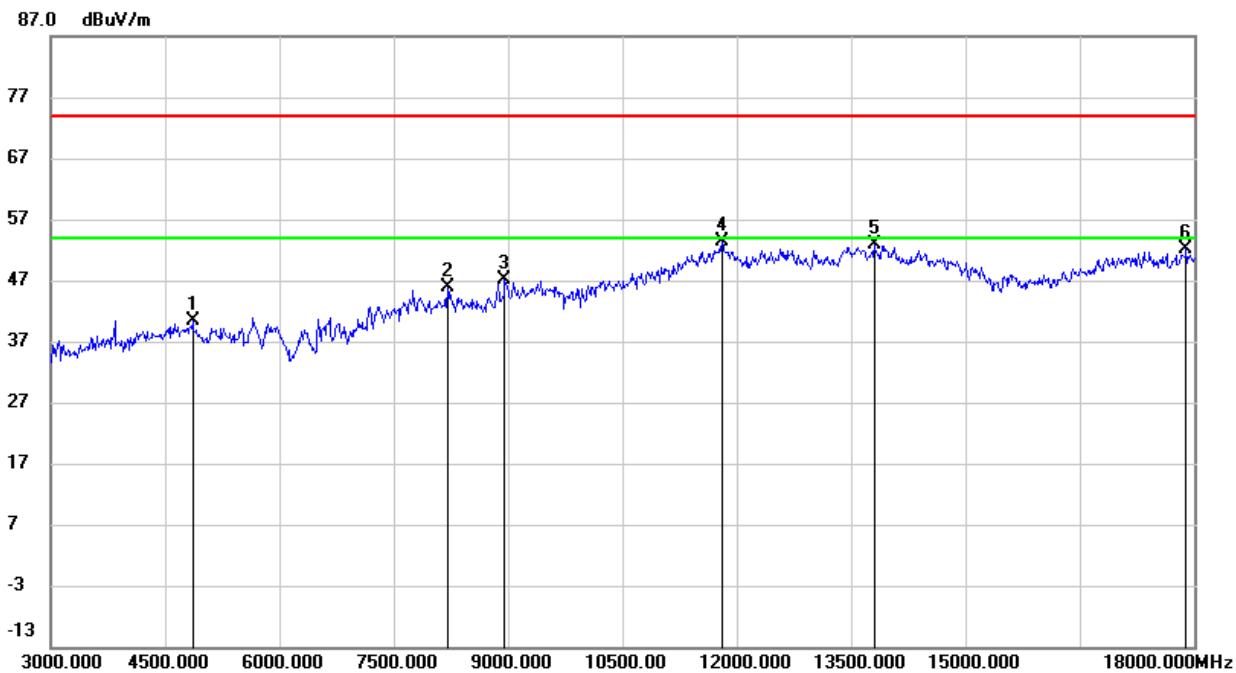
No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6652.500	37.99	3.69	41.68	74.00	-32.32	peak
2	8212.500	38.37	7.18	45.55	74.00	-28.45	peak
3	8977.500	37.35	9.26	46.61	74.00	-27.39	peak
4	11812.500	35.54	17.21	52.75	74.00	-21.25	peak
5	14070.000	32.59	20.29	52.88	74.00	-21.12	peak
6	17347.500	32.27	20.20	52.47	74.00	-21.53	peak

Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

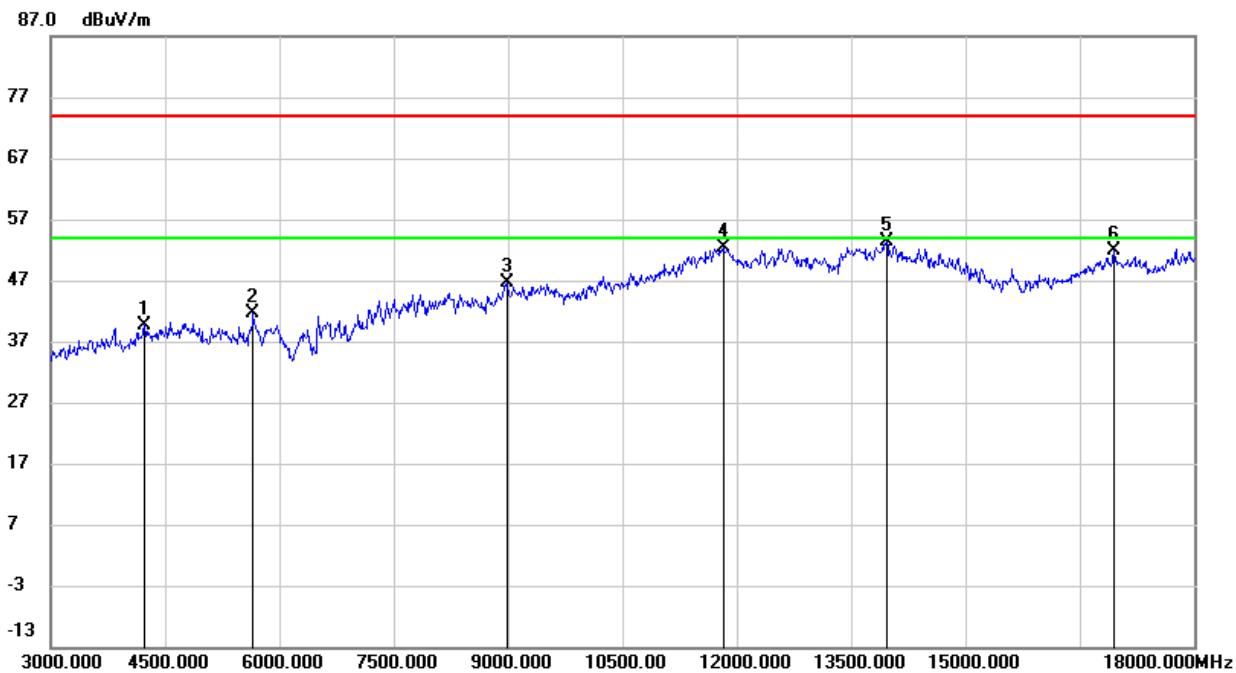
No.	Frequency (MHz)	Reading (dB _{uV})	Correct (dB/m)	Result (dB _{uV/m})	Limit (dB _{uV/m})	Margin (dB)	Remark
1	4882.500	41.79	-1.13	40.66	74.00	-33.34	peak
2	7852.500	38.44	5.88	44.32	74.00	-29.68	peak
3	9075.000	37.70	9.12	46.82	74.00	-27.18	peak
4	11722.500	36.44	16.73	53.17	74.00	-20.83	peak
5	13935.000	31.75	20.59	52.34	74.00	-21.66	peak
6	17752.500	28.68	22.70	51.38	74.00	-22.62	peak

Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

No.	Frequency (MHz)	Reading (dB _{UV})	Correct (dB/m)	Result (dB _{UV} /m)	Limit (dB _{UV} /m)	Margin (dB)	Remark
1	4860.000	41.54	-1.14	40.40	74.00	-33.60	peak
2	8212.500	38.70	7.18	45.88	74.00	-28.12	peak
3	8955.000	38.14	8.99	47.13	74.00	-26.87	peak
4	11812.500	36.21	17.21	53.42	74.00	-20.58	peak
5	13807.500	32.25	20.51	52.76	74.00	-21.24	peak
6	17902.500	28.76	23.44	52.20	74.00	-21.80	peak

Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

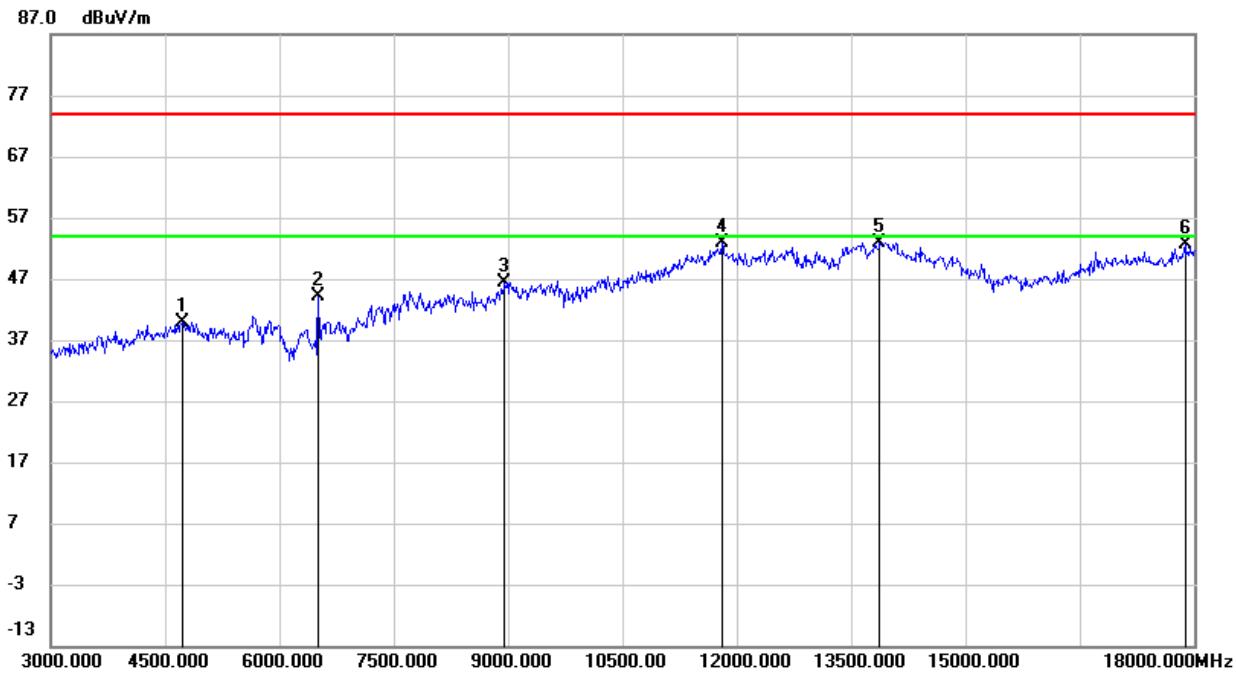
HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

No.	Frequency (MHz)	Reading (dB _{uV})	Correct (dB/m)	Result (dB _{uV/m})	Limit (dB _{uV/m})	Margin (dB)	Remark
1	4237.500	42.62	-2.87	39.75	74.00	-34.25	peak
2	5655.000	40.87	0.69	41.56	74.00	-32.44	peak
3	8992.500	37.26	9.44	46.70	74.00	-27.30	peak
4	11827.500	35.29	17.20	52.49	74.00	-21.51	peak
5	13972.500	32.78	20.62	53.40	74.00	-20.60	peak
6	16950.000	33.05	18.79	51.84	74.00	-22.16	peak

Note: 1. Peak Result = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

8.3.5. GFSK MODE PCB ANTENNA

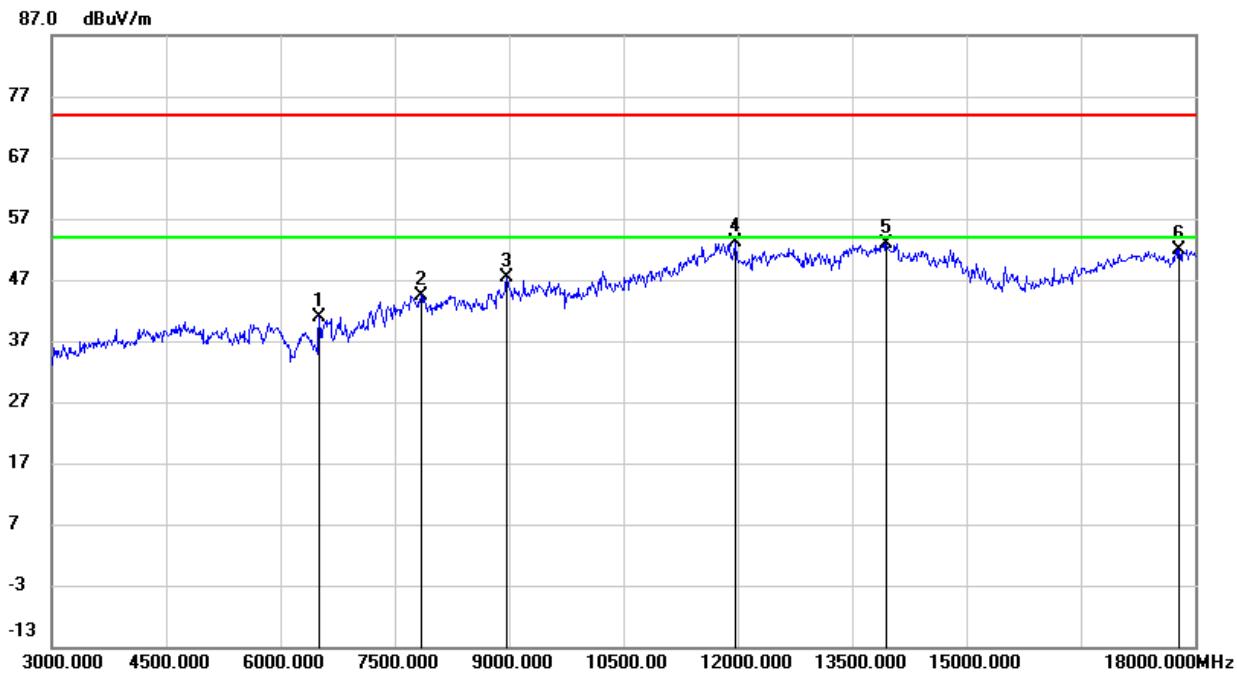
HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)



No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4732.500	41.23	-1.43	39.80	74.00	-34.20	peak
2	6510.000	40.94	3.17	44.11	74.00	-29.89	peak
3	8962.500	37.41	9.07	46.48	74.00	-27.52	peak
4	11812.500	35.66	17.21	52.87	74.00	-21.13	peak
5	13882.500	32.32	20.56	52.88	74.00	-21.12	peak
6	17880.000	29.17	23.38	52.55	74.00	-21.45	peak

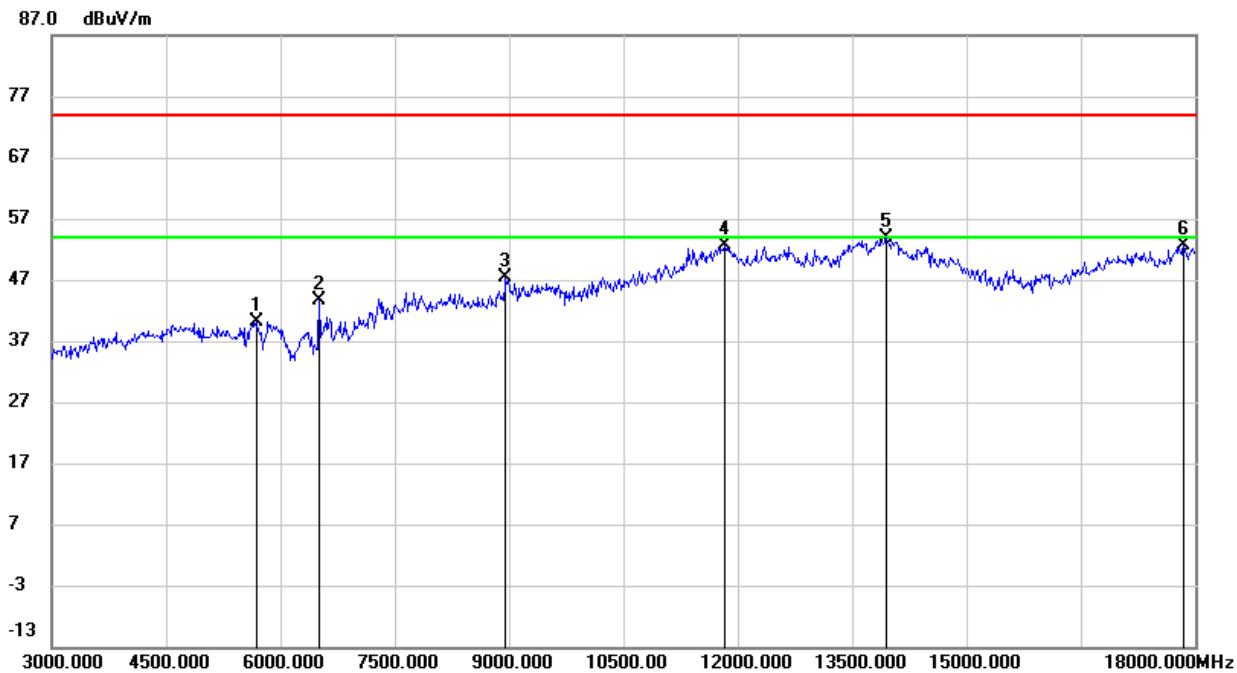
Note:

1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

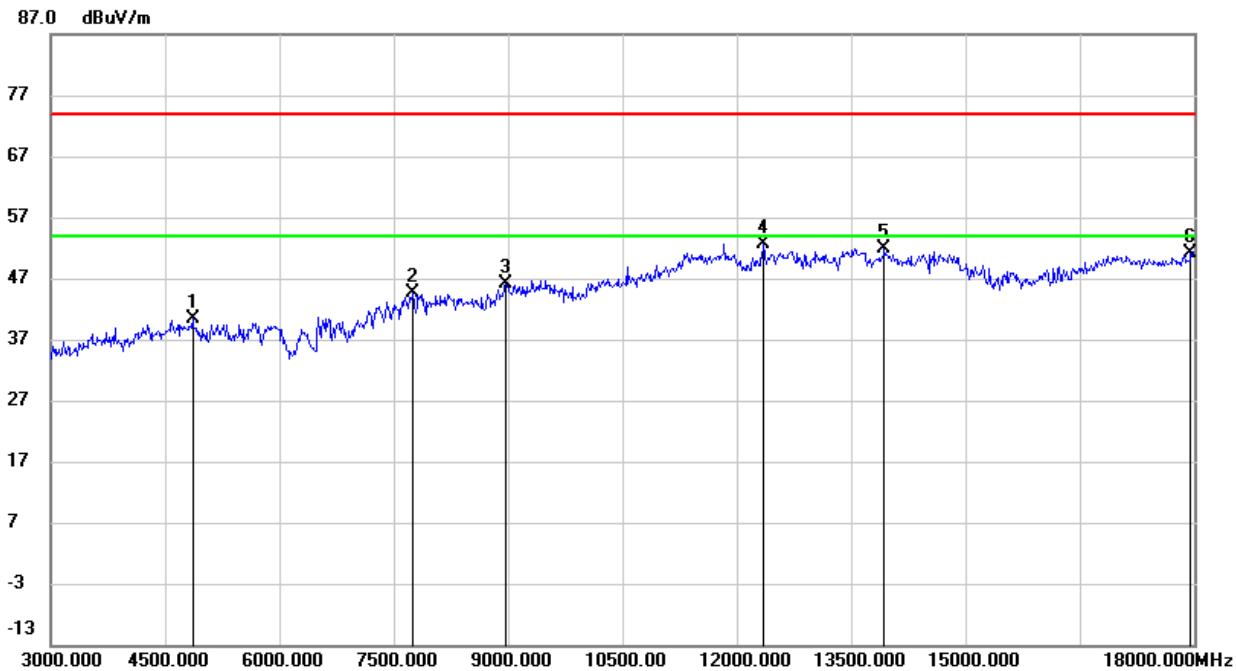
No.	Frequency (MHz)	Reading (dB _{uV})	Correct (dB/m)	Result (dB _{uV/m})	Limit (dB _{uV/m})	Margin (dB)	Remark
1	6510.000	37.73	3.17	40.90	74.00	-33.10	peak
2	7845.000	38.58	5.92	44.50	74.00	-29.50	peak
3	8970.000	38.28	9.17	47.45	74.00	-26.55	peak
4	11977.500	35.98	17.11	53.09	74.00	-20.91	peak
5	13950.000	32.34	20.61	52.95	74.00	-21.05	peak
6	17790.000	28.79	23.08	51.87	74.00	-22.13	peak

Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

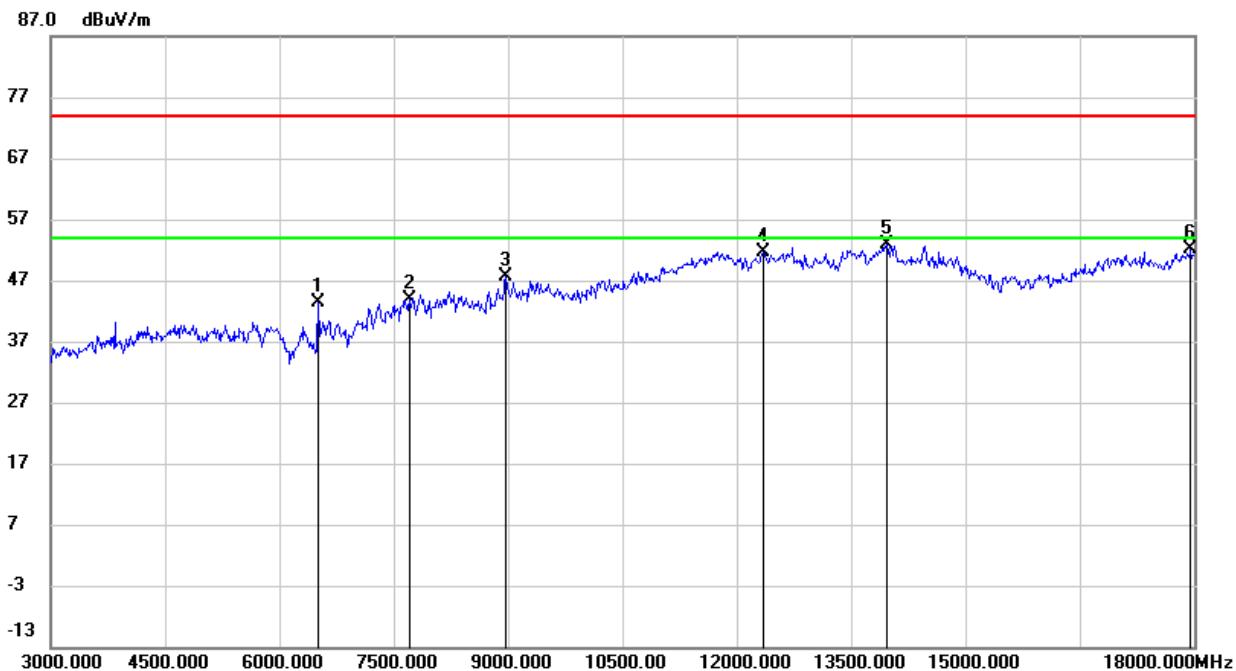
No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5685.000	39.35	0.68	40.03	74.00	-33.97	peak
2	6510.000	40.51	3.17	43.68	74.00	-30.32	peak
3	8962.500	38.41	9.07	47.48	74.00	-26.52	peak
4	11842.500	35.53	17.19	52.72	74.00	-21.28	peak
5	13957.500	33.37	20.61	53.98	74.00	-20.02	peak
6	17850.000	29.21	23.32	52.53	74.00	-21.47	peak

Note: 1. Peak Result = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

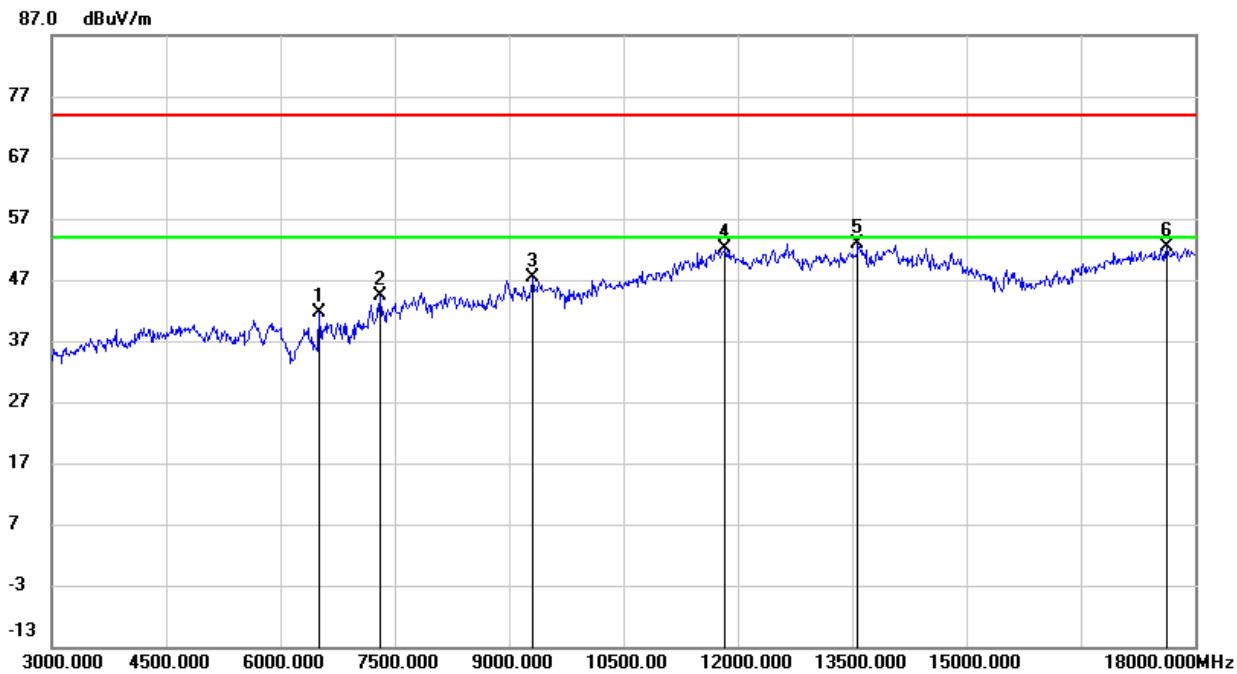
No.	Frequency (MHz)	Reading (dB _{UV})	Correct (dB/m)	Result (dB _{UV} /m)	Limit (dB _{UV} /m)	Margin (dB)	Remark
1	4867.500	41.61	-1.14	40.47	74.00	-33.53	peak
2	7762.500	38.60	5.96	44.56	74.00	-29.44	peak
3	8977.500	36.98	9.26	46.24	74.00	-27.76	peak
4	12345.000	35.67	16.96	52.63	74.00	-21.37	peak
5	13942.500	31.28	20.60	51.88	74.00	-22.12	peak
6	17955.000	27.68	23.57	51.25	74.00	-22.75	peak

Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

No.	Frequency (MHz)	Reading (dB _{UV})	Correct (dB/m)	Result (dB _{UV} /m)	Limit (dB _{UV} /m)	Margin (dB)	Remark
1	6510.000	40.23	3.17	43.40	74.00	-30.60	peak
2	7717.500	38.15	5.82	43.97	74.00	-30.03	peak
3	8977.500	38.37	9.26	47.63	74.00	-26.37	peak
4	12345.000	34.75	16.96	51.71	74.00	-22.29	peak
5	13972.500	32.36	20.62	52.98	74.00	-21.02	peak
6	17962.500	28.62	23.58	52.20	74.00	-21.80	peak

Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

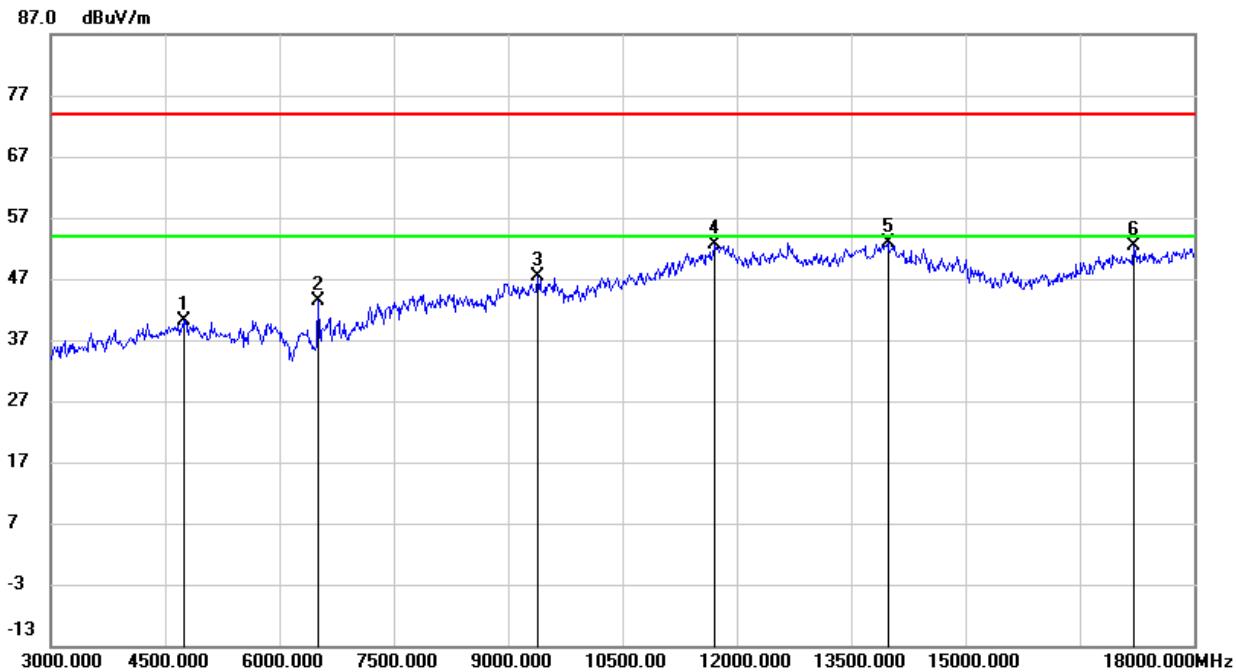
HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

No.	Frequency (MHz)	Reading (dB _{UV})	Correct (dB/m)	Result (dB _{UV} /m)	Limit (dB _{UV} /m)	Margin (dB)	Remark
1	6510.000	38.34	3.17	41.51	74.00	-32.49	peak
2	7305.000	38.99	5.48	44.47	74.00	-29.53	peak
3	9322.500	38.15	9.19	47.34	74.00	-26.66	peak
4	11835.000	34.87	17.20	52.07	74.00	-21.93	peak
5	13582.500	33.27	19.70	52.97	74.00	-21.03	peak
6	17632.500	30.81	21.46	52.27	74.00	-21.73	peak

Note: 1. Peak Result = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

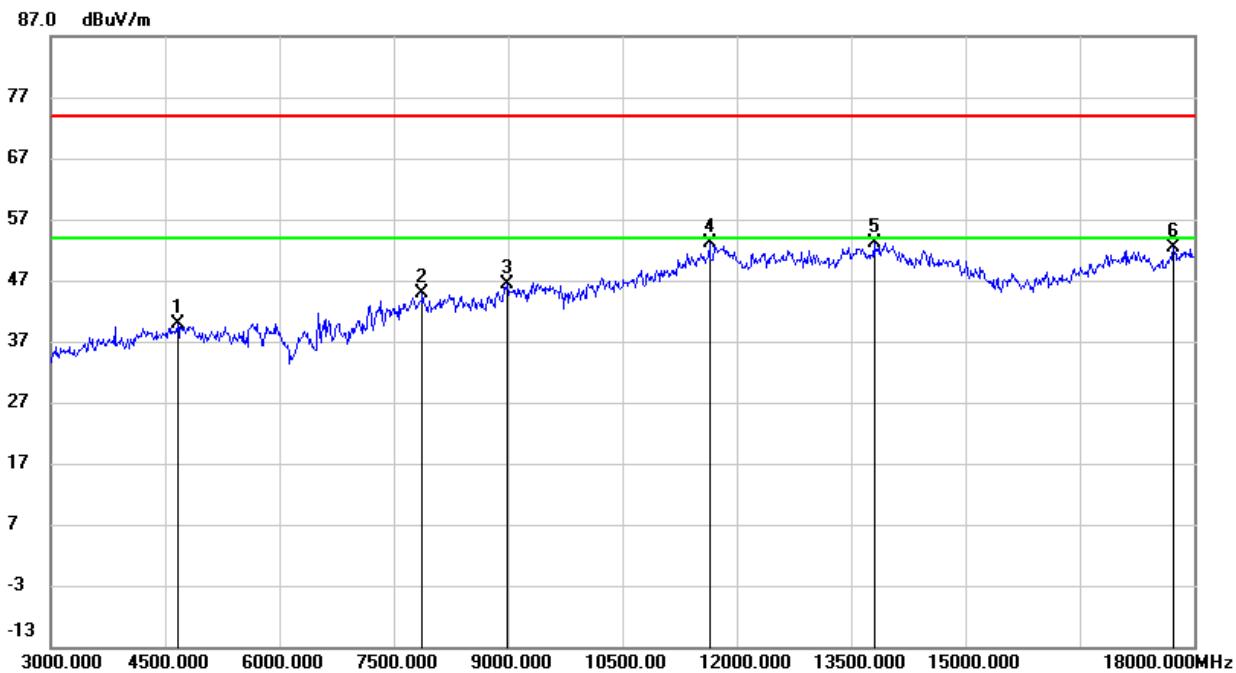
8.3.6. 8DPSK MODE PCB ANTENNA

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)



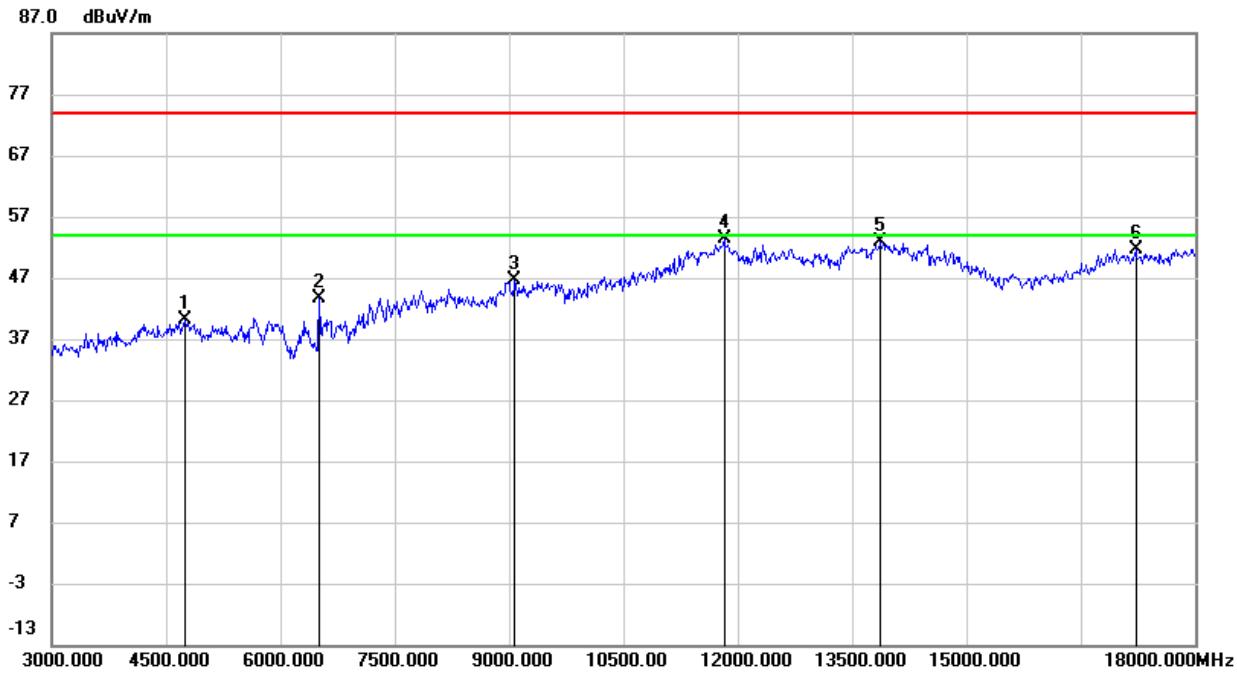
No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4747.500	41.52	-1.37	40.15	74.00	-33.85	peak
2	6510.000	40.21	3.17	43.38	74.00	-30.62	peak
3	9397.500	37.77	9.67	47.44	74.00	-26.56	peak
4	11722.500	35.80	16.73	52.53	74.00	-21.47	peak
5	13980.000	32.32	20.63	52.95	74.00	-21.05	peak
6	17212.500	32.28	20.16	52.44	74.00	-21.56	peak

Note: 1. Peak Result = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

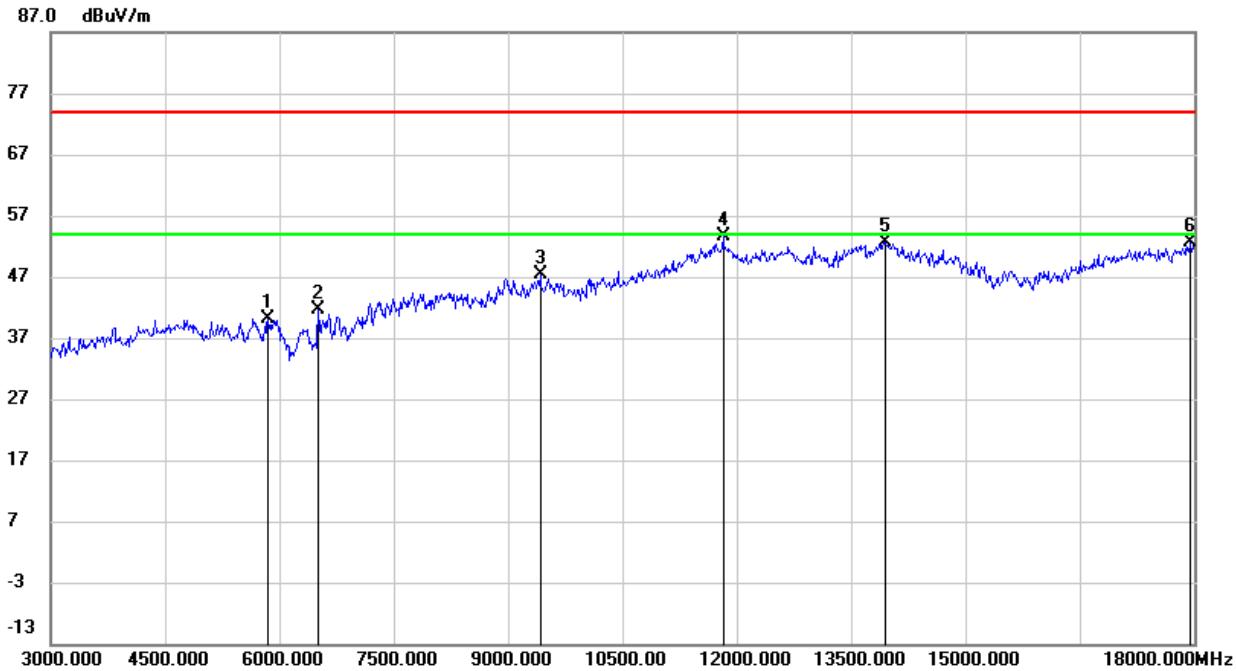
No.	Frequency (MHz)	Reading (dB _{UV})	Correct (dB/m)	Result (dB _{UV} /m)	Limit (dB _{UV} /m)	Margin (dB)	Remark
1	4665.000	41.56	-1.72	39.84	74.00	-34.16	peak
2	7882.500	39.07	5.78	44.85	74.00	-29.15	peak
3	8985.000	37.09	9.34	46.43	74.00	-27.57	peak
4	11647.500	36.81	16.25	53.06	74.00	-20.94	peak
5	13807.500	32.65	20.51	53.16	74.00	-20.84	peak
6	17737.500	29.83	22.54	52.37	74.00	-21.63	peak

Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

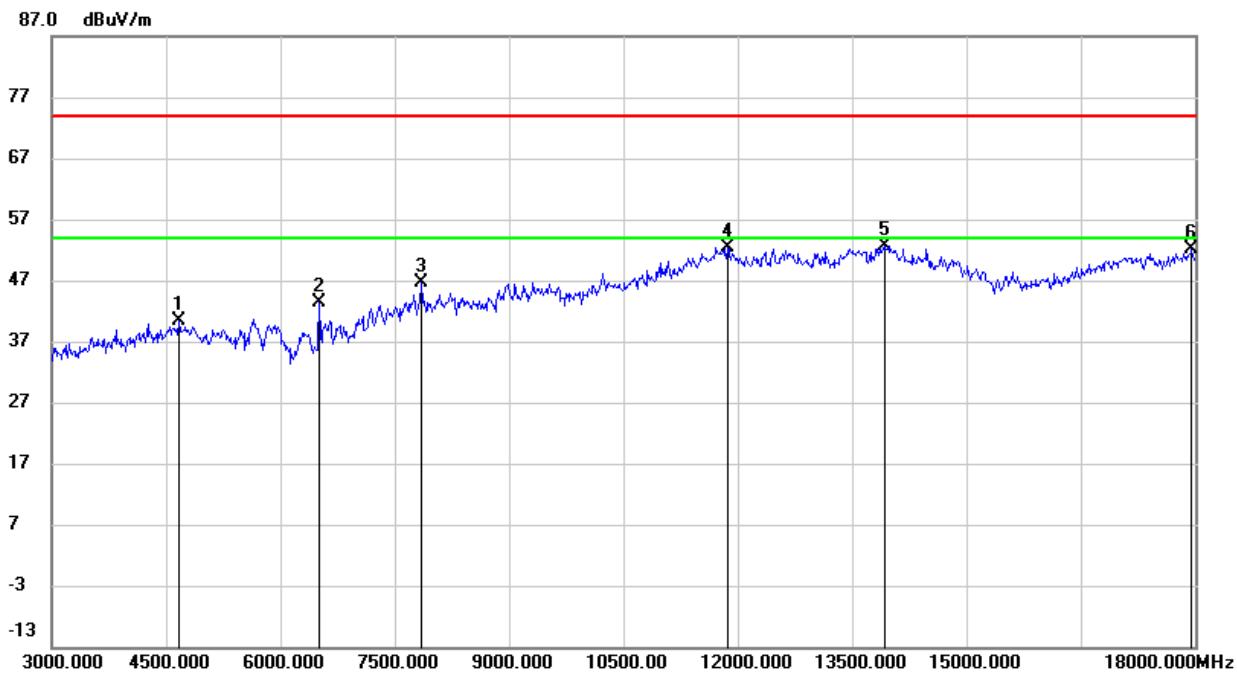
No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4755.000	41.45	-1.33	40.12	74.00	-33.88	peak
2	6510.000	40.35	3.17	43.52	74.00	-30.48	peak
3	9082.500	37.67	9.07	46.74	74.00	-27.26	peak
4	11827.500	36.27	17.20	53.47	74.00	-20.53	peak
5	13882.500	32.40	20.56	52.96	74.00	-21.04	peak
6	17227.500	31.50	20.16	51.66	74.00	-22.34	peak

Note: 1. Peak Result = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

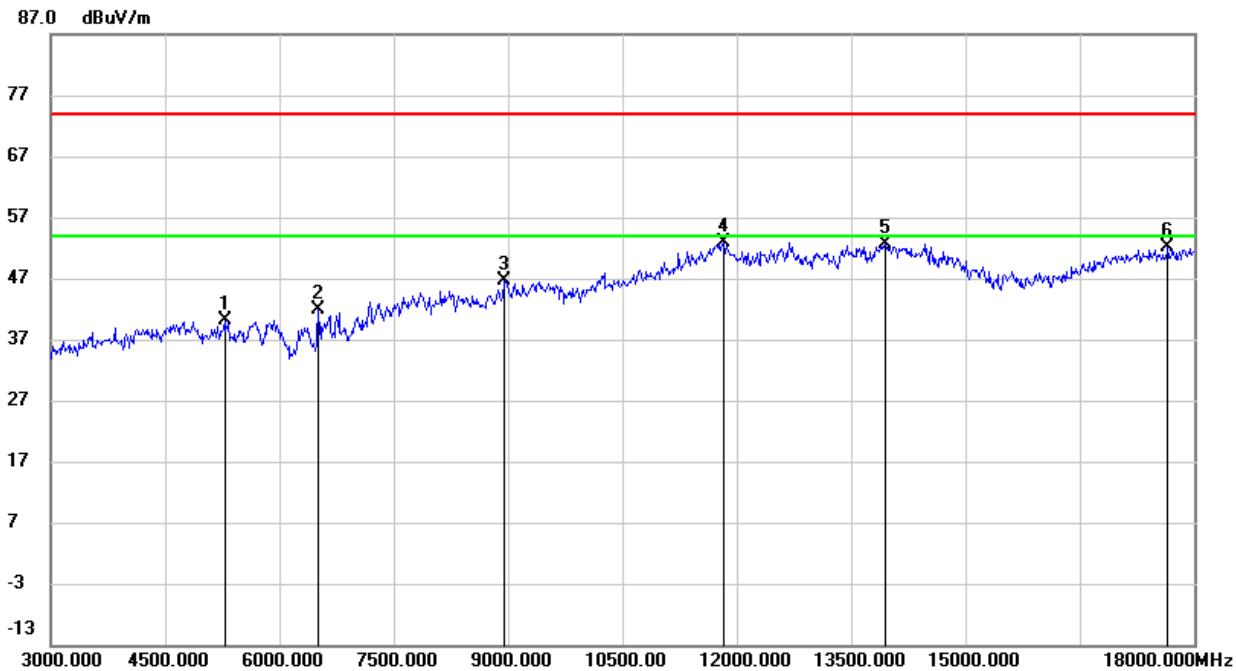
No.	Frequency (MHz)	Reading (dB _{uV})	Correct (dB/m)	Result (dB _{uV/m})	Limit (dB _{uV/m})	Margin (dB)	Remark
1	5857.500	39.32	0.87	40.19	74.00	-33.81	peak
2	6510.000	38.34	3.17	41.51	74.00	-32.49	peak
3	9420.000	37.62	9.73	47.35	74.00	-26.65	peak
4	11827.500	36.52	17.20	53.72	74.00	-20.28	peak
5	13957.500	32.11	20.61	52.72	74.00	-21.28	peak
6	17955.000	29.01	23.57	52.58	74.00	-21.42	peak

Note: 1. Peak Result = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

No.	Frequency (MHz)	Reading (dB _{UV})	Correct (dB/m)	Result (dB _{UV} /m)	Limit (dB _{UV} /m)	Margin (dB)	Remark
1	4665.000	42.07	-1.72	40.35	74.00	-33.65	peak
2	6510.000	40.22	3.17	43.39	74.00	-30.61	peak
3	7852.500	40.74	5.88	46.62	74.00	-27.38	peak
4	11865.000	35.25	17.18	52.43	74.00	-21.57	peak
5	13942.500	32.14	20.60	52.74	74.00	-21.26	peak
6	17955.000	28.64	23.57	52.21	74.00	-21.79	peak

Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

No.	Frequency (MHz)	Reading (dB _{uV})	Correct (dB/m)	Result (dB _{uV/m})	Limit (dB _{uV/m})	Margin (dB)	Remark
1	5280.000	39.98	0.16	40.14	74.00	-33.86	peak
2	6510.000	38.77	3.17	41.94	74.00	-32.06	peak
3	8962.500	37.55	9.07	46.62	74.00	-27.38	peak
4	11835.000	35.79	17.20	52.99	74.00	-21.01	peak
5	13957.500	32.12	20.61	52.73	74.00	-21.27	peak
6	17662.500	30.25	21.76	52.01	74.00	-21.99	peak

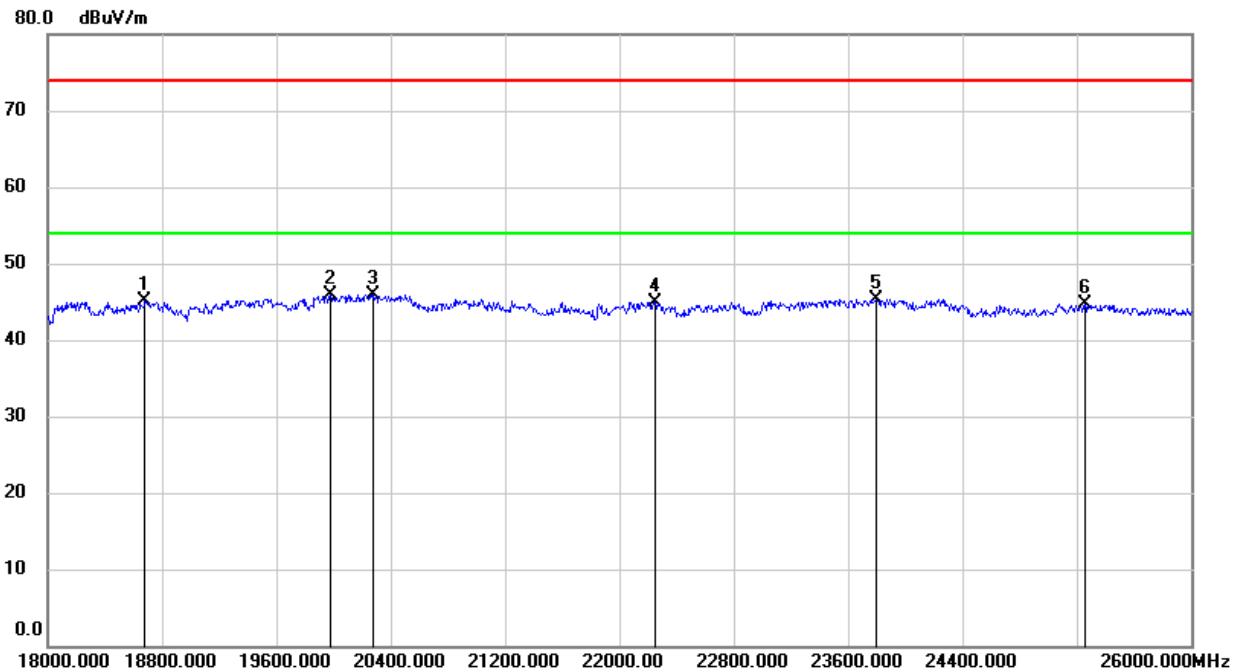
Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



8.4. SPURIOUS EMISSIONS (18 GHz ~ 26 GHz)

8.4.1. 8DPSK MODE PCB ANTENNA

SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

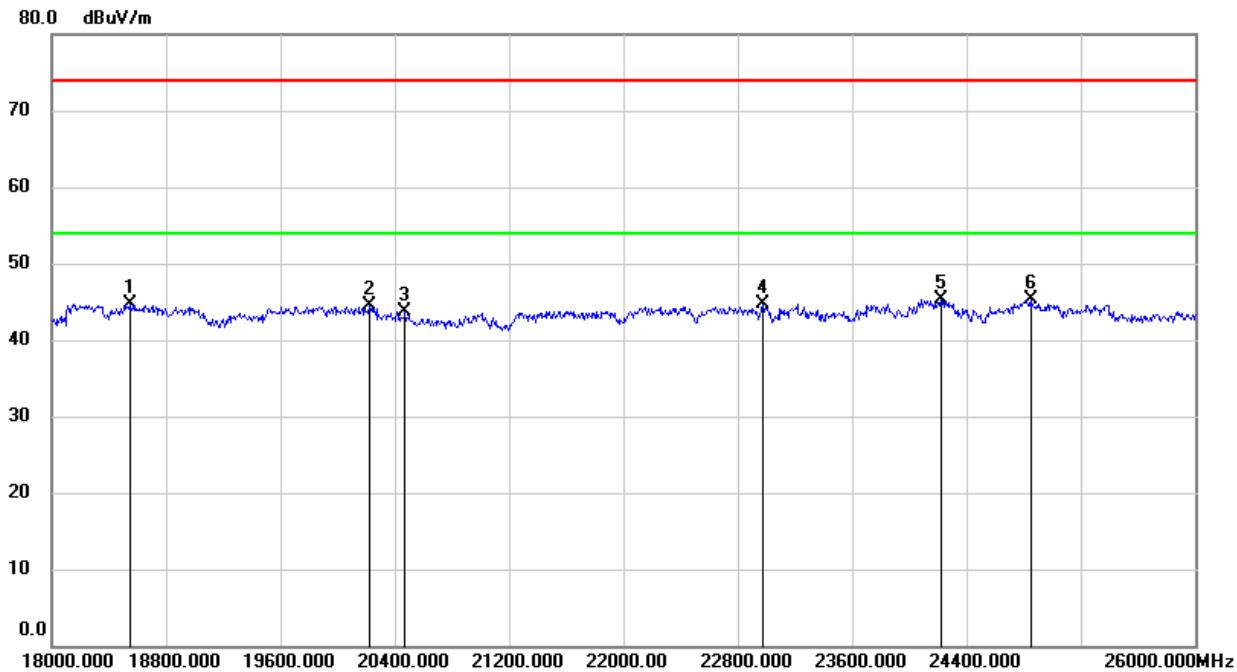


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18680.000	50.45	-5.38	45.07	74.00	-28.93	peak
2	19976.000	51.32	-5.44	45.88	74.00	-28.12	peak
3	20280.000	51.47	-5.58	45.89	74.00	-28.11	peak
4	22248.000	49.12	-4.22	44.90	74.00	-29.10	peak
5	23800.000	48.41	-3.11	45.30	74.00	-28.70	peak
6	25256.000	46.29	-1.67	44.62	74.00	-29.38	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18552.000	50.04	-5.28	44.76	74.00	-29.24	peak
2	20224.000	50.02	-5.60	44.42	74.00	-29.58	peak
3	20472.000	49.07	-5.39	43.68	74.00	-30.32	peak
4	22976.000	48.26	-3.46	44.80	74.00	-29.20	peak
5	24224.000	48.06	-2.83	45.23	74.00	-28.77	peak
6	24848.000	47.46	-2.23	45.23	74.00	-28.77	peak

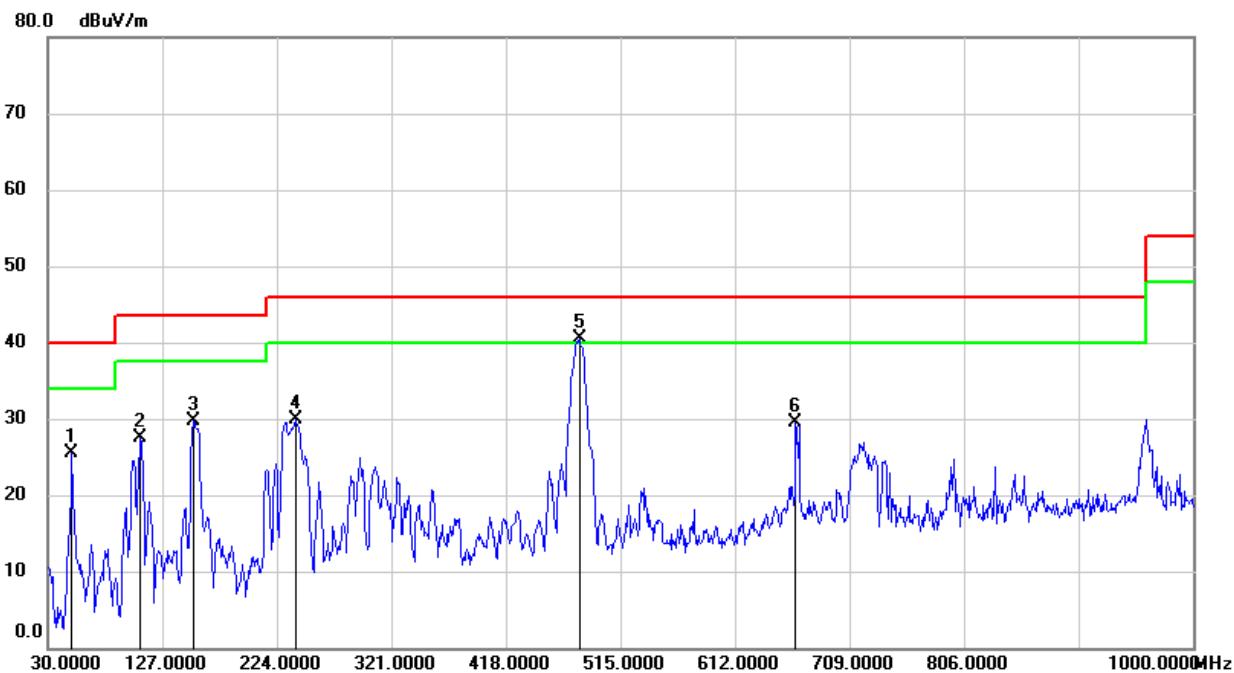
Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.

Note: All the modes, channels and antenna had been tested, but only the worst data was recorded in the report.

8.5. SPURIOUS EMISSIONS (30 MHz ~ 1 GHz)

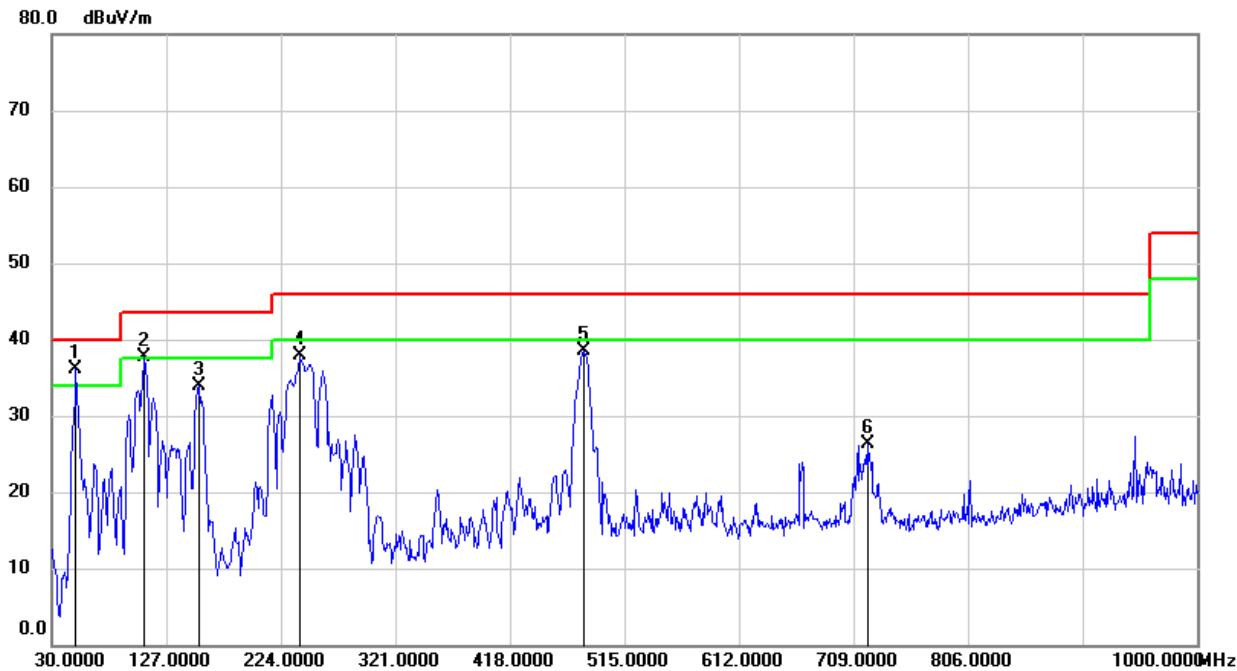
8.5.1. 8DPSK MODE PCB ANTENNA

SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)



No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	50.3700	46.28	-20.76	25.52	40.00	-14.48	QP
2	108.5700	47.96	-20.53	27.43	43.50	-16.07	QP
3	153.1900	47.79	-18.10	29.69	43.50	-13.81	QP
4	239.5200	48.98	-19.16	29.82	46.00	-16.18	QP
5	480.0800	52.31	-11.79	40.52	46.00	-5.48	QP
6	663.4099	38.12	-8.66	29.46	46.00	-16.54	QP

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	50.3700	56.92	-20.76	36.16	40.00	-3.84	QP
2	108.5700	58.14	-20.53	37.61	43.50	-5.89	QP
3	154.1600	52.03	-18.06	33.97	43.50	-9.53	QP
4	239.5200	57.05	-19.16	37.89	46.00	-8.11	QP
5	481.0500	50.38	-11.78	38.60	46.00	-7.40	QP
6	720.6400	34.39	-8.09	26.30	46.00	-19.70	QP

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto

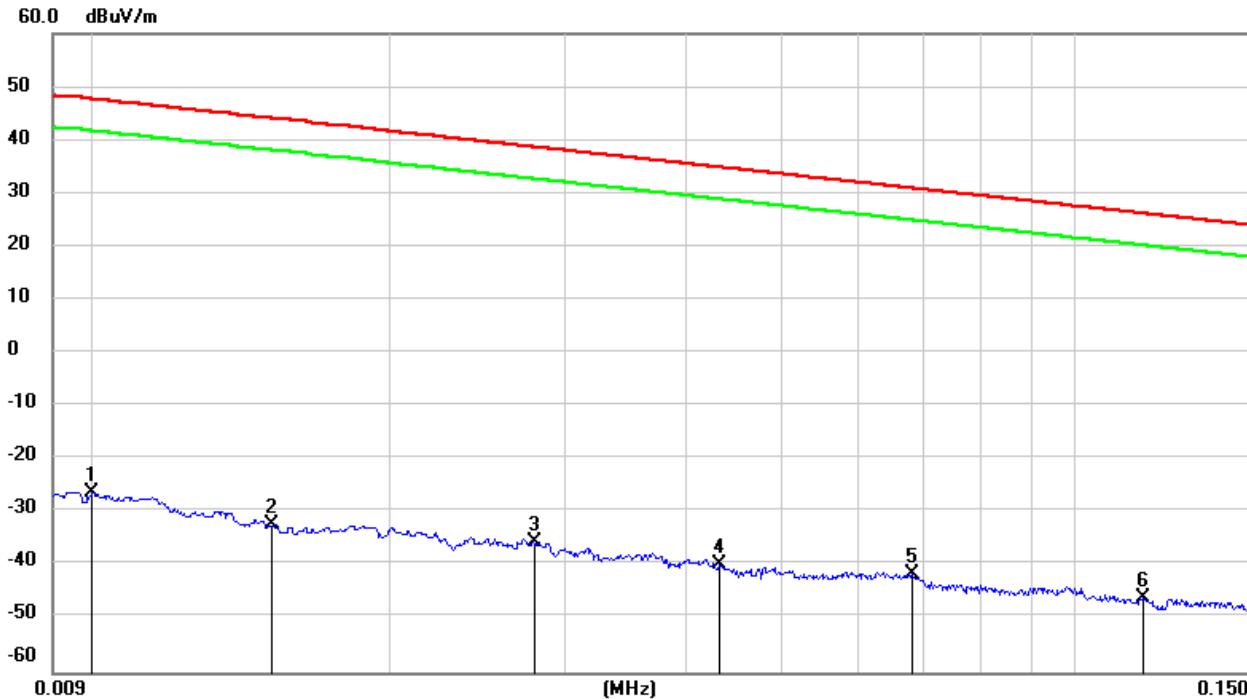
Note: All the modes, channels and antenna had been tested, but only the worst data was recorded in the report.

8.6. SPURIOUS EMISSIONS BELOW 30 MHz

8.6.1. 8DPSK MODE PCB ANTENNA

(MID CHANNEL, LOOP ANTENNA FACE ON TO THE EUT, WORST-CASE CONFIGURATION)

9 kHz~ 150 kHz

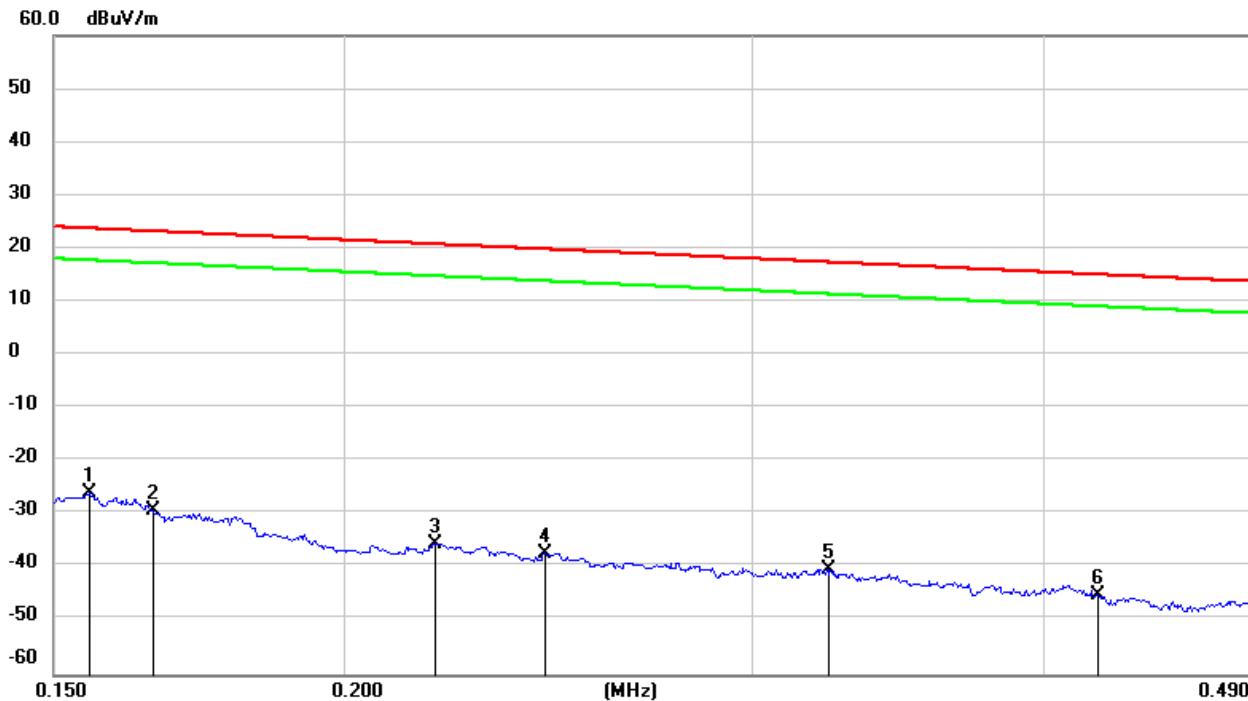


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.01	75.22	-101.4	-26.18	47.6	-77.68	-3.9	-73.78	peak
2	0.0151	69.11	-101.37	-32.26	44.02	-83.76	-7.48	-76.28	peak
3	0.028	65.79	-101.38	-35.59	38.66	-87.09	-12.84	-74.25	peak
4	0.0432	61.57	-101.45	-39.88	34.89	-91.38	-16.61	-74.77	peak
5	0.068	60.04	-101.56	-41.52	30.95	-93.02	-20.55	-72.47	peak
6	0.1174	55.83	-101.74	-45.91	26.21	-97.41	-25.29	-72.12	peak

Note: 1. Measurement = Reading Level + Correct Factor (dBuA/m= dBuV/m- $20\log_{10}[120\pi]$ = dBuV/m- 51.5).

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

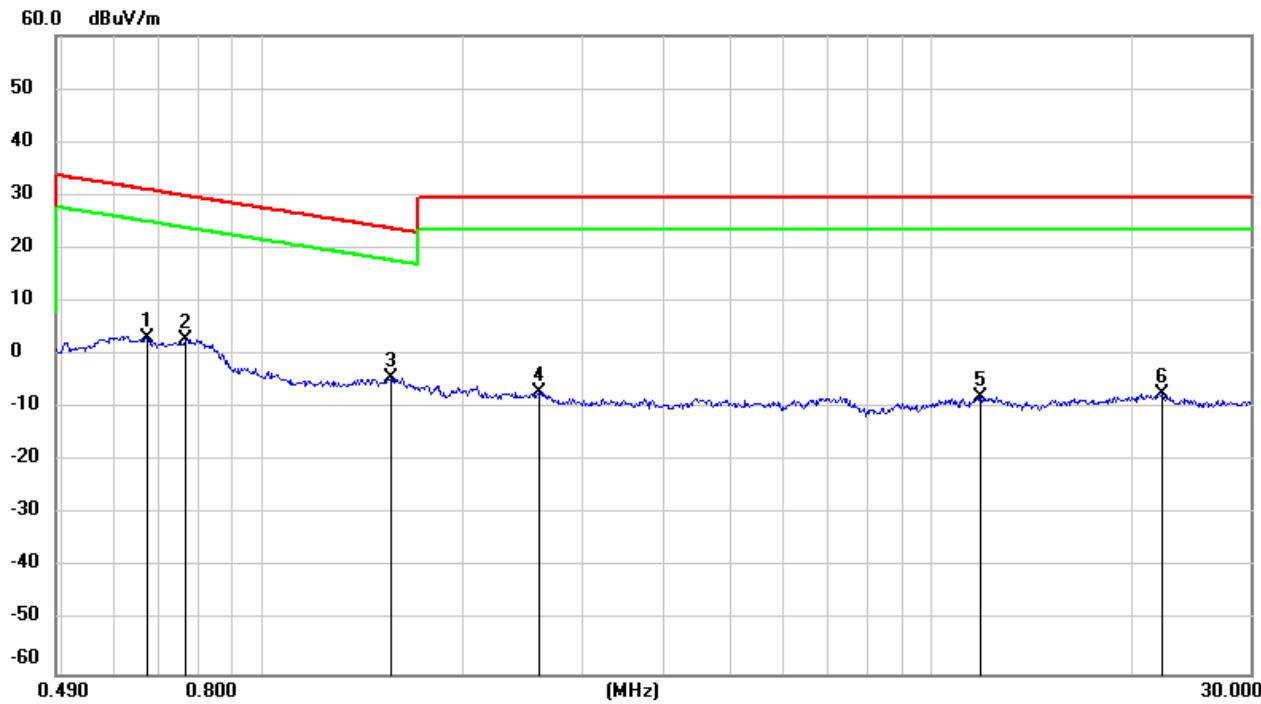
150 kHz ~ 490 kHz

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.1554	75.77	-101.65	-25.88	23.77	-77.38	-27.73	-49.65	peak
2	0.1655	72.33	-101.66	-29.33	23.23	-80.83	-28.27	-52.56	peak
3	0.219	66.27	-101.75	-35.48	20.79	-86.98	-30.71	-56.27	peak
4	0.2442	64.53	-101.79	-37.26	19.85	-88.76	-31.65	-57.11	peak
5	0.3234	61.48	-101.88	-40.4	17.41	-91.9	-34.09	-57.81	peak
6	0.4223	56.9	-101.98	-45.08	15.09	-96.58	-36.41	-60.17	peak

Note: 1. Measurement = Reading Level + Correct Factor (dBuA/m= dBuV/m- $20\log_{10}[120\pi]$ = dBuV/m- 51.5).

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

490 kHz ~ 30 MHz

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.67	65.32	-62.1	3.22	31.08	-48.28	-20.42	-27.86	peak
2	0.7641	64.92	-62.12	2.8	29.94	-48.7	-21.56	-27.14	peak
3	1.5564	57.68	-62.02	-4.34	23.76	-55.84	-27.74	-28.1	peak
4	2.5935	54.61	-61.68	-7.07	29.54	-58.57	-21.96	-36.61	peak
5	11.8513	53.06	-60.88	-7.82	29.54	-59.32	-21.96	-37.36	peak
6	22.1503	53.2	-60.67	-7.47	29.54	-58.97	-21.96	-37.01	peak

Note: 1. Measurement = Reading Level + Correct Factor (dBuA/m= dBuV/m- 20Log10[120π] = dBuV/m- 51.5).

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

Note: All the modes, channels and antenna had been tested, but only the worst data was recorded in the report.

9. AC POWER LINE CONDUCTED EMISSIONS

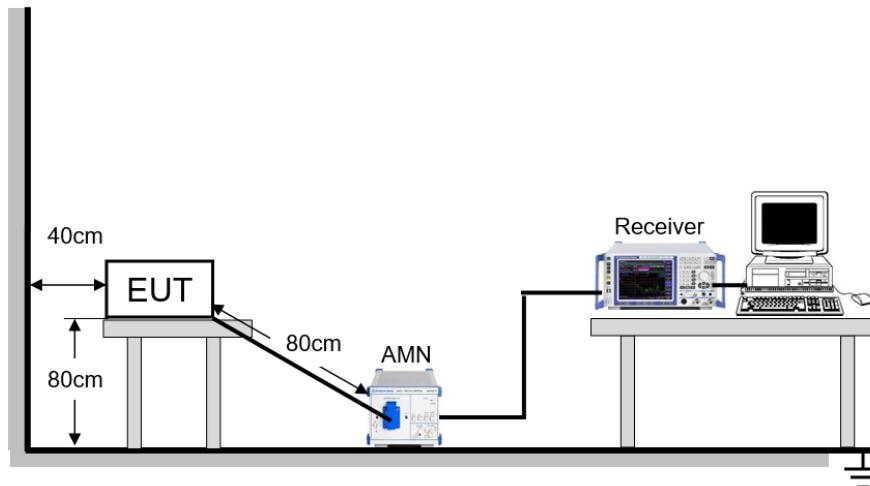
LIMITS

Please refer to CFR 47 FCC §15.207 (a) and ISED RSS-Gen Clause 8.8

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

TEST SETUP AND PROCEDURE

Refer to ANSI C63.10-2013 clause 6.2.

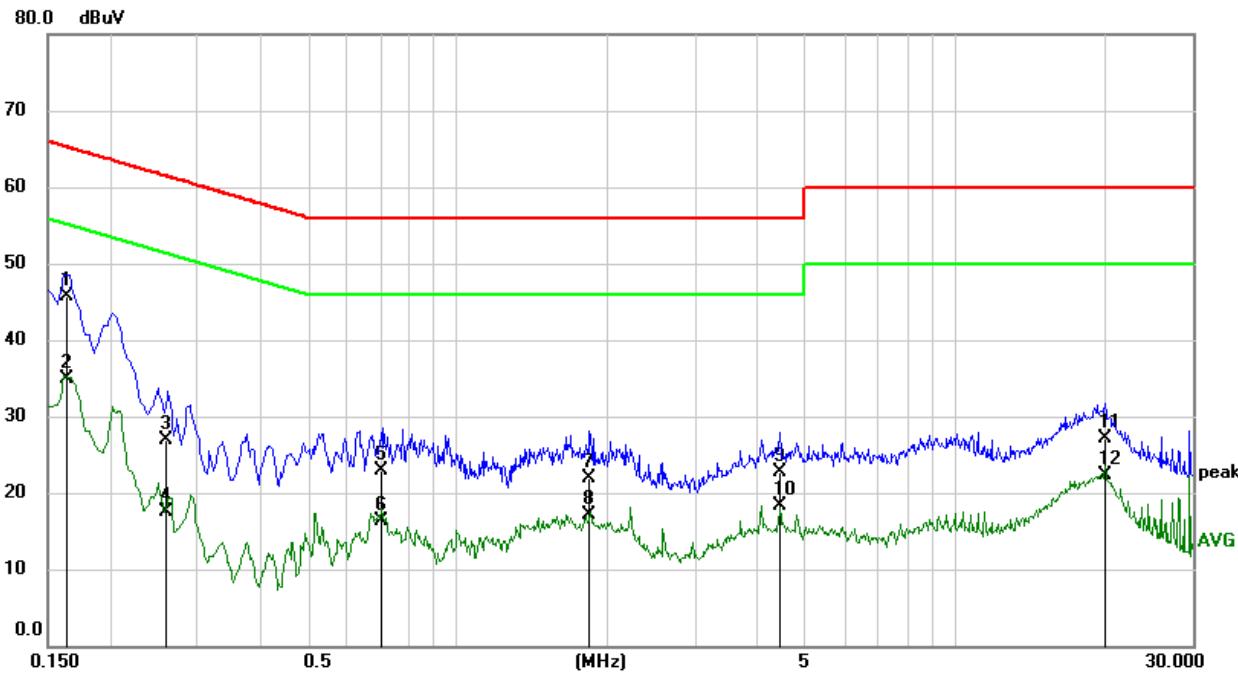


The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST ENVIRONMENT

Temperature	20.6 °C	Relative Humidity	62.1 %
Atmosphere Pressure	101 kPa	Test Voltage	AC 120 V, 60 Hz

TEST RESULTS**9.1. 8DPSK MODE PCB ANTENNA****LINE L RESULTS (MID CHANNEL, WORST-CASE CONFIGURATION)**

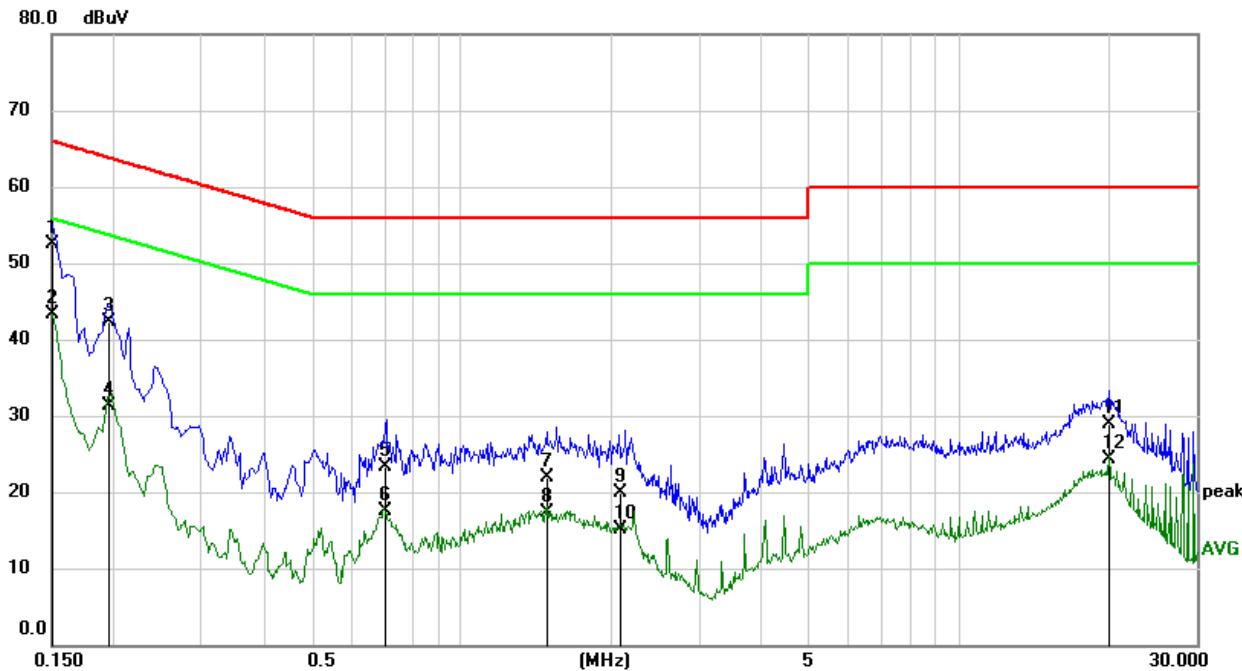
No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1645	36.17	9.52	45.69	65.23	-19.54	QP
2	0.1645	25.29	9.52	34.81	55.23	-20.42	AVG
3	0.2584	17.37	9.57	26.94	61.48	-34.54	QP
4	0.2584	7.96	9.57	17.53	51.48	-33.95	AVG
5	0.7041	13.43	9.50	22.93	56.00	-33.07	QP
6	0.7041	6.83	9.50	16.33	46.00	-29.67	AVG
7	1.8559	12.31	9.61	21.92	56.00	-34.08	QP
8	1.8559	7.46	9.61	17.07	46.00	-28.93	AVG
9	4.4470	13.17	9.52	22.69	56.00	-33.31	QP
10	4.4470	8.80	9.52	18.32	46.00	-27.68	AVG
11	20.0023	17.46	9.74	27.20	60.00	-32.80	QP
12	20.0023	12.59	9.74	22.33	50.00	-27.67	AVG

Note: 1. Result = Reading + Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).

4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

LINE N RESULTS (MID CHANNEL, WORST-CASE CONFIGURATION)

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1504	42.92	9.49	52.41	65.98	-13.57	QP
2	0.1504	33.91	9.49	43.40	55.98	-12.58	AVG
3	0.1955	32.70	9.58	42.28	63.80	-21.52	QP
4	0.1955	21.70	9.58	31.28	53.80	-22.52	AVG
5	0.7015	13.76	9.50	23.26	56.00	-32.74	QP
6	0.7015	7.91	9.50	17.41	46.00	-28.59	AVG
7	1.4825	12.33	9.57	21.90	56.00	-34.10	QP
8	1.4825	7.80	9.57	17.37	46.00	-28.63	AVG
9	2.0931	10.27	9.63	19.90	56.00	-36.10	QP
10	2.0931	5.57	9.63	15.20	46.00	-30.80	AVG
11	20.0012	19.16	9.74	28.90	60.00	-31.10	QP
12	20.0012	14.52	9.74	24.26	50.00	-25.74	AVG

Note: 1. Result = Reading + Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).

4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes, channels and antenna had been tested, but only the worst data was recorded in the report.

10. ANTENNA REQUIREMENTS

APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

RESULTS

Complies

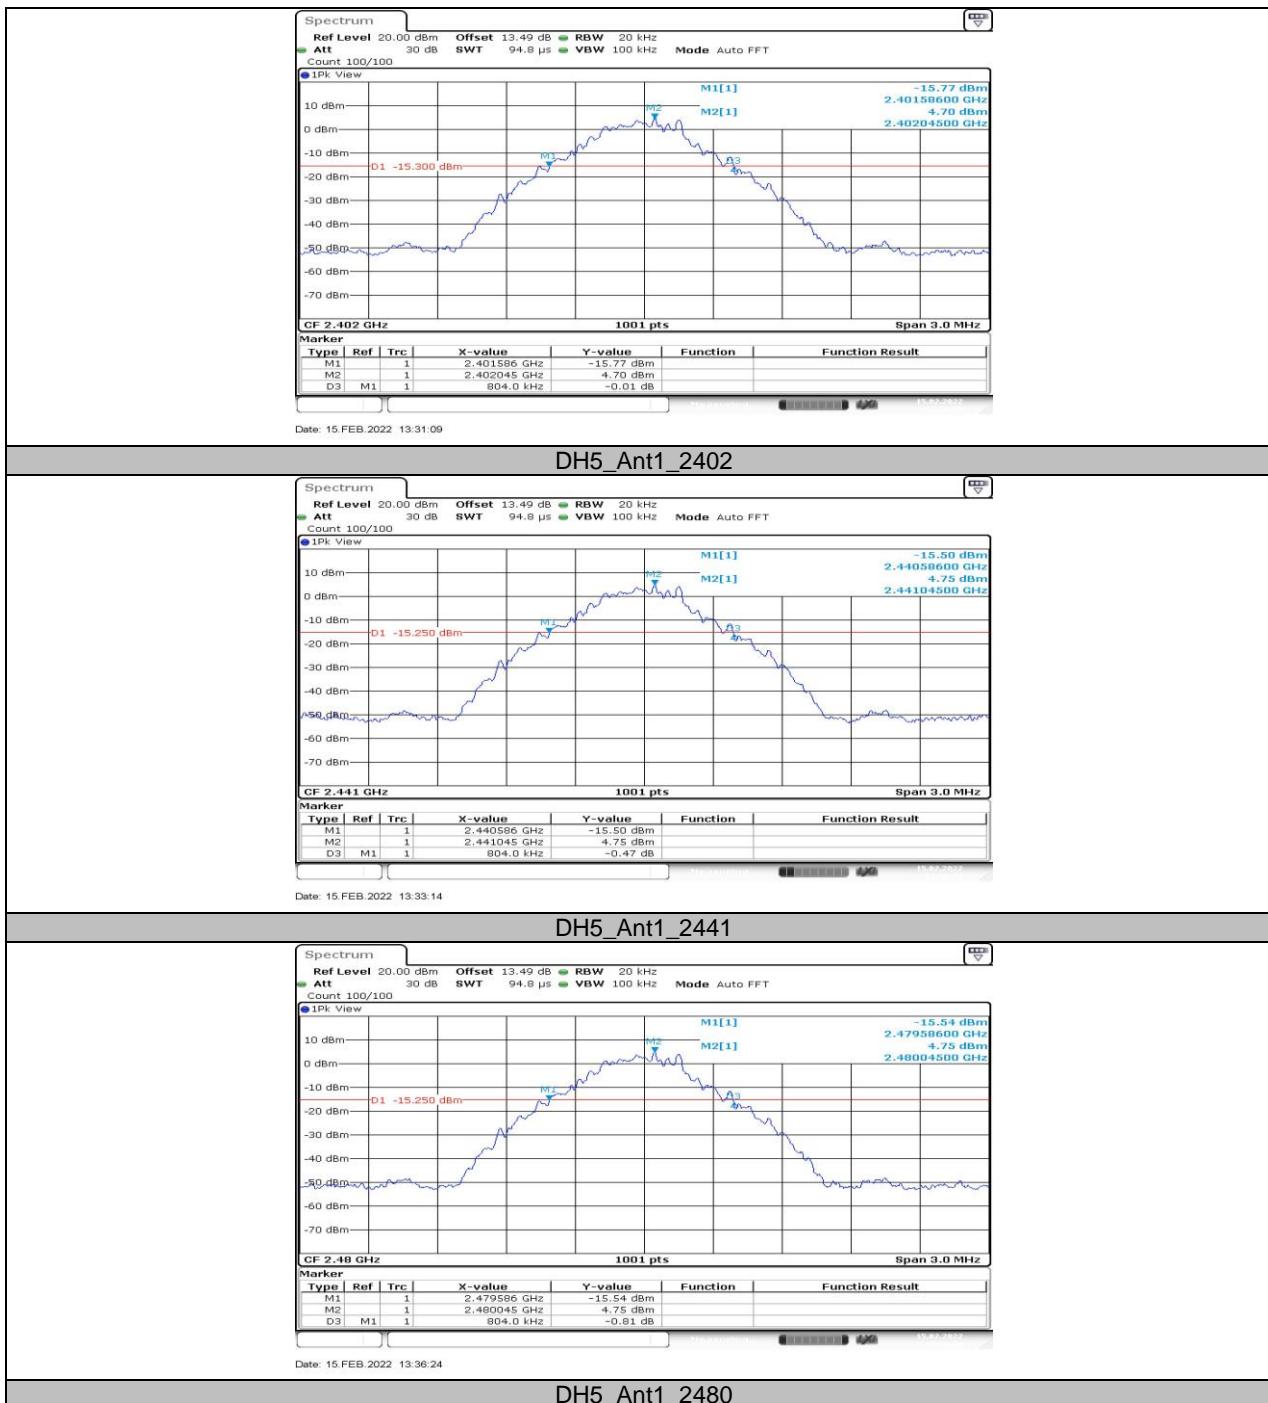
11. Appendix

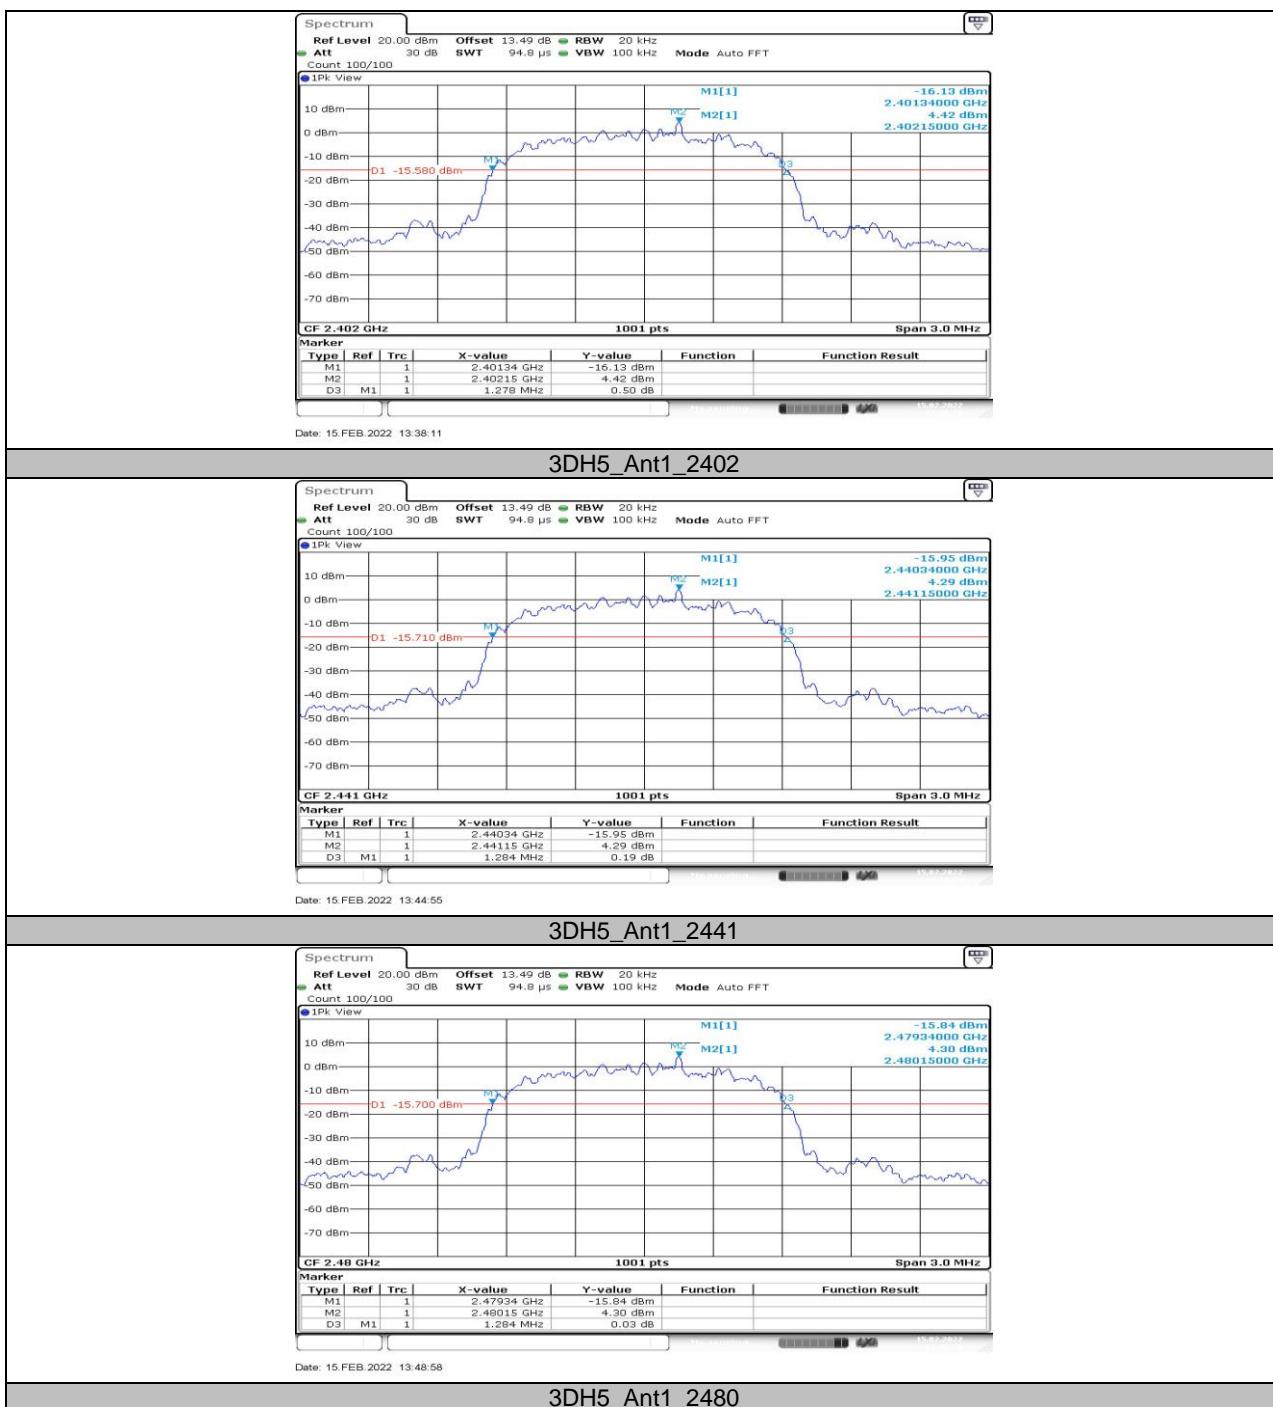
11.1. Appendix A: 20dB Emission Bandwidth

11.1.1. Test Result

Test Mode	Antenna	Channel	20db EBW[MHz]	FL[MHz]	FH[MHz]	Verdict
DH5	Ant1	2402	0.80	2401.59	2402.39	PASS
		2441	0.80	2440.59	2441.39	PASS
		2480	0.80	2479.59	2480.39	PASS
3DH5	Ant1	2402	1.28	2401.34	2402.62	PASS
		2441	1.28	2440.34	2441.62	PASS
		2480	1.28	2479.34	2480.62	PASS

11.1.2. Test Graphs



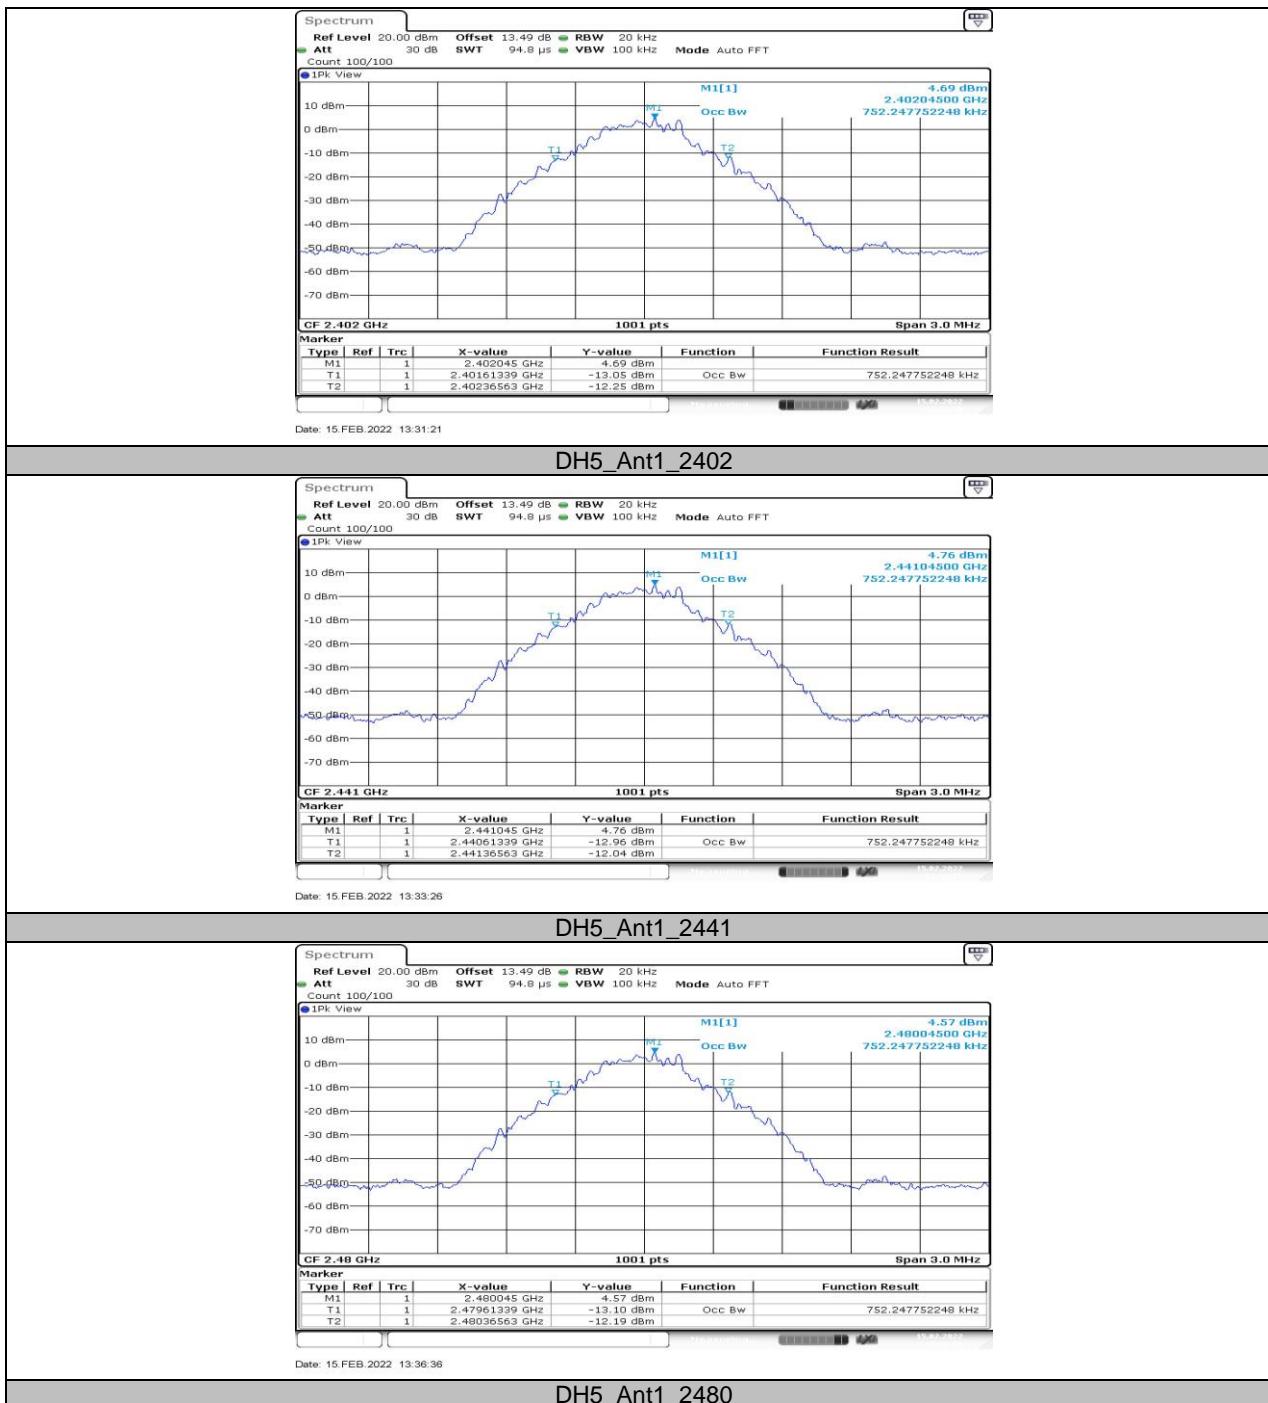


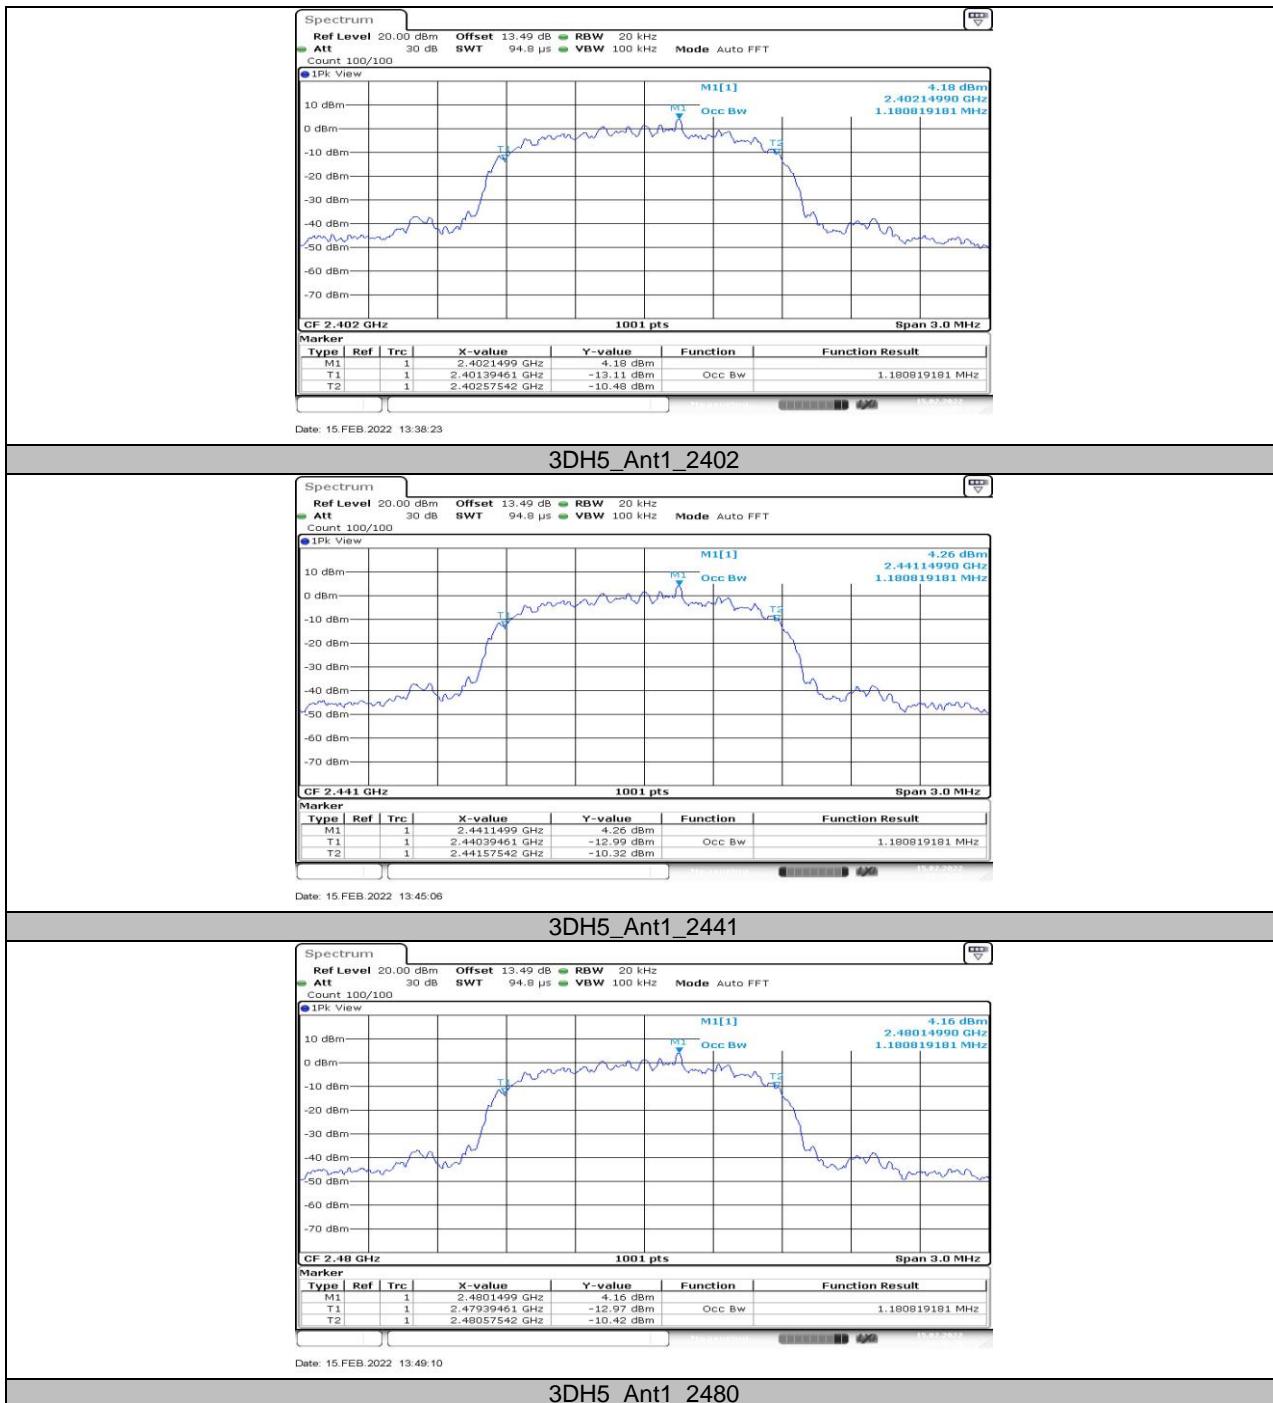
11.2. Appendix B: Occupied Channel Bandwidth

11.2.1. Test Result

Test Mode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Verdict
DH5	Ant1	2402	0.752	2401.613	2402.366	PASS
		2441	0.752	2440.613	2441.366	PASS
		2480	0.752	2479.613	2480.366	PASS
3DH5	Ant1	2402	1.181	2401.395	2402.575	PASS
		2441	1.181	2440.395	2441.575	PASS
		2480	1.181	2479.395	2480.575	PASS

11.2.2. Test Graphs





11.3. Appendix C: Maximum conducted output power

11.3.1. Test Result

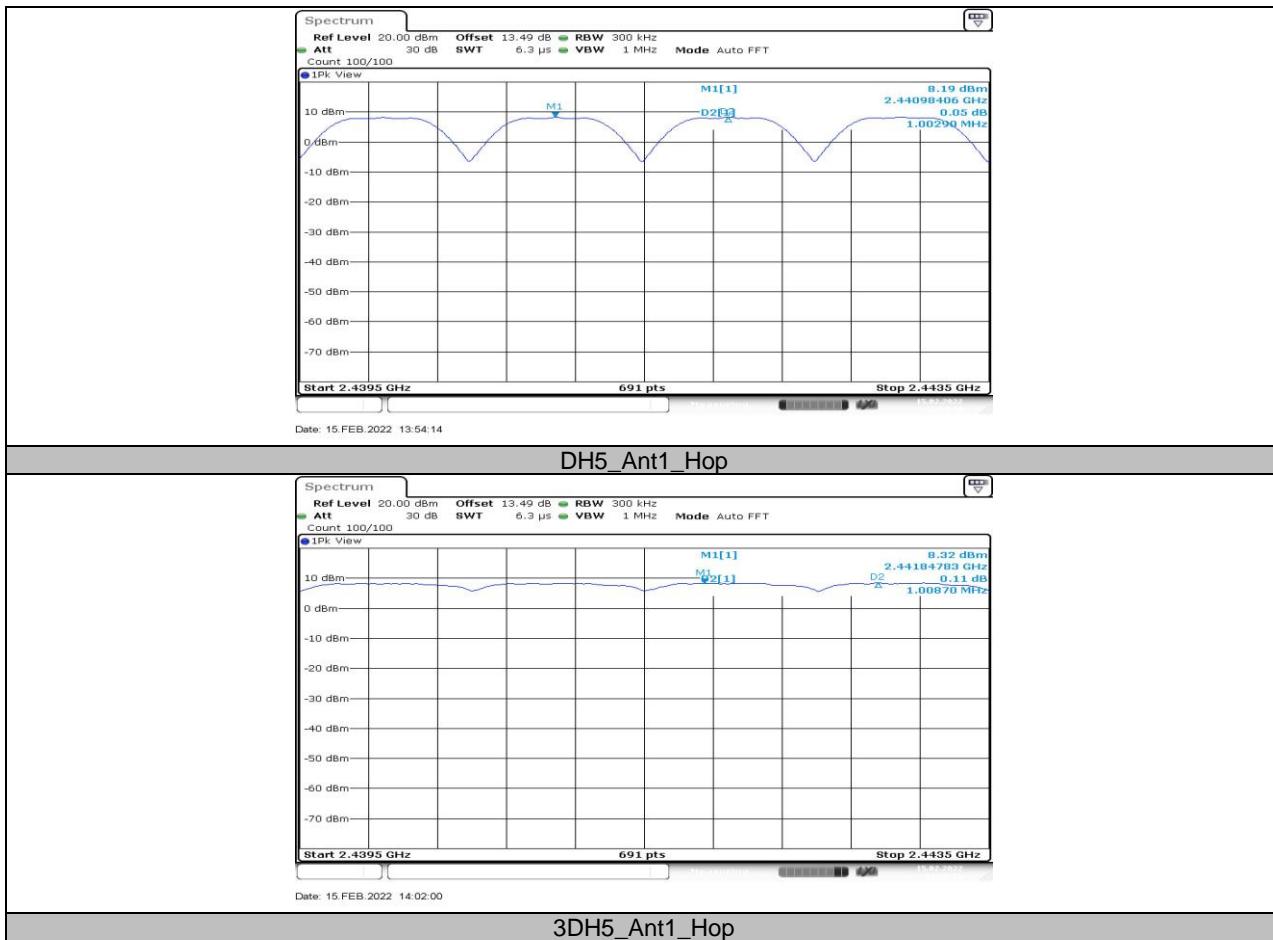
Test Mode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
DH5	Ant1	2402	8.35	≤20.97	PASS
		2441	8.41	≤20.97	PASS
		2480	8.40	≤20.97	PASS
3DH5	Ant1	2402	11.27	≤30	PASS
		2441	11.41	≤30	PASS
		2480	11.32	≤30	PASS

11.4. Appendix D: Carrier frequency separation

11.4.1. Test Result

Test Mode	Antenna	Channel	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	1.003	≥0.800	PASS
3DH5	Ant1	Hop	1.009	≥0.853	PASS

11.4.2. Test Graphs



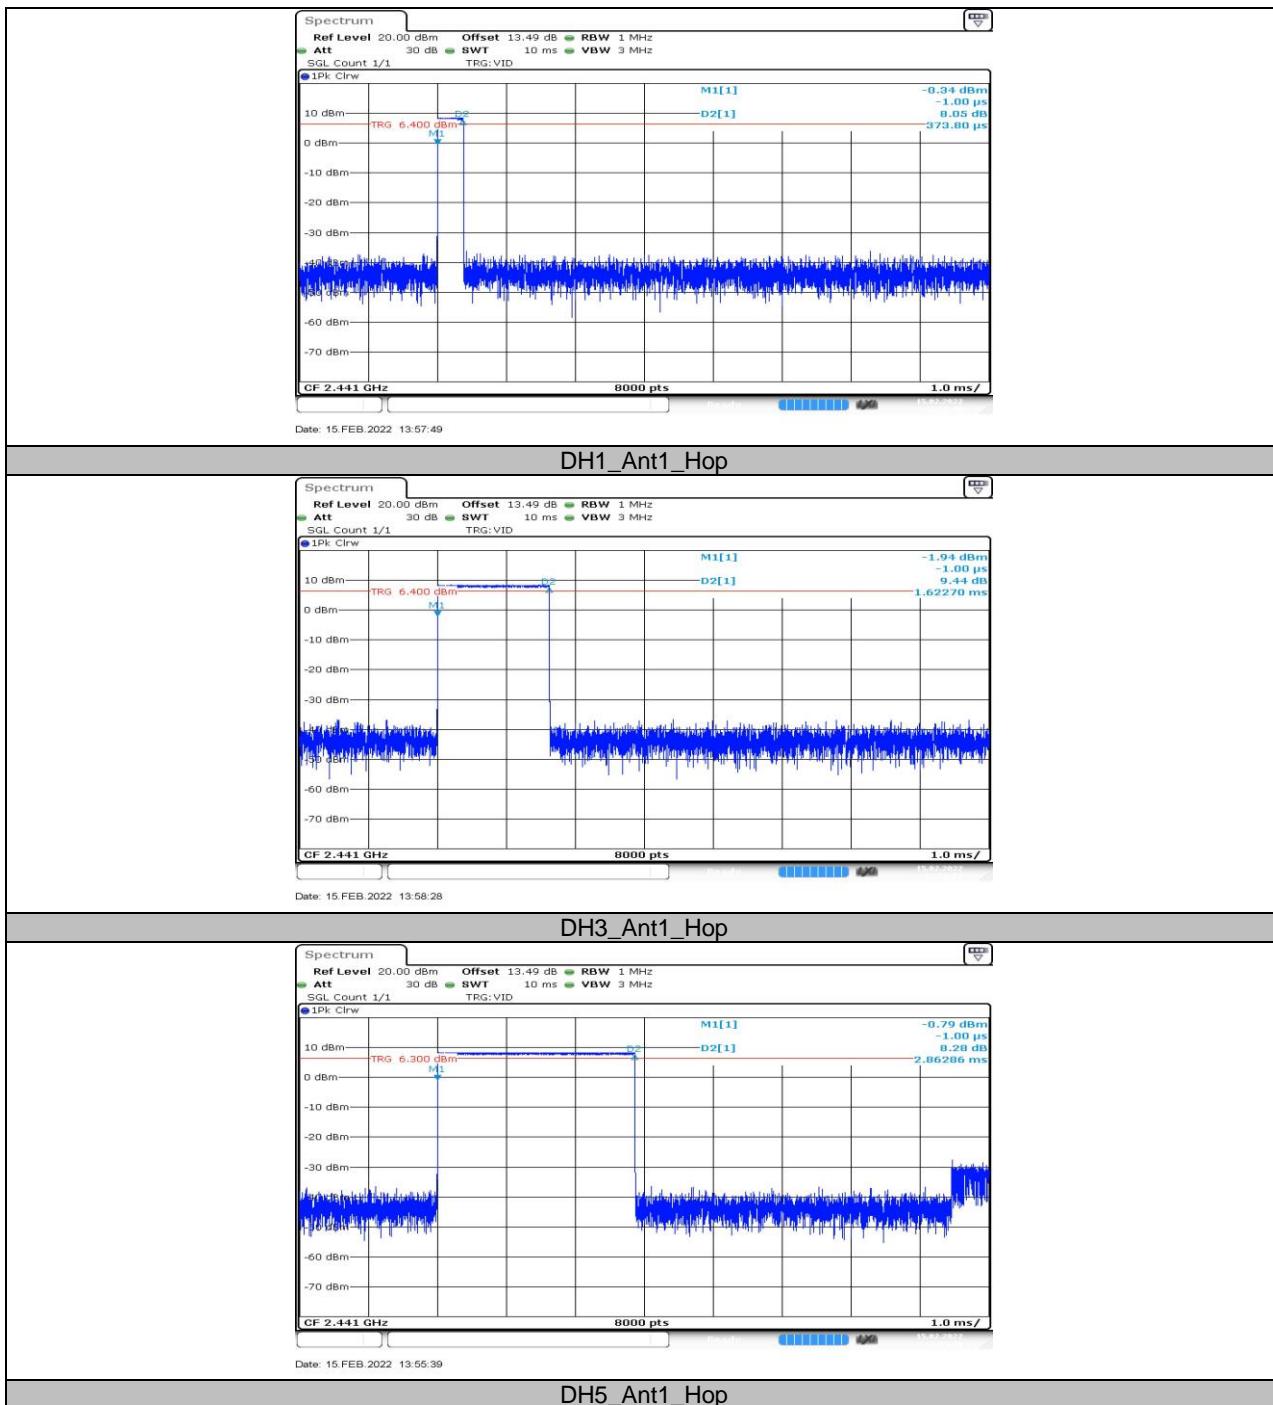
11.5. Appendix E: Time of occupancy

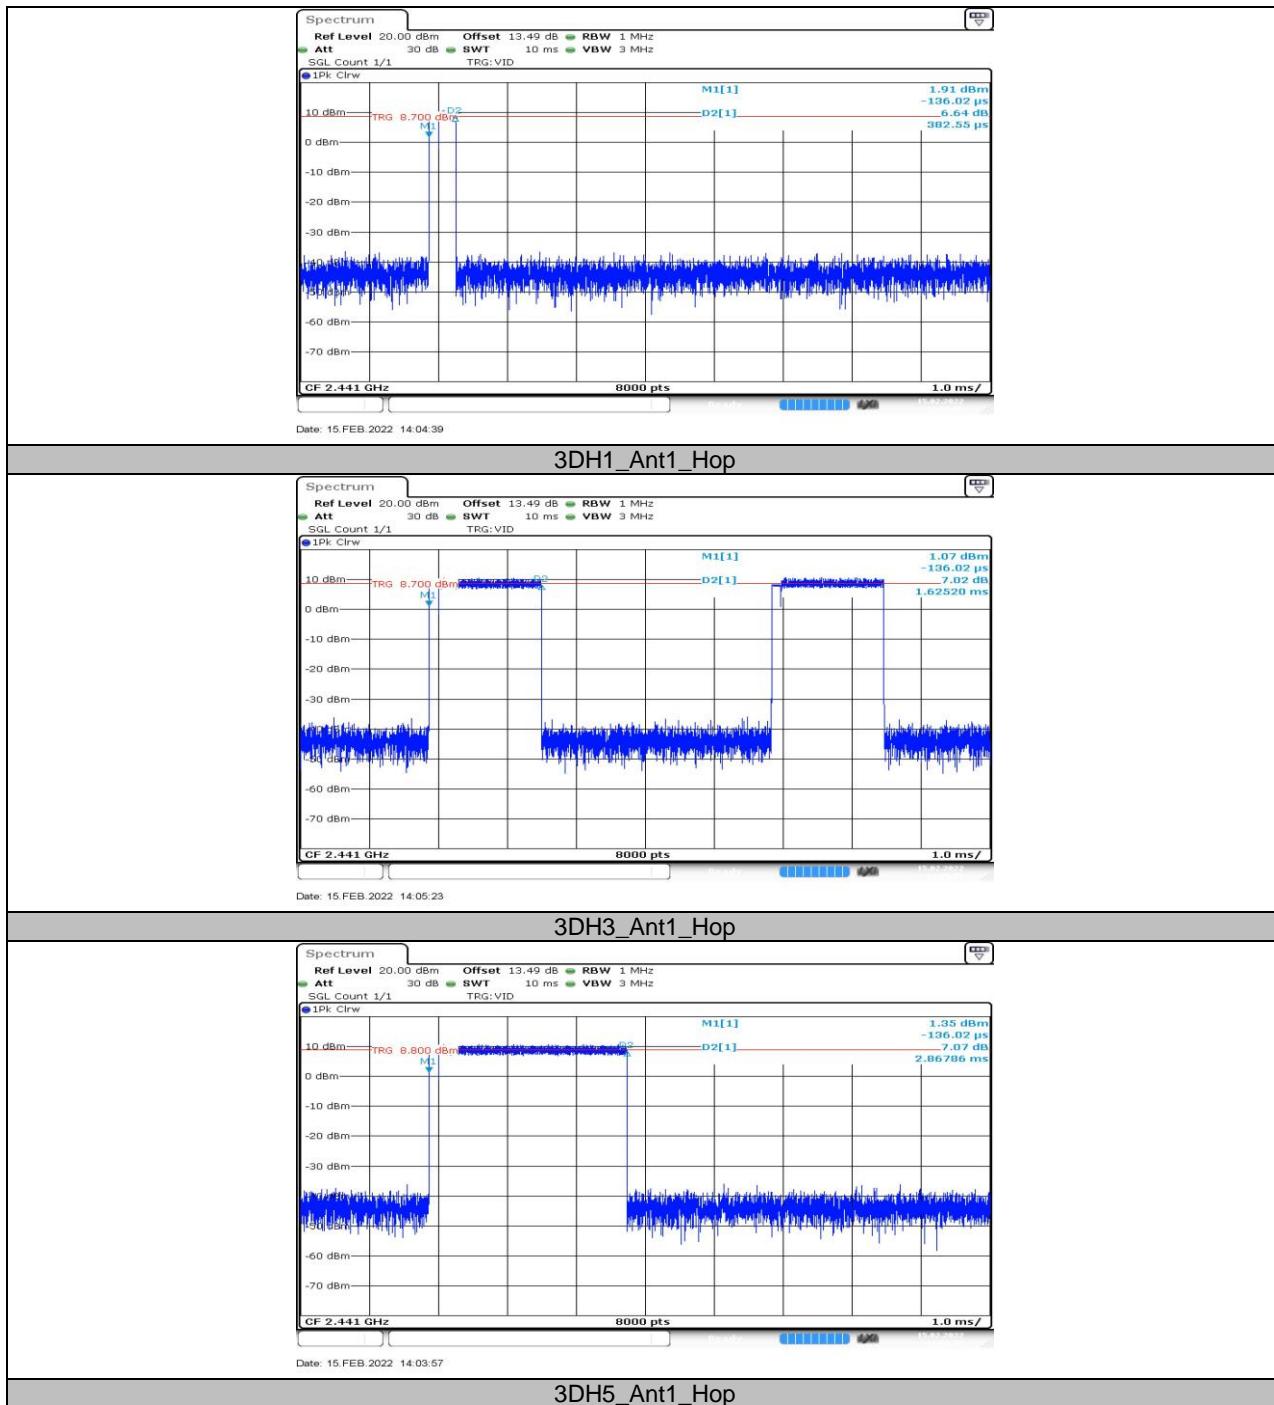
11.5.1. Test Result

FHSS Mode						
Test Mode	Antenna	Channel	BurstWidth [ms]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.37	0.118	<=0.4	PASS
DH3	Ant1	Hop	1.62	0.259	<=0.4	PASS
DH5	Ant1	Hop	2.86	0.305	<=0.4	PASS
3DH1	Ant1	Hop	0.38	0.122	<=0.4	PASS
3DH3	Ant1	Hop	1.63	0.261	<=0.4	PASS
3DH5	Ant1	Hop	2.87	0.306	<=0.4	PASS

AFHSS Mode						
Test Mode	Antenna	Channel	BurstWidth [ms]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.37	0.059	<=0.4	PASS
DH3	Ant1	Hop	1.62	0.130	<=0.4	PASS
DH5	Ant1	Hop	2.86	0.153	<=0.4	PASS
3DH1	Ant1	Hop	0.38	0.061	<=0.4	PASS
3DH3	Ant1	Hop	1.63	0.130	<=0.4	PASS
3DH5	Ant1	Hop	2.87	0.153	<=0.4	PASS

11.5.2. Test Graphs



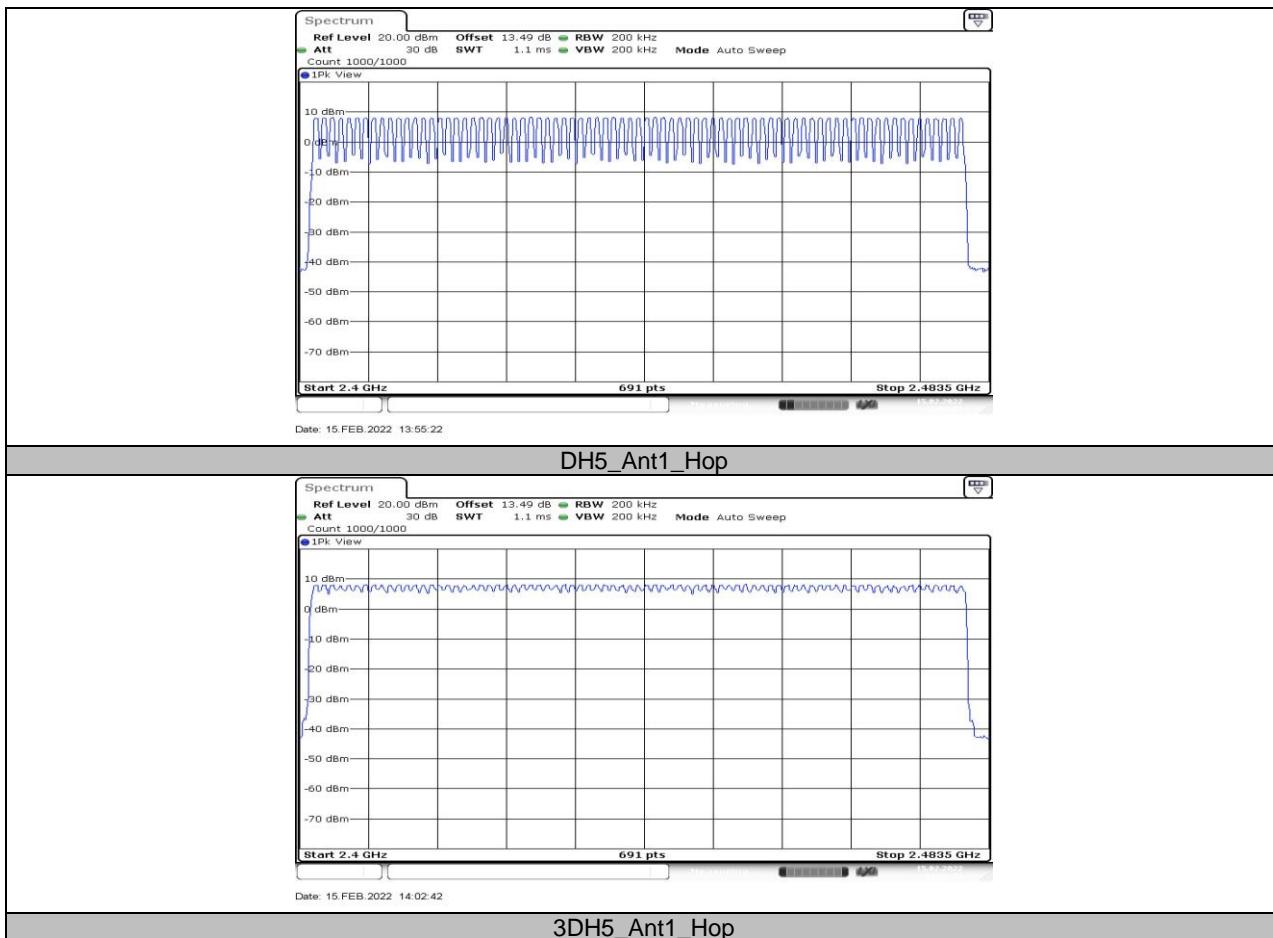


11.6. Appendix F: Number of hopping channels

11.6.1. Test Result

Test Mode	Antenna	Channel	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS

11.6.2. Test Graphs

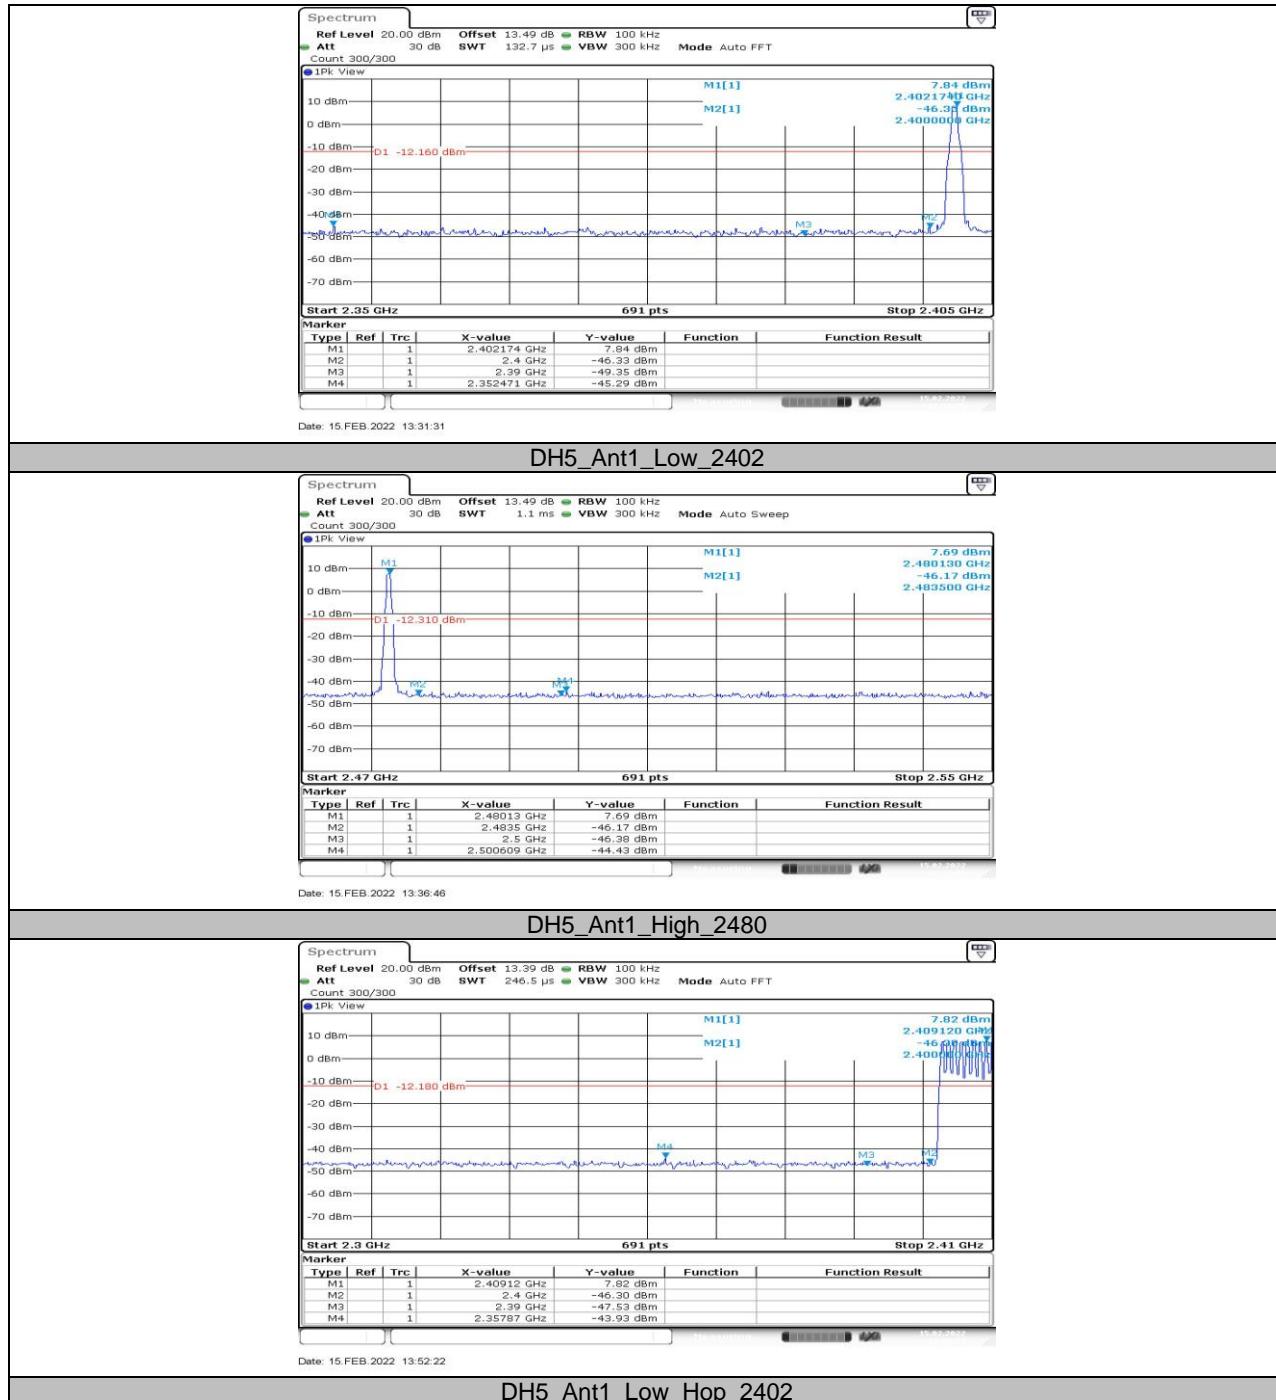


11.7. Appendix G: Band edge measurements

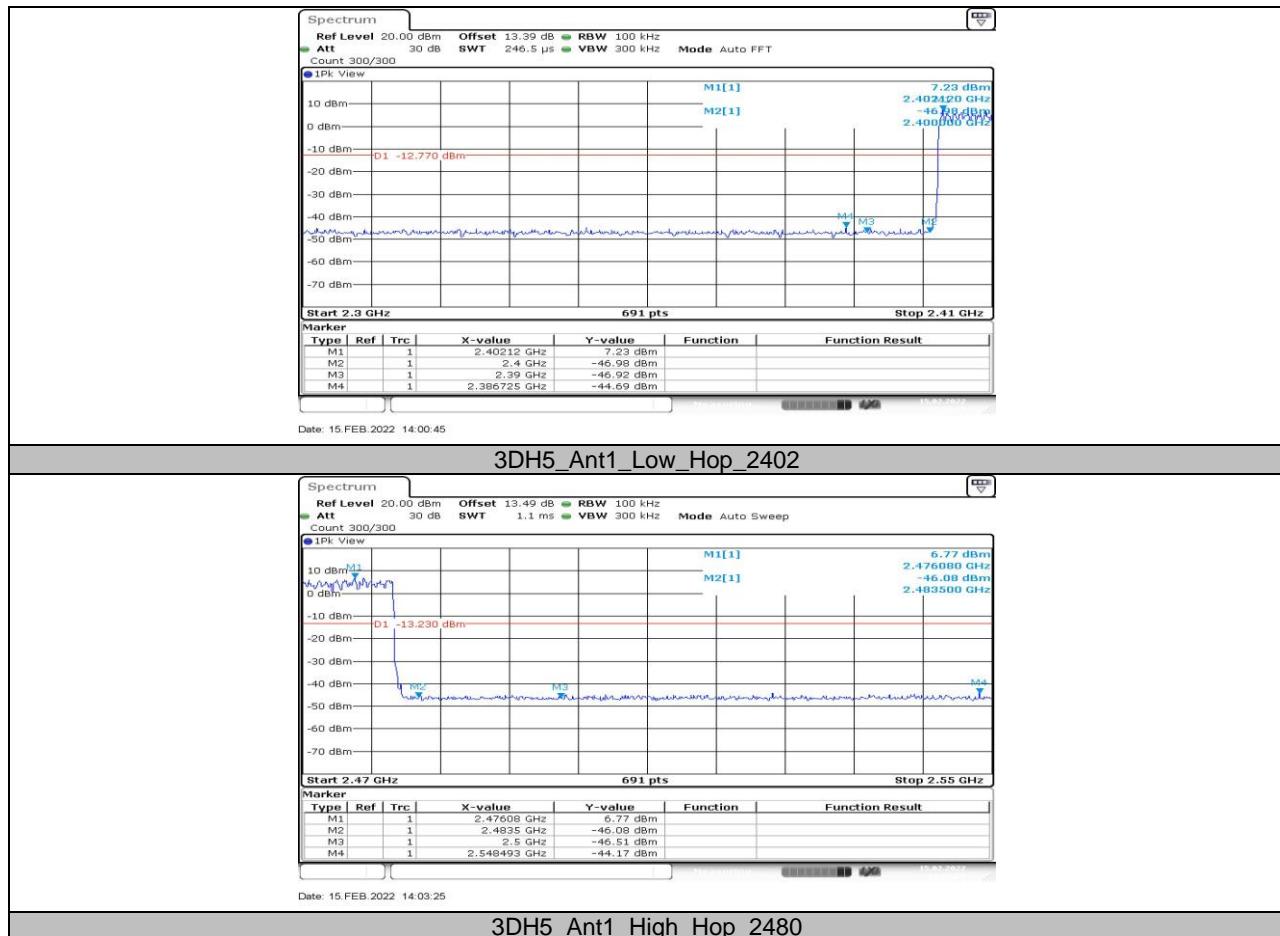
11.7.1. Test Result

Test Mode	Antenna	ChName	Channel	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	7.84	-45.29	≤-12.16	PASS
		High	2480	7.69	-44.43	≤-12.31	PASS
		Low	Hop_2402	7.82	-43.93	≤-12.18	PASS
		High	Hop_2480	7.58	-44.41	≤-12.42	PASS
3DH5	Ant1	Low	2402	7.84	-45.05	≤-12.16	PASS
		High	2480	7.80	-44.05	≤-12.2	PASS
		Low	Hop_2402	7.23	-44.69	≤-12.77	PASS
		High	Hop_2480	6.77	-44.17	≤-13.23	PASS

11.7.2. Test Graphs





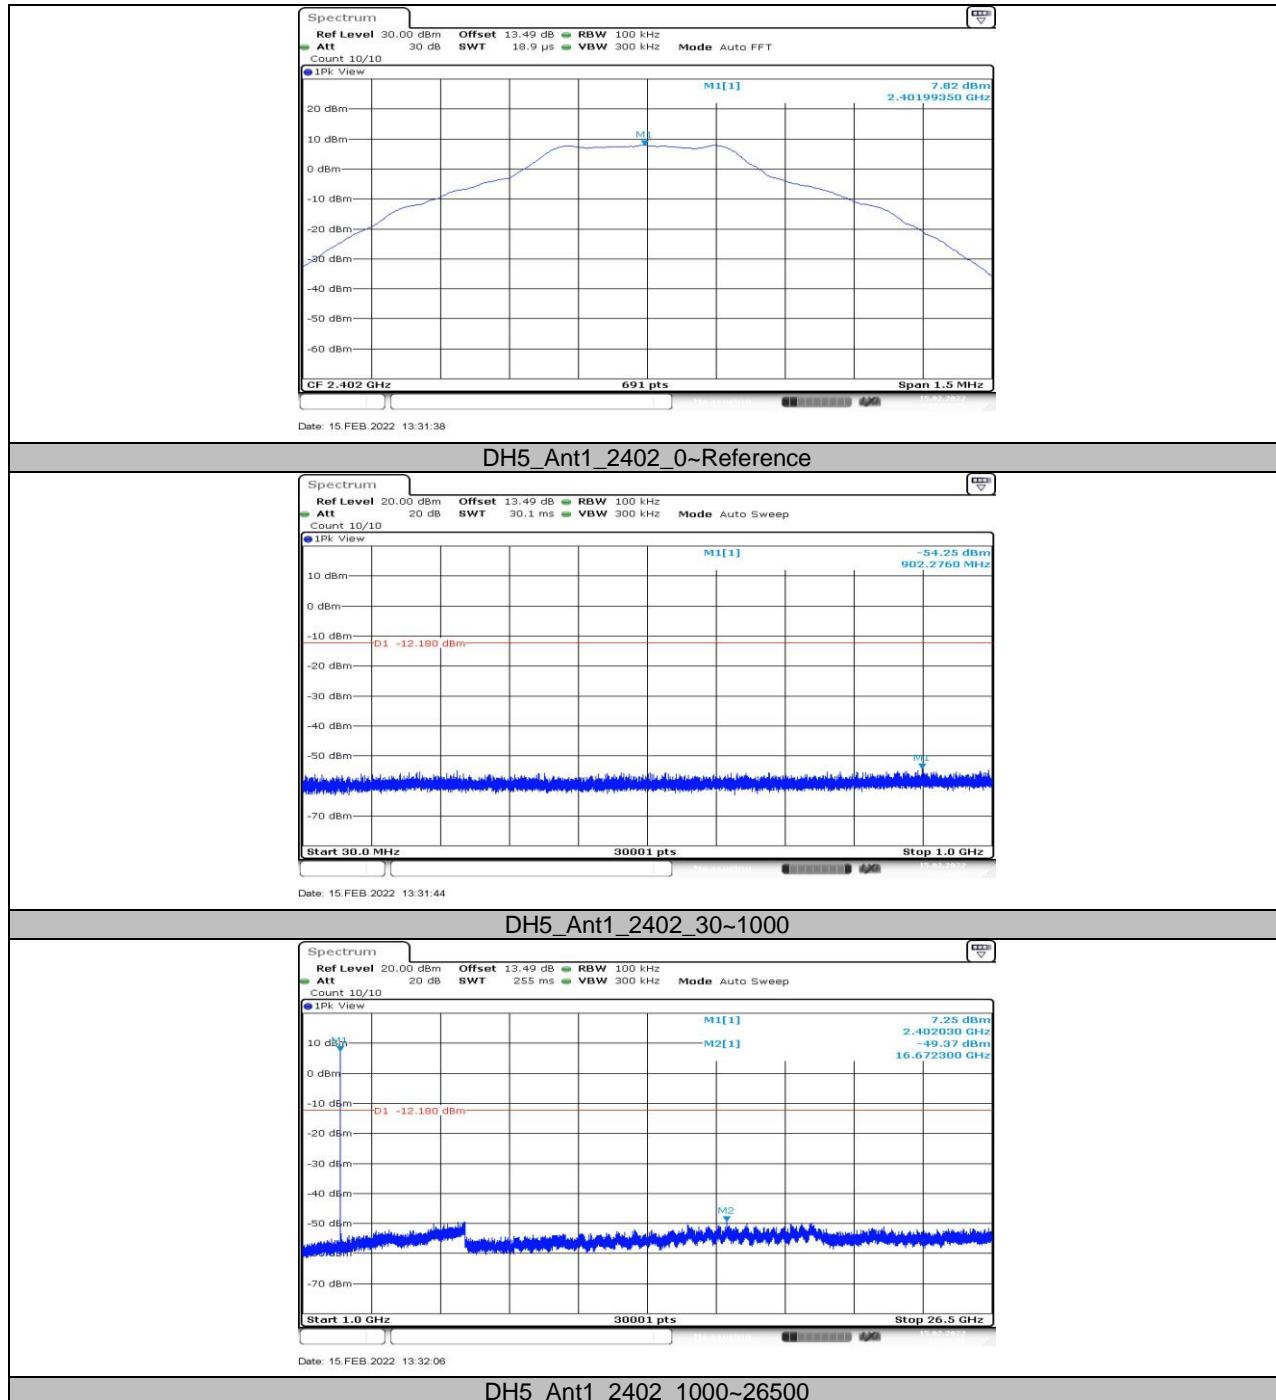


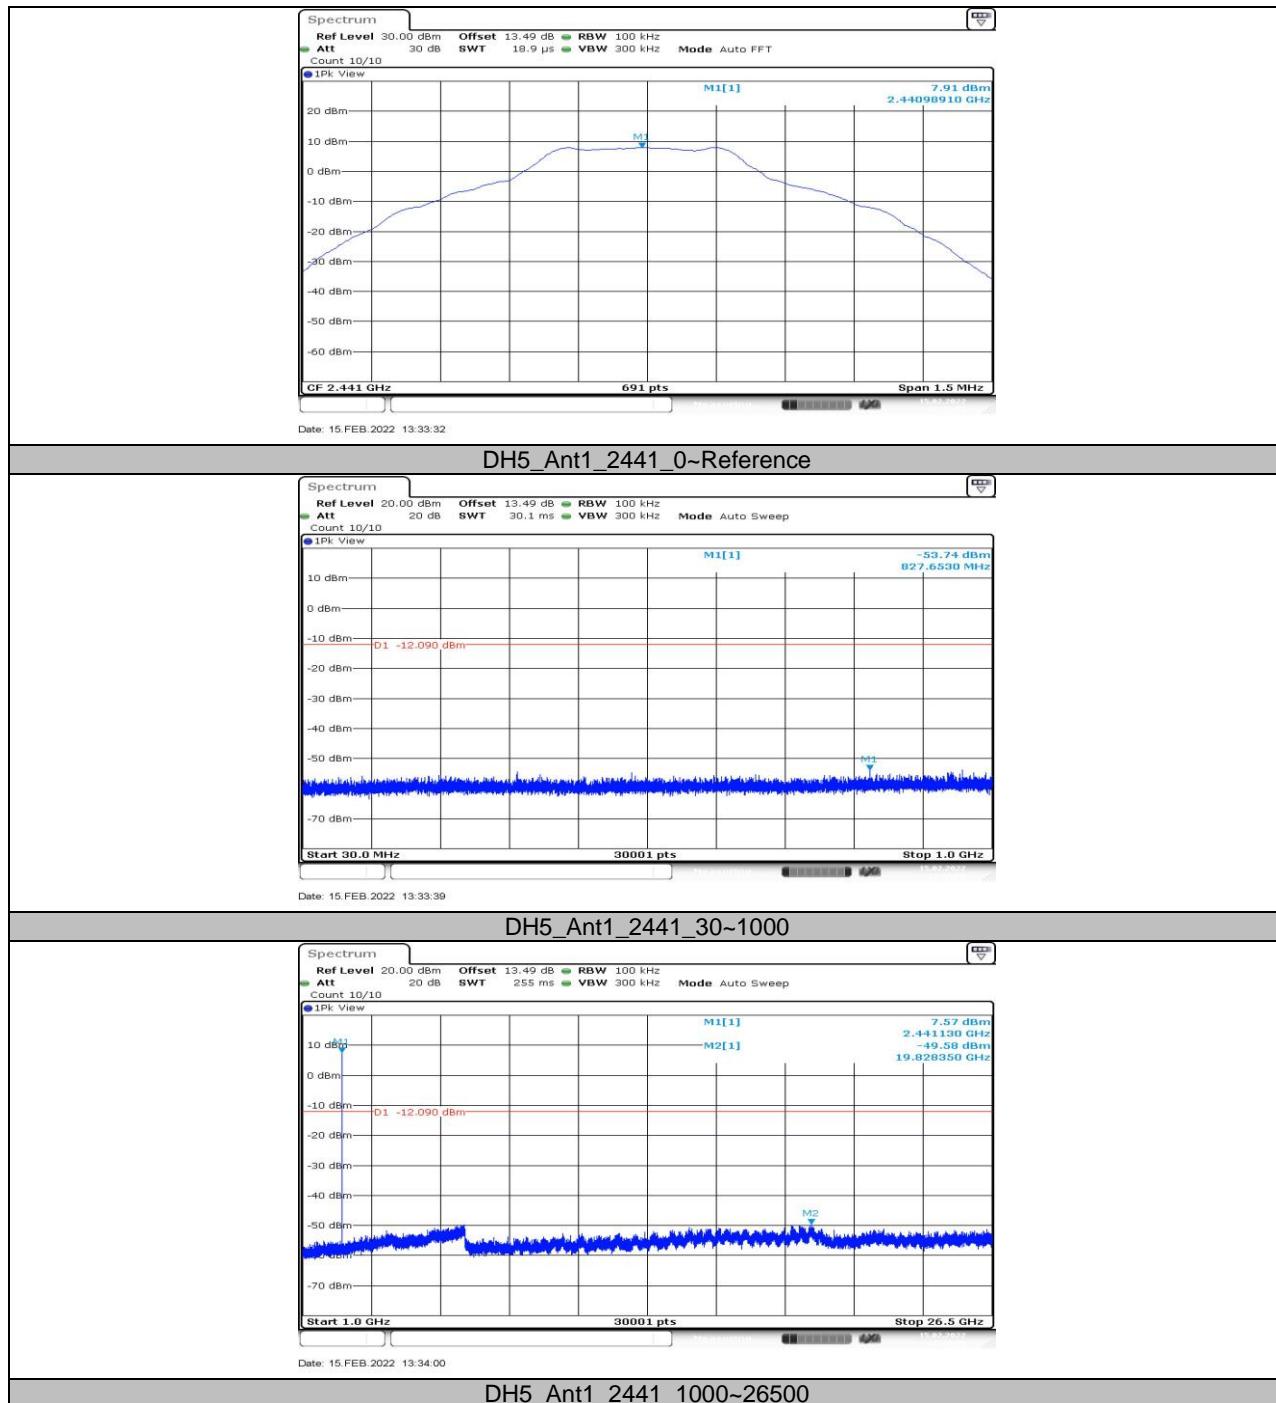
11.8. Appendix H: Conducted Spurious Emission

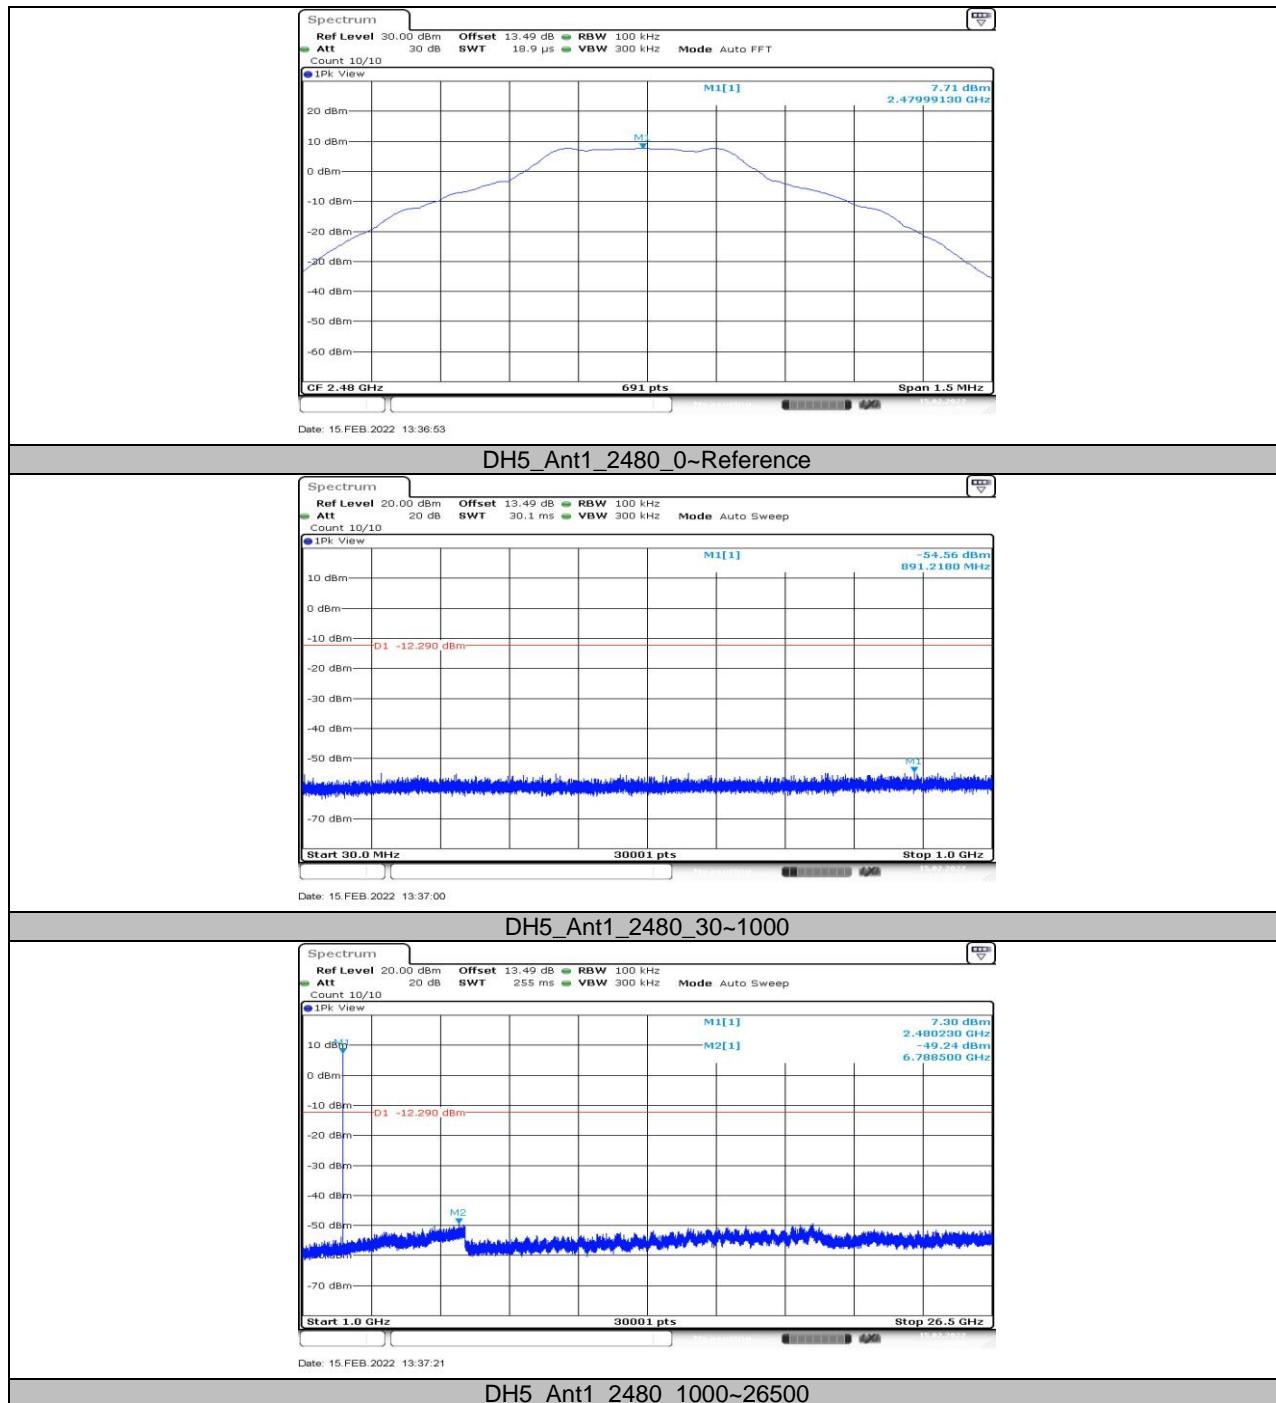
11.8.1. Test Result

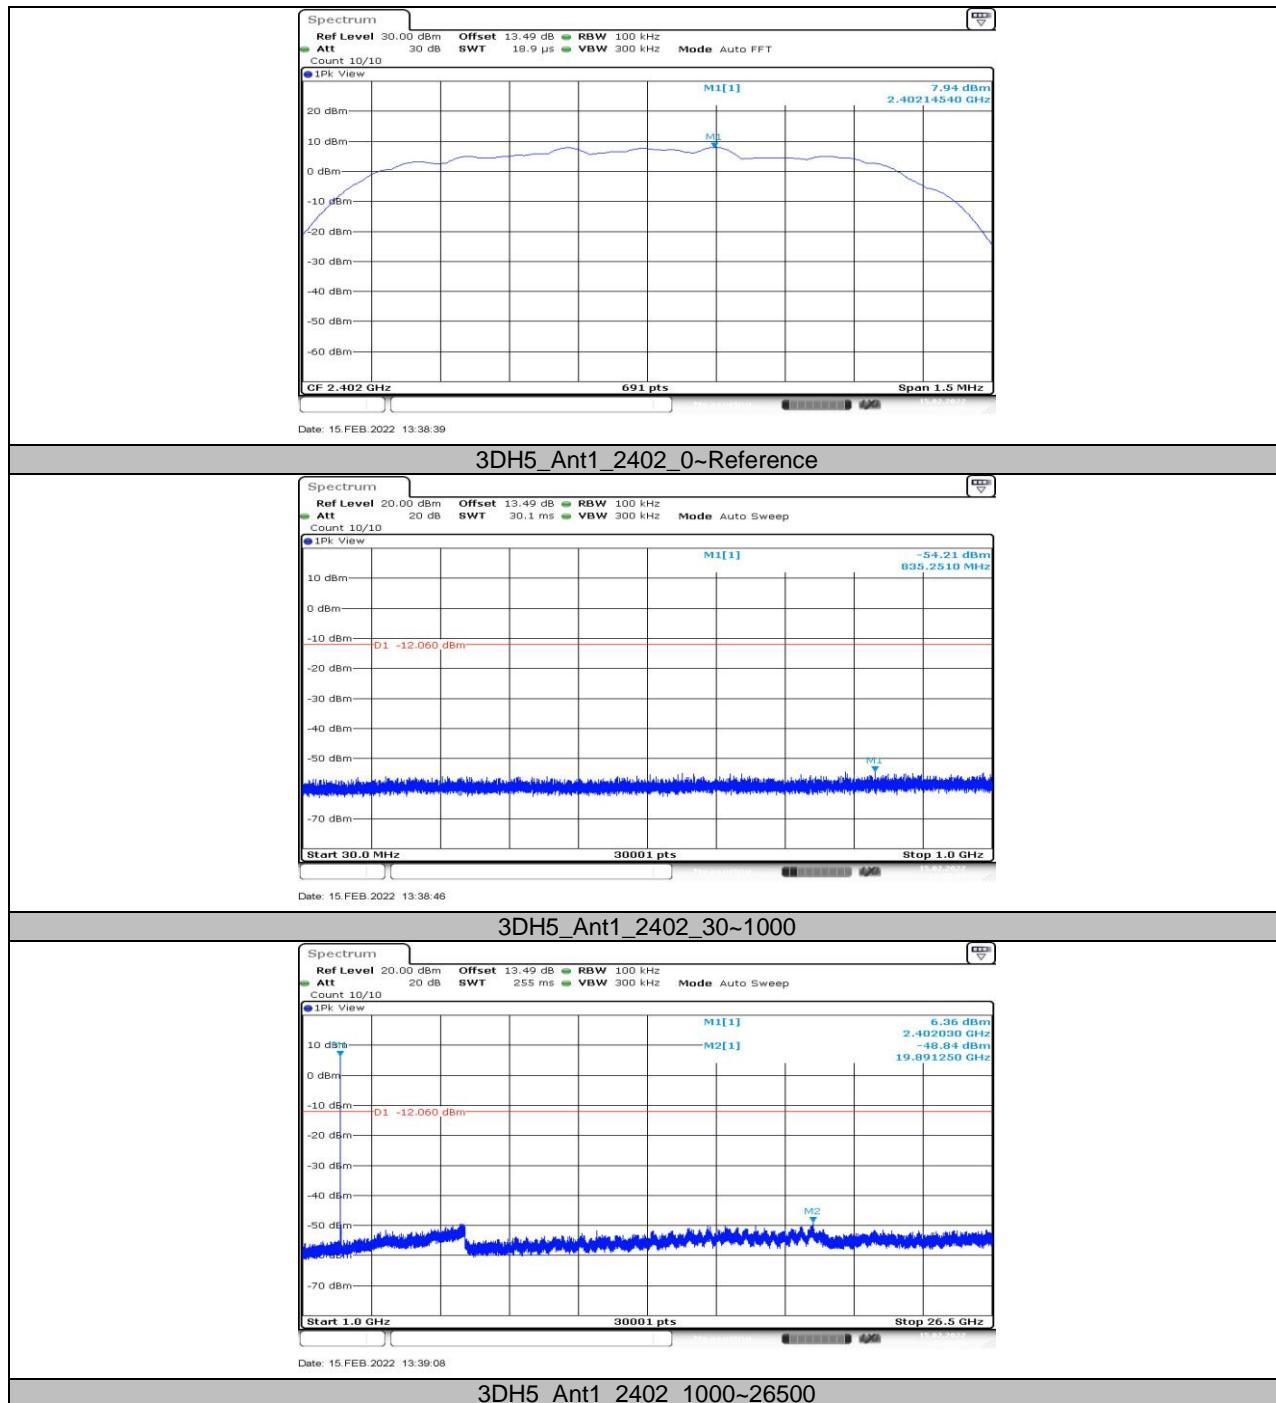
Test Mode	Antenna	Channel	FreqRange [MHz]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	Reference	7.82	---	PASS
			30~1000	-54.25	≤-12.18	PASS
			1000~26500	-49.37	≤-12.18	PASS
		2441	Reference	7.91	---	PASS
			30~1000	-53.74	≤-12.09	PASS
			1000~26500	-49.58	≤-12.09	PASS
		2480	Reference	7.71	---	PASS
			30~1000	-54.56	≤-12.29	PASS
			1000~26500	-49.24	≤-12.29	PASS
3DH5	Ant1	2402	Reference	7.94	---	PASS
			30~1000	-54.21	≤-12.06	PASS
			1000~26500	-48.84	≤-12.06	PASS
		2441	Reference	8.03	---	PASS
			30~1000	-54.17	≤-11.97	PASS
			1000~26500	-48.89	≤-11.97	PASS
		2480	Reference	7.80	---	PASS
			30~1000	-54.28	≤-12.2	PASS
			1000~26500	-48.31	≤-12.2	PASS

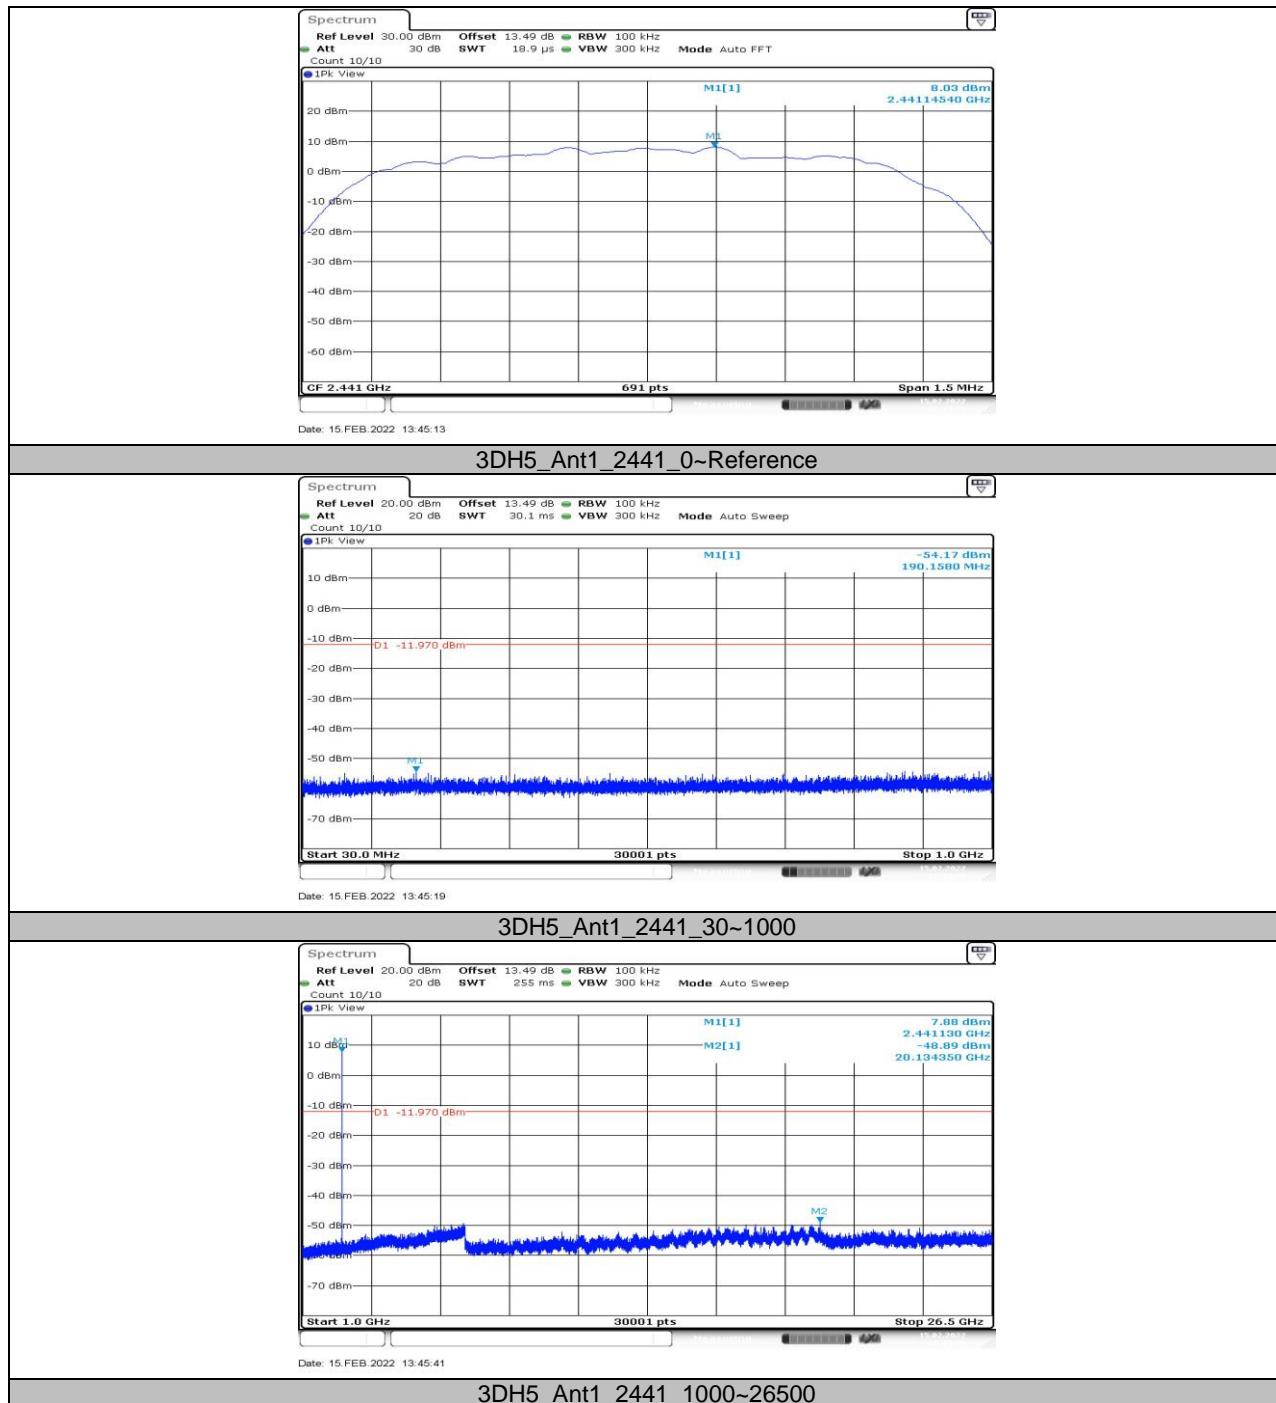
11.8.2. Test Graphs

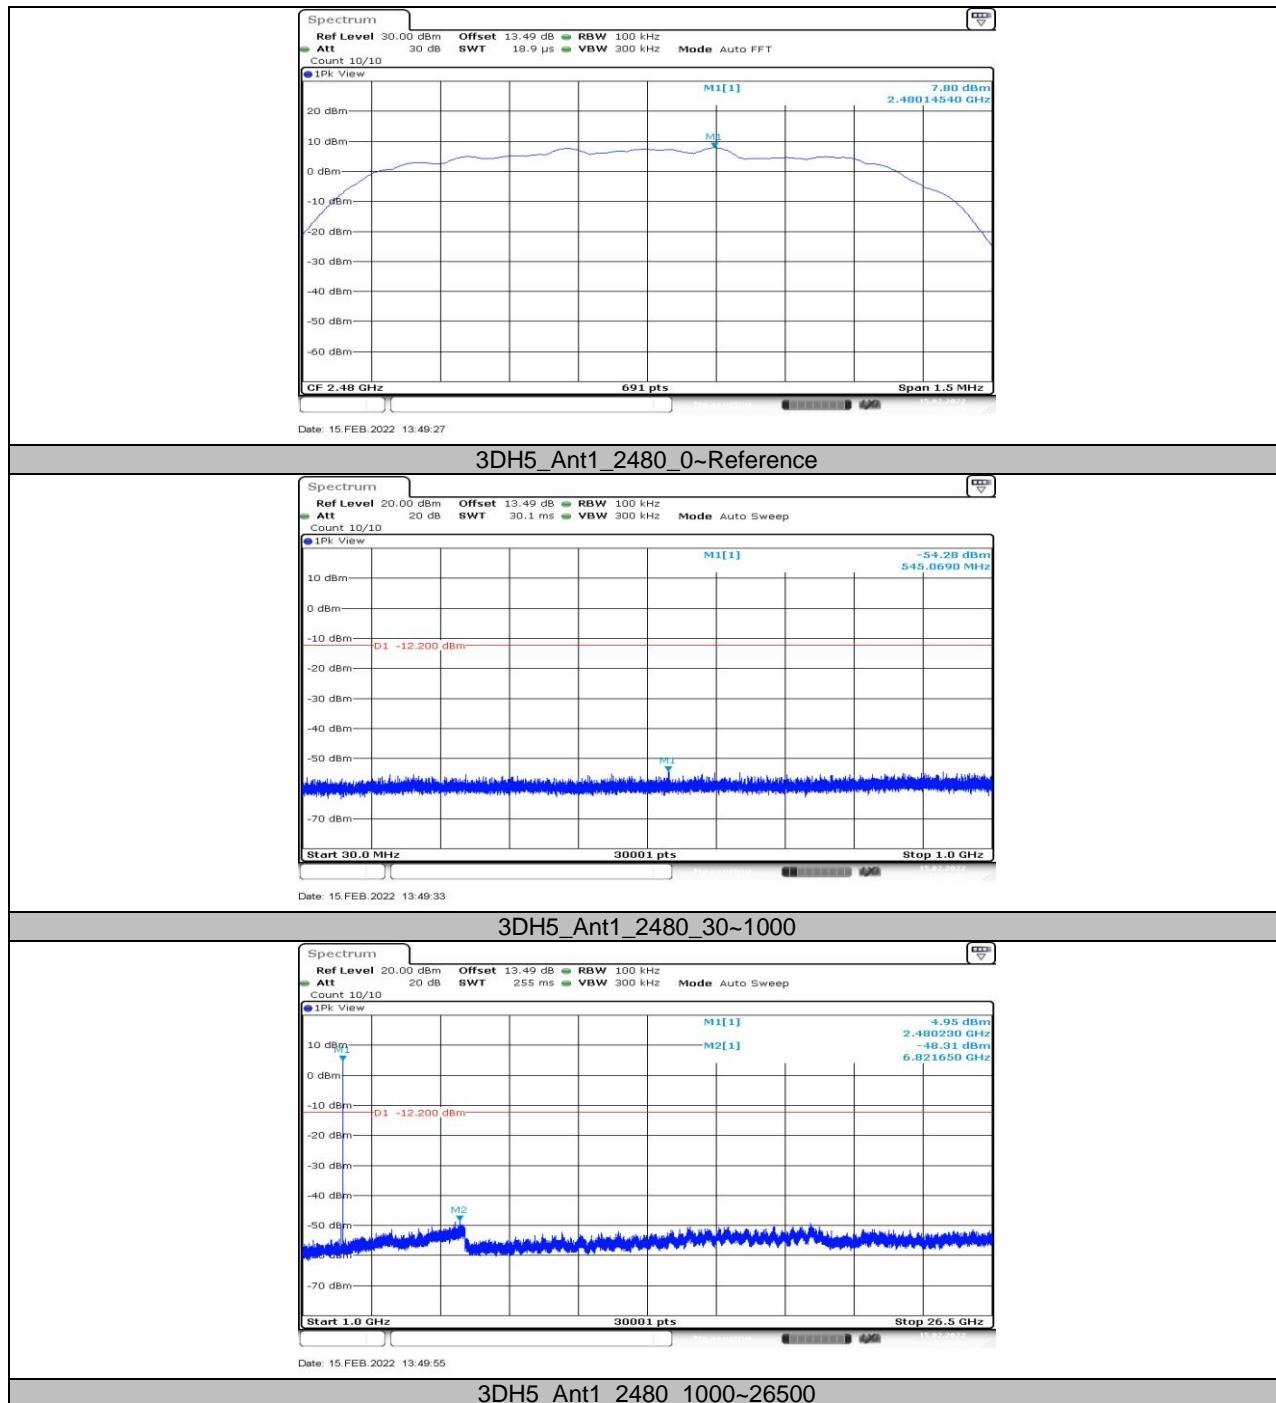












11.9. Appendix I: Duty Cycle

11.9.1. Test Result

Test Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
DH5	2.86	3.72	0.7688	76.88	1.14	0.35	0.5
3DH5	2.87	3.73	0.7694	76.94	1.14	0.35	0.5

Note:

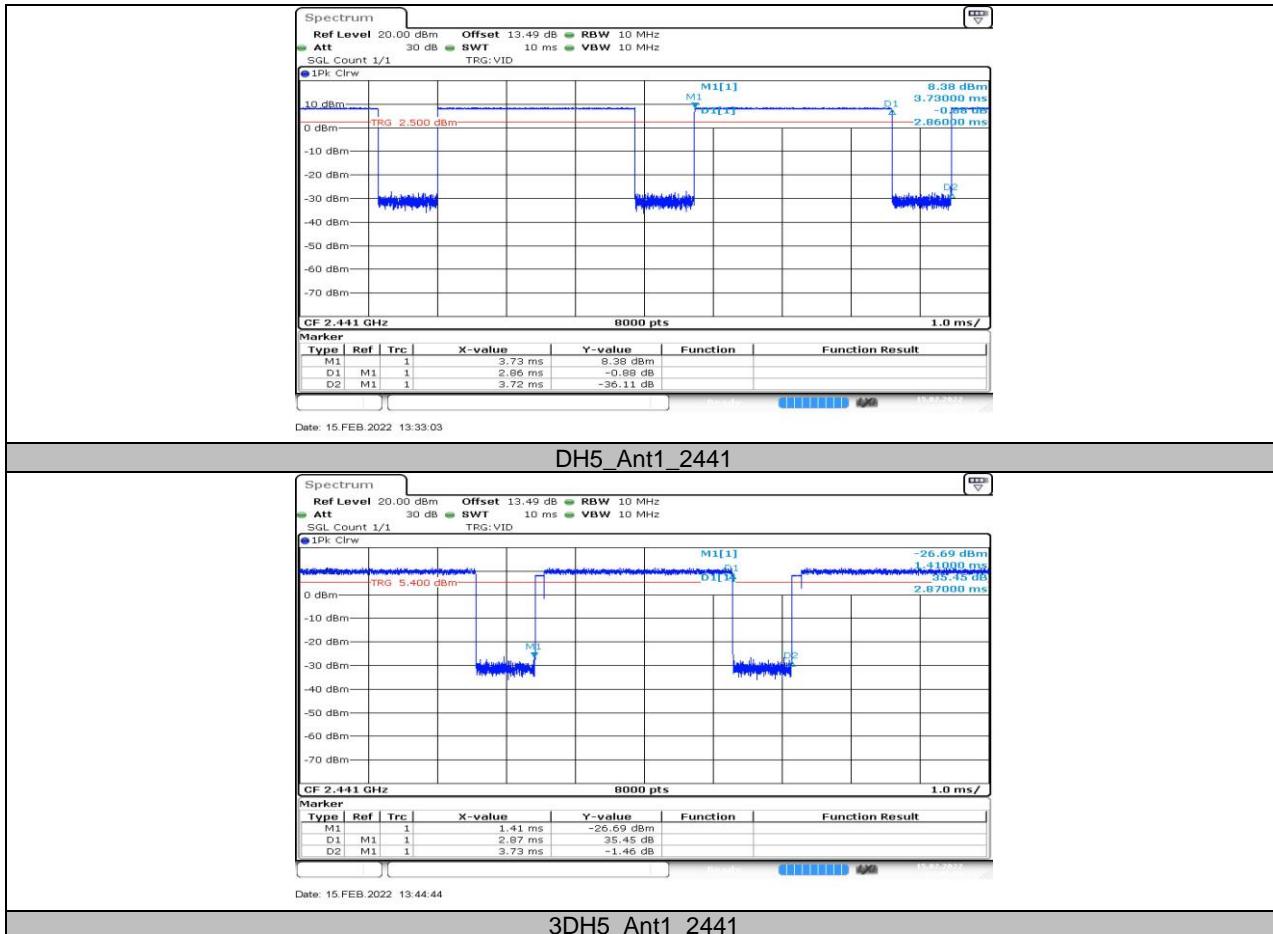
Duty Cycle Correction Factor=10log (1/x).

Where: x is Duty Cycle (Linear)

Where: T is On Time

If that calculated VBW is not available on the analyzer then the next higher value should be used.

11.9.2. Test Graphs



END OF REPORT