




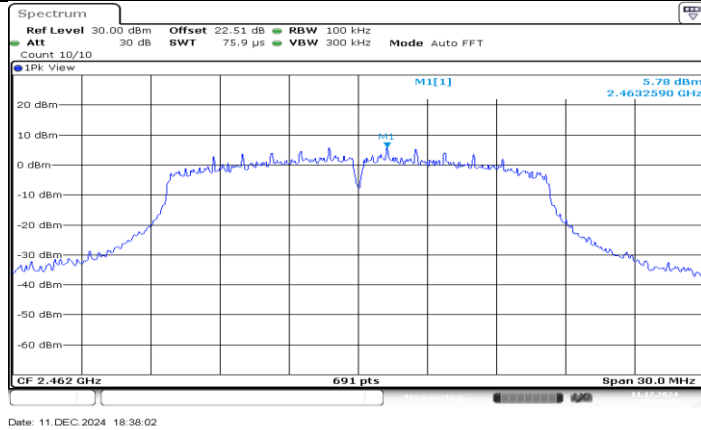


11G_Ant1_2462_0-Reference

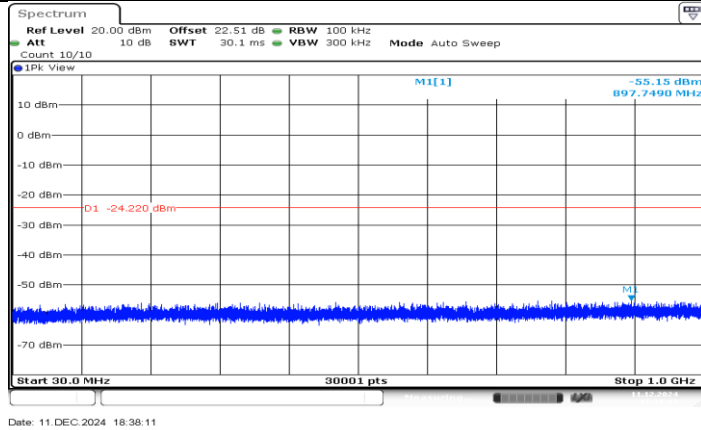


11G_Ant1_2462_30-1000

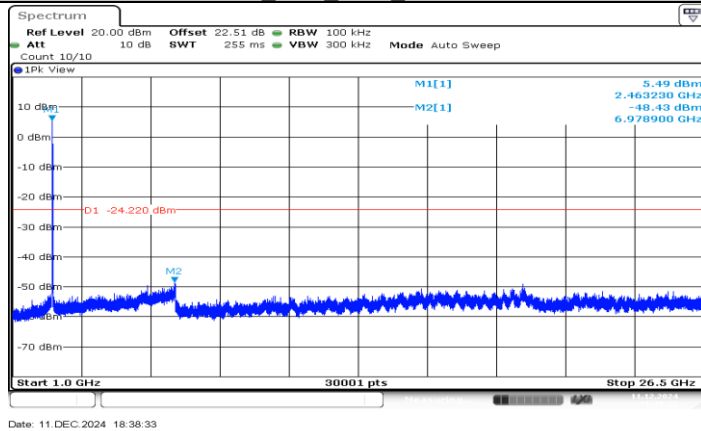


11G_Ant1_2462_1000-26500

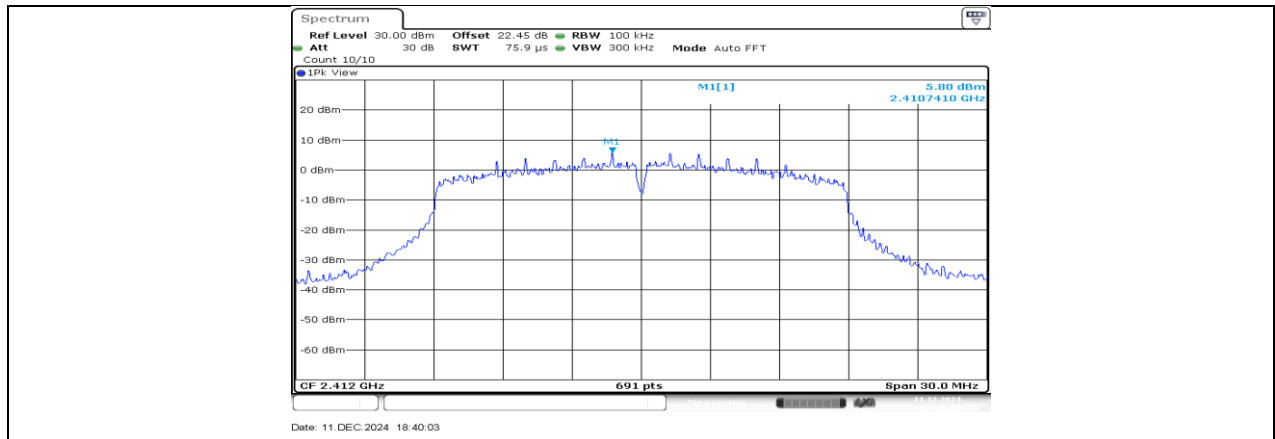


11N20SISO_Ant1_2412_0-Reference

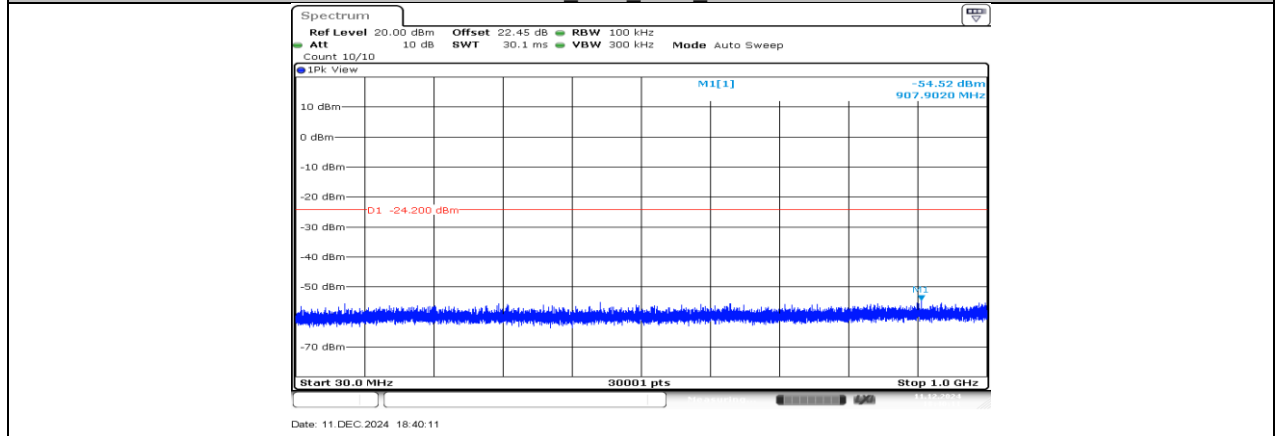


11N20SISO_Ant1_2412_30-1000

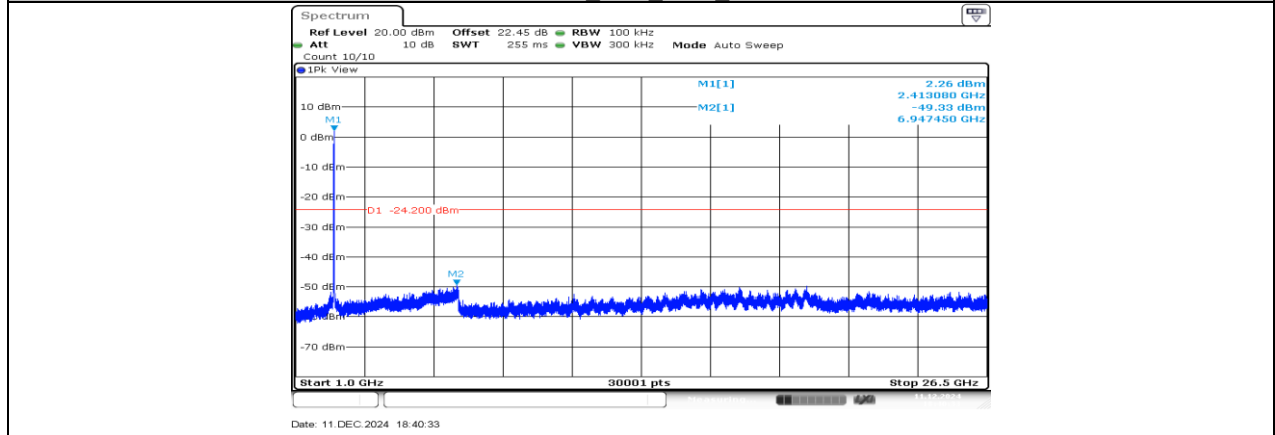


11N20SISO_Ant1_2412_1000-26500

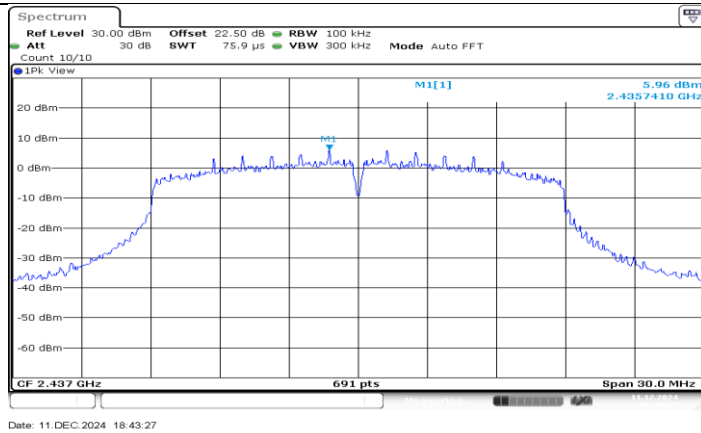


11N20SISO Ant1 2437 0-Reference

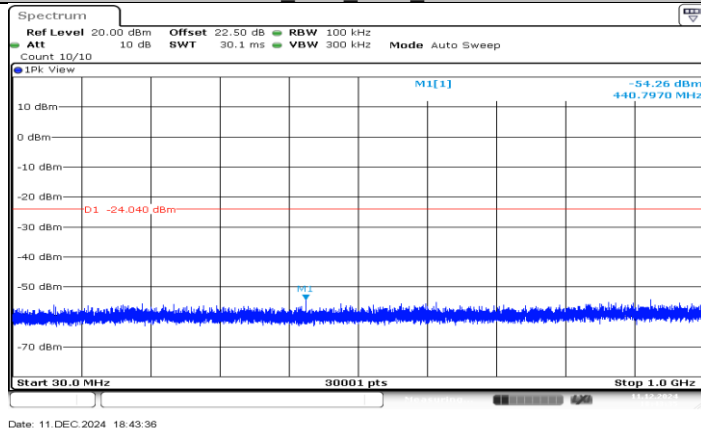


11N20SISO Ant1 2437 30-1000

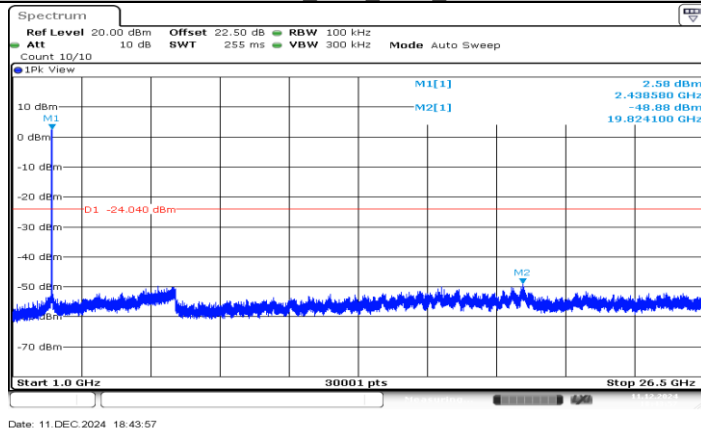


11N20SISO Ant1 2437 1000-26500

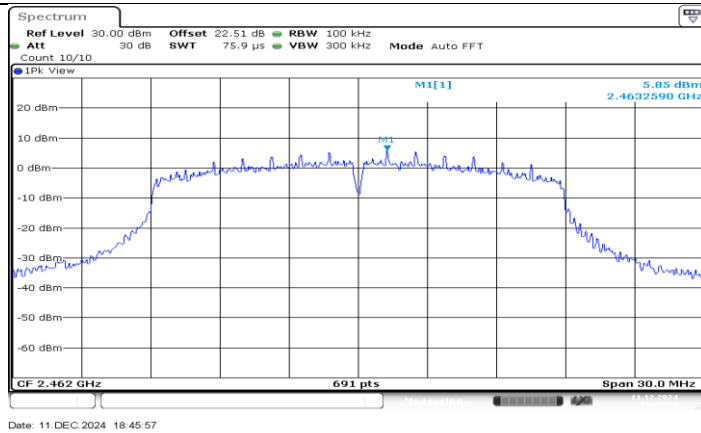


11N20SISO_Ant1_2462_0~Reference

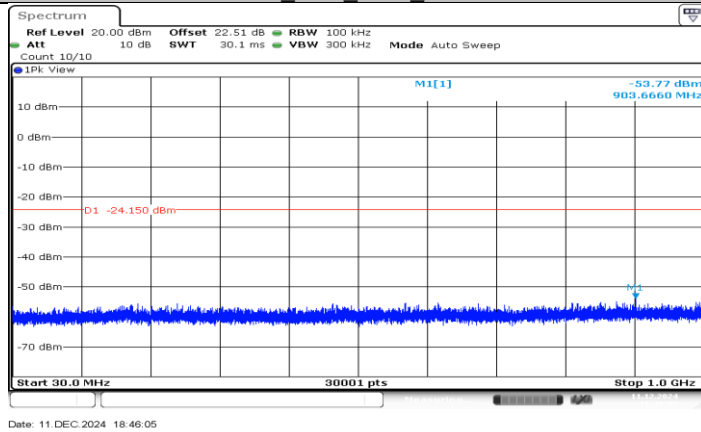


11N20SISO_Ant1_2462_30~1000

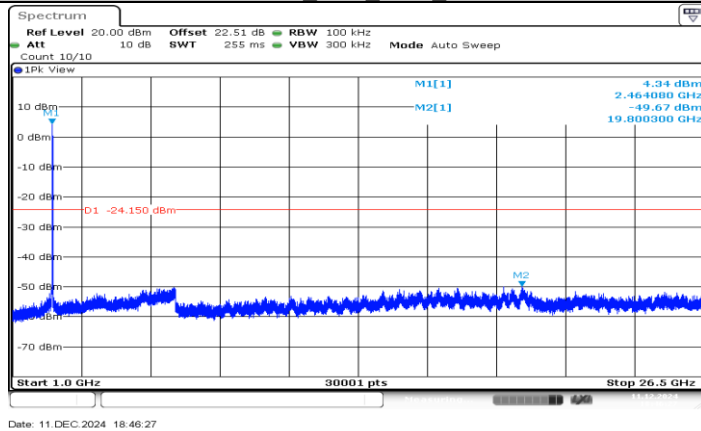


11N20SISO_Ant1_2462_1000~26500

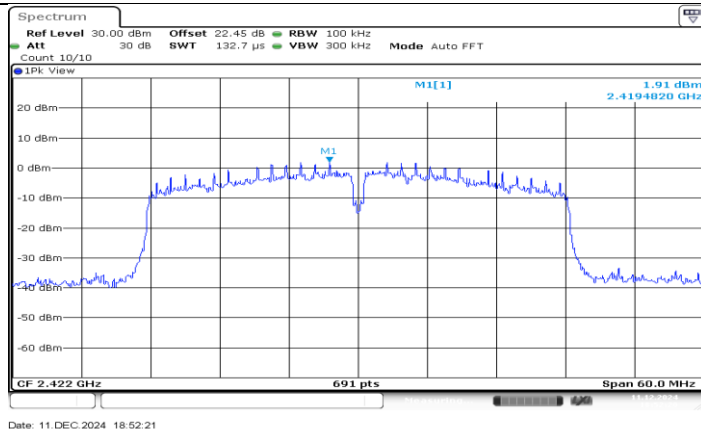


11N40SISO_Ant1_2422_0-Reference

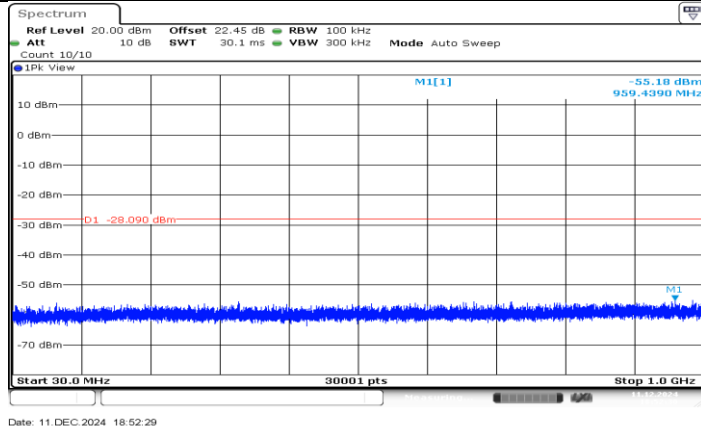


11N40SISO_Ant1_2422_30-1000

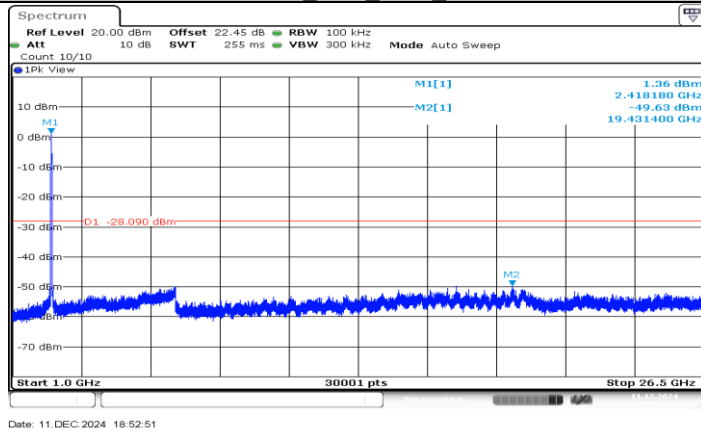


11N40SISO_Ant1_2422_1000-26500

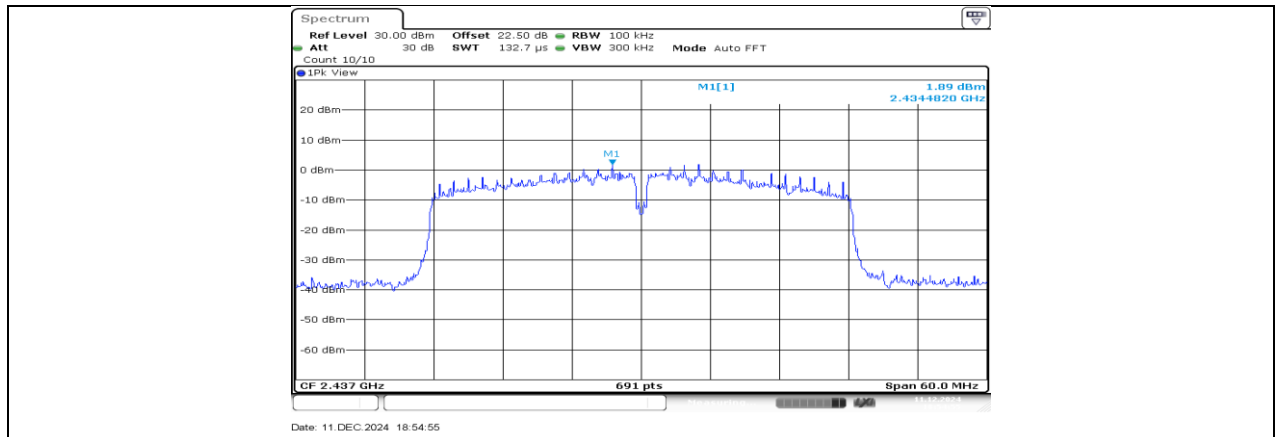


11N40SISO Ant1 2437 0~Reference

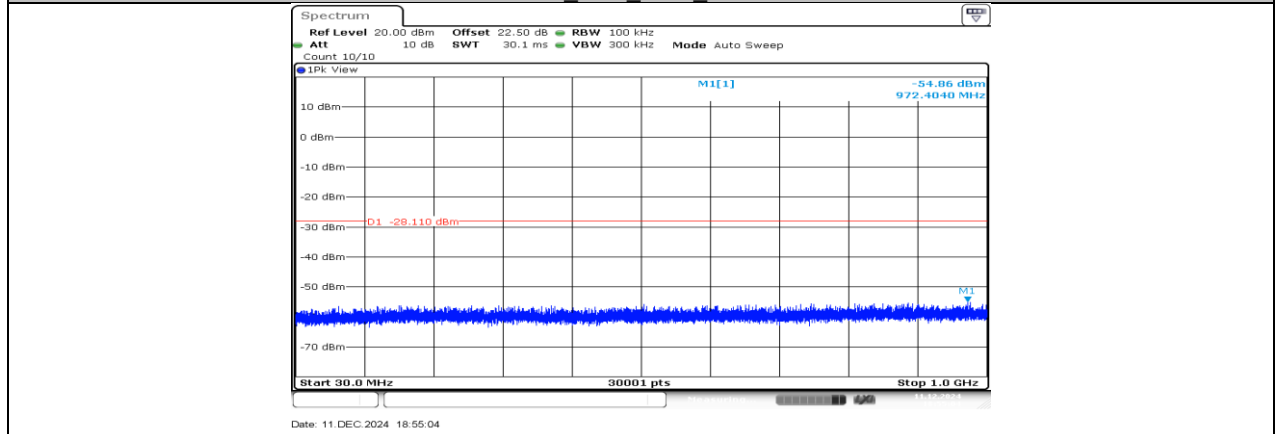


11N40SISO Ant1 2437 30~1000

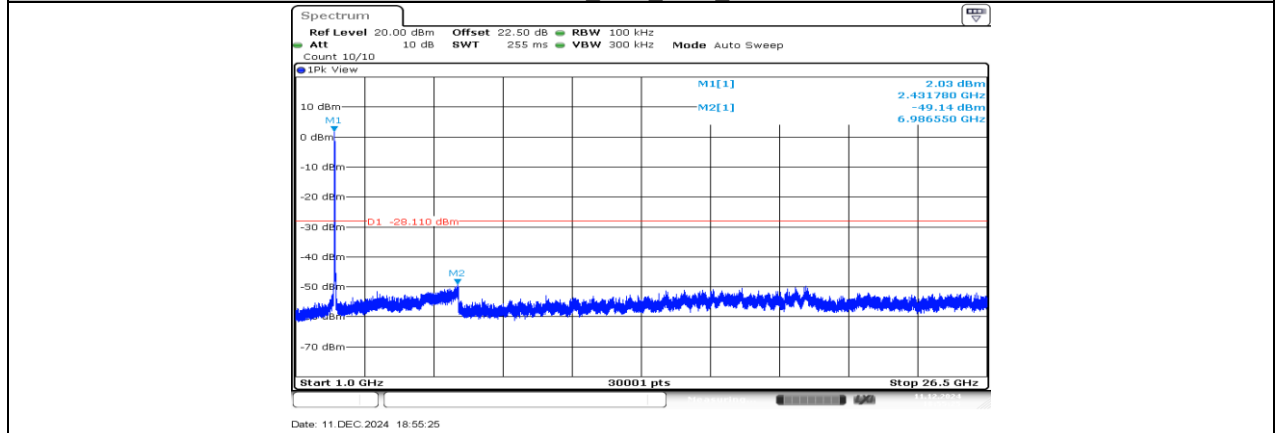


11N40SISO Ant1 2437 1000~26500

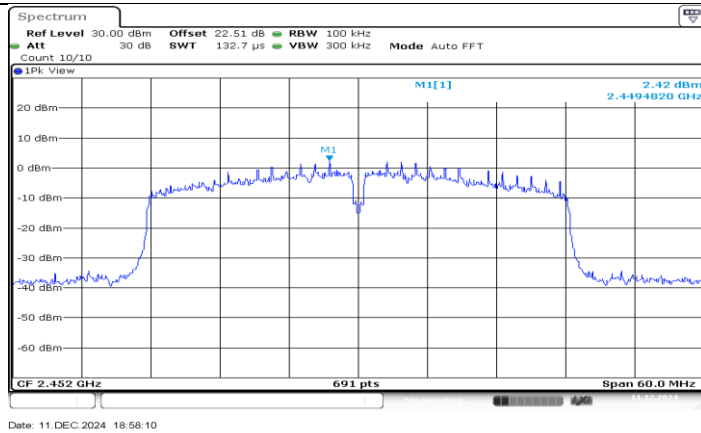

11N40SISO_Ant1_2452_0~Reference

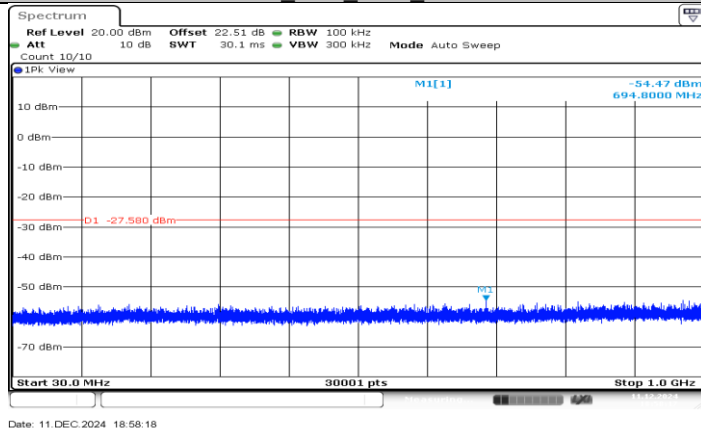

11N40SISO_Ant1_2452_30~1000

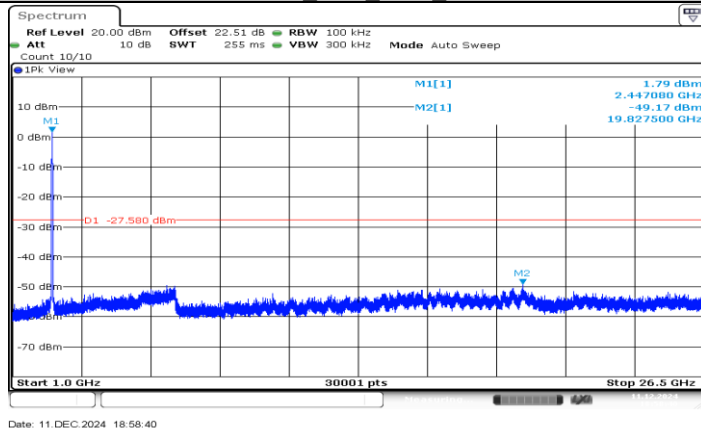

11N40SISO_Ant1_2452_1000~26500

11.7. APPENDIX G: DUTY CYCLE**11.7.1. Test Result**

Test Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
11B	8.17	8.19	0.9976	99.76	0.01	0.12	N/A
11G	1.35	1.86	0.7258	72.58	1.39	0.74	1
11N20SISO	1.26	1.77	0.7119	71.19	1.48	0.79	1
11N40SISO	0.63	1.14	0.5526	55.26	2.58	1.59	2

Note:


Duty Cycle Correction Factor= $10\log(1/x)$.


Where: x is Duty Cycle (Linear)

Where: T is On Time

If that calculated VBW is not available on the analyzer then the next higher value should be used.

11.7.2. Test Graphs

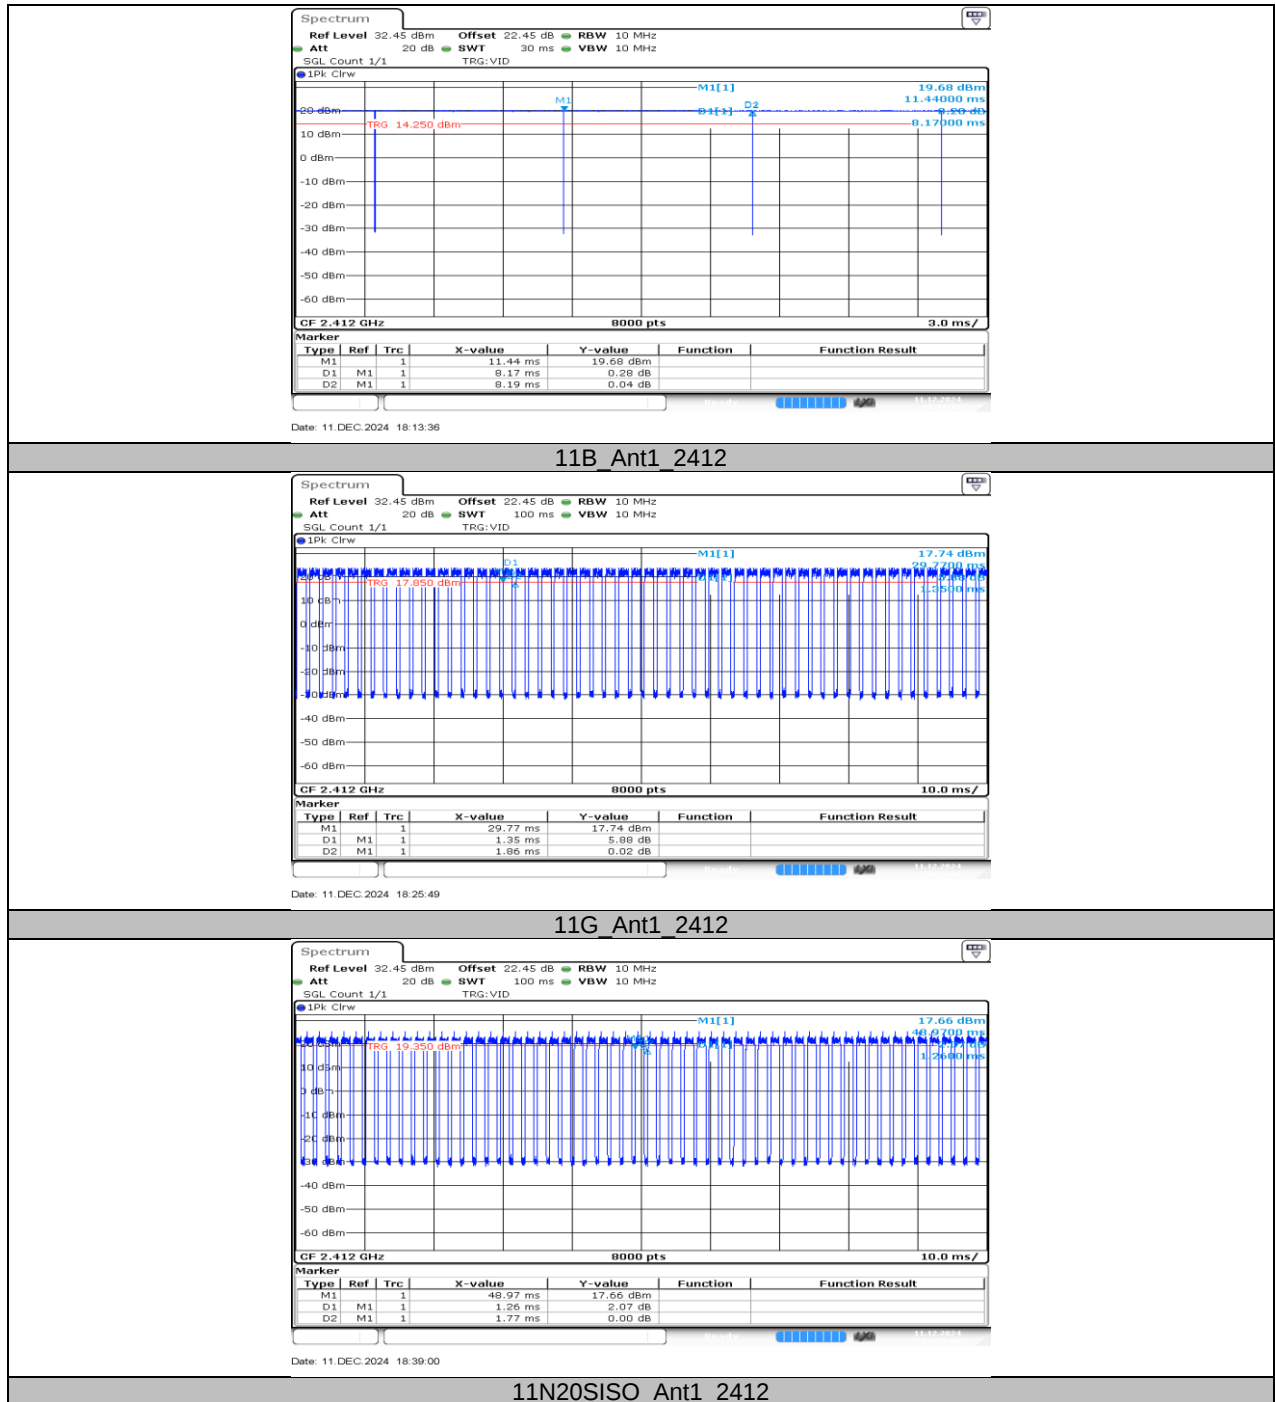

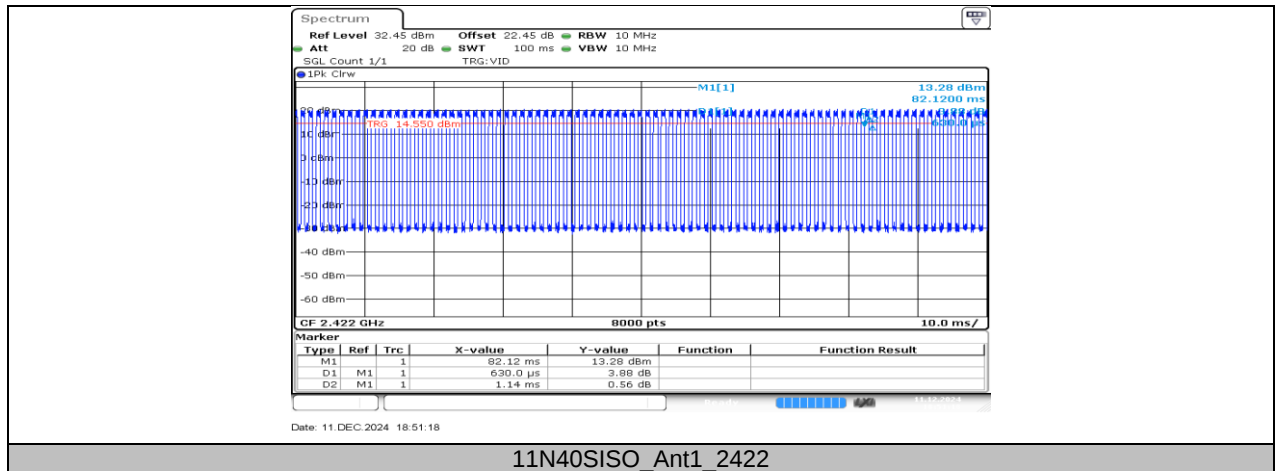

END OF REPORT