

FCC PART 15E TEST REPORT FOR CERTIFICATION
On Behalf of

Hui Zhou Gaoshengda Technology Co., Ltd

WIFI Module

Model Number: WKC12R2501

FCC ID: 2AC23-WKC12

Applicant :	Hui Zhou Gaoshengda Technology Co.,LTD
Address:	NO.75 Zhongkai Development Area, Huizhou, Guangdong, China
Prepared By:	EST Technology Co., Ltd.
	Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
Tel: 86-769-83081888-808	


Report Number:	ESTE-R2201236
Date of Test:	Dec. 17, 2021~Jan. 18, 2022
Date of Report:	Jan. 21, 2022

TABLE OF CONTENTS

Description	Page
TEST REPORT VERIFICATION.....	3
1. GENERAL INFORMATION.....	5
1.1. Description of Device (EUT).....	5
1.2. The antenna information for EUT.....	7
1.3. Information of RF Cable.....	7
2. SUMMARY OF TEST.....	8
2.1. Summary of test result.....	8
2.2. Test Facilities.....	9
2.3. Measurement uncertainty for EST Technology Co., Ltd.....	10
2.4. Assistant equipment used for test.....	10
2.5. Block Diagram.....	10
2.6. Test Mode.....	11
2.7. Channel List.....	13
2.8. Power Setting of Test Software.....	14
2.9. Duty Cycle of Test Signal.....	15
2.10. Test Equipment List.....	19
3. 6DB BANDWIDTH & 26DB BANDWIDTH & 99% OCCUPIED BANDWIDTH.....	21
3.1. Limit.....	21
3.2. Test Setup.....	21
3.3. Spectrum Analyzer Setting.....	21
3.4. Test Procedure.....	22
3.5. Test Result.....	23
3.6. Test Result.....	25
4. MAXIMUM CONDUCTED OUTPUT POWER.....	46
4.1. Limit.....	46
4.2. Test Setup.....	46
4.3. Test Procedure.....	46
4.4. Test Result.....	47
5. PEAK POWER SPECTRAL DENSITY.....	49
5.1. Limit.....	49
5.2. Test Setup.....	49
5.3. Spectrum Analyzer Setting.....	49
5.4. Test Procedure.....	49
5.5. Test Result.....	50
6. UNWANTED EMISSIONS AND BAND EDGE.....	76
6.1. Limit.....	76
6.2. Test Setup.....	77
6.3. Spectrum Analyzer Setting.....	78
6.4. Test Procedure.....	79
6.5. Test Result.....	80
7. FREQUENCY STABILITY.....	131
7.1. Limit.....	131
7.2. Test Setup.....	131
7.3. Spectrum Analyzer Setting.....	131

7.4.	Test Procedure	132
7.5.	Test Result	133
8.	AC POWER LINE CONDUCTED EMISSIONS	137
8.1.	Limit	137
8.2.	Test Setup	137
8.3.	Spectrum Analyzer Setting	137
8.4.	Test Procedure	137
8.5.	Test Result	138
9.	ANTENNA REQUIREMENTS	142
9.1.	Limit	142
9.2.	Test Result	142
10.	TEST SETUP PHOTO	143
11.	EUT PHOTO	145

EST Technology Co., Ltd.

Applicant:	Hui Zhou Gaoshengda Technology Co.,LTD		
Address:	NO.75 Zhongkai Development Area, Huizhou, Guangdong, China		
Manufacturer:	Hui Zhou Gaoshengda Technology Co.,LTD		
Address:	NO.75 Zhongkai Development Area, Huizhou, Guangdong, China		
Factory:	Hui Zhou Gaoshengda Technology Co.,LTD		
Address:	NO.75 Zhongkai Development Area, Huizhou, Guangdong, China		
E.U.T:	WIFI Module		
Model Number:	WKC12R2501		
Power Supply:	DC 3.3V From PC		
Trade Name:	GSD	Serial No.:	-----
Date of Receipt:	Dec. 17, 2021	Date of Test:	Dec. 17, 2021~Jan. 18, 2022
Test Specification:	FCC Part 15 Subpart E 15.407 ANSI C63.10:2013 FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01 FCC KDB 662911 D01 Multiple Transmitter Output v02r01		
Test Result:	The device described above is tested by EST Technology Co., Ltd. The measurement results were contained in this test report and EST Technology Co., Ltd. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliance with the FCC Rules and Regulations Part 15 Subpart E requirements. This report applies to above tested sample only and shall not be reproduced in part without written approval of EST Technology Co., Ltd. Date: Jan. 21, 2022		
Prepared by:	Reviewed by:	Approved by:	
 Ring Yang / Assistant	 Seven Wang / Engineer	 Iceman Hu / Manager	
Other Aspects:	None.		
Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested			
This test report is based on a single evaluation of one sample of above mentioned products ,It is not permitted to be duplicated in extracts without written approval of EST Technology Co., Ltd.			

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

FCC ID	:	2AC23-WKC12
Product Name	:	WIFI Module
Model Number	:	WKC12R2501
Software Version	:	V01
Hardware Version	:	V01
Operation frequency	:	U-NII-1: 5150 MHz~5250 MHz U-NII-2A: 5250 MHz~5350 MHz U-NII-2C: 5470 MHz~5725 MHz U-NII-3: 5725 MHz~5850 MHz
Number of channel	:	U-NII-1: IEEE 802.11a / n HT20 / ac VHT20: 4 Channels; IEEE 802.11n HT40 / ac VHT40: 2 Channels; IEEE 802.11ac VHT80: 1 Channel. U-NII-2A: IEEE 802.11a / n HT20 / ac VHT20: 4 Channels; IEEE 802.11n HT40 / ac VHT40: 2 Channels; IEEE 802.11ac VHT80: 1 Channel. U-NII-2C: IEEE 802.11a / n HT20 / ac VHT20: 11 Channels; IEEE 802.11n HT40 / ac VHT40: 5 Channels; IEEE 802.11ac VHT80: 2 Channel. U-NII-3: IEEE 802.11a / n HT20 / ac VHT20: 5 Channels; IEEE 802.11n HT40 / ac VHT40: 2 Channels; IEEE 802.11ac VHT80: 1 Channel.
Modulation	:	OFDM(QPSK, BPSK, 16-QAM, 64-QAM,256-QAM)
Transmit Data Rate	:	IEEE 802.11a: 54, 48, 36, 24, 18, 12, 9, 6Mbps; IEEE 802.11n: up 300Mbps; IEEE 802.11ac: up to 866.6Mbps;
Channels Spacing	:	IEEE 802.11a: 20MHz; IEEE 802.11n HT20: 20MHz; IEEE 802.11n HT40: 40MHz; IEEE 802.11ac VHT20: 20MHz; IEEE 802.11ac VHT40: 40MHz; IEEE 802.11ac VHT80: 80MHz;

Transmit Power	:	U-NII-1	IEEE 802.11a: 10.337dBm IEEE 802.11n HT20: 8.506dBm IEEE 802.11n HT40: 10.747dBm IEEE 802.11ac VHT20: 10.567dBm IEEE 802.11ac VHT40: 11.033dBm IEEE 802.11ac VHT80: 11.124dBm
		U-NII-2A	IEEE 802.11a: 15.349dBm IEEE 802.11n HT20: 14.677dBm IEEE 802.11n HT40: 10.996dBm IEEE 802.11ac VHT20: 10.832dBm IEEE 802.11ac VHT40: 11.255dBm IEEE 802.11ac VHT80: 11.452 dBm
		U-NII-2C	IEEE 802.11a: 13.415dBm IEEE 802.11n HT20: 14.799dBm IEEE 802.11n HT40: 12.173dBm IEEE 802.11ac VHT20: 12.274dBm IEEE 802.11ac VHT40: 12.402dBm IEEE 802.11ac VHT80: 12.350dBm
		U-NII-3	IEEE 802.11a: 15.204dBm IEEE 802.11n HT20: 13.839dBm IEEE 802.11n HT40: 12.552dBm IEEE 802.11ac VHT20: 12.600dBm IEEE 802.11ac VHT40: 12.819dBm IEEE 802.11ac VHT80: 13.039dBm
Sample Type	:	Prototype production	

Note:

For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

1.2. The antenna information for EUT

Ant No.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	-	-	PCB	-	4.8
2	-	-	PCB	-	4.8

Remark:

- (1) The EUT can work as CDD mode in IEEE 802.11n and IEEE 802.11ac, and can operate with one spatial stream.
- (2) According to ANSI C63.10:2013 14.4.3.2.5 a):
 $\text{Directional gain} = 4.8\text{dBi} + 10 \times \log(2/1)\text{dB} = 7.81\text{dBi} > 6\text{dBi}$
 So, the output power limit and power spectral density should be reduced.
 For output Power:
 U-NII-1 Limit is $24\text{dBm} - (7.81\text{dBi} - 6\text{dBi}) = 22.19\text{dBm}$
 U-NII-2A&U-NII-2C Limit is $24\text{dBm} - (7.81\text{dBi} - 6\text{dBi}) = 22.19\text{dBm}$
 U-NII-3 Limit is $30\text{dBm} - (7.81\text{dBi} - 6\text{dBi}) = 28.19\text{dBm}$
 For power spectral density:
 U-NII-1 Limit is $11\text{dBm/MHz} - (7.81\text{dBi} - 6\text{dBi}) = 9.19\text{dBm/MHz}$
 U-NII-2A&U-NII-2C Limit is $11\text{dBm/MHz} - (7.81\text{dBi} - 6\text{dBi}) = 9.19\text{dBm/MHz}$
 U-NII-3 Limit is $30\text{dBm}/500\text{KHz} - (7.81\text{dBi} - 6\text{dBi}) = 28.19\text{dBm}/500\text{KHz}$
- (3) After pre-test all antenna configurations, the worst case configuration as list below.
- (4) This information is provided by the applicant.

TX Mode \ ANT No.	SISO Configuration	MIMO Configuration
IEEE 802.11a	ANT 1 and Ant 2	/
IEEE 802.11n HT20	/	ANT1+ANT2
IEEE 802.11n HT40	/	ANT1+ANT2
IEEE 802.11ac VHT20	/	ANT1+ANT2
IEEE 802.11ac VHT40	/	ANT1+ANT2
IEEE 802.11ac VHT80	/	ANT1+ANT2

1.3. Information of RF Cable

Cable Loss(dB)	Provided by
1.0	Hui Zhou Gaoshengda Technology Co.,LTD
Note: 1.The customer declared the loss value of the RF Cable, and the test results of this report only apply to the sample as received. 2. This information is provided by the applicant.	

2. SUMMARY OF TEST

2.1. Summary of test result

Report Section	Description of Test Item	FCC Standard Section	Results
3	6dB Bandwidth & 26dB Bandwidth & 99% Occupied Bandwidth	15.407(a) 15.407(e)	PASS
4	Maximum Conducted Output Power	15.407(a)	PASS
5	Peak Power Spectral Density	15.407(a)	PASS
6	Unwanted Emissions and Band Edge	15.205 15.209 15.407(b)	PASS
7	Frequency Stability	15.407(g)	PASS
8	AC Power Line Conducted Emissions	15.207 15.407(b)(9)	PASS
9	Antenna Requirement	15.203	PASS

Note:

(1) "N/A" denotes test is not applicable in this test report

2.2. Test Facilities

EMC Lab

: Certificated by CNAS, CHINA
Registration No.: L5288
This Certificate is valid until: November 12, 2023

Certificated by FCC, USA
Designation Number: CN1215
This Certificate is valid until: January 31, 2022

Certificated by A2LA, USA
Registration No.: 4366.01
This Certificate is valid until: January 31, 2022

Certificated by Industry Canada
CAB identifier No.: CN0035
This Certificate is valid until: January 31, 2022

Certificated by VCCI, Japan
Registration No.: C-14103; T-20073; R-13663;
R-20103; G-20097
Date of registration: Apr. 20, 2020
This Certificate is valid until: Apr. 19, 2023

Certificated by TUV Rheinland, Germany
Registration No.: UA 50413872 0001
Date of registration: July 31, 2018

Certificated by Intertek
Registration No.: 2011-RTL-L2-64
Date of registration: November 08, 2018

Name of Firm : EST Technology Co., Ltd.

Site Location : Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China

2.3. Measurement uncertainty for EST Technology Co., Ltd.

Test Item	Uncertainty
Uncertainty for Conduction emission test	2.54dB
Uncertainty for Radiation Emission test (30MHz-1GHz)	3.62
Uncertainty for Radiation Emission test (1GHz to 18GHz)	4.86
Uncertainty for spurious emissions test (18GHz to 40GHz)	4.67
Uncertainty for radio frequency	7×10^{-8}
Uncertainty for conducted RF Power	1.08dB
Uncertainty for Power density test	0.26dB
Temperature	$\pm 0.6^{\circ}\text{C}$
Humidity	$\pm 4.0\%$
Volatage DC	$\pm 1.0\%$
Volatage (AC, <10KHz)	$\pm 1.5\%$

Note:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

2.4. Assistant equipment used for test

Item	Equipment	Brand	Model Name/Type No.	FCC ID	Series No.
A	Notebook	-	Thinkpad X280	-	-

Item	Shielded Type	Ferrite Core	Length	Note
-	-	-	-	-

2.5. Block Diagram

For radiated emissions test: EUT was placed on a turn table, which is 0.8 (or 1.5) meter high above ground.



DC 3.3V From PC

(EUT: WIFI Module)

2.6. Test Mode

Pre-scan has been combined all possible modulations and data rates to determine the worst case test mode, the worst case test mode was selected for the final test as listed below.

Test Item	Test Mode	Channel	Modulation	Data rate
6dB Bandwidth	IEEE 802.11a	149/157/165	OFDM	6Mbps
	IEEE 802.11n HT20	149/157/165	OFDM	MCS0
	IEEE 802.11n HT40	151/159	OFDM	MCS0
	IEEE 802.11ac VHT20	149/157/165	OFDM	MCS0
	IEEE 802.11ac VHT40	151/159	OFDM	MCS0
	IEEE 802.11ac VHT80	155	OFDM	MCS0
26dB Bandwidth	IEEE 802.11a	36/40/48/52/60/64/100/116/140	OFDM	6Mbps
	IEEE 802.11n HT20	36/40/48/52/60/64/100/116/140	OFDM	MCS0
	IEEE 802.11n HT40	38/46/54/62/102/114/134	OFDM	MCS0
	IEEE 802.11ac VHT20	36/40/48/52/60/64/100/116/140	OFDM	MCS0
	IEEE 802.11ac VHT40	38/46/54/62/102/114/134	OFDM	MCS0
	IEEE 802.11ac VHT80	42/58/106/122	OFDM	MCS0
99% Occupied Bandwidth	IEEE 802.11a	36/40/48/52/60/64/100/116/140/149/157/165	OFDM	6Mbps
	IEEE 802.11n HT20	36/40/48/52/60/64/100/116/140/149/157/165	OFDM	MCS0
	IEEE 802.11n HT40	38/46/54/62/102/114/134/151/159	OFDM	MCS0
	IEEE 802.11ac VHT20	36/40/48/52/60/64/100/116/140/149/157/165	OFDM	MCS0
	IEEE 802.11ac VHT40	38/46/54/62/102/114/134/151/159	OFDM	MCS0
	IEEE 802.11ac VHT80	42/58/106/122/155	OFDM	MCS0
Maximum Conducted Output Power	IEEE 802.11a	36/40/48/52/60/64/100/116/140/149/157/165	OFDM	6Mbps
	IEEE 802.11n HT20	36/40/48/52/60/64/100/116/140/149/157/165	OFDM	MCS0
	IEEE 802.11n HT40	38/46/54/62/102/114/134/151/159	OFDM	MCS0
	IEEE 802.11ac VHT20	36/40/48/52/60/64/100/116/140/149/157/165	OFDM	MCS0
	IEEE 802.11ac VHT40	38/46/54/62/102/114/134/151/159	OFDM	MCS0
	IEEE 802.11ac VHT80	42/58/106/122/155	OFDM	MCS0

Peak Power Spectral Density	IEEE 802.11a	36/40/48/52/60/64/100/116/140/149/157/165	OFDM	6Mbps
	IEEE 802.11n HT20	36/40/48/52/60/64/100/116/140/149/157/165	OFDM	MCS0
	IEEE 802.11n HT40	38/46/54/62/102/114/134/151/159	OFDM	MCS0
	IEEE 802.11ac VHT20	36/40/48/52/60/64/100/116/140/149/157/165	OFDM	MCS0
	IEEE 802.11ac VHT40	38/46/54/62/102/114/134/151/159	OFDM	MCS0
	IEEE 802.11ac VHT80	42/58/106/122/155	OFDM	MCS0
Unwanted Emissions and Band Edge(Above 1GHz)	IEEE 802.11a	36/40/48/52/60/64/100/116/140/149/157/165	OFDM	6Mbps
	IEEE 802.11n HT20	36/40/48/52/60/64/100/116/140/149/157/165	OFDM	MCS0
	IEEE 802.11n HT40	38/46/54/62/102/114/134/151/159	OFDM	MCS0
	IEEE 802.11ac VHT20	36/40/48/52/60/64/100/116/140/149/157/165	OFDM	MCS0
	IEEE 802.11ac VHT40	38/46/54/62/102/114/134/151/159	OFDM	MCS0
	IEEE 802.11ac VHT80	42/58/106/122/155	OFDM	MCS0
Unwanted Emissions Below 1GHz	IEEE 802.11a	100	OFDM	6Mbps
Frequency Stability	Unmodulation	36/64/100/149	N/A	N/A
AC Power Line Conducted Emissions	IEEE 802.11a	100	OFDM	6Mbps

Note:

1. In radiated measurement, the EUT had been pre-scan on the positioned of each 3 axis(X,Y,Z), the worst case was found when positioned on **X-plane**.

2.7. Channel List

Band	Mode	Channel	Frequency (MHz)
U-NII-1	IEEE 802.11a & n HT20 & ac VHT20	36	5180
		40	5200
		44	5220
		48	5240
	IEEE 802.11n HT40 & ac VHT40	38	5190
		46	5230
	IEEE 802.11ac VHT80	42	5210
U-NII-2A	IEEE 802.11a & n HT20 & ac VHT20	52	5260
		56	5280
		60	5300
		64	5320
	IEEE 802.11n HT40 & ac VHT40	54	5270
		62	5310
	IEEE 802.11ac VHT80	58	5290
U-NII-2C	IEEE 802.11a & n HT20 & ac VHT20	100	5500
		104	5520
		108	5540
		112	5560
		116	5580
		120	5600
		124	5620
		128	5640
		132	5660
		136	5680
		140	5700
	IEEE 802.11n HT40 & ac VHT40	102	5510
		110	5550
		118	5590
		126	5630
		134	5670
	IEEE 802.11ac VHT80	106	5530
		122	5610
U-NII-3	IEEE 802.11a & n HT20 & ac VHT20	149	5745
		153	5765
		157	5785
		161	5805
		165	5825
	IEEE 802.11n HT40 & ac VHT40	151	5755
		159	5795
	IEEE 802.11ac VHT80	155	5775

2.8. Power Setting of Test Software

Software Name	MPTool		
U-NII-1			
Frequency(MHz)	5180	5200	5240
IEEE 802.11a Setting	75	75	75
IEEE 802.11n HT20 Setting	62	62	62
IEEE 802.11ac VHT20 Setting	62	62	62
Frequency(MHz)	5190	5230	
IEEE 802.11n HT40 Setting	70	70	
IEEE 802.11ac VHT40 Setting	70	70	
Frequency(MHz)	5210		
IEEE 802.11ac VHT80 Setting	75		
U-NII-2A			
Frequency(MHz)	5260	5300	5320
IEEE 802.11a Setting	92	92	92
IEEE 802.11n HT20 Setting	86	86	86
IEEE 802.11ac VHT20 Setting	86	86	86
Frequency(MHz)	5270	5310	
IEEE 802.11n HT40 Setting	93	93	
IEEE 802.11ac VHT40 Setting	95	95	
Frequency(MHz)	5290		
IEEE 802.11ac VHT80 Setting	100		
U-NII-2C			
Frequency(MHz)	5500	5580	5700
IEEE 802.11a Setting	86	86	86
IEEE 802.11n HT20 Setting	80	80	80
IEEE 802.11ac VHT20 Setting	83	83	83
Frequency(MHz)	5510	5590	5670
IEEE 802.11n HT40 Setting	90	90	90
IEEE 802.11ac VHT40 Setting	87	87	87
Frequency(MHz)	5530	5610	
IEEE 802.11ac VHT80 Setting	95	95	
U-NII-3			
Frequency(MHz)	5745	5785	5825
IEEE 802.11a Setting	95	95	95
IEEE 802.11n HT20 Setting	85	85	85
IEEE 802.11ac VHT20 Setting	85	85	85
Frequency(MHz)	5755	5795	
IEEE 802.11n HT40 Setting	100	100	
IEEE 802.11ac VHT40 Setting	97	97	
Frequency(MHz)	5775		
IEEE 802.11ac VHT80 Setting	105		

Note: This information is provided by the applicant.


2.9. Duty Cycle of Test Signal

Temperature	25.4℃	Relative Humidity		56%	Test Voltage		DC 3.3V
Mode	Frequency (MHz)	On time (ms)	Total Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T (Hz)	VBW Setting (dB)
IEEE 802.11a	5180	1.40000	1.87826	74.54	1.28	714	714
IEEE 802.11n HT20	5180	1.28696	1.77391	72.55	1.39	777	777
IEEE 802.11ac VHT20	5180	1.29565	1.78261	72.68	1.39	772	772
IEEE 802.11n HT40	5190	0.66087	1.13913	58.02	2.36	1513	1513
IEEE 802.11ac VHT40	5190	0.65217	1.13913	57.25	2.42	1533	1533
IEEE 802.11ac VHT80	5210	0.35652	0.80000	44.57	3.51	2805	2805


Note:

1. Duty Cycle=On Time/Total Time×100%.
2. Duty Factor= $10 \times \log(1/\text{Duty Cycle})$.
3. If duty cycle <98 %, the conducted average output power and average power spectral density should be add duty factor.
4. If duty cycle ≥ 98 %,the EUT is consider to be transmitting continuously,the conducted average output power and average power spectral density no need to add duty factor.
5. The on-time time is transmission duration(T).
6. The VBW Setting is use for RMS measurement in unwanted emissions and band edge(Above 1GHz) test.


IEEE 802.11a 5180MHz

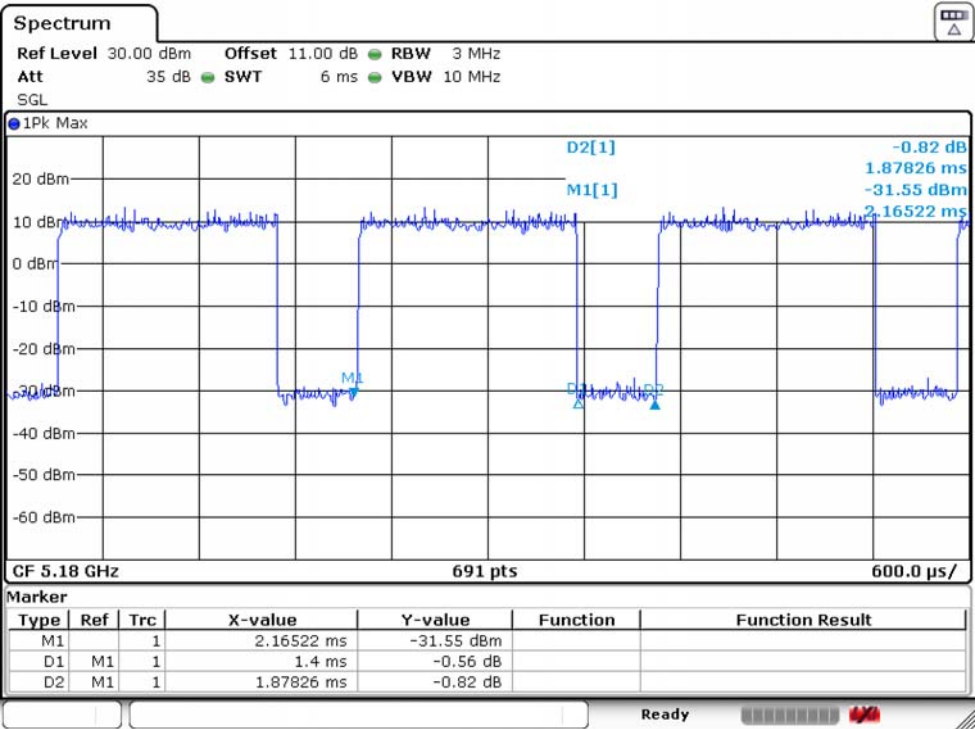


IEEE 802.11n HT20 5180MHz

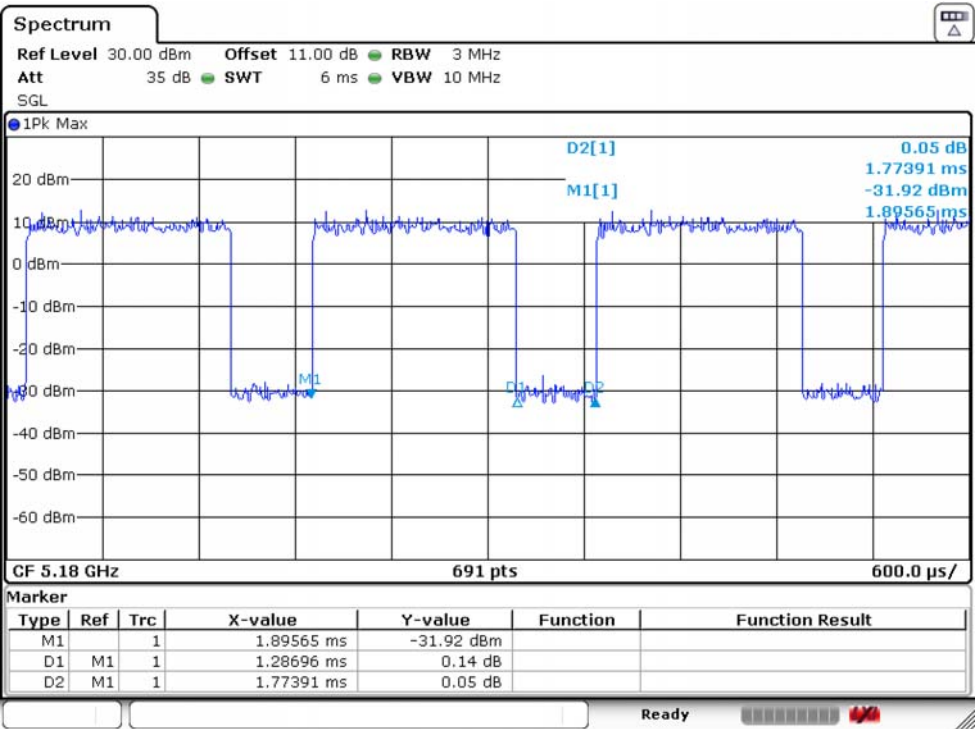


IEEE 802.11n HT40 5190MHz

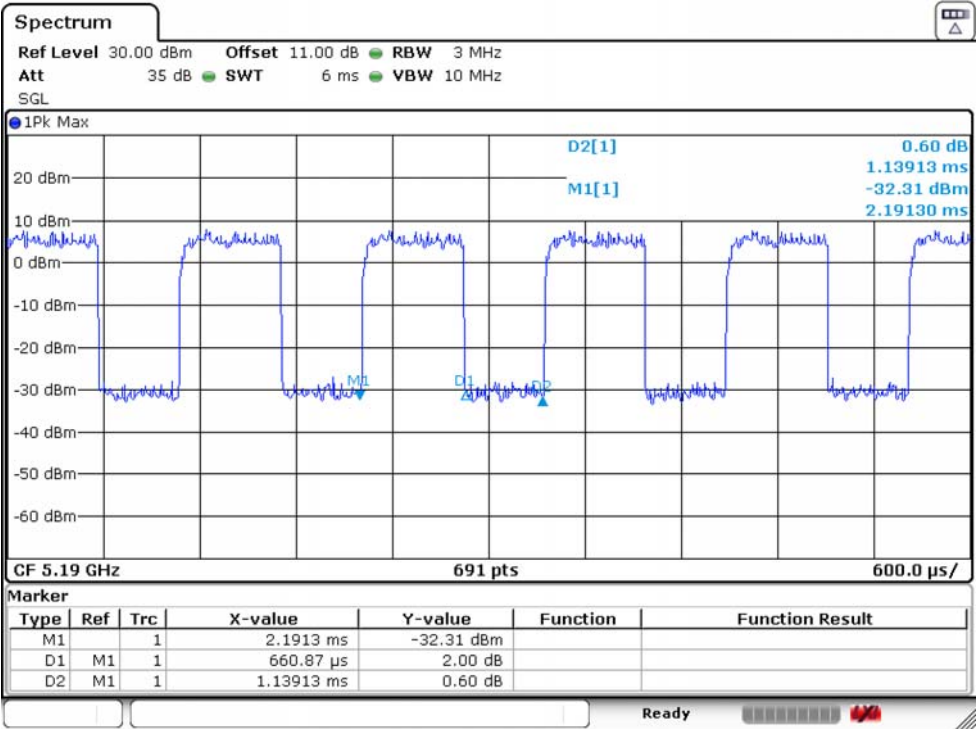


IEEE 802.11ac VHT20 5180MHz

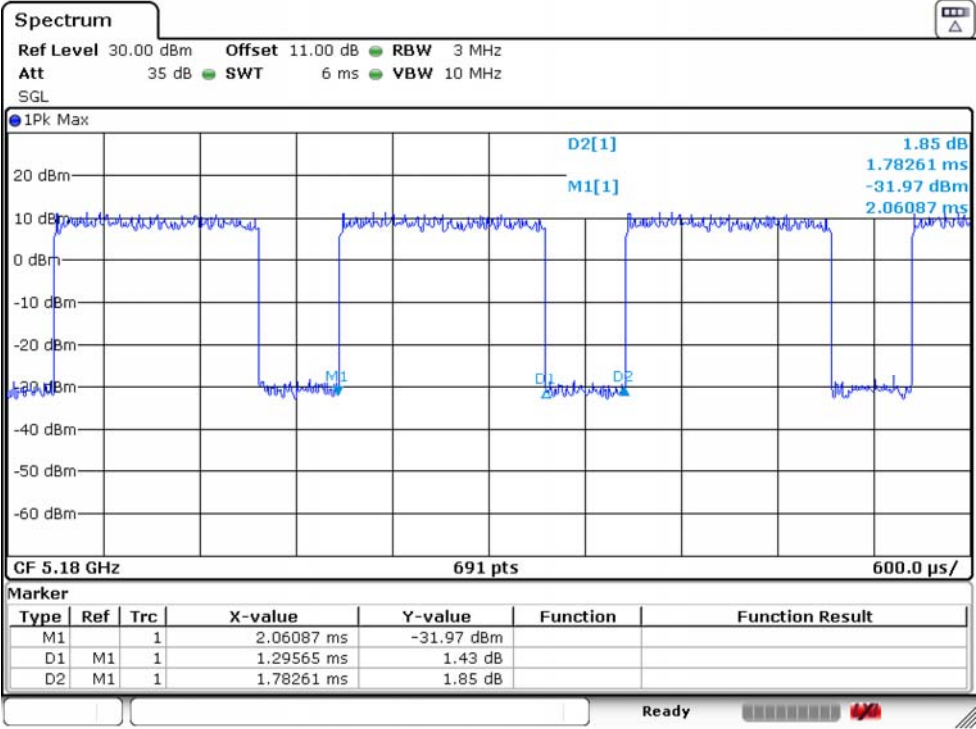

IEEE 802.11ac VHT40 5190MHz

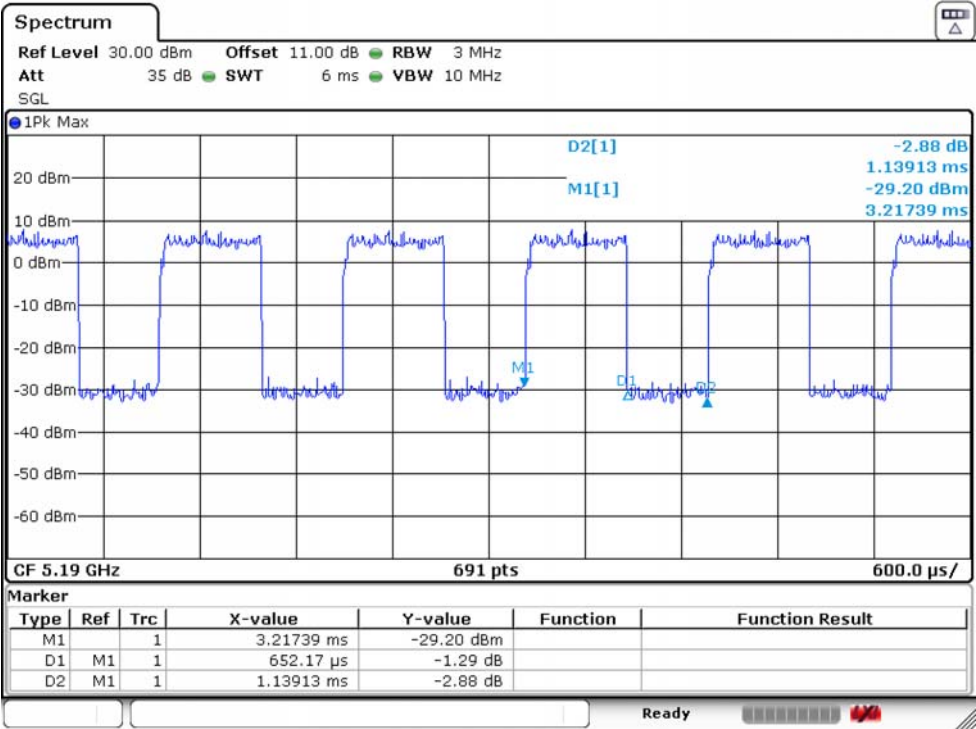

IEEE 802.11ac VHT80 5210MHz

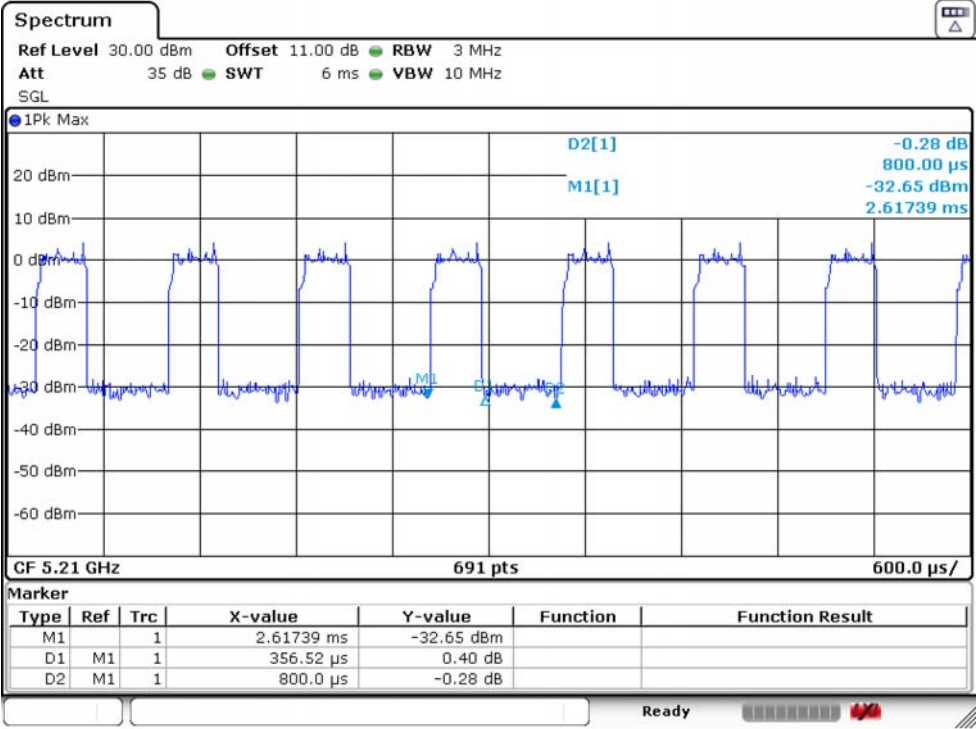

2.10. Test Equipment List

For AC power conducted emissions test						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESHS30	EST-E001	LISAI	June 13,21	1 Year
Artificial Mains Network	Rohde & Schwarz	ENV216	EST-E002	LISAI	June 13,21	1 Year
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	EST-E078	LISAI	June 13,21	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A

For radiated emissions test(9KHz-30MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR7	EST-E047	LISAI	June 13,21	1 Year
Active Loop Antenna	SCHWARZB ECK	FMZB 1519B	EST-E054	LISAI	June 13,21	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
9kHz-30MHz Cable	N/A	EST-001	N/A	N/A	N/A	N/A

For radiated emissions test(30MHz-1000MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR7	EST-E047	LISAI	June 13,21	1 Year
Bilog Antenna	Teseq	CBL 6111D	EST-E034	LISAI	June 13,21	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
30-1000MHz Cable	N/A	EST-002	N/A	N/A	N/A	N/A

For radiated emissions test(Above 1000MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
Horn Antenna	SCHWARZB ECK	BBHA 9120 D	EST-E031	LISAI	June 13,21	1 Year
Signal Amplifier	SCHWARZB ECK	BBV9718	EST-E032	LISAI	June 13,21	1 Year
Spectrum Analyzer	Rohde & Schwarz	FSV40	EST-E069	LISAI	July 19,21	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
Above 1GHz Cable	N/A	EST-003	N/A	N/A	N/A	N/A

For connect EUT antenna terminal test						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
TS 8997	Rohde & Schwarz	/	/	/	/	/
Open Switch and Control Unit	Rohde & Schwarz	OSP-B157WB	EST-E036	LISAI	June 13,21	1 Year
Signal and Spectrum Analyzer	Rohde & Schwarz	FSV	EST-E037	LISAI	June 13,21	1 Year
Signal Generator	Rohde & Schwarz	SMB100A	EST-E038	LISAI	June 13,21	1 Year
Vector Signal Generator	Rohde & Schwarz	SMBV100A	EST-E039	LISAI	June 13,21	1 Year
Test Software	Rohde & Schwarz	WMS32	V10.50.00	N/A	N/A	N/A
Temperature controller	Terchy	MHQ	EST-E101	LISAI	June 13,21	1 Year

3. 6dB BANDWIDTH & 26dB BANDWIDTH & 99% OCCUPIED BANDWIDTH

3.1. Limit

Band	Frequency (MHz)	Test Item	Limit
U-NII-1	5150-5250	26dB Bandwidth&99% Occupied Bandwidth	N/A
U-NII-2A	5250-5350	26dB Bandwidth&99% Occupied Bandwidth	N/A
U-NII-2C	5470-5725	26dB Bandwidth&99% Occupied Bandwidth	N/A
U-NII-3	5725-5850	6dB Bandwidth&99% Occupied Bandwidth	6dB Bandwidth $\geq$ 500KHz

3.2. Test Setup



3.3. Spectrum Analyzer Setting

6dB Bandwidth	
Spectrum Parameters	Setting
RBW	100KHz
VBW	300KHz
Span	40MHz(20MHz Bandwidth mode) 60MHz(40MHz Bandwidth mode) 120MHz(80MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

26dB Bandwidth	
Spectrum Parameters	Setting
RBW	approximately 1% of the emission bandwidth
VBW	>RBW
Span	40MHz(20MHz Bandwidth mode) 60MHz(40MHz Bandwidth mode) 120MHz(80MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

99% Occupied Bandwidth	
Spectrum Parameters	Setting
RBW	1% to 5% of the OBW
VBW	approximately three times the RBW
Span	between 1.5 times and 5.0 times the OBW
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

3.4. Test Procedure

For 26dB Bandwidth Measurement :

- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with section 3.3.
- Set the EUT transmit continuously with maximum output power.
- Allow trace to stabilize, measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
- Repeat above procedures until all modes and channels were measured.
- Record the results in the test report.

For 6dB Bandwidth Measurement :

- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with section 3.3.
- Set the EUT transmit continuously with maximum output power.
- Allow trace to stabilize, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
- Repeat above procedures until all modes and channels were measured.
- Record the results in the test report.

For 99% Occupied Bandwidth Measurement :

- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with section 3.3.
- Set the EUT transmit continuously with maximum output power.
- Allow trace to stabilize, use the 99% power bandwidth function to measure bandwidth.
- Repeat above procedures until all modes and channels were measured.
- Record the results in the test report.

3.5. Test Result

Temperature	25.4℃	Relative Humidity		56%	Test Voltage	DC 3.3V
26dB Bandwidth&99% Occupied Bandwidth						
AND	Test Mode	Fre (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Calculate Power Limit (W)	Calculate Power Limit (dBm)
U-NII-1	IEEE 802.11a	5180	18.698	16.3836	0.2500	23.98
		5200	18.640	16.3437	0.2500	23.98
		5240	18.698	16.3836	0.2500	23.98
	IEEE 802.11n HT20	5180	19.682	17.5425	0.2500	23.98
		5200	19.797	17.5425	0.2500	23.98
		5240	19.566	17.5425	0.2500	23.98
	IEEE 802.11ac VHT20	5180	19.682	17.5425	0.2500	23.98
		5200	19.740	17.5425	0.2500	23.98
		5240	19.682	17.5425	0.2500	23.98
	IEEE 802.11n HT40	5190	41.560	36.5235	0.2500	23.98
		5230	41.560	36.5235	0.2500	23.98
	IEEE 802.11ac VHT40	5190	41.220	36.3636	0.2500	23.98
		5230	41.100	36.2837	0.2500	23.98
	IEEE 802.11ac VHT80	5210	81.270	74.5586	0.2500	23.98
U-NII-2A	IEEE 802.11a	5260	18.698	16.3437	0.2354	23.72
		5300	18.582	16.4236	0.2339	23.69
		5320	18.640	16.3836	0.2347	23.70
	IEEE 802.11n HT20	5260	19.624	17.5425	0.2471	23.93
		5300	19.740	17.5425	0.2485	23.95
		5320	19.508	17.5425	0.2456	23.90
	IEEE 802.11ac VHT20	5260	19.682	17.5824	0.2478	23.94
		5300	19.682	17.5824	0.2478	23.94
		5320	19.624	17.5425	0.2471	23.93
	IEEE 802.11n HT40	5270	41.450	36.2837	0.2500	23.98
		5310	41.560	36.2837	0.2500	23.98
	IEEE 802.11ac VHT40	5270	41.220	36.4436	0.2500	23.98
		5310	41.330	36.5235	0.2500	23.98
	IEEE 802.11ac VHT80	5290	81.270	74.7902	0.2500	23.98

Temperature	24.7℃	Relative Humidity		53%	Test Voltage	120V/60 Hz
26dB Bandwidth&99% Occupied Bandwidth						
AND	Test Mode	Fre (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Calculate Power Limit (W)	Calculate Power Limit (dBm)
U-NII-2C	IEEE 802.11a	5500	18.640	16.3437	0.2347	23.70
		5580	18.698	16.3437	0.2354	23.72
		5700	18.929	16.4236	0.2383	23.77
	IEEE 802.11n HT20	5500	19.624	17.5425	0.2471	23.93
		5580	19.624	17.5425	0.2471	23.93
		5700	19.624	17.5824	0.2471	23.93
	IEEE 802.11ac VHT20	5500	19.682	17.5425	0.2478	23.94
		5580	19.740	17.5425	0.2485	23.95
		5700	19.624	17.5824	0.2471	23.93
	IEEE 802.11n HT40	5510	41.330	36.4436	0.2500	23.98
		5590	41.560	36.5235	0.2500	23.98
		5670	41.790	36.6034	0.2500	23.98
	IEEE 802.11ac VHT40	5510	41.220	36.2837	0.2500	23.98
		5590	41.330	36.3636	0.2500	23.98
		5670	41.100	36.3636	0.2500	23.98
	IEEE 802.11ac VHT80	5530	81.510	74.7902	0.2500	23.98
		5610	81.510	74.5586	0.2500	23.98

Temperature	25.4℃	Relative Humidity		56%	Test Voltage	DC 3.3V
6dB Bandwidth&99% Occupied Bandwidth						
BAND	Test Mode	Fre (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	6dB BW Min Limit (MHz)	Result
U-NII-3	IEEE 802.11a	5745	16.264	16.3836	0.5	PASS
		5785	16.344	16.3836	0.5	PASS
		5825	16.344	16.3437	0.5	PASS
	IEEE 802.11n HT20	5745	17.542	17.5425	0.5	PASS
		5785	17.542	17.5425	0.5	PASS
		5825	17.542	17.5425	0.5	PASS
	IEEE 802.11ac VHT20	5745	17.542	17.5425	0.5	PASS
		5785	17.542	17.5824	0.5	PASS
		5825	17.542	17.5824	0.5	PASS
	IEEE 802.11n HT40	5755	35.165	36.6034	0.5	PASS
		5795	35.245	36.5235	0.5	PASS
	IEEE 802.11ac VHT40	5755	35.165	36.4436	0.5	PASS
		5795	35.245	36.3636	0.5	PASS
	IEEE 802.11ac VHT80	5775	75.120	74.5586	0.5	PASS


Note :

For Band U-NII-2A and U-NII-2C, the maximum conducted output power limit is 250mw or $11+10 \times \log B$, which is lesser, where B is the 26dB Bandwidth in MHz. So in this section, the maximum conducted output power limit can calculate with 26dB Bandwidth.


3.6. Test Result

U-NII-1 IEEE 802.11a 5180MHz

26dB Bandwidth

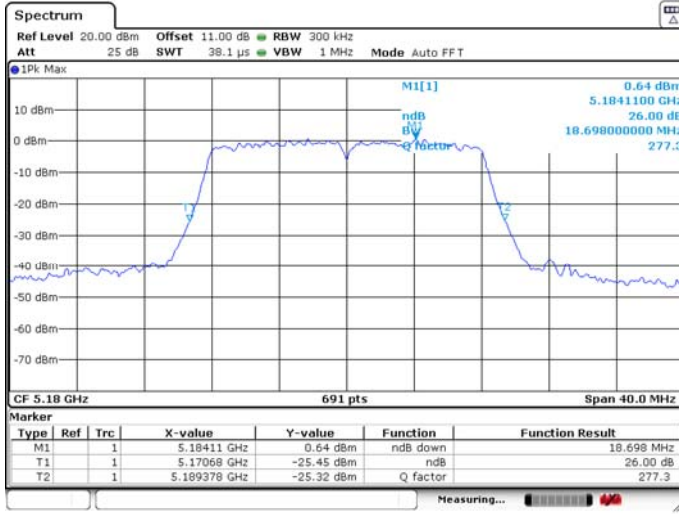


99% Occupied Bandwidth

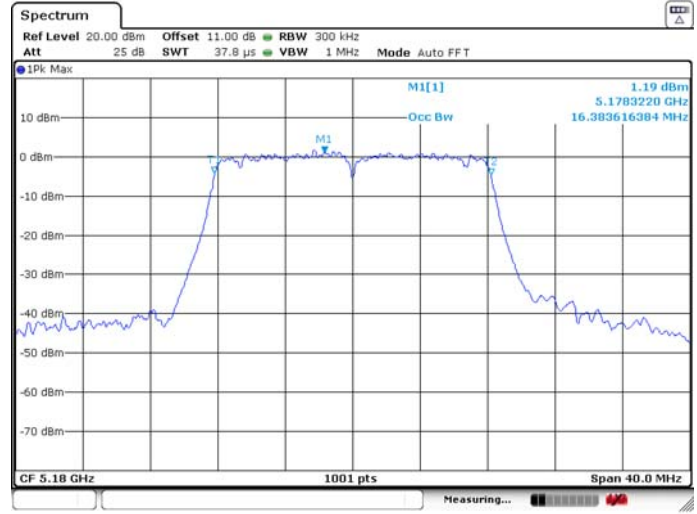


U-NII-1 IEEE 802.11a 5200MHz

26dB Bandwidth

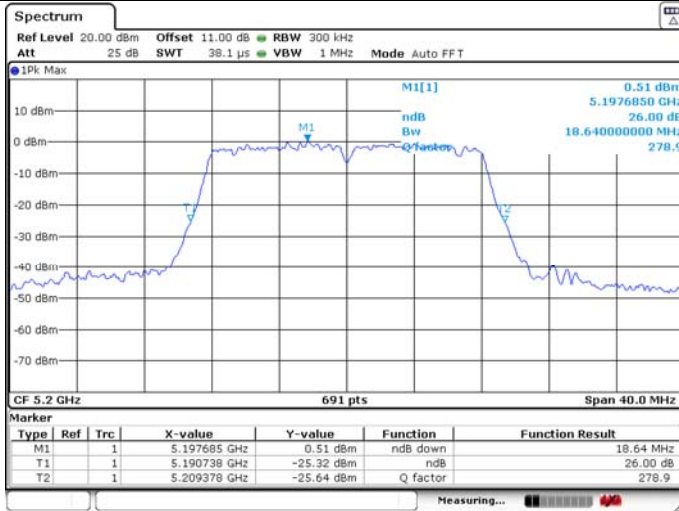


99% Occupied Bandwidth

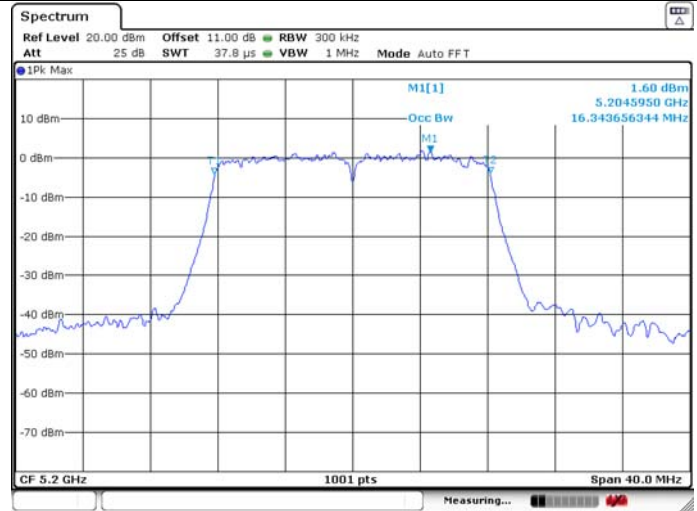







U-NII-1 IEEE 802.11a 5240MHz

26dB Bandwidth

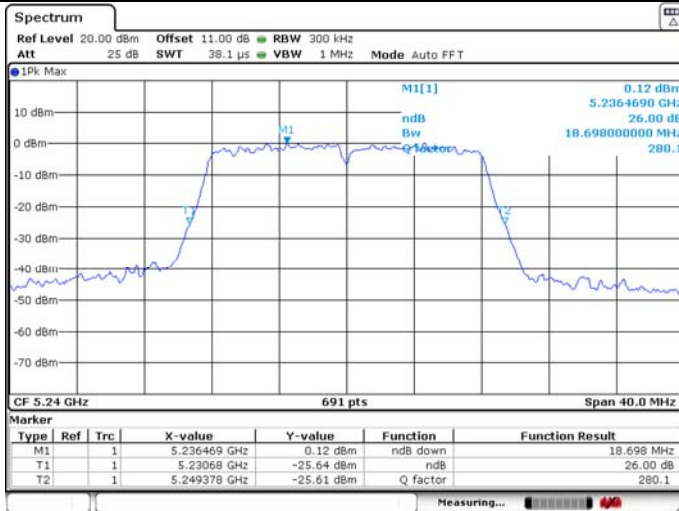


99% Occupied Bandwidth

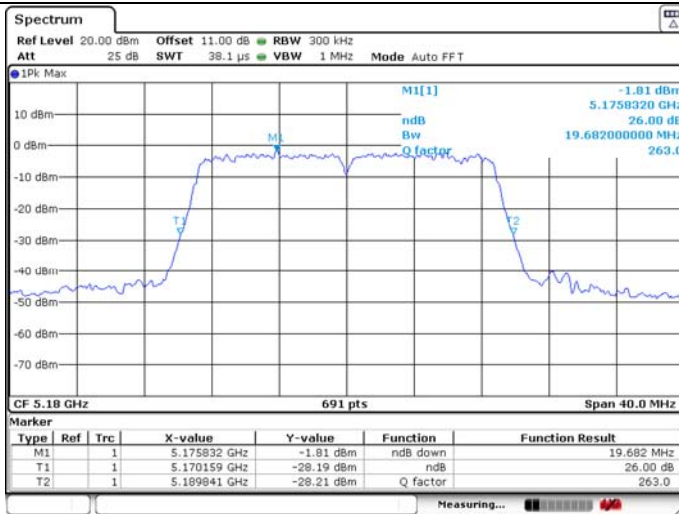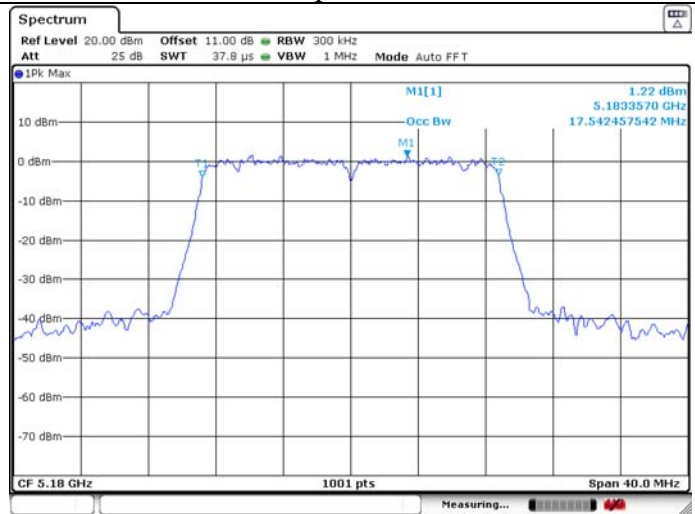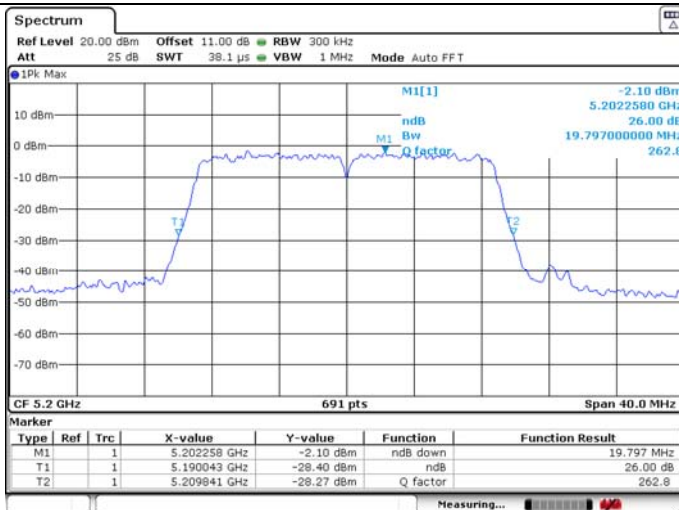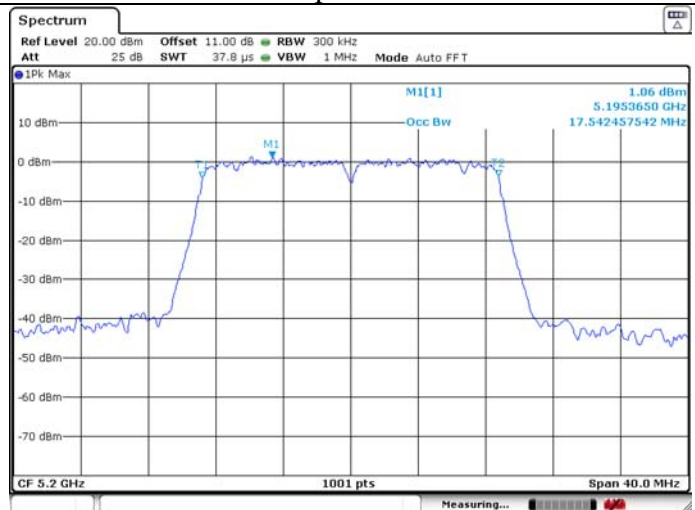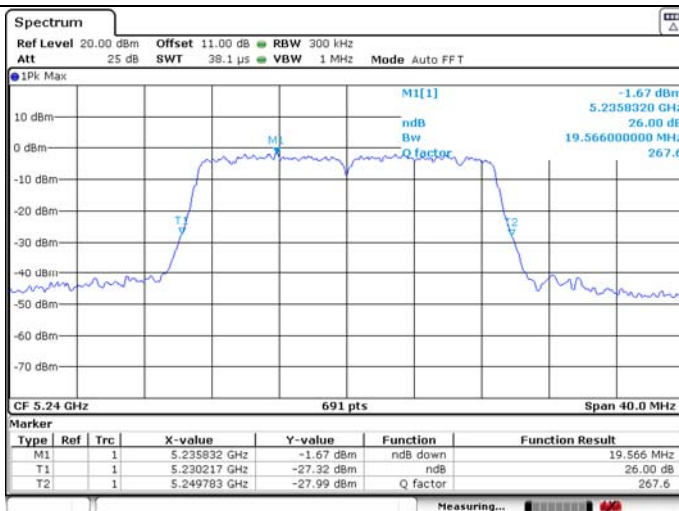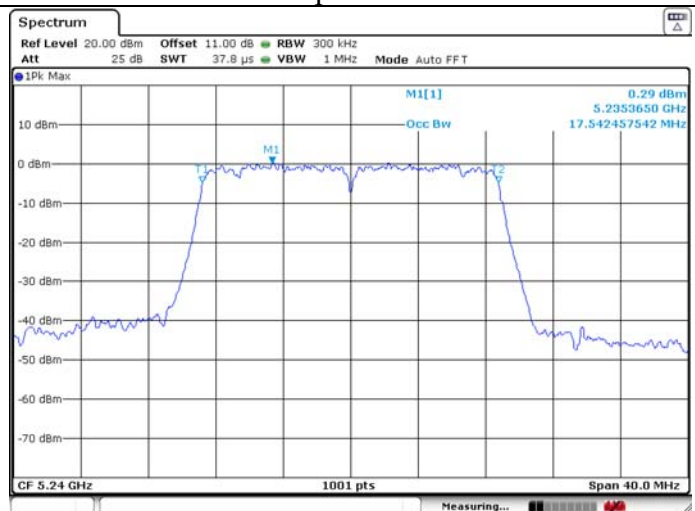

U-NII-1 IEEE 802.11n HT20 5180MHz**26dB Bandwidth****99% Occupied Bandwidth****U-NII-1 IEEE 802.11n HT20 5200MHz****26dB Bandwidth****99% Occupied Bandwidth****U-NII-1 IEEE 802.11n HT20 5240MHz****26dB Bandwidth****99% Occupied Bandwidth**

U-NII-1 IEEE 802.11ac VHT20 5180MHz

26dB Bandwidth

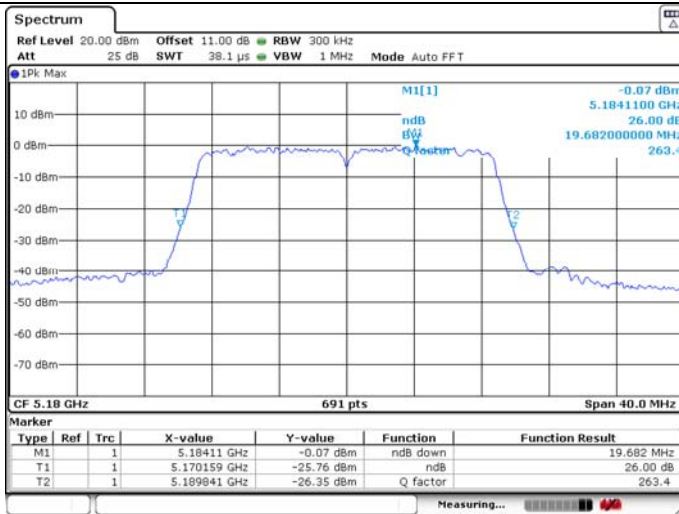


99% Occupied Bandwidth




U-NII-1 IEEE 802.11ac VHT20 5200MHz

26dB Bandwidth

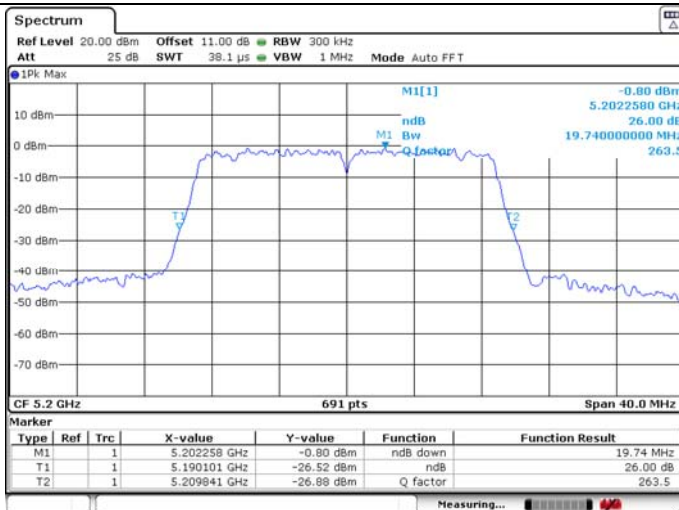


99% Occupied Bandwidth

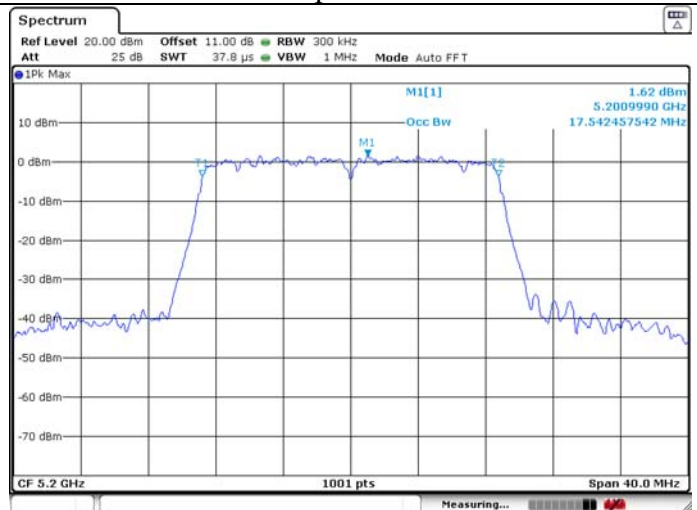




U-NII-1 IEEE 802.11ac VHT20 5240MHz


26dB Bandwidth

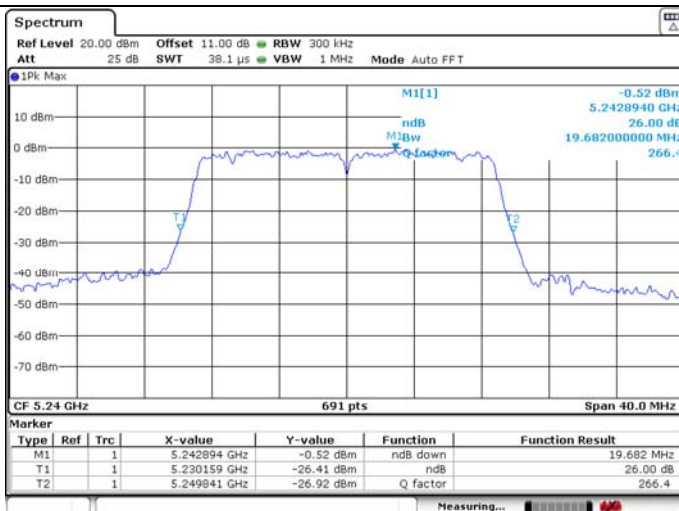

99% Occupied Bandwidth

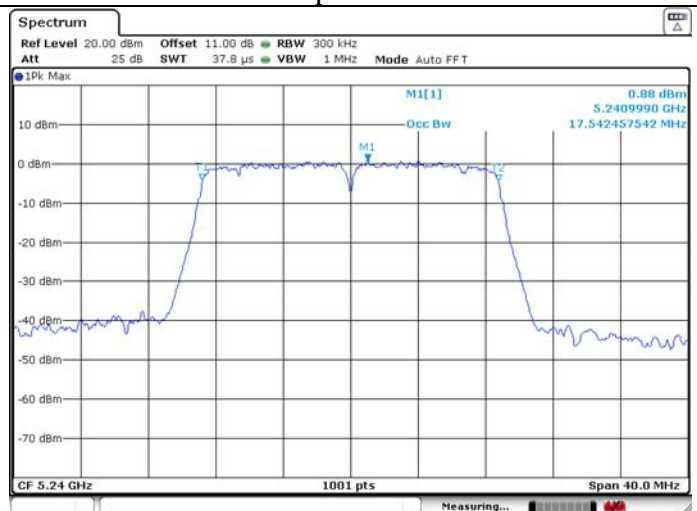


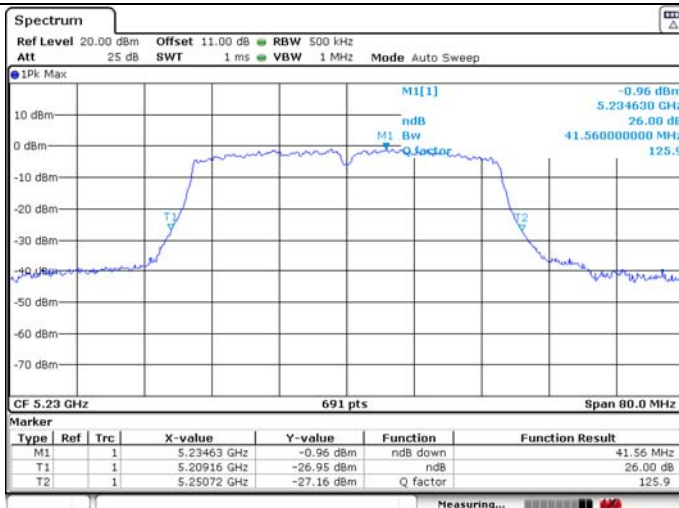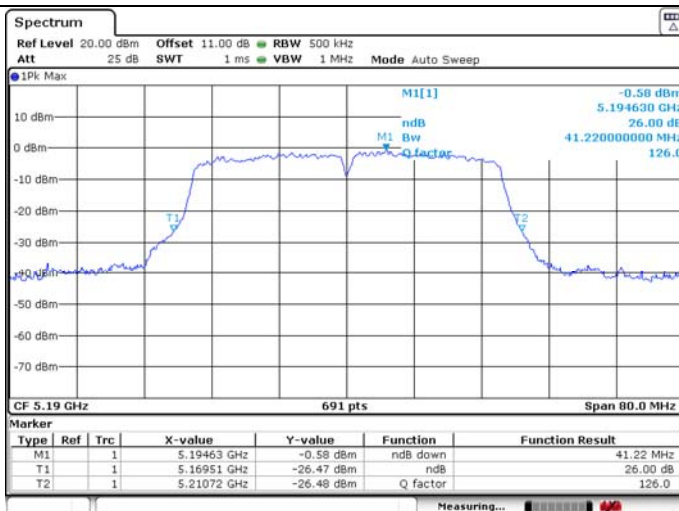U-NII-1 IEEE 802.11n HT40 5190MHz**26dB Bandwidth****99% Occupied Bandwidth****U-NII-1 IEEE 802.11n HT40 5230MHz****26dB Bandwidth****99% Occupied Bandwidth****U-NII-1 IEEE 802.11ac VHT40 5190MHz****26dB Bandwidth****99% Occupied Bandwidth**

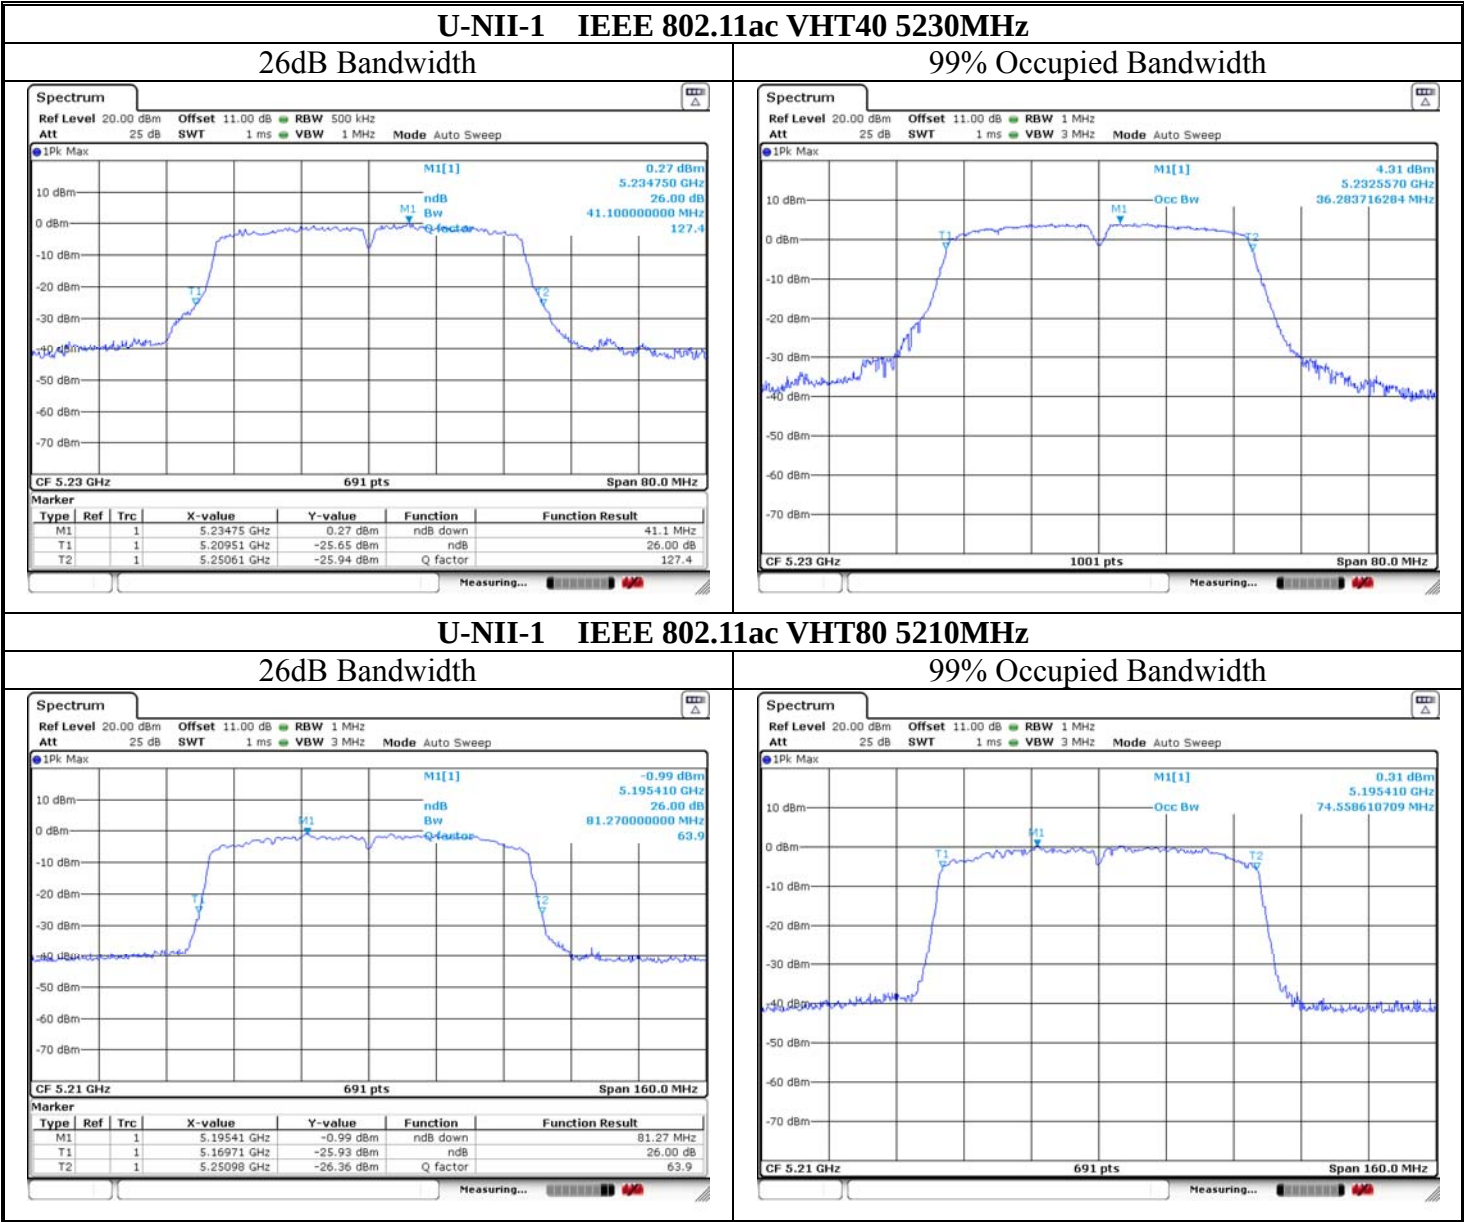


U-NII-2A IEEE 802.11a 5260MHz

26dB Bandwidth

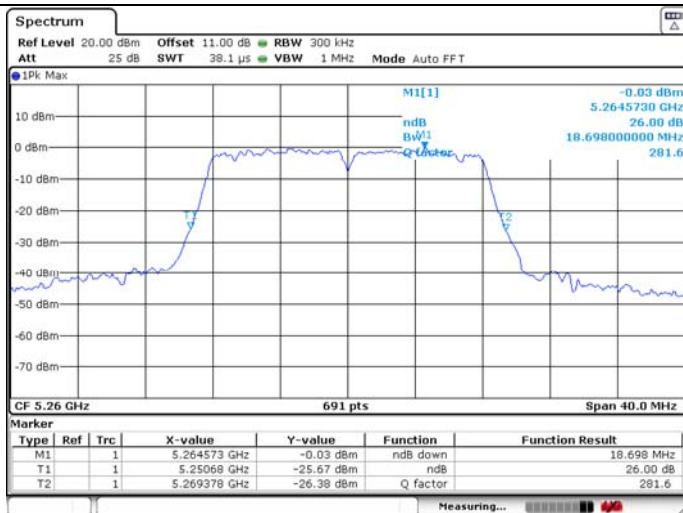


99% Occupied Bandwidth

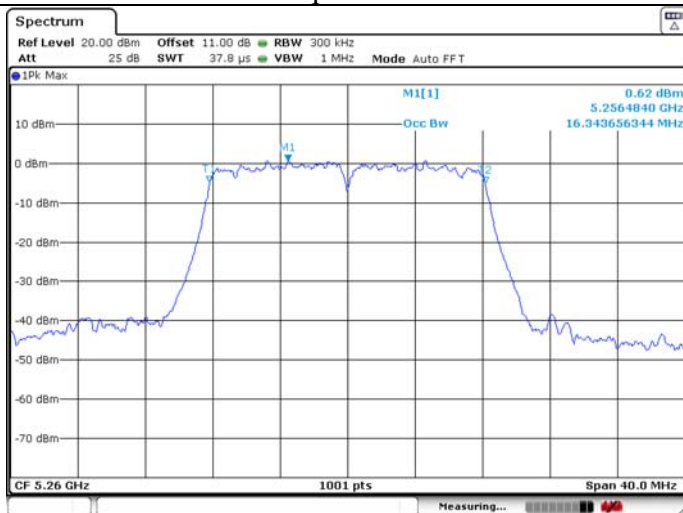


U-NII-2A IEEE 802.11a 5300MHz

26dB Bandwidth

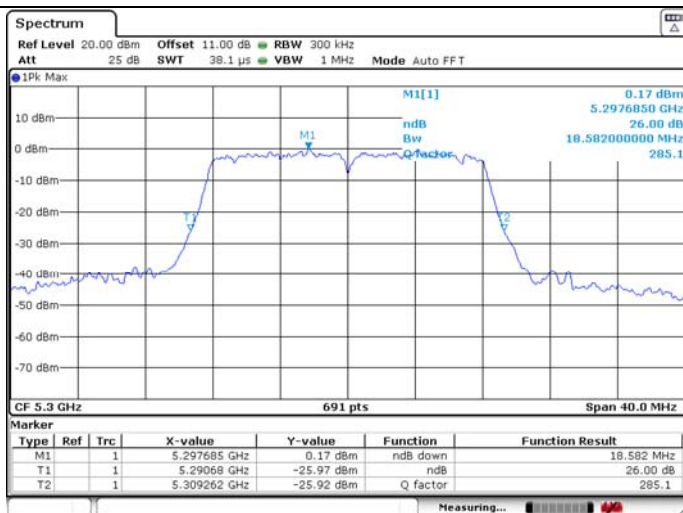


99% Occupied Bandwidth

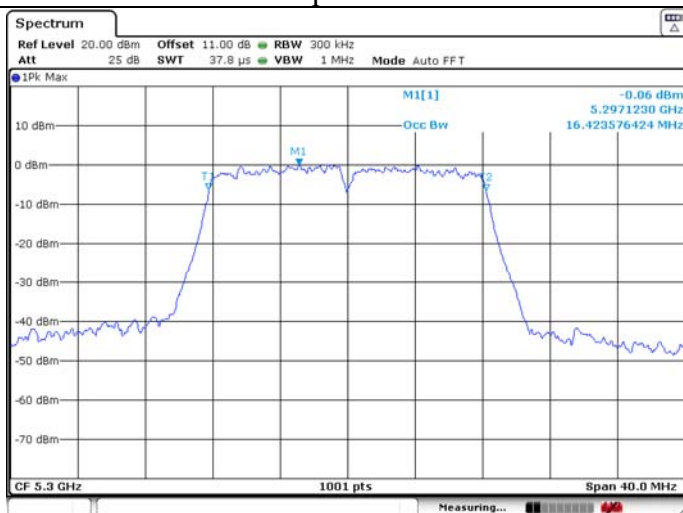

U-NII-2A IEEE 802.11a 5320MHz

26dB Bandwidth

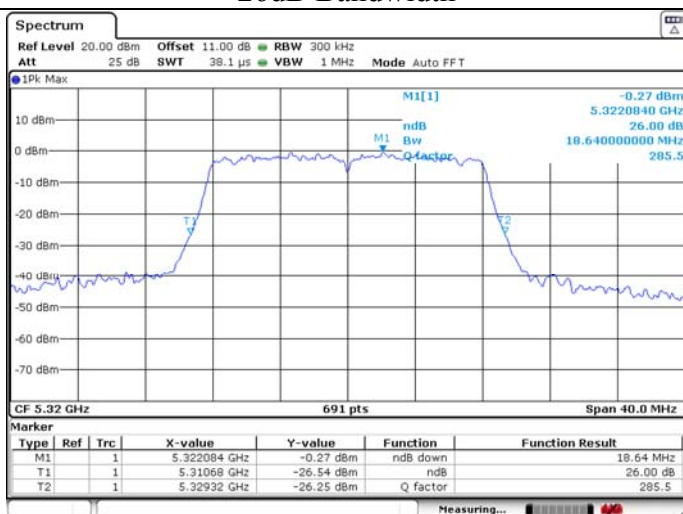

99% Occupied Bandwidth

